

**Amber Helm Development L.C.**  
92723 Michigan Hwy-152  
Sister Lakes, Michigan 49047 USA  
Tel: 888-847-8027

**AWLTINT-WR2432TXA**  
Issued: December 20, 2024

## DTS Test Report

regarding

USA: CFR Title 47, Part 15.247 (Emissions)  
Canada: ISED RSS-247v3 (Emissions)

for



**47723023**

Category: DTS Transceiver

Judgments:

Aligns with FCC Part 15.247 and ISED RSS-247v3  
Testing Completed: December 19, 2024



Prepared for:

**Allegion, PLC**

11819 North Pennsylvania Street, Carmel Indiana 46032 USA  
Phone: +1 (317) 810-3362, Fax: +1 (317) 810-3193  
Contact: Frank Nardelli, Frank.Nardelli@allegion.com

Data Rec./Rev. by:

*John Nantz*  
John Nantz  
*John Nantz*  
John Nantz

Rpt. Auth. by:

*John A. B.*  
Dr. Joseph Brunett, EMC-002790-NE

Rpt. Prep./Rev. by:

Date of Issue: December 20, 2024

## Revision History

Rev. No.	Date	Details	Revised By
r0	December 20, 2024	Initial Draft.	J. Nantz
r1	January 21, 2025	Minor corr.	J. Brunett
r2	February 14, 2025	Minor corr.	J. Nantz

## Contents

<b>Revision History</b>	<b>2</b>
<b>Table of Contents</b>	<b>2</b>
<b>1 Test Report Scope and Limitations</b>	<b>4</b>
1.1 Laboratory Authorization . . . . .	4
1.2 Report Retention . . . . .	4
1.3 Subcontracted Testing . . . . .	4
1.4 Test Data . . . . .	4
1.5 Limitation of Results . . . . .	4
1.6 Copyright . . . . .	4
1.7 Endorsements . . . . .	4
1.8 Test Location . . . . .	5
1.9 Traceability and Equipment Used . . . . .	5
<b>2 Test Specifications and Procedures</b>	<b>6</b>
2.1 Test Specification and General Procedures . . . . .	6
<b>3 Configuration and Identification of the Equipment Under Test</b>	<b>7</b>
3.1 Description and Declarations . . . . .	7
3.1.1 EUT Configuration . . . . .	8
3.1.2 Modes of Operation . . . . .	8
3.1.3 Variants . . . . .	8
3.1.4 Test Samples . . . . .	8
3.1.5 Functional Exerciser . . . . .	8
3.1.6 Modifications Made . . . . .	9
3.1.7 Production Intent . . . . .	9
3.1.8 Declared Exemptions and Additional Product Notes . . . . .	9
<b>4 Emissions</b>	<b>10</b>
4.1 General Test Procedures . . . . .	10
4.1.1 Radiated Test Setup and Procedures . . . . .	10
4.1.2 Power Supply Variation . . . . .	12
4.2 Intentional Emissions . . . . .	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation . . . . .	13
4.2.2 Fundamental Emission Bandwidth . . . . .	16
4.2.3 Effective Isotropic Radiated Power . . . . .	20
4.2.4 Power Spectral Density . . . . .	24
4.3 Unintentional Emissions . . . . .	28
4.3.1 Restricted Band Transmit Chain Spurious Emissions . . . . .	28
4.3.2 OOB Transmit Chain Spurious Emissions . . . . .	32
<b>5 Measurement Uncertainty and Accreditation Documents</b>	<b>34</b>

## List of Tables

1.8.0 Test Site List. . . . .	5
1.9.0 Equipment List. . . . .	5
3.1.0 EUT Declarations. . . . .	7
4.2.1 Pulsed Emission Characteristics (Duty Cycle). . . . .	13
4.2.2 Intentional Emission Bandwidth. . . . .	16
4.2.3 Tx. Power Results. . . . .	20
4.2.4 Power Spectral Density Results. . . . .	24
4.3.1 (i) Transmit Chain Spurious Emissions. . . . .	28
4.3.1 (ii) Transmit Chain Spurious Emissions. . . . .	29
4.3.1 (iii) Transmit Chain Spurious Emissions. . . . .	29
4.3.1 (iv) Transmit Chain Spurious Emissions. . . . .	30
4.3.1 (v) Transmit Chain Spurious Emissions. . . . .	30
4.3.1 (vi) Transmit Chain Spurious Emissions. . . . .	31
5.0.0 Measurement Uncertainty. . . . .	34

## List of Figures

3.1.0 Photos of EUT. . . . .	7
3.1.1 EUT Test Configuration Diagram. . . . .	8
4.1.1 Radiated Emissions Diagram of the EUT. . . . .	10
4.1.1 Radiated Emissions Test Setup Photograph(s). . . . .	11
4.2.1 (i) Example Pulsed Emission Characteristics (Duty Cycle). . . . .	13
4.2.1 (ii) Example Pulsed Emission Characteristics (Duty Cycle). . . . .	14
4.2.1 (iii) Example Pulsed Emission Characteristics (Duty Cycle). . . . .	15
4.2.2 (i) Example Intentional Emission Bandwidth Plots. . . . .	17
4.2.2 (ii) Example Intentional Emission Bandwidth Plots. . . . .	18
4.2.2 (iii) Example Intentional Emission Bandwidth Plots. . . . .	19
4.2.3 (i) Conducted RF Power Plots . . . . .	21
4.2.3 (ii) Conducted RF Power Plots . . . . .	22
4.2.3 (iii) Conducted RF Power Plots . . . . .	23
4.2.4 (i) Power Spectral Density Plots. . . . .	25
4.2.4 (ii) Power Spectral Density Plots. . . . .	26
4.2.4 (iii) Power Spectral Density Plots. . . . .	27
4.3.2 (i) Worst Case Transmitter OOB Emissions Measured. . . . .	32
4.3.2 (ii) Worst Case Transmitter OOB Emissions Measured. . . . .	33
5.0.0 Accreditation Documents . . . . .	34

## 1 Test Report Scope and Limitations

### 1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

### 1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until January 2035.

### 1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

### 1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

### 1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

### 1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

### 1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

## 1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1.8.0 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1.8.0 Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSD

## 1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 1.9.0. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards. All equipment is evaluated on a cycle no greater than 12 months following laboratory validation procedures and is calibrated following manufacturer recommended intervals.

Table 1.9.0 Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2025
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2025
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / March-2025
3.5-3.5MM Coax	Coax / Coax	001	CAB018-WHT	AHD / March-2025
6dB Attenuator	Pasternack / PE7087-6	1	ATTEN01	AHD / On-Use
Spectrum Analyzer	R & S / FSV30	101660	RSFSV3001	RS / Apr-2025
Spectrum Analyzer	R & S / FSW67	103233	RSFSW67	RS / Sept-2025
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2025
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / On Use

## 2 Test Specifications and Procedures

## 2.1 Test Specification and General Procedures

The goal of Allegion, PLC is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Allegion, PLC 47723023 for compliance to:

Country/Region/Manu.	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247
Canada	ISED Canada	ISED RSS-247v3

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	”Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”
ANSI C63.10:2020	”American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
KDB 558074 D01 v05r02	”GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES ”
KDB 662911 D01v02r01	”Emissions Testing of Transmitters with Multiple Outputs in the Same Band”
KDB 662911 D02 v01	”MIMO with Cross-Polarized Antenna”
WR-ITP0102RA	”AHD Internal Document - Radiated Emissions Test Method”
WR-ITP0101LC	”AHD Internal Document - Conducted Emissions Test Method”

### 3 Configuration and Identification of the Equipment Under Test

#### 3.1 Description and Declarations

The EUT is a key free access control module. The EUT is approximately 14 x 7.5 x 6 cm max. in dimension, and is depicted in Figure 3.1.0 . It is powered by 6 Vdc internal battery power. This product is used as an access reader to enable key free door access. Table 3.1.0 outlines provider declared EUT specifications.



Figure 3.1.0 Photos of EUT.

Table 3.1.0 EUT Declarations.

#### General Declarations

<b>Equipment Type:</b>	DTS Transceiver
<b>Country of Origin:</b>	USA
<b>Nominal Supply:</b>	6 Vdc
<b>Oper. Temp Range:</b>	Not Declared
<b>Frequency Range:</b>	2402 – 2480 MHz
<b>Antenna Dimension:</b>	Not Declared
<b>Antenna Type:</b>	Integral PCB Trace
<b>Antenna Gain:</b>	3.3 dBi
<b>Number of Channels:</b>	40 (BLE), 16 (THREAD)
<b>Channel Spacing:</b>	2 MHz (BLE), 5 MHz (THREAD)
<b>Alignment Range:</b>	Not Declared
<b>Type of Modulation:</b>	BLE = GFSK (0.125, 0.500, 1, and 2 Mbps), THREAD = O-QPSK (0.250 Mbps)

#### United States

<b>FCC ID Number:</b>	XPB-SENSEPRO2
<b>Classification:</b>	DTS

#### Canada

<b>IC Number:</b>	8053B-SENSEPRO2
<b>Classification:</b>	Other

### 3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 3.1.1 .

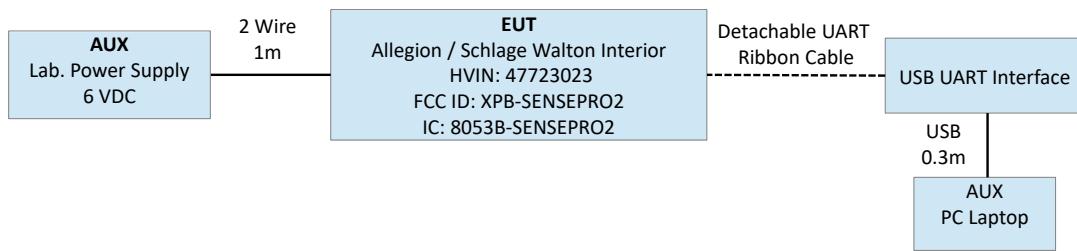


Figure 3.1.1 EUT Test Configuration Diagram.

### 3.1.2 Modes of Operation

The EUT includes a single onboard DTS radio capable of BLE (125k LE Coded, 500k LE Coded, 1 Mbps, and 2 Mbps modulations) and THREAD (0.250 Mbps modulation), all of which are tested herein. The EUT was placed into maximum possible transmission on-time and measured in line with DTS guidelines. In addition to its BLE/THREAD radio functionality, the EUT also populates a co-located WLAN radio (addressed in AHD Report No. AWLTINT-WR2432TXB). The BLE and THREAD modulations are not capable of simultaneous transmission, but the BLE/THREAD radio and the co-populated WLAN radio is capable of simultaneous transmission for which the intermodulation products are examined in this report.

### 3.1.3 Variants

There is only a single version of the EUT.

### 3.1.4 Test Samples

Two samples of the EUT were provided for BLE/THREAD testing, one modified for conducted measurements via an SMA coax connection (SN: DV3) and one normal sample without modification (SN: INT1). Both samples were capable of CW and modulated BLE radio transmissions via a PC serial UART interface that could be attached and then detached from the EUT during testing.

### 3.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

### 3.1.6 Modifications Made

In order to meet the requirements, the following BLE power level settings were selected in pretesting: Power Setting 125k LE = 15, 500k LE = 16, 1 Mbps = 20 and 2 Mbps = 20. For THREAD the power level setting used was 20.

### 3.1.7 Production Intent

The EUT appears to be a production ready sample.

### 3.1.8 Declared Exemptions and Additional Product Notes

In addition to its BLE/THREAD radio functionality, the EUT is also co-located with an onboard LAN radio (addressed in AHD Report No. AWLTINT-WR2432TXB). The integral BLE/THREAD + WLAN radios are capable of simultaneous transmission. Furthermore, the EUT may be co-located with the manufacturer's radio device placed on the exterior (keypad) side of the door (FCC ID: XPB-SENSEPRO1, IC: 8053B-SENSEPRO1), and is evaluated for multi-transmitter co-location with Spurious digital emissions in AHD Report No. AWLTKEY-WR2431TXD.

## 4 Emissions

### 4.1 General Test Procedures

#### 4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 4.1.1. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

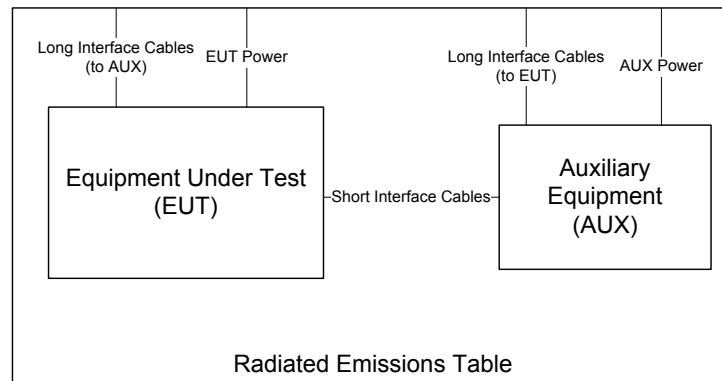


Figure 4.1.1 Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISED RSS-102.NS.MEAS are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.1.1.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dB $\mu$ V/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

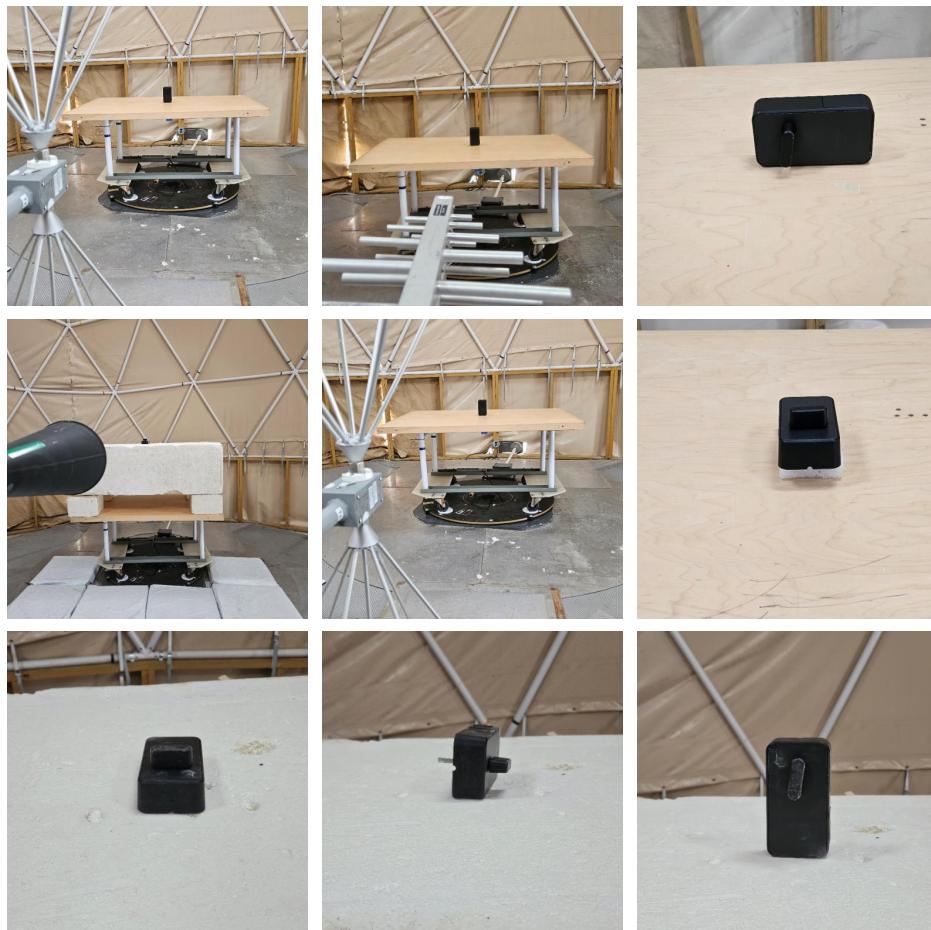


Figure 4.1.1 Radiated Emissions Test Setup Photograph(s).

#### 4.1.2 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than  $\pm 10\%$  of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

## 4.2 Intentional Emissions

### 4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4.2.1. Plots showing the measurements made to obtain these values are provided in Figure 4.2.1.

Table 4.2.1 Pulsed Emission Characteristics (Duty Cycle).

Test Date: 5-Nov-24  
 Test Engineer: John Nantz  
 EUT Allegion 47723023  
 Meas. Distance: Conducted

Test Mode Pulsed Operation / Average Measurement Duty Cycle							
R0	Mode	Data Rate Mbps	Voltage V	Oper. Freq MHz	Pulse Length ms	Pulse Period ms	Duty Cycle %
R1	BLE	0.125	6.0	2440.0	17.1	17.5	97.8
R2		0.500	6.0	2440.0	4.5	5.0	89.5
R3		1.000	6.0	2440.0	2.2	2.5	86.0
R4		2.000	6.0	2440.0	1.1	1.9	58.2
R5	THREAD	2.000	6.0	2440.0	1.0	1.0	100.0
#	C1	C3	C4	C5	C6	C7	C8
(ROW)	(COLUMN)	NOTE					
R0	C8	Duty Cycle is measured in line with DTS guidance 558074 D01 v5 r02 section 6(b) for averaging only over full-power transmission pulses.					

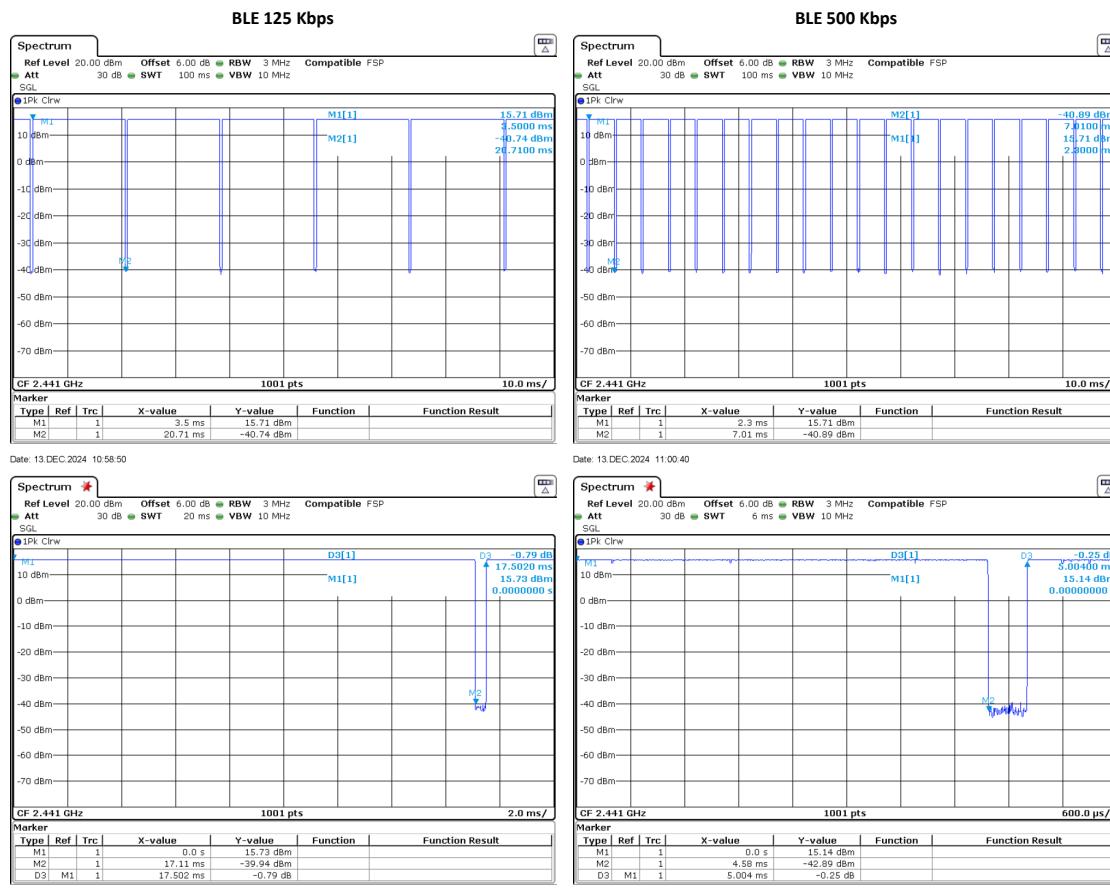


Figure 4.2.1 (i) Example Pulsed Emission Characteristics (Duty Cycle).

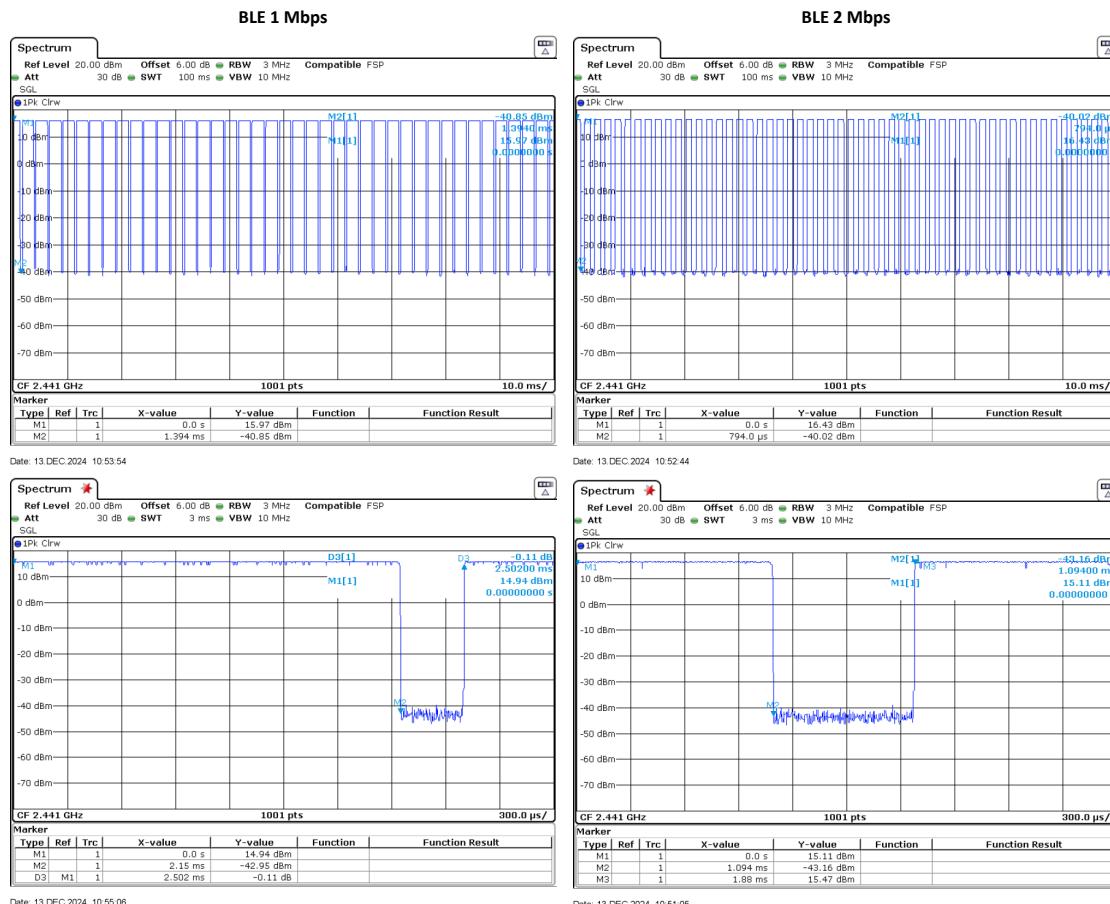


Figure 4.2.1 (ii) Example Pulsed Emission Characteristics (Duty Cycle).

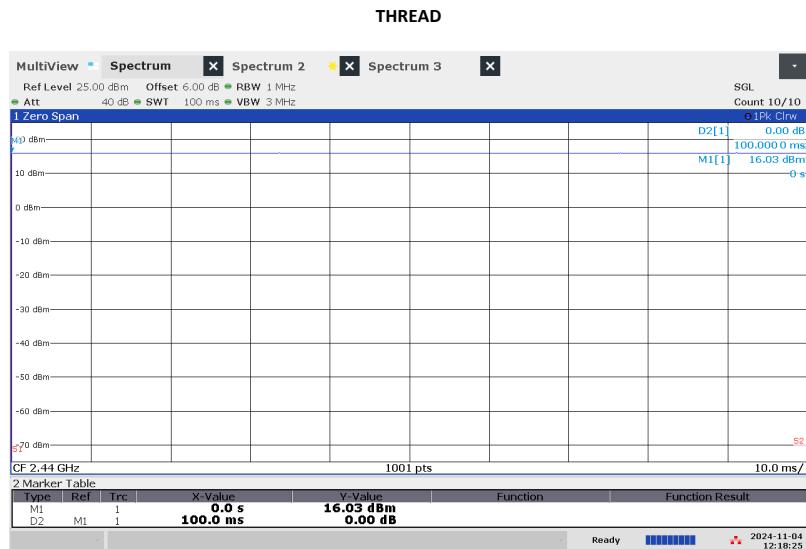


Figure 4.2.1 (iii) Example Pulsed Emission Characteristics (Duty Cycle).

#### 4.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 4.2.2. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 4.2.2.

Table 4.2.2 Intentional Emission Bandwidth.

Test Date: 5-Nov-24  
 Test Engineer: John Nantz  
 EUT: Allegion 47723023  
 Meas. Distance: Conducted

ROW	Occupied Bandwidth								
	Transmit Mode	Data Rate (Mbps)	Voltage (V)	Oper. Freq (MHz)	6 dB BW (MHz)	6 dB BW Limit (MHz)	99% OBW (MHz)	20 dB BW (MHz)	Pass/Fail
R0									
R1	BLE-LR	0.125	6.0	2402.0	0.618	0.500	1.100	1.153	Pass
R2				2440.0	0.618	0.500	1.170	1.153	Pass
R3				2480.0	0.619	0.500	1.060	1.157	Pass
R4	BLE-LR	0.500	6.0	2402.0	0.695	0.500	1.085	1.223	Pass
R5				2440.0	0.687	0.500	1.107	1.223	Pass
R6				2480.0	0.687	0.500	1.064	1.237	Pass
R7	BLE	1.000	6.0	2402.0	0.675	0.500	1.083	1.218	Pass
R8				2440.0	0.675	0.500	1.113	1.225	Pass
R9				2480.0	0.675	0.500	1.045	1.230	Pass
R10	BLE	2.000	6.0	2402.0	1.105	0.500	2.063	2.245	Pass
R11				2440.0	1.105	0.500	2.070	2.255	Pass
R12				2480.0	1.110	0.500	2.080	2.268	Pass
R13	THREAD	0.250	6.0	2405.0	1.642	0.500	2.205	2.589	Pass
R14				2440.0	1.657	0.500	2.210	2.598	Pass
R15				2480.0	1.636	0.500	2.198	2.589	Pass
#	C1	C2	C3	C4	C5	C6	C7	C8	C9
ROW	COLUMN		NOTE	DTS Bandwidth measured with RBW = 100 kHz per ANSI C63.10, section 11.8.1					
R1-R12	C5								

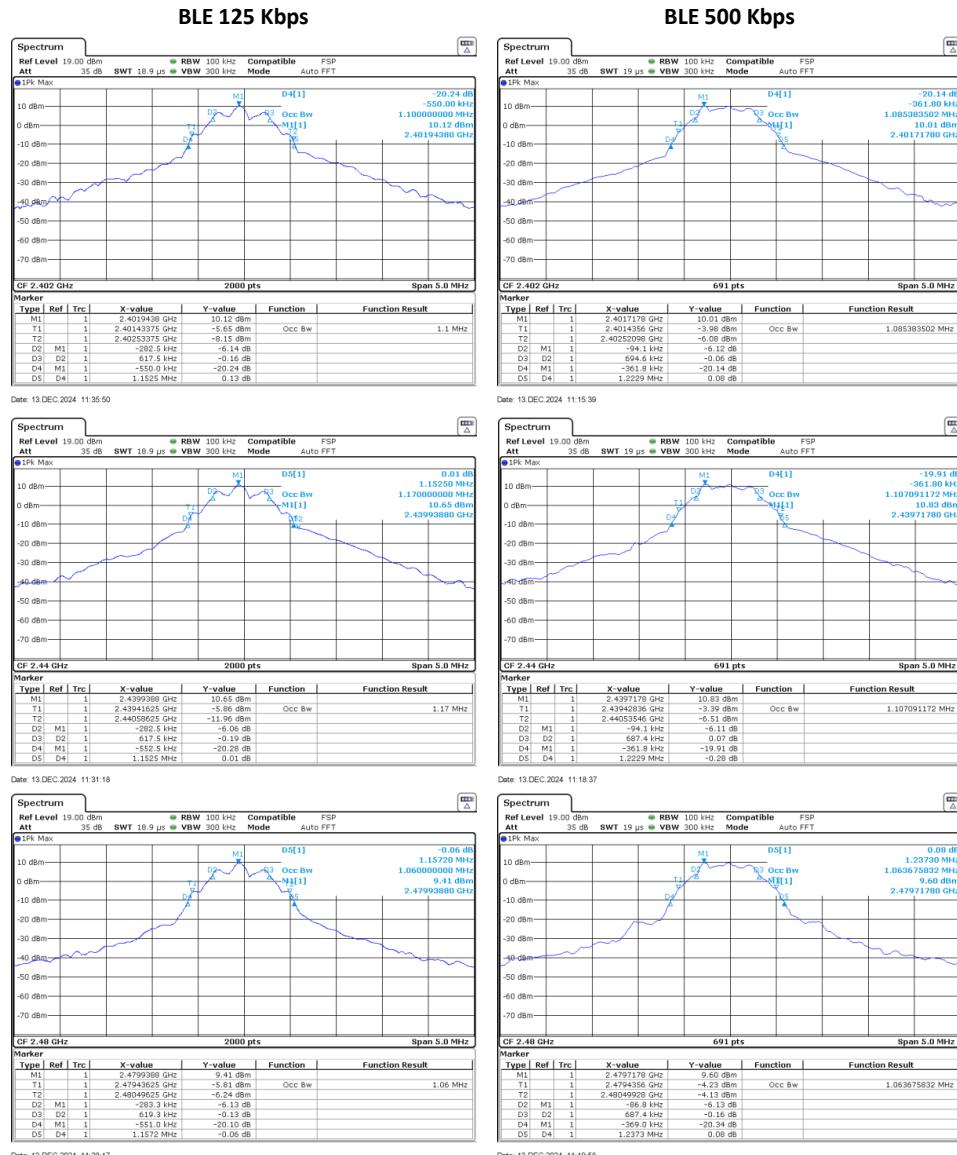


Figure 4.2.2 (i) Example Intentional Emission Bandwidth Plots.



Figure 4.2.2 (ii) Example Intentional Emission Bandwidth Plots.

## THREAD

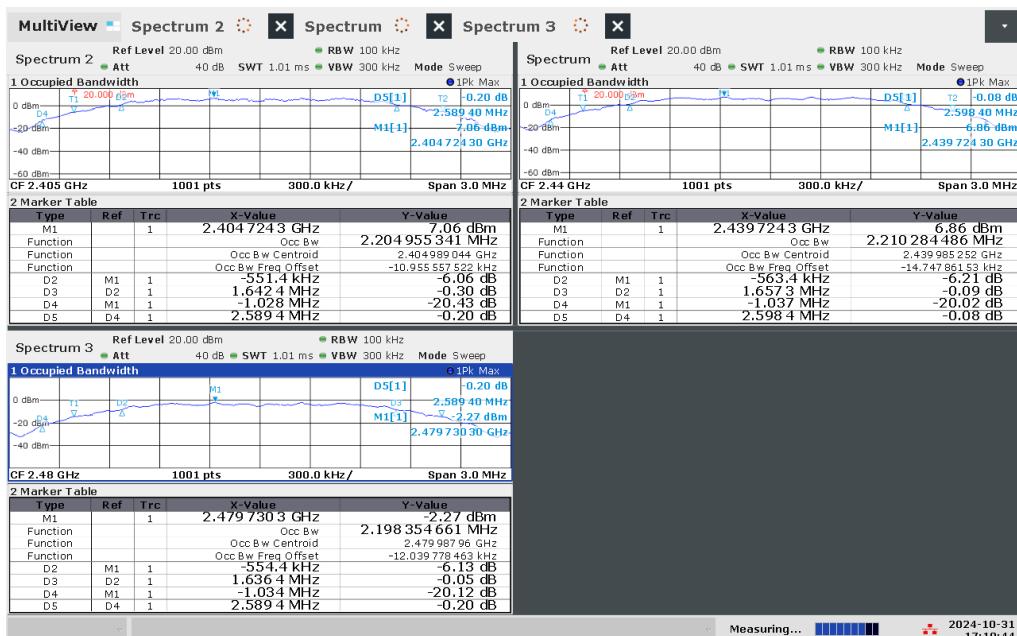


Figure 4.2.2 (iii) Example Intentional Emission Bandwidth Plots.

#### 4.2.3 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 4.2.3 .

Table 4.2.3 Tx. Power Results.

**Test Date:** 5-Nov-24  
**Test Engineer:** John Nantz  
**EUT:** Allegion 47723023  
**Meas. Distance:** Conducted

Row	Fundamental Power												
	Mode	Channel	Freq. MHz	Pout (Pk/Avg) dBm	Duty dB	Pout + Duty (Pk) dBm	Ant Gain dBi	EIRP (Avg) dBm	EIRP (Avg) Limit dBm	Pass dB	Comments		
R1	BLE (125KBPS)	0	2402.0	13.0	0.0	13.0	3.3	16.3	36.0	19.7			
R2		19	2440.0	12.9	0.0	12.9	3.3	16.2	36.0	19.8			
R3		39	2480.0	11.7	0.0	11.7	3.3	15.0	36.0	21.0			
R4	BLE (500KBPS)	0	2402.0	13.9	0.0	13.9	3.3	17.2	36.0	18.9			
R5		19	2440.0	13.9	0.0	13.9	3.3	17.2	36.0	18.8			
R6		39	2480.0	12.8	0.0	12.8	3.3	16.1	36.0	19.9			
R7	BLE (1MBPS)	0	2402.0	16.4	0.0	16.4	3.3	19.7	36.0	16.3			
R8		19	2440.0	16.8	0.0	16.8	3.3	20.1	36.0	15.9			
R9		39	2480.0	13.7	0.0	13.7	3.3	17.0	36.0	19.0			
R10	BLE (2MBPS)	0	2402.0	16.4	0.0	16.4	3.3	19.7	36.0	16.3			
R11		19	2440.0	16.9	0.0	16.9	3.3	20.2	36.0	15.8			
R12		39	2480.0	16.2	0.0	16.2	3.3	19.5	36.0	16.5			
R13	THREAD	11	2405.0	17.0	0.0	17.0	3.3	20.3	36.0	15.7			
R14		18	2440.0	17.0	0.0	17.0	3.3	20.3	36.0	15.7			
R15		26	2480.0	7.7	0.0	7.7	3.3	11.0	36.0	25.0			
Measured Antenna Gain													
Row	Mode	Channel	Freq. MHz	Pout (Pk) dBm	E3meas (Pk) dBuV/m	EIRP (Pk) dBm	Ant Gain (meas) dBi	Comments					
R14	CW	0	2402.0	17.0	115.5	20.3	3.3	Measured gain inline with manuf. Declaration inc. meas uncert.					
R15		19	2440.0	17.0	115.5	20.3	3.3	Measured gain inline with manuf. Declaration inc. meas uncert.					
R16		39	2480.0	16.2	114.7	19.5	3.3	Measured gain inline with manuf. Declaration inc. meas uncert.					
#	(ROW)	(COLUMN)	NOTE										
	R0	C4	Maximum peak conducted output power measured following DTS Guidance 558074 D01 v5 r02 Section 8.3.1.1										
	R0	C7	Worst case measured antenna gain is 3.3 dB.										
	R13	C5	Peak measured field strength at 3 meters on OATS										
	R13	C6	EIRP (Pk) computed from measured field strength.										

Peak conducted output power was measured directly from the EUT at the port where the antenna attaches. The test receiver bandwidth was set to be greater than the measured emission bandwidth of the EUT to capture the true peak. Antenna gain is either provided directly by the manufacturer or measured by comparison between calculated EIRP and conducted output power. Plots showing conducted measurements made are depicted in Figure 4.2.3 .

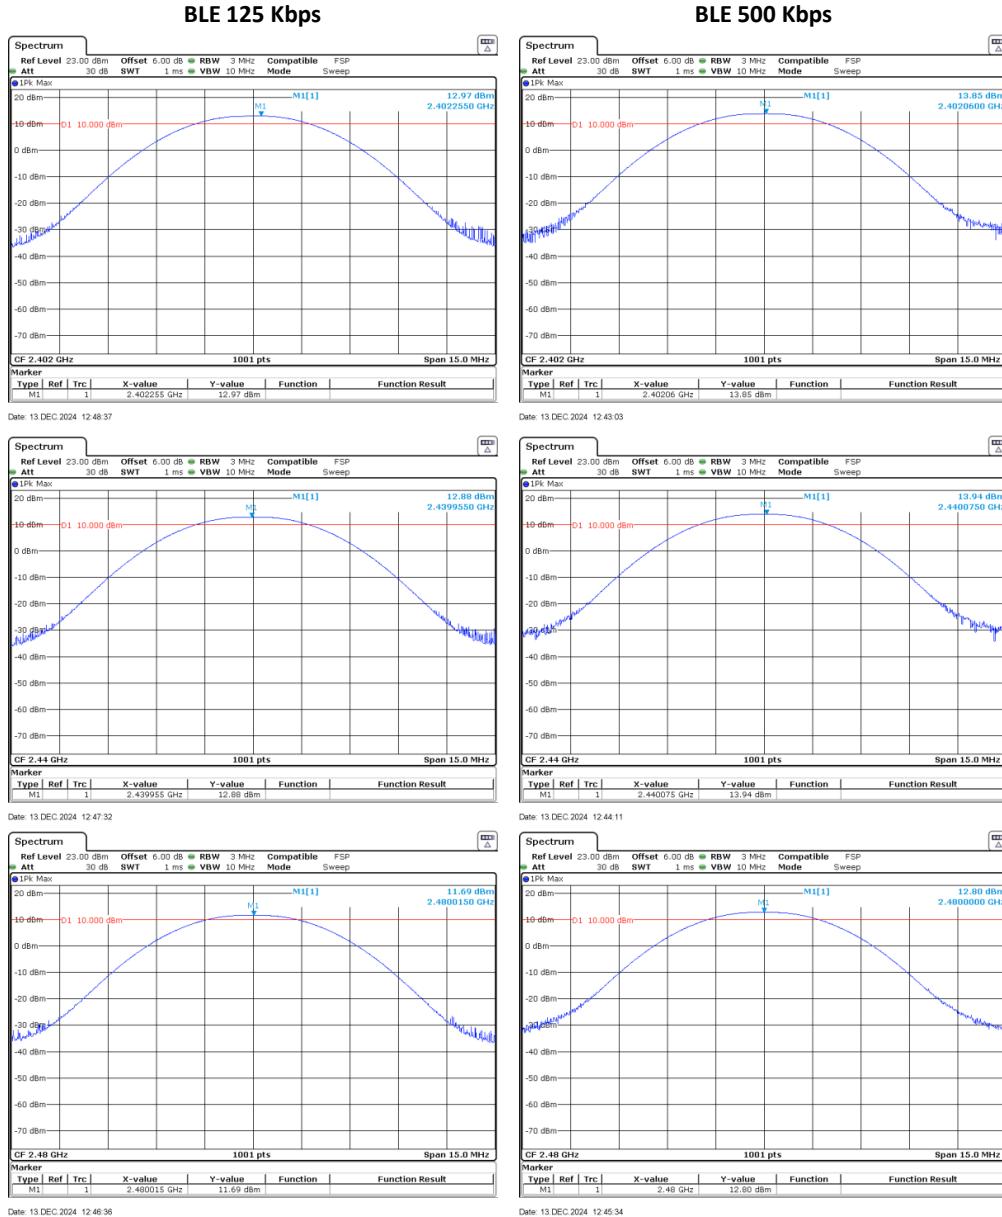


Figure 4.2.3 (i) Conducted RF Power Plots

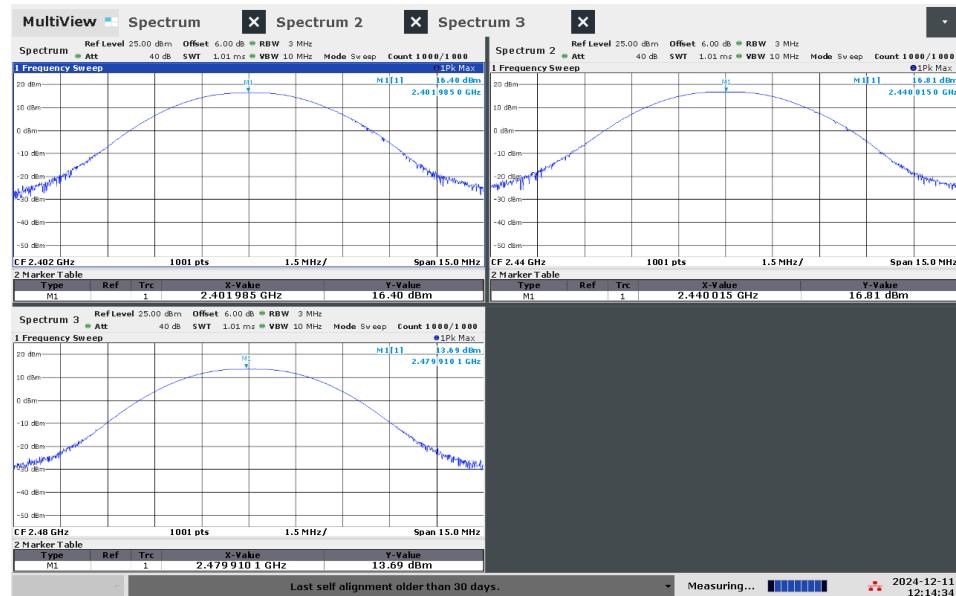
**BLE 1 Mbps****BLE 2 Mbps**

Figure 4.2.3 (ii) Conducted RF Power Plots

## THREAD

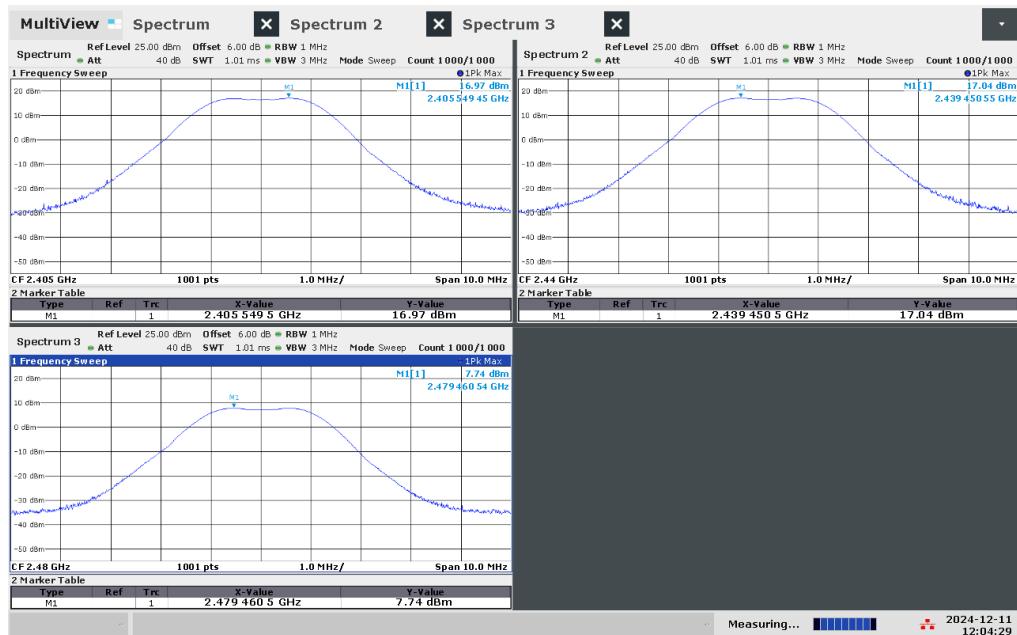


Figure 4.2.3 (iii) Conducted RF Power Plots

#### 4.2.4 Power Spectral Density

For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 4.2.4 . Plots showing how these measurements were made are depicted in Figure 4.2.4 .


Table 4.2.4 Power Spectral Density Results.

Frequency Range	Detector	IF Bandwidth	Video Bandwidth	Test Date:	5-Nov-24
2400-2483.5	Pk	3 kHz	10 kHz	Test Engineer:	John Nantz
			EUT:	Allegion 47723023	
			Meas. Distance:	Conducted	

3kHz Power Spectral Density							
R0	Mode	Channel	Frequency (MHz)	Ant. Used	PSDcond (meas) (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass By (dB)
R1	BLE (125KBPS)	0	2402.0	Cond.	6.9	8.00	1.1
R2		19	2440.0	Cond.	6.8	8.00	1.2
R3		39	2480.0	Cond.	5.6	8.00	2.4
R4	BLE (500KBPS)	0	2402.0	Cond.	7.5	8.00	0.5
R5		19	2440.0	Cond.	7.6	8.00	0.5
R6		39	2480.0	Cond.	6.5	8.00	1.5
R7	BLE (1MBPS)	0	2402.0	Cond.	0.4	8.00	7.6
R8		19	2440.0	Cond.	1.0	8.00	7.1
R9		39	2480.0	Cond.	-2.5	8.00	10.5
R10	BLE (2MBPS)	0	2402.0	Cond.	-1.3	8.00	9.3
R11		19	2440.0	Cond.	-1.0	8.00	9.0
R12		39	2480.0	Cond.	-1.8	8.00	9.8
R13	THREAD	0	2405.0	Cond.	-13.3	8.00	21.3
R14		18	2440.0	Cond.	-14.0	8.00	22.0
R15		26	2480.0	Cond.	-15.2	8.00	23.2
#	C1	C2	C3	C4	C5	C6	C7

(ROW) (COLUMN) NOTES  
R0 C5 PSD measured conducted out the EUT antenna port following ANSI C63.10, 11.10.2

BLE 125 Kbps

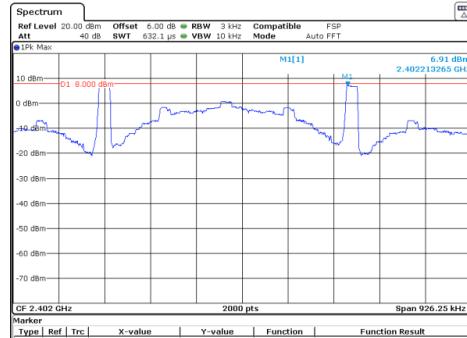

BLE 500 Kbps

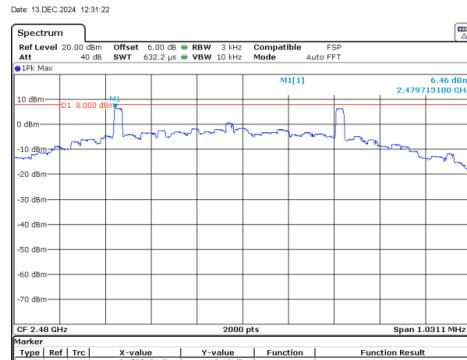
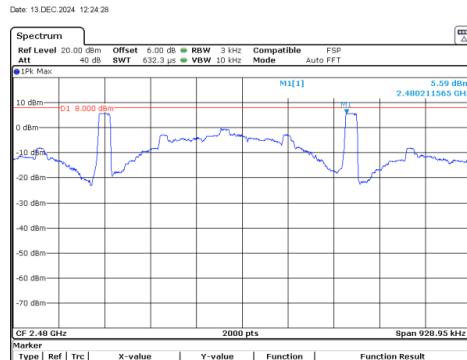
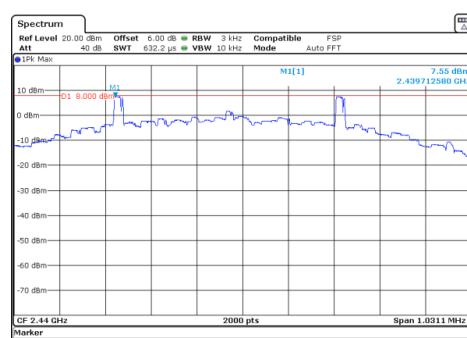
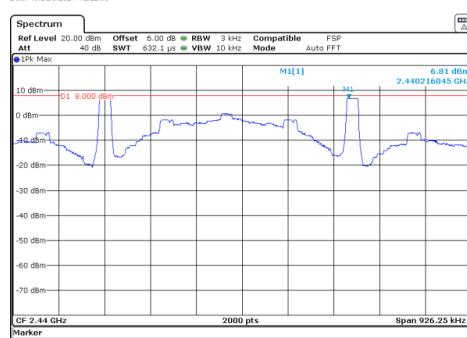
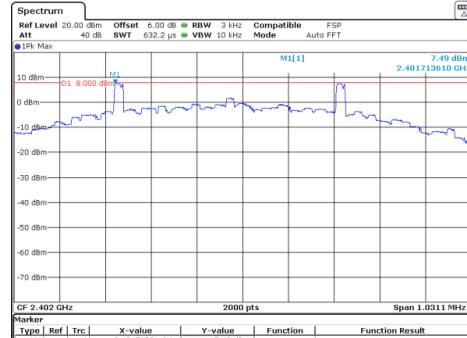


Figure 4.2.4 (i) Power Spectral Density Plots.

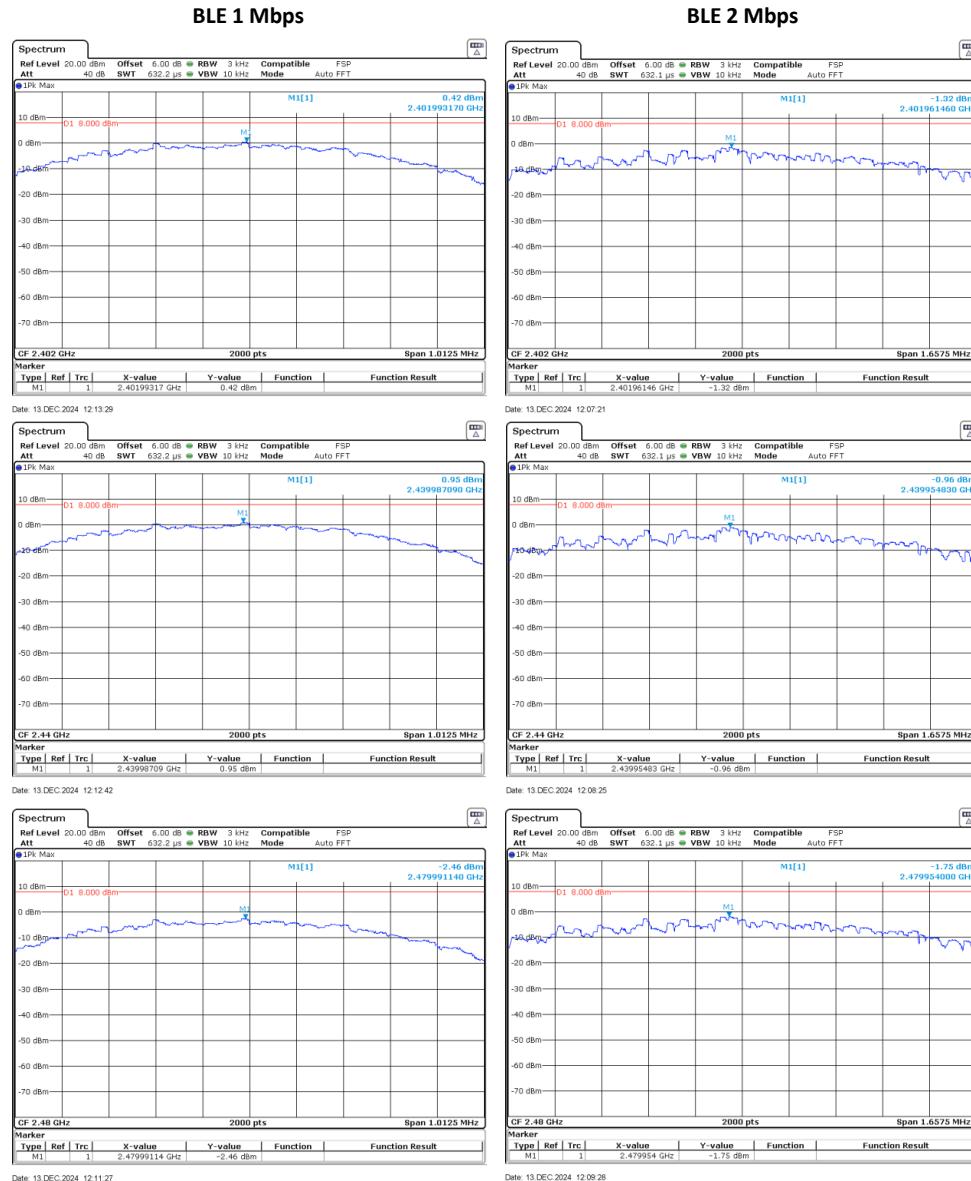


Figure 4.2.4 (ii) Power Spectral Density Plots.

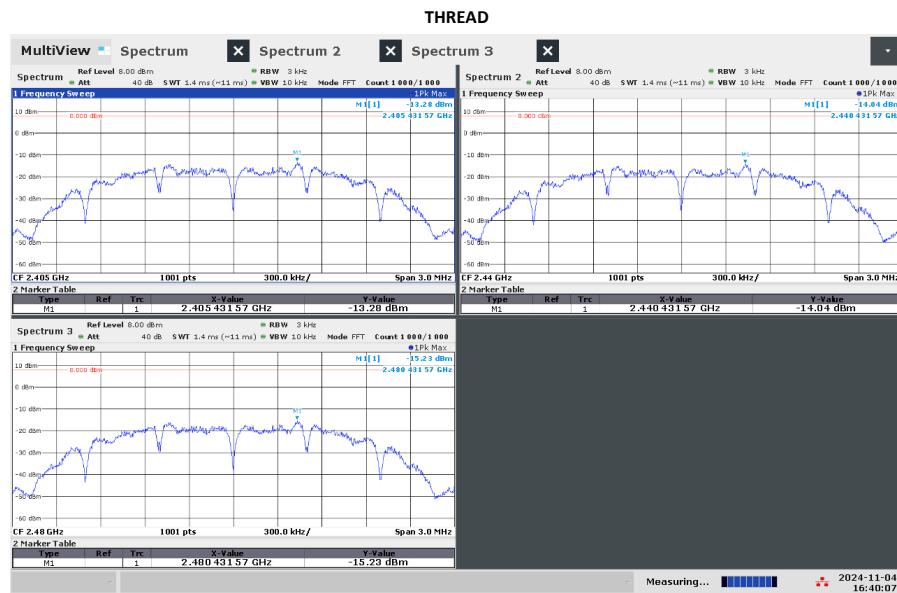


Figure 4.2.4 (iii) Power Spectral Density Plots.

## 4.3 Unintentional Emissions

### 4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 4.3.1. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 4.3.1 (i) Transmit Chain Spurious Emissions.

		Frequency Range		Det		IF Bandwidth		Video Bandwidth		Test Date:		5-Nov-24		
Restricted Band Emissions		30 MHz < f < 1 000 MHz		Pk/Qpk		100 KHz		300 KHz		Test Engineer:		John Nantz		
Restricted Band Emissions		f > 1 000 MHz		Pk/Avg		1 MHz		3 MHz		EUT:		Allegion 47723023		
Restricted Band Edge		f > 1 000 MHz		Pk/Avg		100 KHz		300 KHz		Meas. Distance:		Conducted		
Transmitter Spurious														
R0	Mode	Frequency Start MHz	Frequency Stop MHz	Output Power Meas. Pk dBm	Qpk/Avg dBm	Ant Gain dB	GR Factor dB	Avg Duty Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Avg dBuV/m	Pass dB	FCC/IC Comments
R1	Fundamental Restricted Band Edge (Low Side)													
R2	BLE (125Kbps)	2390.0	2390.0	-51.0	-61.6	3.3	0.0	0.0	47.5	74.0	36.9	54.0	17.1	max L,M,H channels or noise
R3	Fundamental Restricted Band Edge (High Side)													
R4	BLE (125Kbps)	2483.5	2483.5	-34.6	-45.7	3.3	0.0	0.0	63.9	74.0	52.8	54.0	1.2	max L,M,H channels or noise
R5	Restricted Bands Emissions													
R6	BLE (125Kbps)	30.0	88.0	-88.7		3.3	4.7	0.0	14.5			40	25.5	max L,M,H channels or noise
R7	BLE (125Kbps)	88.0	216.0	-89.7		3.3	4.7	0.0	13.5			43.5	30.0	max L,M,H channels or noise
R8	BLE (125Kbps)	216.0	960.0	-88.7		3.3	4.7	0.0	14.5			46	31.5	max L,M,H channels or noise
R9	BLE (125Kbps)	960.0	4000.0	-81.7	-84.3	3.3	0.0	0.0	16.8	74.0	14.3	54.0	39.7	max L,M,H channels or noise
R10	BLE (125Kbps)	4804.0	4804.0	-58.9	-68.1	3.3	0.0	0.0	39.6	74.0	30.5	54.0	23.5	CH Low
R11	BLE (125Kbps)	4880.0	4880.0	-62.7	-73.1	3.3	0.0	0.0	35.8	74.0	25.5	54.0	28.5	CH Mid
R12	BLE (125Kbps)	4960.0	4960.0	-58.3	-66.3	3.3	0.0	0.0	40.2	74.0	32.3	54.0	21.7	CH High
R13	BLE (125Kbps)	4000.0	6000.0	-58.3	-66.3	3.3	0.0	0.0	40.2	74.0	32.3	54.0	21.7	max L,M,H channels or noise
R14	BLE (125Kbps)	6000.0	8400.0	-62.7	-76.6	3.3	0.0	0.0	35.8	74.0	22.0	54.0	32.0	max L,M,H channels or noise
R15	BLE (125Kbps)	7320.0	7320.0	-63.4	-76.6	3.3	0.0	0.0	35.1	74.0	22.0	54.0	32.0	CH Mid
R16	BLE (125Kbps)	7440.0	7440.0	-62.7	-76.6	3.3	0.0	0.0	35.8	74.0	22.0	54.0	32.0	CH High
R17	BLE (125Kbps)	8400.0	12500.0	-65.4	-78.3	3.3	0.0	0.0	33.1	74.0	20.3	54.0	33.7	max L,M,H channels or noise
R18	BLE (125Kbps)	12500.0	26000.0	-62.9	-75.6	3.3	0.0	0.0	35.6	74.0	23.0	54.0	31.0	max L,M,H channels or noise
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14
(ROW)		(COLUMN)		NOTES										
R0		C5	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.											
R2/R4		C5	Measured according to ANSI C63-10-2013 section 11.13.3.3											
R6-R8		C4	Measured according to ANSI C63-10-2013 section 11.12.2.4											
R9-R16		C5	Measured according to ANSI C63-10-2013 section 11.12.2.5.1											
R0		C7	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c											
R0		C9/C11	Computed according to ANSI C63.10-2013 section 11.12.2.2 e											

Table 4.3.1 (ii) Transmit Chain Spurious Emissions.

		Frequency Range		Det		IF Bandwidth		Video Bandwidth				Test Date:		5-Nov-24	
Restricted Band Emissions		30 MHz < f < 1 000 MHz		Pk/Qpk		100 KHz		300 KHz				Test Engineer:		John Nantz	
Restricted Band Emissions		f > 1 000 MHz		Pk/Avg		1 MHz		3 MHz				EUT:		Allegion 47723023	
Restricted Band Edge		f > 1 000 MHz		Pk/Avg		100 KHz		300 KHz				Meas. Distance:		Conducted	
Transmitter Spurious															FCC/IC
R0	Mode	Frequency Start MHz	Frequency Stop MHz	Output Power Meas. Pk dBm	Qpk/Avg dBm	Ant Gain dB	GR Factor dB	Avg Duty Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Avg dBuV/m	Pass	Comments	
R1	Fundamental Restricted Band Edge (Low Side)														
R2	BLE (500Kbps)	2390.0	2390.0	-50.1	-61.9	3.3	0.0	0.0	48.4	74.0	36.6	54.0	17.4	max L,M,H channels or noise	
R3	Fundamental Restricted Band Edge (High Side)														
R4	BLE (500Kbps)	2483.5	2483.5	-34.0	-46.2	3.3	0.0	0.0	64.5	74.0	52.3	54.0	1.7	max L,M,H channels or noise	
R5	Restricted Bands Emissions														
R6	BLE (500Kbps)	30.0	88.0	-88.8		3.3	4.7	0.0	14.4			40	25.6	max L,M,H channels or noise	
R7	BLE (500Kbps)	88.0	216.0	-89.6		3.3	4.7	0.0	13.6			43.5	29.9	max L,M,H channels or noise	
R8	BLE (500Kbps)	216.0	960.0	-88.5		3.3	4.7	0.0	14.7			46	31.3	max L,M,H channels or noise	
R9	BLE (500Kbps)	960.0	4000.0	-81.7	-82.2	3.3	0.0	0.0	16.8	74.0	16.4	54.0	37.6	max L,M,H channels or noise	
R10	BLE (500Kbps)	4804.0	4804.0	-58.5	-66.5	3.3	0.0	0.0	40.0	74.0	32.1	54.0	21.9	CH Low	
R11	BLE (500Kbps)	4880.0	4880.0	-61.0	-70.5	3.3	0.0	0.0	37.5	74.0	28.1	54.0	25.9	CH Mid	
R12	BLE (500Kbps)	4960.0	4960.0	-56.7	-63.7	3.3	0.0	0.0	41.8	74.0	34.9	54.0	19.1	CH High	
R13	BLE (500Kbps)	4000.0	6000.0	-56.7	-63.7	3.3	0.0	0.0	41.8	74.0	34.9	54.0	19.1	max L,M,H channels or noise	
R14	BLE (500Kbps)	6000.0	8400.0	-63.2	-76.1	3.3	0.0	0.0	35.3	74.0	22.5	54.0	31.5	max L,M,H channels or noise	
R15	BLE (500Kbps)	7320.0	7320.0	-63.5	-76.6	3.3	0.0	0.0	35.0	74.0	22.0	54.0	32.0	CH Mid	
R16	BLE (500Kbps)	7440.0	7440.0	-63.2	-76.1	3.3	0.0	0.0	35.3	74.0	22.5	54.0	31.5	CH High	
R17	BLE (500Kbps)	8400.0	12500.0	-65.5	-78.2	3.3	0.0	0.0	33.0	74.0	20.4	54.0	33.6	max L,M,H channels or noise	
R18	BLE (500Kbps)	12500.0	26000.0	-62.5	-75.5	3.3	0.0	0.0	36.0	74.0	23.1	54.0	30.9	max L,M,H channels or noise	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	
(ROW)	(COLUMN)	NOTES													
R0	C5	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.													
R2/R4	C5	Measured according to ANSI C63-10-2013 section 11.13.3.3													
R6-R8	C4	Measured according to ANSI C63-10-2013 section 11.12.2.4													
R9-R16	C5	Measured according to ANSI C63-10-2013 section 11.12.2.5.1													
R0	C7	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c													
R0	C9/C11	Computed according to ANSI C63.10-2013 section 11.12.2.2 e													

Table 4.3.1 (iii) Transmit Chain Spurious Emissions.

		Frequency Range		Det		IF Bandwidth		Video Bandwidth				Test Date:		5-Nov-24	
Restricted Band Emissions		30 MHz < f < 1 000 MHz		Pk/Qpk		100 KHz		300 KHz				Test Engineer:		John Nantz	
Restricted Band Emissions		f > 1 000 MHz		Pk/Avg		1 MHz		3 MHz				EUT:		Allegion 47723023	
Restricted Band Edge		f > 1 000 MHz		Pk/Avg		100 KHz		300 KHz				Meas. Distance:		Conducted	
Transmitter Spurious															FCC/IC
R0	Mode	Frequency Start MHz	Frequency Stop MHz	Output Power Meas. Pk dBm	Qpk/Avg dBm	Ant Gain dB	GR Factor dB	Avg Duty Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Avg dBuV/m	Pass	Comments	
R1	Fundamental Restricted Band Edge (Low Side)														
R2	BLE (1Mbps)	2390.0	2390.0	-50.3	-66.5	3.3	0.0	0.0	48.2	74.0	32.0	54.0	22.0	max L,M,H channels or noise	
R3	Fundamental Restricted Band Edge (High Side)														
R4	BLE (1Mbps)	2483.5	2483.5	-37.0	-49.2	3.3	0.0	0.0	61.5	74.0	49.3	54.0	1.7	max L,M,H channels or noise	
R5	Restricted Bands Emissions														
R6	BLE (1Mbps)	30.0	88.0	-89.0		3.3	4.7	0.0	14.2			40	25.8	max L,M,H channels or noise	
R7	BLE (1Mbps)	88.0	216.0	-89.7		3.3	4.7	0.0	13.5			43.5	30.0	max L,M,H channels or noise	
R8	BLE (1Mbps)	216.0	960.0	-88.3		3.3	4.7	0.0	14.9			46	31.1	max L,M,H channels or noise	
R9	BLE (1Mbps)	960.0	4000.0	-80.3	-81.8	3.3	0.0	0.0	18.2	74.0	16.8	54.0	37.2	max L,M,H channels or noise	
R10	BLE (1Mbps)	4804.0	4804.0	-54.1	-60.9	3.3	0.0	0.0	44.4	74.0	37.7	54.0	16.3	CH Low	
R11	BLE (1Mbps)	4880.0	4880.0	-57.3	-65.4	3.3	0.0	0.0	41.2	74.0	33.2	54.0	20.8	CH Mid	
R12	BLE (1Mbps)	4960.0	4960.0	-55.2	-62.5	3.3	0.0	0.0	43.3	74.0	36.1	54.0	17.9	CH High	
R13	BLE (1Mbps)	4000.0	6000.0	-54.1	-60.9	3.3	0.0	0.0	44.4	74.0	37.7	54.0	16.3	max L,M,H channels or noise	
R14	BLE (1Mbps)	6000.0	8400.0	-61.8	-75.0	3.3	0.0	0.0	36.7	74.0	23.6	54.0	30.4	max L,M,H channels or noise	
R15	BLE (1Mbps)	7320.0	7320.0	-63.2	-75.0	3.3	0.0	0.0	35.3	74.0	23.6	54.0	30.4	CH Mid	
R16	BLE (1Mbps)	7440.0	7440.0	-61.8	-76.0	3.3	0.0	0.0	36.7	74.0	22.6	54.0	31.4	CH High	
R17	BLE (1Mbps)	8400.0	12500.0	-65.0	-78.3	3.3	0.0	0.0	33.5	74.0	20.3	54.0	33.7	max L,M,H channels or noise	
R18	BLE (1Mbps)	12500.0	26000.0	-62.7	-75.5	3.3	0.0	0.0	35.8	74.0	23.1	54.0	30.9	max L,M,H channels or noise	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	
(ROW)	(COLUMN)	NOTES													
R0	C5	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.													
R2/R4	C5	Measured according to ANSI C63-10-2013 section 11.13.3.3													
R6-R8	C4	Measured according to ANSI C63-10-2013 section 11.12.2.4													
R9-R16	C5	Measured according to ANSI C63-10-2013 section 11.12.2.5.1													
R0	C7	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c													
R0	C9/C11	Computed according to ANSI C63.10-2013 section 11.12.2.2 e													

Table 4.3.1 (iv) Transmit Chain Spurious Emissions.

		Frequency Range		Det		IF Bandwidth		Video Bandwidth				Test Date:		
Restricted Band Emissions		30 MHz < f < 1 000 MHz		Pk/Qpk		100 KHz		300 KHz				5-Nov-24		
Restricted Band Emissions		f > 1 000 MHz		Pk/Avg		1 MHz		3 MHz				Test Engineer:		
Restricted Band Edge		f > 1 000 MHz		Pk/Avg		100 KHz		300 KHz				EUT:		
Transmitter Spurious														
ROW	Mode	Frequency Start MHz	Frequency Stop MHz	Output Power Meas. Pk dBm	Qpk/Avg dBm	Ant Gain dBi	GR Factor dB	Avg Duty Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Avg dBuV/m	Pass dB	Comments
R1	Fundamental Restricted Band Edge (Low Side)													
R2	BLE (2Mbps)	2390.0	2390.0	-48.2	-62.5	3.3	0.0	0.0	50.3	74.0	36.0	54.0	18.0	max L,M,H channels or noise
R3	Fundamental Restricted Band Edge (High Side)													
R4	BLE (2Mbps)	2483.5	2483.5	-26.5	-45.8	3.3	0.0	0.0	72.0	74.0	52.7	54.0	1.3	max L,M,H channels or noise
R5	Restricted Bands Emissions													
R6	BLE (2Mbps)	30.0	88.0	-88.8		3.3	4.7	0.0	14.4			40	25.6	max L,M,H channels or noise
R7	BLE (2Mbps)	88.0	216.0	-89.7		3.3	4.7	0.0	13.5			43.5	30.0	max L,M,H channels or noise
R8	BLE (2Mbps)	216.0	960.0	-88.3		3.3	4.7	0.0	14.9			46	31.1	max L,M,H channels or noise
R9	BLE (2Mbps)	960.0	4000.0	-79.9	-81.8	3.3	0.0	0.0	18.6	74.0	16.8	54.0	37.2	max L,M,H channels or noise
R10	BLE (2Mbps)	4804.0	4804.0	-54.1	-67.0	3.3	0.0	0.0	44.4	74.0	31.6	54.0	22.4	CH Low
R11	BLE (2Mbps)	4880.0	4880.0	-57.5	-70.3	3.3	0.0	0.0	41.0	74.0	28.3	54.0	25.7	CH Mid
R12	BLE (2Mbps)	4960.0	4960.0	-51.6	-63.7	3.3	0.0	0.0	46.9	74.0	34.9	54.0	19.1	CH High
R13	BLE (2Mbps)	4000.0	6000.0	-51.6	-63.7	3.3	0.0	0.0	46.9	74.0	34.9	54.0	19.1	max L,M,H channels or noise
R14	BLE (2Mbps)	6000.0	8400.0	-63.6	-76.1	3.3	0.0	0.0	34.9	74.0	22.5	54.0	31.5	max L,M,H channels or noise
R15	BLE (2Mbps)	7320.0	7320.0	-63.6	-76.6	3.3	0.0	0.0	34.9	74.0	22.0	54.0	32.0	CH Mid
R16	BLE (2Mbps)	7440.0	7440.0	-63.6	-76.1	3.3	0.0	0.0	34.9	74.0	22.5	54.0	31.5	CH High
R17	BLE (2Mbps)	8400.0	12500.0	-65.0	-78.3	3.3	0.0	0.0	33.5	74.0	20.3	54.0	33.7	max L,M,H channels or noise
R18	BLE (2Mbps)	12500.0	26000.0	-62.1	-75.5	3.3	0.0	0.0	36.4	74.0	23.1	54.0	30.9	max L,M,H channels or noise
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14
(ROW)	(COLUMN)	NOTES												
R0	C5	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.												
R2/R4	C5	Measured according to ANSI C63-10-2013 section 11.13.3.3												
R6-R8	C4	Measured according to ANSI C63-10-2013 section 11.12.2.4												
R9-R16	C5	Measured according to ANSI C63-10-2013 section 11.12.2.5.1												
R0	C7	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c												
R0	C9/C11	Computed according to ANSI C63.10-2013 section 11.12.2.2 e												

Table 4.3.1 (v) Transmit Chain Spurious Emissions.

		Frequency Range		Det		IF Bandwidth		Video Bandwidth				Test Date:		
Restricted Band Emissions		30 MHz < f < 1 000 MHz		Pk/Qpk		100 KHz		300 KHz				5-Nov-24		
Restricted Band Emissions		f > 1 000 MHz		Pk/Avg		1 MHz		3 MHz				Test Engineer:		
Restricted Band Edge		f > 1 000 MHz		Pk/Avg		100 KHz		300 KHz				EUT:		
Transmitter Spurious														
ROW	Mode	Frequency Start MHz	Frequency Stop MHz	Output Power Meas. Pk dBm	Qpk/Avg dBm	Ant Gain dBi	GR Factor dB	Avg Duty Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Avg dBuV/m	Pass dB	Comments
R1	Fundamental Restricted Band Edge (Low Side)													
R2	THREAD	2390.0	2390.0	-57.1	-76.6	3.3	0.0	0.0	41.4	74.0	21.9	54.0	32.1	max L,M,H channels or noise
R3	Fundamental Restricted Band Edge (High Side)													
R4	THREAD	2483.5	2483.5	-52.0	-58.6	3.3	0.0	0.0	46.5	74.0	39.9	54.0	14.1	max L,M,H channels or noise
R5	Restricted Bands Emissions													
R6	THREAD	30.0	88.0	-88.8		3.3	4.7	0.0	14.4			40	25.6	max L,M,H channels or noise
R7	THREAD	88.0	216.0	-89.7		3.3	4.7	0.0	13.5			43.5	30.0	max L,M,H channels or noise
R8	THREAD	216.0	960.0	-88.3		3.3	4.7	0.0	14.9			46	31.1	max L,M,H channels or noise
R9	THREAD	960.0	4000.0	-78.5	-81.8	3.3	0.0	0.0	20.0	74.0	16.8	54.0	37.2	max L,M,H channels or noise
R10	THREAD	4810.0	4810.0	-51.9	-58.2	3.3	0.0	0.0	46.6	74.0	40.4	54.0	13.6	CH Low
R11	THREAD	4880.0	4880.0	-57.6	-65.7	3.3	0.0	0.0	40.9	74.0	32.9	54.0	21.1	CH Mid
R12	THREAD	4960.0	4960.0	-63.1	-74.7	3.3	0.0	0.0	35.4	74.0	23.9	54.0	30.1	CH High
R13	THREAD	4000.0	6000.0	-51.9	-58.2	3.3	0.0	0.0	46.6	74.0	40.4	54.0	13.6	max L,M,H channels or noise
R14	THREAD	6000.0	8400.0	-63.4	-75.0	3.3	0.0	0.0	35.1	74.0	23.6	54.0	30.4	max L,M,H channels or noise
R15	THREAD	7320.0	7320.0	-63.9	-75.0	3.3	0.0	0.0	34.6	74.0	23.6	54.0	30.4	CH Mid
R16	THREAD	7440.0	7440.0	-63.4	-76.6	3.3	0.0	0.0	35.1	74.0	22.0	54.0	32.0	CH High
R17	THREAD	8400.0	12500.0	-64.6	-78.3	3.3	0.0	0.0	33.9	74.0	20.3	54.0	33.7	max L,M,H channels or noise
R18	THREAD	12500.0	26000.0	-62.4	-75.5	3.3	0.0	0.0	36.1	74.0	23.1	54.0	30.9	max L,M,H channels or noise
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14
(ROW)	(COLUMN)	NOTES												
R0	C5	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.												
R2/R4	C5	Measured according to ANSI C63-10-2013 section 11.13.3.3												
R6-R8	C4	Measured according to ANSI C63-10-2013 section 11.12.2.4												
R9-R16	C5	Measured according to ANSI C63-10-2013 section 11.12.2.5.1												
R0	C7	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c												
R0	C9/C11	Computed according to ANSI C63.10-2013 section 11.12.2.2 e												

Table 4.3.1 (vi) Transmit Chain Spurious Emissions.

Frequency Range 30 >= f > 1000 MHz f < 1000 MHz	Det Pk/QPk Pk/Avg	IF Bandwidth 100 kHz 1 MHz	Video Bandwidth 300 kHz 3 MHz	Test Date: 5-Nov-24 Test Engineer: John Nantz EUT: Allegion 47723023 Meas. Distance: 3 m, Radiated							
---	-------------------------	----------------------------------	-------------------------------------	---	--	--	--	--	--	--	--

#	Mode	Simultaneous Transmitter - Inter-modulation Measurements										FCC/IC			
		Frequency MHz	Start MHz	Stop MHz	Ht m	Angle deg	OATS Table	Test Antenna	Meas. Pk dBuV/m	Electric Field @ 3m dBuV/m	Pass				
R1	THREAD+802.11b	2484.0	2484.0	1.5	.0		HQRITO18S01	H/V	32.8	-0.9	54.0	74.0			
R2	THREAD+802.11b	2484.0	2484.0	1.5	.0		HQRITO18S01	H/V	32.8	-0.9	45.4	74.0			
R3	THREAD+802.11g	2485.0	2485.0	1.5	.0		HQRITO18S01	H/V	32.9	-0.9	64.7	74.0			
R4	THREAD+802.11n	2484.0	2484.0	1.5	.0		HQRITO18S01	H/V	32.8	-0.9	67.3	74.0			
R5	THREAD+802.11ax	2485.0	2485.0	1.5	.0		HQRITO18S01	H/V	32.9	-0.9	66.8	74.0			
R6	BLE (2Mbps)+802.11b	2485.0	2485.0	1.5	.0		HQRITO18S01	H/V	32.9	-0.9	55.5	74.0			
R7	BLE (2Mbps)+802.11b	2484.0	2484.0	1.5	.0		HQRITO18S01	H/V	32.8	-0.9	53.0	74.0			
R8															
R9															
R10															
R11															
#	C1	C2	C3	C4	C5	C6		C7	C8	C9	C10	C11	C12	C13	C14

(ROW) (Column) NOTES  
R0 C11 THREAD CH18 with WiFi CH11 was worst case IM due to proximity to the restricted band edge.

#### 4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 4.3.2 below.

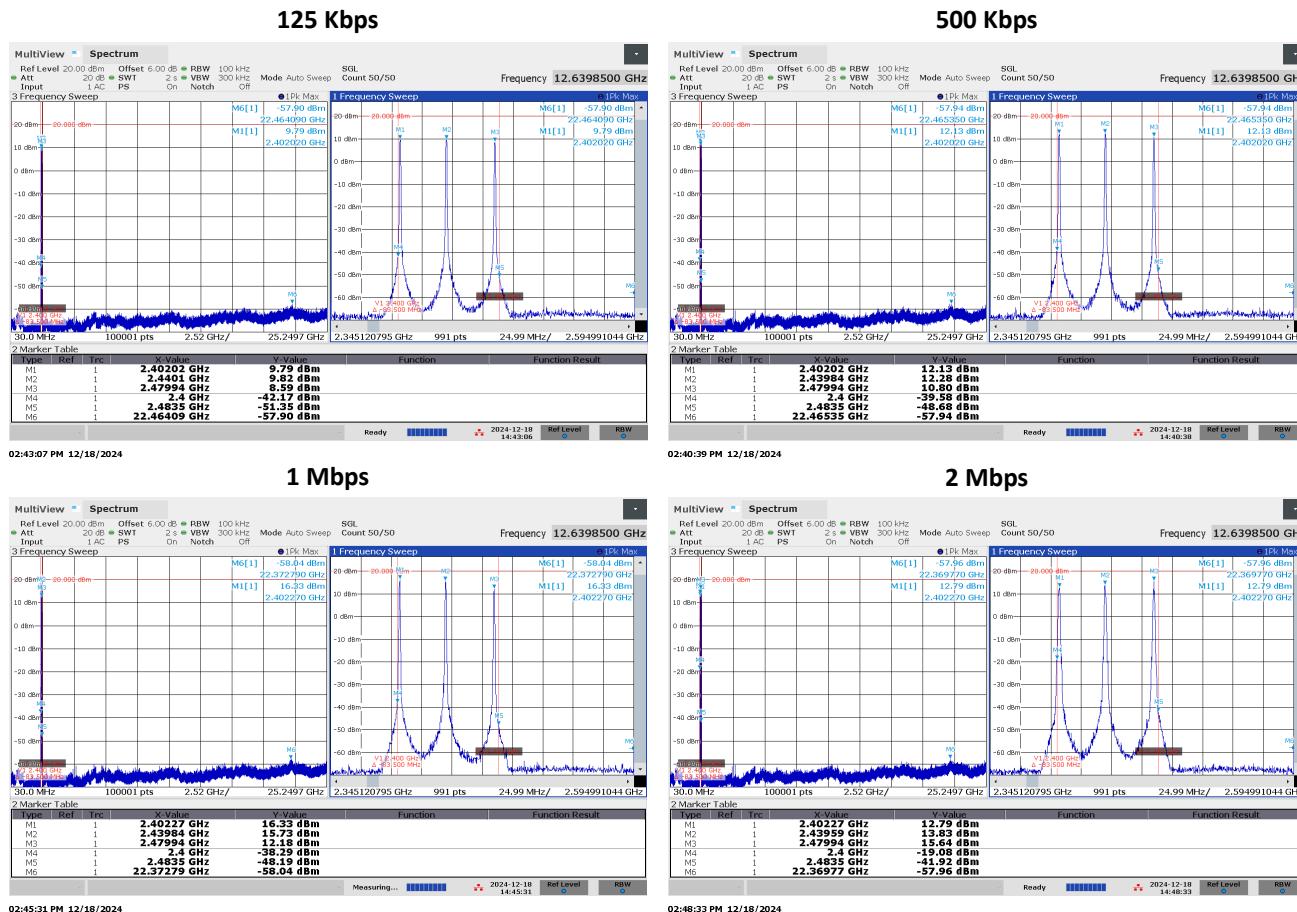


Figure 4.3.2 (i) Worst Case Transmitter OOB Emissions Measured.

## THREAD

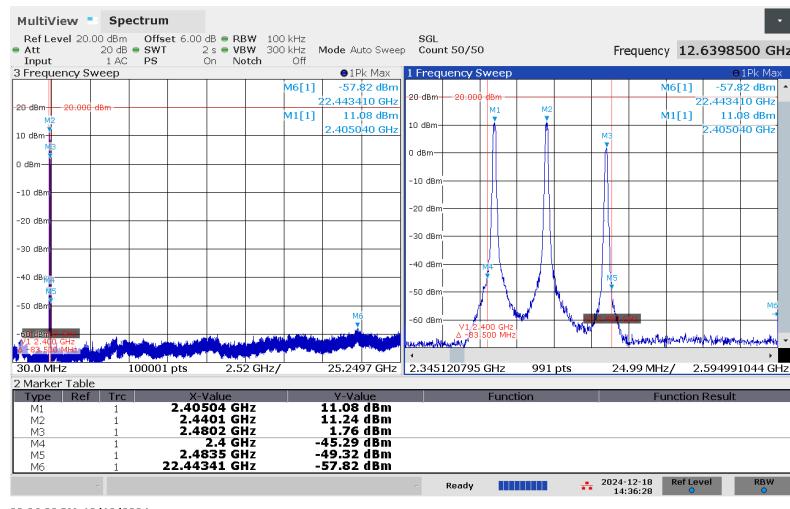


Figure 4.3.2 (ii) Worst Case Transmitter OOB Emissions Measured.

## 5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of  $k = 2$ .

Table 5.0.0 Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty <sup>†</sup>
Radio Frequency Conducted Emm. Amplitude	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ $\pm1.9 \text{ dB}$
Radiated Emm. Amplitude ( $f < 30 \text{ MHz}$ )	$\pm3.1 \text{ dB}$
Radiated Emm. Amplitude ( $30 - 200 \text{ MHz}$ )	$\pm4.0 \text{ dB}$
Radiated Emm. Amplitude ( $200 - 1000 \text{ MHz}$ )	$\pm5.2 \text{ dB}$
Radiated Emm. Amplitude ( $f > 1000 \text{ MHz}$ )	$\pm3.7 \text{ dB}$

<sup>†</sup>Ref: CISPR 16-4-2:2011+A1:2014



Figure 5.0.0 Accreditation Documents