



## **Care Innovations**

**Router**

**FCC 15.247:2013**

**Report #: CARE0015.1**



Report Prepared By Northwest EMC Inc.

NORTHWEST EMC – (888) 364-2378 – [www.nwemc.com](http://www.nwemc.com)

California – Minnesota – Oregon – New York – Washington

# CERTIFICATE OF TEST

Last Date of Test: April 24, 2013  
 Care Innovations  
 Model: Router

## Emissions

Test Description	Specification	Test Method	Pass/Fail
Occupied Bandwidth	FCC 15.247:2013	ANSI C63.10:2009	Pass
Output Power	FCC 15.247:2013	ANSI C63.10:2009	Pass
Band Edge Compliance	FCC 15.247:2013	ANSI C63.10:2009	Pass
Spurious Conducted Emissions	FCC 15.247:2013	ANSI C63.10:2009	Pass
Power Spectral Density	FCC 15.247:2013	ANSI C63.10:2009	Pass
Spurious Radiated Emissions	FCC 15.247:2013	ANSI C63.10:2009	Pass
AC Powerline Conducted Emissions	FCC 15.207:2013	ANSI C63.10:2009	Pass

## Deviations From Test Standards

None

## Approved By:



Tim O'Shea, Operations Manager



NVLAP Lab Code: 200630-0

## Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.  
 22975 NW Evergreen Parkway, Suite 400  
 Hillsboro, OR 97124

Phone: (503) 844-4066      Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada (Site filing #2834D-1).

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

## REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

### Barometric Pressure

The recorded barometric pressure has been normalized to sea level.

---

## United States

---

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

---

**IC** - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

---

## European Union

---

**European Commission** – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

---

## Australia/New Zealand

---

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

---

**KCC / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

---

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

---

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

---

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Hong Kong

---

**OFTA** – Recognized by OFTA as a CAB for the acceptance of test data.

---

## Vietnam

---

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## Russia

---

**GOST** – Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.

---

## SCOPE

---

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is listed below. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-1 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.12	-0.01
Amplitude Accuracy (dB)	0.49	-0.49
Conducted Power (dB)	0.41	-0.41
Radiated Power via Substitution (dB)	0.69	-0.68
Temperature (degrees C)	0.81	-0.81
Humidity (% RH)	2.89	-2.89
Field Strength (dB)	3.80	-3.80
AC Powerline Conducted Emissions (dB)	2.94	-2.94

# LOCATIONS



<b>Oregon</b> Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	<b>California</b> Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>New York</b> Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796	<b>Minnesota</b> Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281	<b>Washington</b> Labs NC01-05, SU02, SU07 19201 120 <sup>th</sup> Ave. NE Bothell, WA 98011 (425) 984-6600
<b>VCCI</b>				
A-0108	A-0029		A-0109	A-0110
<b>Industry Canada</b>				
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834C-1
<b>NVLAP</b>				
NVLAP Lab Code: 200630-0	NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200629-0

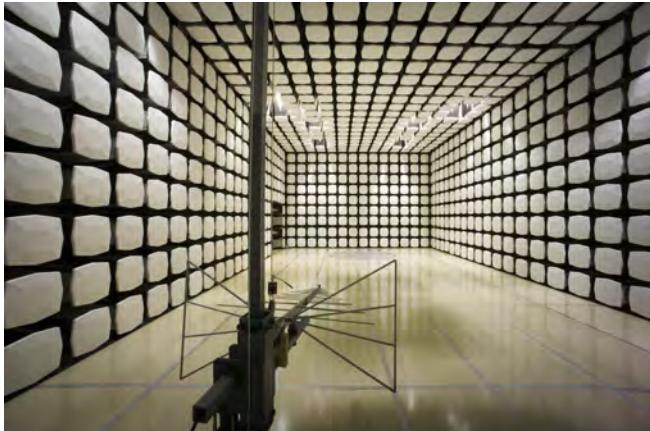



# PRODUCT DESCRIPTION

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	Care Innovations
<b>Address:</b>	20270 NW Amberglen Court
<b>City, State, Zip:</b>	Beaverton, OR 97006
<b>Test Requested By:</b>	Bill Morse
<b>Model:</b>	Router
<b>First Date of Test:</b>	April 20, 2013
<b>Last Date of Test:</b>	April 24, 2013
<b>Receipt Date of Samples:</b>	April 17, 2013
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage

## Information Provided by the Party Requesting the Test

### Functional Description of the EUT (Equipment Under Test):

Wireless monitoring technology that uses a 2.4 GHz ISM radio module, 802.15.4 complaint with 1 antenna. In actual use it is powered by a removable battery.

### Testing Objective:

To demonstrate compliance to FCC 15.247 requirements.

## Configuration CARE0015- 3

<b>EUT</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>		
Router	Care Innovations	QC101100-02	001D400000110057		

<b>Peripherals in test setup boundary</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>		
Laptop	Dell	Latitude 2100	00196-063-869-320		

<b>Cables</b>					
<b>Cable Type</b>	<b>Shield</b>	<b>Length (m)</b>	<b>Ferrite</b>	<b>Connection 1</b>	<b>Connection 2</b>
USB to Radio Programmer	No	0.5	No	Laptop	Coor/Router/Door
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

## Configuration CARE0016- 3

<b>EUT</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>		
Router	Care Innovations	QC101100-02	001D400000110057		

<b>Peripherals in test setup boundary</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>		
Laptop	Dell	Latitude 2100	00196-063-869-320		
Radio programmer	Texas Instruments	CC Debugger	None		

<b>Cables</b>					
<b>Cable Type</b>	<b>Shield</b>	<b>Length (m)</b>	<b>Ferrite</b>	<b>Connection 1</b>	<b>Connection 2</b>
USB to Debugger	Yes	1.8m	Yes	Laptop	Debugger
AC Power Cable	No	1.8m	No	Router	Unterminated
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	4/20/2013	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	4/22/2013	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	4/22/2013	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	4/22/2013	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	4/22/2013	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	4/22/2013	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	4/24/2013	AC Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

## Occupied Bandwidth

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator, 6dB	S.M. Electronics	18N-06	AWN	3/25/2013	12
MXG Vector Signal Generator	Agilent	N5182A	TIF	NCR	0
Power Meter	Gigatronics	8651A	SPM	1/9/2012	24
Power Sensor	Gigatronics	80701A	SPL	7/8/2011	24
Attenuator 20 dB, SMA M/F 26GHz	S.M. Electronics	SA26B-20	AUY	8/2/2012	12
EV06 Direct Connect Cable	ESM Cable Corp.	TT	ECA	NCR	0
40GHz DC Block	Miteq	DCB4000	AMD	6/25/2012	12
Spectrum Analyzer	Agilent	E4440A	AFD	7/5/2012	24

### TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. All the tests contained in this report were completed with the EUT's software set to the following power levels:



The EUT Power Levels:

Low Ch. 2405 MHz = -0.4 dBm


Mid Ch. 2445 MHz = -0.4 dBm

High Ch. 2480 MHz = -1.5 dBm

EUT: <b>ROUTER</b>	Work Order: <b>CARE0015</b>			
Serial Number: <b>001D400000110057</b>	Date: <b>04/22/13</b>			
Customer: <b>Care Innovations</b>	Temperature: <b>23°C</b>			
Attendees: <b>Bill Morse</b>	Humidity: <b>29%</b>			
Project: <b>None</b>	Barometric Pres.: <b>1032</b>			
Tested by: <b>Brandon Hobbs, Rod Peloquin</b>	Job Site: <b>EV06</b>			
<b>TEST SPECIFICATIONS</b>				
FCC 15.247:2013	Test Method: <b>ANSI C63.10:2009</b>			
<b>COMMENTS</b>				
The EUT was operating at 100% duty cycle while under test.				
<b>DEVIATIONS FROM TEST STANDARD</b>				
None				
Configuration #	3			
Signature				
		<b>Value</b>	<b>Limit</b>	<b>Result</b>
2400 MHz - 2483.5 MHz Band		1.538 MHz	> 500 kHz	Pass
OQPSK		1.616 MHz	> 500 kHz	Pass
		1.61 MHz	> 500 kHz	Pass
Low Channel 2405 MHz				
Mid Channel 2445 MHz				
High Channel 2480 MHz				

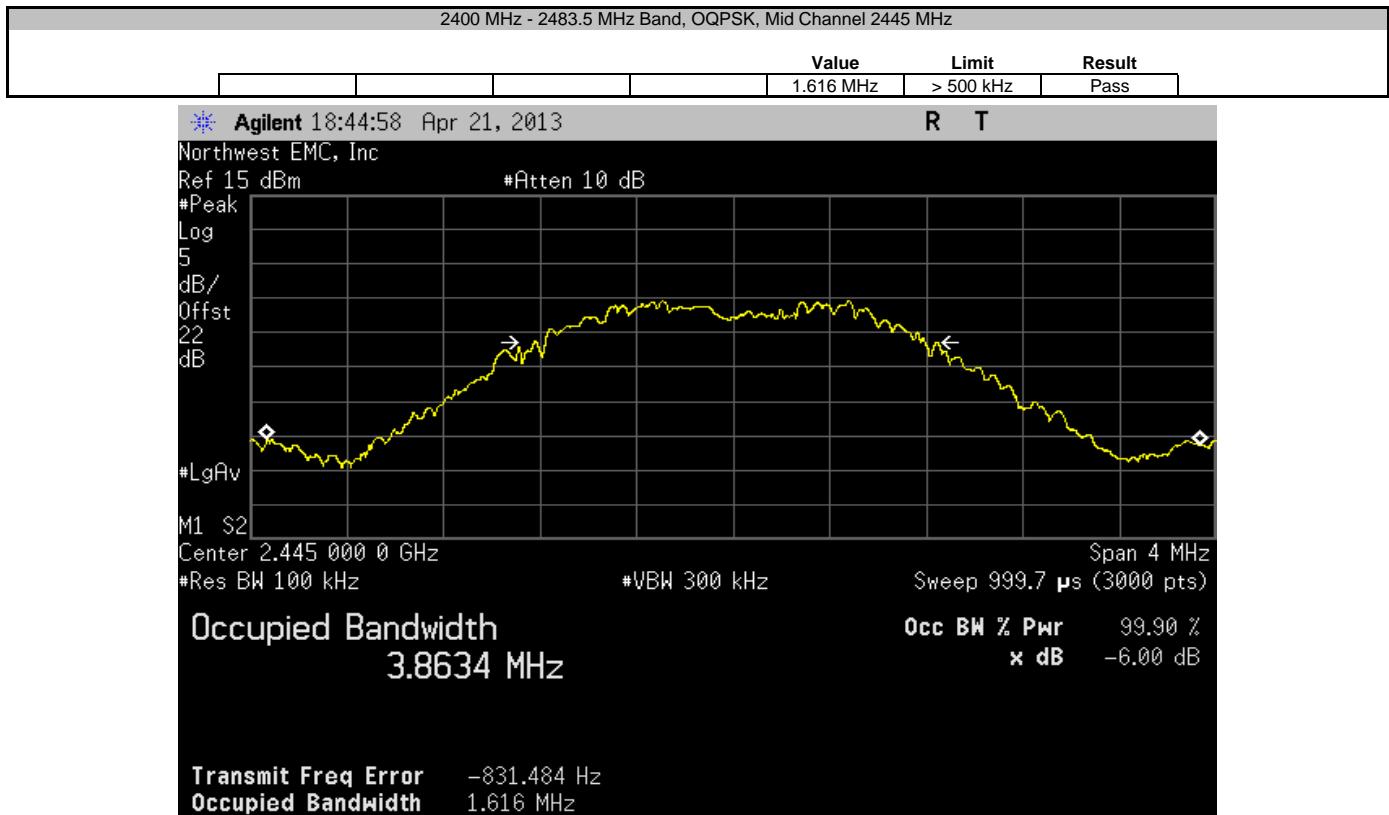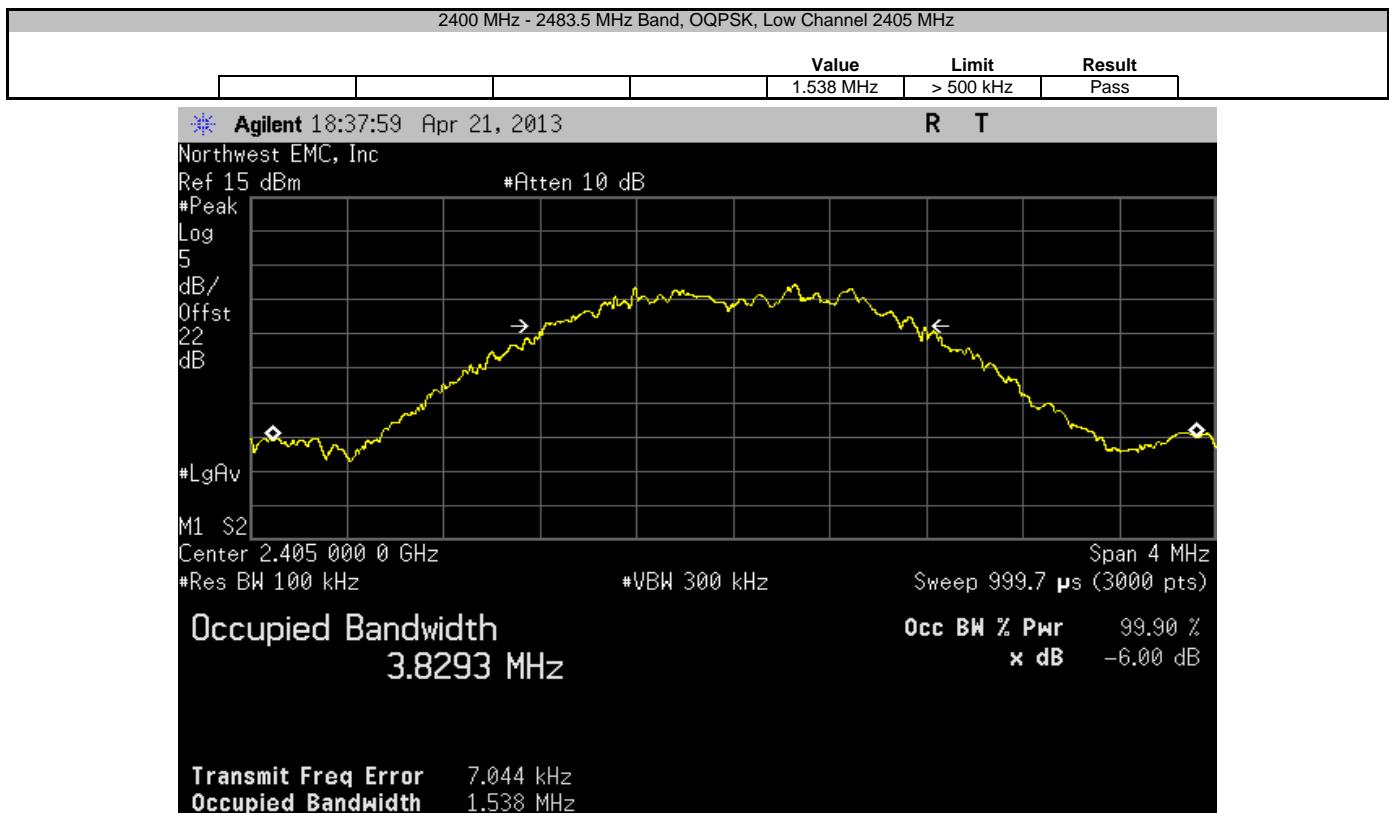

2400 MHz - 2483.5 MHz Band, OQPSK, High Channel 2480 MHz

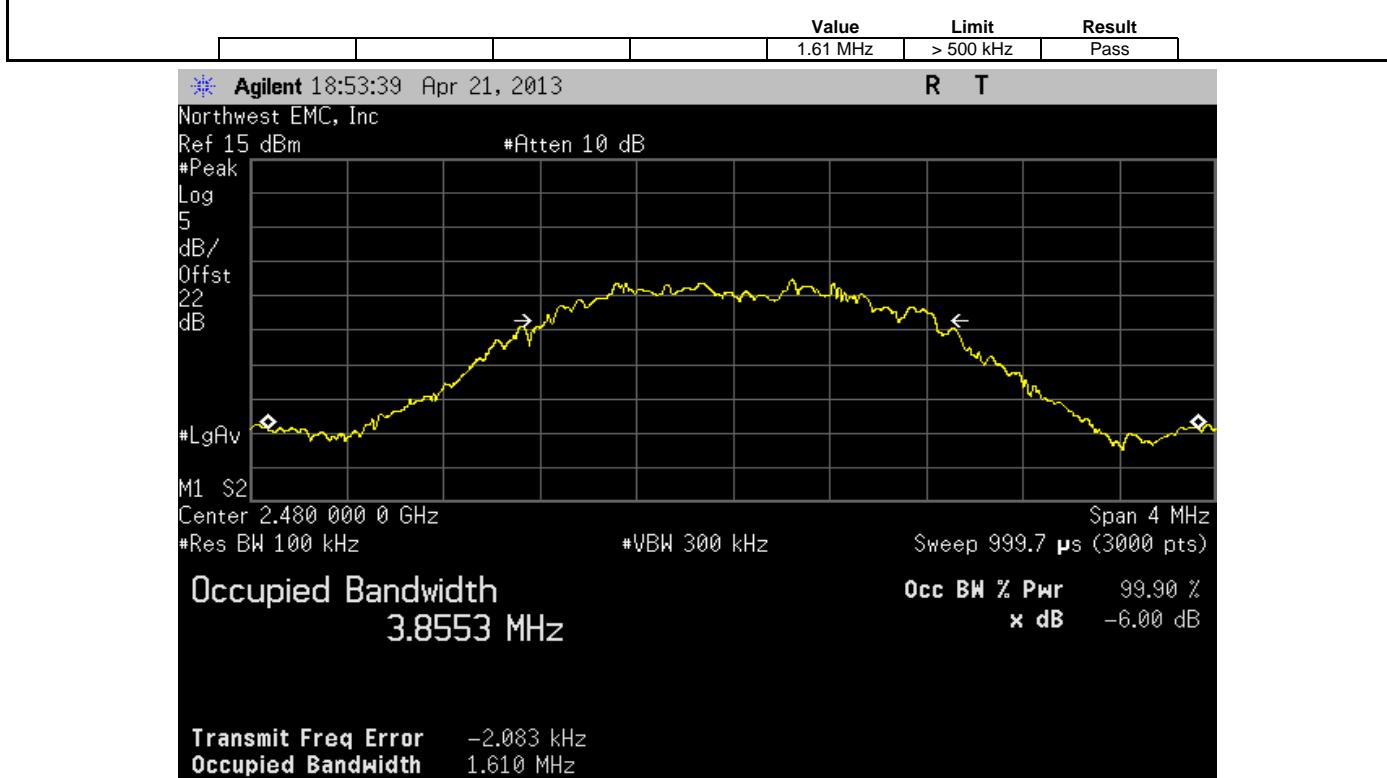

## Output Power

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator, 6dB	S.M. Electronics	18N-06	AWN	3/25/2013	12
MXG Vector Signal Generator	Agilent	N5182A	TIF	NCR	0
Power Meter	Gigatronics	8651A	SPM	1/9/2012	24
Power Sensor	Gigatronics	80701A	SPL	7/8/2011	24
EV06 Direct Connect Cable	ESM Cable Corp.	TT	ECA	NCR	0
Attenuator 20 dB, SMA M/F 26GHz	S.M. Electronics	SA26B-20	AUY	8/2/2012	12
40GHz DC Block	Miteq	DCB4000	AMD	6/25/2012	12
Spectrum Analyzer	Agilent	E4440A	AFD	7/5/2012	24

### TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Method Option 1 found in KDB 558074 DTS D01 Measurement Section 9.1.1 was used because the RBW on the analyzer was greater than the Emission Bandwidth of the radio.

**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36 dBm.

The spectrum was scanned below the lower band edge and above the higher band edge. All the tests contained in this report were completed with the EUT's software set to the following power levels:

The EUT Power Levels:

Low Ch. 2405 MHz = -0.4 dBm


Mid Ch. 2445 MHz = -0.4 dBm

High Ch. 2480 MHz = -1.5 dBm


## Output Power

EUT: ROUTER			Work Order: CARE0015																
Serial Number: 001D400000110057			Date: 04/22/13																
Customer: Care Innovations			Temperature: 23°C																
Attendees: Bill Morse			Humidity: 29%																
Project: None			Barometric Pres.: 1032																
Tested by: Brandon Hobbs, Rod Peloquin		Power: 3.3VDC	Job Site: EV06																
TEST SPECIFICATIONS																			
FCC 15.247:2013		Test Method: ANSI C63.10:2009																	
COMMENTS																			
The EUT was operating at 100% duty cycle while under test.																			
DEVIATIONS FROM TEST STANDARD																			
None																			
Configuration #	3	Signature: 																	
<table border="1"> <thead> <tr> <th></th> <th>Value</th> <th>Limit</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>2400 MHz - 2483.5 MHz Band</td> <td>4.918 mW</td> <td>&lt; 1 W</td> <td>Pass</td> </tr> <tr> <td>OQPSK</td> <td>3.364 mW</td> <td>&lt; 1 W</td> <td>Pass</td> </tr> <tr> <td></td> <td>1.744 mW</td> <td>&lt; 1 W</td> <td>Pass</td> </tr> </tbody> </table>					Value	Limit	Result	2400 MHz - 2483.5 MHz Band	4.918 mW	< 1 W	Pass	OQPSK	3.364 mW	< 1 W	Pass		1.744 mW	< 1 W	Pass
	Value	Limit	Result																
2400 MHz - 2483.5 MHz Band	4.918 mW	< 1 W	Pass																
OQPSK	3.364 mW	< 1 W	Pass																
	1.744 mW	< 1 W	Pass																

2400 MHz - 2483.5 MHz Band, OQPSK, Low Channel 2405 MHz

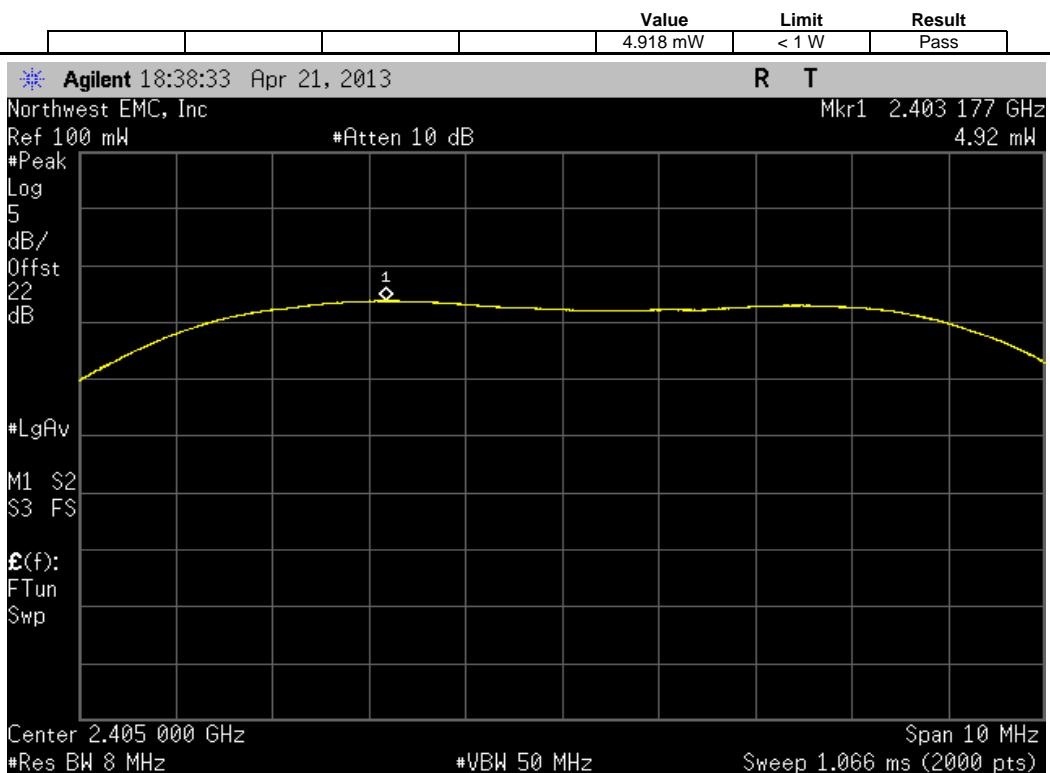


2400 MHz - 2483.5 MHz Band, OQPSK, Mid Channel 2445 MHz

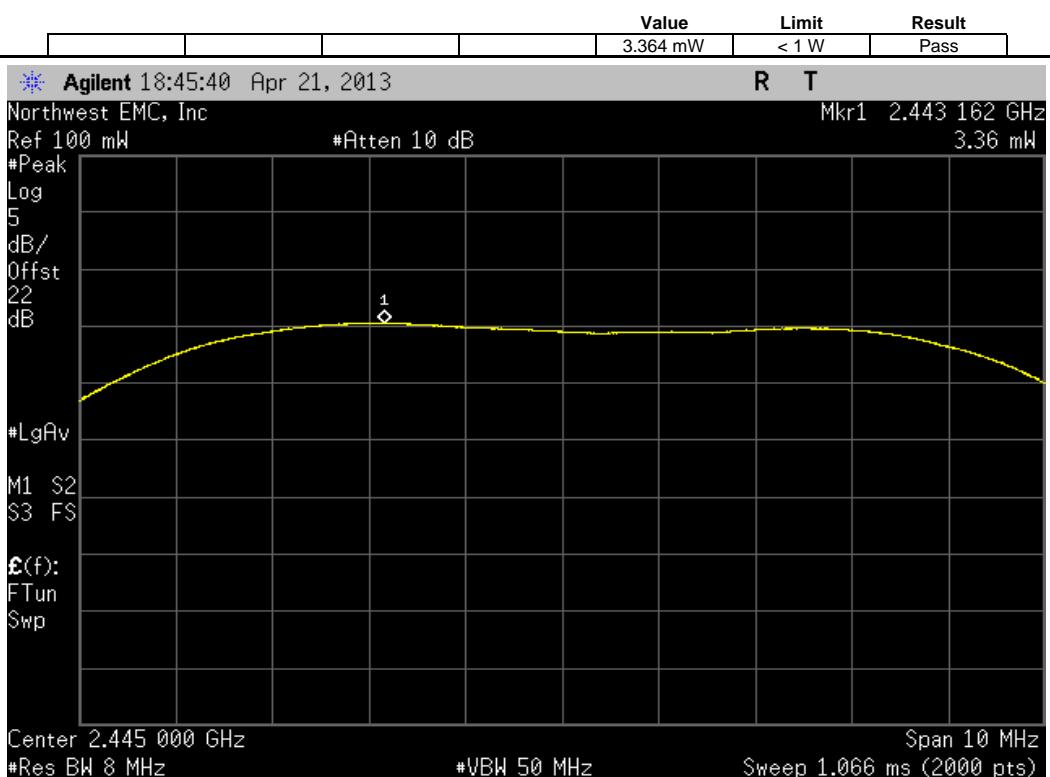

2400 MHz - 2483.5 MHz Band, OQPSK, High Channel 2480 MHz

				Value	Limit	Result
				1.744 mW	< 1 W	Pass

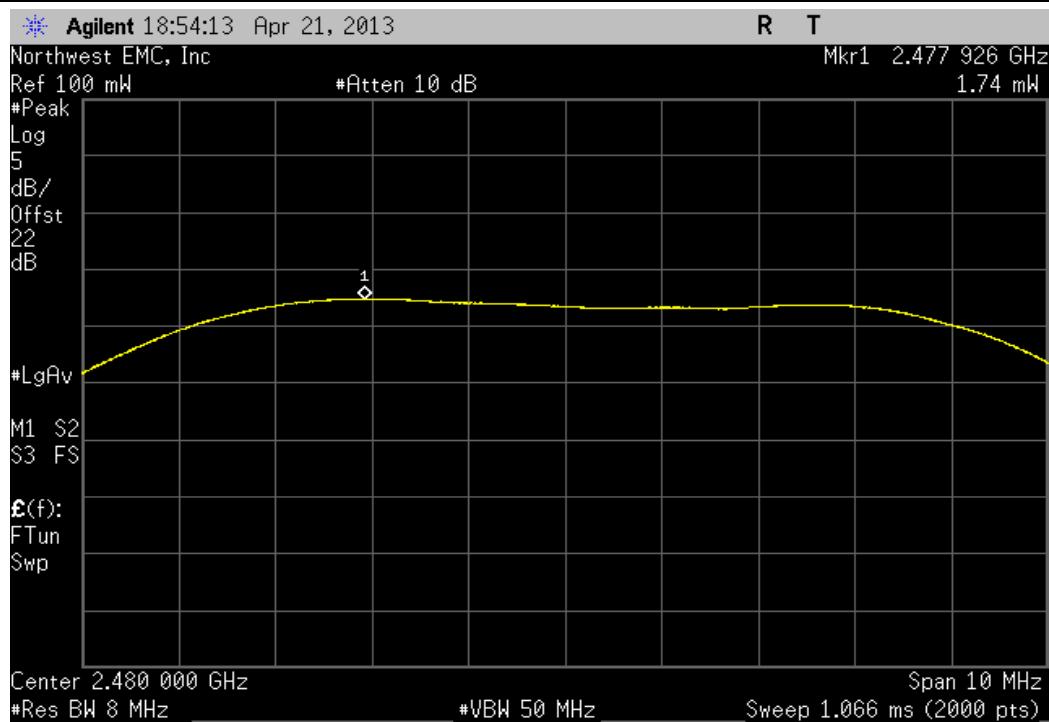

## Band Edge Compliance

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator, 6dB	S.M. Electronics	18N-06	AWN	3/25/2013	12
MXG Vector Signal Generator	Agilent	N5182A	TIF	NCR	0
Power Meter	Gigatronics	8651A	SPM	1/9/2012	24
Power Sensor	Gigatronics	80701A	SPL	7/8/2011	24
Attenuator 20 dB, SMA M/F 26GHz	S.M. Electronics	SA26B-20	AUY	8/2/2012	12
EV06 Direct Connect Cable	ESM Cable Corp.	TT	ECA	NCR	0
40GHz DC Block	Miteq	DCB4000	AMD	6/25/2012	12
Spectrum Analyzer	Agilent	E4440A	AFD	7/5/2012	24

### TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

The spectrum was scanned below the lower band edge and above the higher band edge. All the tests contained in this report were completed with the EUT's software set to the following power levels:

The EUT Power Levels:


Low Ch. 2405 MHz = -0.4 dBm

Mid Ch. 2445 MHz = -0.4 dBm


High Ch. 2480 MHz = -1.5 dBm

EUT: <b>ROUTER</b>		Work Order: <b>CARE0015</b>		
Serial Number: <b>001D400000110057</b>		Date: <b>04/22/13</b>		
Customer: <b>Care Innovations</b>		Temperature: <b>23°C</b>		
Attendees: <b>Bill Morse</b>		Humidity: <b>29%</b>		
Project: <b>None</b>		Barometric Pres.: <b>1032</b>		
Tested by: <b>Brandon Hobbs, Rod Peloquin</b>		Job Site: <b>EV06</b>		
<b>TEST SPECIFICATIONS</b>				
FCC 15.247:2013		Test Method: <b>ANSI C63.10:2009</b>		
<b>COMMENTS</b>				
The EUT was operating at 100% duty cycle while under test.				
<b>DEVIATIONS FROM TEST STANDARD</b>				
None				
Configuration #	3	Signature: 		
	Value	Limit	Result	
2400 MHz - 2483.5 MHz Band OQPSK	Low Channel 2405 MHz High Channel 2480 MHz	-41.41 dBc -33.29 dBc	≤ -20 dBc ≤ -20 dBc	Pass Pass

2400 MHz - 2483.5 MHz Band, OQPSK, Low Channel 2405 MHz

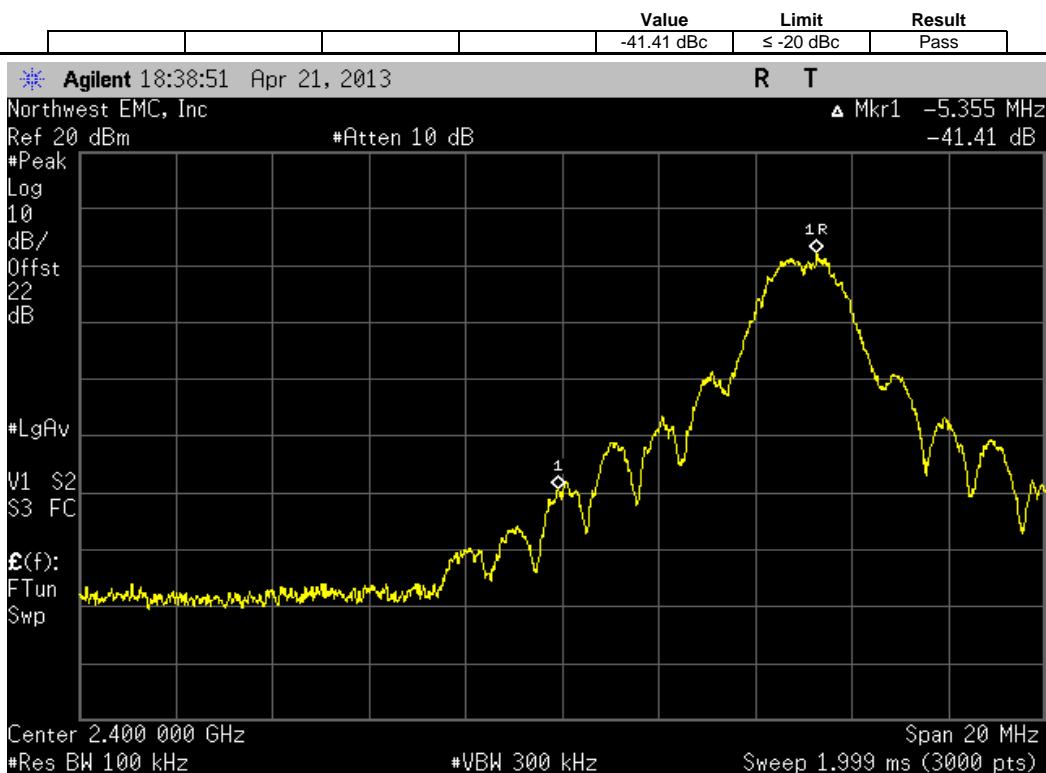

2400 MHz - 2483.5 MHz Band, OQPSK, High Channel 2480 MHz

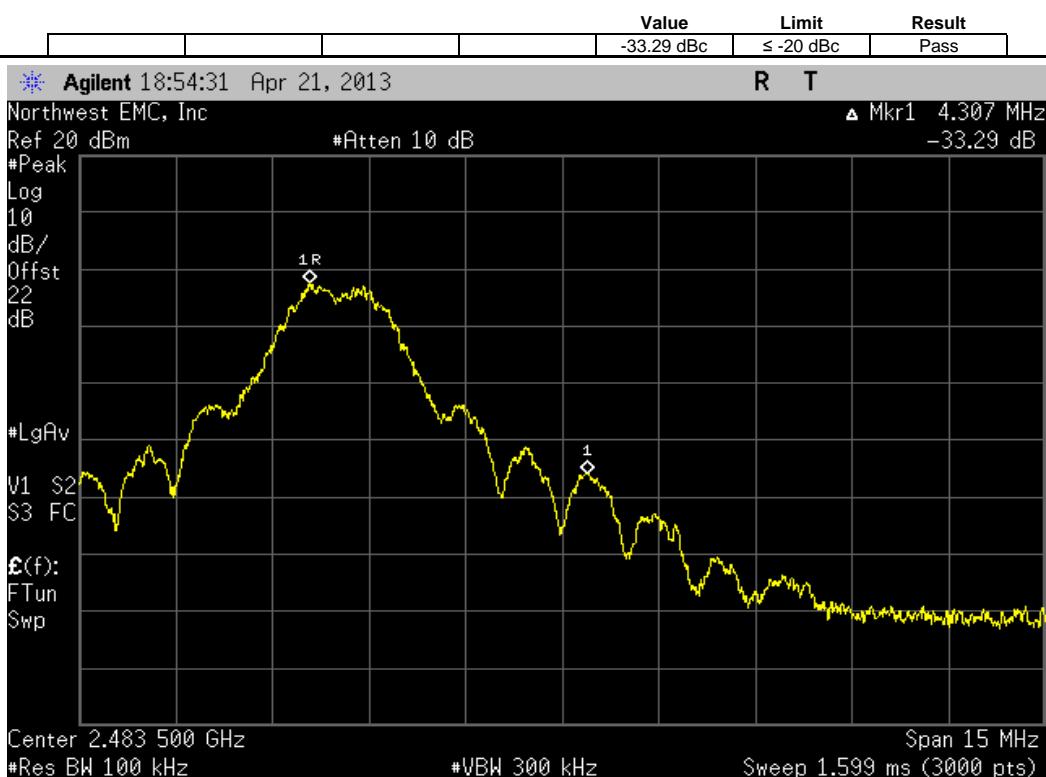

## Spurious Conducted Emissions

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator, 6dB	S.M. Electronics	18N-06	AWN	3/25/2013	12
MXG Vector Signal Generator	Agilent	N5182A	TIF	NCR	0
Power Meter	Gigatronics	8651A	SPM	1/9/2012	24
Power Sensor	Gigatronics	80701A	SPL	7/8/2011	24
EV06 Direct Connect Cable	ESM Cable Corp.	TT	ECA	NCR	0
Attenuator 20 dB, SMA M/F 26GHz	S.M. Electronics	SA26B-20	AUY	8/2/2012	12
40GHz DC Block	Miteq	DCB4000	AMD	6/25/2012	12
Spectrum Analyzer	Agilent	E4440A	AFD	7/5/2012	24

### TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

The spectrum was scanned below the lower band edge and above the higher band edge. All the tests contained in this report were completed with the EUT's software set to the following power levels:

The EUT Power Levels:

Low Ch. 2405 MHz = -0.4 dBm

Mid Ch. 2445 MHz = -0.4 dBm



High Ch. 2480 MHz = -1.5 dBm




## Spurious Conducted Emissions

XMit 2013.02.28  
PsaTx 2013.01.10


EUT: ROUTER	Work Order: CARE0015			
Serial Number: 001D400000110057	Date: 04/22/13			
Customer: Care Innovations	Temperature: 23°C			
Attendees: Bill Morse	Humidity: 29%			
Project: None	Barometric Pres.: 1032			
Tested by: Brandon Hobbs, Rod Peloquin	Job Site: EV06			
TEST SPECIFICATIONS				
FCC 15.247:2013	Test Method: ANSI C63.10:2009			
COMMENTS				
The EUT was operating at 100% duty cycle while under test.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	3	Signature:		
Frequency Range	Value	Limit	Result	
2400 MHz - 2483.5 MHz Band OQPSK				
Low Channel 2405 MHz	Fundamental	N/A	N/A	N/A
Low Channel 2405 MHz	30 MHz - 12.5 GHz	-51.54 dBc	≤ -20 dBc	Pass
Low Channel 2405 MHz	12.5 GHz - 25 GHz	-55.28 dBc	≤ -20 dBc	Pass
Mid Channel 2445 MHz	Fundamental	N/A	N/A	N/A
Mid Channel 2445 MHz	30 MHz - 12.5 GHz	-45.74 dBc	≤ -20 dBc	Pass
Mid Channel 2445 MHz	12.5 GHz - 25 GHz	-53.47 dBc	≤ -20 dBc	Pass
High Channel 2480 MHz	Fundamental	N/A	N/A	N/A
High Channel 2480 MHz	30 MHz - 12.5 GHz	-42.53 dBc	≤ -20 dBc	Pass
High Channel 2480 MHz	12.5 GHz - 25 GHz	-51.6 dBc	≤ -20 dBc	Pass

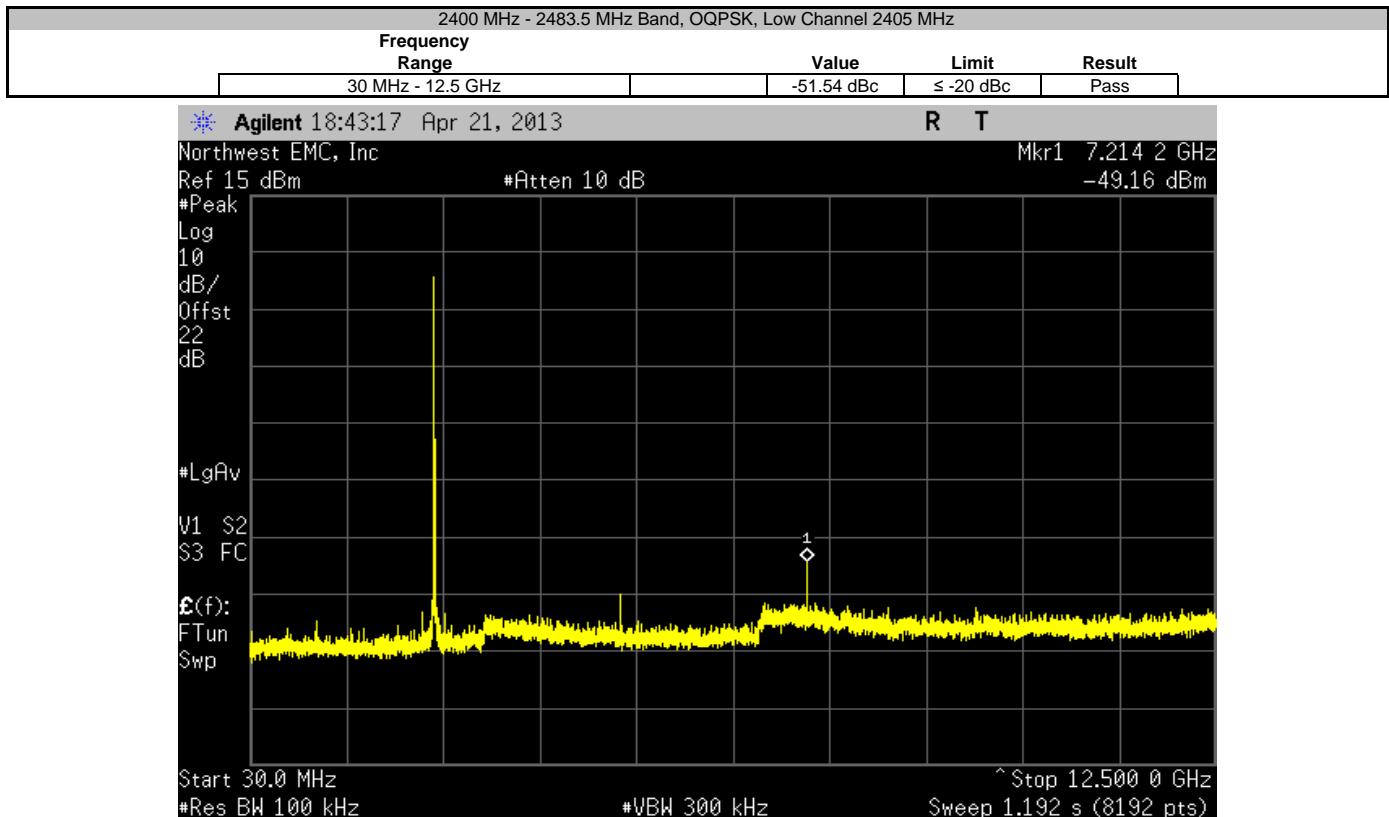
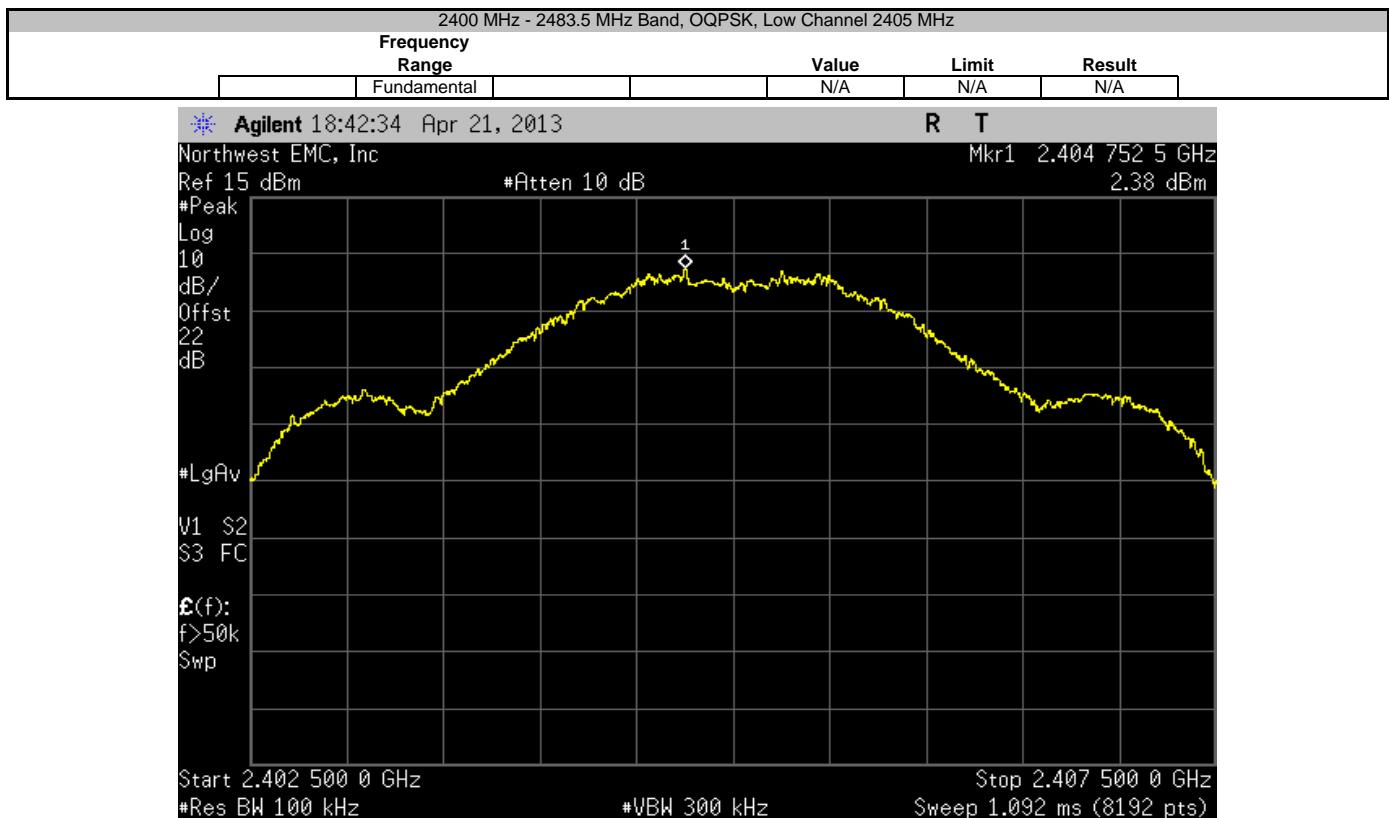




2400 MHz - 2483.5 MHz Band, OQPSK, Low Channel 2405 MHz				
Frequency Range		Value	Limit	Result
12.5 GHz - 25 GHz		-55.28 dBc	≤ -20 dBc	Pass

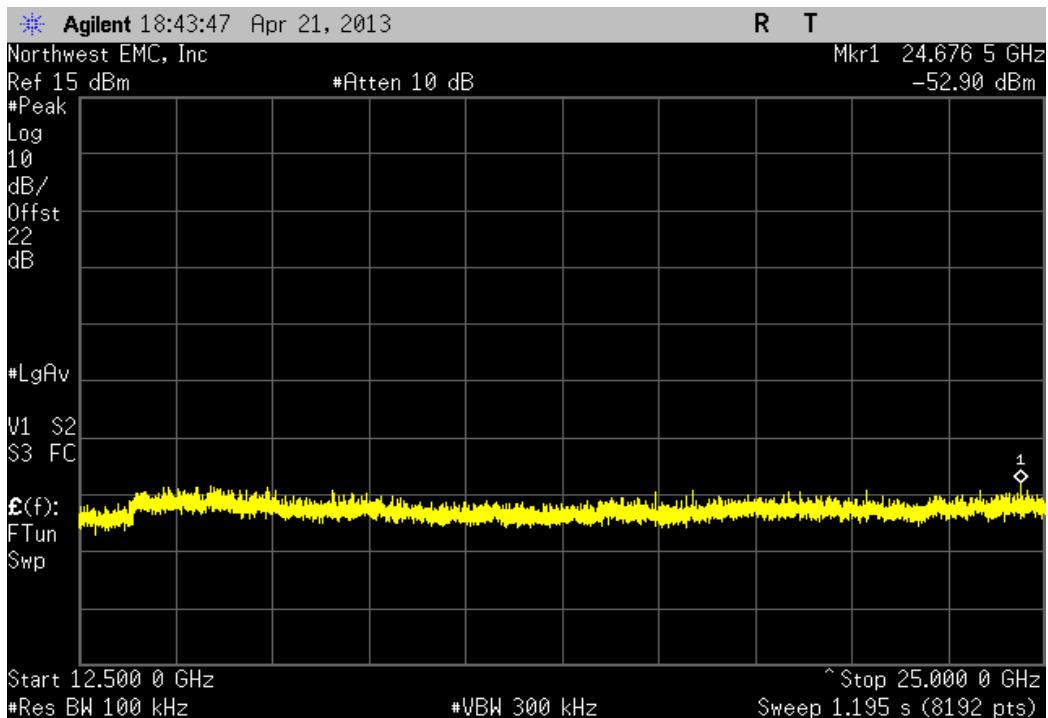

2400 MHz - 2483.5 MHz Band, OQPSK, Mid Channel 2445 MHz				
Frequency Range		Value	Limit	Result
Fundamental		N/A	N/A	N/A

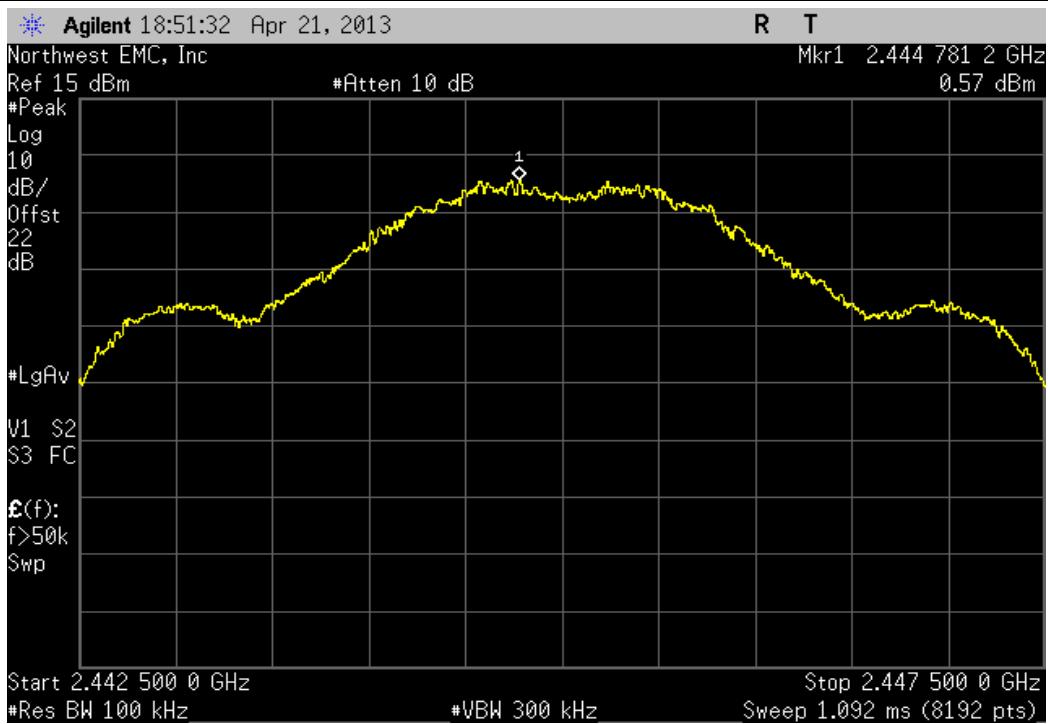


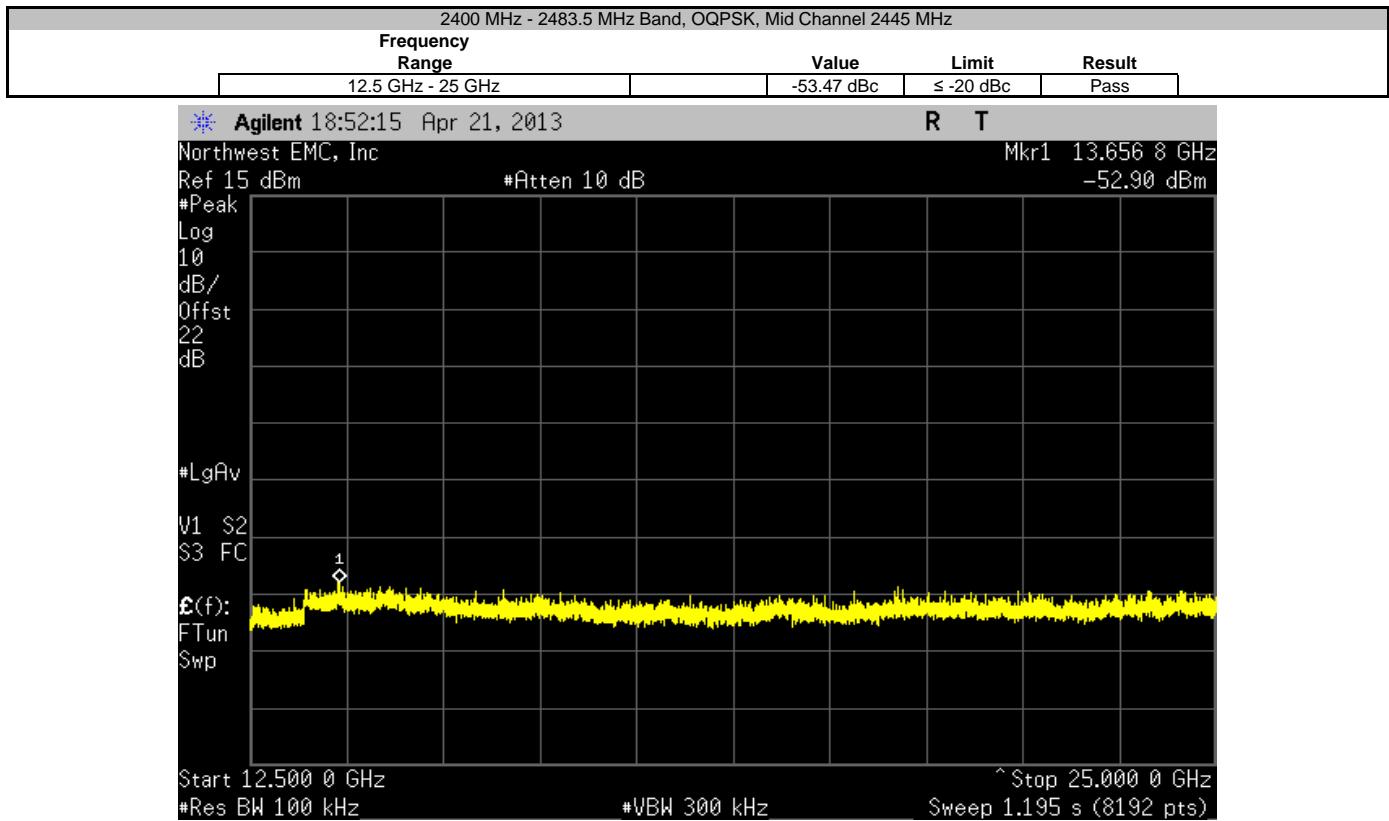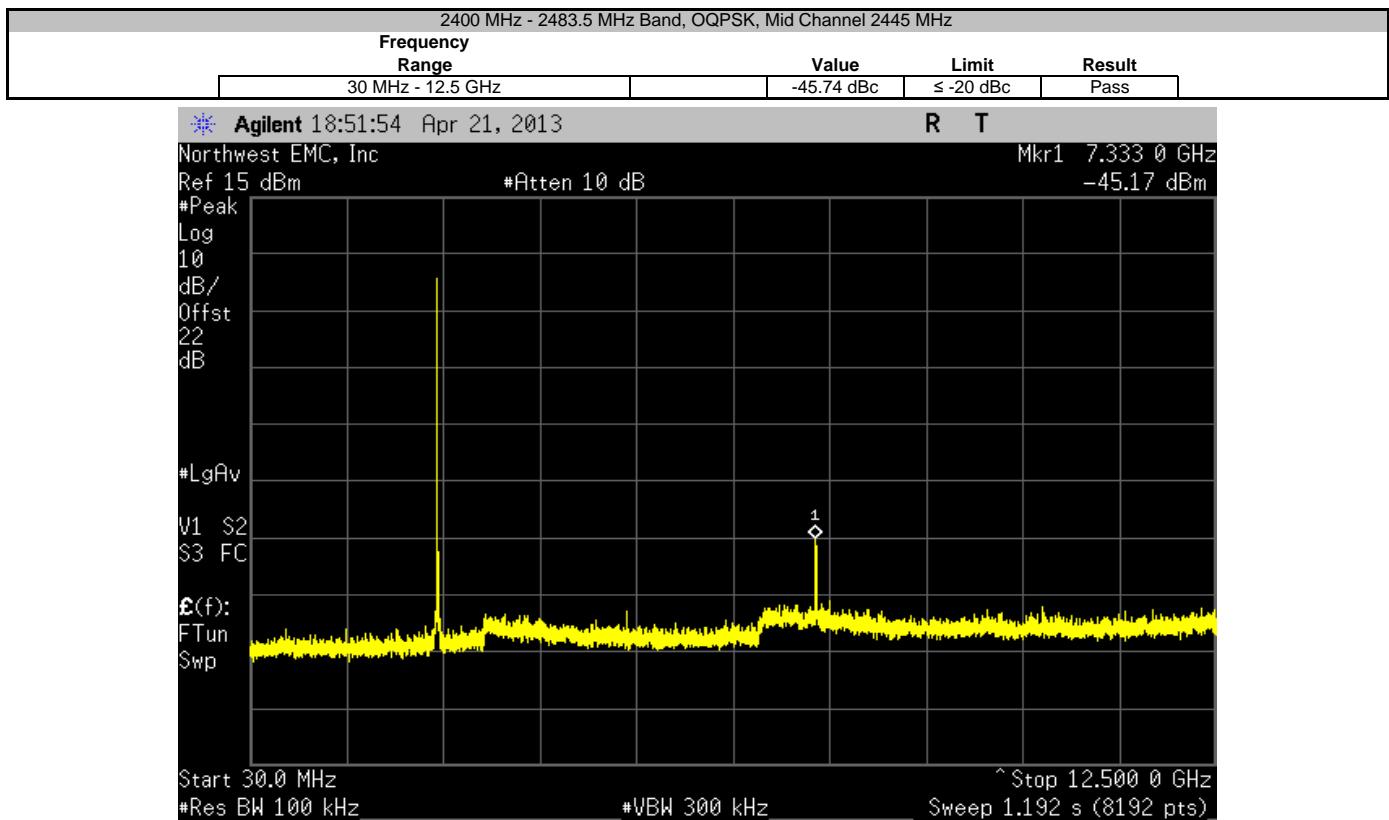

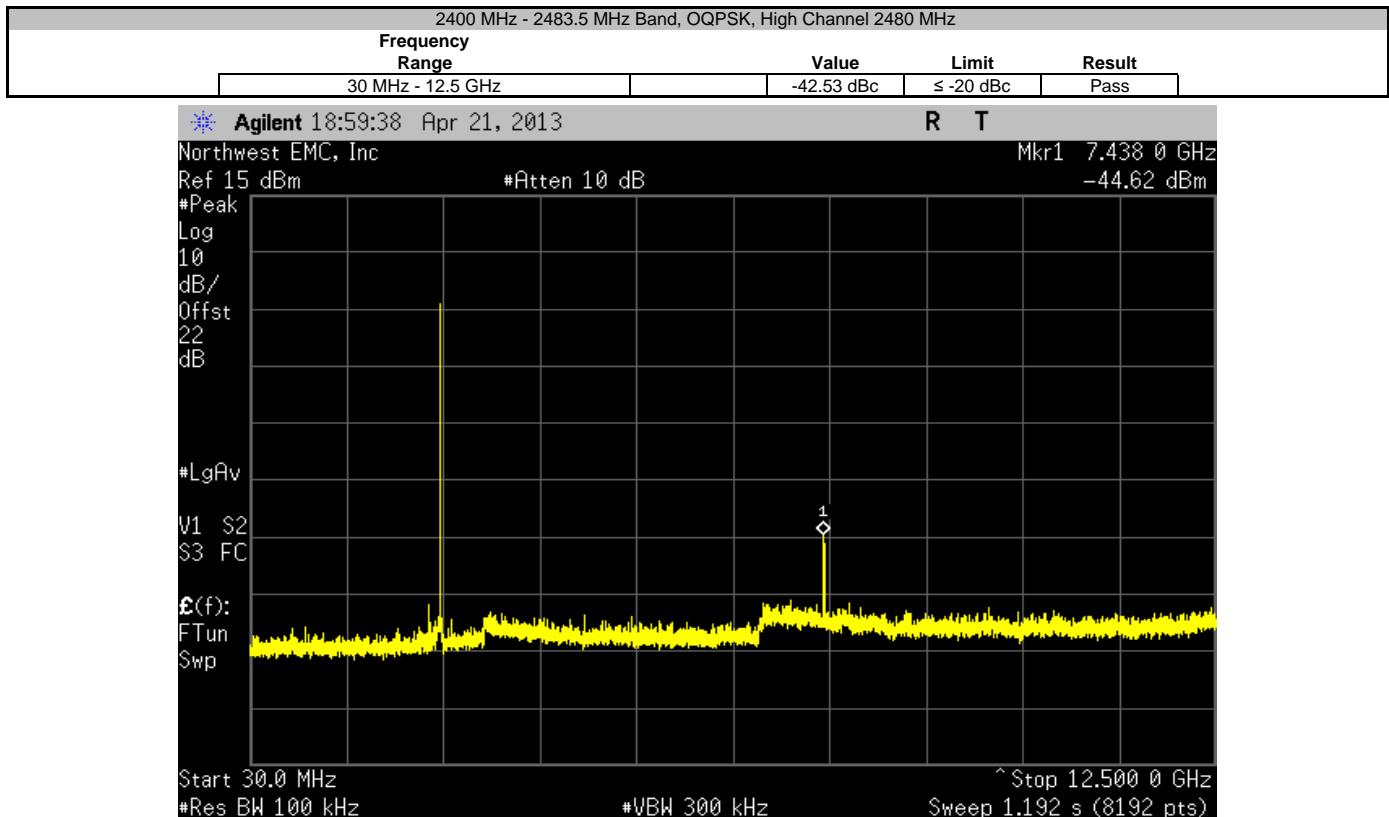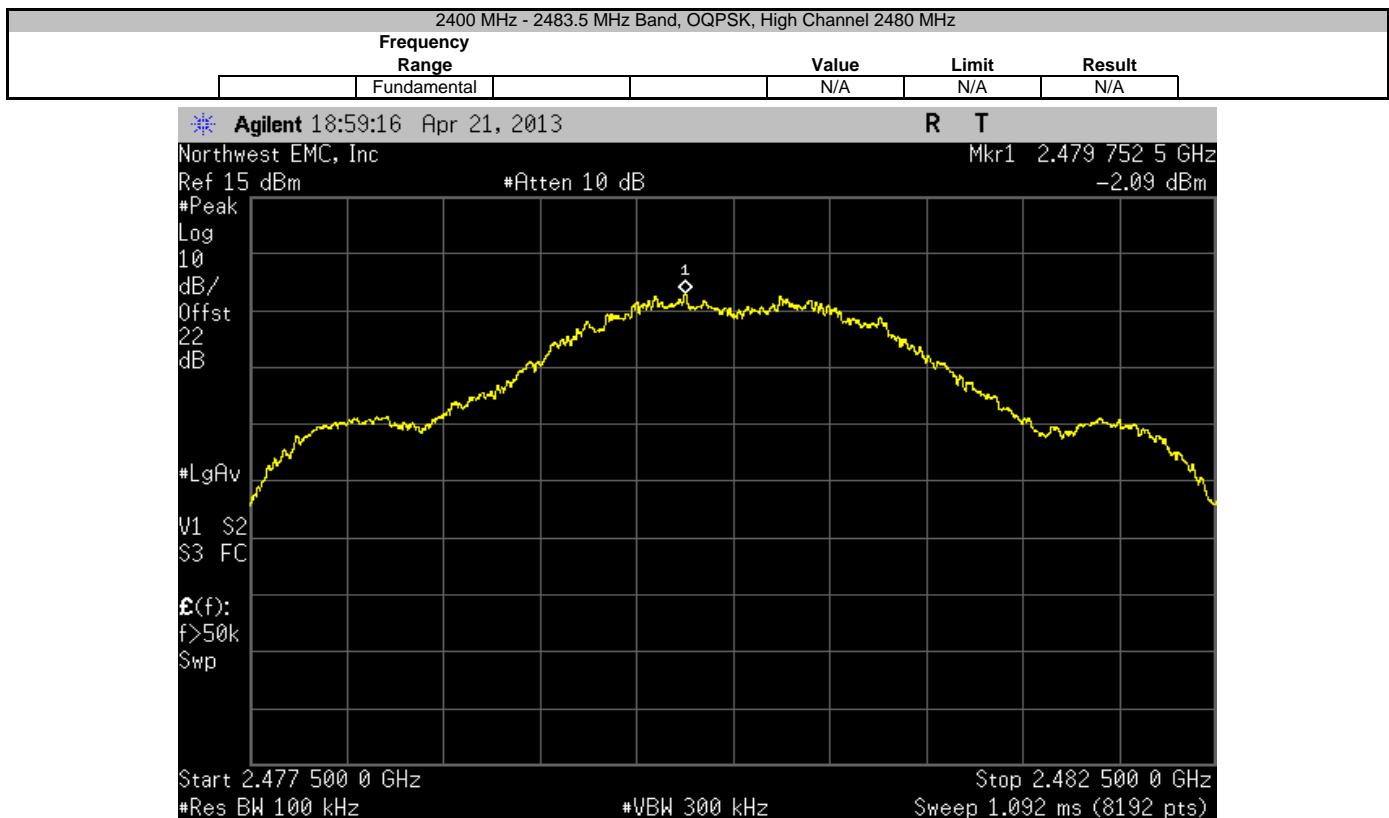

2400 MHz - 2483.5 MHz Band, OQPSK, High Channel 2480 MHz

Frequency Range	Value	Limit	Result
12.5 GHz - 25 GHz	-51.6 dBc	≤ -20 dBc	Pass

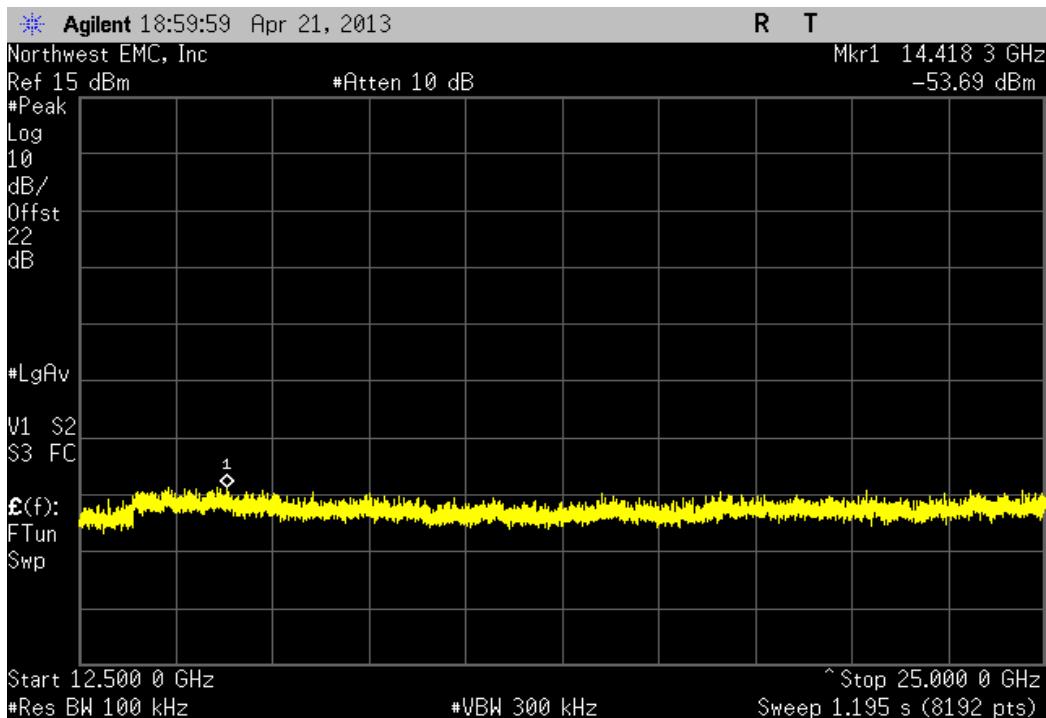

## Power Spectral Density

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator, 6dB	S.M. Electronics	18N-06	AWN	3/25/2013	12
MXG Vector Signal Generator	Agilent	N5182A	TIF	NCR	0
Power Meter	Gigatronics	8651A	SPM	1/9/2012	24
Power Sensor	Gigatronics	80701A	SPL	7/8/2011	24
EV06 Direct Connect Cable	ESM Cable Corp.	TT	ECA	NCR	0
Attenuator 20 dB, SMA M/F 26GHz	S.M. Electronics	SA26B-20	AUY	8/2/2012	12
40GHz DC Block	Miteq	DCB4000	AMD	6/25/2012	12
Spectrum Analyzer	Agilent	E4440A	AFD	7/5/2012	24

### TEST DESCRIPTION

The maximum power spectral density measurements were measured with the EUT set to the required transmit frequencies in each band. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the lowest, middle, and maximum data rate for each modulation type available.

Per the procedure outlined in FCC KDB 558074 D01 DTS Measurement Section 10.2 Method PKPSD (peak PSD), the spectrum analyzer was used as follows:

- RBW = 100 kHz
- VBW = 300 kHz
- Detector = Peak (to match method used for power measurement)
- Trace = Max hold

The observed power level is then scaled to an equivalent value in 3 kHz by adding a Bandwidth Correction Factor (BWCF) where:

$$\text{BWCF} = 10 \cdot \log (3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$$

The spectrum was scanned below the lower band edge and above the higher band edge. All the tests contained in this report were completed with the EUT's software set to the following power levels:

The EUT Power Levels:

Low Ch. 2405 MHz = -0.4 dBm  
 Mid Ch. 2445 MHz = -0.4 dBm  
 High Ch. 2480 MHz = -1.5 dBm

EUT: ROUTER		Work Order: CARE0015					
Serial Number: 001D400000110057		Date: 04/22/13					
Customer: Care Innovations		Temperature: 23°C					
Attendees: Bill Morse		Humidity: 29%					
Project: None		Barometric Pres.: 1032					
Tested by: Brandon Hobbs, Rod Peloquin		Job Site: EV06					
TEST SPECIFICATIONS		Test Method					
FCC 15.247:2013		ANSI C63.10:2009					
COMMENTS							
The EUT was operating at 100% duty cycle while under test.							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	3	Signature 					
		Value dBm/100kHz	dBm/100kHz To dBm/3kHz	Value dBm/3kHz	Limit dBm/3kHz	Result	
2400 MHz - 2483.5 MHz Band OQPSK		Low Channel 2405 MHz	2.229	-15.2	-12.971	8	Pass
		Mid Channel 2445 MHz	0.734	-15.2	-14.466	8	Pass
		High Channel 2480 MHz	-2.319	-15.2	-17.519	8	Pass

2400 MHz - 2483.5 MHz Band, OQPSK, Low Channel 2405 MHz					
	Value dBm/100kHz	dBm/100kHz To dBm/3kHz	Value dBm/3kHz	Limit dBm/3kHz	Result
	2.229	-15.2	-12.971	8	Pass



2400 MHz - 2483.5 MHz Band, OQPSK, Mid Channel 2445 MHz					
	Value dBm/100kHz	dBm/100kHz To dBm/3kHz	Value dBm/3kHz	Limit dBm/3kHz	Result
	0.734	-15.2	-14.466	8	Pass



2400 MHz - 2483.5 MHz Band, OQPSK, High Channel 2480 MHz

	Value dBm/100kHz	Value To dBm/3kHz	Value dBm/3kHz	Limit dBm/3kHz	Result
	-2.319	-15.2	-17.519	8	Pass



## Spurious Radiated Emissions

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

### MODES OF OPERATION

On transmitting 802.11 Zigbee Low 2405 MHz, Mid 2445 MHz and High 2480MHz

### POWER SETTINGS INVESTIGATED

3.3 VDC

### CONFIGURATIONS INVESTIGATED

CARE0015 - 3

### FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26 GHz
-----------------	--------	----------------	--------

### SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	ESM Cable Corp.	KMKG-72	EVY	9/11/2012	12 mo
Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	9/11/2012	12 mo
Antenna, Horn	ETS Lindgren	3160-09	AVI	NCR	0 mo
Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	2/27/2013	12 mo
Antenna, Horn	ETS	3160-08	AHV	NCR	0 mo
EV01 Cables	N/A	Bilog Cables	EVA	6/26/2012	12 mo
Pre-Amplifier	Miteq	AM-1616-1000	AOL	6/26/2012	12 mo
Antenna, Biconilog	EMCO	3141	AXG	4/10/2012	36 mo
EV01 Cables	N/A	Standard Gain Horns Cables	EVF	2/27/2013	12 mo
Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVC	2/27/2013	12 mo
Antenna, Horn	ETS	3160-07	AHU	NCR	0 mo
EV01 Cables	N/A	Double Ridge Horn Cables	EVB	6/27/2012	12 mo
Pre-Amplifier	Miteq	AMF-4D-010100-24-10P	APW	6/27/2012	12 mo
Antenna, Horn	ETS	3115	AIZ	1/24/2011	36 mo
LP Filter	Micro-Tronics	LPM50004	LFD	7/6/2012	24 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	2/7/2012	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	7/6/2012	24 mo

### MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0


### TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## Spurious Radiated Emissions

Work Order:	CARE0015	Date:	04/20/13	
Project:	None	Temperature:	22.6 °C	
Job Site:	EV01	Humidity:	36.8% RH	
Serial Number:	001D400000110057	Barometric Pres.:	1027 mbar	Tested by: Brandon Hobbs
EUT:	Router			
Configuration:	3			
Customer:	Care Innovations			
Attendees:	Bill Morse Stan Telson			
EUT Power:	3.3 VDC			
Operating Mode:	On transmitting 802.11 Zigbee Low 2405 MHz, Mid 2445 MHz and High 2480MHz			
Deviations:	None			
Comments:	Please reference the data comments for frequency and EUT orientation. The EUT was operating at 100% duty cycle while under test and a 10Hz video average was used for all average measurements.			

Test Specifications	Test Method
FCC 15.247:2012	ANSI C63.10:2009

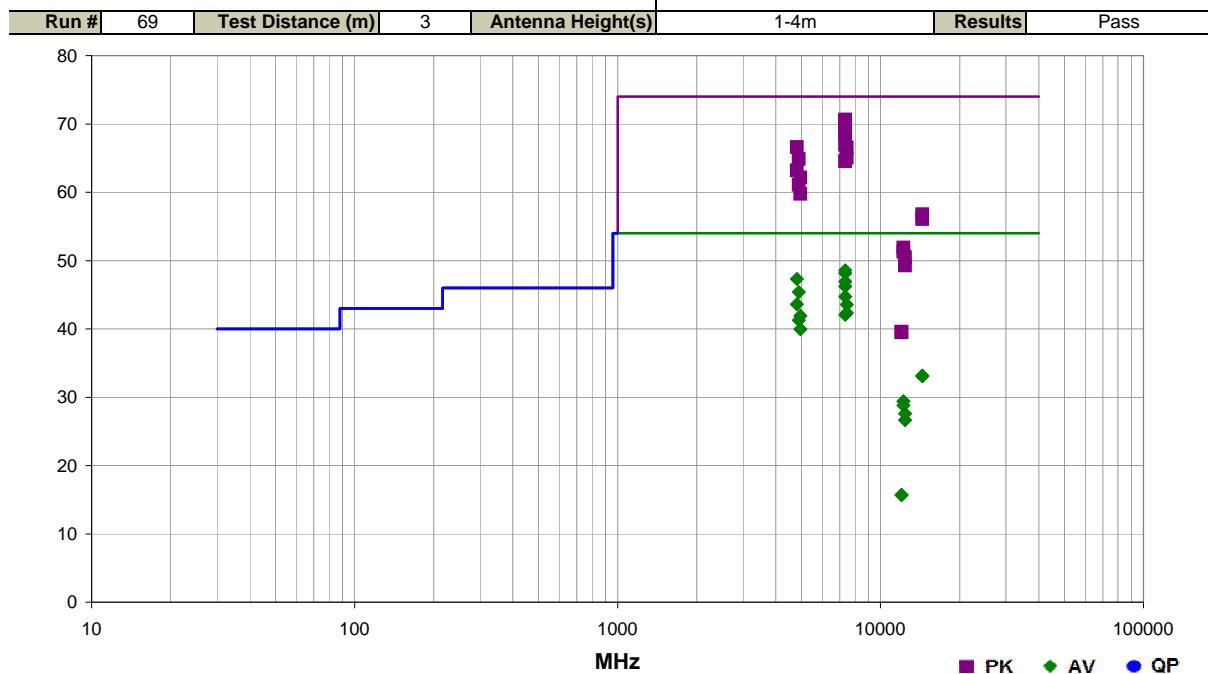


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7333.113	51.6	19.0	1.1	94.0	0.0	0.0	Horz	PK	0.0	70.6	74.0	-3.4	EUT Vert Up
7333.487	51.3	19.1	1.1	323.0	0.0	0.0	Horz	PK	0.0	70.4	74.0	-3.6	EUT Vert Down
7333.387	50.0	19.1	1.2	32.0	0.0	0.0	Horz	PK	0.0	69.1	74.0	-4.9	EUT On Side
7333.827	40.3	19.1	1.1	94.0	-10.8	0.0	Horz	AV	0.0	48.6	54.0	-5.4	EUT Vert Up
7333.600	49.4	19.1	1.0	104.0	0.0	0.0	Vert	PK	0.0	68.5	74.0	-5.5	EUT Vert Up
7333.813	39.9	19.1	1.1	323.0	-10.8	0.0	Horz	AV	0.0	48.2	54.0	-5.8	EUT Vert Down
4809.607	47.9	10.2	1.1	205.0	-10.8	0.0	Horz	AV	0.0	47.3	54.0	-6.7	EUT Vert Up
7333.800	38.7	19.1	1.2	32.0	-10.8	0.0	Horz	AV	0.0	47.0	54.0	-7.0	EUT On Side
7333.387	47.9	19.1	1.0	238.0	0.0	0.0	Vert	PK	0.0	67.0	74.0	-7.0	EUT Vert Down
4808.967	56.4	10.2	1.1	205.0	0.0	0.0	Horz	PK	0.0	66.6	74.0	-7.4	EUT Vert Up
7438.300	47.1	19.5	1.0	174.0	0.0	0.0	Horz	PK	0.0	66.6	74.0	-7.4	EUT Vert Up
7333.773	38.0	19.1	1.0	104.0	-10.8	0.0	Vert	AV	0.0	46.3	54.0	-7.7	EUT Vert Up
4889.547	45.7	10.5	1.0	121.0	-10.8	0.0	Horz	AV	0.0	45.4	54.0	-8.6	EUT Vert Up
7441.040	45.6	19.5	1.5	176.0	0.0	0.0	Vert	PK	0.0	65.1	74.0	-8.9	EUT Vert Up
4888.973	54.4	10.5	1.0	121.0	0.0	0.0	Horz	PK	0.0	64.9	74.0	-9.1	EUT Vert Up
7333.627	36.5	19.1	1.0	238.0	-10.8	0.0	Vert	AV	0.0	44.8	54.0	-9.2	EUT Vert Down
7333.560	45.5	19.1	1.0	254.0	0.0	0.0	Vert	PK	0.0	64.6	74.0	-9.4	EUT On Side
4809.653	44.2	10.2	1.0	155.0	-10.8	0.0	Vert	AV	0.0	43.6	54.0	-10.4	EUT Vert Up
7438.573	34.9	19.5	1.0	174.0	-10.8	0.0	Horz	AV	0.0	43.6	54.0	-10.4	EUT Vert Up
4808.873	53.0	10.2	1.0	155.0	0.0	0.0	Vert	PK	0.0	63.2	74.0	-10.8	EUT Vert Up
7438.573	33.7	19.5	1.5	176.0	-10.8	0.0	Vert	AV	0.0	42.4	54.0	-11.6	EUT Vert Up
4958.813	51.4	10.7	1.0	221.0	0.0	0.0	Horz	PK	0.0	62.1	74.0	-11.9	EUT Vert Up

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7333.633	33.8	19.1	1.0	254.0	-10.8	0.0	Vert	AV	0.0	42.1	54.0	-11.9	EUT On Side
4959.507	42.0	10.7	1.0	221.0	-10.8	0.0	Horz	AV	0.0	41.9	54.0	-12.1	EUT Vert Up
4889.567	41.6	10.5	1.0	146.0	-10.8	0.0	Vert	AV	0.0	41.3	54.0	-12.7	EUT Vert Up
4889.000	50.6	10.5	1.0	146.0	0.0	0.0	Vert	PK	0.0	61.1	74.0	-12.9	EUT Vert Up
4960.360	40.0	10.7	1.0	55.0	-10.8	0.0	Vert	AV	0.0	39.9	54.0	-14.1	EUT Vert Up
4960.660	49.0	10.7	1.0	55.0	0.0	0.0	Vert	PK	0.0	59.7	74.0	-14.3	EUT Vert Up
14428.980	38.9	17.9	1.2	95.0	0.0	0.0	Vert	PK	0.0	56.8	74.0	-17.2	EUT Vert Up
14430.570	38.2	17.9	1.0	206.0	0.0	0.0	Horz	PK	0.0	56.1	74.0	-17.9	EUT Vert Up
14431.710	26.1	17.9	1.2	95.0	-10.8	0.0	Vert	AV	0.0	33.2	54.0	-20.8	EUT Vert Up
14431.370	26.0	17.9	1.0	206.0	-10.8	0.0	Horz	AV	0.0	33.1	54.0	-20.9	EUT Vert Up
12223.130	55.6	-3.7	1.3	-1.0	0.0	0.0	Horz	PK	0.0	51.9	74.0	-22.1	EUT Vert Up
12223.300	55.0	-3.7	1.3	337.0	0.0	0.0	Vert	PK	0.0	51.3	74.0	-22.7	EUT Vert Up
12401.900	53.6	-3.1	1.3	333.0	0.0	0.0	Vert	PK	0.0	50.5	74.0	-23.5	EUT Vert Up
12223.000	43.9	-3.7	1.3	-1.0	-10.8	0.0	Horz	AV	0.0	29.4	54.0	-24.6	EUT Vert Up
12401.850	52.4	-3.1	1.1	330.0	0.0	0.0	Horz	PK	0.0	49.3	74.0	-24.7	EUT Vert Up
12223.000	43.3	-3.7	1.3	337.0	-10.8	0.0	Vert	AV	0.0	28.8	54.0	-25.2	EUT Vert Up
12398.000	41.5	-3.1	1.3	333.0	-10.8	0.0	Vert	AV	0.0	27.6	54.0	-26.4	EUT Vert Up
12398.000	40.6	-3.1	1.1	330.0	-10.8	0.0	Horz	AV	0.0	26.7	54.0	-27.3	EUT Vert Up
12024.260	43.8	-4.2	1.0	97.0	0.0	0.0	Horz	PK	0.0	39.6	74.0	-34.4	EUT Vert Up
12024.110	43.7	-4.2	1.0	207.0	0.0	0.0	Vert	PK	0.0	39.5	74.0	-34.5	EUT Vert Up
12026.970	30.7	-4.2	1.0	97.0	-10.8	0.0	Horz	AV	0.0	15.7	54.0	-38.3	EUT Vert Up
12026.600	30.7	-4.2	1.0	207.0	-10.8	0.0	Vert	AV	0.0	15.7	54.0	-38.3	EUT Vert Up



Work Order:	CARE0015	Date:	04/20/13	
Project:	None	Temperature:	22.6 °C	
Job Site:	EV01	Humidity:	36.8% RH	
Serial Number:	001D400000110057	Barometric Pres.:	1027 mbar	Tested by: Brandon Hobbs
EUT:	Router			
Configuration:	3			
Customer:	Care Innovations			
Attendees:	Bill Morse Stan Telson			
EUT Power:	3.3 VDC			
Operating Mode:	On transmitting 802.11 Zigbee Low 2405 MHz, Mid 2445 MHz and High 2480MHz			
Deviations:	None			
Comments:	Please reference the data comments for frequency and EUT orientation. The EUT was operating at 100% duty cycle while under test and a 10Hz video average was used for all average measurements.			

Test Specifications	Test Method
FCC 15.247:2012	ANSI C63.10:2009

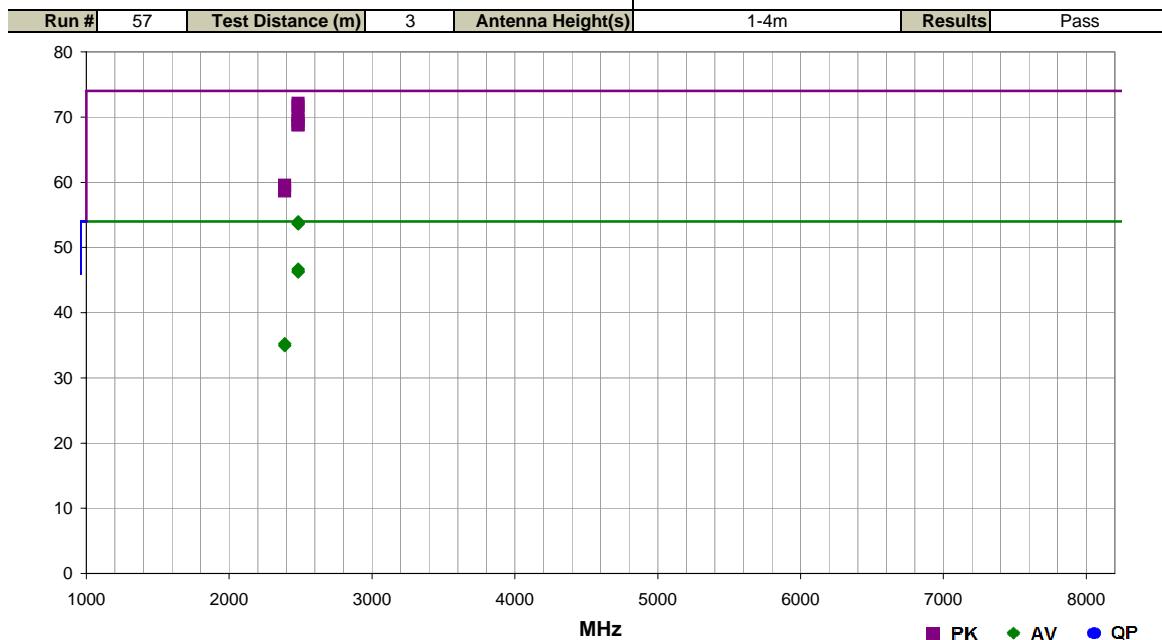


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.513	54.6	1.9	1.0	280.0	0.0	20.0	Vert	PK	0.0	101.4			Fundamental, EUT Vert Up, Marker Delta Method: Peak 101.4 - 31.17 = 70.23 dB
2483.500			1.0	280.0	0.0	20.0	Vert	PK	0.0	70.23	74.0	-3.8	
2483.530	54.2	1.9	1.6	133.0	0.0	20.0	Horz	PK	0.0	103.0			Fundamental, EUT On side, Marker Delta Method: Peak 103.0 - 30.90 = 72.1 dB
2483.500			1.6	133.0	0.0	20.0	Horz	PK	0.0	72.1	74.0	-1.9	
2483.520	54.2	1.9	1.5	178.0	0.0	20.0	Vert	PK	0.0	102.9			Fundamental, EUT Vert down, Marker Delta Method: Peak 102.9 - 31.23 = 71.67 dB
2483.500			1.5	178.0	0.0	20.0	Vert	PK	0.0	71.7	74.0	-2.3	
2483.500	42.9	1.9	1.0	280.0	-10.8	20.0	Vert	AV	0.0	54.0	54.0	0.0	Band Edge (10Hz) EUT Vert Up
2483.500	42.6	1.9	1.6	133.0	-10.8	20.0	Horz	AV	0.0	53.7	54.0	-0.3	Band Edge (10Hz) EUT On side
2483.500	42.6	1.9	1.5	178.0	-10.8	20.0	Vert	AV	0.0	53.7	54.0	-0.3	Band Edge EUT Vert down
2483.523	47.6	1.9	2.5	229.0	0.0	20.0	Horz	PK	0.0	69.5	74.0	-4.5	Band Edge EUT Vert down
2483.577	47.0	1.9	1.0	280.0	0.0	20.0	Horz	PK	0.0	68.9	74.0	-5.1	Band Edge EUT Vert Up
2483.537	46.9	1.9	1.2	285.0	0.0	20.0	Vert	PK	0.0	68.8	74.0	-5.2	Band Edge EUT On side
2483.500	35.6	1.9	2.5	229.0	-10.8	20.0	Horz	AV	0.0	46.7	54.0	-7.3	Band Edge EUT Vert down
2483.500	35.3	1.9	1.0	280.0	-10.8	20.0	Horz	AV	0.0	46.4	54.0	-7.6	Band Edge EUT Vert Up
2483.500	35.2	1.9	1.2	285.0	-10.8	20.0	Vert	AV	0.0	46.3	54.0	-7.7	Band Edge (10Hz) EUT On side
2389.280	38.0	1.5	1.0	74.0	0.0	20.0	Vert	PK	0.0	59.5	74.0	-14.5	Band Edge EUT Vert Up
2388.170	37.1	1.6	1.0	134.0	0.0	20.0	Horz	PK	0.0	58.7	74.0	-15.3	Band Edge EUT On side
2389.517	24.5	1.5	1.0	74.0	-10.8	20.0	Vert	AV	0.0	35.2	54.0	-18.8	Band Edge EUT Vert Up
2389.830	24.2	1.5	1.0	134.0	-10.8	20.0	Horz	AV	0.0	34.9	54.0	-19.1	Band Edge EUT On side

## Spurious Radiated Emissions

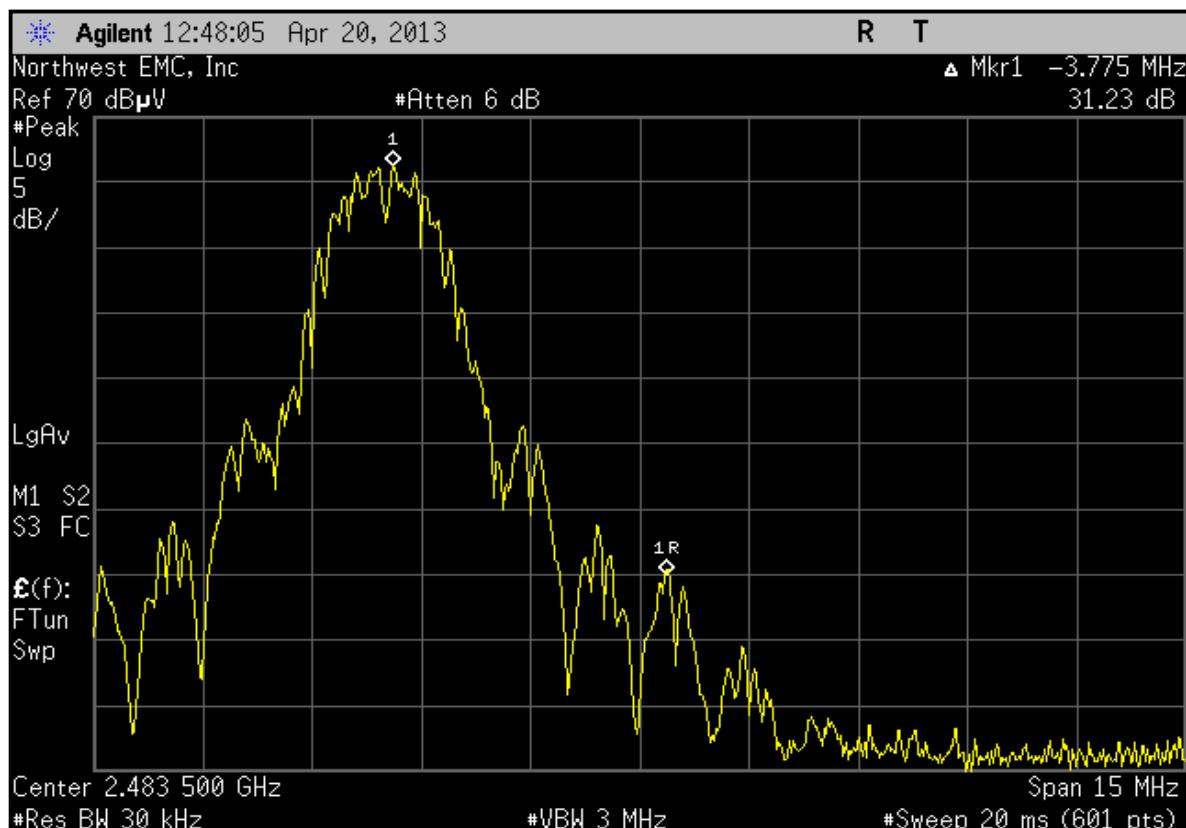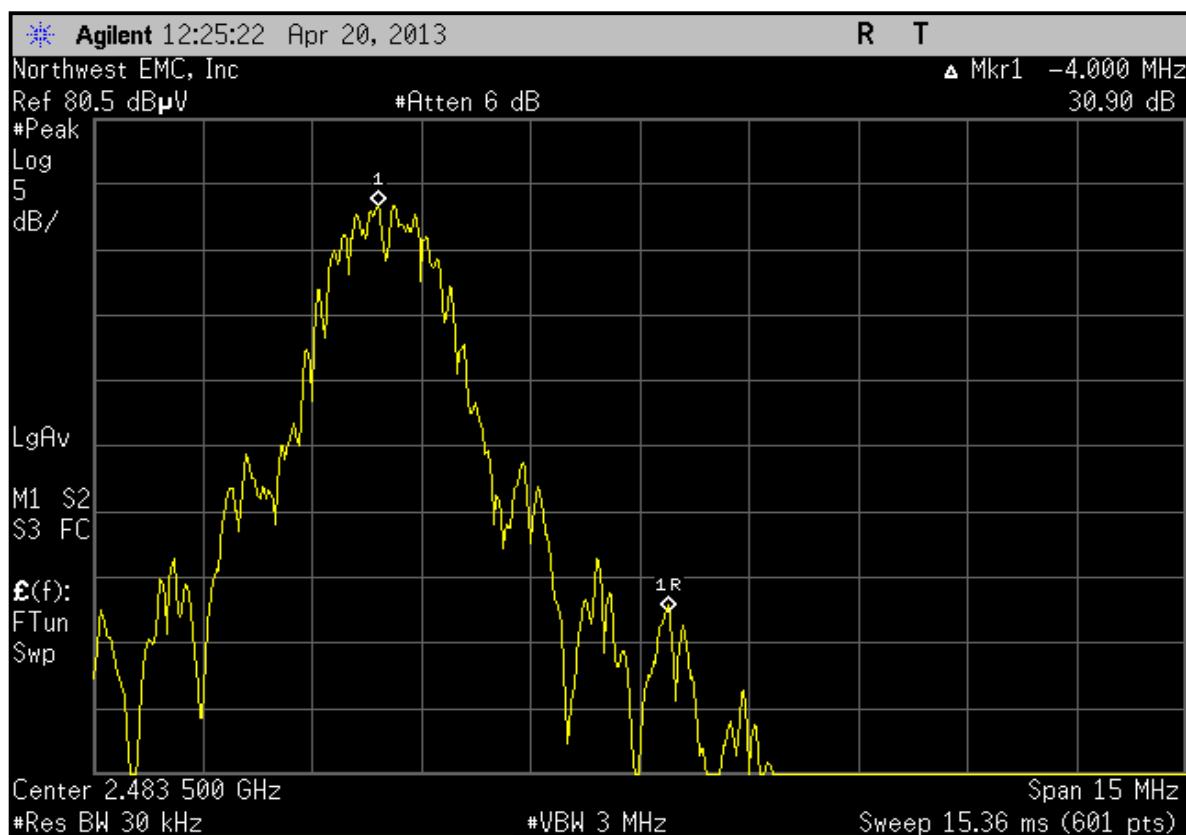

## Spurious Radiated Emissions

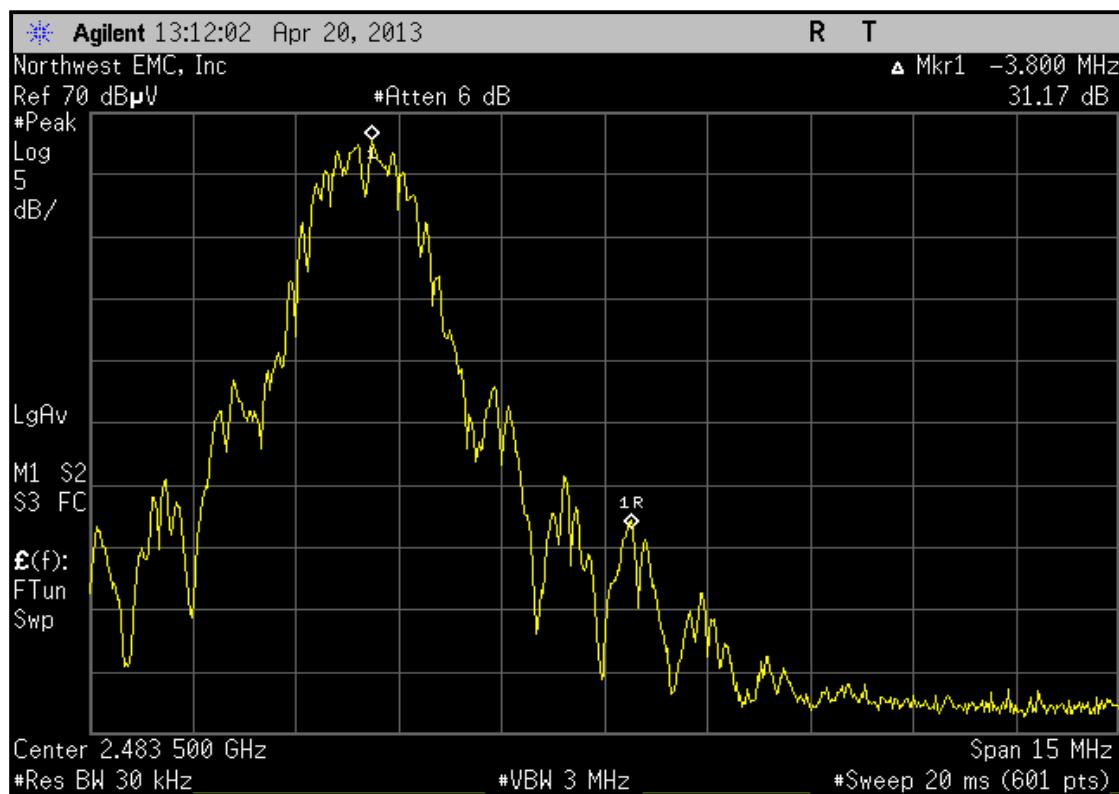

# AC POWERLINE CONDUCTED EMISSIONS

## TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50Ω.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Receiver	Rohde & Schwarz	ESCI	ARH	01/24/2013	12 mo
EV07 Cables	N/A	Conducted Cables	EVG	04/27/2012	12 mo
LISN	Solar	9252-50-R-24-BNC	LIN	03/11/2013	12 mo
Attenuator, 20db BNC	Fairview Microwave	SA01B-20	AQQ	09/10/2012	12 mo
High Pass Filter	TTE	H97-100K-50-720B	HHD	02/01/2012	24 mo

## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	2.94 dB	-2.94 dB

## CONFIGURATIONS INVESTIGATED

CARE0016-3

## MODES INVESTIGATED

On transmitting 802.11 Zigbee High Channel 2480 MHz  
 On transmitting 802.11 Zigbee Low Channel 2405 MHz  
 On transmitting 802.11 Zigbee Mid Channel 2445 MHz

# AC POWERLINE CONDUCTED EMISSIONS

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #:	20	Line:	Neutral	Ext. Attenuation (dB):	20
--------	----	-------	---------	------------------------	----

## COMMENTS



None

## EUT OPERATING MODES

On transmitting 802.11 Zigbee Low Channel 2405 MHz

## DEVIATIONS FROM TEST STANDARD

None

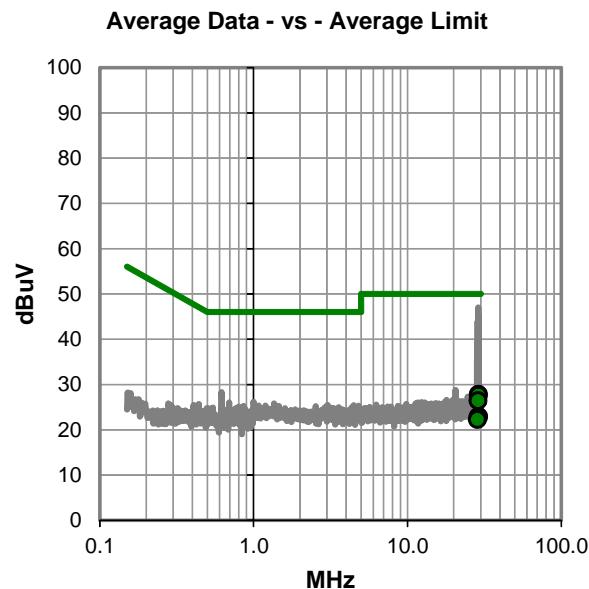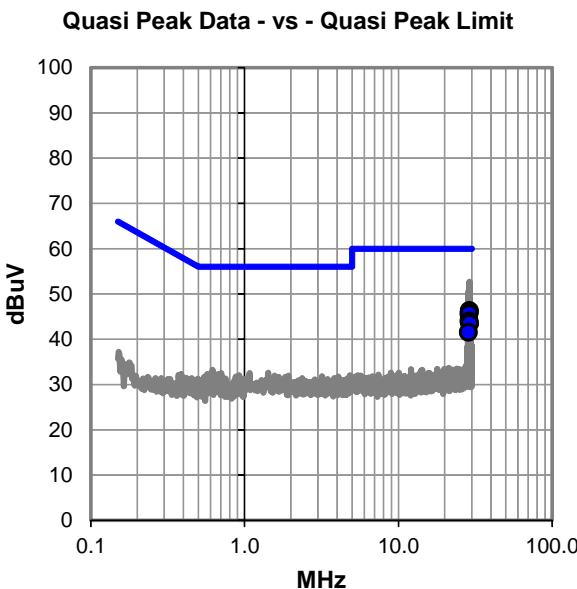

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #20

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.942	24.2	22.1	46.3	60.0	-13.7
28.960	23.9	22.1	46.0	60.0	-14.0
28.882	23.5	22.1	45.6	60.0	-14.4
28.782	21.9	22.1	44.0	60.0	-16.0
29.048	21.4	22.1	43.5	60.0	-16.5
28.620	19.4	22.1	41.5	60.0	-18.5

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.942	5.7	22.1	27.8	50.0	-22.2
28.960	5.5	22.1	27.6	50.0	-22.4
28.882	4.3	22.1	26.4	50.0	-23.6
29.048	0.8	22.1	22.9	50.0	-27.1
28.782	0.8	22.1	22.9	50.0	-27.1
28.620	0.2	22.1	22.3	50.0	-27.7

## CONCLUSION

Pass



Tested By

# AC POWERLINE CONDUCTED EMISSIONS

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #:	21	Line:	High Line	Ext. Attenuation (dB):	20
--------	----	-------	-----------	------------------------	----

## COMMENTS

None


## EUT OPERATING MODES

On transmitting 802.11 Zigbee Low Channel 2405 MHz


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

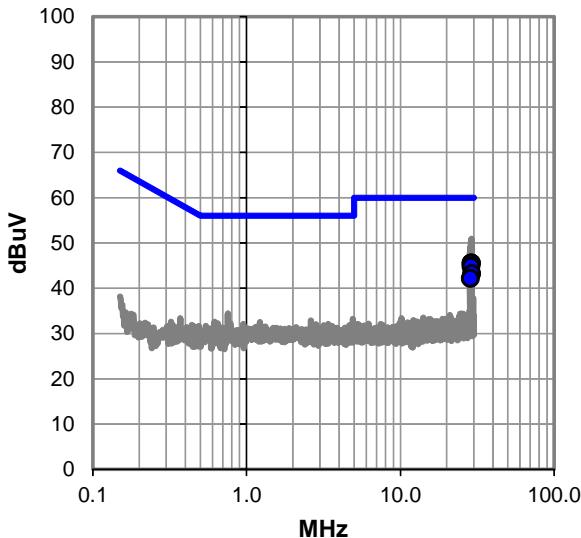

Average Data - vs - Average Limit

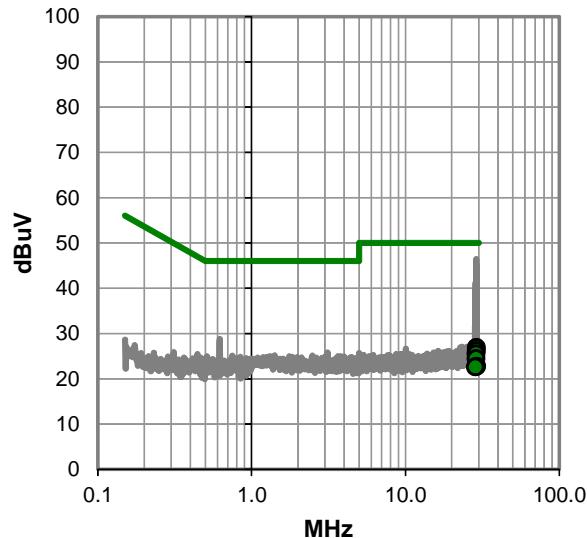

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #21

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.978	23.4	22.1	45.5	60.0	-14.5
28.930	23.4	22.1	45.5	60.0	-14.5
28.890	23.4	22.1	45.5	60.0	-14.5
28.868	22.7	22.1	44.8	60.0	-15.2
29.088	21.1	22.1	43.2	60.0	-16.8
28.558	20.1	22.1	42.2	60.0	-17.8

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.978	4.8	22.1	26.9	50.0	-23.1
28.930	4.1	22.1	26.2	50.0	-23.8
28.890	3.4	22.1	25.5	50.0	-24.5
28.868	2.3	22.1	24.4	50.0	-25.6
29.088	0.6	22.1	22.7	50.0	-27.3
28.558	0.5	22.1	22.6	50.0	-27.4

## CONCLUSION

Pass



Tested By

# AC POWERLINE CONDUCTED EMISSIONS

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #:	22	Line:	High Line	Ext. Attenuation (dB):	20
--------	----	-------	-----------	------------------------	----

## COMMENTS

None


## EUT OPERATING MODES

On transmitting 802.11 Zigbee Mid Channel 2445 MHz


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

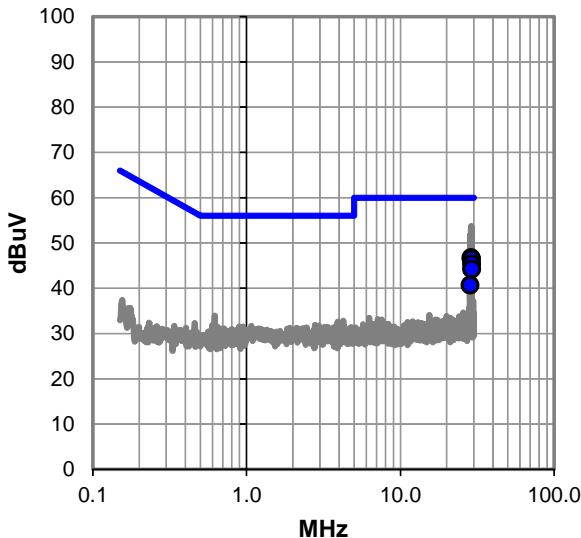

Average Data - vs - Average Limit

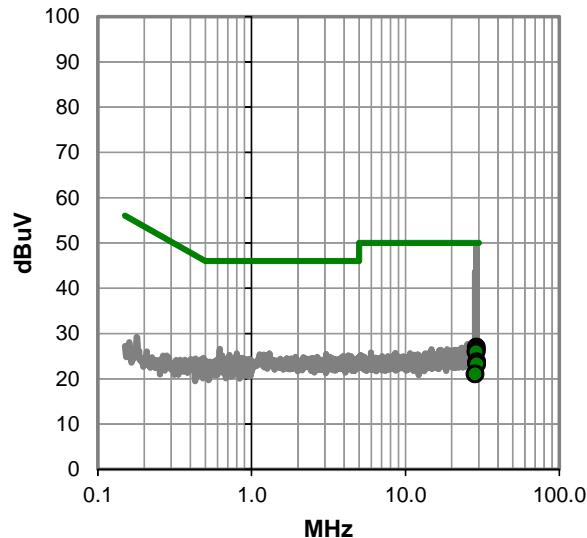

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #22

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.866	24.6	22.1	46.7	60.0	-13.3
28.952	24.4	22.1	46.5	60.0	-13.5
28.914	24.3	22.1	46.4	60.0	-13.6
29.098	23.2	22.1	45.3	60.0	-14.7
29.052	22.1	22.1	44.2	60.0	-15.8
28.372	18.6	22.1	40.7	60.0	-19.3

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.952	4.9	22.1	27.0	50.0	-23.0
28.914	4.2	22.1	26.3	50.0	-23.7
28.866	3.8	22.1	25.9	50.0	-24.1
29.098	1.6	22.1	23.7	50.0	-26.3
29.052	1.1	22.1	23.2	50.0	-26.8
28.372	-1.0	22.1	21.1	50.0	-28.9

## CONCLUSION

Pass



Tested By

# AC POWERLINE CONDUCTED EMISSIONS

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #:	23	Line:	Neutral	Ext. Attenuation (dB):	20
--------	----	-------	---------	------------------------	----

## COMMENTS

None


## EUT OPERATING MODES

On transmitting 802.11 Zigbee Mid Channel 2445 MHz


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

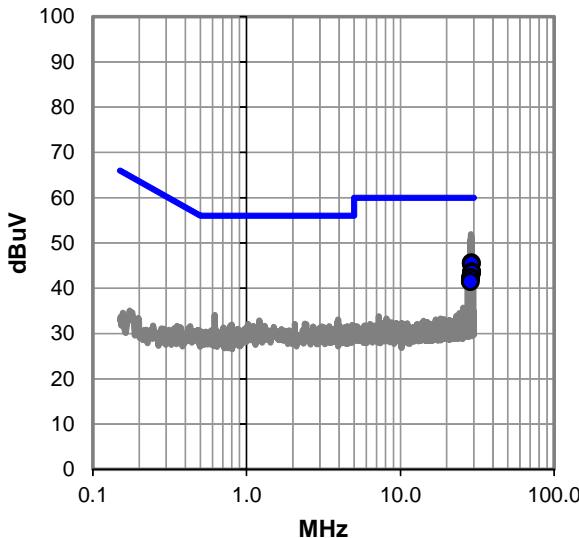

Average Data - vs - Average Limit

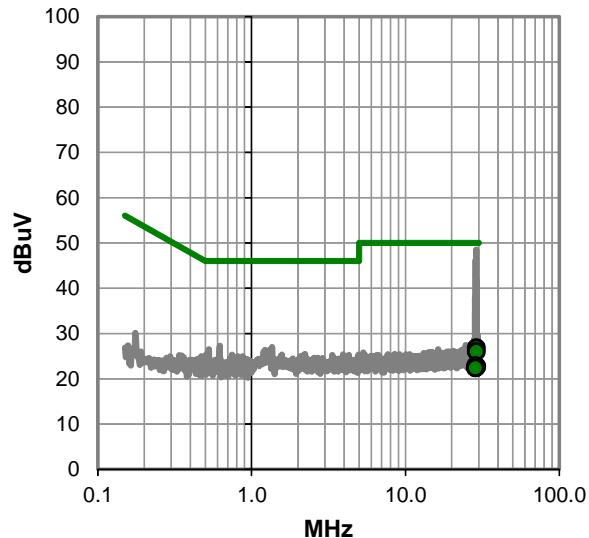

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #23

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.946	23.5	22.1	45.6	60.0	-14.4
28.912	23.3	22.1	45.4	60.0	-14.6
29.086	21.5	22.1	43.6	60.0	-16.4
29.052	21.3	22.1	43.4	60.0	-16.6
28.728	20.3	22.1	42.4	60.0	-17.6
28.636	20.1	22.1	42.2	60.0	-17.8
28.556	19.4	22.1	41.5	60.0	-18.5

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.946	4.7	22.1	26.8	50.0	-23.2
28.912	3.9	22.1	26.0	50.0	-24.0
28.636	0.8	22.1	22.9	50.0	-27.1
29.086	0.6	22.1	22.7	50.0	-27.3
29.052	0.5	22.1	22.6	50.0	-27.4
28.728	0.3	22.1	22.4	50.0	-27.6
28.556	0.3	22.1	22.4	50.0	-27.6

## CONCLUSION

Pass



Tested By

# AC POWERLINE CONDUCTED EMISSIONS

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #:	24	Line:	Neutral	Ext. Attenuation (dB):	20
--------	----	-------	---------	------------------------	----

## COMMENTS

None


## EUT OPERATING MODES

On transmitting 802.11 Zigbee High Channel 2480 MHz


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

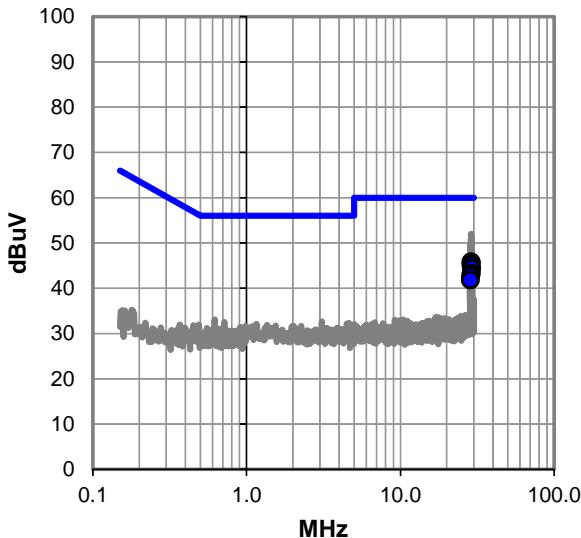

Average Data - vs - Average Limit

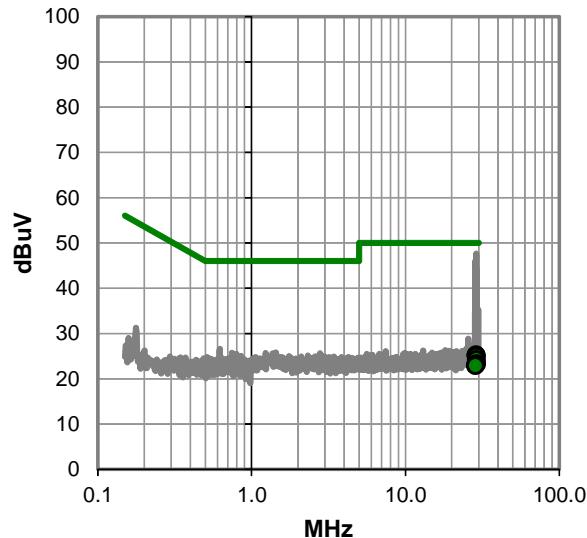

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #24

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.890	23.7	22.1	45.8	60.0	-14.2
28.940	23.5	22.1	45.6	60.0	-14.4
28.854	23.1	22.1	45.2	60.0	-14.8
29.106	22.3	22.1	44.4	60.0	-15.6
28.992	21.2	22.1	43.3	60.0	-16.7
28.762	20.6	22.1	42.7	60.0	-17.3
28.556	19.7	22.1	41.8	60.0	-18.2

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.890	3.2	22.1	25.3	50.0	-24.7
28.854	3.0	22.1	25.1	50.0	-24.9
28.940	2.9	22.1	25.0	50.0	-25.0
28.992	2.1	22.1	24.2	50.0	-25.8
29.106	1.2	22.1	23.3	50.0	-26.7
28.762	1.0	22.1	23.1	50.0	-26.9
28.556	0.8	22.1	22.9	50.0	-27.1

## CONCLUSION

Pass



Tested By

EUT:	Router	Work Order:	CARE0015
Serial Number:	001D400000110057	Date:	04/24/2013
Customer:	Care Innovations	Temperature:	21.4°C
Attendees:	Bill Morse	Relative Humidity:	30%
Customer Project:	None	Bar. Pressure:	1024.5 mb
Tested By:	Kyle Holgate	Job Site:	EV07
Power:	110VAC/60Hz	Configuration:	CARE0016-3

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2013	ANSI C63.10:2009

## TEST PARAMETERS

Run #: 25 Line: High Line Ext. Attenuation (dB): 20

## COMMENTS

None


## EUT OPERATING MODES

On transmitting 802.11 Zigbee High Channel 2480 MHz


## DEVIATIONS FROM TEST STANDARD

None

## Quasi Peak Data - vs - Quasi Peak Limit

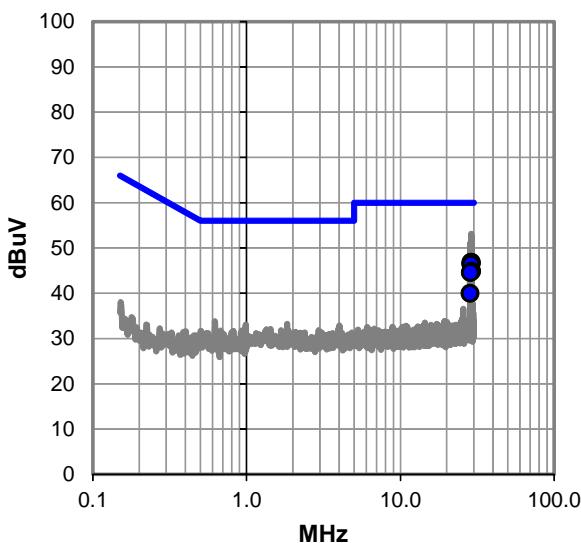

### Average Data - vs - Average Limit

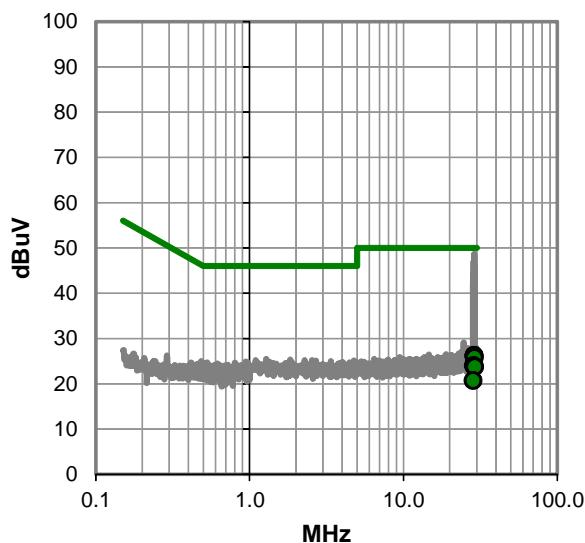

# AC POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #25

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.938	24.7	22.1	46.8	60.0	-13.2
28.902	24.7	22.1	46.8	60.0	-13.2
28.872	24.4	22.1	46.5	60.0	-13.5
28.830	24.3	22.1	46.4	60.0	-13.6
29.070	22.7	22.1	44.8	60.0	-15.2
28.614	22.5	22.1	44.6	60.0	-15.4
28.386	17.9	22.1	40.0	60.0	-20.0

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
28.902	4.2	22.1	26.3	50.0	-23.7
28.872	4.1	22.1	26.2	50.0	-23.8
28.830	3.9	22.1	26.0	50.0	-24.0
28.938	3.7	22.1	25.8	50.0	-24.2
28.614	1.9	22.1	24.0	50.0	-26.0
29.070	1.6	22.1	23.7	50.0	-26.3
28.386	-1.4	22.1	20.7	50.0	-29.3

## CONCLUSION

Pass



Tested By