FCC 47 CFR PART 15 SUBPART C TEST REPORT

For

Product Name: Wireless Router

Brand Name: UTT
Model No.: AC750GW
Series Model: AC751GW
FCC ID: XPF-REG05-UTT
Test Report Number:

Issued for

C150127R02-RPW

Shanghai UTT Technologies Co.,Ltd
Room 301,No.9 Building,No.518,Xinzhuan Rd,Songjiang District,Shanghai,China

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	3
2.	EUT DESCRIPTION	4
3.	TEST METHODOLOGY	5
3.1.	EUT CONFIGURATION	5
	EUT EXERCISE	
	GENERAL TEST PROCEDURES.	
	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
	DESCRIPTION OF TEST MODES	
3.6.	ANTENNA DESCRIPTION	8
4.	INSTRUMENT CALIBRATION	8
4.1.	MEASURING INSTRUMENT CALIBRATION	8
5.	FACILITIES AND ACCREDITATIONS	10
5.1.	FACILITIES	10
	EQUIPMENT	
	LABORATORY ACCREDITATIONS AND LISTING	
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS	11
6.	SETUP OF EQUIPMENT UNDER TEST	12
6.1.	SETUP CONFIGURATION OF EUT	12
6.2.	SUPPORT EQUIPMENT	12
4.	FCC PART 15.247 REQUIREMENTS	13
4.1.	6DB BANDWIDTH	13
4.2.	PEAK POWER	27
	PEAK POWER SPECTRAL DENSITY	
	SPURIOUS EMISSIONS	
	RADIATED EMISSIONS	
4.6.	POWERLINE CONDUCTED EMISSIONS	106

1. TEST RESULT CERTIFICATION

Product Name:	Wireless Router
Trade Name:	UTT
Model Name.:	AC750GW
Series Model:	AC751GW
Applicant Discrepancy:	Initial
Device Category:	Mobile Device
Date of Test:	January 28,2014 ~ March 2, 2015
Applicant:	Shanghai UTT Technologies Co.,Ltd Room 301,No.9 Building,No.518,Xinzhuan Rd,Songjiang District,Shanghai,China
Manufacturer:	Shanghai UTT Technologies Co.,Ltd Room 301,No.9 Building,No.518,Xinzhuan Rd,Songjiang District,Shanghai,China
Application Type:	Certification

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tested by:

Jeff.Fang RF Manager

Compliance Certification Service Inc.

James.Yan Test Engineer

Compliance Certification Service Inc.

lames - Yan

2. EUT DESCRIPTION

Product Name:	Wireless Router
Brand Name:	UTT
Model Name:	AC750GW
Series Model:	AC751GW
Model Discrepancy:	Only for market segment
Power Adapter Power Rating :	Model:FJ-SW1202000N Input: AC 100V~240V 50/60Hz
Frequency Range:	2.4G:2412MHz-2462MHz
Transmit Power:	IEEE 802.11b mode: 21.79 dBm IEEE 802.11g mode: 22.46 dBm IEEE 802.11n HT20 mode: 23.12 dBm IEEE 802.11n HT40 mode: 20.19 dBm
Modulation Technique:	802.11b mode: DSSS (1,2,5.5 and 11 Mbps) 802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) 802.11n HT20 mode: OFDM (6.5,13,19.5,26,39,52,58.5 and 65 Mbps) 802.11n HT40 mode: OFDM (13.5,27,40.5,54,81,108,121.5 and 135 Mbps)
Number of Channels: IEEE 802.11b/g/n HT20 mode: 11 Channels IEEE 802.11n HT40 mode: 7 Channels	
Antenna Specification:	Dipole antennas for 2.4GHz Gain 7 dBi

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for *FCC ID: XPF-REG05-UTT* filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 2009and FCC CFR 47 15.207, 15.209 and 15.247.

3.1.EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2.EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3.GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 2009.

3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

² Above 38.6

3.5.DESCRIPTION OF TEST MODES

The EUT transmitting and receiving with two antennas simultaneously working at b/g/n mode, so 2x2 configuration was used for all testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 11Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 54Mbps data rate was chosen for full testing.

Draft 802.11gn Standard-20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 65Mbps data rate was chosen for full testing.

Draft 802.11gn Wide-40 MHz Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with 135Mbps data rate was chosen for full testing.

3.6.ANTENNA DESCRIPTION

Antenna specifications meet the requirements of 15.203 2.4G Antenna 0 5G Antenna 2.4G Antenna 1

4. INSTRUMENT CALIBRATION

4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11	
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2016-3-15	
Power Sensor	Anritsu	MA2411A	0917072	2015-6-3	
Power Meter	Aglient	U2021XA	MY53120005	2015-9-12	
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2016-1-21	
Test Software	EZ-EMC				

977 Chamber						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-11-11		
EMI Test Receiver	R&S	ESCI	101378	2016-1-21		
Pre-Amplfier	MINI	ZFL-1000VH2	d041703	2016-1-21		
Pre-Amplfier	Miteq	JS41-00101800-32-10P	1675713	2016-1-21		
Bilog Antenna	Sunol	JB1	A062604	2016-3-5		
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2016-3-6		
Turn Table	СТ	CT123	4165	N.C.R		
Antenna Tower	СТ	CTERG23	3256	N.C.R		
Controller	СТ	CT100	95637	N.C.R		
Test Software	re EZ-EMC					

Conducted Emission						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
EMI TEST RECEIVER	R&S	ESCI	100781	2016-3-15		
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R		
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	05012	2016-3-15		
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24		
Test Software		EZ-EMC				

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

FCC ID: XPF-REG05-UTT Date of Issue :March 10, 2015

5. FACILITIES AND ACCREDITATIONS

5.1.FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 2009 and CISPR Publication 22.

5.2.EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3.LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.

5.4.TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4:2009); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1:2000+A2:2002; EN 55022:2006; EN55022:1998 +A1:2001+A2:2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-3-3; IEC 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	ACCREDITED TESTING CERT #2541.01
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

Remark:

- 2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Report No: C150127R02-RPW

FCC ID: XPF-REG05-UTT Date of Issue :March 10, 2015


4. FCC PART 15.247 REQUIREMENTS

4.1.6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the selected span. The VBW is set to 3 times the RBW. The sweep time is occupied.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.067	>500	PASS
Mid	2437	9.076		PASS
High	2462	8.566		PASS

IEEE 802.11b mode /Chain 1

ILLE 002.115 mode / Onam 1					
Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result	
Low	2412	9.060	>500	PASS	
Mid	2437	9.005		PASS	
High	2462	9.061		PASS	

IEEE 802.11g mode /Chain 0

	Frequency	Bandwidth	Limit	
Channel	(MHz)	(MHz)	(kHz)	Result
Low	2412	16.509		PASS
Mid	2437	16.514	>500	PASS
High	2462	16.522		PASS

IEEE 802.11g mode /Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.507		PASS
Mid	2437	16.528	>500	PASS
High	2462	16.539		PASS

draft 802.11n Standard-20 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.579		PASS
Mid	2437	17.621	>500	PASS
High	2462	17.338		PASS

draft 802.11n Standard-20 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.684		PASS
Mid	2437	17.650	>500	PASS
High	2462	17.672		PASS


draft 802.11n wide-40 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.116		PASS
Mid	2437	36.078	>500	PASS
High	2452	36.129		PASS

draft 802.11n wide-40 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.145		PASS
Mid	2437	36.134	>500	PASS
High	2452	36.446		PASS


Test Plot IEEE 802.11b MODE /Chain 0 6dB Bandwidth (CH Low)

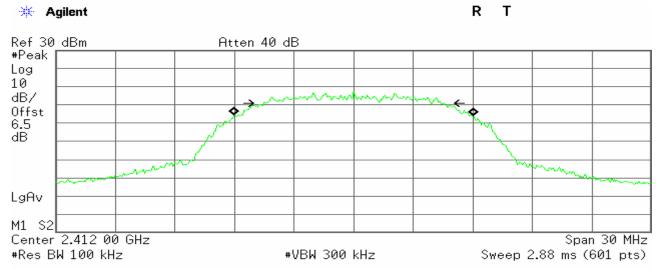

Occupied Bandwidth 12.0786 MHz Осс ВW % Рыг 99.00 % ж dB -6.00 dB


Transmit Freq Error 4.608 kHz x dB Bandwidth 9.067 MHz

6dB Bandwidth (CH Mid)

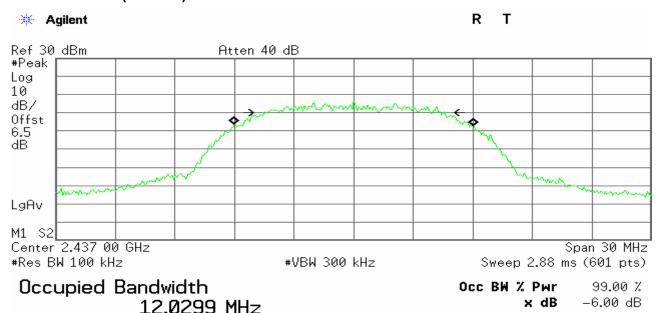

Transmit Freq Error 14.990 kHz x dB Bandwidth 9.076 MHz

6dB Bandwidth (CH High)

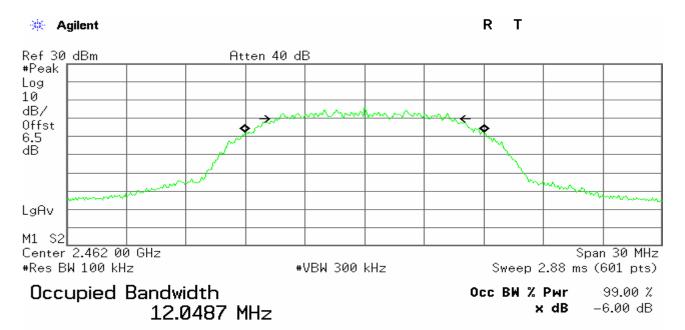


Transmit Freq Error 12.330 kHz

8.566 MHz


IEEE 802.11b MODE /Chain 1

6dB Bandwidth (CH Low)

x dB Bandwidth

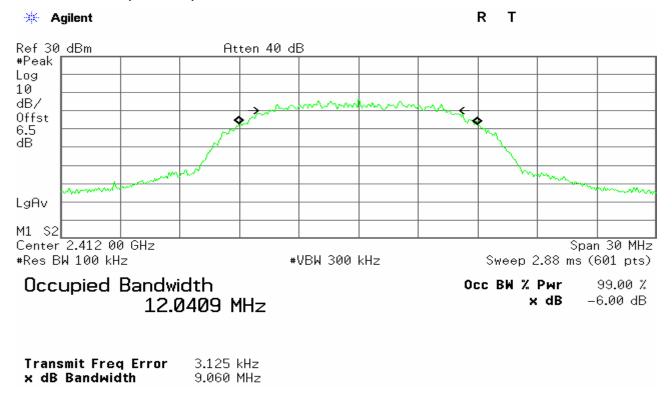

6dB Bandwidth (CH Mid)

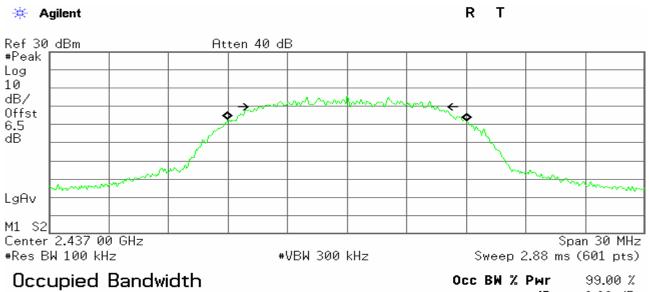


12.0155 MHz

x dB -6.00 dB


Transmit Freq Error 22.176 kHz x dB Bandwidth 9.005 MHz

6dB Bandwidth (CH High)

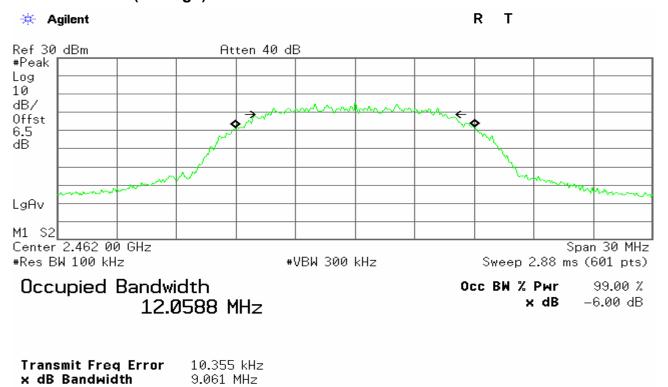


IEEE 802.11g MODE /Chain 0

6dB Bandwidth (CH Low)

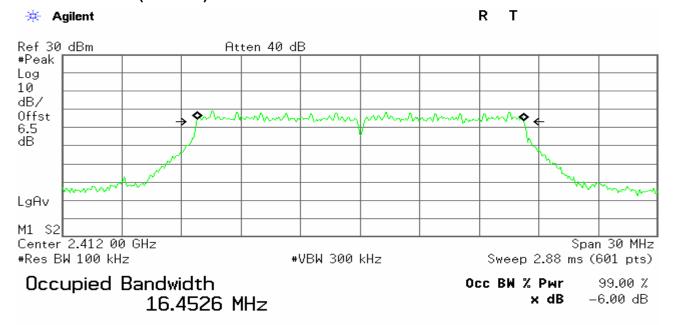


Transmit Freg Error 19.500 kHz x dB Bandwidth 16.509 MHz

6dB Bandwidth (CH Mid)

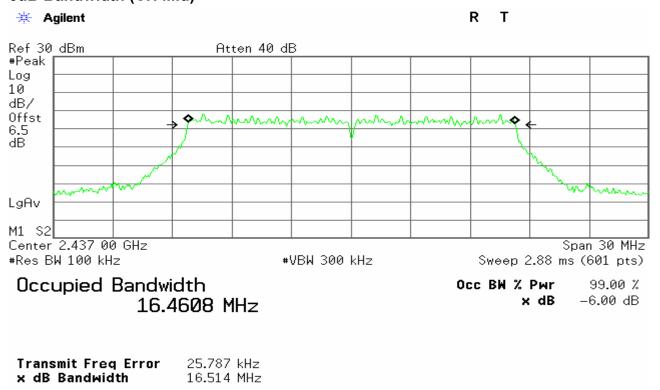


6dB Bandwidth (CH High)

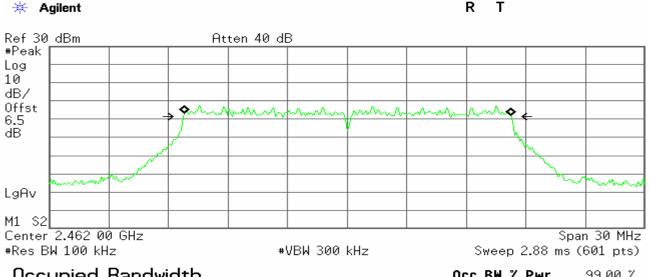

Occupied Bandwidth 16.4608 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freg Error 27.383 kHz x dB Bandwidth 16.522 MHz


IEEE 802.11g MODE /Chain 1 6dB Bandwidth (CH Low)

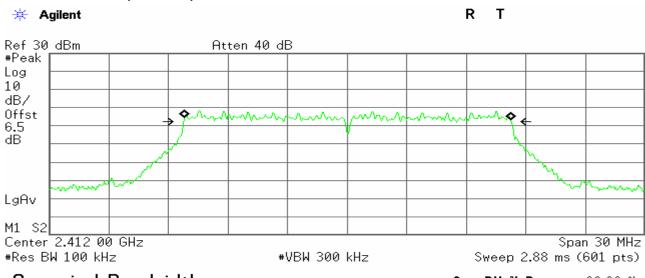

Occupied Bandwidth 16.4468 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 31.152 kHz x dB Bandwidth 16.507 MHz


6dB Bandwidth (CH Mid)

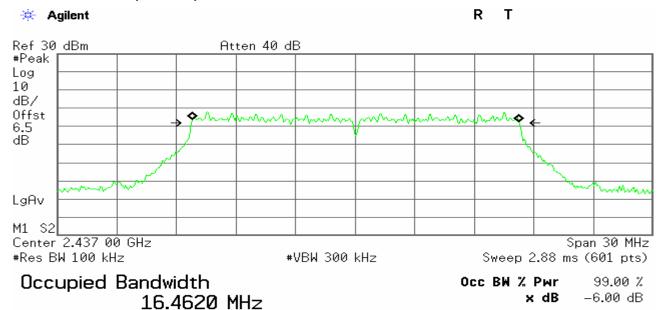

Transmit Freg Error x dB Bandwidth

27.071 kHz 16.528 MHz

6dB Bandwidth (CH High)

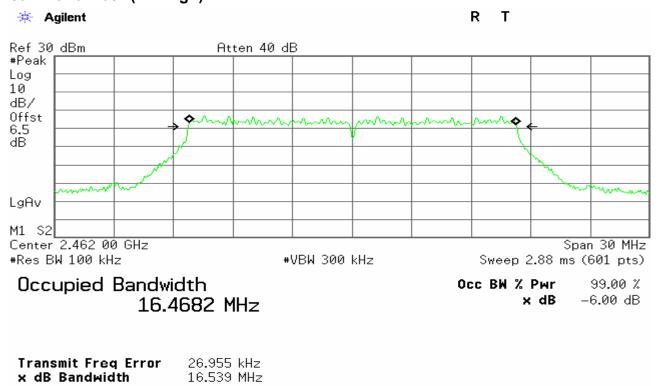


Report No: C150127R02-RPW

FCC ID: XPF-REG05-UTT Date of Issue :March 10, 2015

802.11n Standard-20 MHz Channel mode / Chain 0


6dB Bandwidth (CH Low)

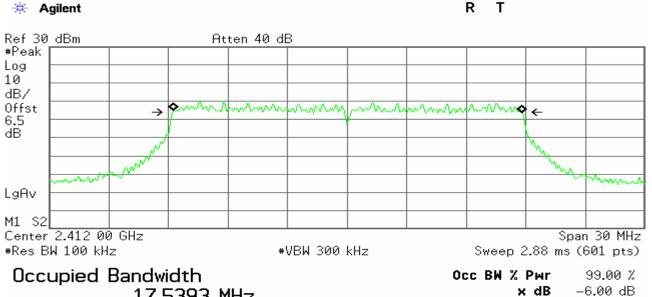


17.5393 MHz

Transmit Freg Error 19.513 kHz x dB Bandwidth 17.579 MHz

6dB Bandwidth (CH Mid)

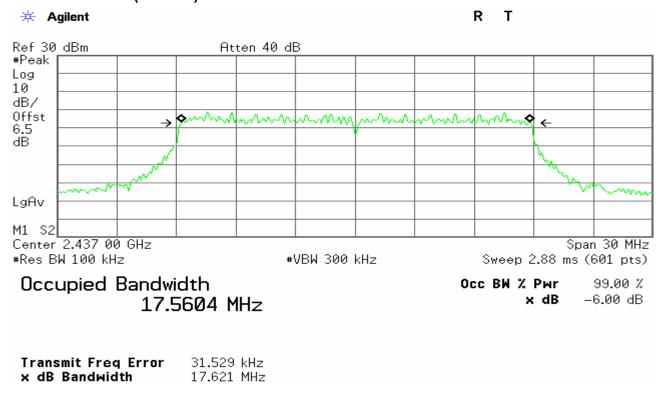


6dB Bandwidth (CH High)

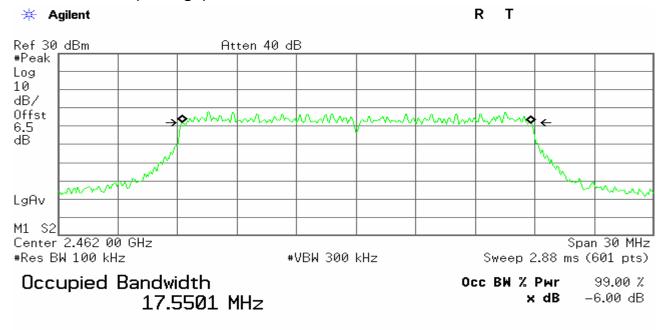


Transmit Freg Error 26.981 kHz x dB Bandwidth 17.338 MHz

802.11n Standard-20 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

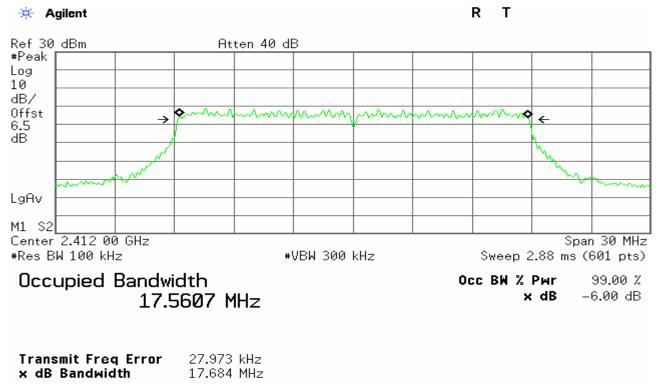


6dB Bandwidth (CH Mid)

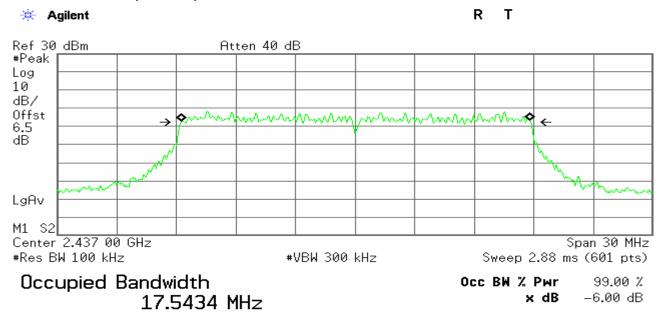


Transmit Freg Error 30.714 kHz x dB Bandwidth 17.650 MHz

6dB Bandwidth (CH High)

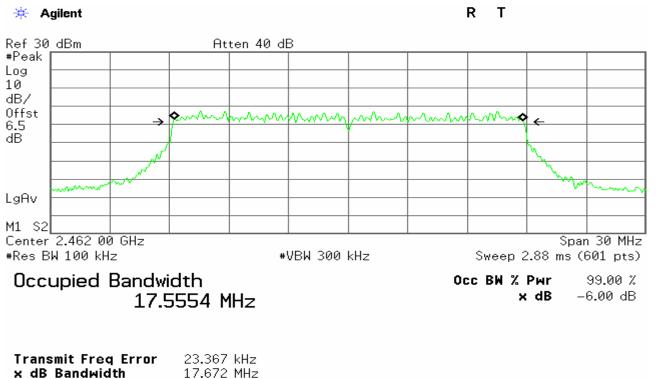


802.11n Standard-40 MHz Channel mode / Chain 0

6dB Bandwidth (CH Low)

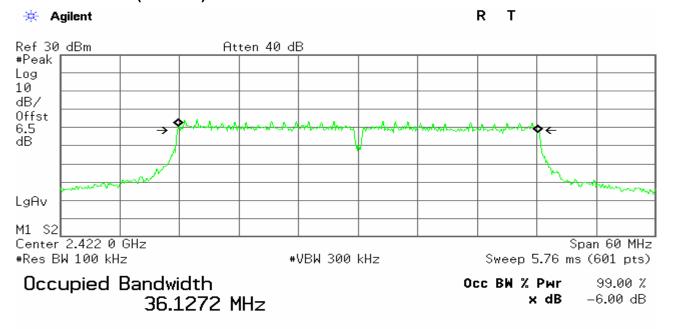


Transmit Freg Error -6.789 kHz x dB Bandwidth 36.116 MHz

6dB Bandwidth (CH Mid)

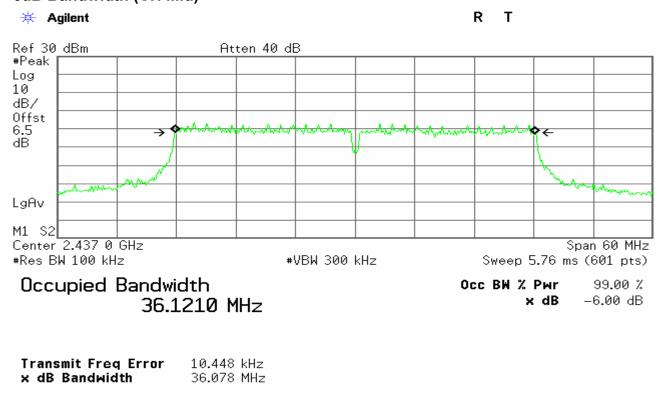


6dB Bandwidth (CH High)

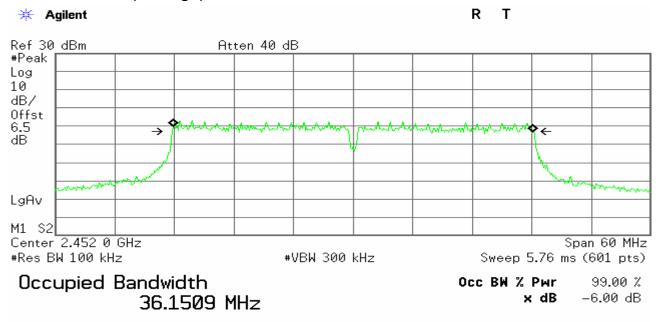


Transmit Freg Error -2.662 kHz x dB Bandwidth 36.129 MHz

802.11n Standard-40 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

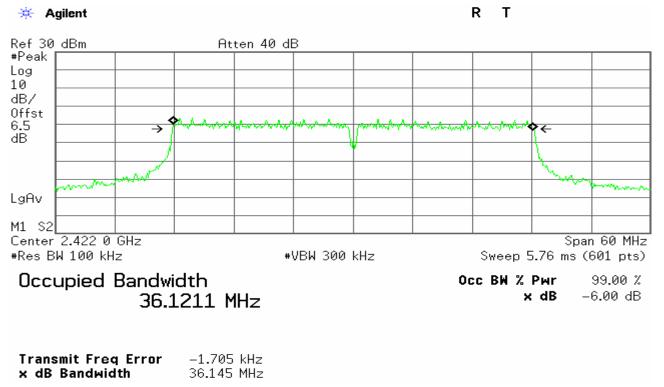

6dB Bandwidth (CH Mid)

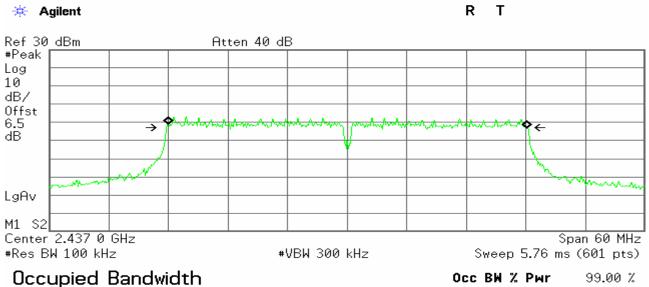


36.1081 MHz

x dB -6.00 dB

Transmit Freq Error 5.509 kHz x dB Bandwidth 36.134 MHz

6dB Bandwidth (CH High)

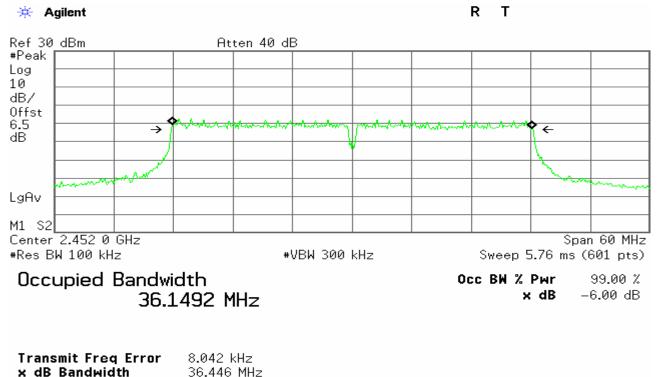


4.2.PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1.According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz; 1 Watt.
- 2.According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

- 1. The EUT transmitter output is connected to the Power meter. The Power meter is set to the peak power detection.
- 2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
- 3. Guidance v03r02. 9.1.2 PKPM1 Peak power meter method.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	19.15	18.38	21.79	25.99
Mid	2437	18.50	17.91	21.23	25.99
High	2462	17.92	17.49	20.72	25.99

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	20.20	18.55	22.46	25.99
Mid	2437	19.51	18.97	22.26	25.99
High	2462	18.88	18.56	21.73	25.99

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	20.46	19.72	23.12	25.99
Mid	2437	19.64	19.16	22.42	25.99
High	2462	18.79	18.86	21.84	25.99

Test mode: IEEE 802.11n HT40 mode

TOOL IIIOGO. ILLE	root mode. IEEE ooz. i iii iii 40 mode								
Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)				
Low	2422	17.42	16.93	20.19	25.99				
Mid	2437	16.99	16.47	19.75	25.99				
High	2452	16.76	16.07	19.44	25.99				


Remark: Total Output Power $(dBm) = 10*LOG(10^{(Chain\ 0\ Output\ Power\ /\ 10)} + 10^{(Chain\ 1\ Output\ Power\ /\ 10)}))$

4.3.PEAK POWER SPECTRAL DENSITY

LIMIT

- 1.According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- 2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

- 1.Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2.Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
- 3. Record the max reading.
- 4.Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

1001111040112	oct model iEEE coall is mode								
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result			
Low	2412	-7.72	-8.63	-5.14	8.00	PASS			
Mid	2437	-8.41	-8.59	-5.49	8.00	PASS			
High	2462	-10.15	-9.50	-6.80	8.00	PASS			

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.72	-18.05	-14.87	8.00	PASS
Mid	2437	-18.12	-19.83	-15.88	8.00	PASS
High	2462	-19.28	-20.46	-16.82	8.00	PASS

Test mode: IEEE 802.11n HT20 mode

1000 1110001 1222 0021 111 11120 111000										
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result				
Low	2412	-16.41	-18.84	-14.45	8.00	PASS				
Mid	2437	-15.75	-17.42	-13.49	8.00	PASS				
High	2462	-18.91	-18.03	-15.44	8.00	PASS				

Test mode: IEEE 802.11n HT40 mode


1001 1110 1101 111 111 111 111 111 111										
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result				
Low	2422	-22.38	-22.39	-19.37	8.00	PASS				
Mid	2437	-23.01	-23.28	-20.13	8.00	PASS				
High	2452	-18.86	-24.31	-17.77	8.00	PASS				

Remark: $Total\ PPSD\ (dBm) = 10*LOG(10^(Chain\ 0\ PPSD\ /\ 10) + 10^(Chain\ 1\ PPSD\ /\ 10)))$


Test Plot

IEEE 802.11b mode/Chain 0


PPSD (CH Low)

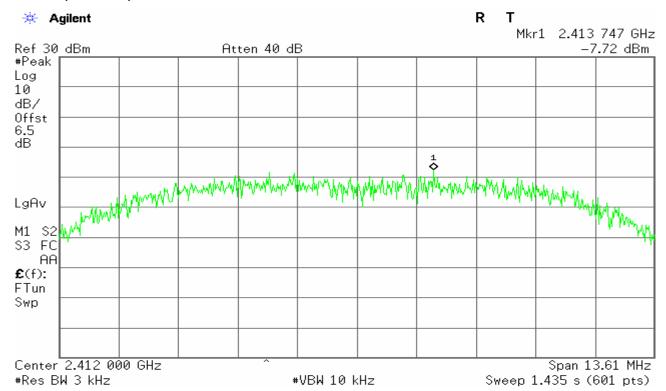

PPSD(CHMid)

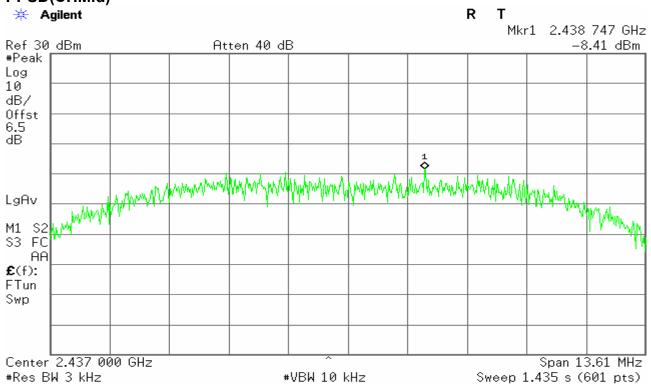


PPSD (CH High)

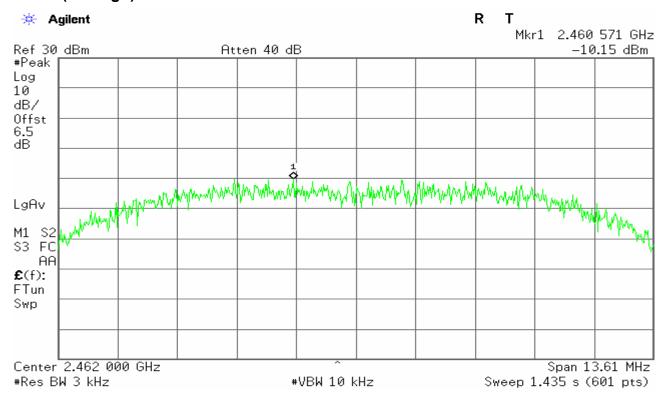


IEEE 802.11b mode/Chain 1


PPSD (CH Low)

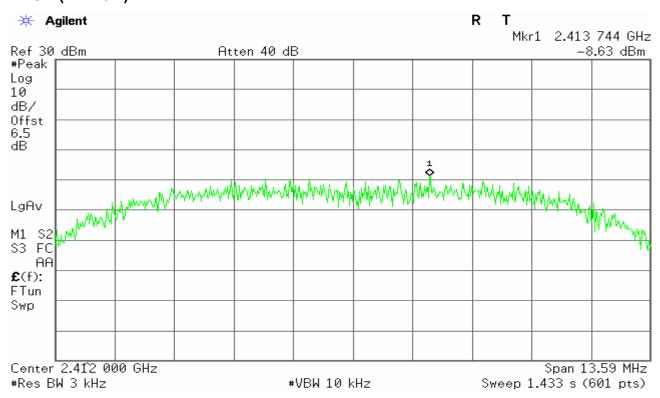

PPSD (CH Mid)

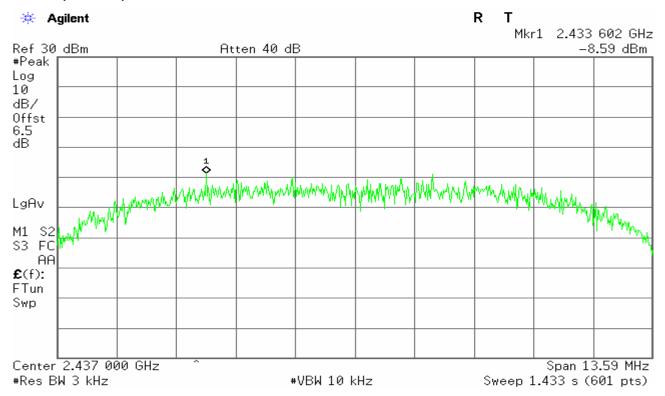


PPSD (CH High)

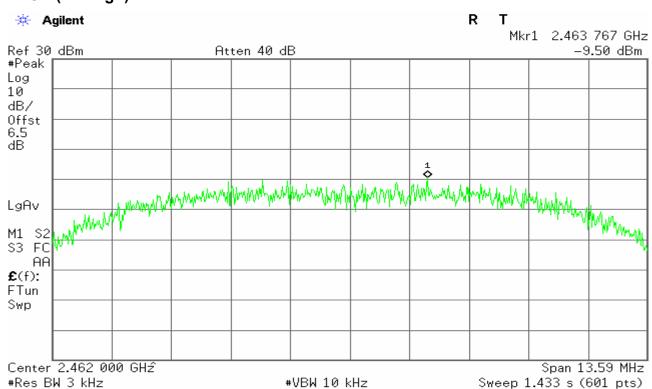


IEEE 802.11g mode/Chain 0


PPSD (CH Low)

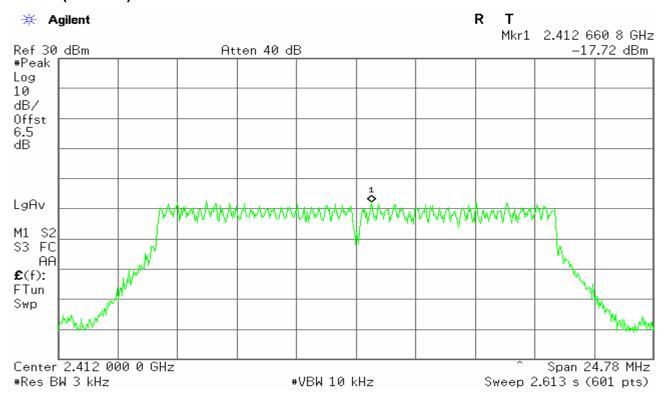

PPSD (CH Mid)

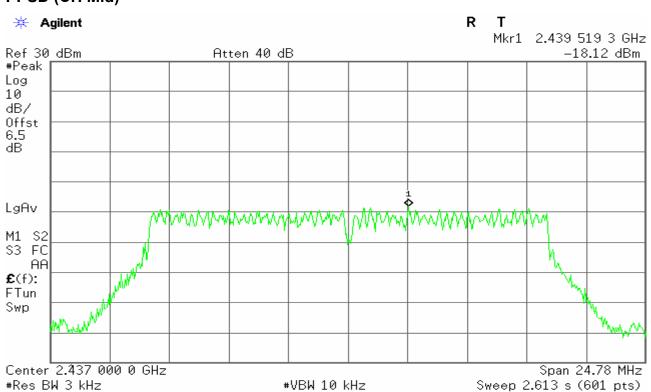

PPSD (CH High)

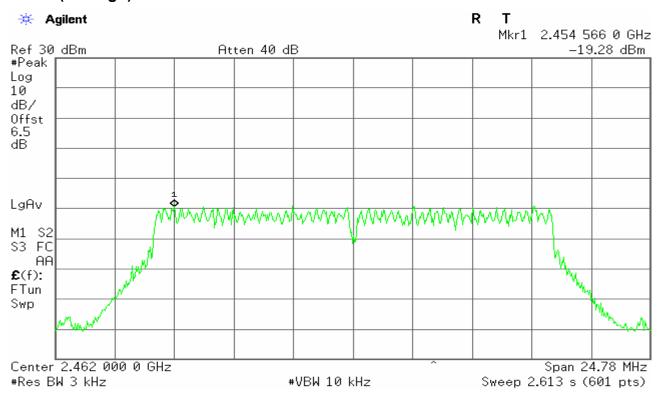


IEEE 802.11g mode/Chain 1


PPSD (CH Low)



PPSD (CH Mid)

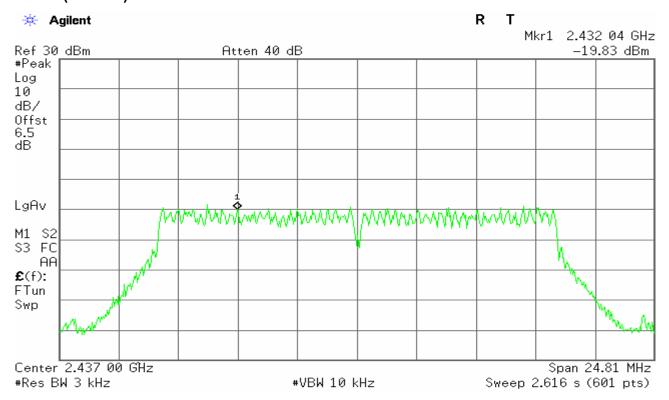


PPSD (CH High)

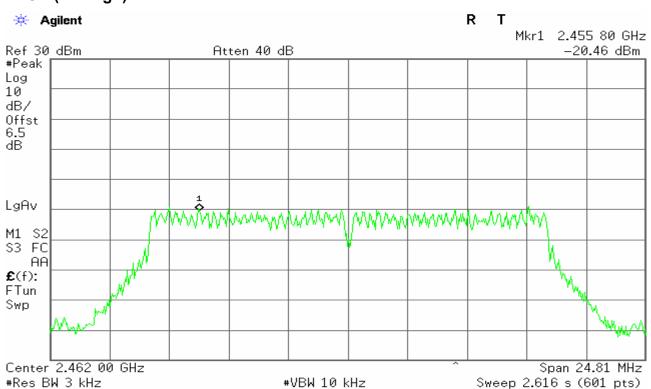


IEEE 802.11n HT20 mode / Chain 0


PPSD (CH Low)

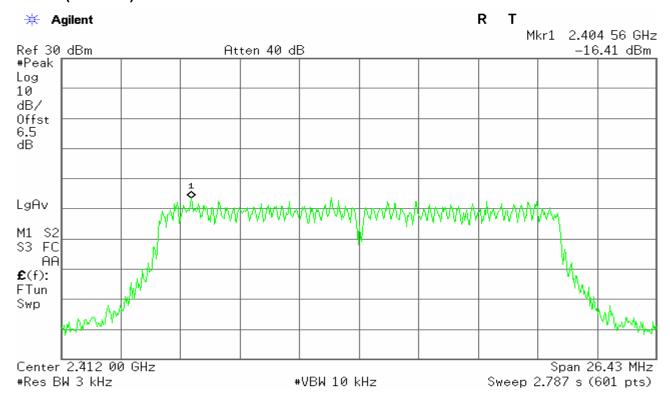

PPSD (CH Mid)

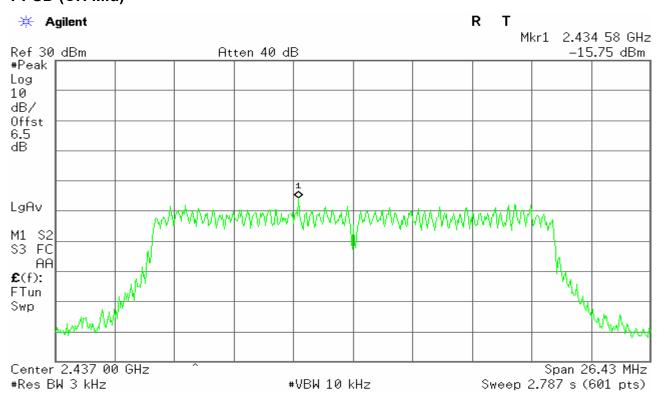


PPSD (CH High)

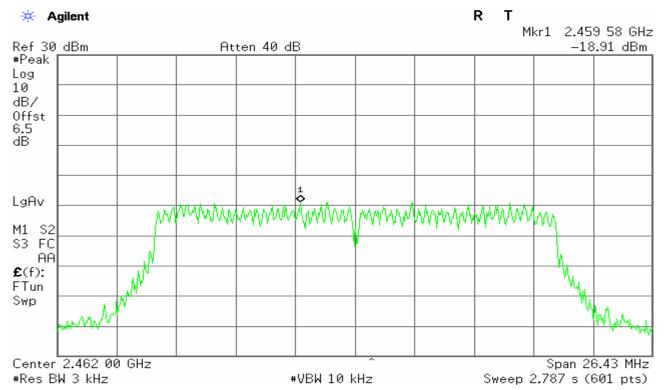


IEEE 802.11n HT20 mode / Chain 1

PPSD (CH Low)

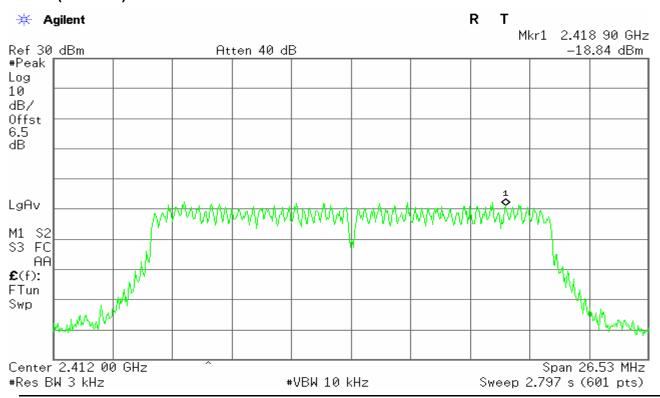


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

PPSD (CH Mid)

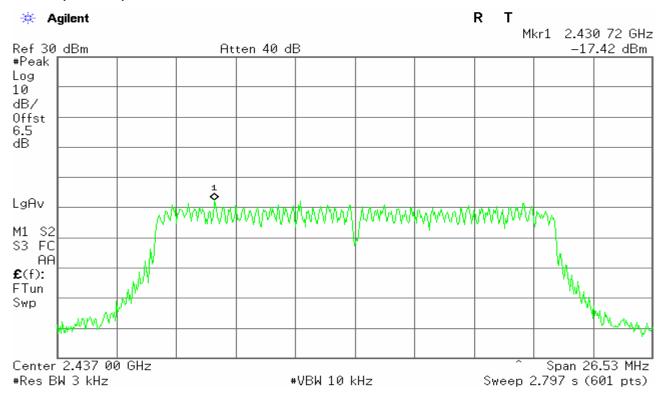


PPSD (CH High)

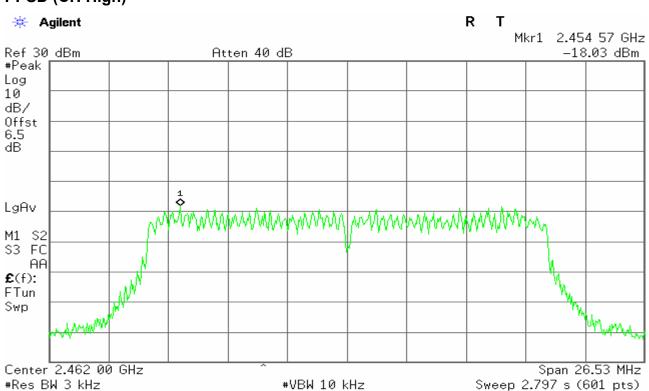


IEEE 802.11n HT40 mode / Chain 0


PPSD (CH Low)

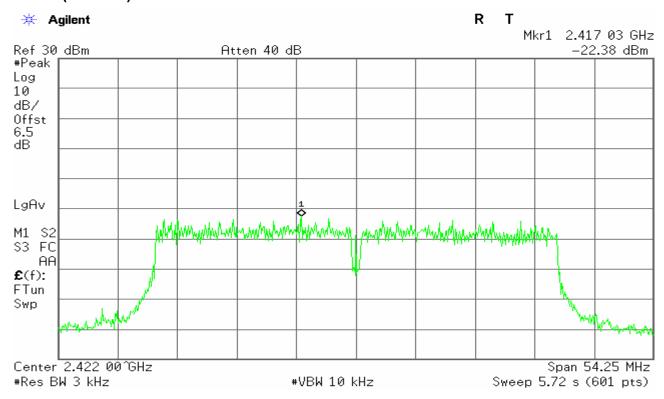

PPSD (CH Mid)

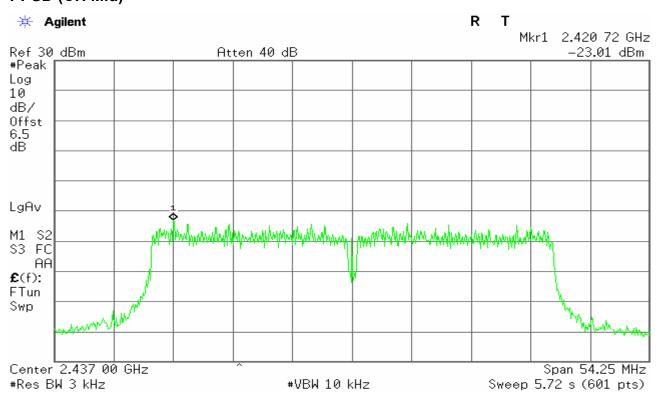


PPSD (CH High)

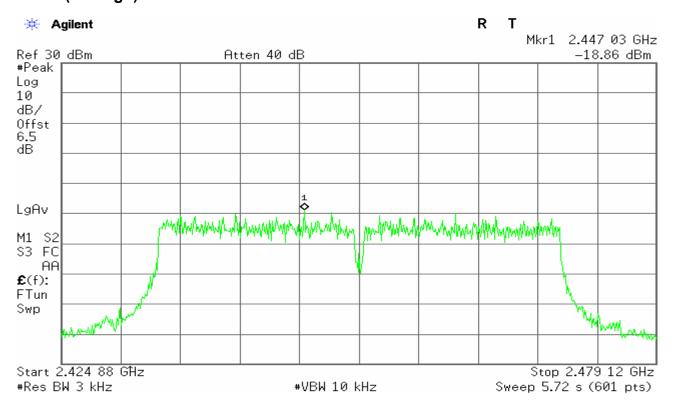


IEEE 802.11n HT40 mode / Chain 1


PPSD (CH Low)

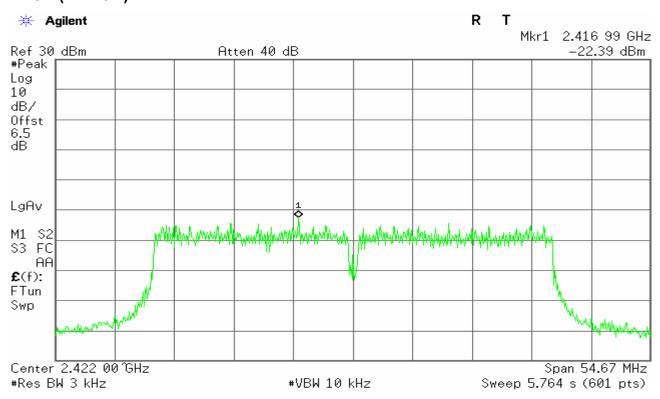

PPSD (CH Mid)

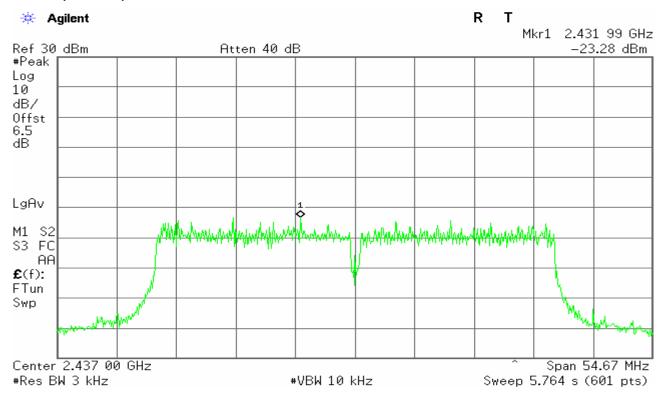

PPSD (CH High)

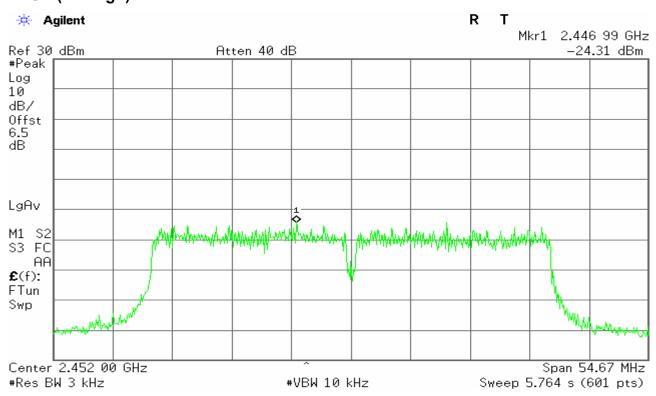


4.4.SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS


No non-compliance noted


Report No: C150127R02-RPW

Test Plot OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT IEEE 802.11b mode/Chain 0

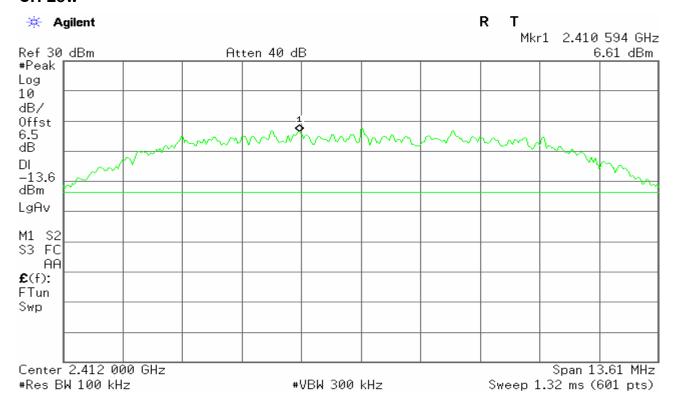


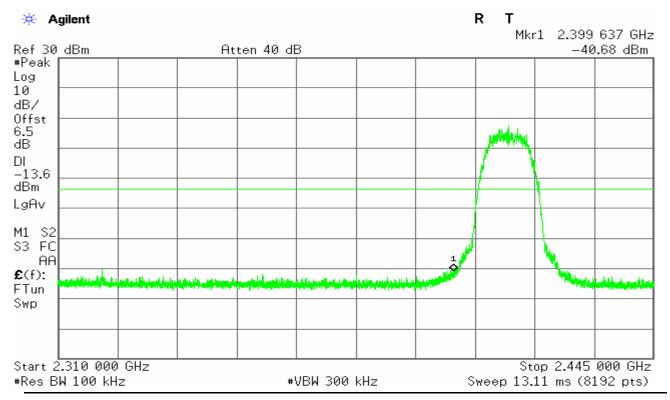


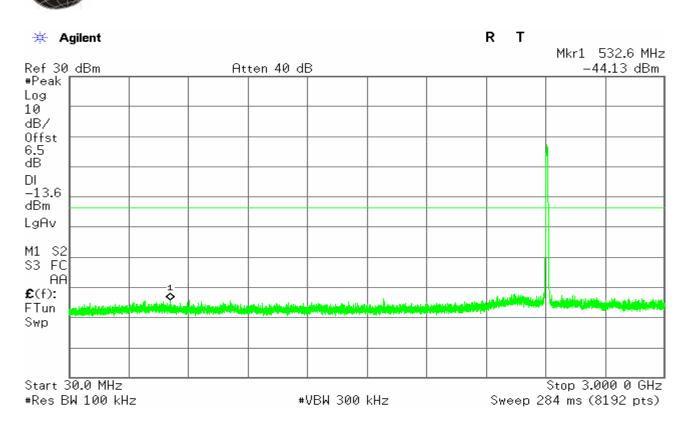


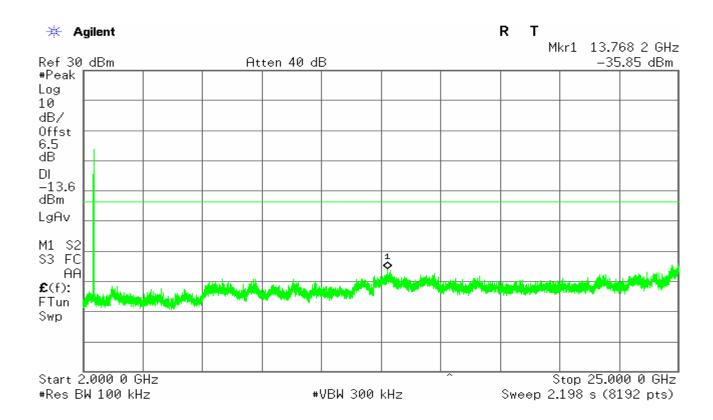


CH Mid

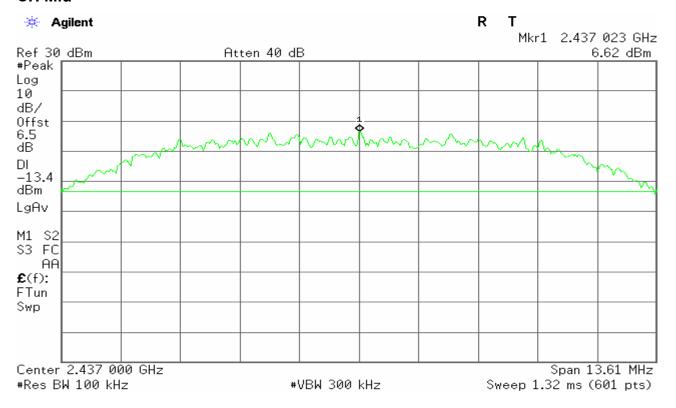


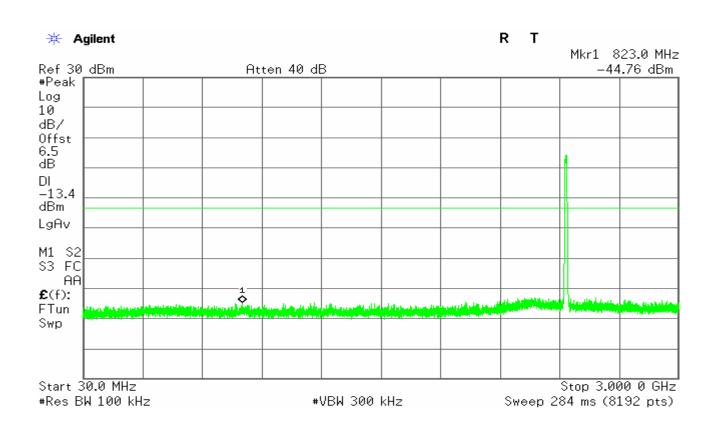


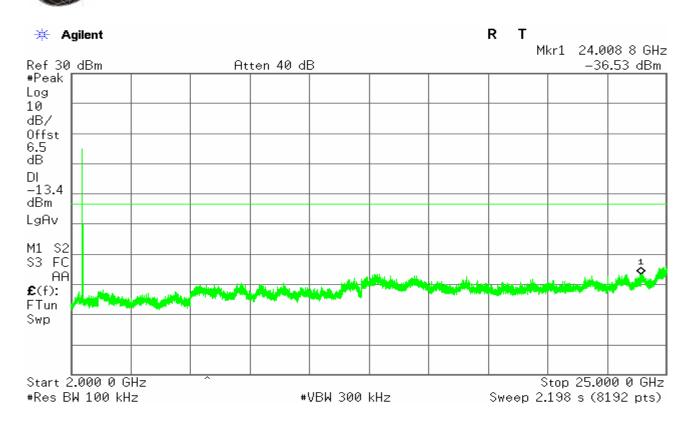


CH High

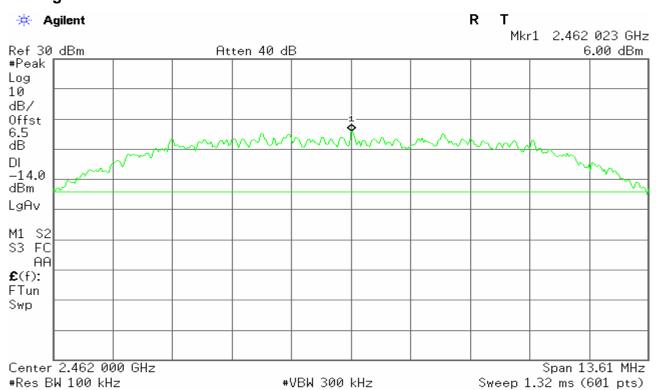


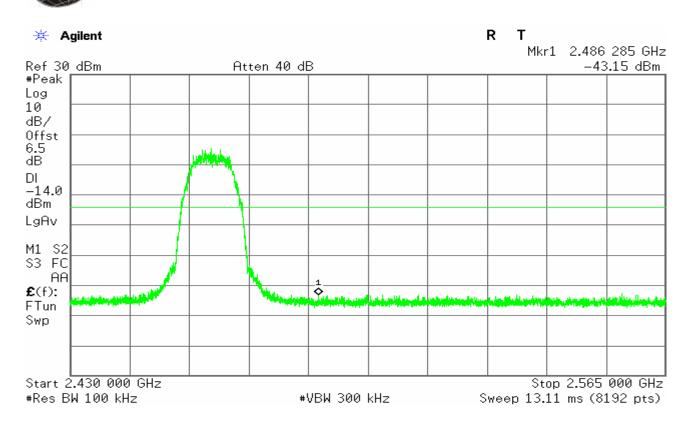


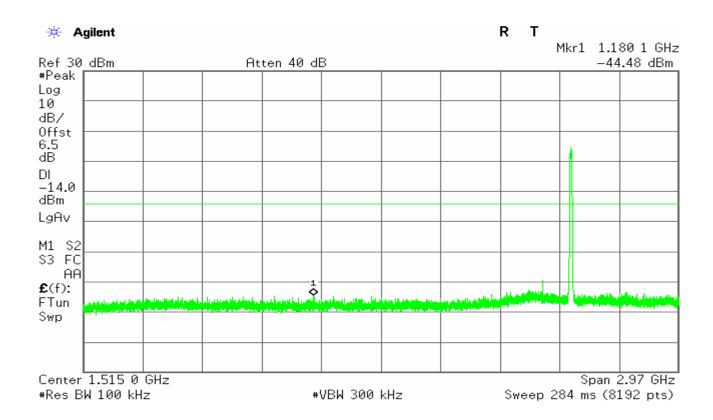


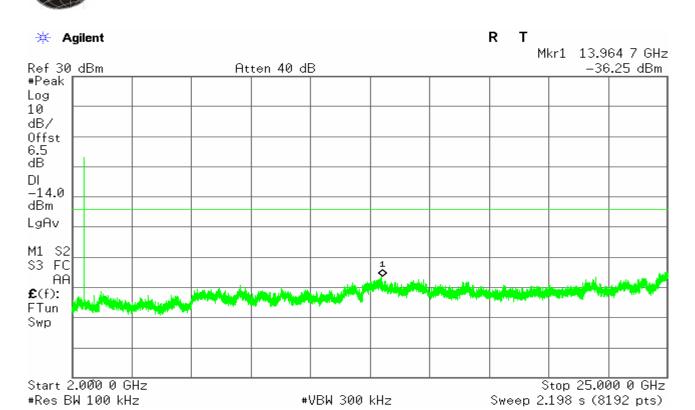


IEEE 802.11b mode/Chain 1

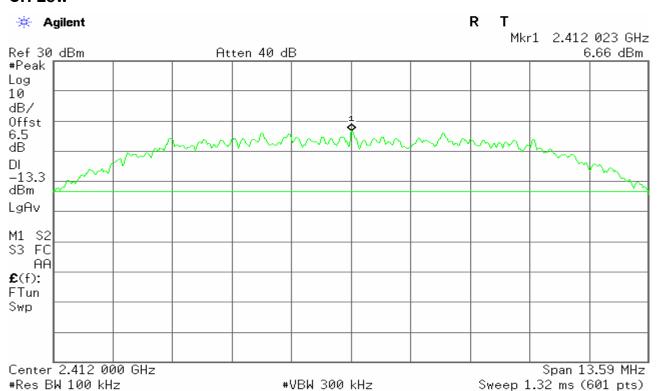


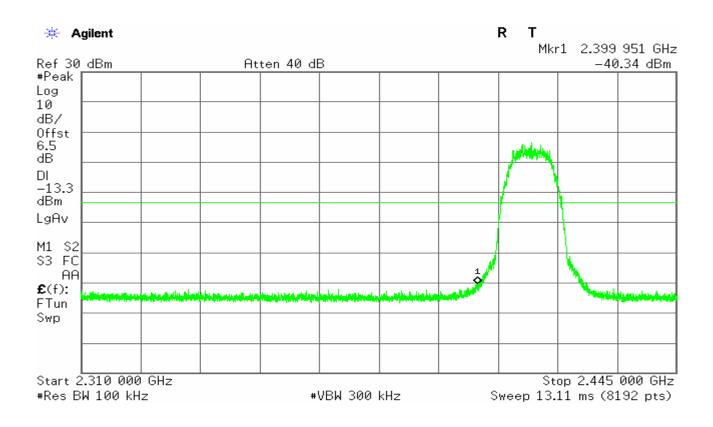


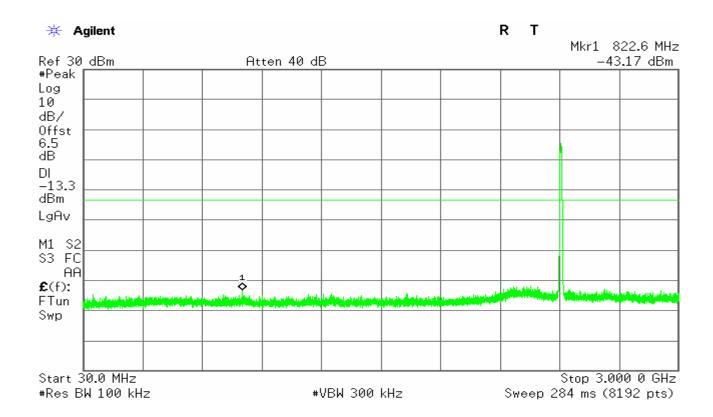


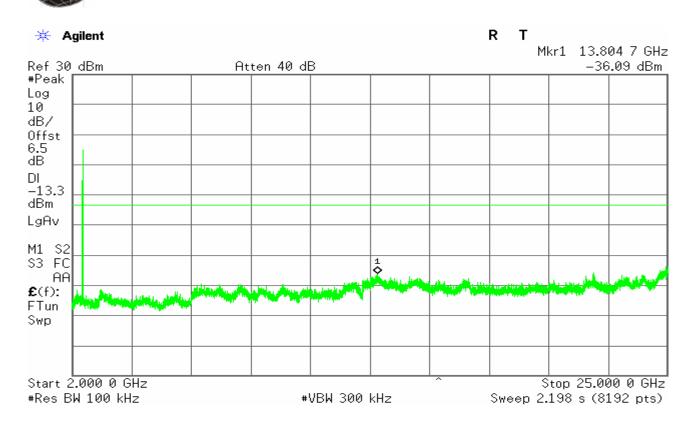


CH Mid

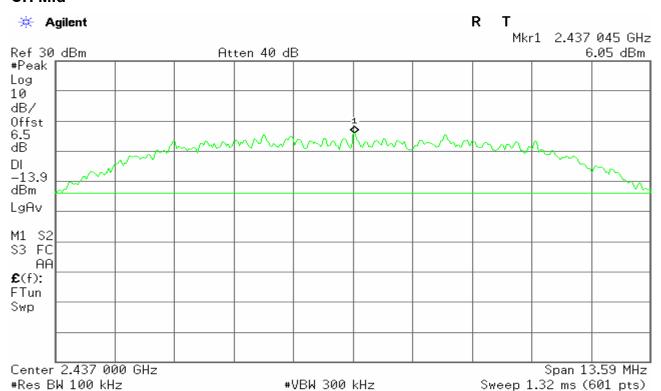


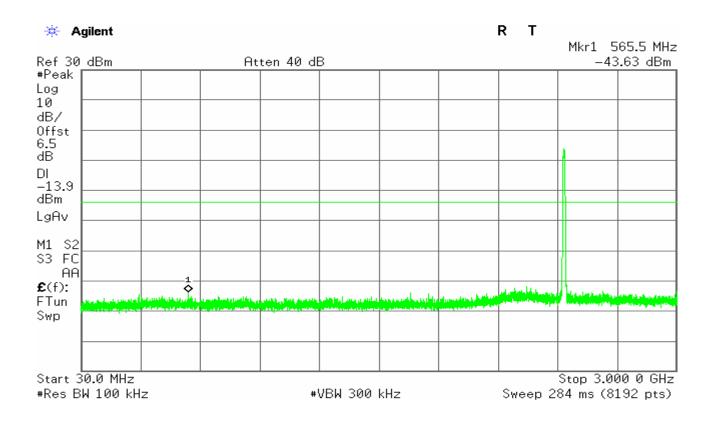


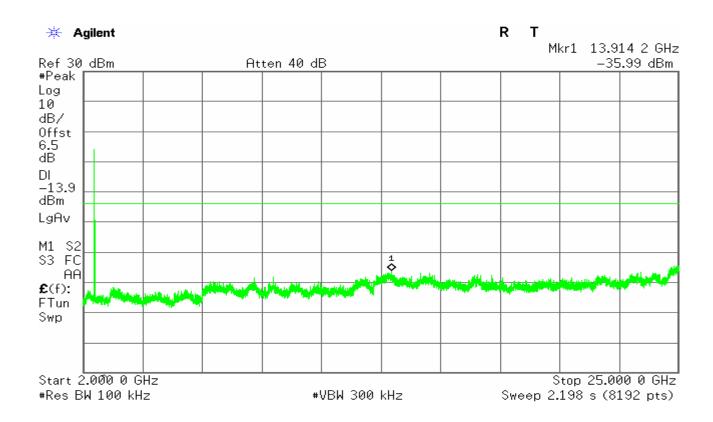


CH High

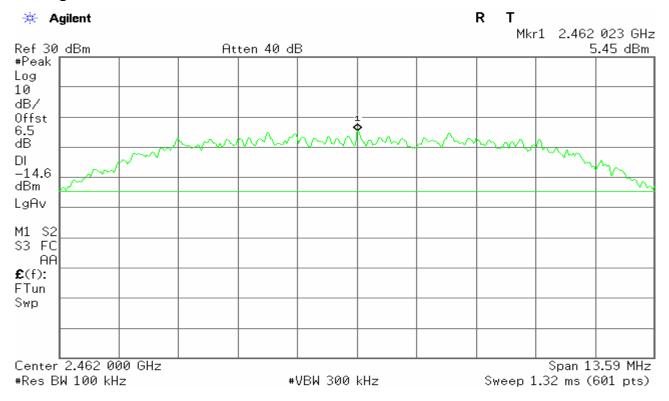


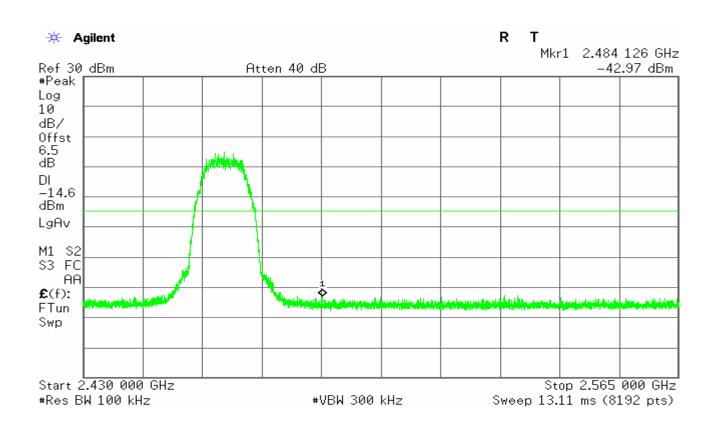


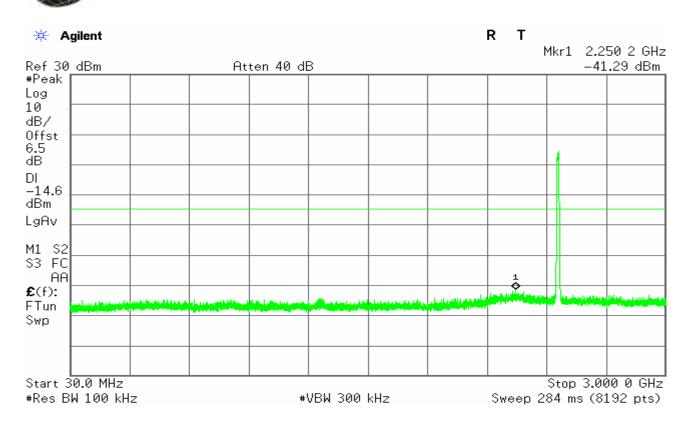


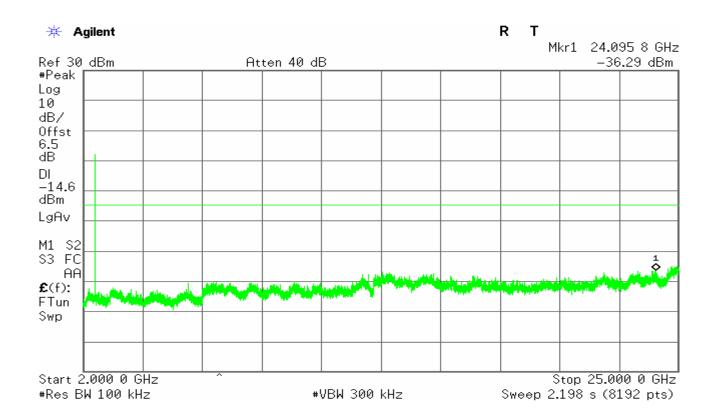


IEEE 802.11g mode/Chain 0

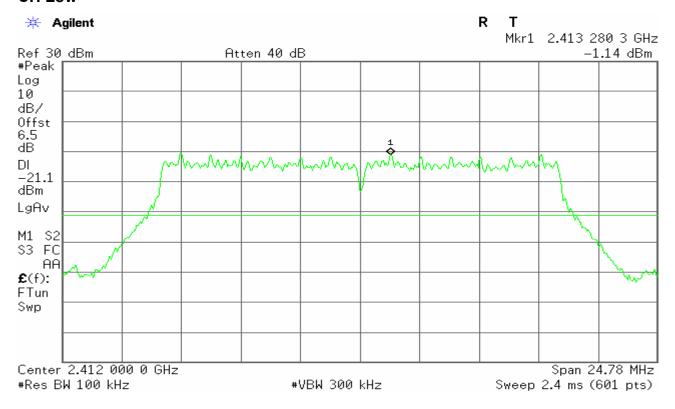


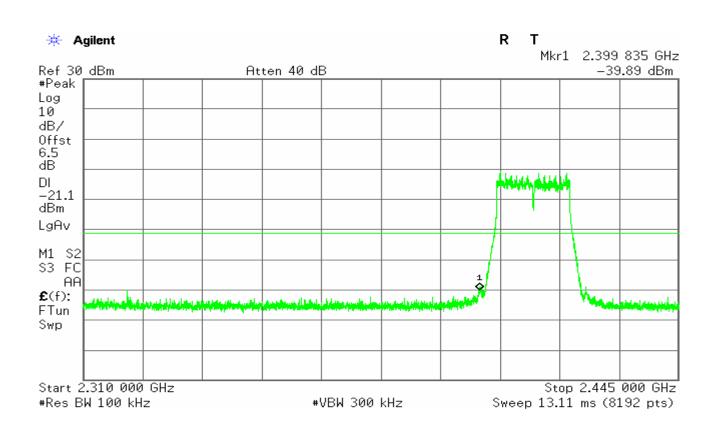


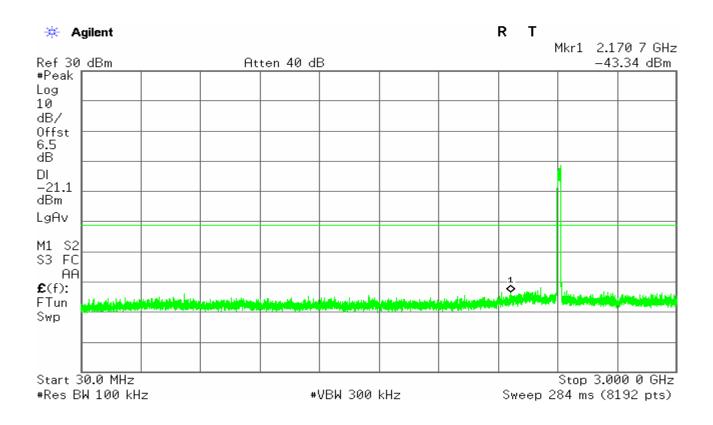


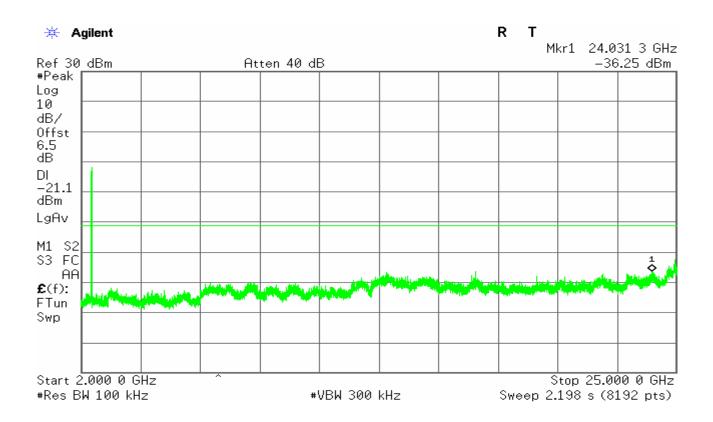


CH Mid

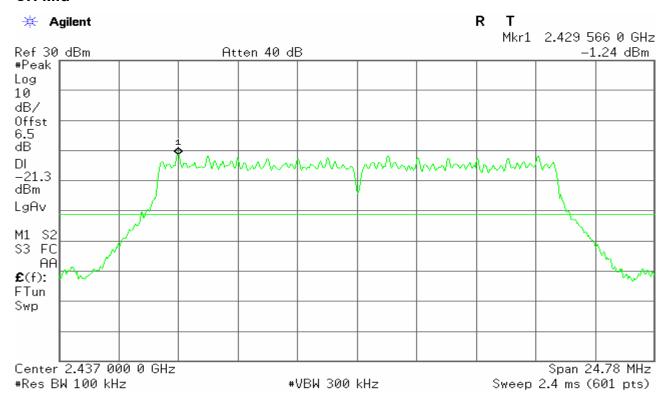


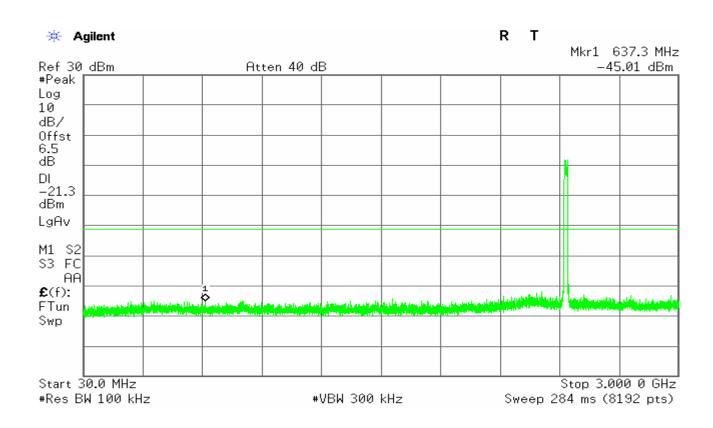


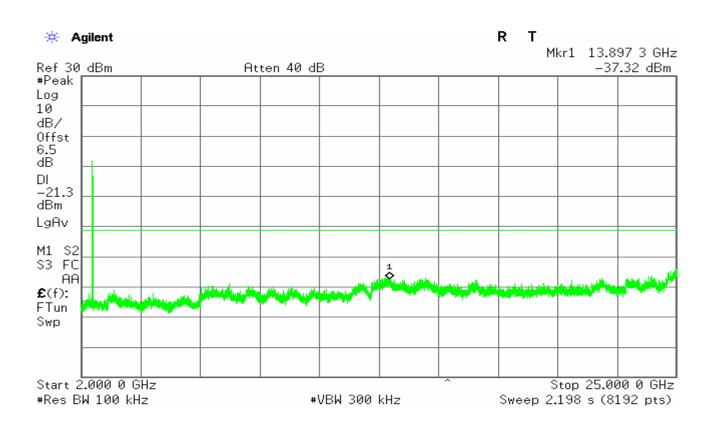


CH High

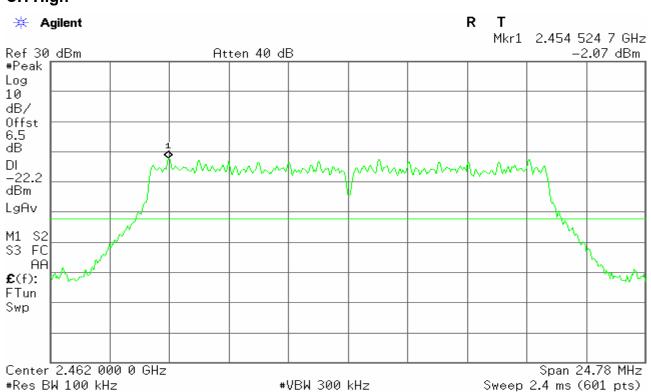


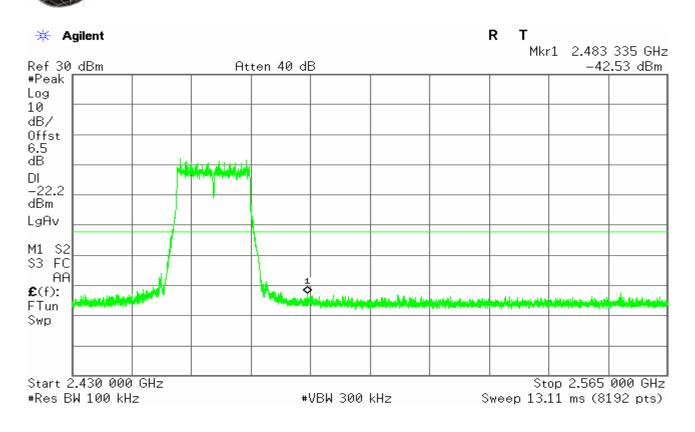


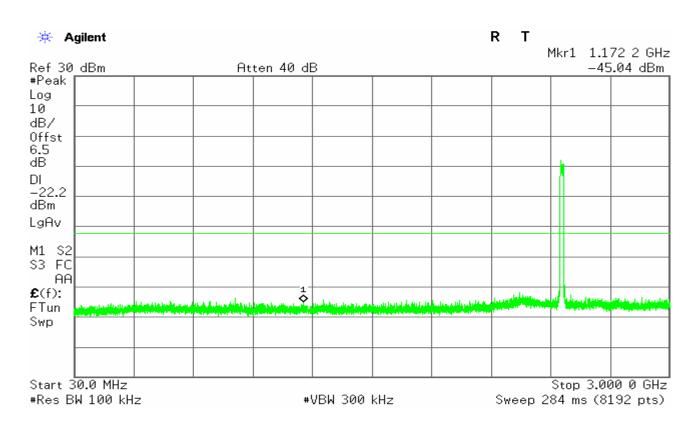


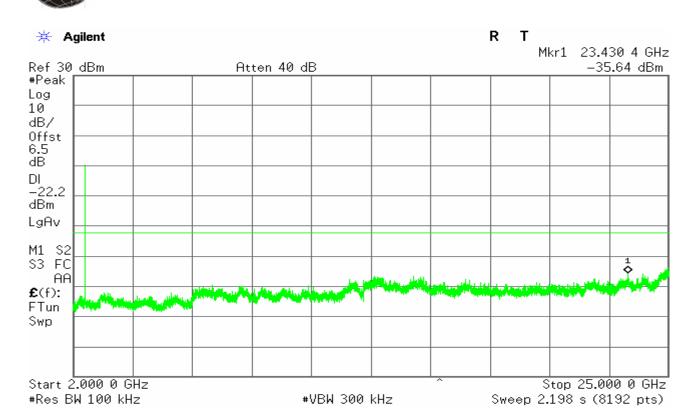


IEEE 802.11g mode/Chain 1

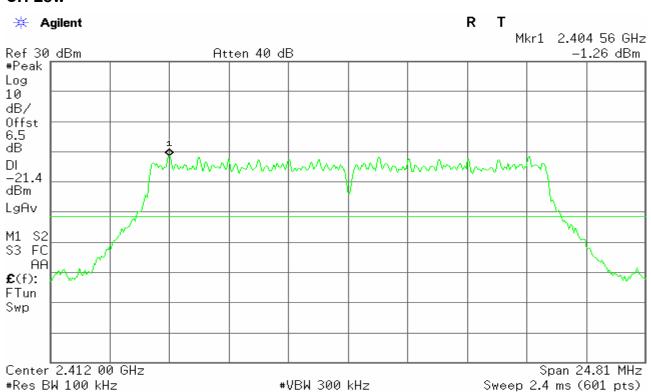


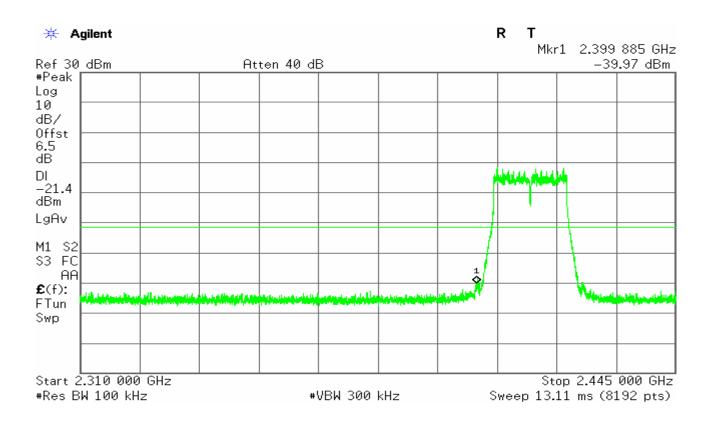


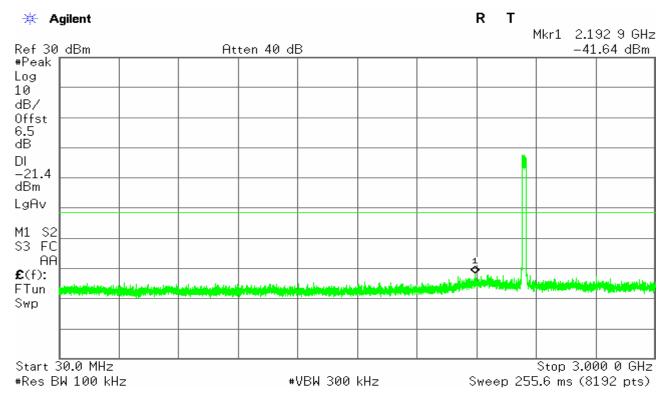


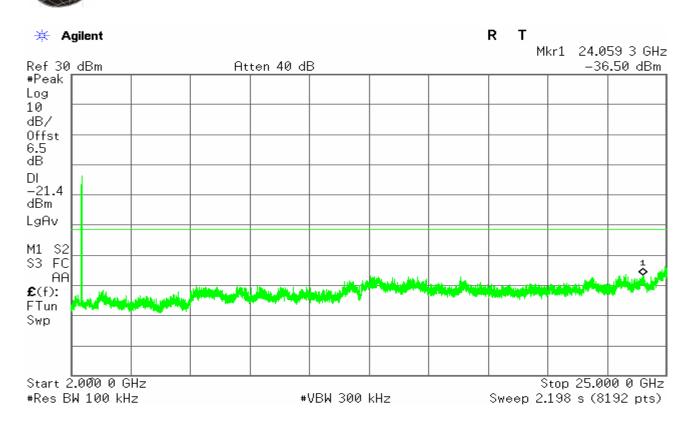


CH Mid

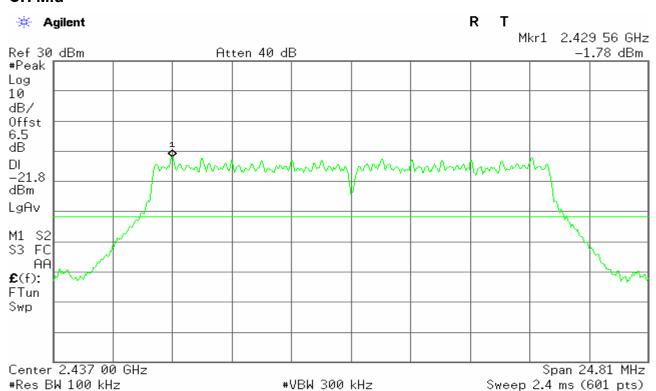


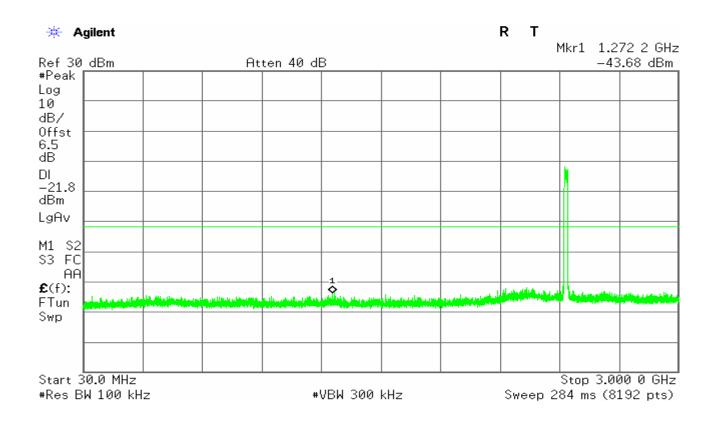


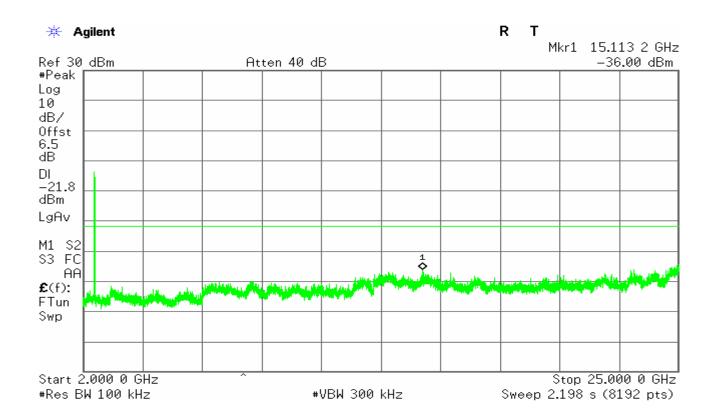


CH High

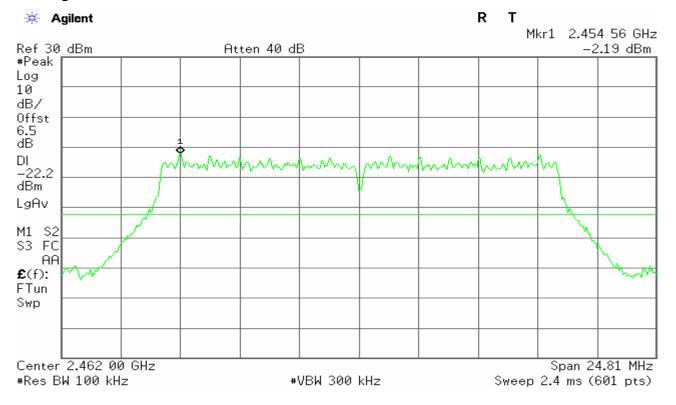


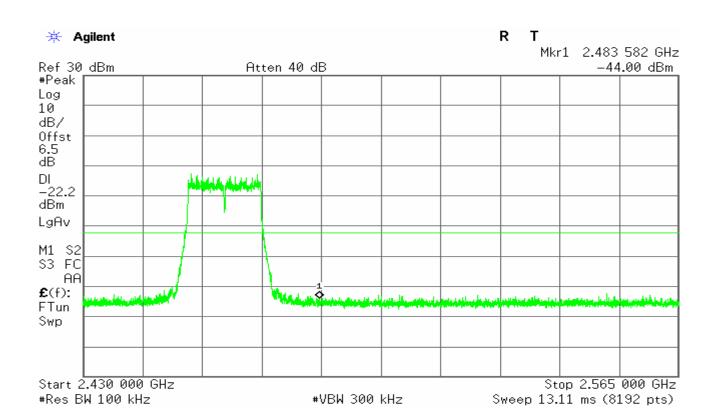


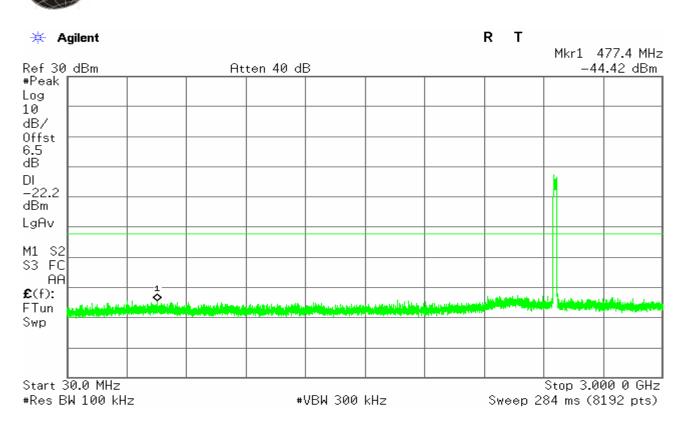


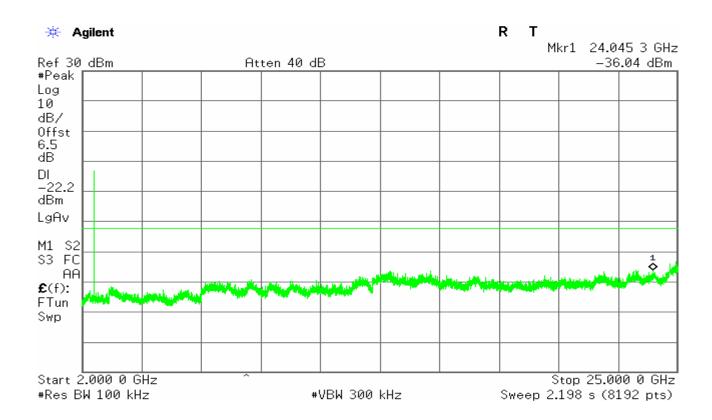


IEEE 802.11n HT20 mode / Chain 0

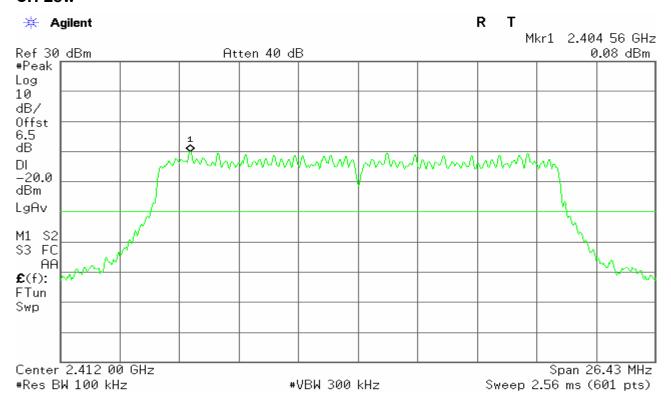


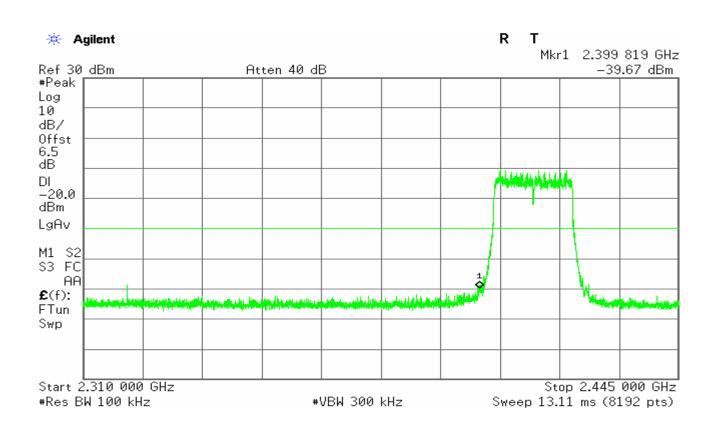


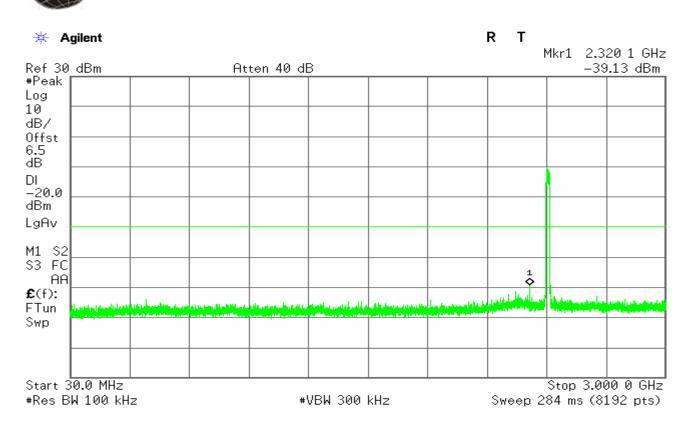


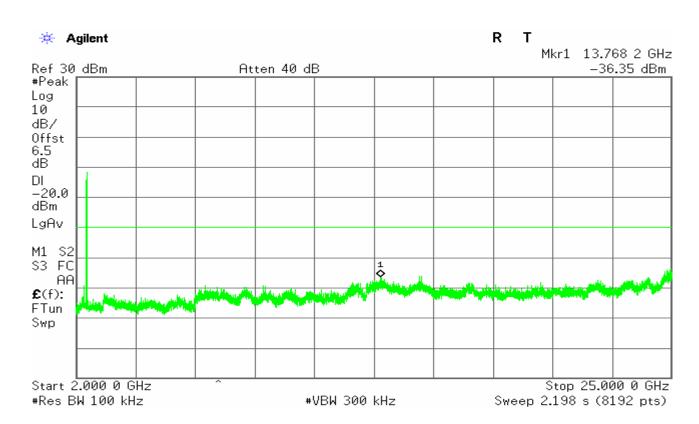


CH Mid

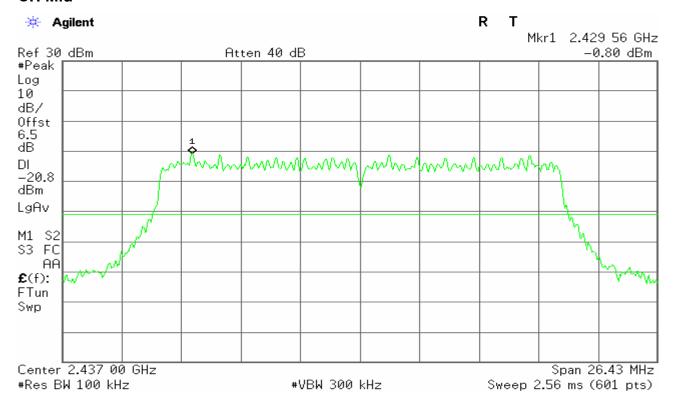


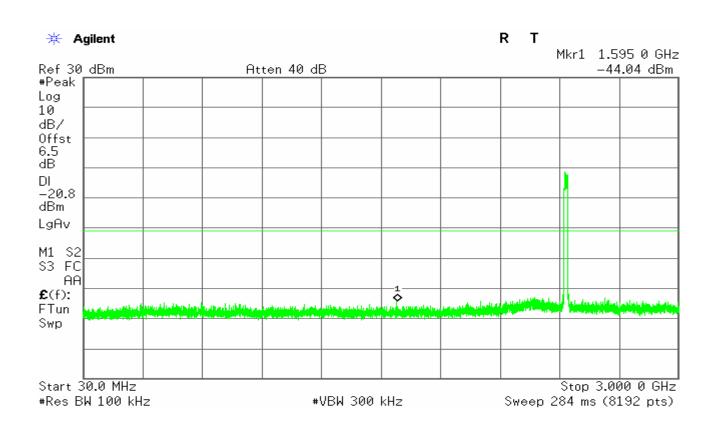


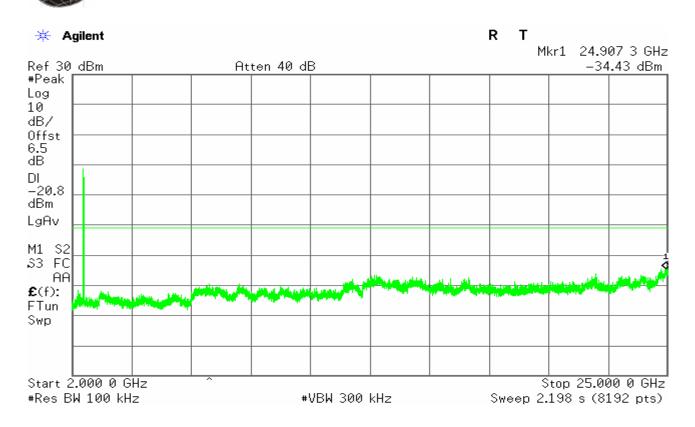


CH High

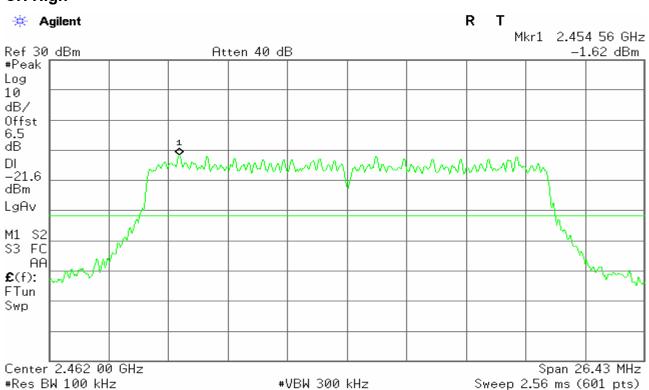


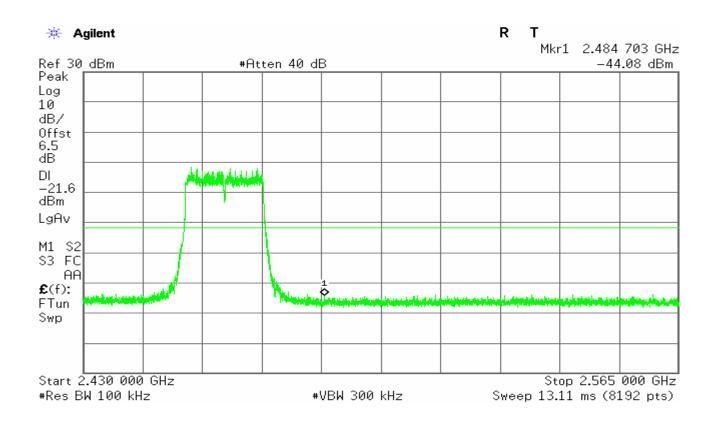


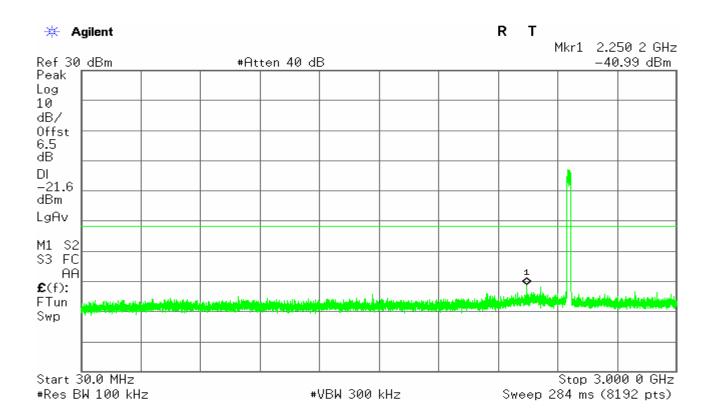


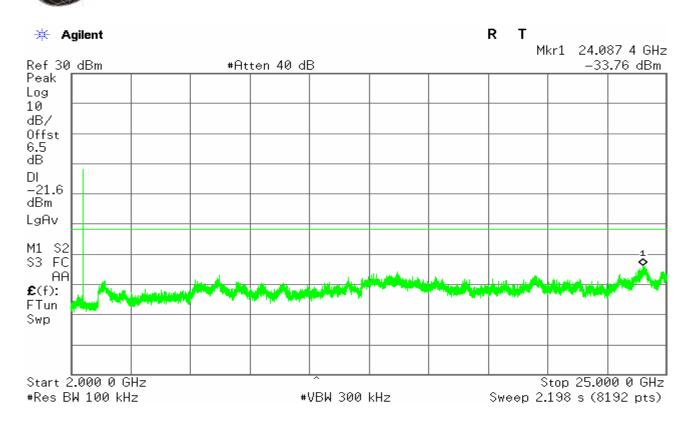


IEEE 802.11n HT20 mode / Chain 1

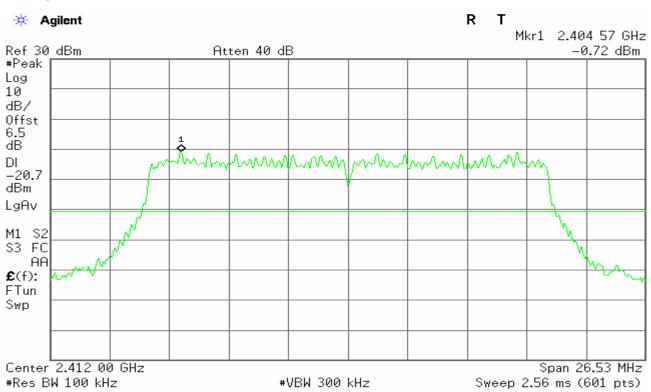


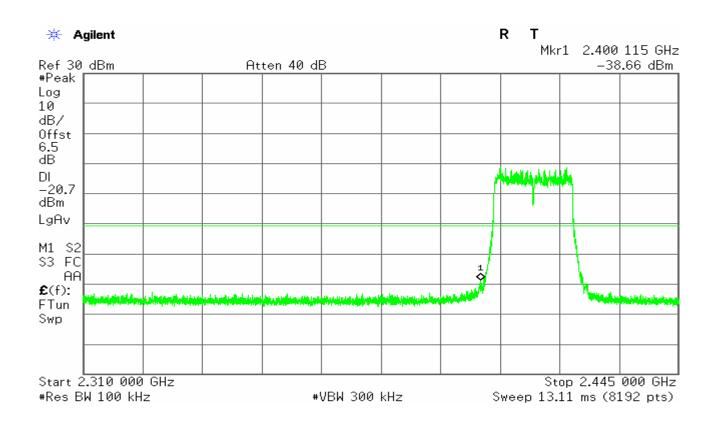


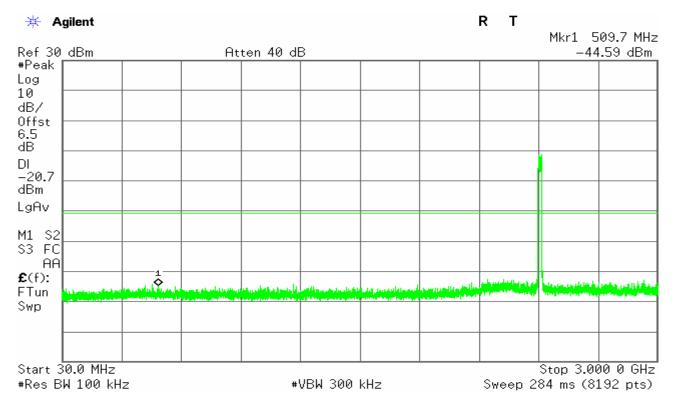


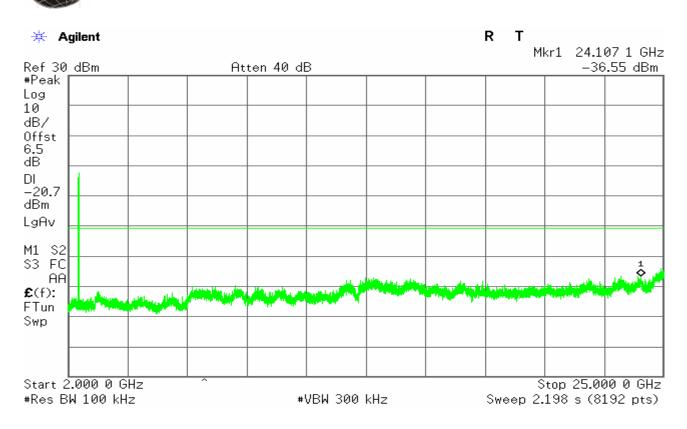


CH Mid

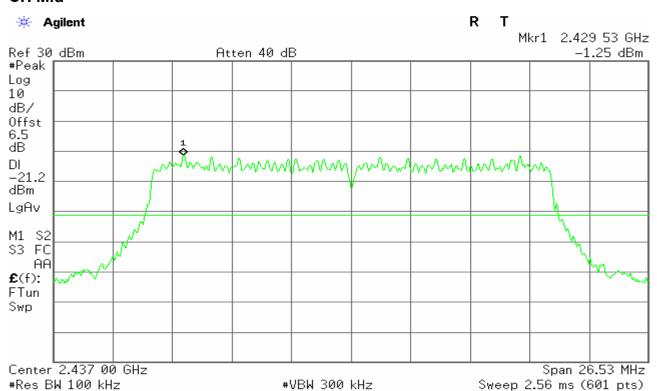


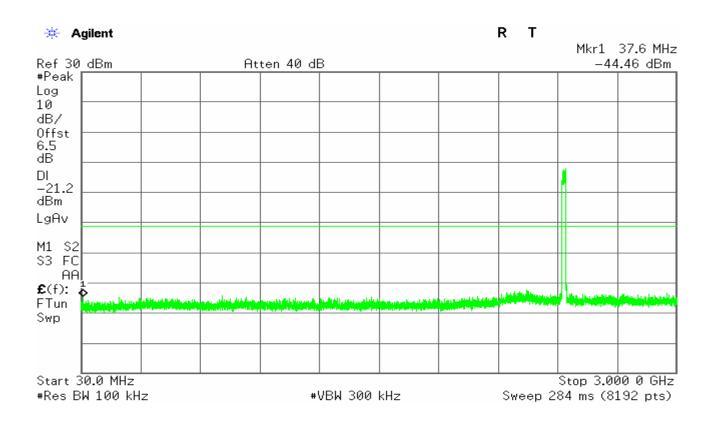


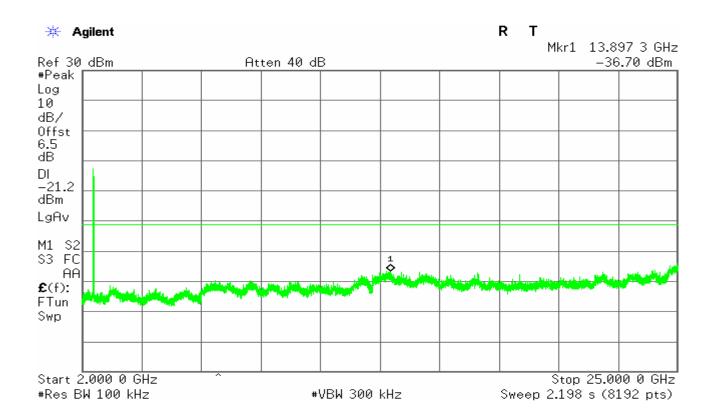


CH High

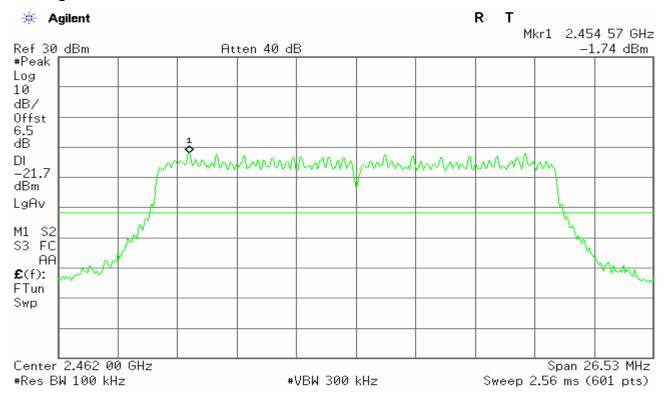

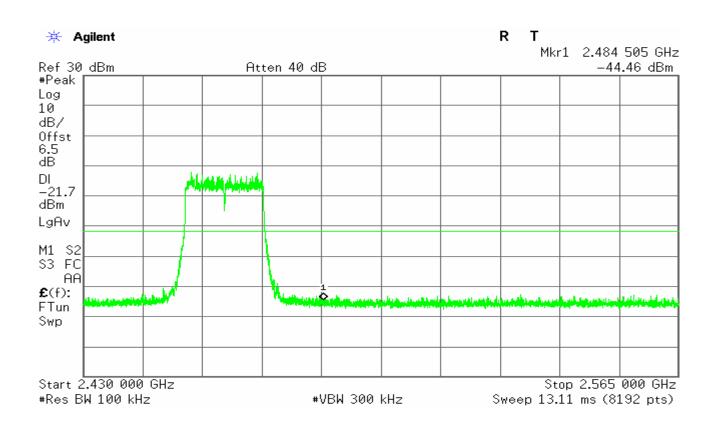


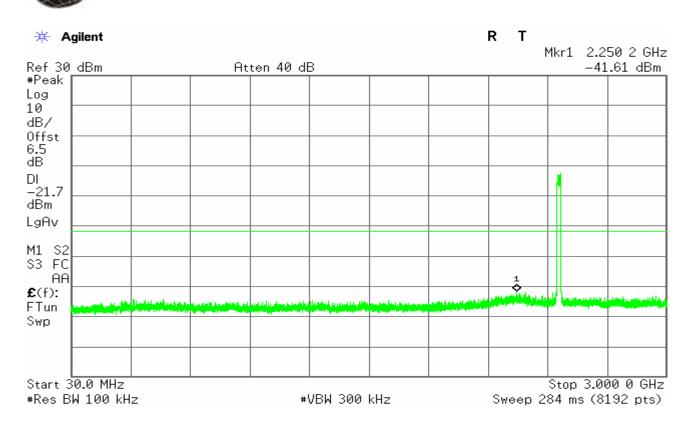


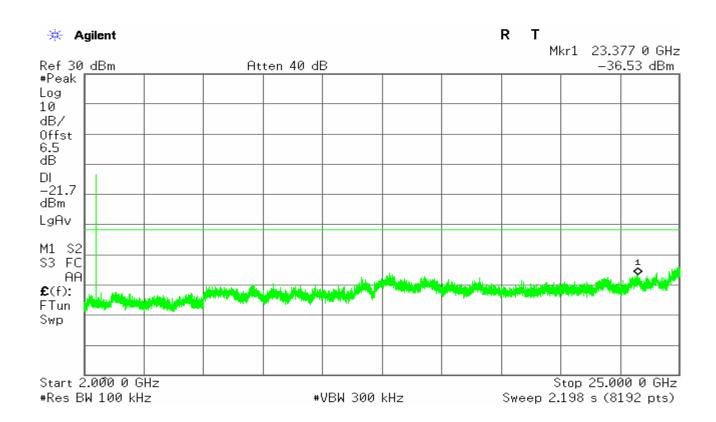



IEEE 802.11n HT40 mode / Chain 0

CH Low

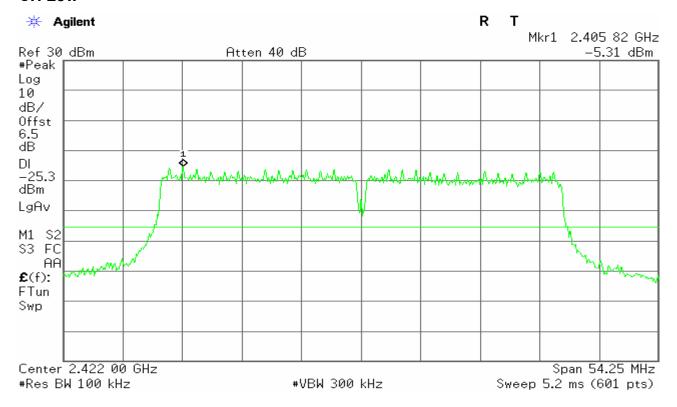


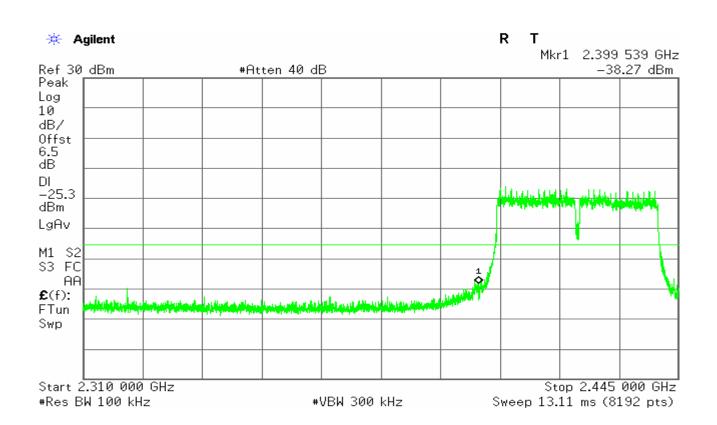


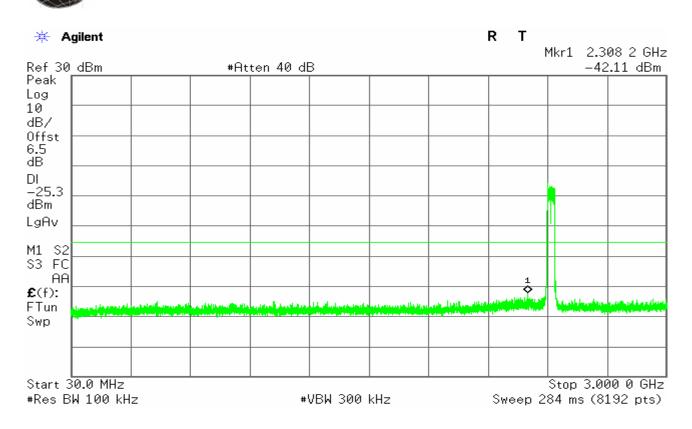


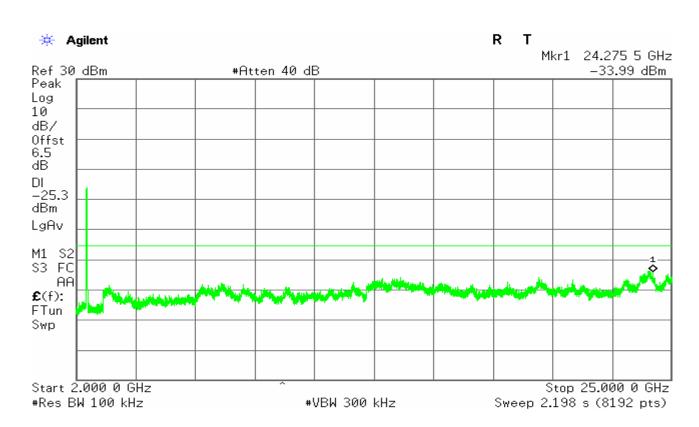


CH Mid

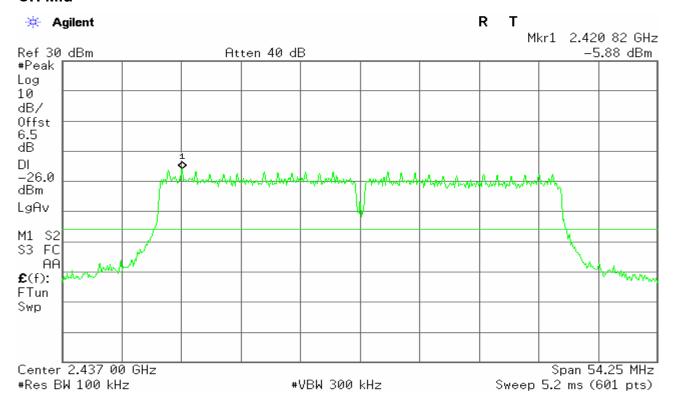


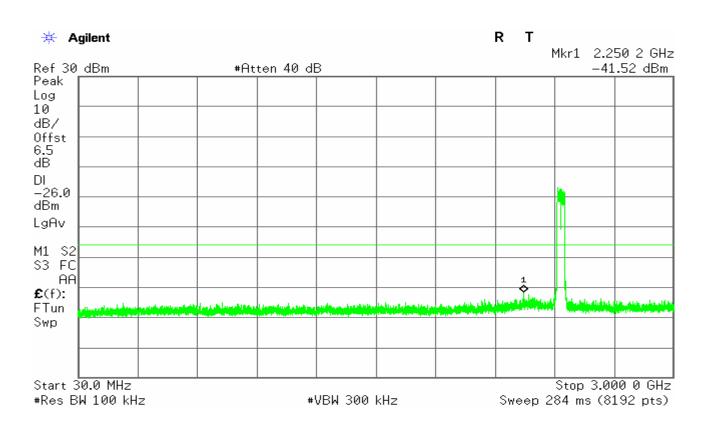


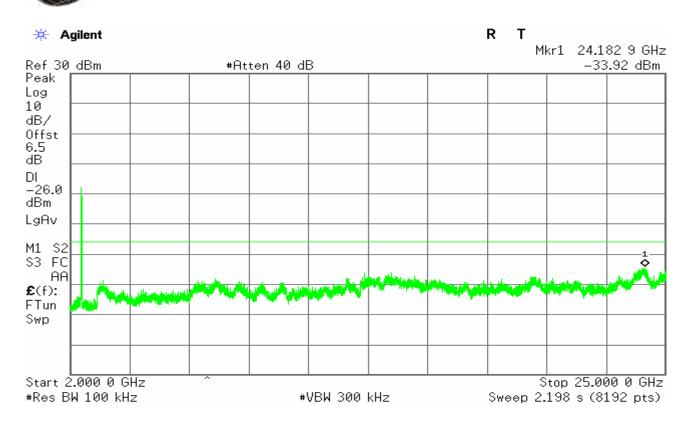


CH High

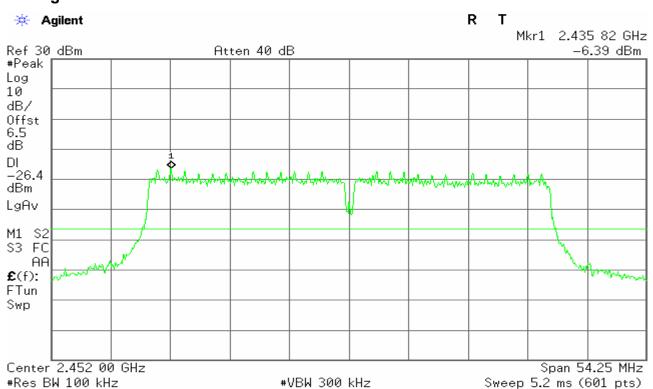

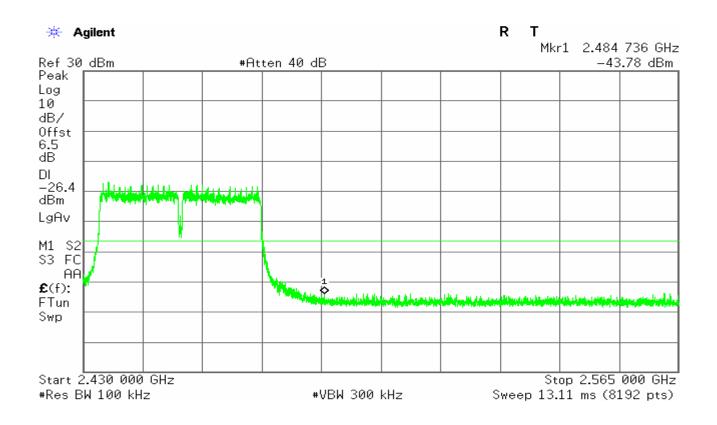


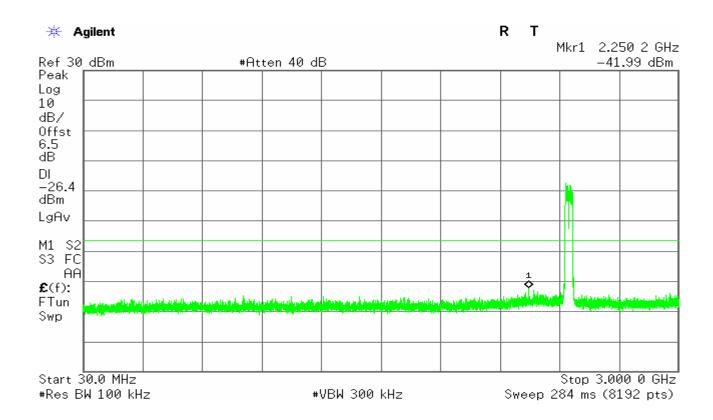


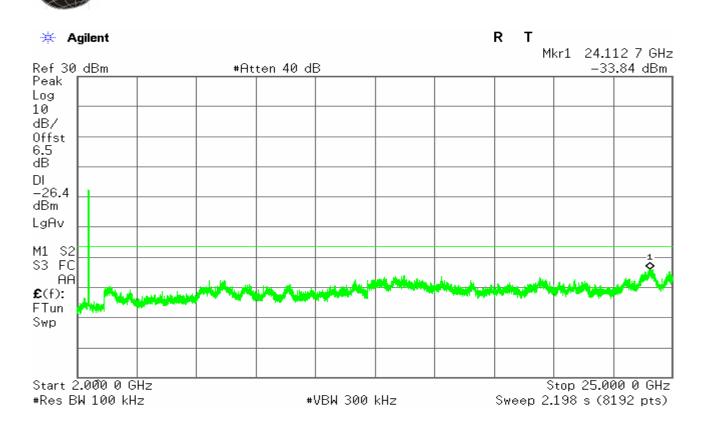



IEEE 802.11n HT40 mode / Chain 1

CH Low

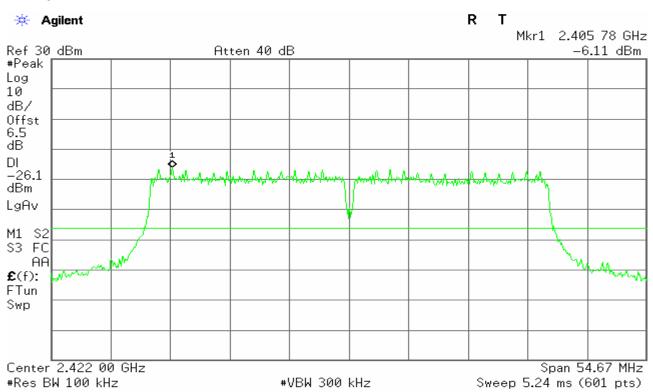


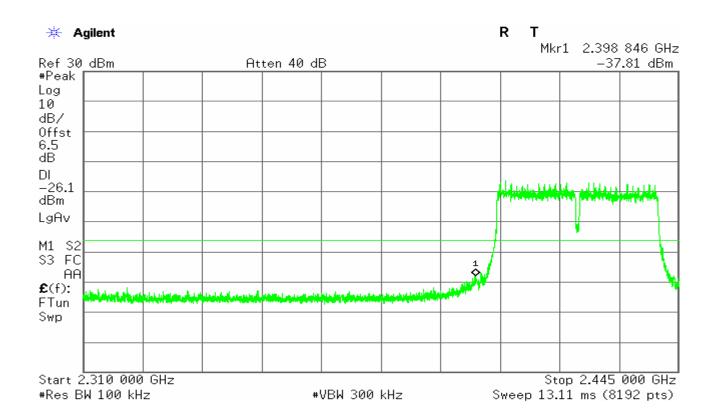


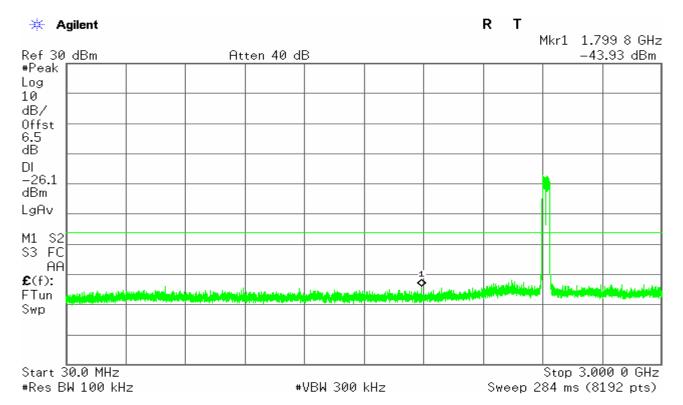


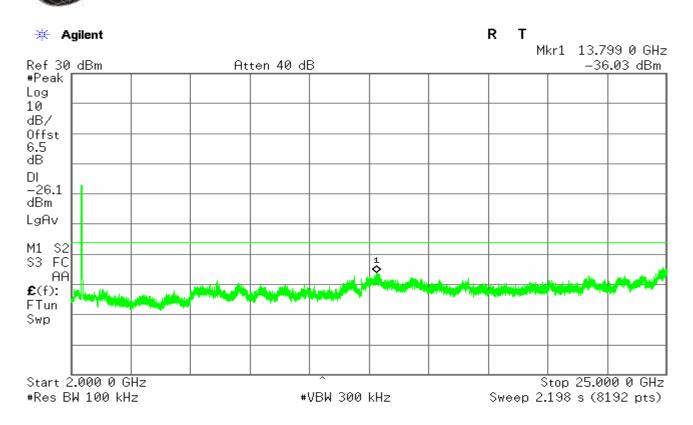

CH Mid

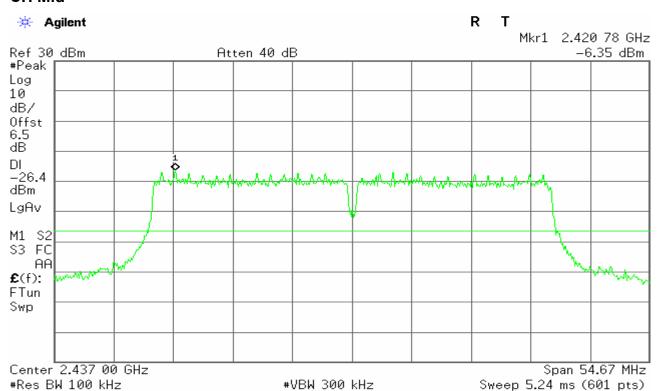


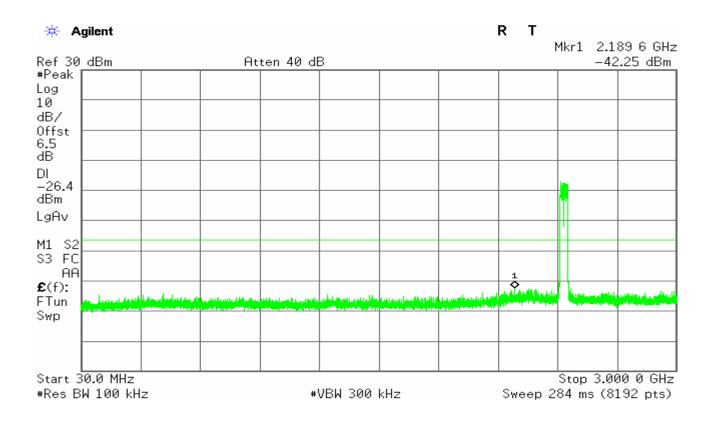


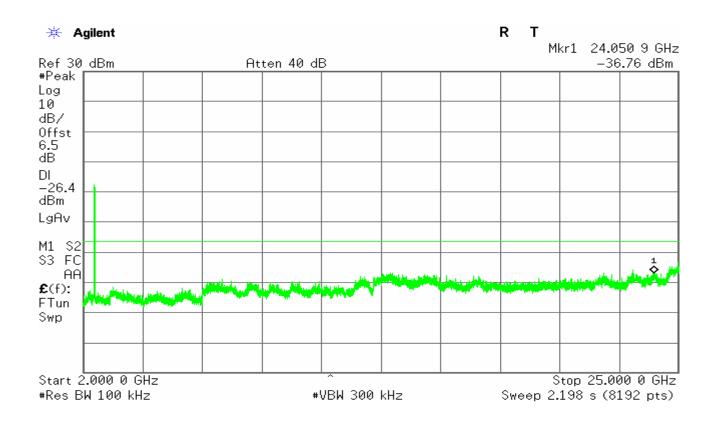





CH High

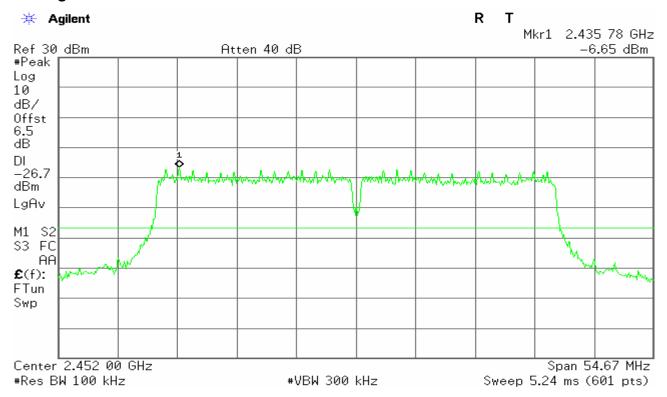

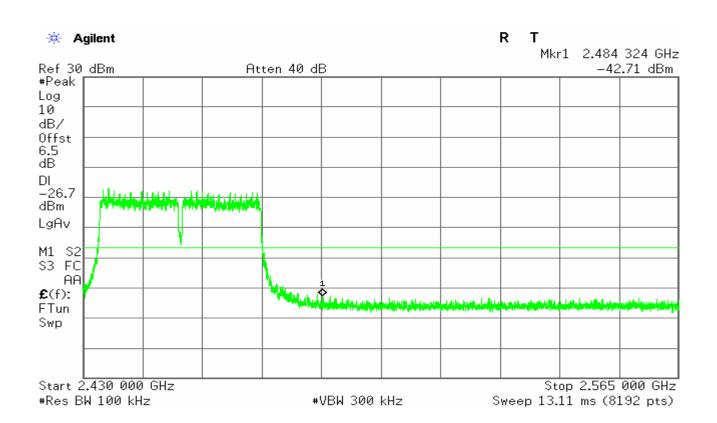

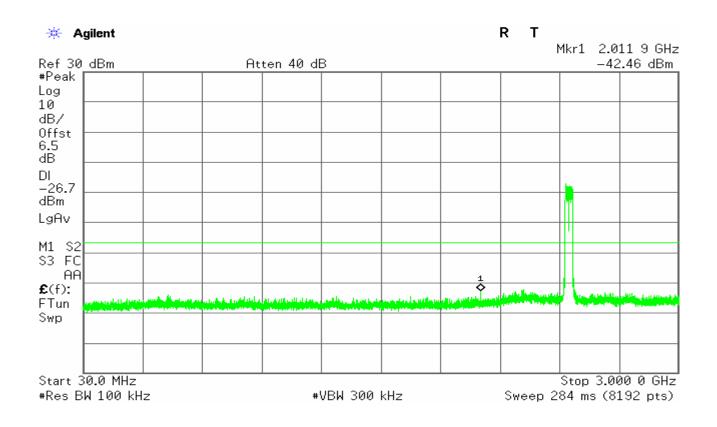

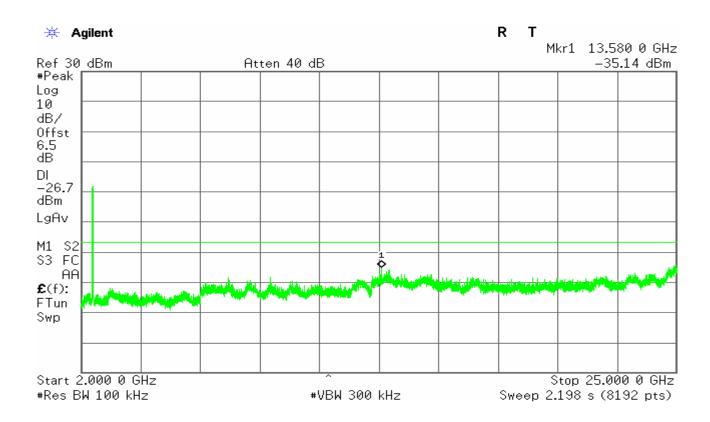

4.5. RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2.In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration


Below 30MHz

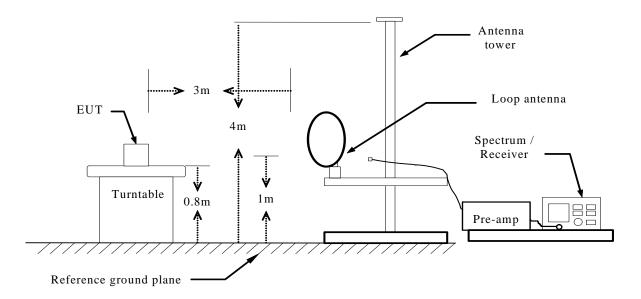

Below 1 GHz

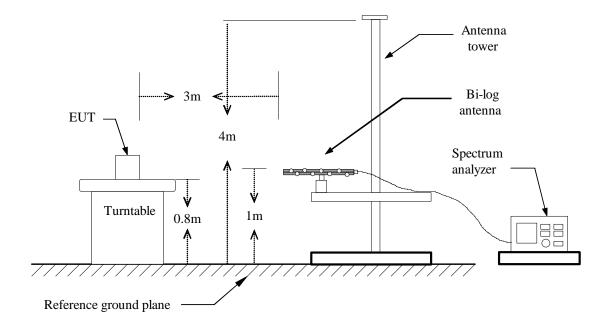

Above 1 GHz

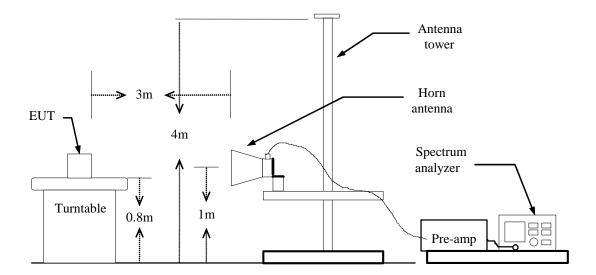

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.


TEST RESULTS

RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)

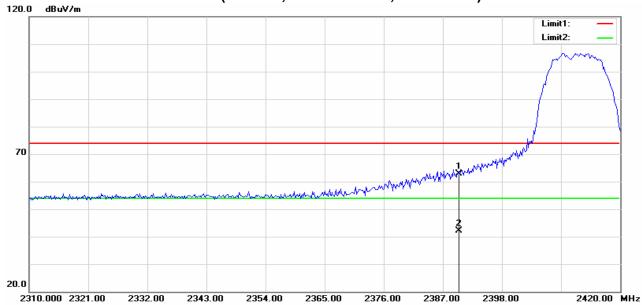


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	70.83	-7.87	62.96	74.00	-11.04	100	220	peak
2	2390.000	50.12	-7.87	42.25	54.00	-11.75	100	209	AVG

RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)

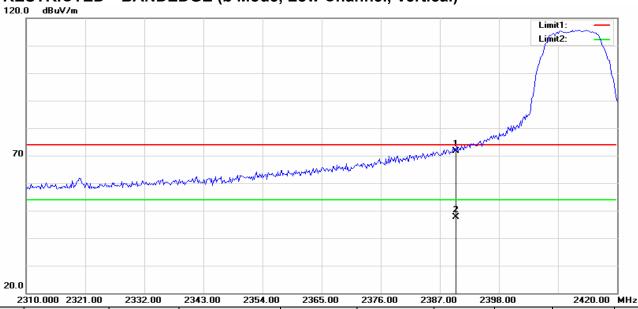


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	79.48	-7.87	71.61	74.00	-2.39	100	28	peak
2	2390.000	55.56	-7.87	47.69	54.00	-6.31	100	18	AVG

RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

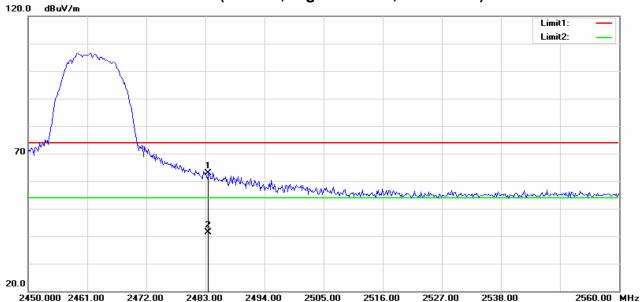


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	70.34	-7.47	62.87	74.00	-11.13	100	212	peak
2	2483.500	48.81	-7.47	41.34	54.00	-12.66	100	360	AVG

RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

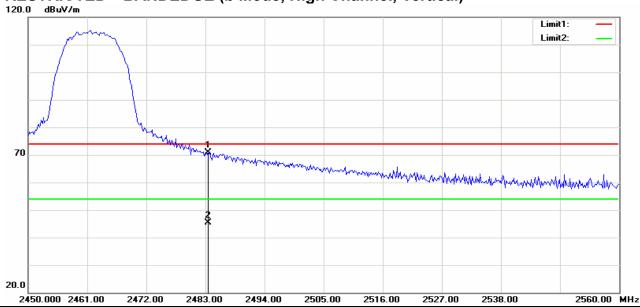

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	78.43	-7.47	70.96	74.00	-3.04	100	35	peak
2	2483.500	52.73	-7.47	45.26	54.00	-8.74	100	1	AVG

RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)

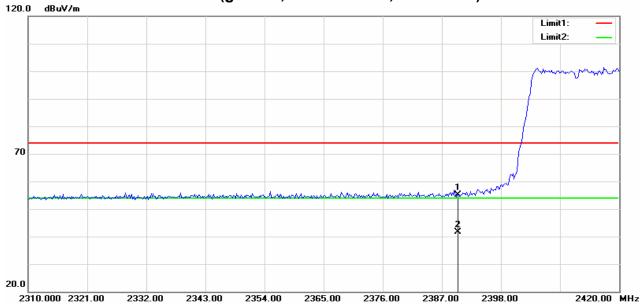


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	62.93	-7.87	55.06	74.00	-18.94	100	240	peak
2	2390.000	49.45	-7.87	41.58	54.00	-12.42	100	1	AVG

RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)




No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2389.680	79.77	-7.87	71.90	74.00	-2.10	100	14	peak
2	2389.680	54.28	-7.87	46.41	54.00	-7.59	100	10	AVG
3	2390.000	76.56	-7.87	68.69	74.00	-5.31	100	11	peak
4	2390.001	54.52	-7.87	46.65	54.00	-7.35	100	13	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

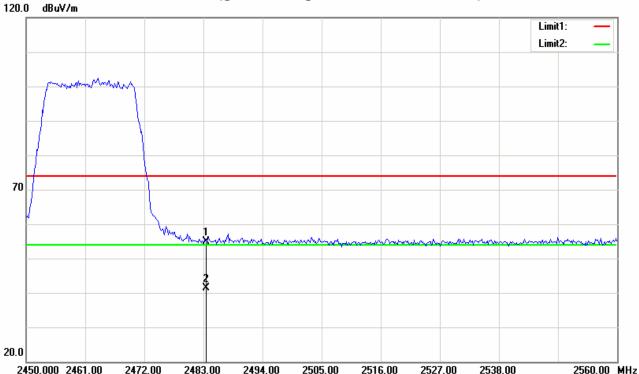


	2450.000 2461.00	2472.00	2483.00 2494.00	2505.00	2516.00 25	27.00 253	38.00	2560.00	MHz
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	62.47	-7.47	55.00	74.00	-19.00	100	3	peak
2	2483.500	48.96	-7.47	41.49	54.00	-12.51	100	1	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

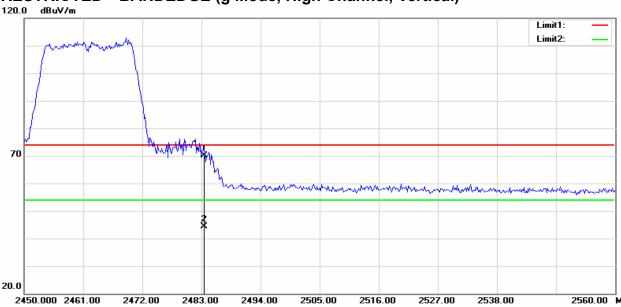


	430.000 2401.00	2472.00	2403.00 2434.00	2303.00	2310.00 232	27.00 25.	0.00	2300.00	MIIZ
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	77.52	-7.47	70.05	74.00	-3.95	100	351	peak
2	2483.500	51.85	-7.47	44.38	54.00	-9.62	100	351	AVG

RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, **Horizontal**)

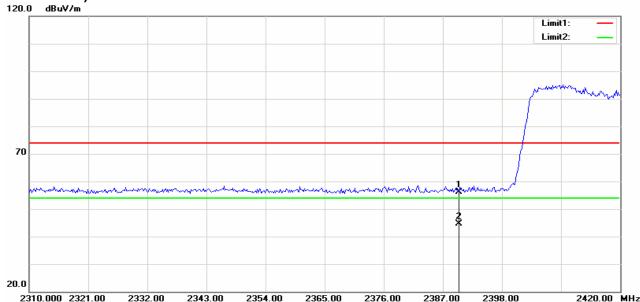


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	64.60	-8.45	56.15	74.00	-17.85	100	360	peak
2	2390.000	53.09	-8.45	44.64	54.00	-9.36	100	22	AVG

RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, Vertical)

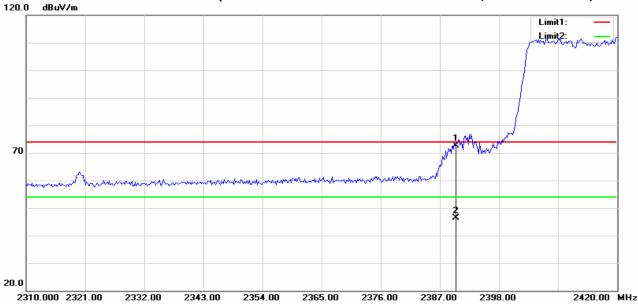


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	80.45	-7.87	72.58	74.00	-1.42	100	40	peak
2	2390.001	54.29	-7.87	46.42	54.00	-7.58	100	36	AVG

RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, **Horizontal**)

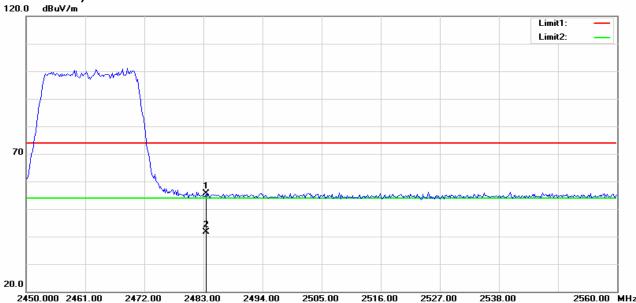


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	63.17	-7.47	55.70	74.00	-18.30	100	231	peak
2	2483.500	49.14	-7.47	41.67	54.00	-12.33	100	270	AVG

RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, Vertical)

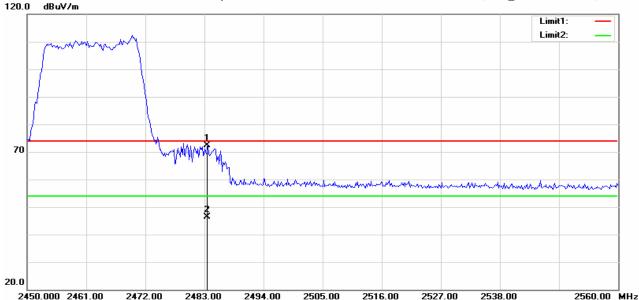


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	79.74	-7.47	72.27	74.00	-1.73	100	349	peak
2	2483.500	53.93	-7.47	46.46	54.00	-7.54	100	349	AVG

RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, Low Channel, Horizontal)

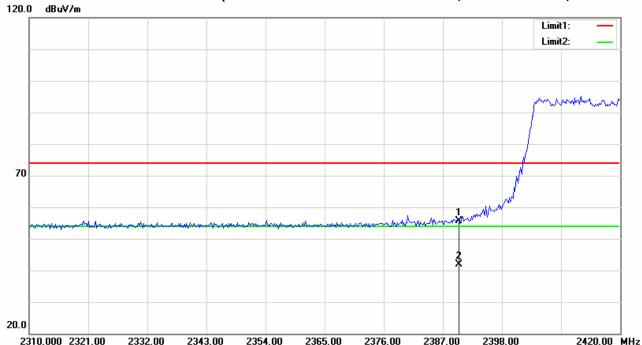


N	0.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
		(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
	1	2390.000	63.58	-7.87	55.71	74.00	-18.29	100	70	peak
:	2	2390.000	49.79	-7.87	41.92	54.00	-12.08	100	63	AVG

RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, Low Channel, Vertical)

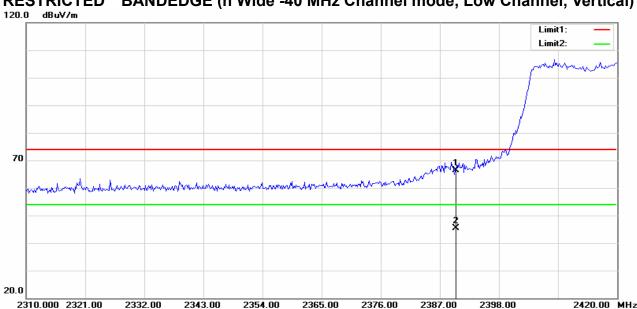


	010:000 E0E1:00		2010:00 2001:00	2000:00	2010:00 20			2120.00	
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	74.24	-7.87	66.37	74.00	-7.63	100	287	peak
2	2390.000	53.27	-7.87	45.40	54.00	-8.60	100	285	AVG

RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, High Channel, Horizontal)

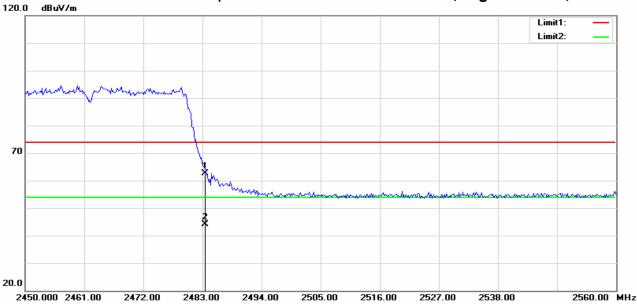

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	70.18	-7.47	62.71	74.00	-11.29	100	214	peak
2	2483.500	51.60	-7.47	44.13	54.00	-9.87	100	211	AVG

RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, High Channel, Vertical)

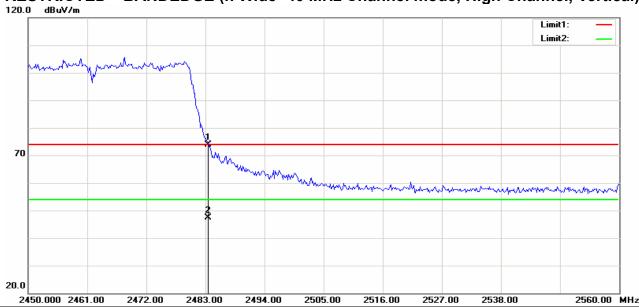

	100.000 E101.00	E-11 E.00	2100.00 2101.00	2000.00	2010.00 20		70.00	2000.00	
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	81.41	-7.47	73.94	74.00	-0.06	100	347	peak
2	2483.500	54.74	-7.47	47.27	54.00	-6.73	100	354	AVG

Below 1GHz

Normal Link **Operation Mode: Test Date:** 2015-2-26

Temperature: 24°C Tested by: James.Yan

Humidity: 48% RH Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
101.7800	V	16.43	10.95	27.38	43.50	-16.12	Peak
186.1700	V	15.17	12.48	27.65	43.50	-15.85	Peak
445.1600	٧	8.77	19.17	27.94	46.00	-18.06	Peak
691.5400	V	11.39	22.02	33.41	46.00	-12.59	Peak
815.7000	V	10.04	24.24	34.28	46.00	-11.72	Peak
901.0600	V	8.70	25.35	34.05	46.00	-11.95	Peak
				•			
108.5700	Н	12.77	12.75	25.52	43.50	-17.98	Peak
206.5400	I	13.06	13.21	26.27	43.50	-17.23	Peak
408.3000	Η	11.67	18.36	30.03	46.00	-15.97	Peak
581.9300	Н	11.79	20.20	31.99	46.00	-14.01	Peak
779.8100	Н	8.71	23.77	32.48	46.00	-13.52	Peak
892.3300	Н	7.86	25.00	32.86	46.00	-13.14	Peak

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Result (dBuV/m) Limit (dBuV/m).

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low Test Date: 2015-2-26

Tested by: James. Yan Temperature: 24°C

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	47.45	-1.24	46.21	74.00	-27.79	100	200	peak
2	7538.462	43.86	5.02	48.88	74.00	-25.12	100	130	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4823.879	47.81	-1.25	46.56	54.00	-7.44	102	200	AVG
2	7238.782	47.22	4.23	51.45	74.00	-22.55	100	51	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH Mid Test Date: 2015-2-26

24°C Temperature: Tested by: James. Yan

Polarity: Ver. / Hor. **Humidity:** 48 % RH

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4868.590	46.82	-1.28	45.54	74.00	-28.46	100	360	peak
2	7511.218	44.35	4.80	49.15	74.00	-24.85	100	360	peak
N/A									

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	6857.372	42.98	4.14	47.12	74.00	-26.88	100	108	peak
2	9173.077	41.62	7.05	48.67	74.00	-25.33	100	315	peak
N/A									

Operation Mode:

TX / IEEE 802.11b / CH High

Test Date: 2015-2-26

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	6612.180	42.43	3.25	45.68	74.00	-28.32	100	293	peak
2	8737.180	42.47	6.78	49.25	74.00	-24.75	100	270	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	7974.359	43.13	6.74	49.87	74.00	-24.13	100	13	peak
2	14866.987	39.42	12.51	51.93	74.00	-22.07	100	106	peak
N/A									

Operation

Mode:

TX / IEEE 802.11g / CH Low

Test Date: 2015-2-26

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	52.85	-1.24	51.61	74.00	-22.39	100	52	peak
2	7211.538	48.45	4.29	52.74	74.00	-21.26	100	322	peak
N/A									

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	8056.090	41.07	6.83	47.90	74.00	-26.10	100	323	peak
2	12769.231	41.60	8.89	50.49	74.00	-23.51	100	53	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Mid Test Date: 2015-2-26

Temperature: 24°C **Tested by:** James.Yan

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	53.73	-1.32	52.41	74.00	-21.59	100	142	peak
2	7783.654	42.99	6.09	49.08	74.00	-24.92	100	113	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	53.89	-1.24	52.65	74.00	-21.35	100	150	peak
2	7048.077	44.04	4.61	48.65	74.00	-25.35	100	265	peak
N/A					,				
				'	1	,			
				'	1	,			
						<u> </u>			

Operation Mode:TX / IEEE 802.11g / CH HighTest Date: 2015-2-26Temperature:24°CTested by: James.Yan

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	53.76	-1.32	52.44	74.00	-21.56	100	42	peak
2	7391.988	35.77	3.94	39.71	54.00	-14.29	97	19	AVG
N/A									

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	48.20	-1.24	46.96	74.00	-27.04	100	138	peak
2	7102.564	44.02	4.50	48.52	74.00	-25.48	100	294	peak
N/A									

 $\textbf{Operation Mode:} \ \ \mathsf{TX} \ / \ \mathsf{IEEE} \ 802.11 \mathsf{n} \ \mathsf{HT20} \ \mathsf{mode} \ / \ \mathsf{CH} \ \mathsf{Low}$

Test Date: 2015-2-26

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	51.14	-1.24	49.90	74.00	-24.10	100	69	peak
2	7211.538	46.60	4.29	50.89	74.00	-23.11	100	317	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	7320.513	40.75	4.07	44.82	74.00	-29.18	100	289	peak
2	9636.218	37.64	7.04	44.68	74.00	-29.32	100	107	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid

Test Date: 2015-2-26

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

	110112011001									
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark	
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)		
1	4868.590	53.91	-1.28	52.63	74.00	-21.37	100	42	peak	
2	7320.513	39.11	4.07	43.18	54.00	-10.82	100	330	AVG	
N/A										

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	55.25	-1.32	53.93	74.00	-20.07	100	147	peak
2	7729.167	42.90	5.92	48.82	74.00	-25.18	100	215	peak
N/A									
	<u> </u>								
	<u> </u>								

Operation Mode: TX / IEEE 802.11n HT20 mode / CH High Test Date: 2015-2-26

24°C Temperature: Tested by: James. Yan

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4895.833	54.36	-1.30	53.06	74.00	-20.94	100	333	peak
2	7375.000	48.97	3.97	52.94	74.00	-21.06	100	89	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	49.93	-1.32	48.61	74.00	-25.39	100	138	peak
2	7647.436	43.27	5.66	48.93	74.00	-25.07	100	329	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low **Test Date**: 2015-2-26

24°C Temperature: Tested by: James.Yan

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4841.346	48.70	-1.26	47.44	74.00	-26.56	100	42	peak
2	6993.590	44.09	4.64	48.73	74.00	-25.27	100	14	peak
N/A									

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	53.80	-1.24	52.56	74.00	-21.44	100	144	peak
2	7974.359	44.30	5.07	49.37	74.00	-24.63	100	56	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid Test Date: 2015-2-26

Temperature: 24°C Tested by: James. Yan

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4868.590	50.10	-1.28	48.82	74.00	-25.18	100	43	peak
2	7075.320	44.40	4.55	48.95	74.00	-25.05	100	104	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	48.64	-1.24	47.40	74.00	-26.60	100	144	peak
2	7129.808	43.93	4.45	48.38	74.00	-25.62	100	159	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH High Test Date: 2015-2-26

Temperature: 24°C Tested by: James. Yan

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4895.833	51.14	-1.30	49.84	74.00	-24.16	100	49	peak
2	7347.756	45.29	4.02	49.31	74.00	-24.69	100	332	peak
N/A									

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4895.833	40.02	-1.30	38.72	74.00	-35.28	100	270	peak
2	7375.000	38.81	3.97	42.78	74.00	-31.22	100	41	peak
N/A									
									·

4.6.POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dΒμV)					
(141112)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA




Job No.: C150127R02 AC750GW Model: Standard: FCC Class B Test item: Conduction test

Line: L1

Model:

Date: 2015-2-26 Time: 15:32:29 Temp.(C)/Hum.(%): 22(C)/48% James.Yan Test By: Test Voltage: AC 120V/60Hz

Description:

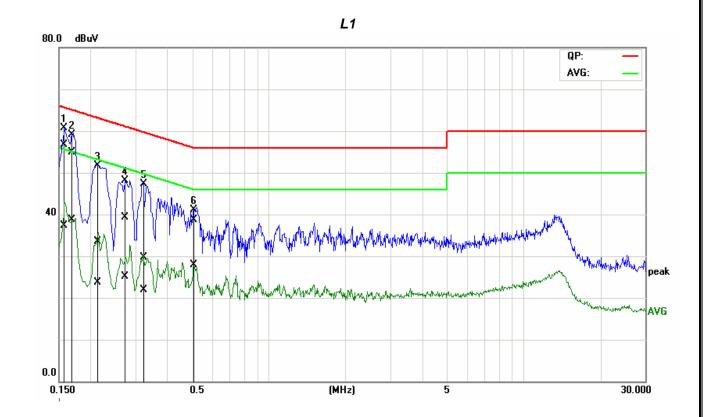


No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1557	36.90	17.44	19.79	56.69	37.23	65.69	55.69	-9.00	-18.46	Pass
2	0.1661	35.08	18.97	19.74	54.82	38.71	65.15	55.15	-10.33	-16.44	Pass
3	0.2142	13.83	4.09	19.61	33.44	23.70	63.04	53.04	-29.60	-29.34	Pass
4	0.2756	19.55	5.50	19.66	39.21	25.16	60.95	50.95	-21.74	-25.79	Pass
5*	0.3190	9.96	2.25	19.69	29.65	21.94	59.73	49.73	-30.08	-27.79	Pass
6	0.5070	18.92	8.08	19.83	38.75	27.91	56.00	46.00	-17.25	-18.09	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.: C150127R02 Date: 2015-2-26 Model: AC750GW Time: 15:36:59 FCC Class B Temp.(C)/Hum.(%): Standard: 22(C)/48% Test item: Conduction test Test By: James.Yan AC 120V/60Hz Line: Test Voltage: L2 Description: Model:



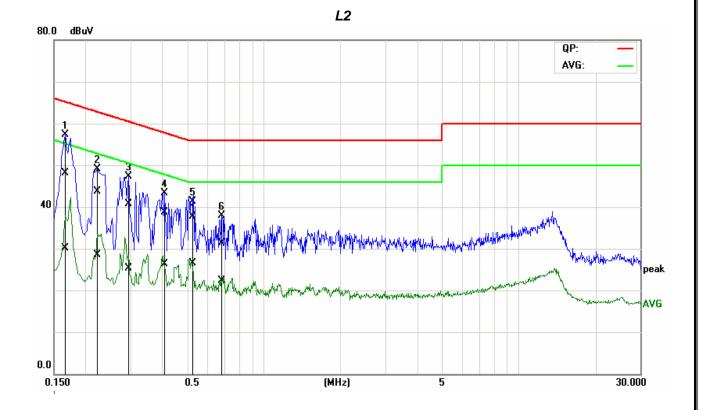

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1636	28.34	10.32	19.71	48.05	30.03	65.28	55.28	-17.23	-25.25	Pass
2	0.2230	24.11	8.92	19.66	43.77	28.58	62.71	52.71	-18.94	-24.13	Pass
3	0.2950	20.92	5.57	19.71	40.63	25.28	60.38	50.38	-19.75	-25.10	Pass
4	0.4067	18.88	6.59	19.78	38.66	26.37	57.72	47.72	-19.06	-21.35	Pass
5*	0.5156	17.76	6.63	19.85	37.61	26.48	56.00	46.00	-18.39	-19.52	Pass
6	0.6790	11.37	2.39	19.84	31.21	22.23	56.00	46.00	-24.79	-23.77	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).