



## FCC RADIO TEST REPORT

Applicant's company	Aptos Technology Inc.
Applicant Address	No. 398, Youyi Rd., Jhunan Township, Miaoli County 350, Taiwan R.O.C.
FCC ID	XPQ-ADSG001-R
Manufacturer's company	Aptos Technology Inc.
Manufacturer Address	No. 398, Youyi Rd., Jhunan Township, Miaoli County 350, Taiwan R.O.C.

Product Name	Bike Guardian
Brand Name	Aptos Design Lab.
Model Name	ADSB001-R
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2405MHz
Received Date	Mar. 17, 2010
Final Test Date	Mar. 23, 2010
Submission Type	Original Equipment



### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory  
1190

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Carrier Frequencies .....	3
3.4. Table for Test Modes.....	3
3.5. Table for Testing Locations.....	3
3.6. Table for Supporting Units .....	4
3.7. Test Configurations .....	5
<b>4. TEST RESULT .....</b>	<b>6</b>
4.1. Field Strength of Fundamental Emissions Measurement.....	6
4.2. 20dB Spectrum Bandwidth Measurement .....	9
4.3. Radiated Emissions Measurement .....	11
4.4. Band Edge Emissions Measurement .....	18
4.5. Antenna Requirements .....	20
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>21</b>
<b>6. TEST LOCATION.....</b>	<b>22</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>23</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A17</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B4</b>



## History of This Test Report

Original Issue Date: May 06, 2010

Report No.: FR032921AA

- No additional attachment.
- Additional attachment were issued as following record:



Report No.: FR032921AA

Certificate No.: CB9905017

## 1. CERTIFICATE OF COMPLIANCE

Product Name : Bike Guardian  
Brand Name : Aptos Design Lab.  
Model Name : ADSB001-R  
Applicant : Aptos Technology Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 17, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2010.5.10

Reviewed By:

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
-	15.207	AC Power Line Conducted Emissions	-	-
4.1	15.249(a)	Field Strength of Fundamental Emissions	Complies	12.67 dB
4.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.3	15.249(a)/(d)	Radiated Emissions	Complies	11.80 dB
4.4	15.249(d)	Band Edge Emissions	Complies	9.60 dB
4.5	15.203	Antenna Requirements	Complies	-

Note: The Power Supply of this EUT is from Battery (DC voltage).

Conduced Powerline tests are not applicable for this EUT.

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From Battery (DC 1.5V)
Modulation	FSK
Frequency Range	2405MHz
Channel Number	1
Channel Band Width (99%)	2.58 MHz
Max. Field Strength	66.41 dBuV/m at 3m (Average) 101.33 dBuV/m at 3m (Peak)
Carrier Frequencies	Please refer to section 3.3
Antenna	Printed Antenna: -3.69

#### 3.2. Accessories

N/A

#### 3.3. Table for Carrier Frequencies

Frequency Band
2405MHz

#### 3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Frequency	Antenna
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	2405MHz	1
Radiated Emissions 9kHz~1GHz	-	Normal Link	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	2405MHz	1
Band Edge Emissions	CTX	2405MHz	1

Note: CTX=continuously transmitting

#### 3.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.


### 3.6. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
POWER SUPPLY	INSTEK	GPC-6030D	N/A
Bike Guardian (LED)	Aptos Design Lab.	ADSB001-T	XPQ-ADSG001-T


### 3.7. Test Configurations

#### 3.7.1. Radiation Emissions Test Configuration

Test Configuration: Below 1GHz

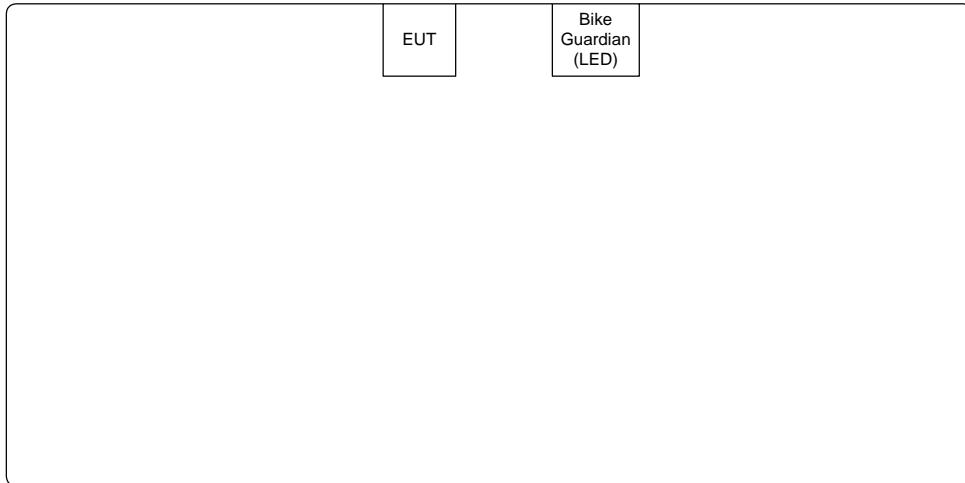

Test Configuration: Above 1GHz

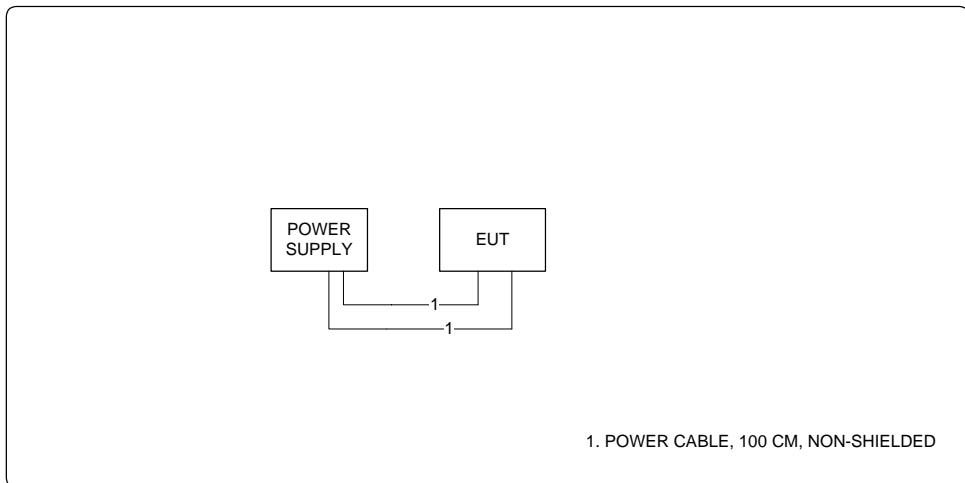

## 4. TEST RESULT

### 4.1. Field Strength of Fundamental Emissions Measurement

#### 4.1.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94
5725-5875	94

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the

field strength is at its maximum value.

#### 4.1.4. Test Setup Layout

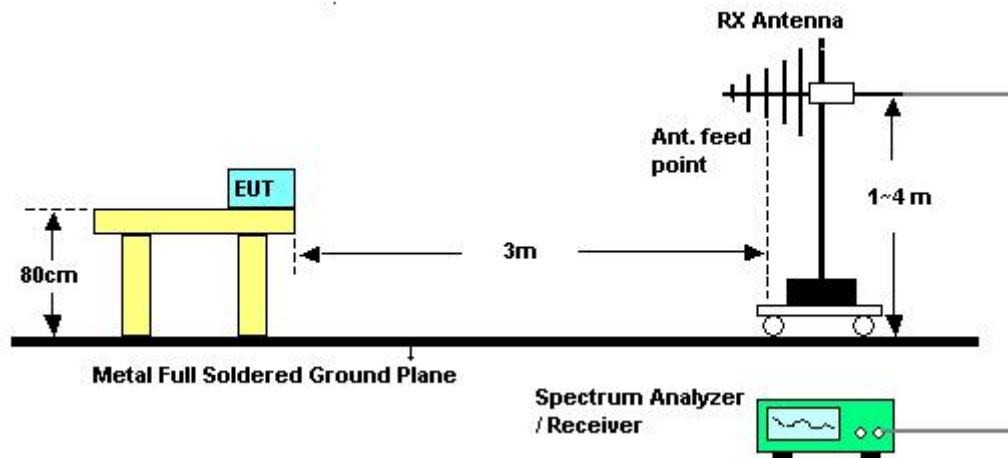

#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.1.7. Test Result of Field Strength of Fundamental Emissions

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	2405MHz
Test Date	Mar. 22, 2010		

##### Horizontal

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		

3 p	2404.60	101.33	114.00	-12.67	71.44	2.05	0.00	27.84	341	100	Peak	HORIZONTAL
4	2405.00	66.41	94.00	-27.59	36.52	2.05	0.00	27.84	341	100	Average	HORIZONTAL

##### Vertical

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		

3 p	2404.60	94.50	114.00	-19.50	64.61	2.05	0.00	27.84	334	104	Peak	VERTICAL
4	2405.00	63.64	94.00	-30.36	33.75	2.05	0.00	27.84	334	104	Average	VERTICAL

##### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.2. 20dB Spectrum Bandwidth Measurement

### 4.2.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2405MHz).

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.2.4. Test Setup Layout

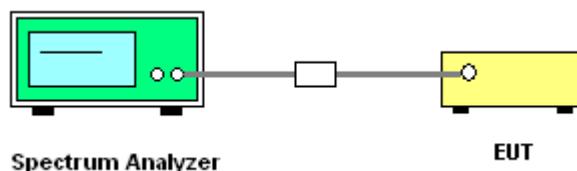

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 20dB Spectrum Bandwidth

Temperature	24°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	2405MHz

Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2405MHz	2.58	2.58	2403.7000	-	Complies

#### 20 dB/99% Bandwidth Plot on 2405 MHz

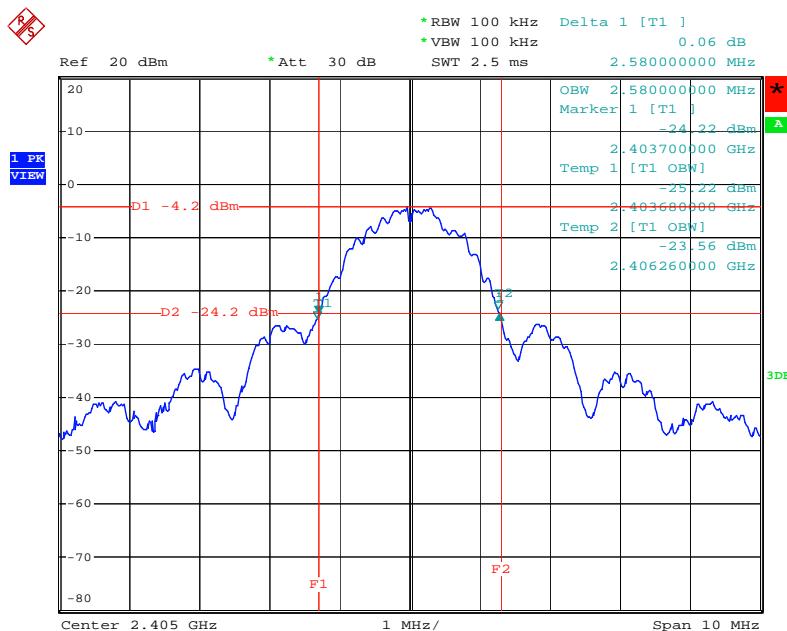

Date: 23.MAR.2010 15:11:12

## 4.3. Radiated Emissions Measurement

### 4.3.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.3.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.3.4. Test Setup Layout

For radiated emissions below 30MHz

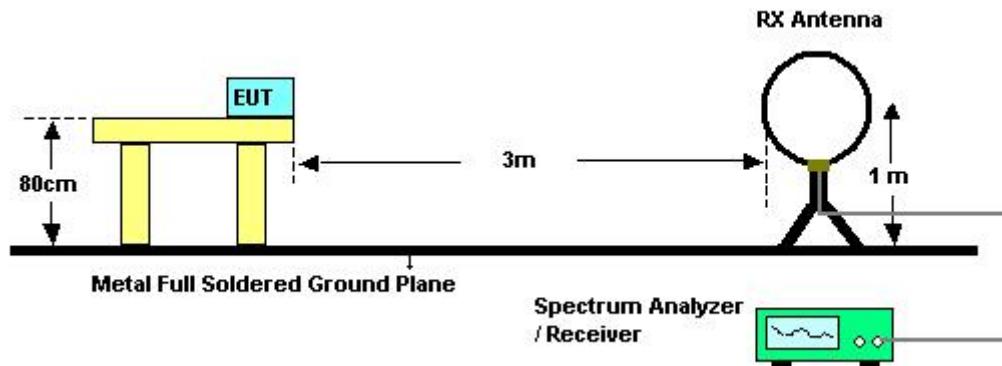

For radiated emissions above 30MHz

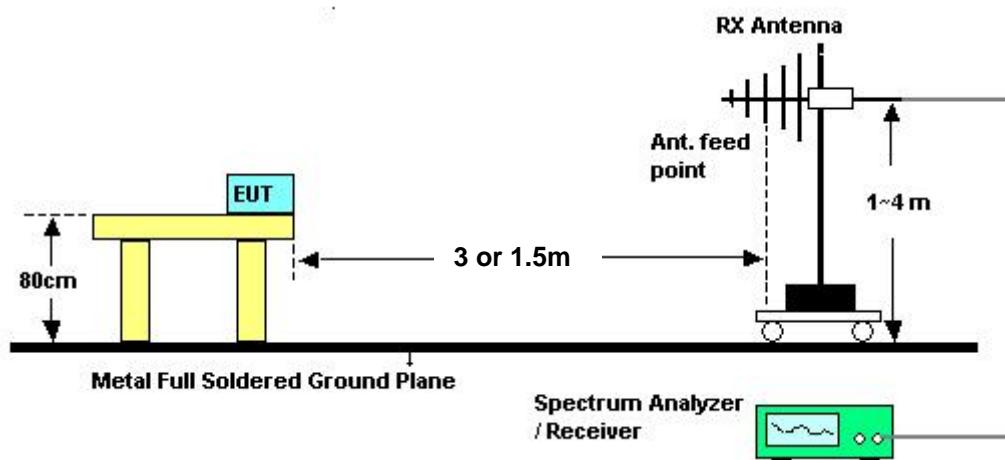

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Test Date	Mar. 19, 2010

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.3.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link

## Horizontal

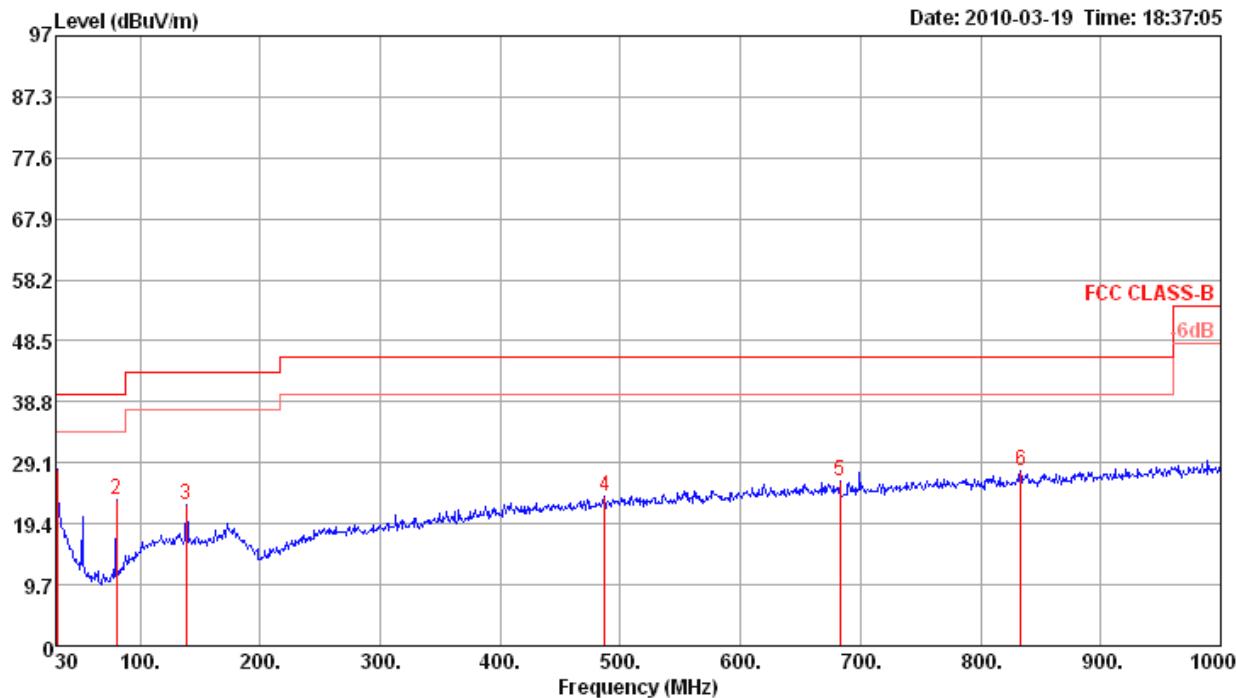

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	Line	dB	dBuV	dB	dB/m	deg	cm		
1 p	30.97	28.20	40.00	-11.80	37.28	0.50	27.80	18.22	0	100	Peak	HORIZONTAL
2	80.44	23.30	40.00	-16.70	42.71	1.10	27.68	7.17	0	100	Peak	HORIZONTAL
3	138.64	22.41	43.50	-21.09	36.09	1.39	27.41	12.34	0	100	Peak	HORIZONTAL
4	486.87	23.79	46.00	-22.21	31.73	2.67	28.03	17.42	0	100	Peak	HORIZONTAL
5	682.81	26.18	46.00	-19.82	31.80	3.37	28.02	19.03	0	100	Peak	HORIZONTAL
6	833.16	27.73	46.00	-18.27	31.87	3.37	27.53	20.02	0	100	Peak	HORIZONTAL

## Vertical

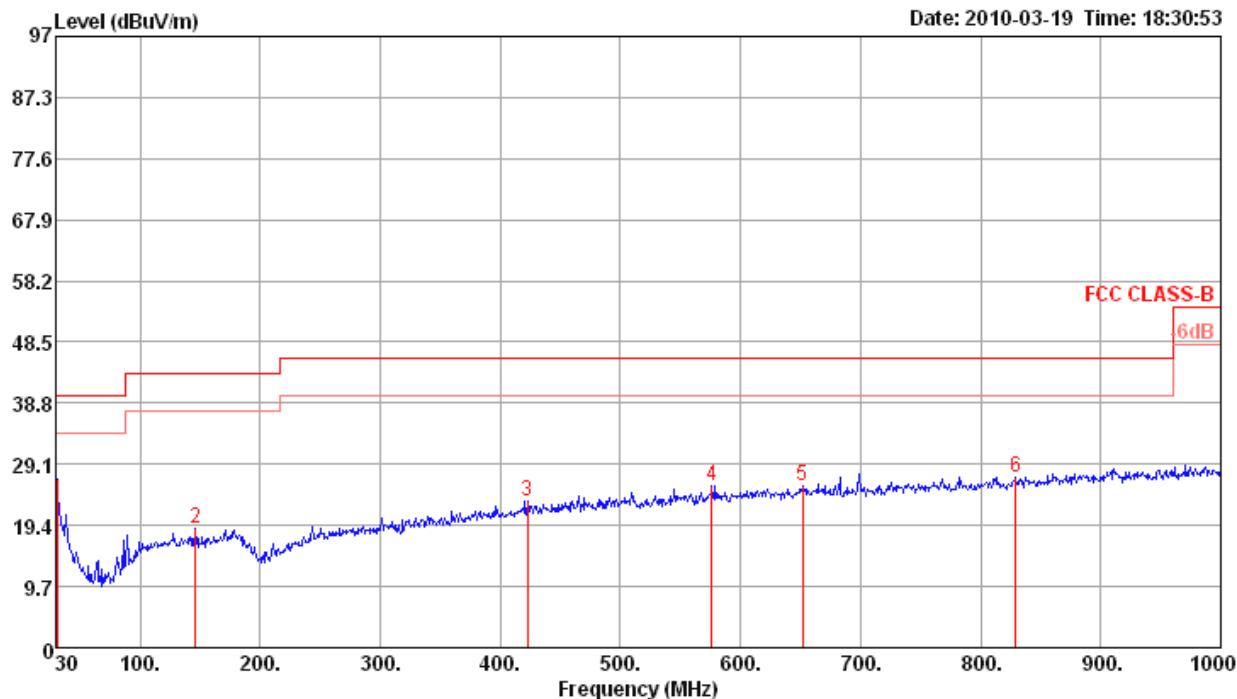

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	30.97	26.71	40.00	-13.29	35.79	0.50	27.80	18.22	0	400	Peak VERTICAL
2	146.40	19.03	43.50	-24.47	32.94	1.43	27.37	12.03	0	400	Peak VERTICAL
3	422.85	23.33	46.00	-22.67	32.18	2.44	27.71	16.42	0	400	Peak VERTICAL
4	576.11	25.64	46.00	-20.36	32.40	2.85	28.10	18.49	0	400	Peak VERTICAL
5	651.77	25.65	46.00	-20.35	31.28	3.49	28.05	18.93	0	400	Peak VERTICAL
6	829.28	27.14	46.00	-18.86	31.33	3.36	27.54	19.99	0	400	Peak VERTICAL

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level.

4.3.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	2405MHz
Test Date	Mar. 22, 2010		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			
1 p	4809.04	45.34	74.00	-28.66	45.24	3.00	35.32	32.42	247	100	Peak	HORIZONTAL
2 a	4810.69	30.86	54.00	-23.14	30.76	3.00	35.32	32.42	247	100	Average	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			
1 p	4809.08	50.44	74.00	-23.56	50.34	3.00	35.32	32.42	76	100	Peak	VERTICAL
2 a	4810.33	33.58	54.00	-20.42	33.48	3.00	35.32	32.42	76	100	Average	VERTICAL

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.4. Band Edge Emissions Measurement

### 4.4.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

### 4.4.3. Test Procedures

1. The test procedure is the same as section 4.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.2.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	2405MHz
<b>Test Date</b>	Mar. 22, 2010		

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB	dB/m	deg		
1 a	2385.40	44.40	54.00	-9.60	14.47	2.04	0.00	27.89	341	100 Average	HORIZONTAL
2	2386.00	56.11	74.00	-17.89	26.20	2.04	0.00	27.87	341	100 Peak	HORIZONTAL
3 p	2404.60	101.33			71.44	2.05	0.00	27.84	341	100 Peak	HORIZONTAL
4	2405.00	66.41			36.52	2.05	0.00	27.84	341	100 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2405 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5. Antenna Requirements

### 4.5.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.5.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Oct. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sportun International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangment with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix