

FCC Test Report (PART 27)

Report No.: RF181120C09

FCC ID: XPY2AGQN4NNN

Test Model: SARA-R410M

Received Date: Nov. 20, 2018

Test Date: Dec. 08 to 10, 2018

Issued Date: Feb. 01, 2019

Applicant: u-blox-AG

Address: Zuercherstrasse 68 8800 Thalwil, Switzerland

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments.....	7
3 General Information.....	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units.....	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Output Power Measurement	14
4.1.1 Limits of Output Power Measurement.....	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup.....	15
4.1.4 Test Results	16
4.2 Modulation characteristics Measurement	19
4.2.1 Limits of Modulation characteristics	19
4.2.2 Test Procedure	19
4.2.3 Test Setup.....	19
4.2.4 Test Results	20
4.3 Frequency Stability Measurement.....	21
4.3.1 Limits of Frequency Stability Measurement.....	21
4.3.2 Test Procedure	21
4.3.3 Test Setup.....	21
4.3.4 Test Results	22
4.4 Emission Bandwidth Measurement.....	23
4.4.1 Limits of Emission Bandwidth Measurement.....	23
4.4.2 Test Procedure	23
4.4.3 Test Setup.....	23
4.4.4 Test Results (-26dBc Bandwidth)	24
4.4.5 Test Results (Occupied Bandwidth)	25
4.5 Channel Edge Measurement	26
4.5.1 Limits of Channel Edge Measurement	26
4.5.2 Test Setup.....	26
4.5.3 Test Procedures.....	26
4.5.4 Test Results	27
4.6 Peak to Average Ratio.....	31
4.5.1 Limits of Peak to Average Ratio Measurement	31
4.5.2 Test Setup.....	31
4.5.3 Test Procedures.....	31
4.5.4 Test Results	32
4.7 Conducted Spurious Emissions	33
4.7.1 Limits of Conducted Spurious Emissions Measurement	33
4.7.2 Test Setup.....	33
4.7.3 Test Procedure	33
4.7.5 Test Results	34
4.8 Radiated Emission Measurement	38
4.8.1 Limits of Radiated Emission Measurement	38
4.8.2 Test Procedure	38
4.8.3 Deviation from Test Standard	38

4.8.4 Test Setup.....	39
4.8.5 Test Results	40
5 Pictures of Test Arrangements.....	48
Appendix – Information of the Testing Laboratories	49

Release Control Record

Issue No.	Description	Date Issued
RF181120C09	Original release.	Feb. 01, 2019

1 Certificate of Conformity

Product: LTE CAT-M1 modem

Brand: u-blox-AG

Test Model: SARA-R410M

Sample Status: ENGINEERING SAMPLE


Applicant: u-blox-AG

Test Date: Dec. 08 to 10, 2018

Standards: FCC Part 27, Subpart F

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  _____, **Date:** Feb. 01, 2019
Claire Kuan / Specialist

Approved by :  _____, **Date:** Feb. 01, 2019
May Chen / Manager

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Radiated Power	PASS	Meet the requirement of limit.
2.1047	Modulation Characteristics	PASS	Meet the requirement.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	PASS	Meet the requirement of limit.
---	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.35dB at 1564MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Test Site and Instruments

For radiated spurious emissions test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001	Jan. 15, 2018	Jan. 14, 2019
RF Cable	NA	LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier Mini-Circuits	ZVA-183-S+	AMP-ZVA-03	May 10, 2018	May 09, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-2000	150318	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-5000	150321	Jan. 29, 2018	Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Dec. 10, 2018

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 14, 2018	Nov. 13, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
AC Power Source Extech Electronics	6205	1440452	NA	NA
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP- AR	MAA0812-008	Jan. 10, 2018	Jan. 09, 2019
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 19, 2018	Nov. 18, 2019
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 12, 2018	Feb. 11, 2019
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 12, 2018	Feb. 11, 2019
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

NOTE:

1. The test was performed in Oven room 2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: Dec. 08, 2018

3 General Information

3.1 General Description of EUT

Product	LTE CAT-M1 modem	
Brand	u-blox-AG	
Test Model	SARA-R410M	
Status of EUT	ENGINEERING SAMPLE	
Power Supply Rating	DC 3.8V	
Modulation Type	QPSK, 16QAM	
Operating Frequency	LTE Band 13 (Channel Bandwidth 5MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth 10MHz)	782.0 MHz
Max. ERP Power	LTE Band 13 (Channel Bandwidth 5MHz)	QPSK : 420.7mW(26.24dBm) 16QAM: 416.869mW(26.20 dBm)
	LTE Band 13 (Channel Bandwidth 10MHz)	QPSK : 397.192mW(25.99dBm) 16QAM: 395.369mW(25.97dBm)
Emission Designator	LTE Band 13 (Channel Bandwidth 5MHz)	QPSK: 1M18G7D 16QAM: 1M34W7D
	LTE Band 13 (Channel Bandwidth 10MHz)	QPSK: 1M20G7D 16QAM: 1M22W7D
Antenna Type	Refer to note as below	
Antenna Connector	Refer to user's manual	
Accessory Device	NA	
Data Cable Supplied	NA	


Note:

1. This report is prepared for FCC Class II permissive change. The difference design is as the following information:
 - ◆ Module Board antenna trace design change and antenna change.
 - ◆ LTE Cat M1 test mode change for LTE Band13 adding 5M and 10M bandwidth measurements.
2. According to above conditions, all test items need to be performed. And all data were verified to meet the requirements.
3. The antenna provided to the EUT, please refer to the following table:

Gain(dBi) Including cable loss	Frequency range	Antenna Type	Connector Type	Cable Length
2.69	777-787MHz	PIFA	i-pex(MHF)	84 mm

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Configuration of System under Test

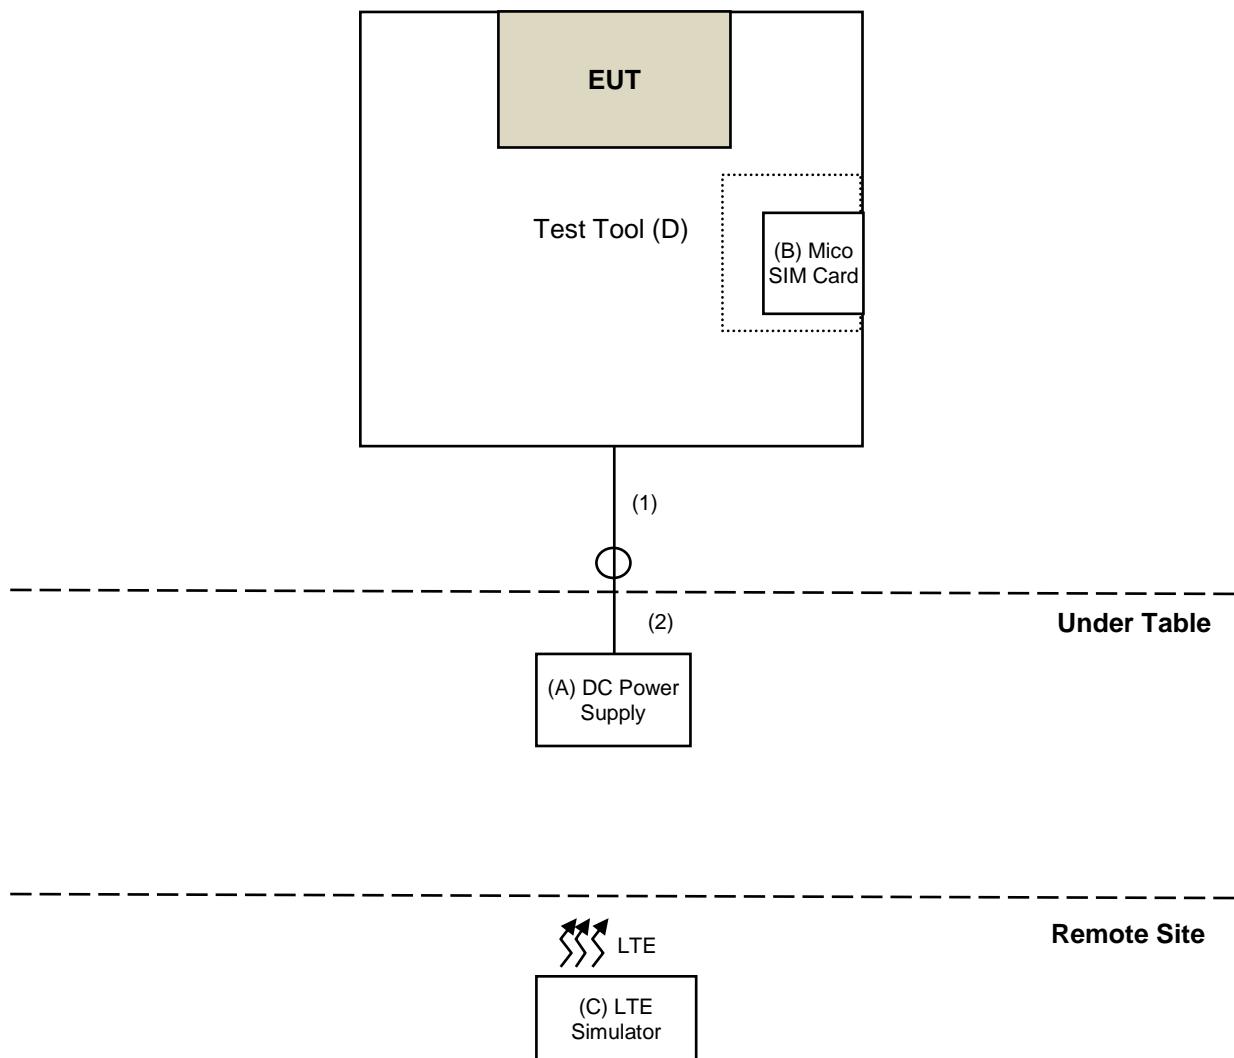

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	DC Power Supply	Topward	6603D	795558	NA	Provided by Lab
B.	MiCro SIM Card	NA	NA	NA	NA	Provided by Lab
C.	LTE Simulator	R&S	CMW500	NA	NA	Provided by Lab
D.	Test Tool	WNC	NA	NA	NA	Supplied by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1	No	0	Supplied by client
2.	DC Cable	1	1	No	0	Provided by Lab

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Y-plane. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 13

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	RB MODE				
					SIZE	OFFSET	INDEX		
ERP	23205 to 23255	23205, 23230, 23255	5MHz	QPSK/16QAM	1	0	0		
	23230	23230	10MHz	QPSK/16QAM	1	0	0		
Frequency Stability	23230	23230	5MHz	QPSK	1	0	0		
	23230	23230	10MHz	QPSK	1	0	0		
Band Edge	23205 to 23255	23205	5MHz	QPSK	1	0	0		
					6	0	0		
		23255			1	5	3		
					6	0	3		
	23230	23230	10MHz	QPSK	1	0	0		
					6	0	0		
		23230			1	5	7		
					6	0	7		
Peak to Average Ratio	23205 to 23255	23205, 23230, 23255	5MHz	QPSK/16QAM	6	0	0		
	23230	23230	10MHz	QPSK/16QAM	6	0	0		
Occupied Bandwidth	23205 to 23255	23205, 23230, 23255	5MHz	QPSK/16QAM	6	0	0		
	23230	23230	10MHz	QPSK/16QAM	6	0	0		
Conducted Emission	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1	0	0		
	23230	23230	10MHz	QPSK	1	0	0		
Radiated Emission	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1	0	0		
	23230	23230	10MHz	QPSK	1	0	0		

NOTE:

All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Frequency Stability, Band Edge, Conducted Emission and Radiated Emission were presented under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
ERP	25deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Frequency Stability	26deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Band Edge	26deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Peak to Average Ratio	26deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Occupied Bandwidth	26deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Conducted Emission	26deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
Radiated Emission Below 1GHz	25deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
Radiated Emission Above 1GHz	19deg. C, 70%RH	120Vac, 60Hz	Robert Cheng

3.4 EUT Operating Conditions

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 27, Subpart F

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

For Portable stations (hand-held devices) operating in the 698-787 MHz band are limited to 3 watts ERP.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. $RBW \geq OBW$ and $VBW \geq 3 \times RBW$.
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- e. ERP power can be calculated from EIRP power by subtracting the gain of dipole, $ERP \text{ power} = EIRP \text{ power} - 2.15 \text{dBi}$.

Note: The worst case vertical or horizontal polarization have been investigated and reported in this report


4.1.3 Test Setup

CONDUCTED POWER MEASUREMENT:




ERP/EIRP MEASUREMENT:

For ERP/EIRP below 1GHz

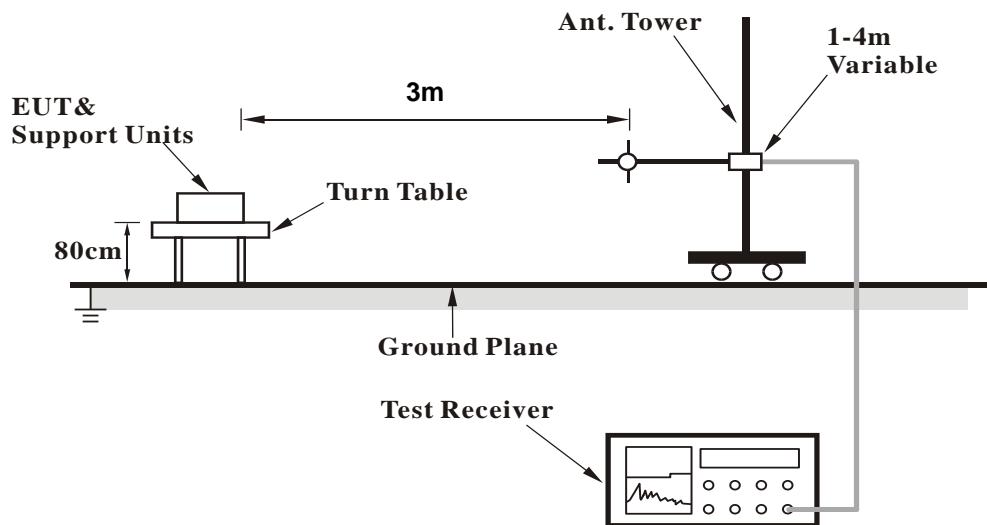

For ERP/EIRP above 1GHz

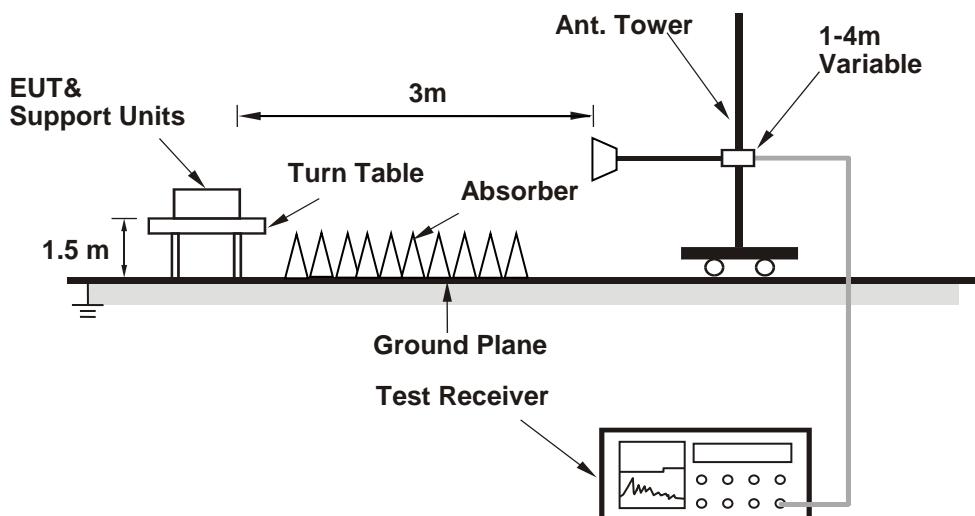

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

Channel Bandwidth: 5MHz

Band / BW	RB Size	RB Offset	RB Index	QPSK			3GPP MPR (dB)
				Low CH 23205	Mid CH 23230	High CH 23255	
				779.5 MHz	782 MHz	784.5 MHz	
13 / 5M	1	0	0	22.51	22.47	22.35	0
	1	5	3	22.31	22.39	22.41	0
	1	0	3	22.26	22.36	22.52	0
	1	5	0	22.31	22.35	22.32	0
	3	0	0	21.16	21.18	21.03	1
	3	3	3	21.2	21.17	21.16	1
	6	0	0	21.18	21.14	20.96	1
	6	0	3	21.11	21.12	21.11	1

Band / BW	RB Size	RB Offset	RB Index	16QAM			3GPP MPR (dB)
				Low CH 23205	Mid CH 23230	High CH 23255	
				779.5 MHz	782 MHz	784.5 MHz	
13 / 5M	1	0	0	22.37	22.36	22.37	0
	1	5	3	21.85	22.06	22.21	0
	1	0	3	22.16	22.16	22.26	0
	1	5	0	22.2	22.21	22.02	0
	3	0	0	21.23	21.15	21.11	1
	3	3	3	21.16	21.16	21.27	1
	6	0	0	21.18	21.11	21.06	1
	6	0	3	21.06	21.08	21.16	1

Channel Bandwidth: 10MHz

Band / BW	RB Size	RB Offset	RB Index	QPSK	3GPP MPR (dB)
				Mid CH 23230	
				782 MHz	
13 / 10M	1	0	0	22.28	0
	1	5	7	22.26	0
	1	0	3	22.11	0
	1	5	4	22.13	0
	4	0	0	22.09	0
	4	2	7	22.18	0
	6	0	0	21.18	1
	6	0	7	21.16	1

Band / BW	RB Size	RB Offset	RB Index	16QAM	3GPP MPR (dB)
				Mid CH 23230	
				782 MHz	
13 / 10M	1	0	0	22.26	0
	1	5	7	22.14	0
	1	0	3	22.09	0
	1	5	4	22.02	0
	4	0	0	22.06	0
	4	2	7	22.04	0
	6	0	0	21.28	1
	6	0	7	21.29	1

ERP POWER

Channel Bandwidth: 5MHz

QPSK						
Channel	Frequency (MHz)	Antenna Polarization	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)
23205	779.5	H	19.54	6.53	26.07	404.576
23230	782	H	19.51	6.42	25.93	391.742
23255	784.5	H	19.67	6.57	26.24	420.727

16QAM						
Channel	Frequency (MHz)	Antenna Polarization	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)
23205	779.5	H	19.40	6.53	25.93	391.742
23230	782	H	19.40	6.42	25.82	381.944
23255	784.5	H	19.63	6.57	26.20	416.869

Note: The worst case vertical or horizontal polarization have been investigated and find the worst is horizontal.

Channel Bandwidth: 10MHz

QPSK						
Channel	Frequency (MHz)	Antenna Polarization	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)
23230	782	H	19.06	6.93	25.99	397.192

16QAM						
Channel	Frequency (MHz)	Antenna Polarization	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)
23230	782	H	19.04	6.93	25.97	395.367

Note: The worst case vertical or horizontal polarization have been investigated and find the worst is horizontal.

4.2 Modulation characteristics Measurement


4.2.1 Limits of Modulation characteristics

N/A


4.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, the frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup

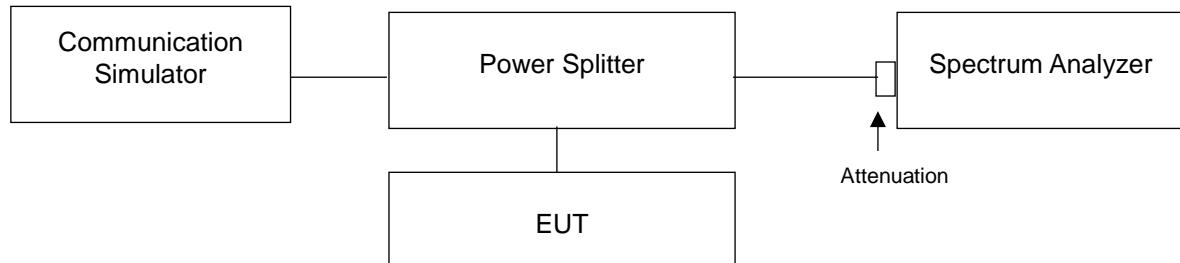

4.2.4 Test Results

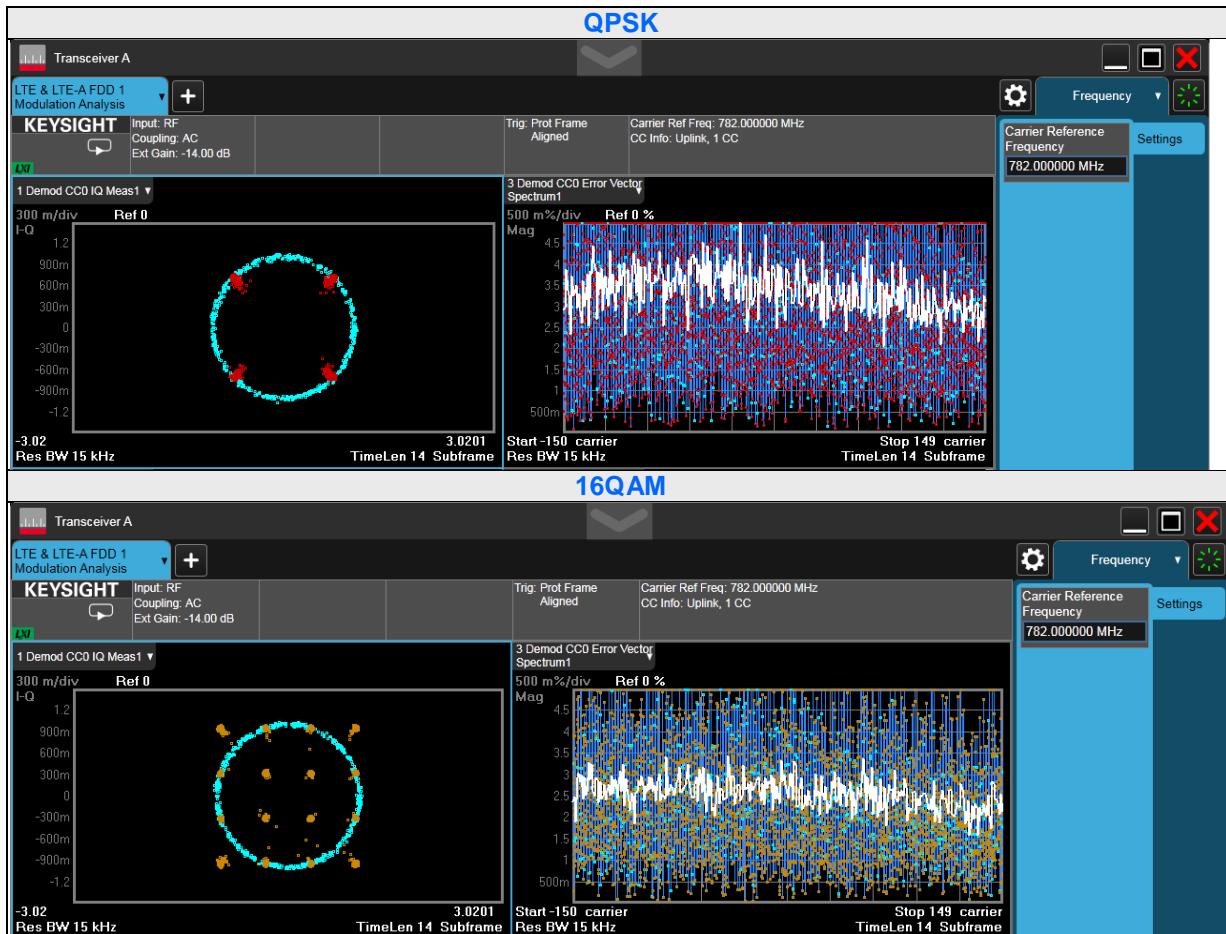

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30°C ~ 75°C.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

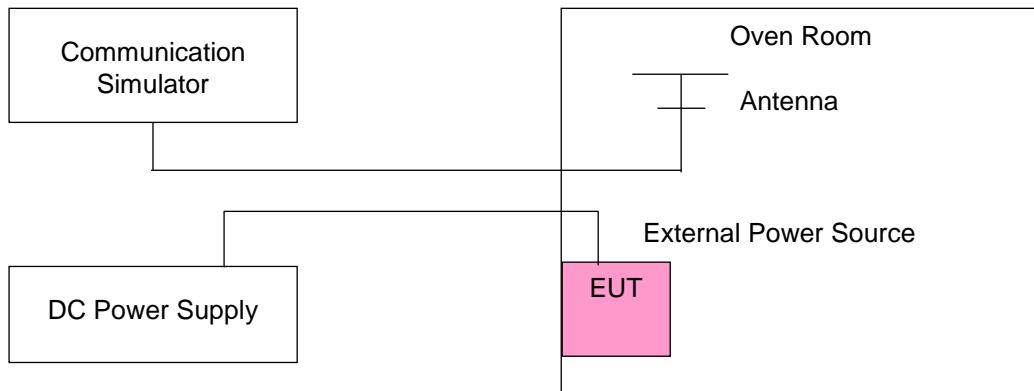

4.3.4 Test Results

LTE Band 13

Voltage (Volts)	Frequency Error (ppm)		Limit (ppm)
	5MHz	10MHz	
3.23	0.001	0.002	2.5
4.37	0.002	0.001	2.5

TEMP. (°C)	Frequency Error (ppm)		Limit (ppm)
	5MHz	10MHz	
75	0.002	0.002	2.5
70	0.002	0.001	2.5
60	0.002	0.001	2.5
50	0.002	0.002	2.5
40	0.001	0.002	2.5
30	0.001	0.002	2.5
20	0.002	0.002	2.5
10	0.001	0.001	2.5
0	0.002	0.001	2.5
-10	0.002	0.002	2.5
-20	0.001	0.002	2.5
-30	0.002	0.002	2.5

4.4 Emission Bandwidth Measurement

4.4.1 Limits of Emission Bandwidth Measurement

-26dBc Bandwidth

According to FCC 27.53 specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


Occupied Bandwidth

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with $RBW \geq 1\% \times OBW$ and $VBW \geq 3 \times VBW$.

4.4.3 Test Setup

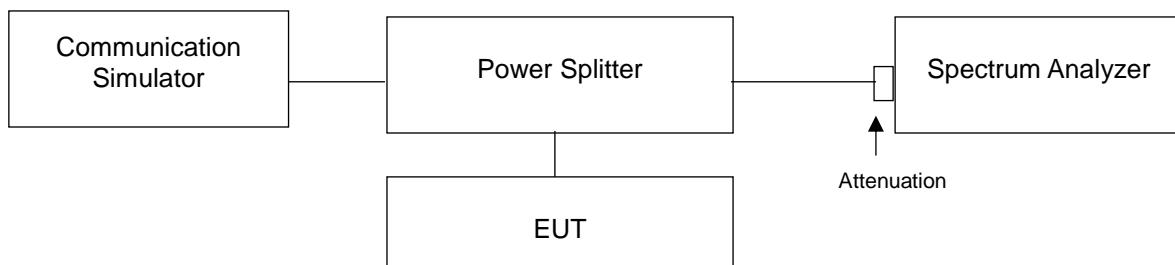


4.4.4 Test Results (-26dBc Bandwidth)

LTE Band 13							
Channel Bandwidth: 5MHz				Channel Bandwidth: 10MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	1.84	1.41	23230	782	1.62	2.01
23230	782	1.90	1.42				
23255	784.5	1.79	1.42				

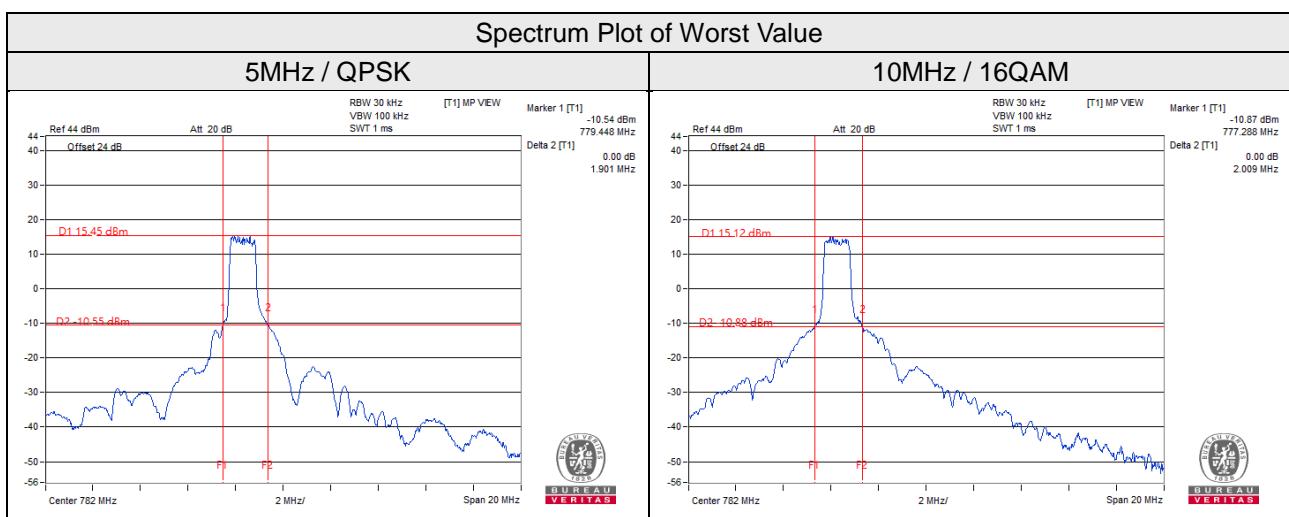

4.4.5 Test Results (Occupied Bandwidth)

LTE Band 13						
Channel Bandwidth: 5MHz				Channel Bandwidth: 10MHz		
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
		QPSK	16QAM			
23205	779.5	1.18	1.34	23230	782	1.20
23230	782	1.16	1.14			
23255	784.5	1.16	1.14			

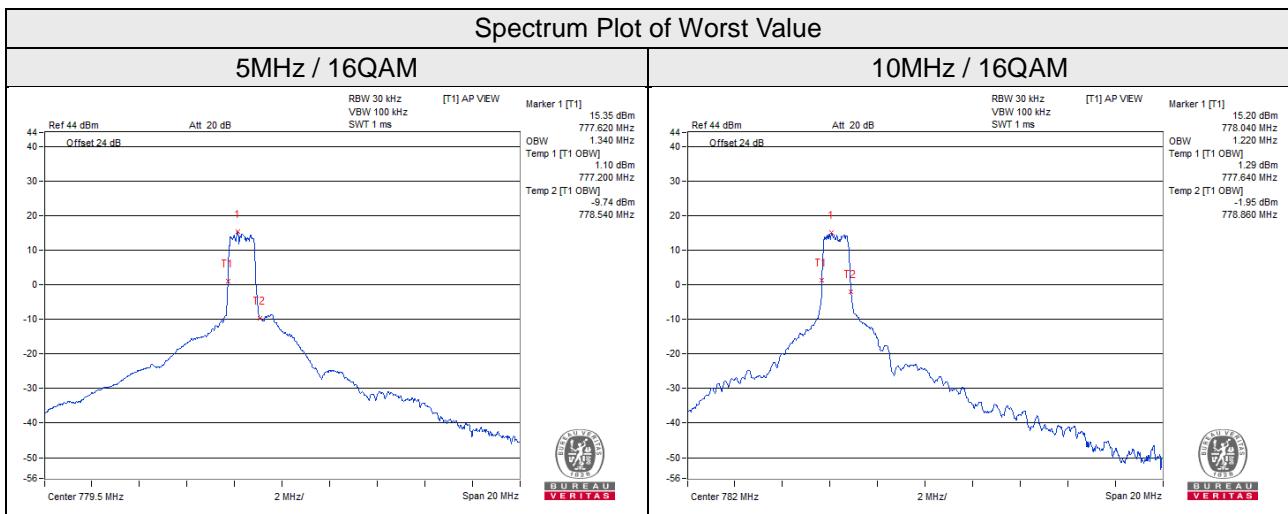

4.5 Channel Edge Measurement


4.5.1 Limits of Channel Edge Measurement

According to FCC 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to FCC 27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.5.2 Test Setup

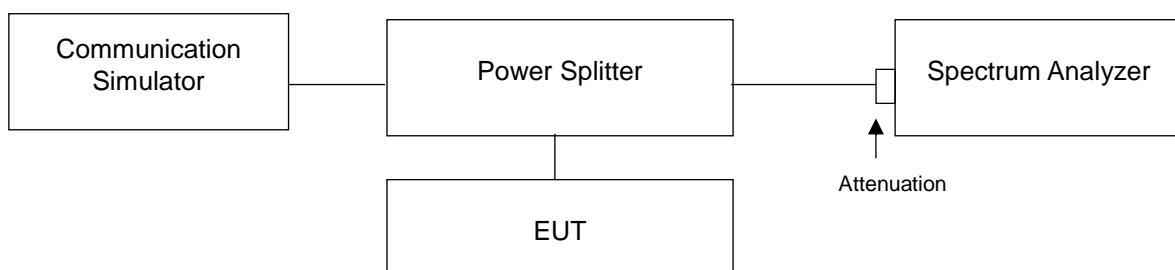


4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and s RB of the spectrum is $>1\%$ emission bandwidth and VB of the spectrum is $\geq 3^*RB$.
- c. Record the max trace plot into the test report.


4.5.4 Test Results

Channel Bandwidth: 5MHz

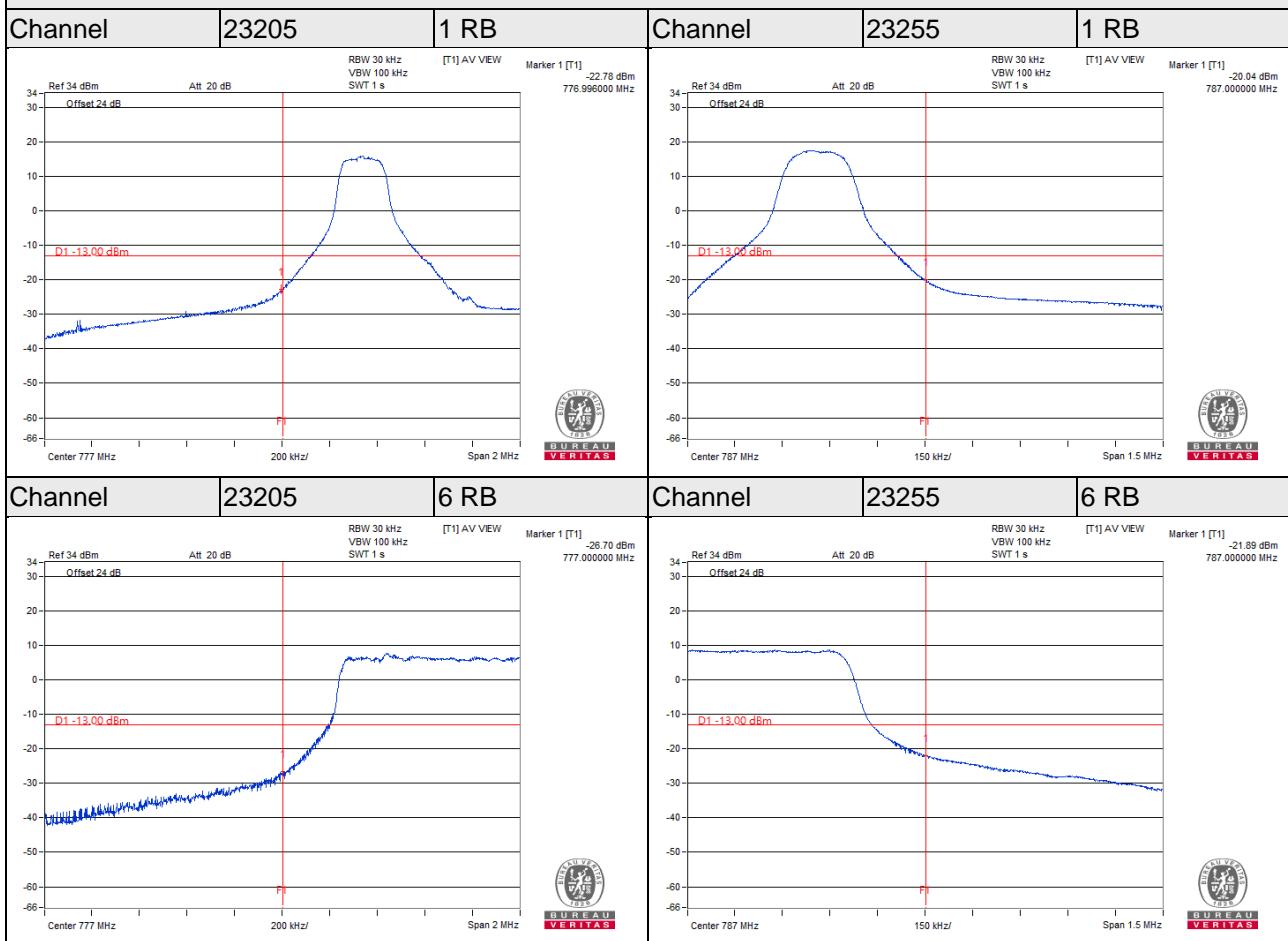



Emission Mask

Channel Bandwidth: 5MHz

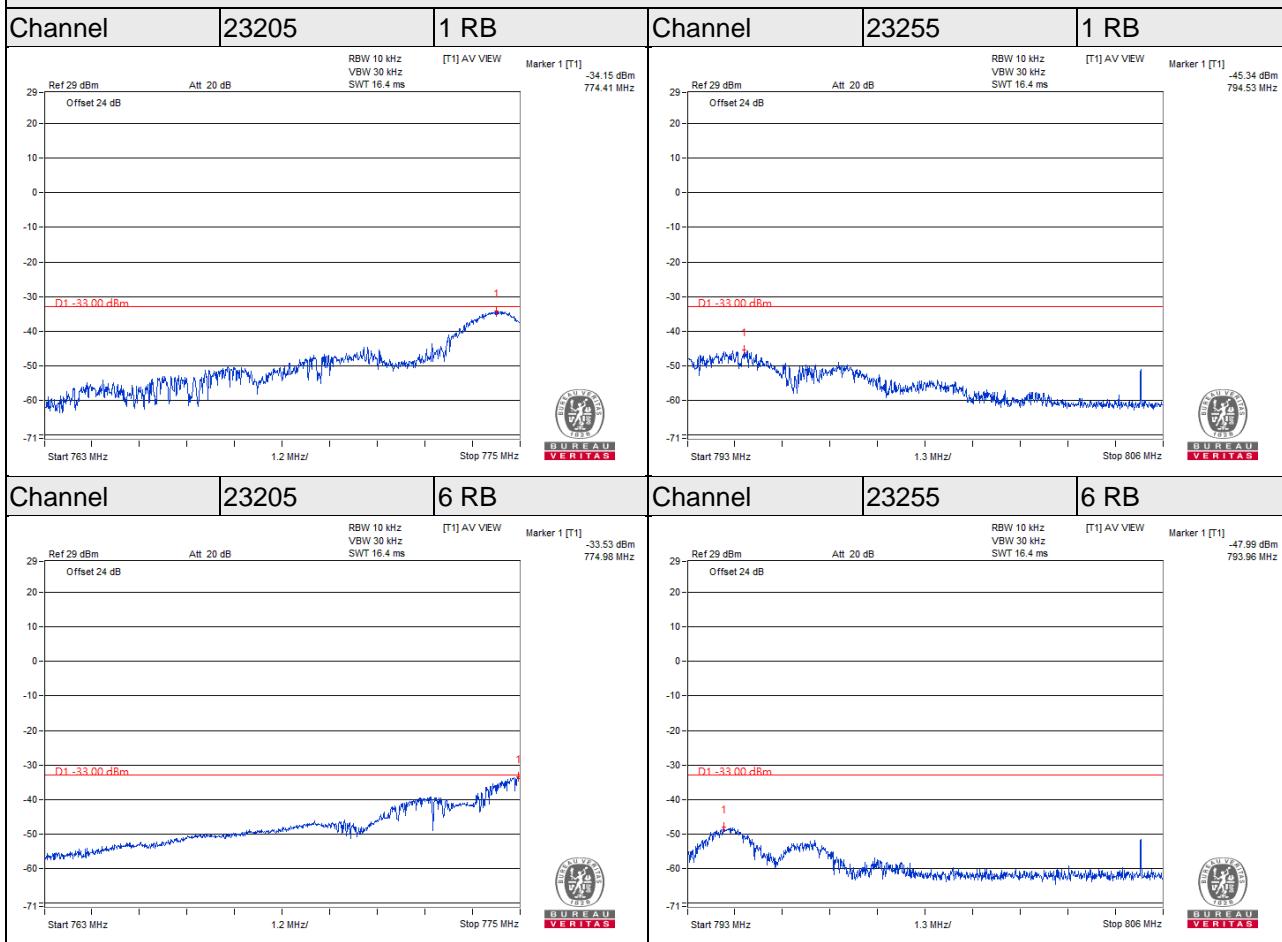

For the 763 - 775 MHz and 793 - 805 MHz band ,the FCC limit is $65+10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth .

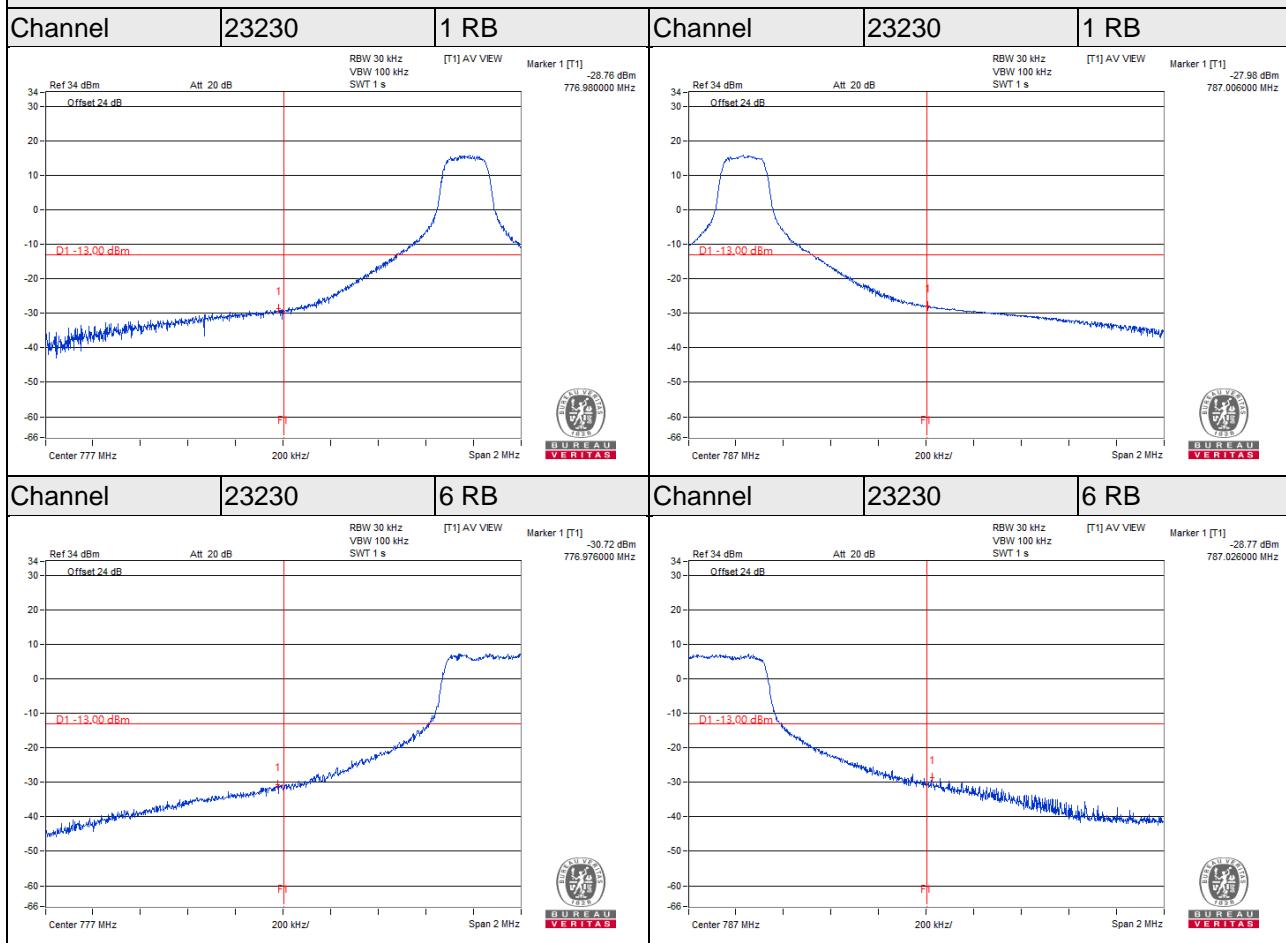Channel Bandwidth: 10MHz

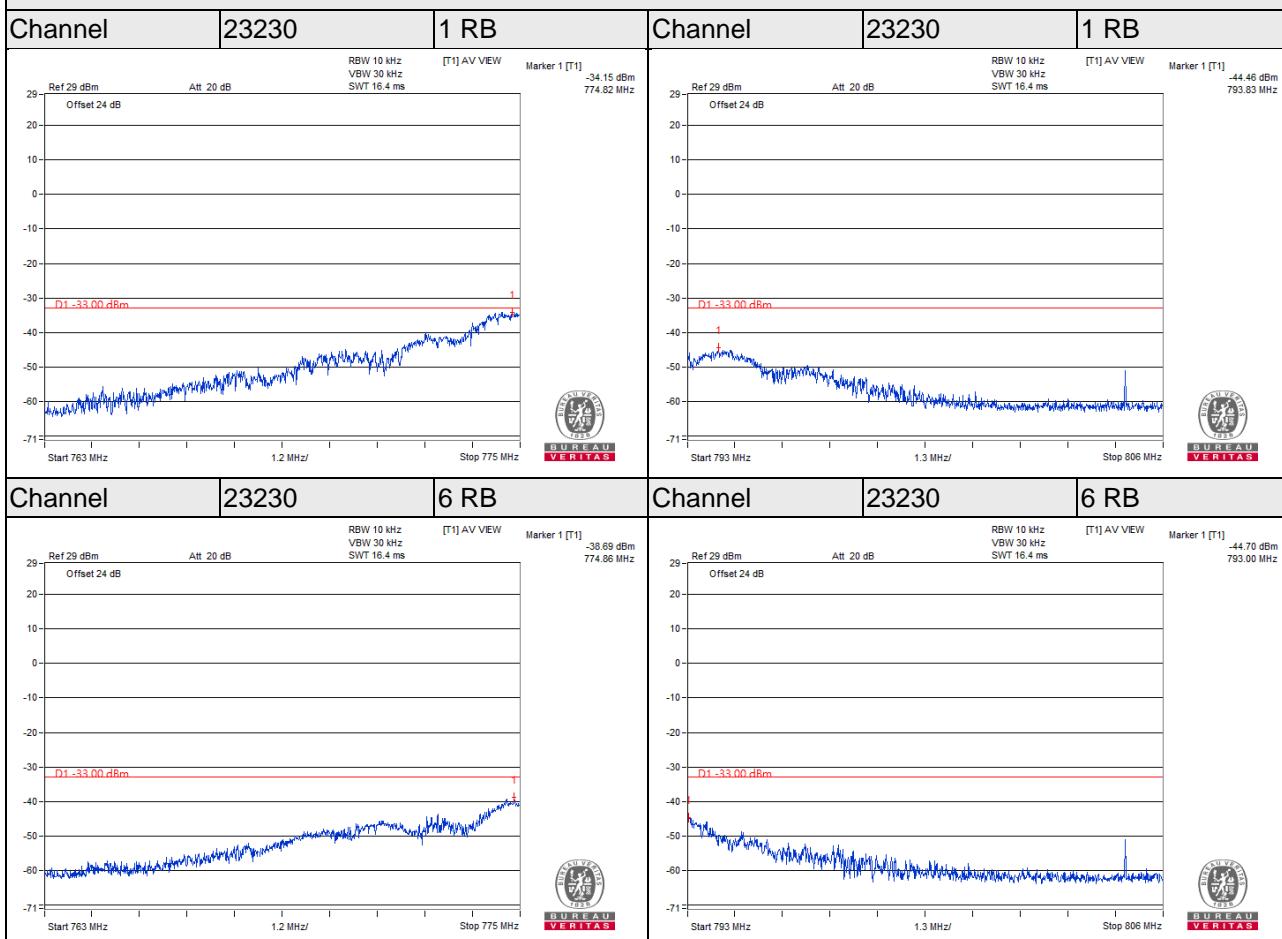
Emission Mask
Channel Bandwidth: 10MHz


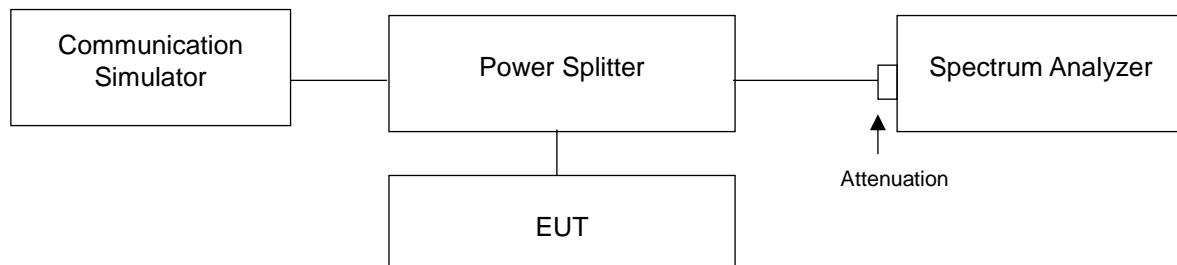
For the 763 - 775 MHz and 793 - 805 MHz band ,the FCC limit is $65+10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth .

4.6 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup




4.5.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

LTE Band 13						
Channel Bandwidth: 5MHz				Channel Bandwidth: 10MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK	16QAM			
23205	779.5	4.81	5.63	23230	782	4.60
23230	782	4.69	5.55			
23255	784.5	4.63	5.54			

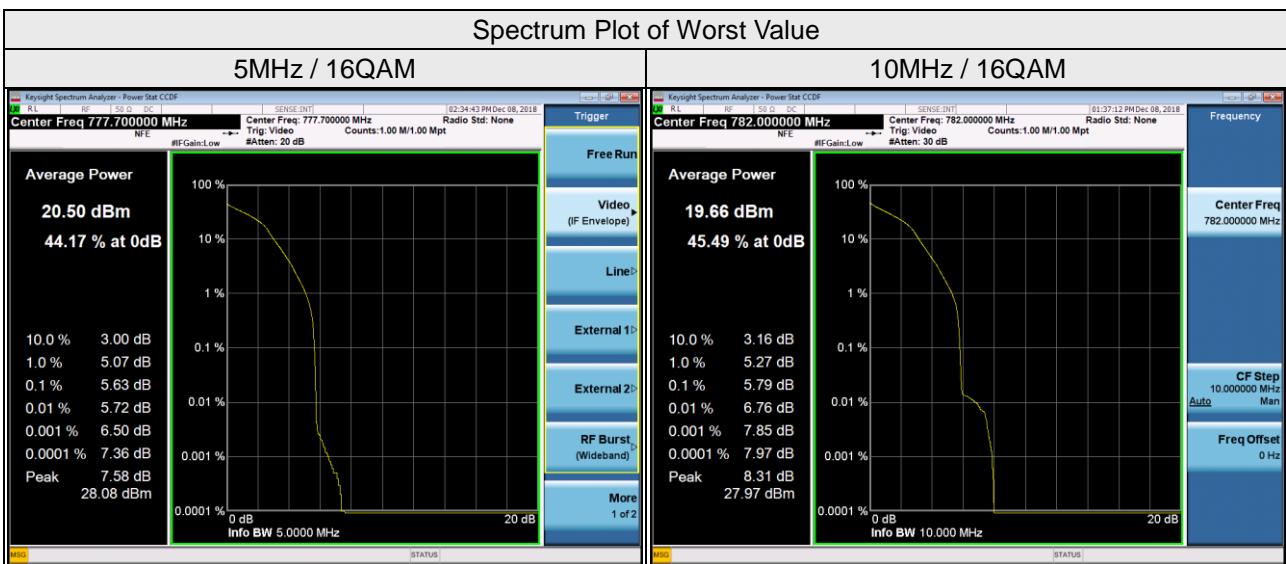

4.7 Conducted Spurious Emissions


4.7.1 Limits of Conducted Spurious Emissions Measurement

According to FCC 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to FCC 27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.7.2 Test Setup

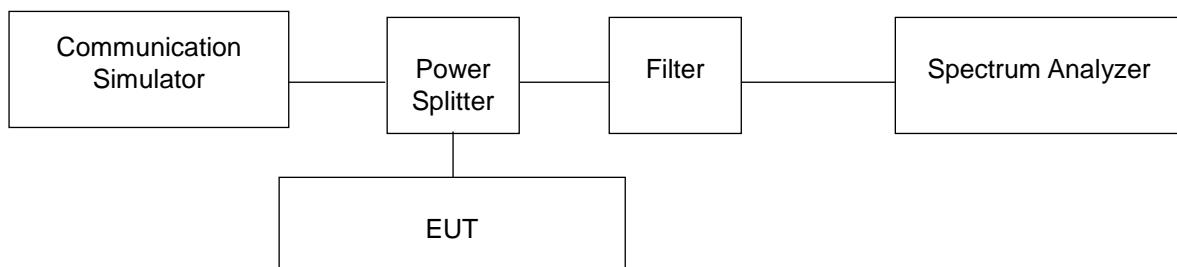


4.7.3 Test Procedure

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 9 kHz to suitable frequency, it shall be connected to the 20dB pad attenuated the carried frequency.


4.7.5 Test Results

Channel Bandwidth: 5MHz

Channel Number	23205	Channel Freq:(MHz)	779.5	Limit(dB)	PASS /FAIL
Freq. (MHz)		Measurement Valus	Margin	Maximum	
399.005		-40.90	-27.90	-13.00	PASS
1585.000		-48.02	-8.02	-40.00	PASS
3763.000		-43.07	-30.07	-13.00	PASS

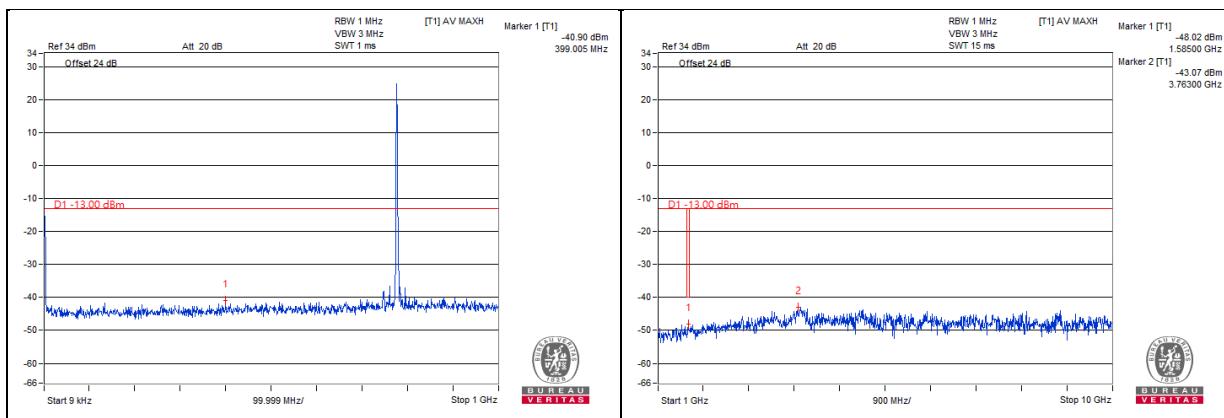


Channel Bandwidth: 5MHz					
Channel Number	23230	Channel Freq:(MHz)	782	Limit(dB)	PASS /FAIL
Freq. (MHz)		Measurement Value	Margin	Maximum	
484.004		-41.27	-28.27	-13.00	PASS
1576.000		-49.47	-9.47	-40.00	PASS
3844.000		-41.84	-28.84	-13.00	PASS

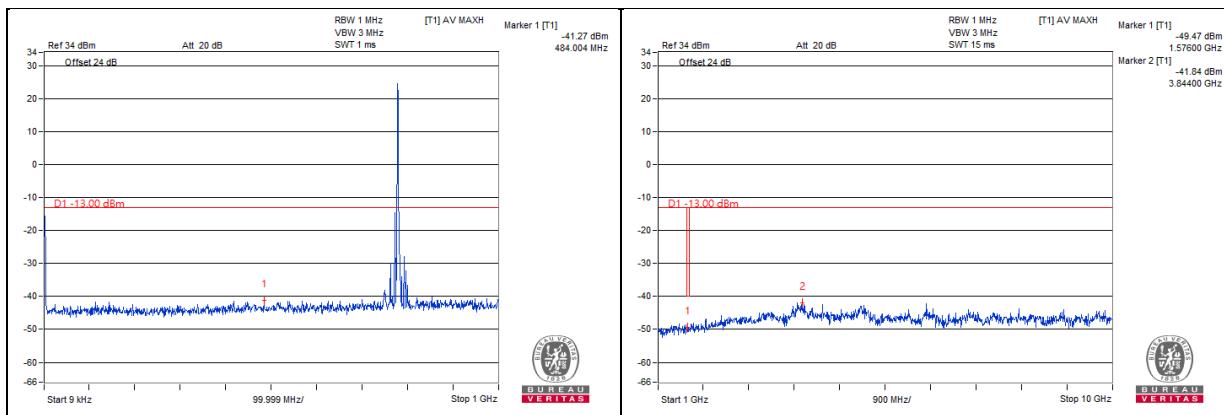


Channel Bandwidth: 5MHz

Channel Number	23255	Channel Freq:(MHz)	784.5	Limit(dB)	PASS /FAIL
Freq. (MHz)		Measurement Value	Margin	Maximum	
501.004		-41.33	-28.33	-13.00	PASS
1576.000		-49.49	-9.49	-40.00	PASS
3853.000		-42.07	-29.07	-13.00	PASS

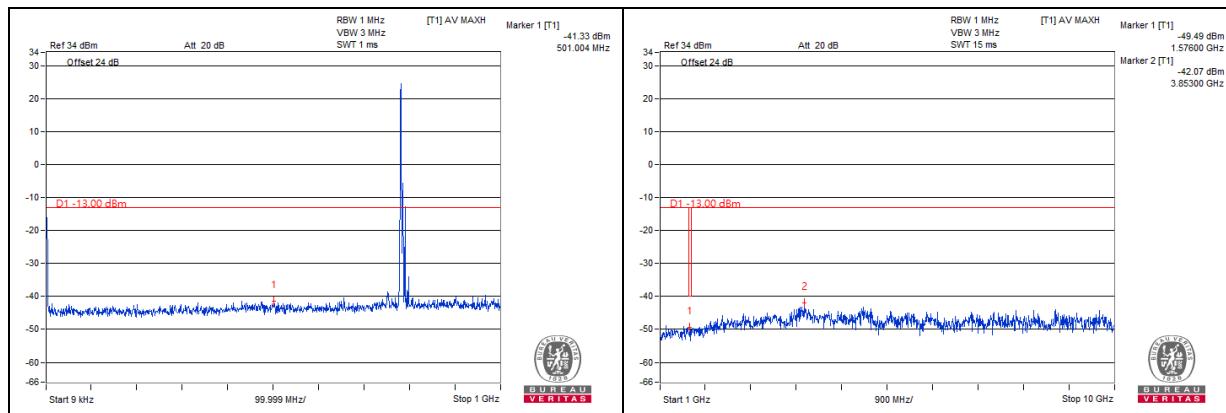

Channel Bandwidth: 10MHz					
Channel Number	23230	Channel Freq:(MHz)	782	Limit(dB)	PASS /FAIL
Freq. (MHz)		Measurement Value	Margin	Maximum	
569.003		-41.53	-28.53	-13.00	PASS
1559.000		-49.98	-9.98	-40.00	PASS
5014.000		-42.76	-29.76	-13.00	PASS

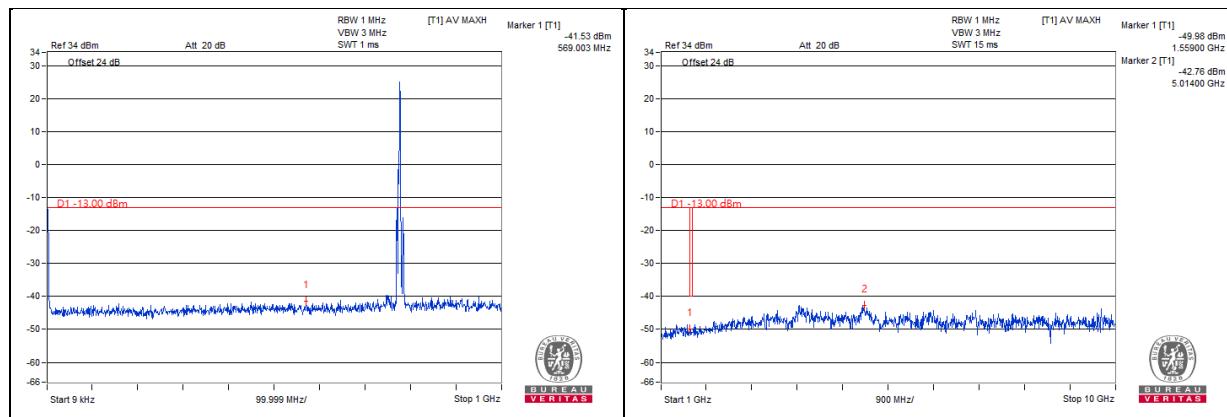

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

According to FCC 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to FCC 27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.8.2 Test Procedure

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution antenna.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz/300kHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Frequency Range below 1GHz>

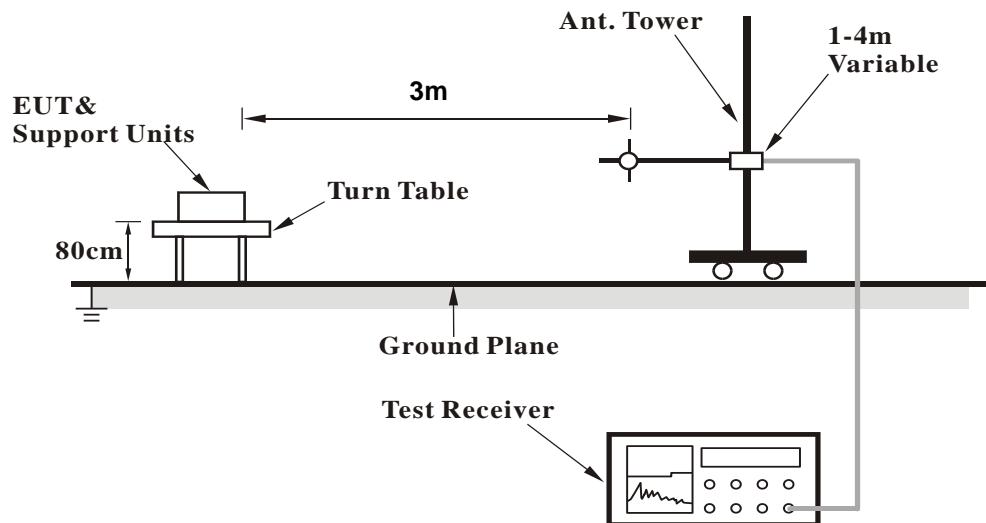

<Frequency Range above 1GHz>

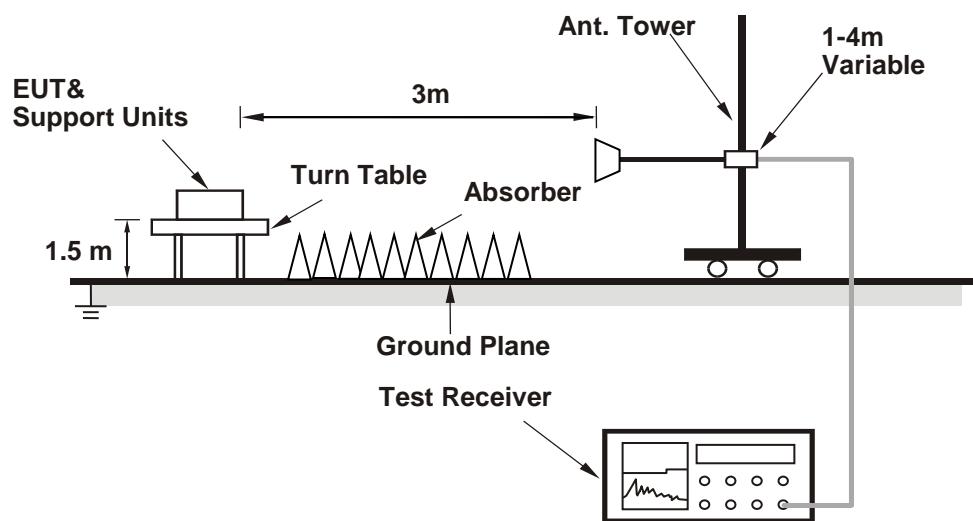

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz

Channel Bandwidth: 5MHz

Mode	TX channel 23205	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	76.32	32.85	-61.85	-1.98	-63.82	-13	-50.82
2	128.25	32.85	-62.89	5.29	-57.60	-13	-44.60
3	278.16	33.23	-61.89	3.86	-58.04	-13	-45.04
4	345.5	30.20	-67.44	3.61	-63.83	-13	-50.83
5	520.82	33.20	-61.20	2.92	-58.27	-13	-45.27
6	736.85	27.63	-68.73	1.03	-67.70	-13	-54.70

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.8	30.29	-55.82	-5.65	-61.47	-13	-48.47
2	93.39	32.85	-58.90	-0.99	-59.88	-13	-46.88
3	130.74	33.65	-58.39	-1.25	-59.64	-13	-46.64
4	238.52	29.55	-65.81	3.82	-61.98	-13	-48.98
5	508.65	34.19	-61.22	2.82	-58.40	-13	-45.40
6	609.46	37.53	-57.15	1.78	-55.37	-13	-42.37

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23230	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	76.54	31.82	-62.75	-1.93	-64.68	-13	-51.68
2	127.81	32.20	-63.54	5.30	-58.24	-13	-45.24
3	278.25	32.90	-62.21	3.86	-58.35	-13	-45.35
4	345.4	29.55	-68.10	3.61	-64.49	-13	-51.49
5	520.19	32.05	-62.34	2.92	-59.41	-13	-46.41
6	737	27.33	-69.04	1.02	-68.01	-13	-55.01

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.99	29.86	-55.32	-6.10	-61.42	-13	-48.42
2	93.97	32.13	-59.61	-0.98	-60.59	-13	-47.59
3	131.06	32.64	-59.16	-1.25	-60.41	-13	-47.41
4	238.09	28.21	-67.15	3.83	-63.32	-13	-50.32
5	509.26	32.85	-62.56	2.82	-59.74	-13	-46.74
6	610.45	37.00	-57.69	1.78	-55.91	-13	-42.91

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23255	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	75.65	32.75	-62.17	-2.05	-64.22	-13	-51.22
2	128.98	31.38	-64.36	5.28	-59.08	-13	-46.08
3	279.11	32.49	-62.66	3.85	-58.81	-13	-45.81
4	346	28.87	-68.81	3.61	-65.21	-13	-52.21
5	520.01	32.47	-61.93	2.92	-59.00	-13	-46.00
6	736.43	27.62	-68.75	1.02	-67.73	-13	-54.73

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	67.49	29.58	-56.70	-5.57	-62.27	-13	-49.27
2	92.89	32.77	-59.06	-1.02	-60.08	-13	-47.08
3	130.97	32.78	-59.02	-1.25	-60.27	-13	-47.27
4	237.55	28.30	-67.06	3.85	-63.22	-13	-50.22
5	508.53	33.42	-62.00	2.83	-59.17	-13	-46.17
6	609.64	37.32	-57.37	1.78	-55.59	-13	-42.59

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23230	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	76.78	32.54	-62.06	-1.94	-64.00	-13	-51.00
2	127.58	32.63	-63.11	5.30	-57.81	-13	-44.81
3	278.9	32.86	-62.29	3.85	-58.44	-13	-45.44
4	346.31	30.00	-67.74	3.60	-64.14	-13	-51.14
5	520.07	32.56	-61.84	2.92	-58.92	-13	-45.92
6	735.88	27.45	-68.91	1.04	-67.87	-13	-54.87
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.55	29.19	-57.34	-5.44	-62.79	-13	-49.79
2	93.11	32.10	-59.70	-1.00	-60.71	-13	-47.71
3	130.77	32.95	-58.40	-1.23	-59.64	-13	-46.64
4	237.87	28.62	-66.74	3.82	-62.92	-13	-49.92
5	508.63	33.82	-61.57	2.81	-58.76	-13	-45.76
6	609.09	36.79	-57.90	1.78	-56.12	-13	-43.12

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz

Channel Bandwidth: 5MHz

Mode	TX channel 23205	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2338.5	34.30	-64.97	6.73	-58.24	-13	-45.24
2	3118	35.11	-67.62	7.30	-60.32	-13	-47.32
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2338.5	34.11	-65.16	6.73	-58.43	-13	-45.43
2	3118	36.89	-65.84	7.30	-58.54	-13	-45.54

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

The EIRP in Frequency Range 1559 - 1610 MHz

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1559	42.82	-60.38	6.10	-54.27	-40	-14.27
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1559	39.7	-63.50	6.10	-57.39	-40	-17.39

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23230	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2346	35.05	-64.18	6.73	-57.45	-13	-44.45
2	3128	35.22	-67.53	7.32	-60.21	-13	-47.21
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2346	33.17	-66.06	6.73	-59.33	-13	-46.33
2	3128	37.48	-65.27	7.32	-57.95	-13	-44.95

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

The EIRP in Frequency Range 1559 - 1610 MHz

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1564	42.99	-60.18	6.11	-54.07	-40	-14.07
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1564	38.89	-64.28	6.11	-58.17	-40	-18.17

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23255	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2353.5	33.83	-65.36	6.72	-58.64	-13	-45.64
2	3138	34.13	-68.63	7.33	-61.30	-13	-48.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2353.5	34.23	-64.96	6.72	-58.24	-13	-45.24
2	3138	36.22	-66.54	7.33	-59.21	-13	-46.21

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

[The EIRP in Frequency Range 1559 - 1610 MHz](#)

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1569	43.21	-59.94	6.12	-53.82	-40	-13.82
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1569	39.7	-63.45	6.12	-57.33	-40	-17.33

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23230	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2346	33.87	-65.36	6.73	-58.63	-13	-45.63
2	3128	34.81	-67.94	7.32	-60.62	-13	-47.62
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	2346	35.09	-64.14	6.73	-57.41	-13	-44.41
2	3128	37.48	-65.27	7.32	-57.95	-13	-44.95

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

The EIRP in Frequency Range 1559 - 1610 MHz

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1564	43.71	-59.46	6.11	-53.35	-40	-13.35
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm/MHz)	Margin (dB)
1	1564	40.45	-62.72	6.11	-56.61	-40	-16.61

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---