

CFR 47 FCC PART 15 SUBPART E

TEST REPORT

For

MAYA-W2 host-based multiradio modules

MODEL NUMBER: MAYA-W271-00B

REPORT NUMBER: 4791682450-1-RF-4

ISSUE DATE: May 18, 2025

FCC ID: XPYMAW2A

Prepared for

u-blox AG

Zuercherstrasse 68, Thalwil, Ch-8800 Switzerland

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	May 18, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Duty Cycle	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB and 26dB Emission Bandwidth and 99% Occupied Bandwidth	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e),	Pass
Conducted Output Power	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a)	Pass
Power Spectral Density	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207	Pass
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
FREQUENCY STABILITY		FCC 15.407 (g)	Pass
Dynamic Frequency Selection (Slave)	KDB 905462 D03 Client Without DFS New Rules v01r02	FCC Part 15.407 (h),	Pass
Dynamic Frequency Selection (Master)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	FCC Part 15.407 (h),	N/A
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2),	Pass

Note:

1. N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E > when <Simple Acceptance> decision rule is applied.

Note: This report is based on report No.: G0M-2302-1881-TFC407WF-W271-V03 which is issued by Eurofins Product Service GmbH on Jan. 11, 2024 and report No.: USRC239070001 which is issued by Eurofins E&E Wireless Taiwan Co., Ltd. and November 27, 2023. The module has been certified for FCC ID, the antenna type and gain changed. The RF technical construction including circuit diagram, PCB Layout, components, component layout and performance does not change. The output power is verified close to the original report and the power value of the channel whose power setting is adjusted is listed in section 7.1, all radiated test item performed and reported in this report.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. CHANNEL LIST	9
5.3. MAXIMUM POWER	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	12
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	15
5.7. SUPPORT UNITS FOR SYSTEM TEST	16
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	17
7. ANTENNA PORT TEST RESULTS	18
7.1. CONDUCTED OUTPUT POWER	18
8. RADIATED TEST RESULTS.....	20
8.1. RESTRICTED BANDEDGE	29
8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)	112
8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)	138
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	280
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	283
8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)	285
8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	287
9. ANTENNA REQUIREMENT	289

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: u-blox AG
Address: Zuercherstrasse 68, Thalwil, Ch-8800 Switzerland

Manufacturer Information


Company Name: u-blox AG
Address: Zuercherstrasse 68, Thalwil, Ch-8800 Switzerland

EUT Information

EUT Name: MAYA-W2 host-based multiradio modules
Model: MAYA-W271-00B
Series Model: \
Brand: \
Sample Received Date: February 21, 2025
Sample Status: Normal
Sample ID: 8456961
Date of Tested: February 24, 2025 to May 18, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	Pass

Prepared By:



James Qin
Project Engineer

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E , ANSI C63.10-2013, CFR 47 FCC Part 2, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
----------------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	MAYA-W2 host-based multiradio modules
Model	MAYA-W271-00B
Series Model	\
Model Difference	\

Frequency Range:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5720 MHz 5745 MHz to 5825 MHz
TPC Function:	Not Support
DFS Operational mode:	Slave without radar detection
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM(1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Radio Technology	IEEE 802.11a20 IEEE 802.11n HT20/HT40 IEEE 802.11ac VHT20/VHT40/VHT80 IEEE 802.11ax HE20/HE40/HE80
Rated Input	DC 5 V, 1 A

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A (For Bandwidth=20MHz)		UNII-2A (For Bandwidth=40MHz)		UNII-2A (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C (For Bandwidth=20MHz)		UNII-2C (For Bandwidth=40MHz)		UNII-2C (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	*5610
108	5540	118	*5590	/	/
112	5560	126	*5630		
116	5580	134	5670		
120	*5600	/	/		
124	*5620				
128	*5640				
132	5660				
136	5680				
140	5700				
/	/				

* Note: Not operational in Canada.

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

Straddle Test Channel Configuration		
Bandwidth	Test Channel Number	Frequency
BW= 20 MHz	CH 144	5720 MHz
BW= 40 MHz	CH 142	5710 MHz
BW= 80 MHz	CH 138	5690 MHz

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5180 ~ 5825	19.5
n HT20		19.4
n HT40		18.8
ac VHT80		15.6
ax HE20		18.92
ax HE40		18.5
ax HE80		14.33

5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz
802.11ax HE20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11ax HE40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ax HE80	CH 42(Low Channel)	5210 MHz

UNII-2A Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT80	CH 58(Low Channel)	5290 MHz
802.11ax HE20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11ax HE40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ax HE80	CH 58(Low Channel)	5290 MHz

UNII-2C Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ac VHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz
802.11ax HE20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11ax HE40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ax HE80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz
802.11ax HE20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11ax HE40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ax HE80	CH 155(Low Channel)	5775 MHz

Straddle Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 144	5720 MHz
802.11n HT20	CH 144	5720 MHz
802.11n HT40	CH 142	5710 MHz
802.11ac VHT80	CH 138	5690 MHz
802.11ax HE20	CH 144	5720 MHz
802.11ax HE40	CH 142	5710 MHz
802.11ax HE80	CH 138	5690 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter		
Test Software	CMD	

a	5180	17
	5200	18
	5220	19
	5240	19
	5260	19
	5280	19
	5300	18
	5320	16
	5500	16
	5520	18
	5540	18
	5560	18
	5580	18
	5600	14
	5620	14
	5640	14
	5660	14
	5680	14
	5700	12
	5720	17
	5745	19
	5785	19
	5825	19

n20	5180	16
	5200	17
	5220	17
	5240	19
	5260	19
	5280	19
	5300	18
	5320	16
	5500	14
	5520	16
	5540	16
	5560	16
	5580	16
	5600	14
	5620	14
	5640	14

	5660	14
	5680	14
	5700	12
	5720	17
	5745	19
	5785	19
	5825	19

n40	5190	14
	5230	18
	5270	19
	5310	11
	5510	12
	5550	17
	5590	15
	5630	12
	5670	12
	5710	16
	5755	18
	5795	19

ac80	5210	13
	5290	11
	5530	11
	5610	16
	5690	15
	5775	14

ax20	5180	15
	5200	18
	5220	18
	5240	19
	5260	19
	5280	15
	5300	15
	5320	13
	5500	12
	5520	15
	5540	15
	5560	15
	5580	15
	5600	15
	5620	15
	5640	15
	5660	15

	5680	15
	5700	11
	5720	17
	5745	19
	5785	19
	5825	19

ax40	5190	13
	5230	18
	5270	19
	5310	11
	5510	11
	5550	16
	5590	15
	5630	15
	5670	12
	5710	16
	5755	18
	5795	19

ax80	5210	13
	5290	12
	5530	11
	5610	15
	5690	15
	5775	15

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)
J20	5150-5850	FPC	4.28

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11n HT20	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11n HT40	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ax HE20	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ax HE40	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.
802.11ax HE80	☒1TX, 1RX	ANT J20 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Adapter	/	FH12W-1201000C	Input: 100-240V ~50/60Hz, 0.6 A Output Voltage: 5Vdc, 1A
2	UART Serial Port	/	/	/

I/O CABLES

able No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	/	/	/	/	/


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP

The EUT can work in an engineer mode by running with CMD command.

SETUP DIAGRAM FOR TESTS

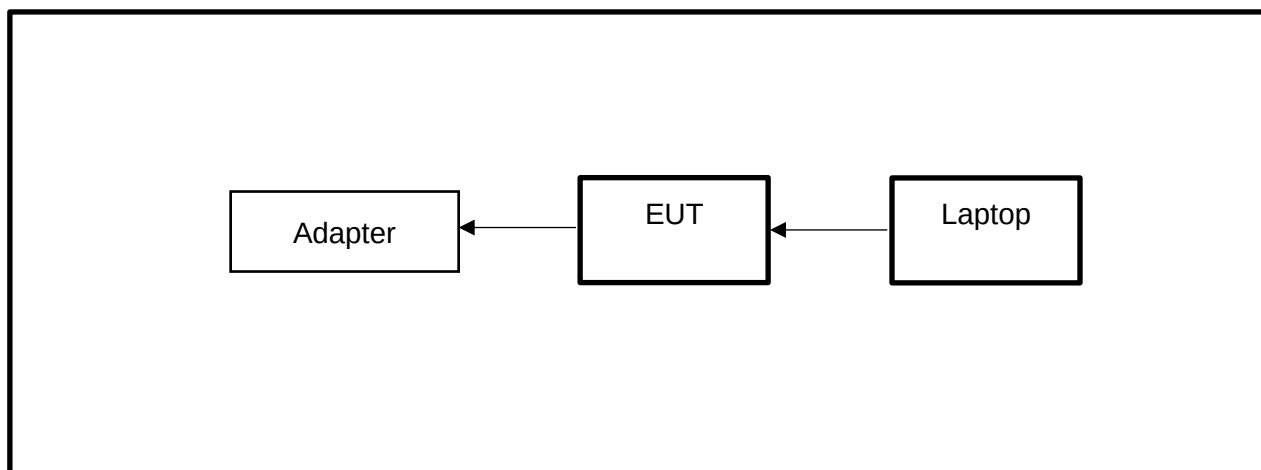

6. MEASURING EQUIPMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm) ☐ Indoor Access Point: 1 W (30 dBm) ☐ Fixed Point-To-Point Access Points: 1 W (30 dBm) ☒ Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.


(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25 %).

Note: Method SA-2 was used for straddle channel output power test, and Method PM was used for testing rest channels

TEST SETUP



TEST ENVIRONMENT

Temperature	22.1℃	Relative Humidity	47.4%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87 V

TEST DATE / ENGINEER

Test Date	May 18, 2025	Test By	Johnson Liu
-----------	--------------	---------	-------------

TEST RESULTS

All power setting is levered from original report, conducted power measurement is performed only for the channel which power setting is adjusted by radiated emission test.

Mode	Frequencny (MHz)	Avg. output power (dBm)
802.11a	5180	17.43
	5320	16.01
	5500	15.32
	5700	10.45
802.11n HT20	5180	16.9
	5320	16.06
	5500	13.59
	5700	10.51
802.11n HT40	5230	18.21
	5310	12.17
	5510	11.58
	5670	10.95
802.11ac VHT80	5290	10.05
	5610	15.6
	5775	16.1
802.11ax HE20	5180	15.29
	5320	14.54
	5500	13
	5700	12.06
802.11ax HE40	5230	18.42
	5310	11.22
	5510	10.93
	5670	10.4
802.11ax HE80	5610	14.32

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISSED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

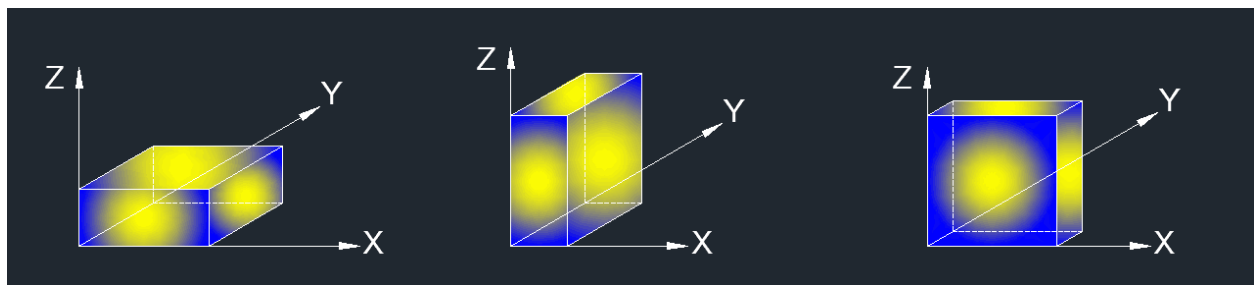

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

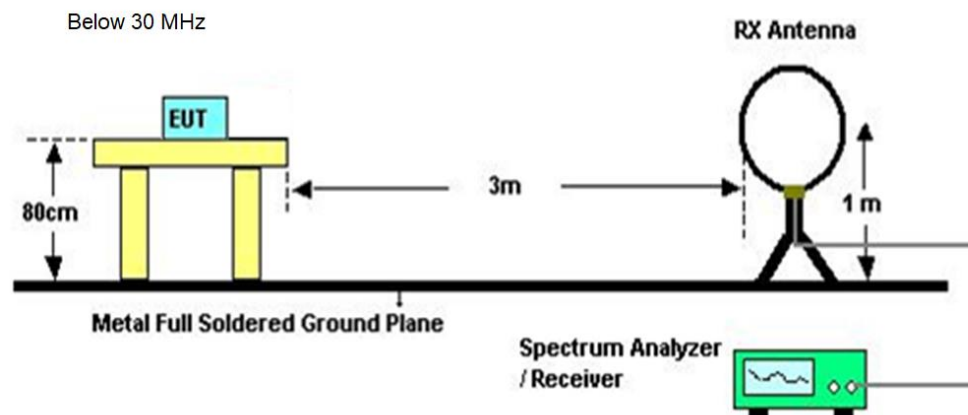

Below 1 GHz and above 30 MHz

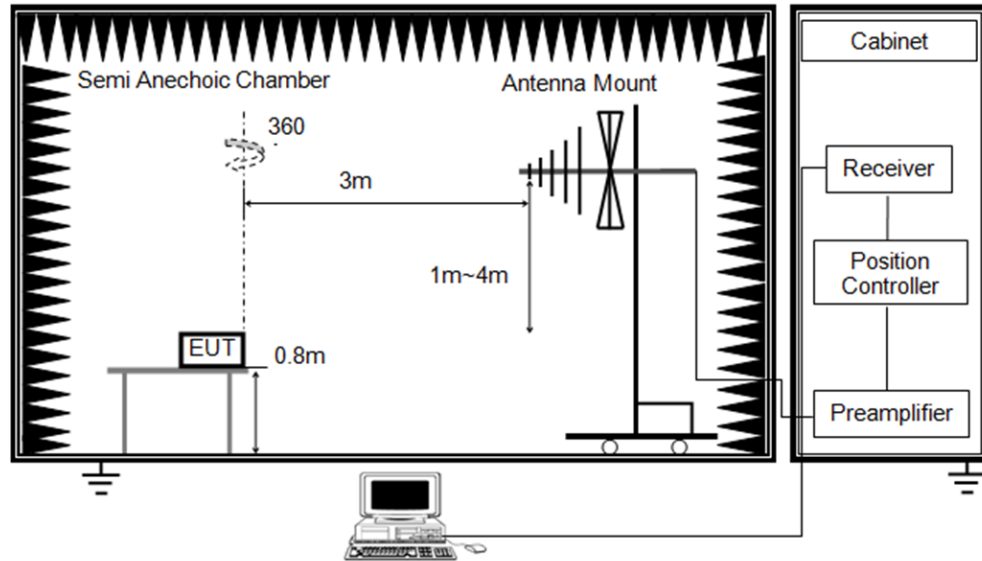

Above 1 GHz

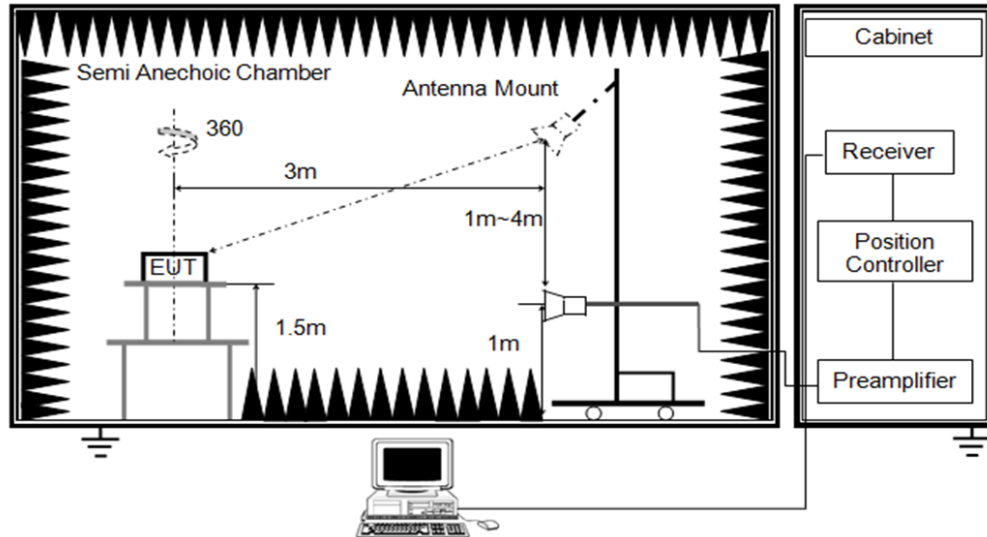

TEST ENVIRONMENT

Temperature	24.9°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	December 5, 2023	Test By	Rex Huang
-----------	------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11a 20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

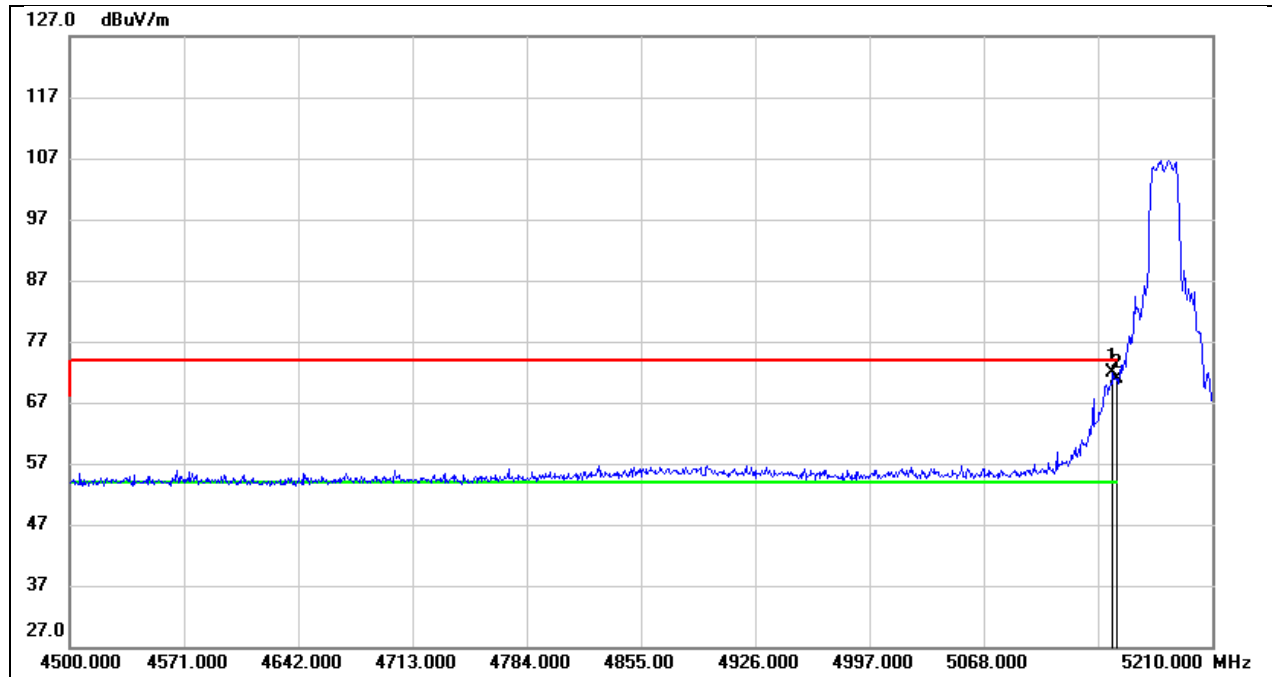


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.230	33.12	38.84	71.96	74.00	-2.04	peak
2	5150.000	32.08	38.84	70.92	74.00	-3.08	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

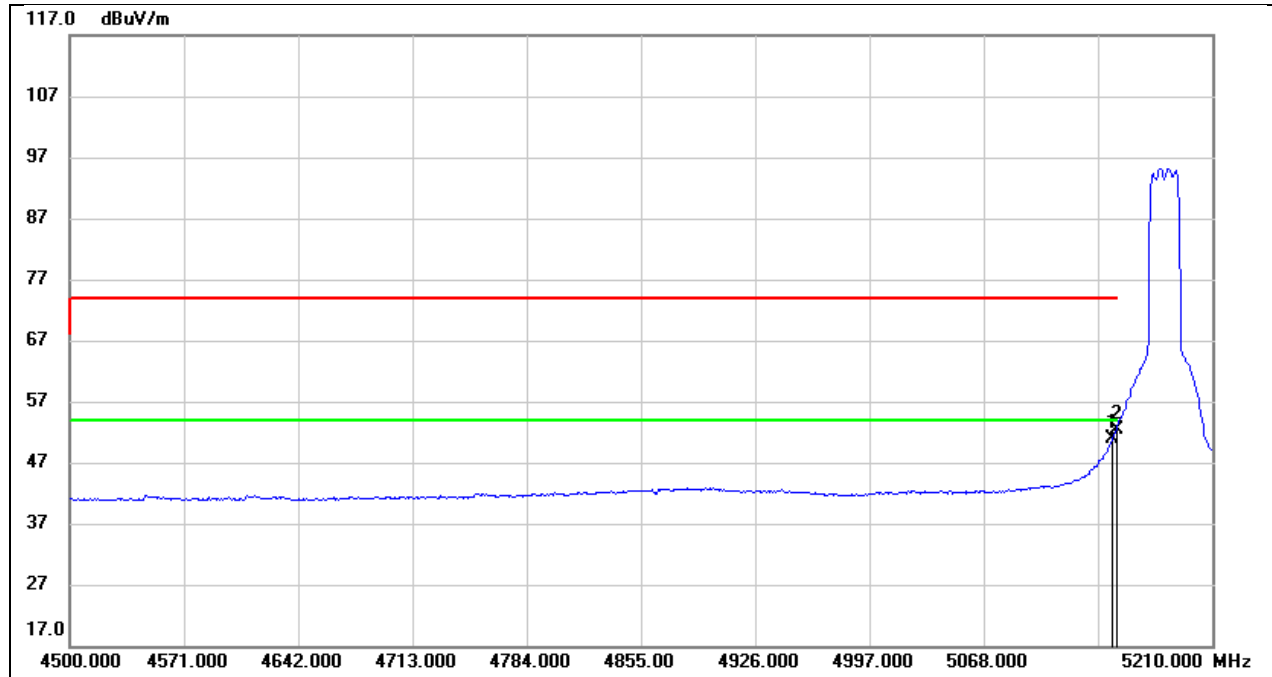


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.230	12.10	38.84	50.94	54.00	-3.06	AVG
2	5150.000	13.63	38.84	52.47	54.00	-1.53	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

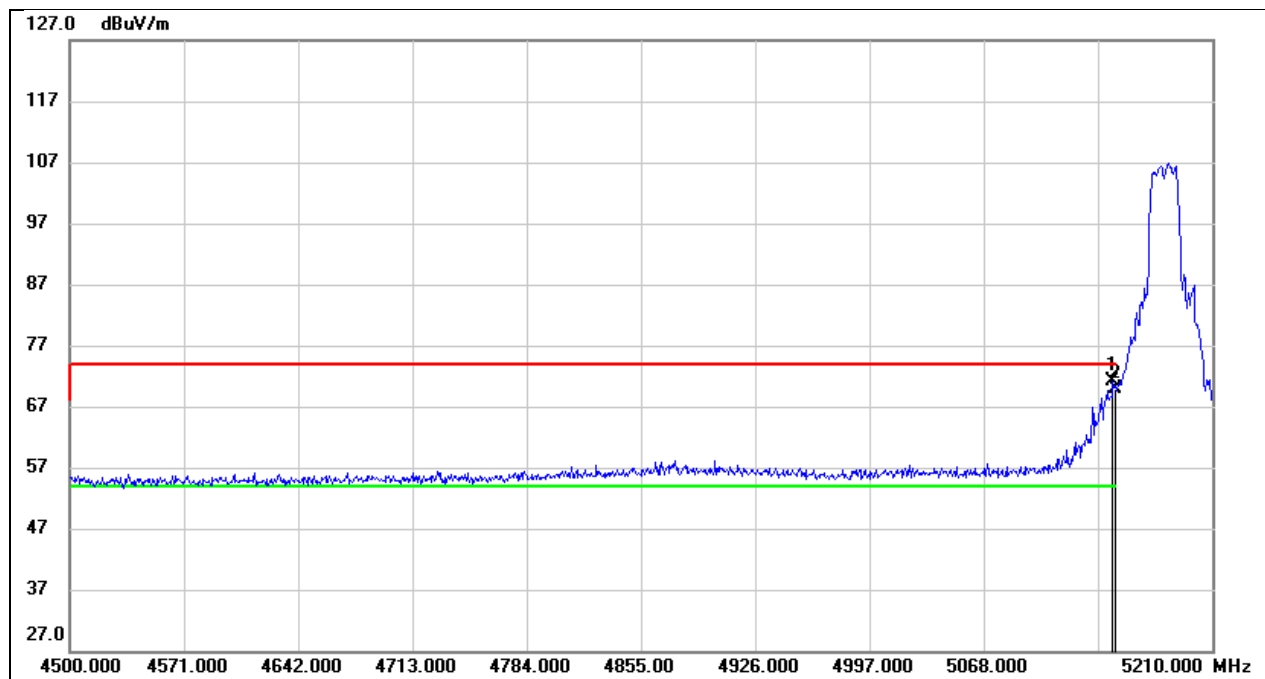


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.230	31.04	40.04	71.08	74.00	-2.92	peak
2	5150.000	29.90	40.04	69.94	74.00	-4.06	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

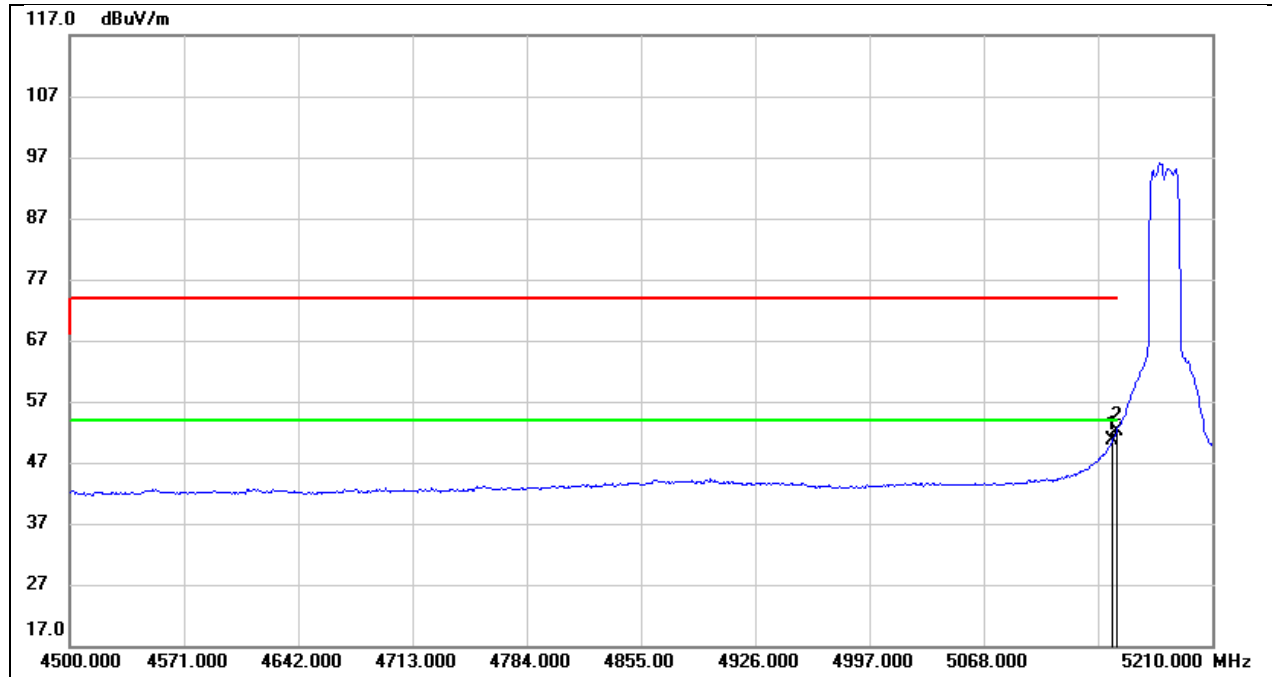


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.230	10.52	40.04	50.56	54.00	-3.44	AVG
2	5150.000	11.97	40.04	52.01	54.00	-1.99	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

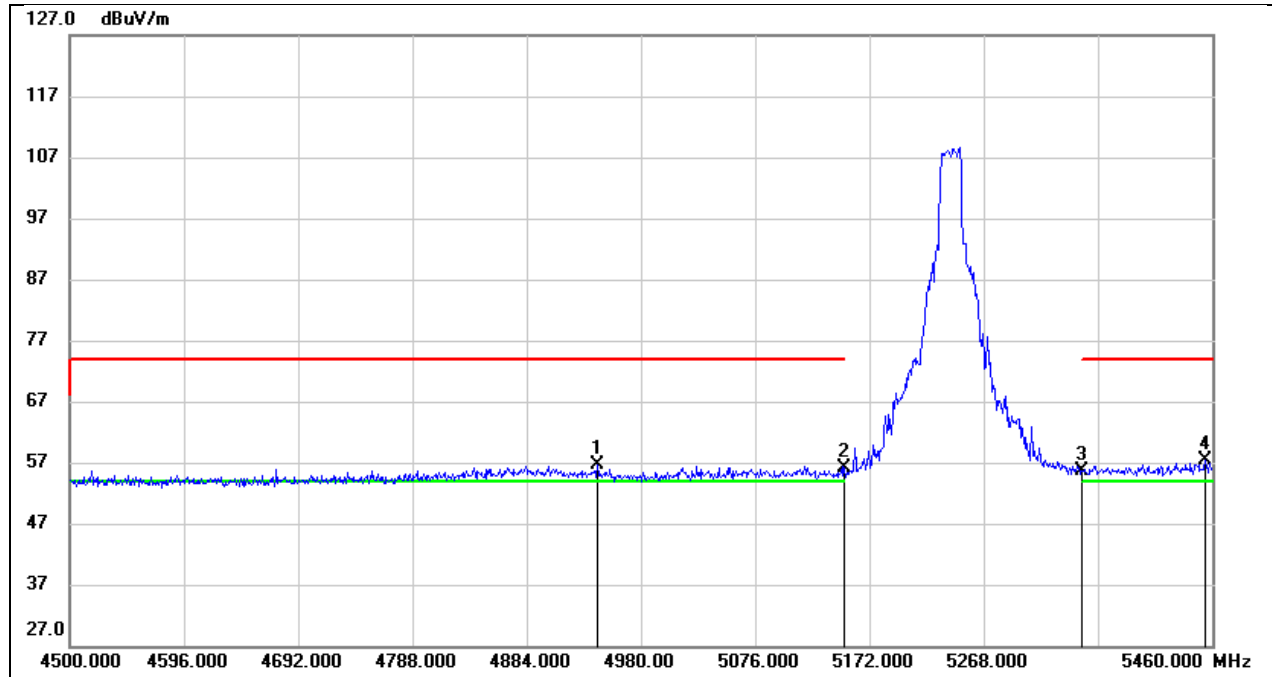


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4943.520	18.02	38.49	56.51	74.00	-17.49	peak
2	5150.000	17.17	38.84	56.01	74.00	-17.99	peak
3	5350.000	16.28	39.29	55.57	74.00	-18.43	peak
4	5454.240	17.77	39.55	57.32	74.00	-16.68	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

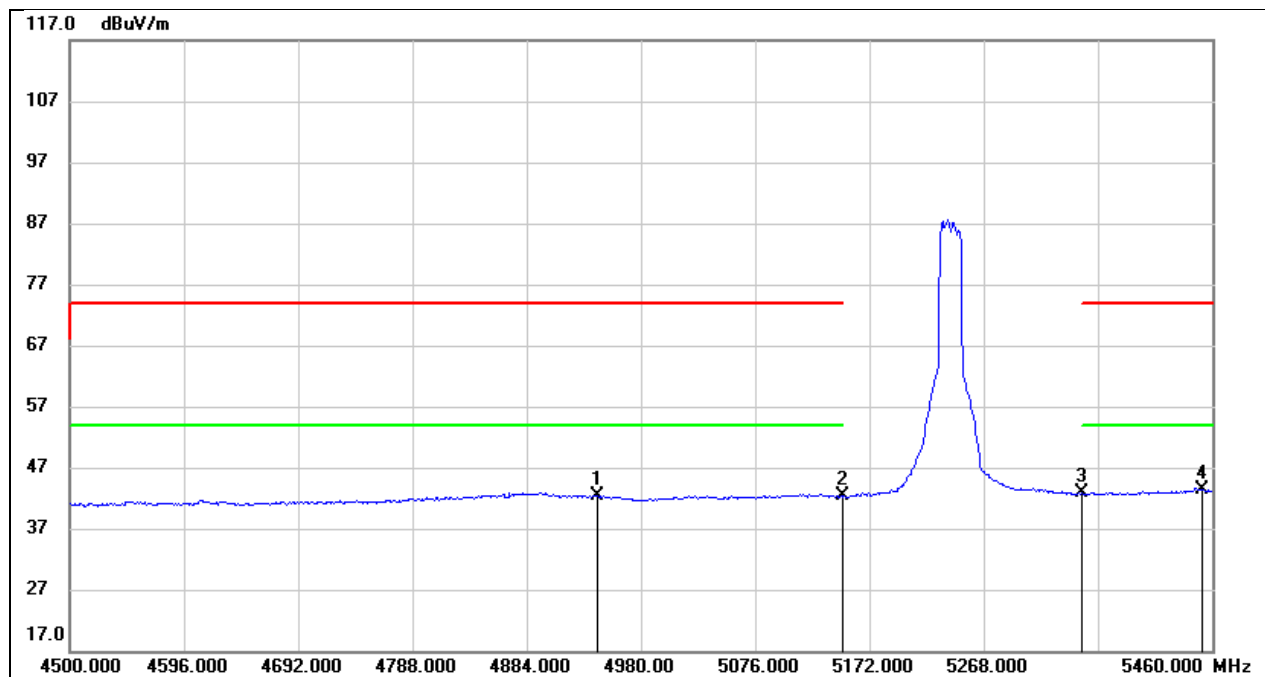


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4943.520	3.90	38.49	42.39	54.00	-11.61	AVG
2	5150.000	3.49	38.84	42.33	54.00	-11.67	AVG
3	5350.000	3.51	39.29	42.80	54.00	-11.20	AVG
4	5452.240	3.74	39.54	43.28	54.00	-10.72	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

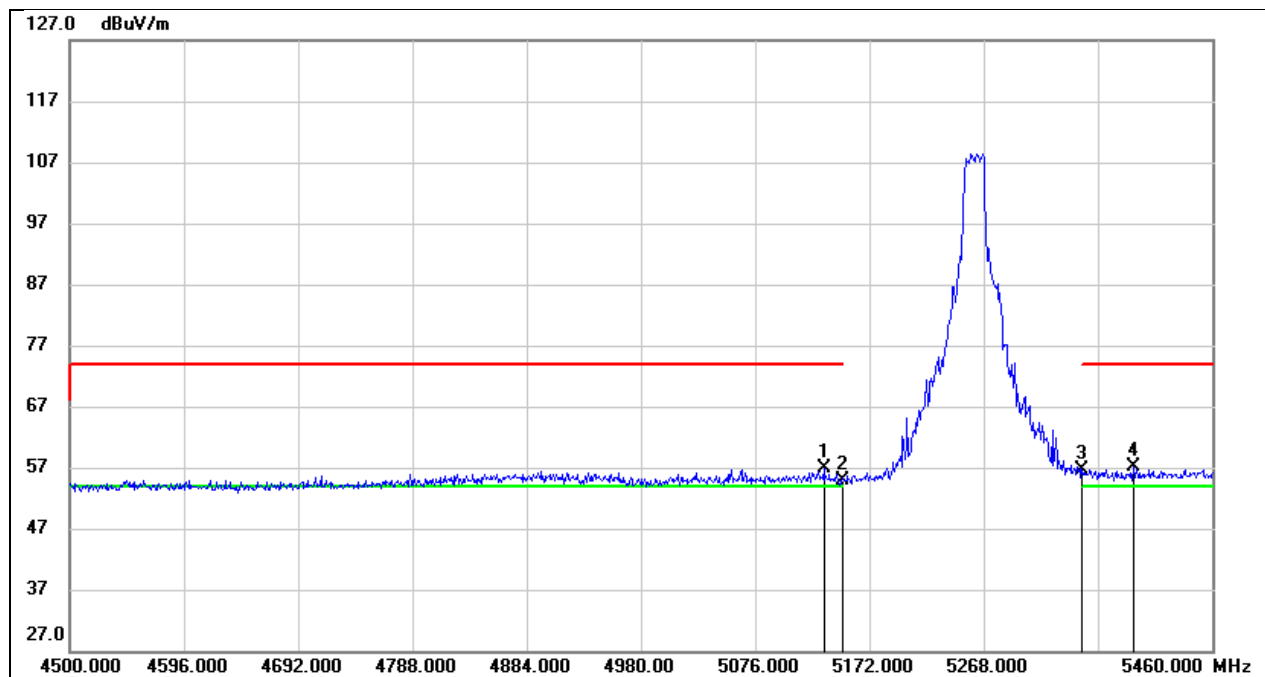


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	17.95	38.81	56.76	74.00	-17.24	peak
2	5150.000	15.95	38.84	54.79	74.00	-19.21	peak
3	5350.000	17.40	39.29	56.69	74.00	-17.31	peak
4	5393.760	17.65	39.40	57.05	74.00	-16.95	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

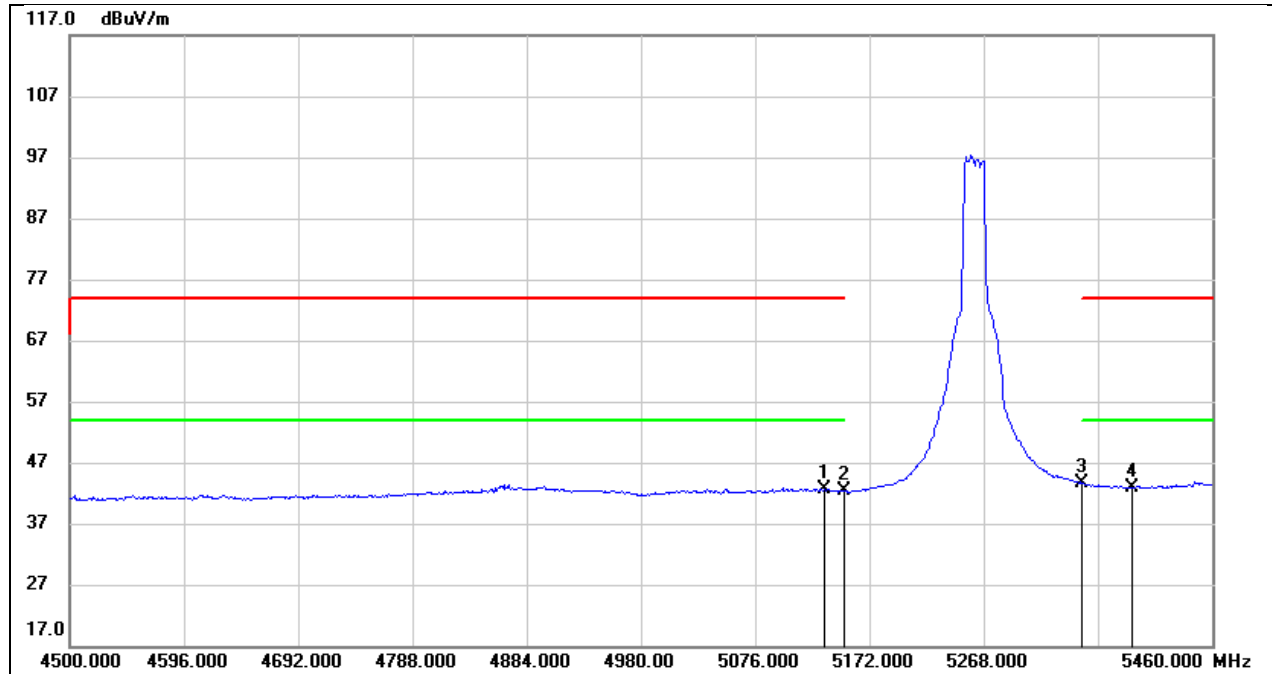


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	3.81	38.81	42.62	54.00	-11.38	AVG
2	5150.000	3.47	38.84	42.31	54.00	-11.69	AVG
3	5350.000	4.31	39.29	43.60	54.00	-10.40	AVG
4	5393.760	3.47	39.40	42.87	54.00	-11.13	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

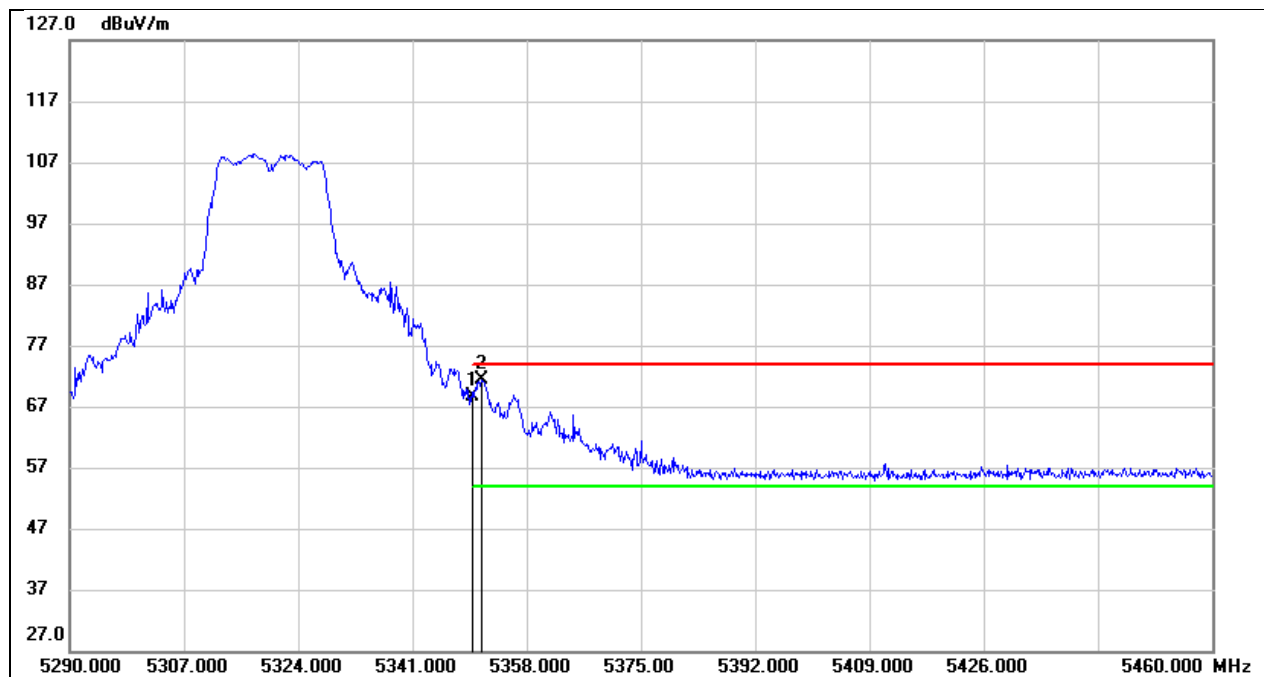


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	29.45	39.29	68.74	74.00	-5.26	peak
2	5351.200	32.09	39.30	71.39	74.00	-2.61	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

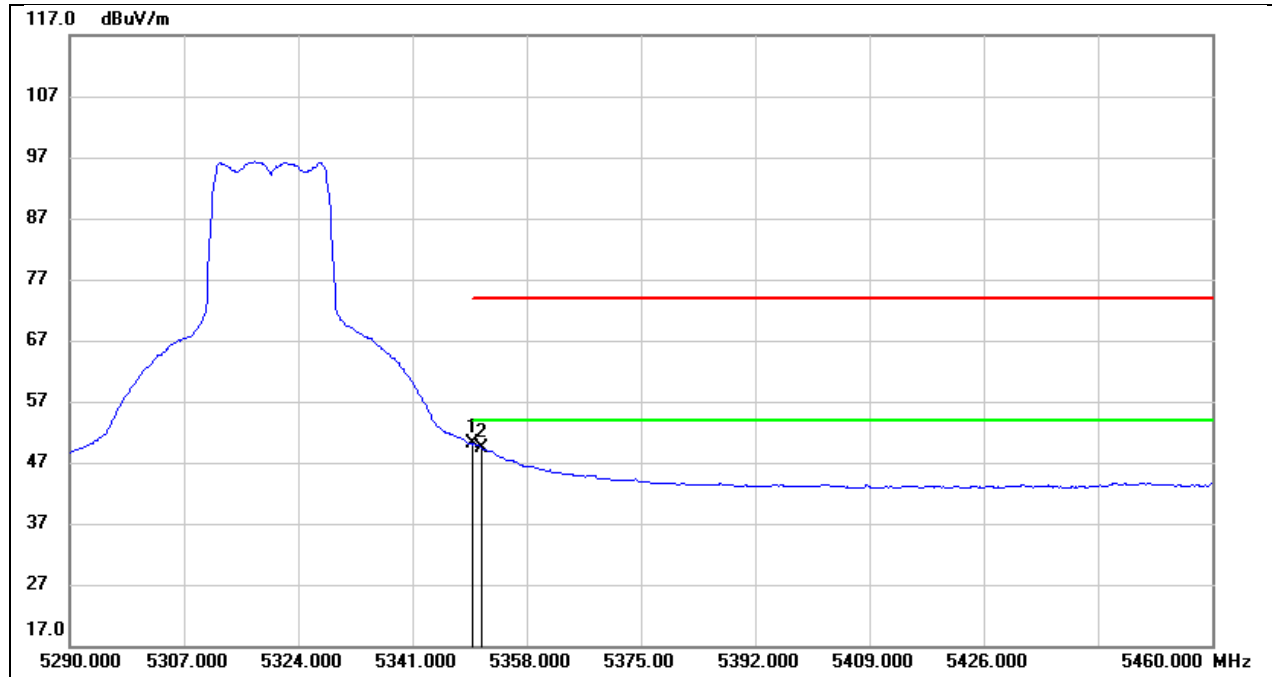


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	10.75	39.29	50.04	54.00	-3.96	AVG
2	5351.200	10.17	39.30	49.47	54.00	-4.53	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

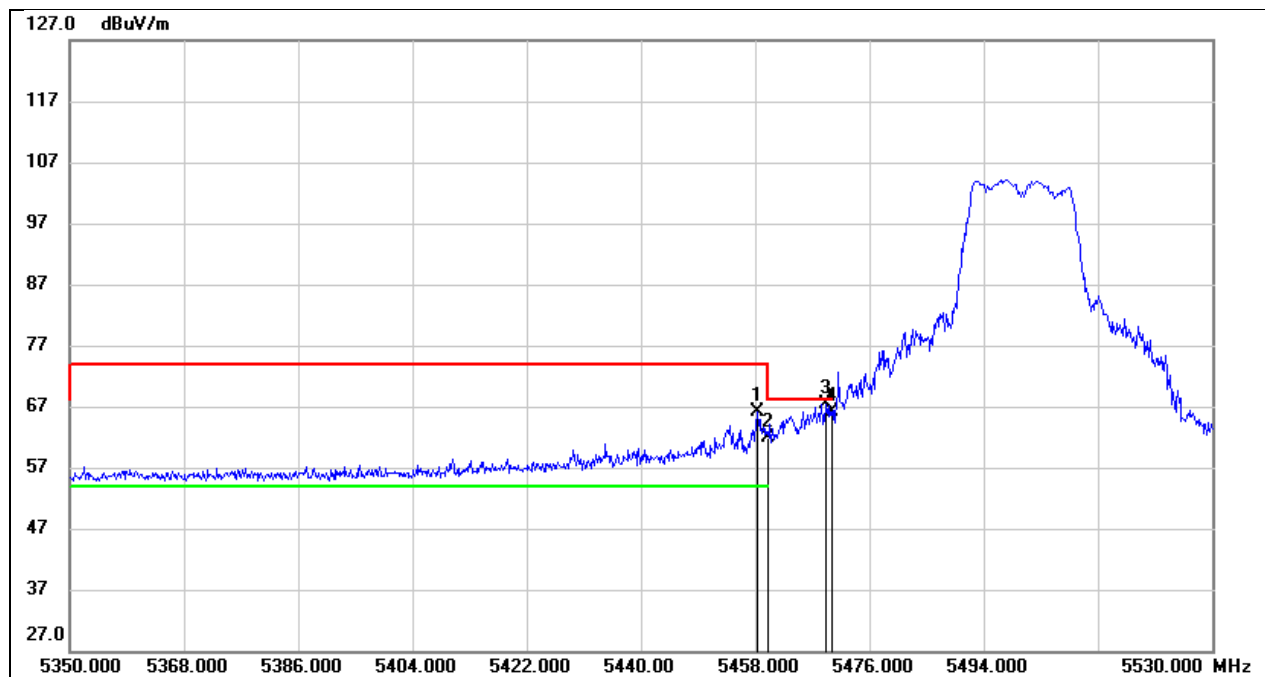


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.360	26.48	39.56	66.04	74.00	-7.96	peak
2	5460.000	22.26	39.56	61.82	68.20	-6.38	peak
3	5469.160	27.87	39.58	67.45	68.20	-0.75	peak
4	5470.000	26.48	39.58	66.06	68.20	-2.14	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

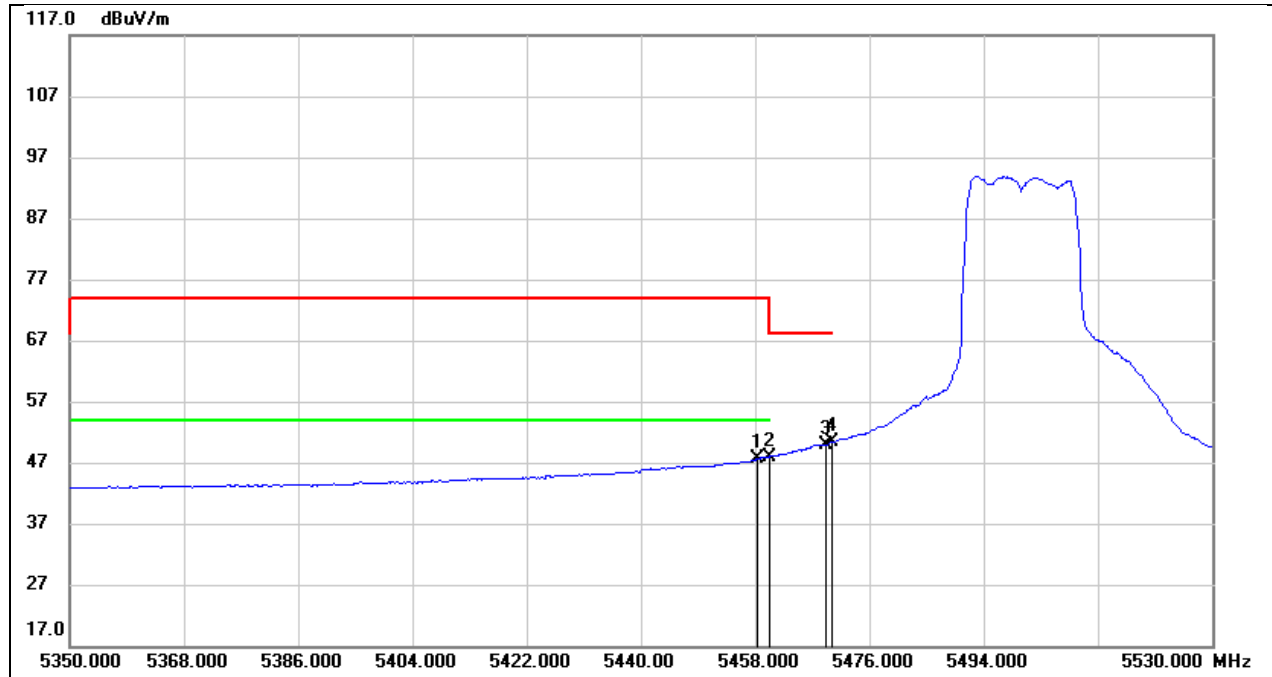


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.360	8.07	39.56	47.63	54.00	-6.37	AVG
2	5460.000	8.44	39.56	48.00	54.00	-6.00	AVG
3	5469.160	10.37	39.58	49.95	68.20	-18.25	AVG
4	5470.000	10.91	39.58	50.49	68.20	-17.71	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

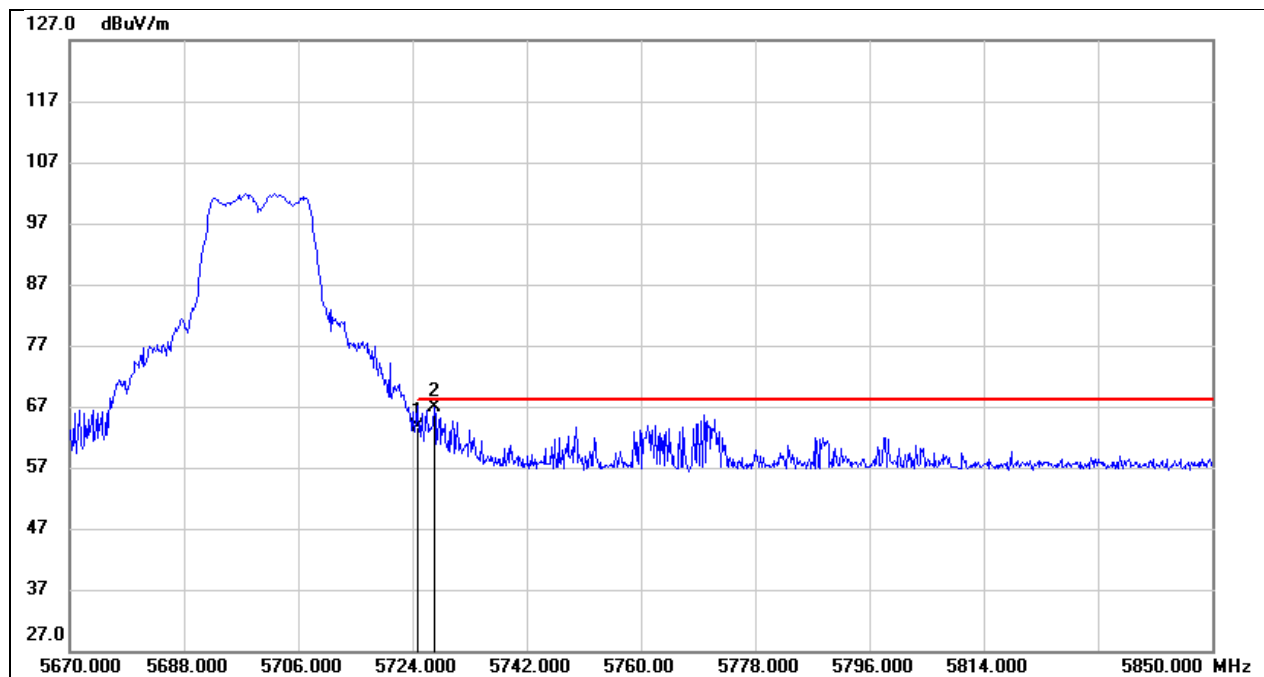


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	23.48	40.09	63.57	68.20	-4.63	peak
2	5727.420	26.80	40.09	66.89	68.20	-1.31	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

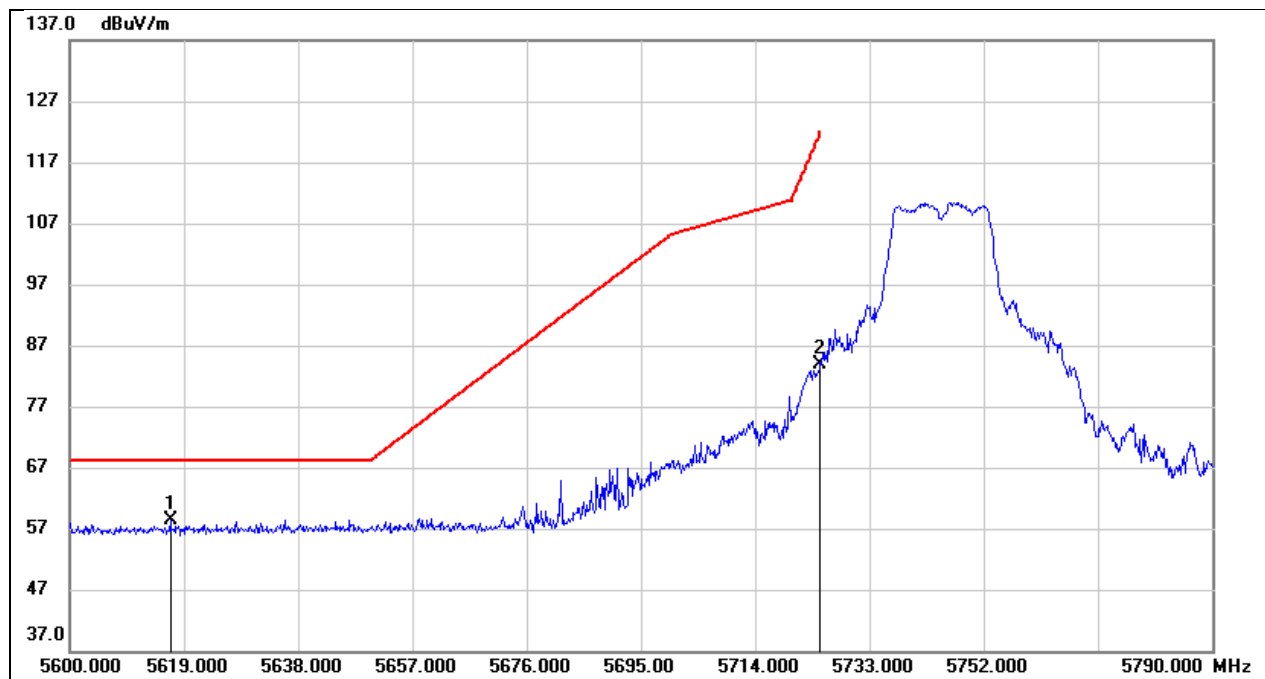


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5616.720	18.44	39.95	58.39	68.20	-9.81	peak
2	5725.000	43.85	40.09	83.94	122.20	-38.26	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

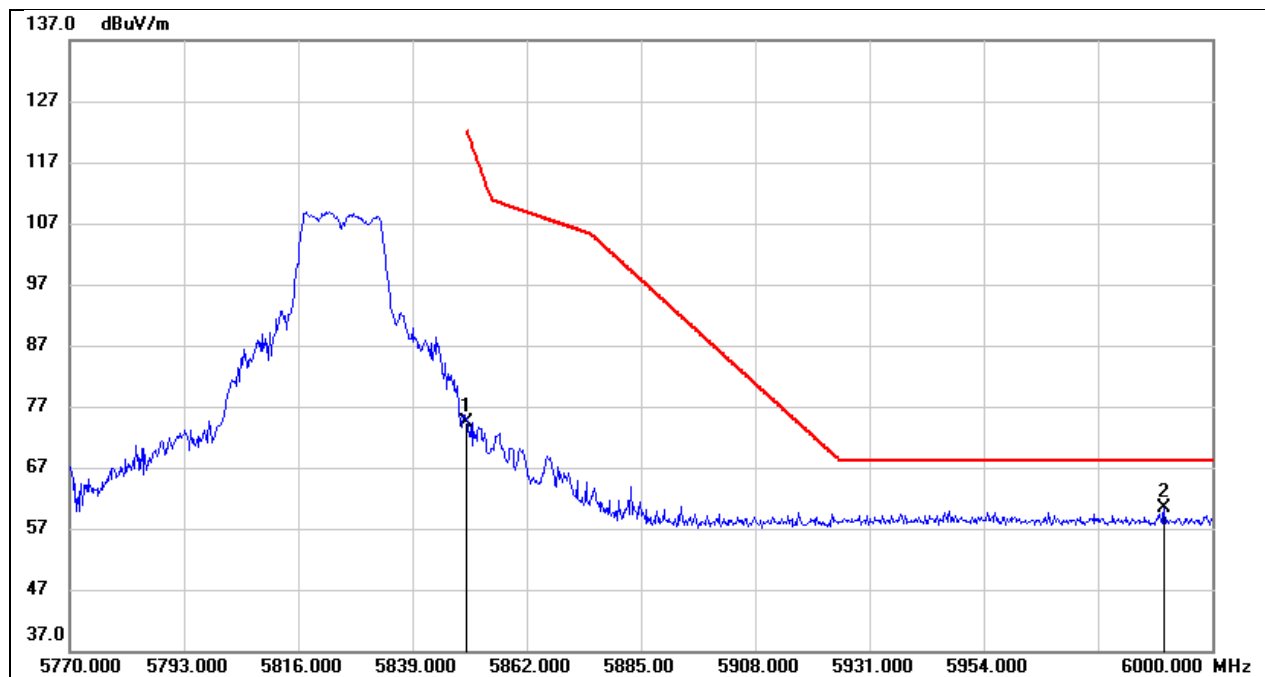


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	33.97	40.30	74.27	122.20	-47.93	peak
2	5990.340	19.72	40.62	60.34	68.20	-7.86	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

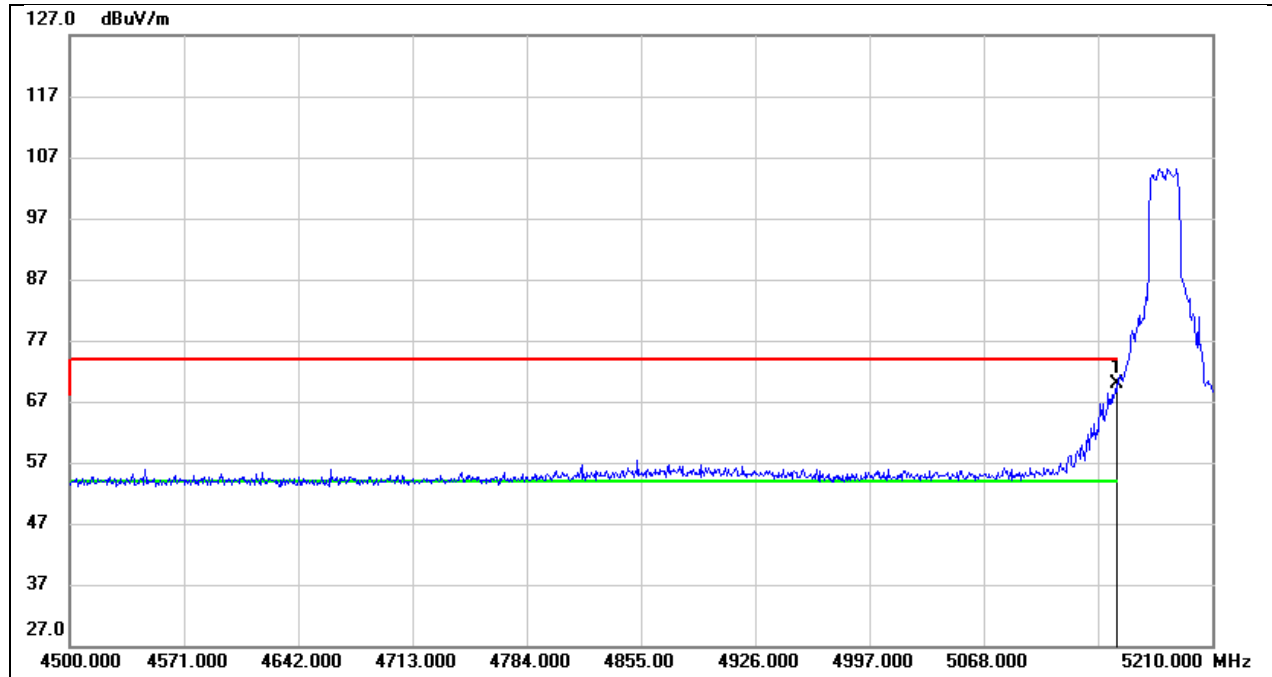


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.00	38.84	69.84	74.00	-4.16	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

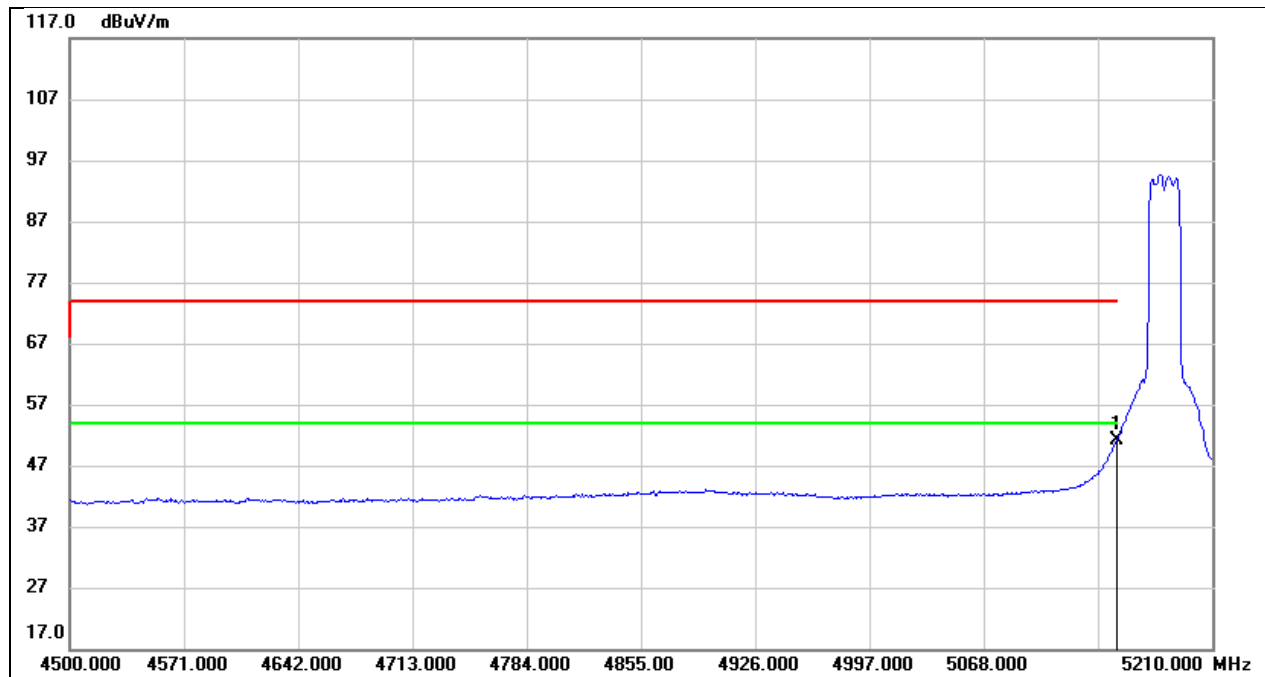


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.19	38.84	51.03	54.00	-2.97	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

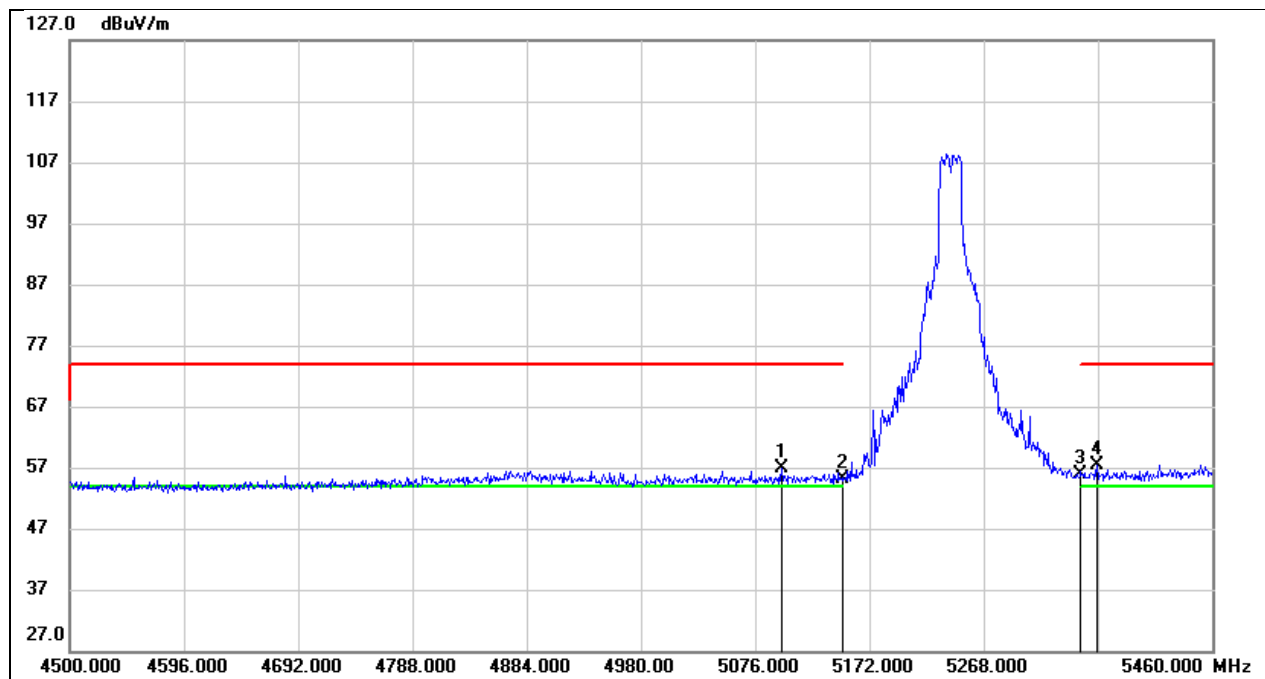


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5098.080	18.12	38.76	56.88	74.00	-17.12	peak
2	5150.000	16.21	38.84	55.05	74.00	-18.95	peak
3	5350.000	16.65	39.29	55.94	74.00	-18.06	peak
4	5363.040	18.16	39.33	57.49	74.00	-16.51	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

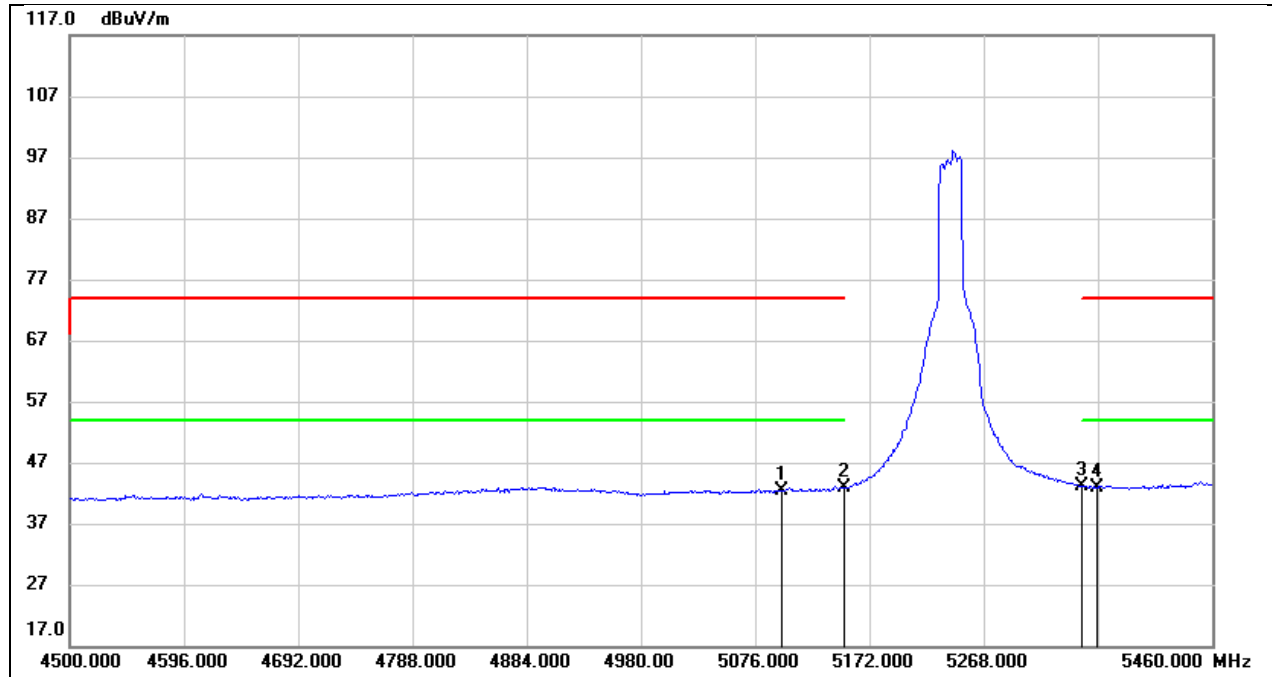


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5098.080	3.67	38.76	42.43	54.00	-11.57	AVG
2	5150.000	4.00	38.84	42.84	54.00	-11.16	AVG
3	5350.000	3.92	39.29	43.21	54.00	-10.79	AVG
4	5363.040	3.64	39.33	42.97	54.00	-11.03	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

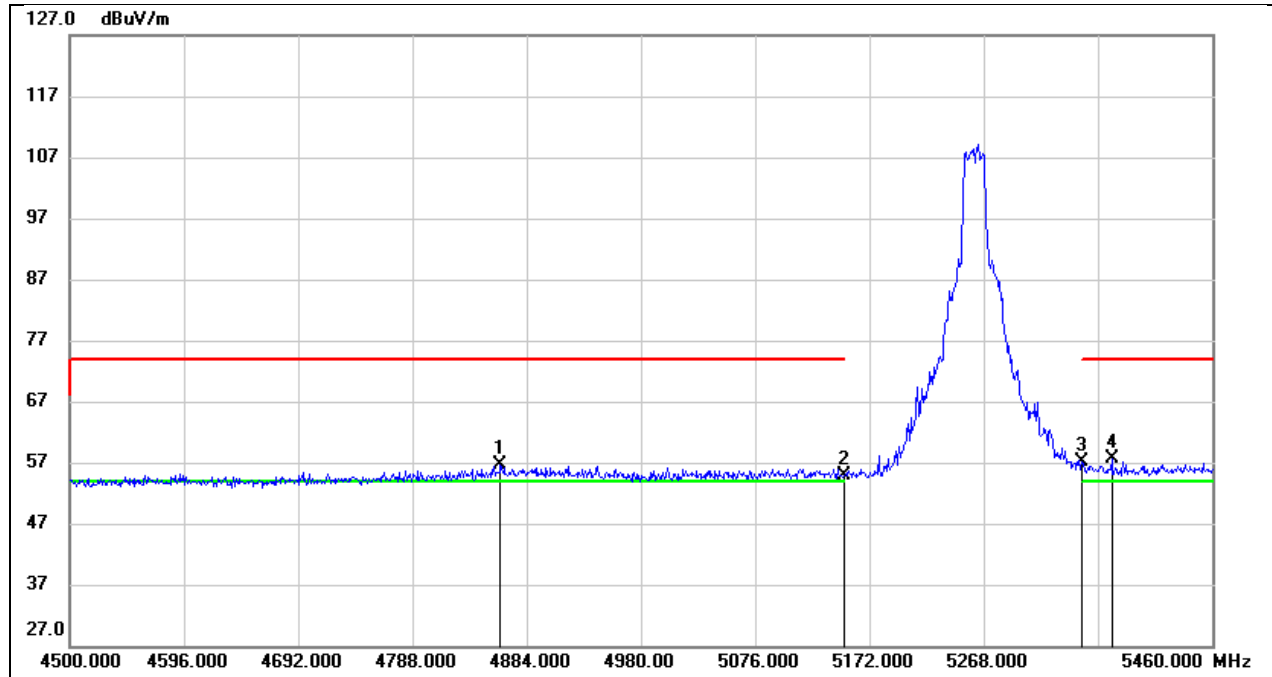


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4861.920	18.32	38.32	56.64	74.00	-17.36	peak
2	5150.000	16.12	38.84	54.96	74.00	-19.04	peak
3	5350.000	17.85	39.29	57.14	74.00	-16.86	peak
4	5375.520	18.28	39.36	57.64	74.00	-16.36	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

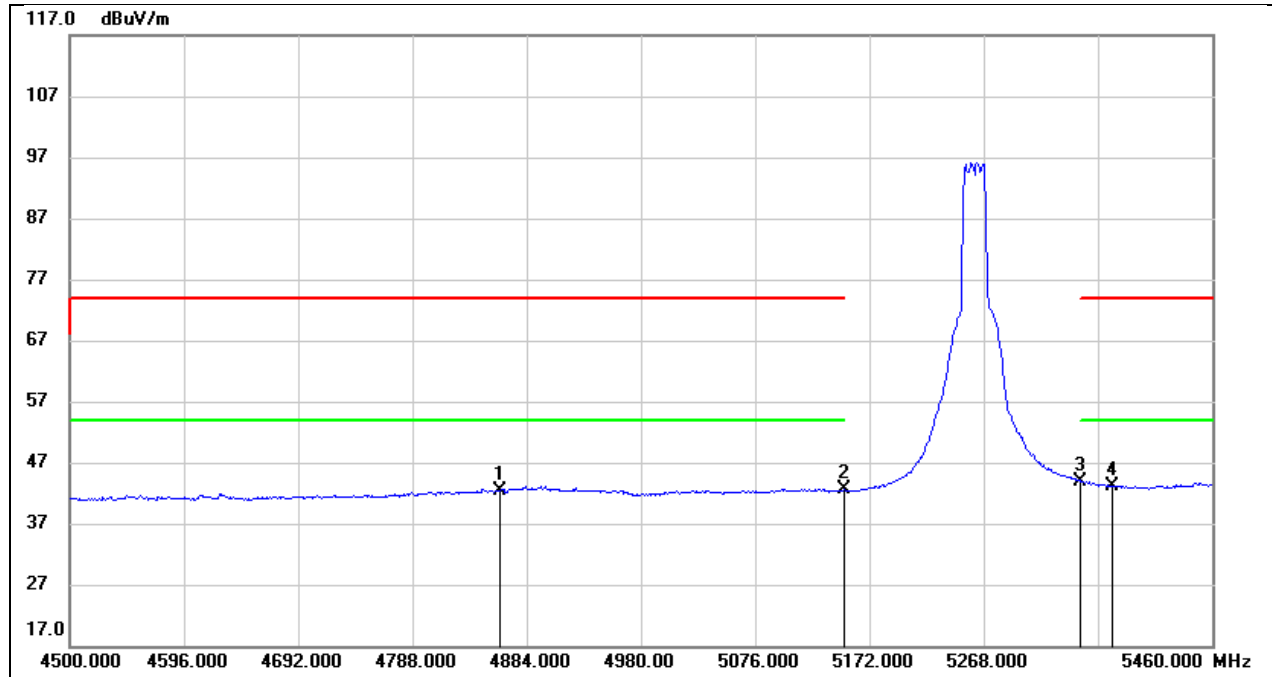


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4861.920	4.17	38.32	42.49	54.00	-11.51	AVG
2	5150.000	3.72	38.84	42.56	54.00	-11.44	AVG
3	5350.000	4.55	39.29	43.84	54.00	-10.16	AVG
4	5375.520	3.74	39.36	43.10	54.00	-10.90	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

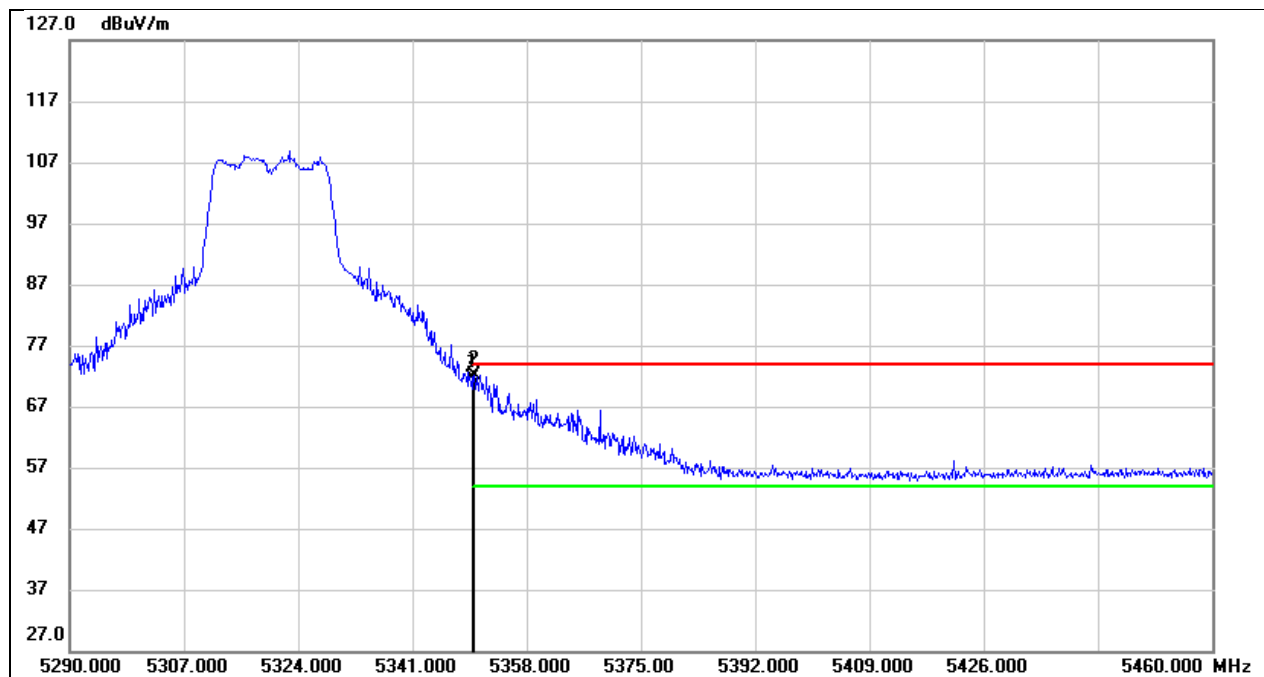


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	32.40	39.29	71.69	74.00	-2.31	peak
2	5350.180	32.93	39.30	72.23	74.00	-1.77	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

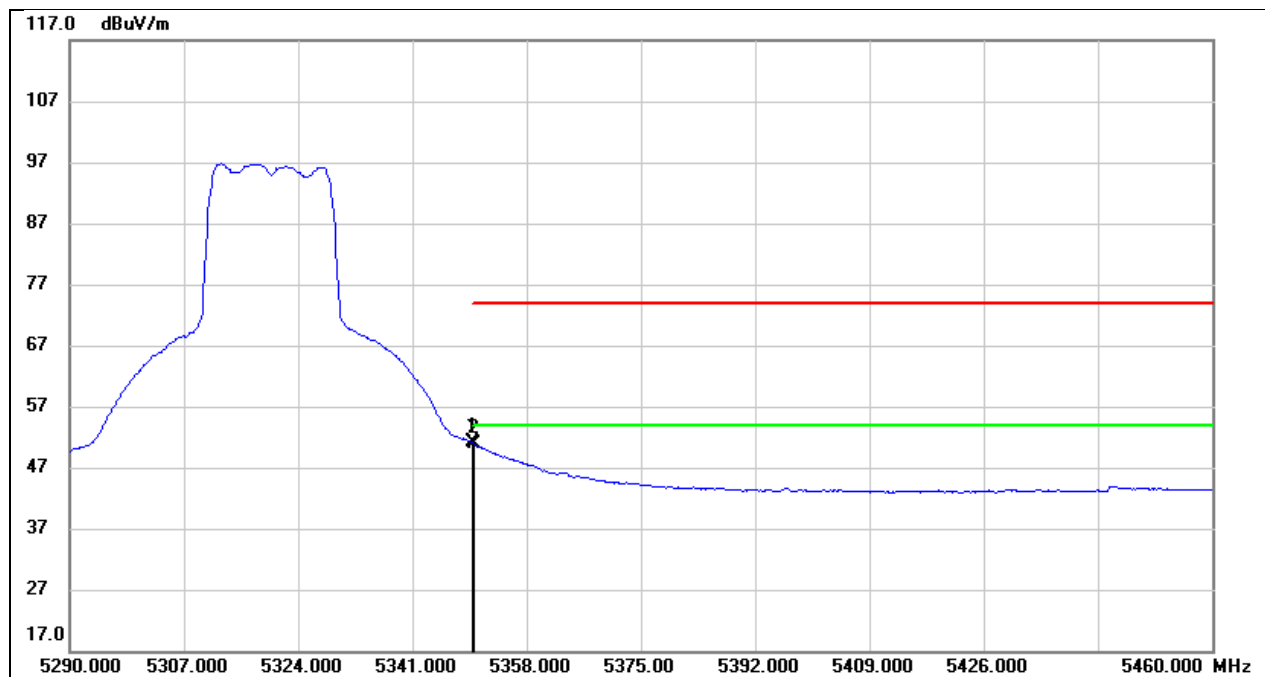


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	11.76	39.29	51.05	54.00	-2.95	AVG
2	5350.180	11.60	39.30	50.90	54.00	-3.10	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

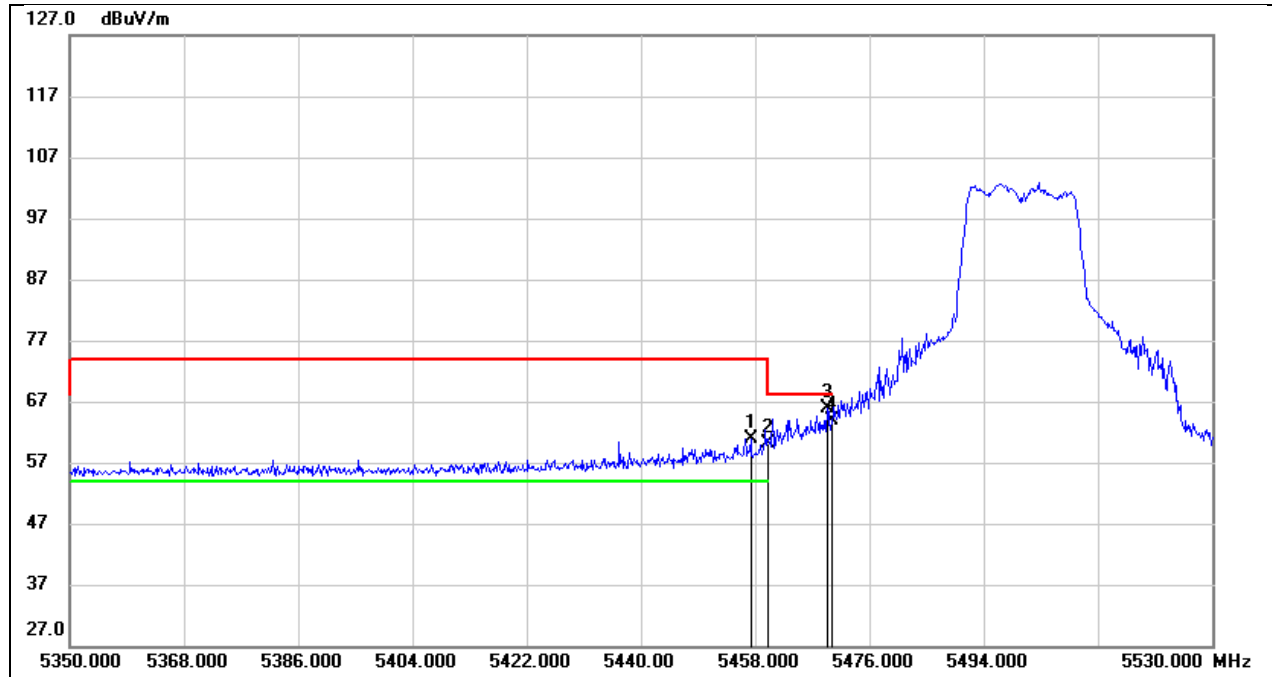


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.280	21.34	39.56	60.90	74.00	-13.10	peak
2	5460.000	20.55	39.56	60.11	68.20	-8.09	peak
3	5469.340	26.25	39.58	65.83	68.20	-2.37	peak
4	5470.000	24.35	39.58	63.93	68.20	-4.27	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

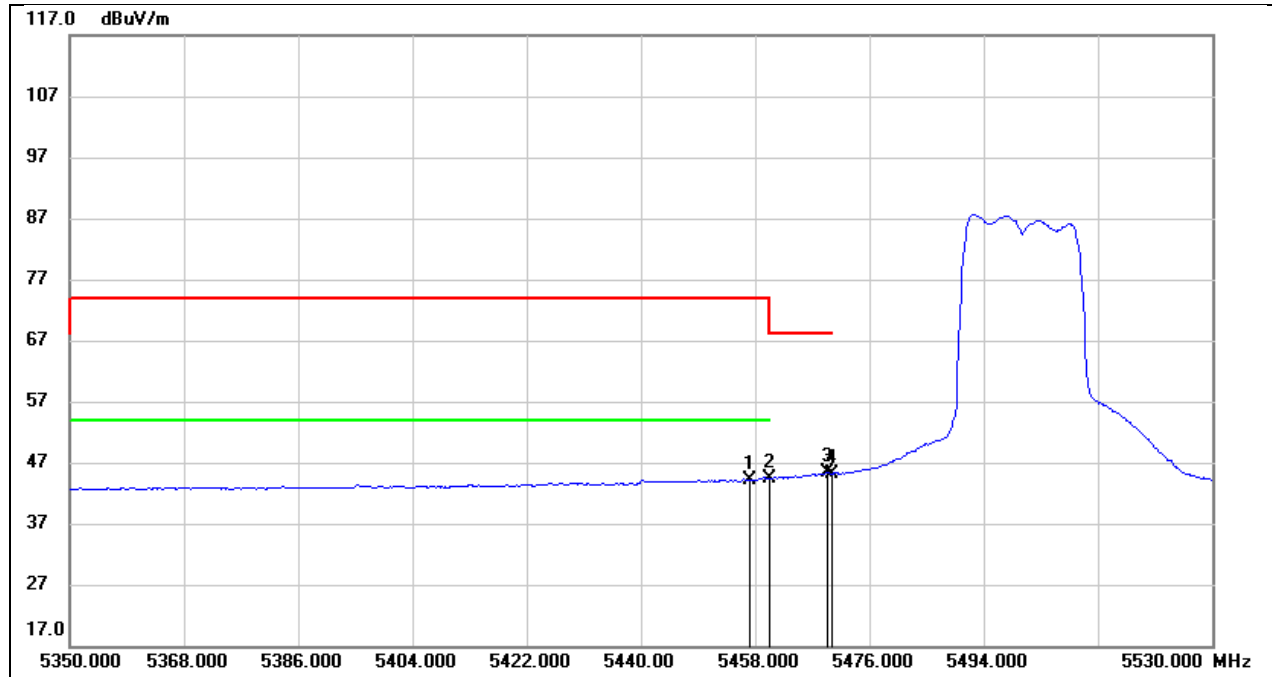


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.280	4.51	39.56	44.07	54.00	-9.93	AVG
2	5460.000	4.88	39.56	44.44	54.00	-9.56	AVG
3	5469.340	5.74	39.58	45.32	68.20	-22.88	AVG
4	5470.000	5.66	39.58	45.24	68.20	-22.96	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

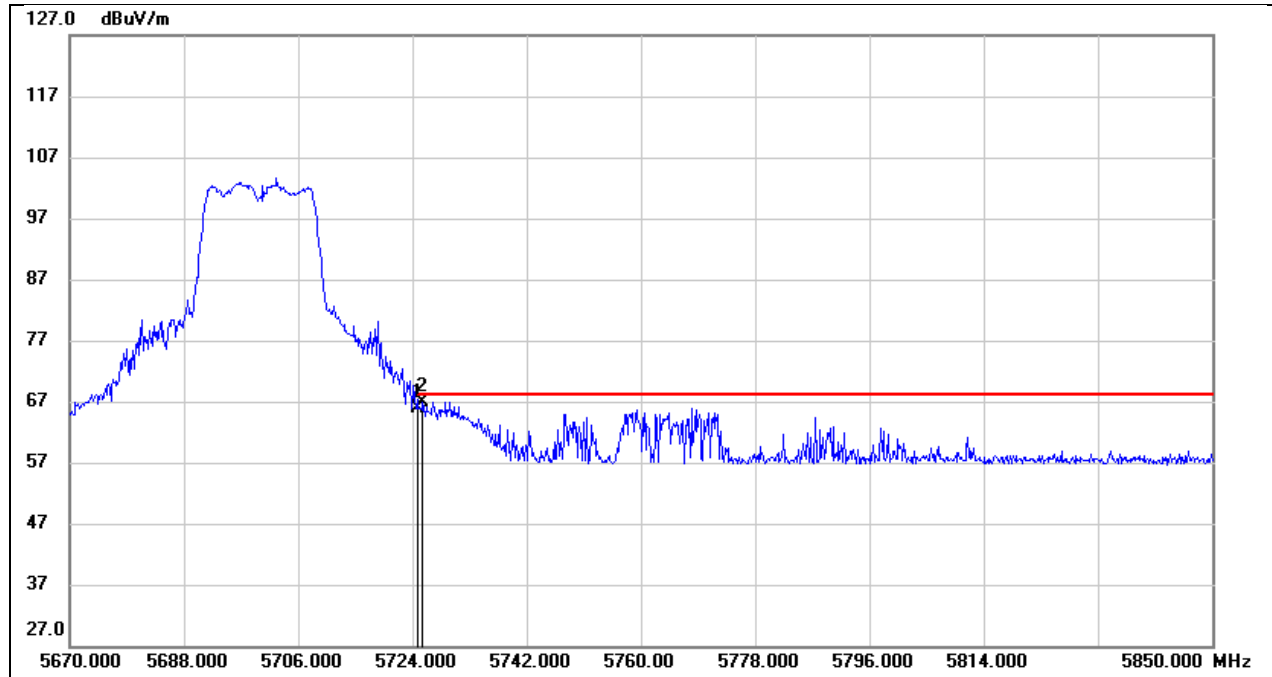


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	25.73	40.09	65.82	68.20	-2.38	peak
2	5725.620	26.90	40.09	66.99	68.20	-1.21	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

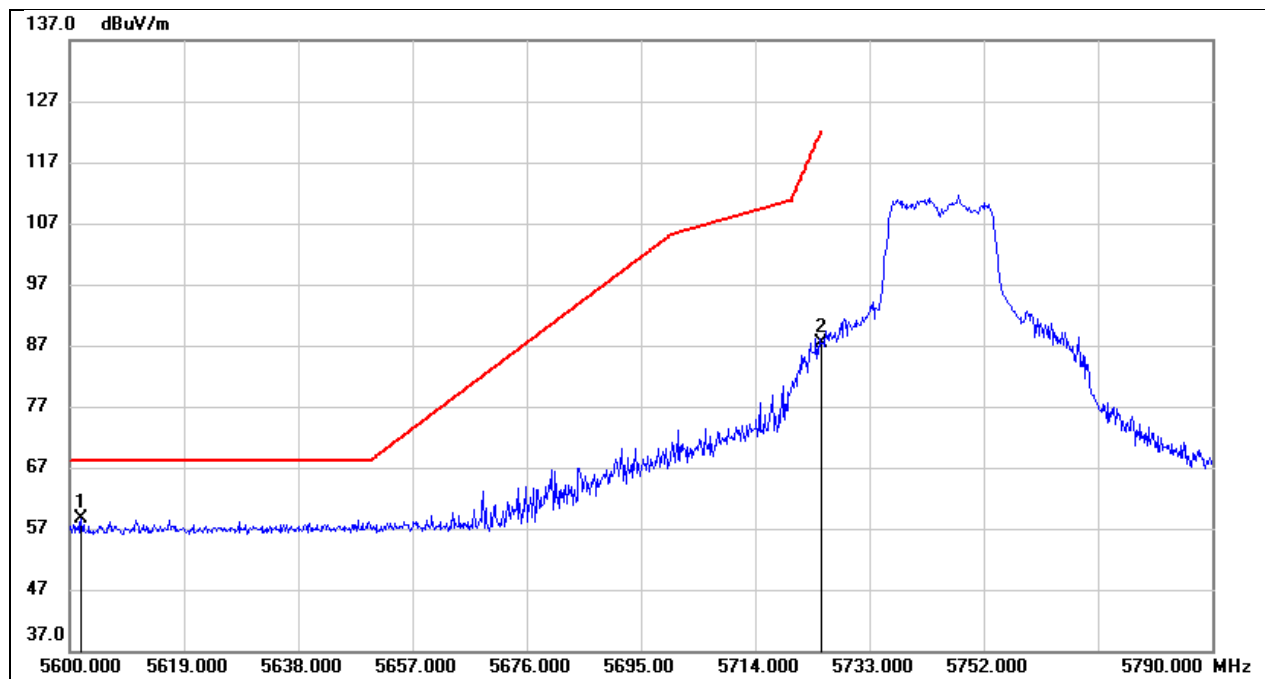


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5601.900	18.73	39.93	58.66	68.20	-9.54	peak
2	5725.000	47.34	40.09	87.43	122.20	-34.77	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

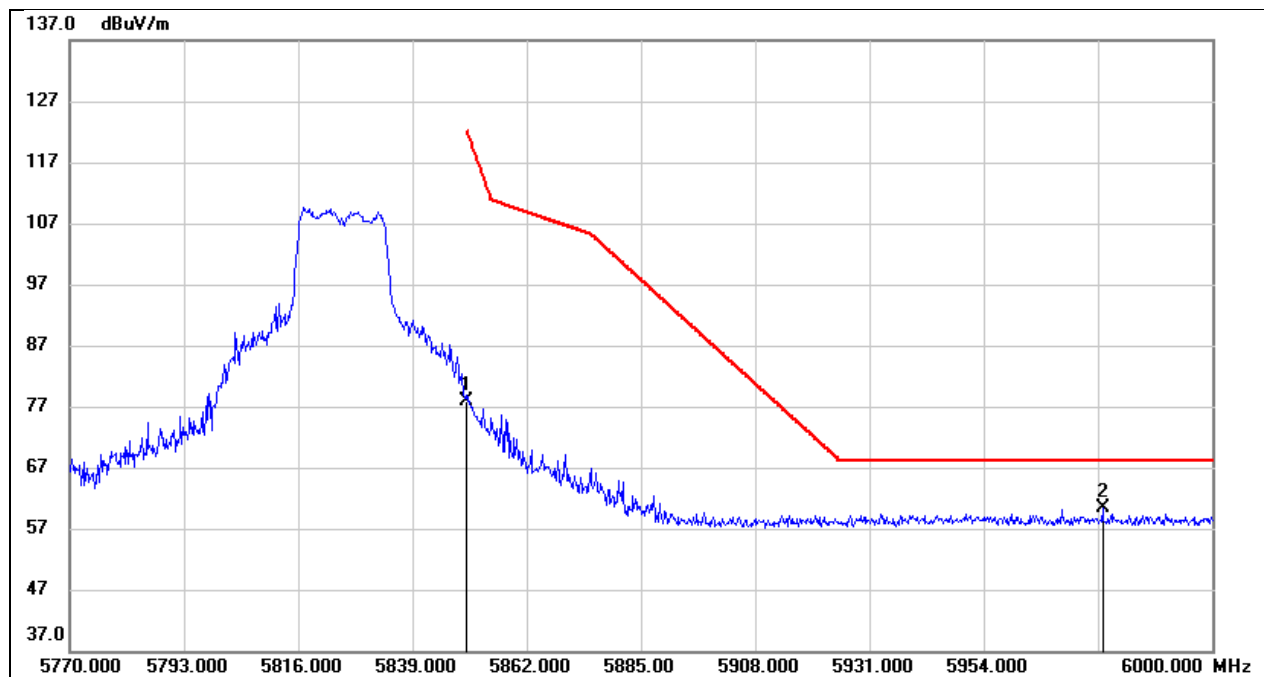


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	37.70	40.30	78.00	122.20	-44.20	peak
2	5977.920	19.73	40.59	60.32	68.20	-7.88	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

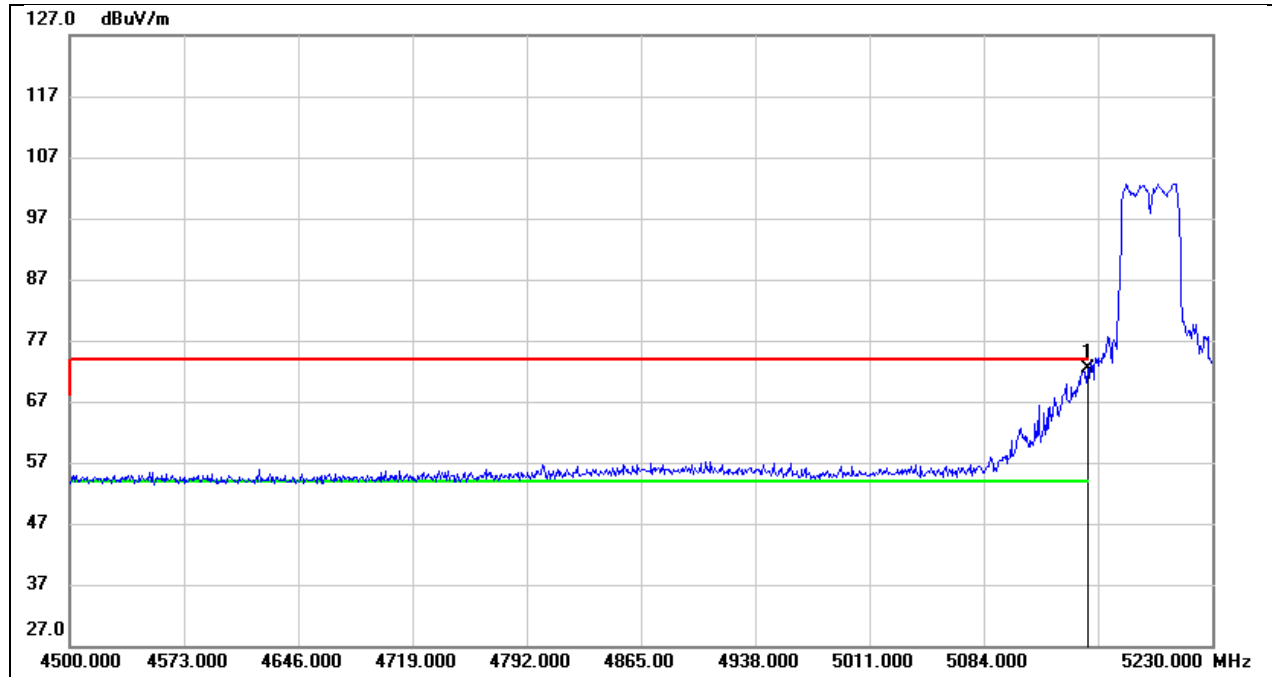


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.50	38.84	72.34	74.00	-1.66	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

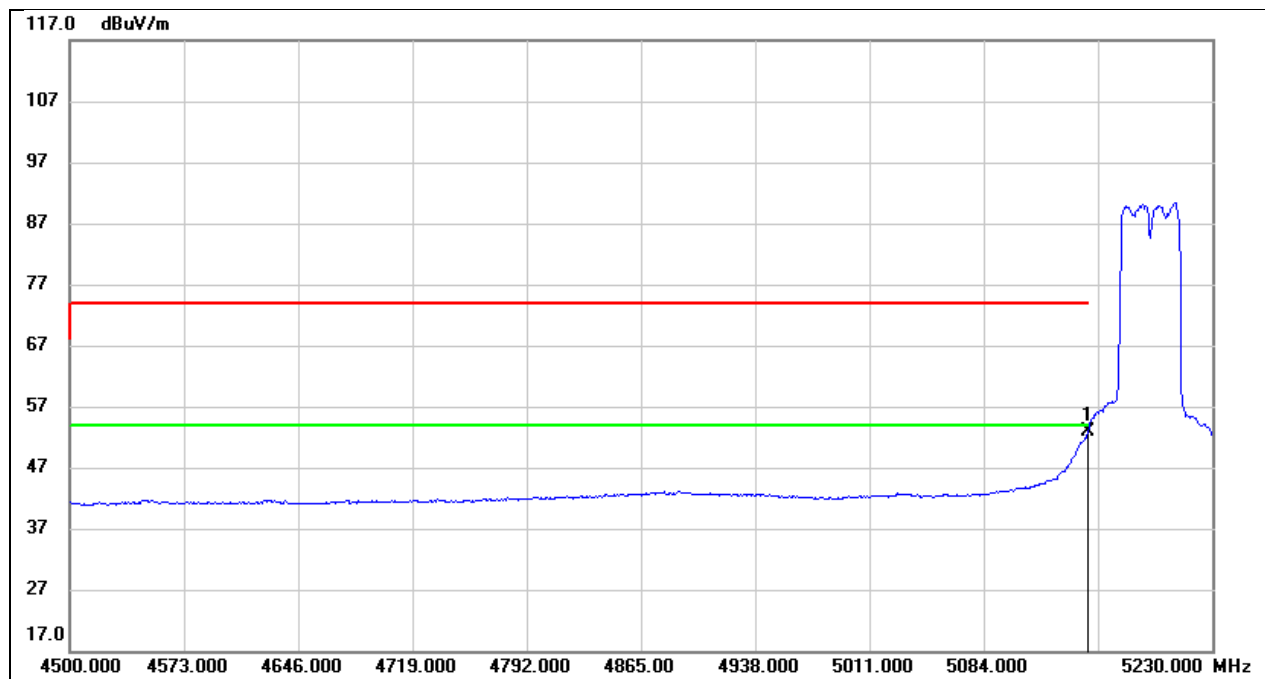


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	14.00	38.84	52.84	54.00	-1.16	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

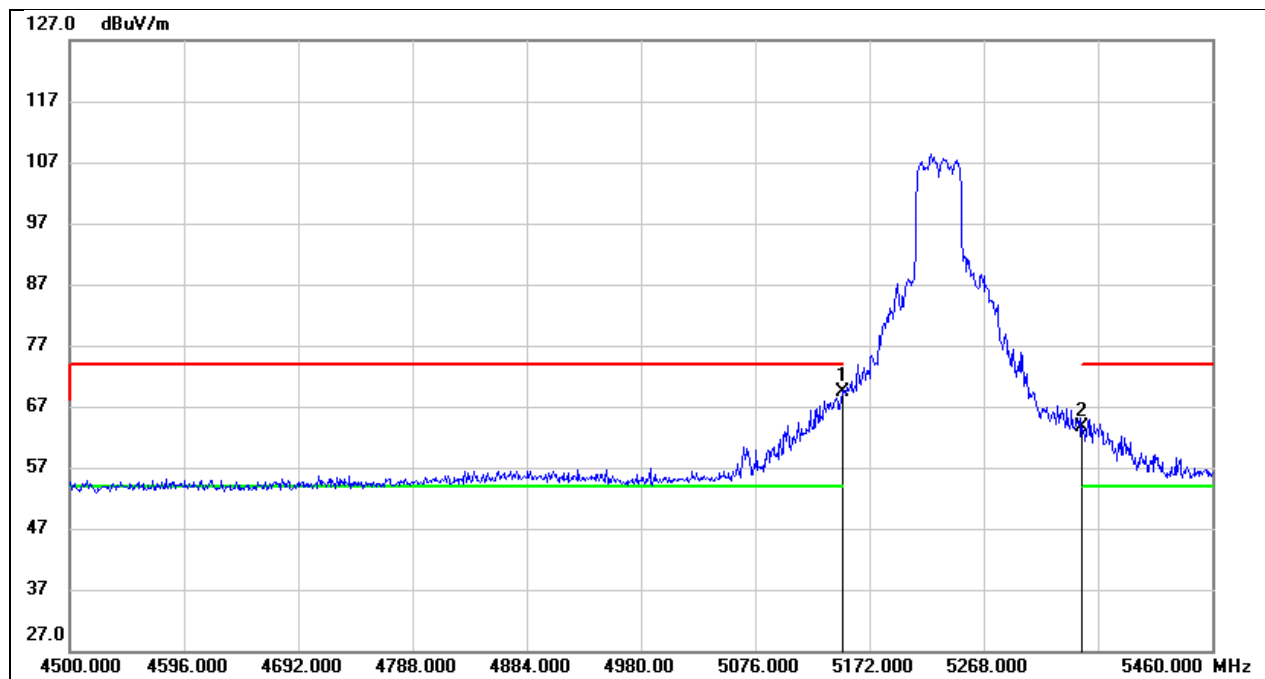


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	30.44	38.84	69.28	74.00	-4.72	peak
2	5350.000	24.26	39.29	63.55	74.00	-10.45	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

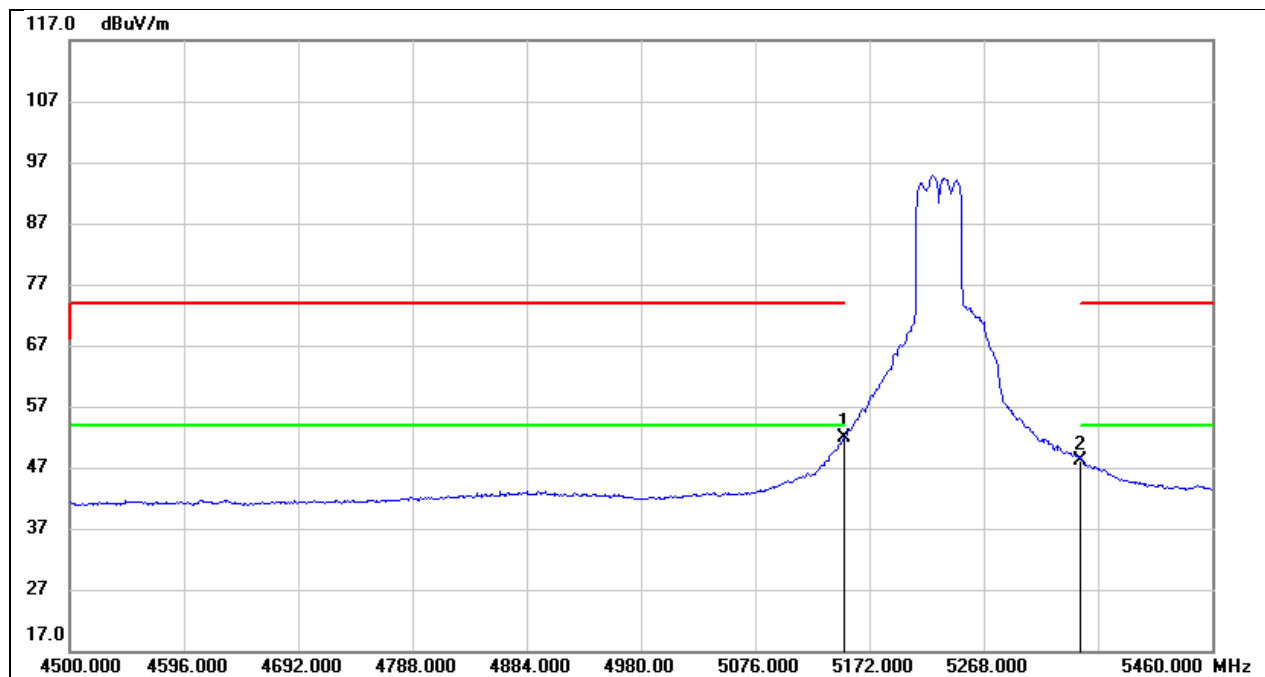


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	13.08	38.84	51.92	54.00	-2.08	AVG
2	5350.000	8.85	39.29	48.14	54.00	-5.86	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

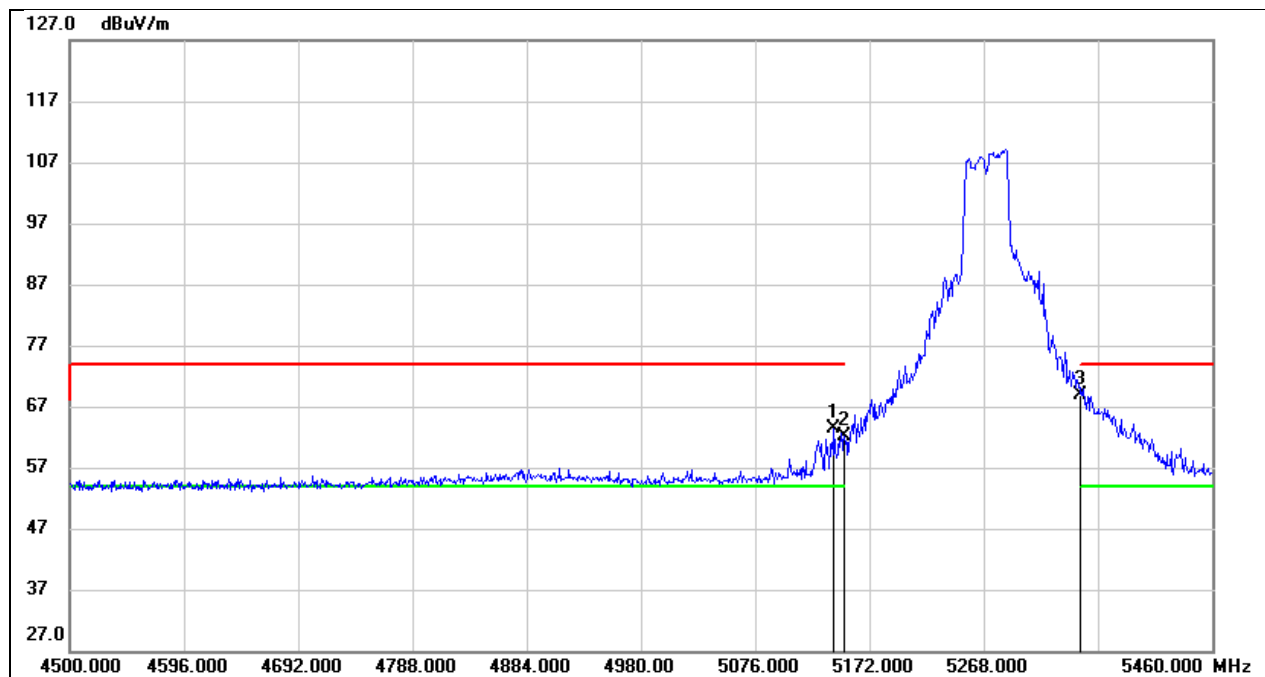


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.240	24.47	38.83	63.30	74.00	-10.70	peak
2	5150.000	23.24	38.84	62.08	74.00	-11.92	peak
3	5350.000	29.69	39.29	68.98	74.00	-5.02	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

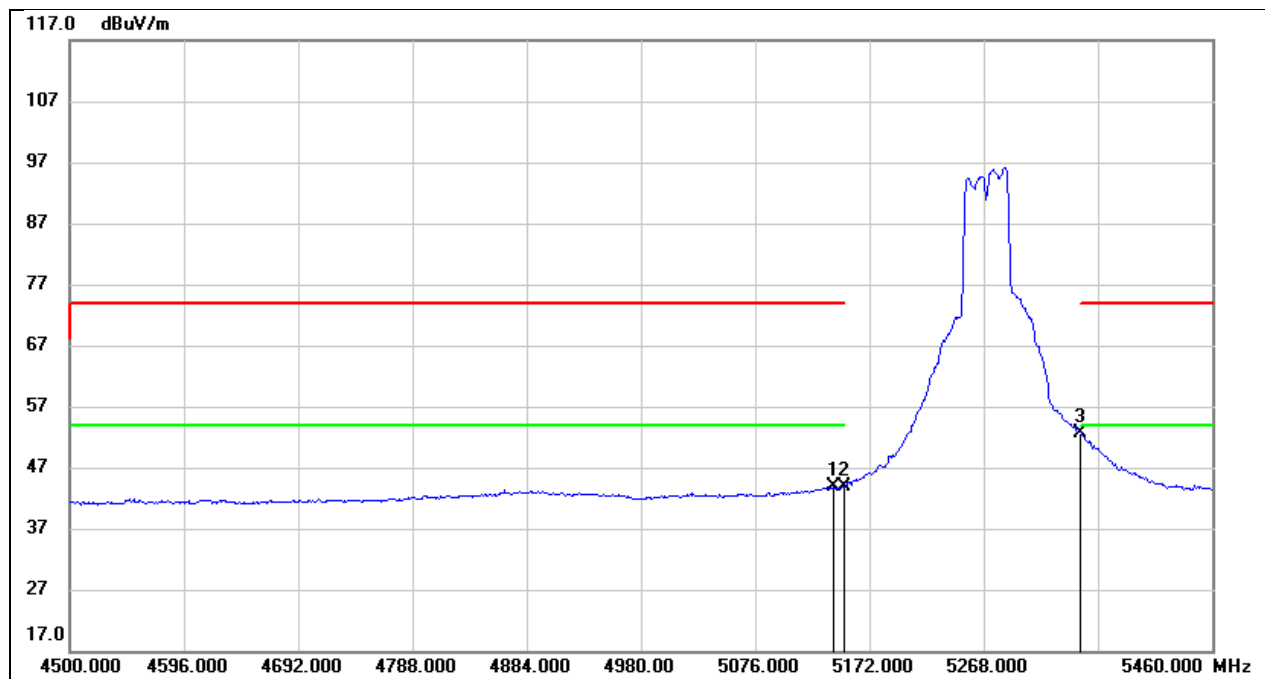


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.240	4.96	38.83	43.79	54.00	-10.21	AVG
2	5150.000	5.14	38.84	43.98	54.00	-10.02	AVG
3	5350.000	13.30	39.29	52.59	54.00	-1.41	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

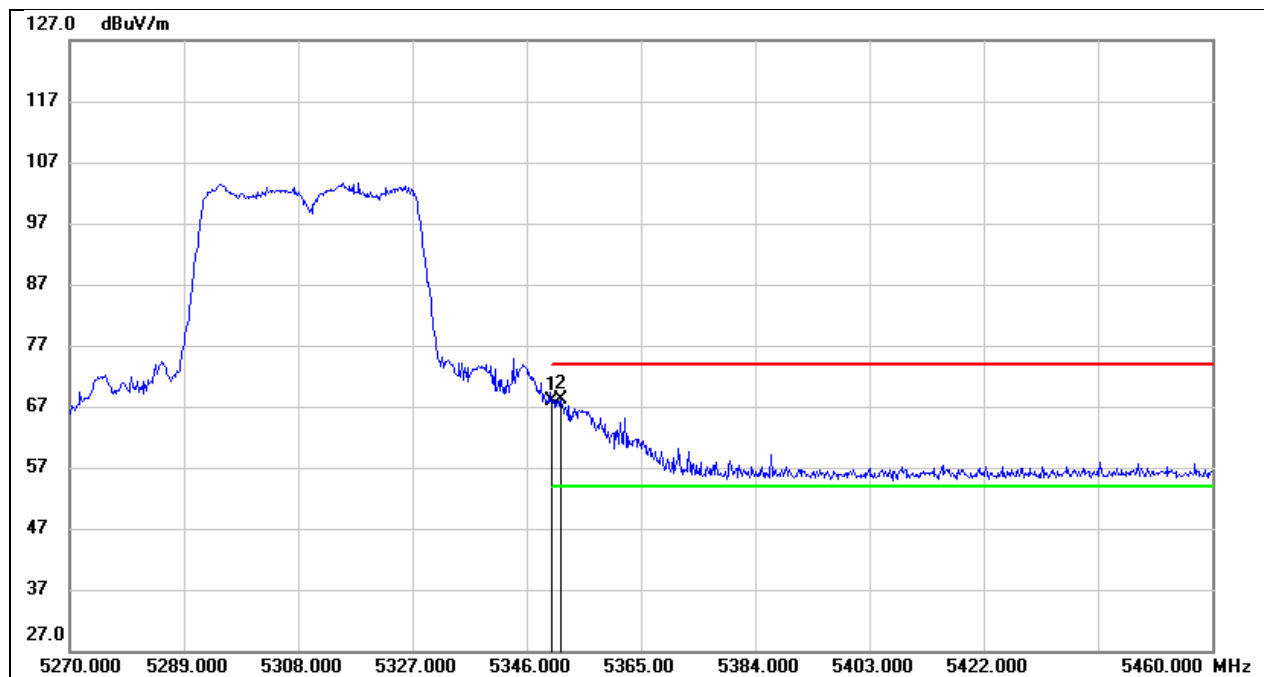


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	28.57	39.29	67.86	74.00	-6.14	peak
2	5351.700	28.73	39.30	68.03	74.00	-5.97	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

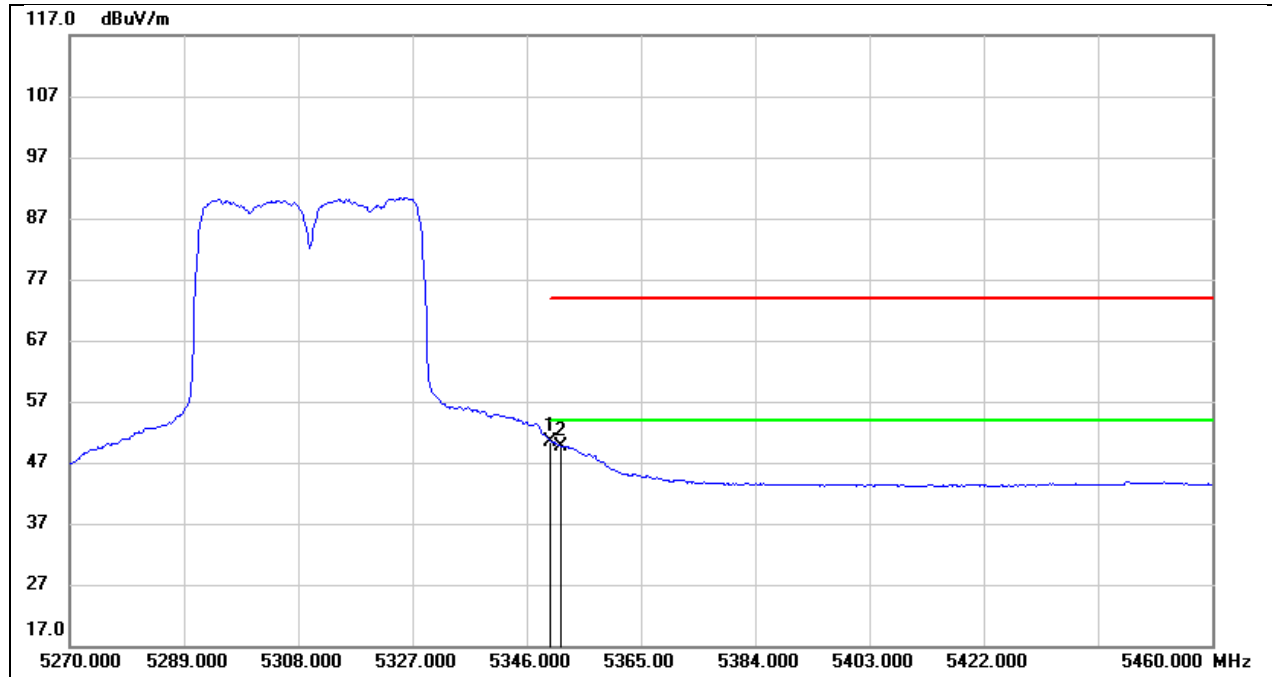


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	11.20	39.29	50.49	54.00	-3.51	AVG
2	5351.700	10.45	39.30	49.75	54.00	-4.25	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

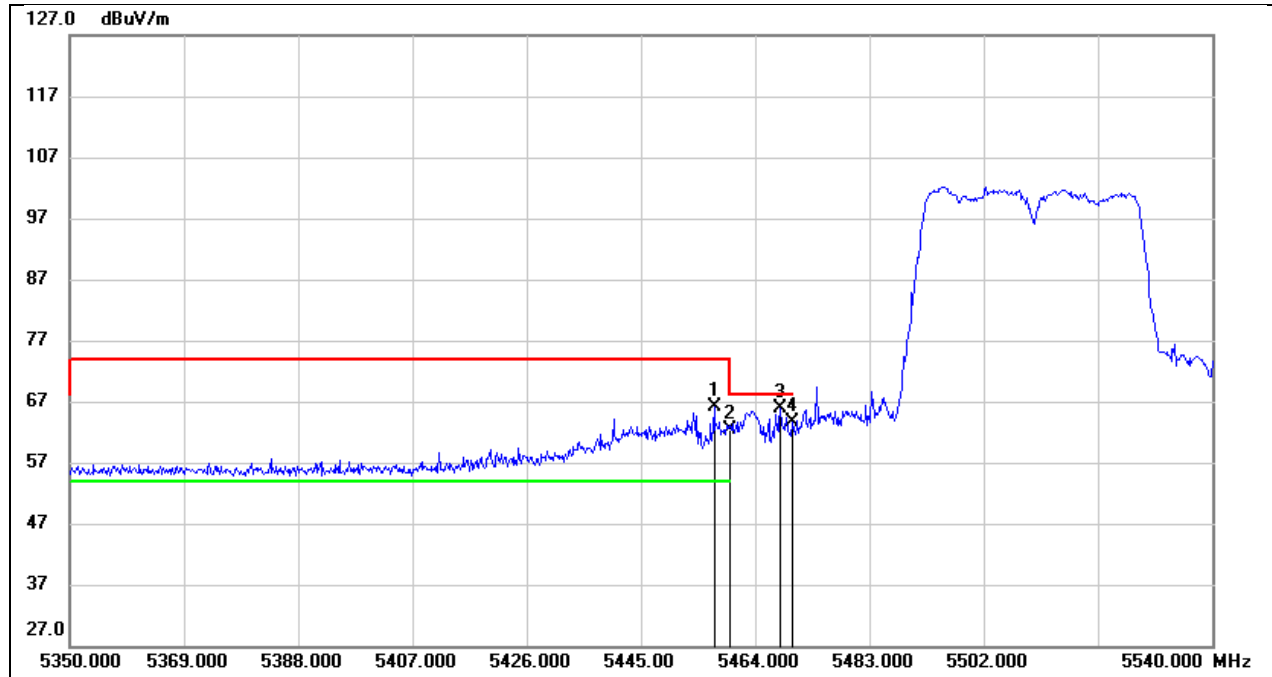


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.160	26.49	39.56	66.05	74.00	-7.95	peak
2	5460.000	22.87	39.56	62.43	68.20	-5.77	peak
3	5468.180	26.23	39.58	65.81	68.20	-2.39	peak
4	5470.000	24.13	39.58	63.71	68.20	-4.49	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

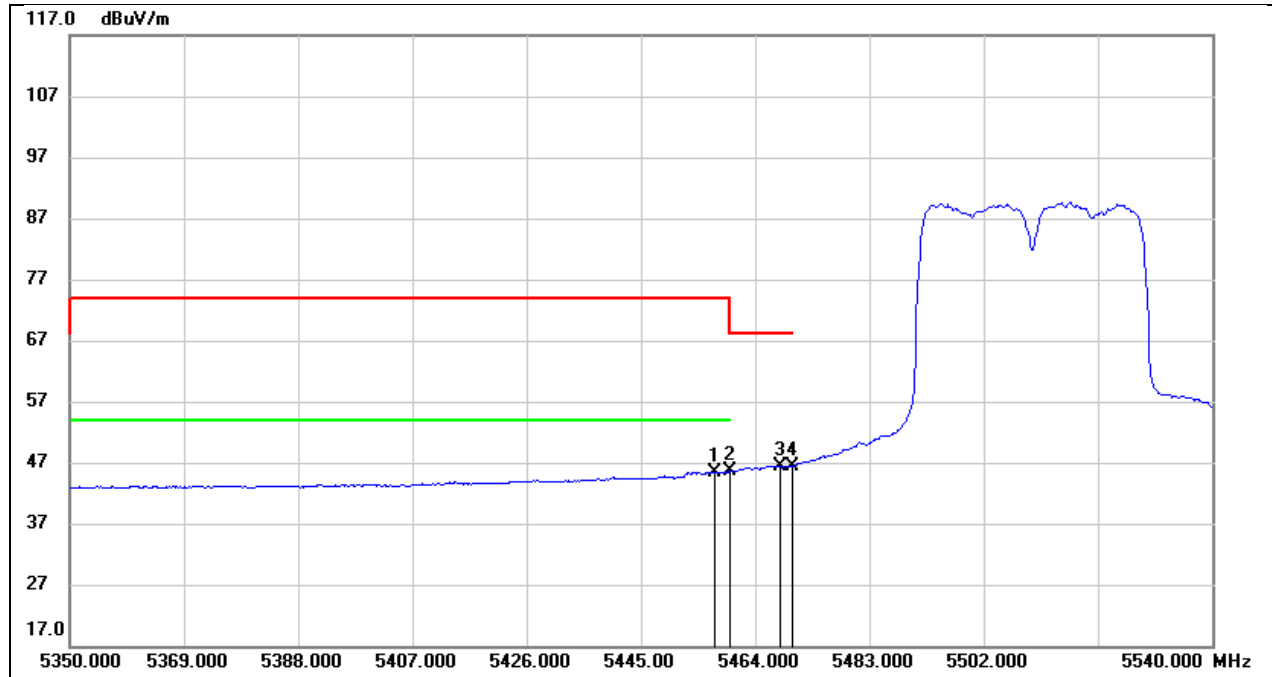


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.160	5.79	39.56	45.35	54.00	-8.65	AVG
2	5460.000	5.98	39.56	45.54	54.00	-8.46	AVG
3	5468.180	6.68	39.58	46.26	68.20	-21.94	AVG
4	5470.000	6.74	39.58	46.32	68.20	-21.88	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

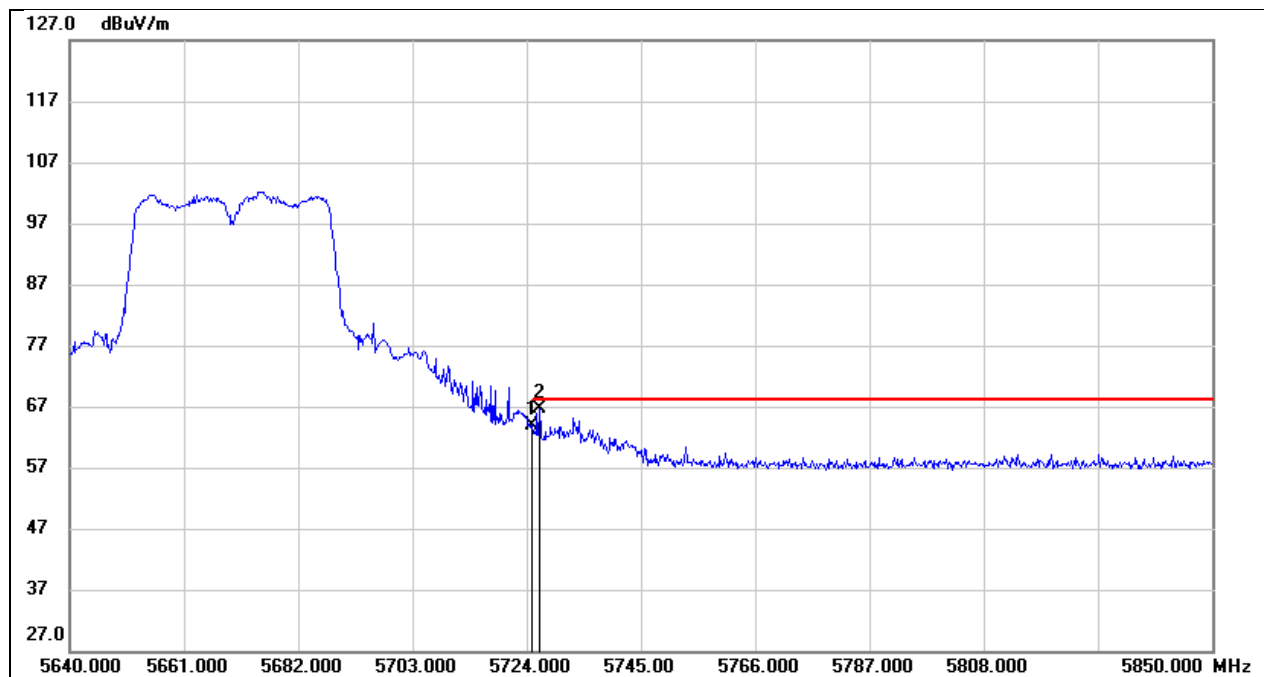


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	23.68	40.09	63.77	68.20	-4.43	peak
2	5726.310	26.48	40.09	66.57	68.20	-1.63	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

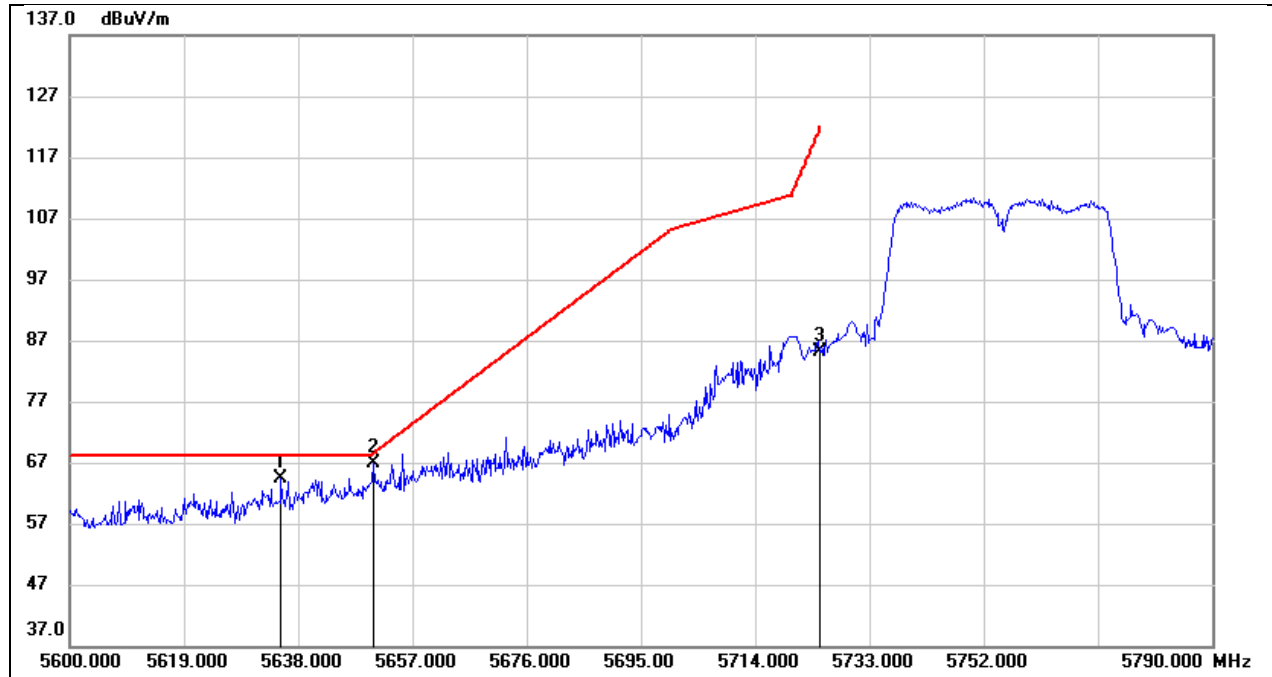


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.150	24.28	39.98	64.26	68.20	-3.94	peak
2	5650.540	26.78	39.99	66.77	68.60	-1.83	peak
3	5725.000	44.99	40.09	85.08	122.20	-37.12	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

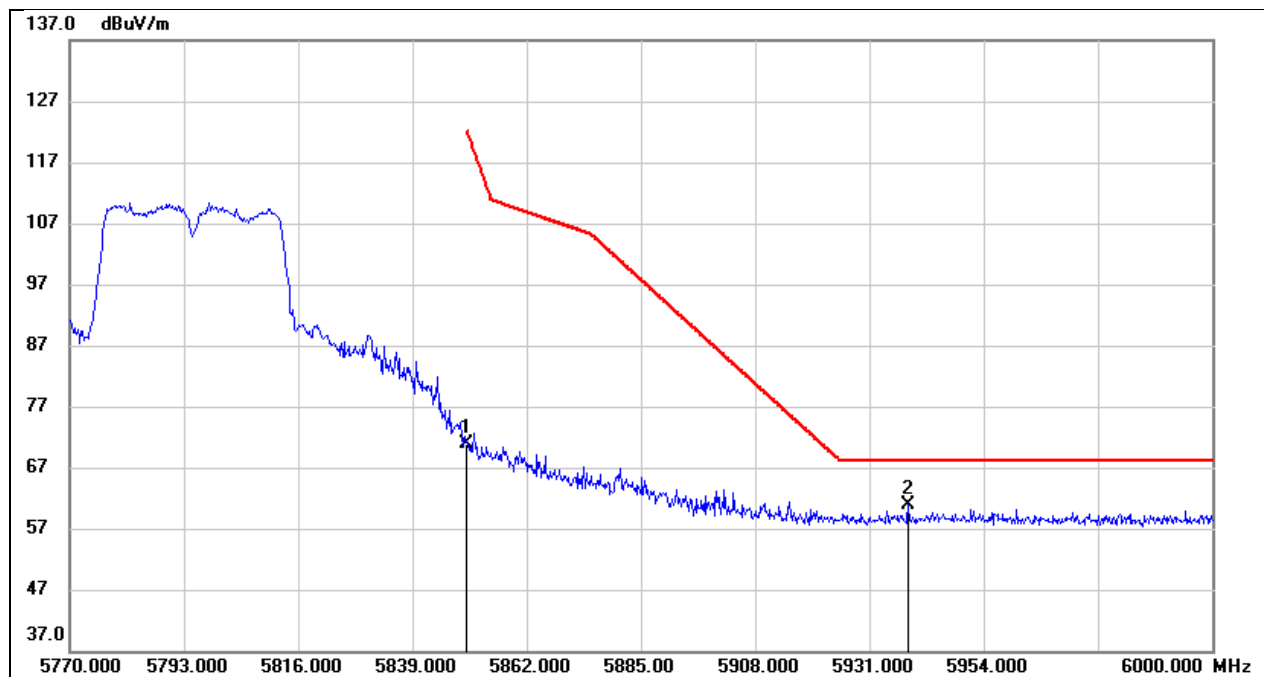


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	30.56	40.30	70.86	122.20	-51.34	peak
2	5938.820	20.30	40.50	60.80	68.20	-7.40	peak

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

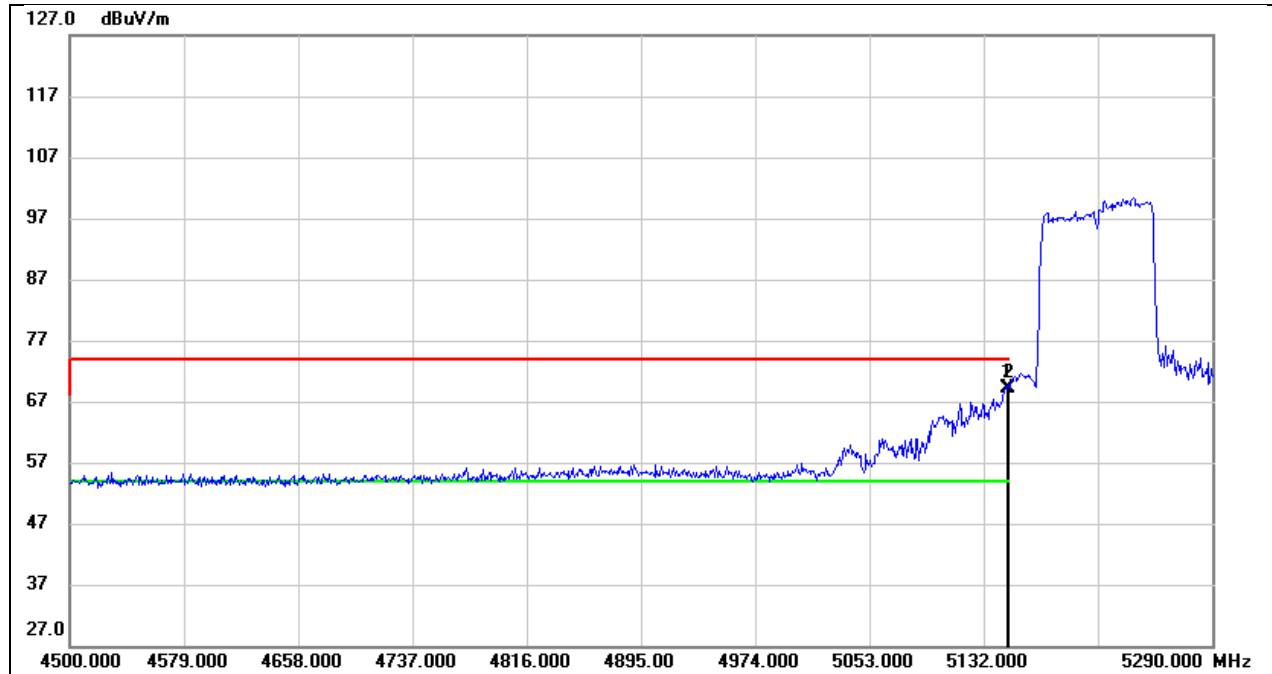


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.800	30.19	38.84	69.03	74.00	-4.97	peak
2	5150.000	30.38	38.84	69.22	74.00	-4.78	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

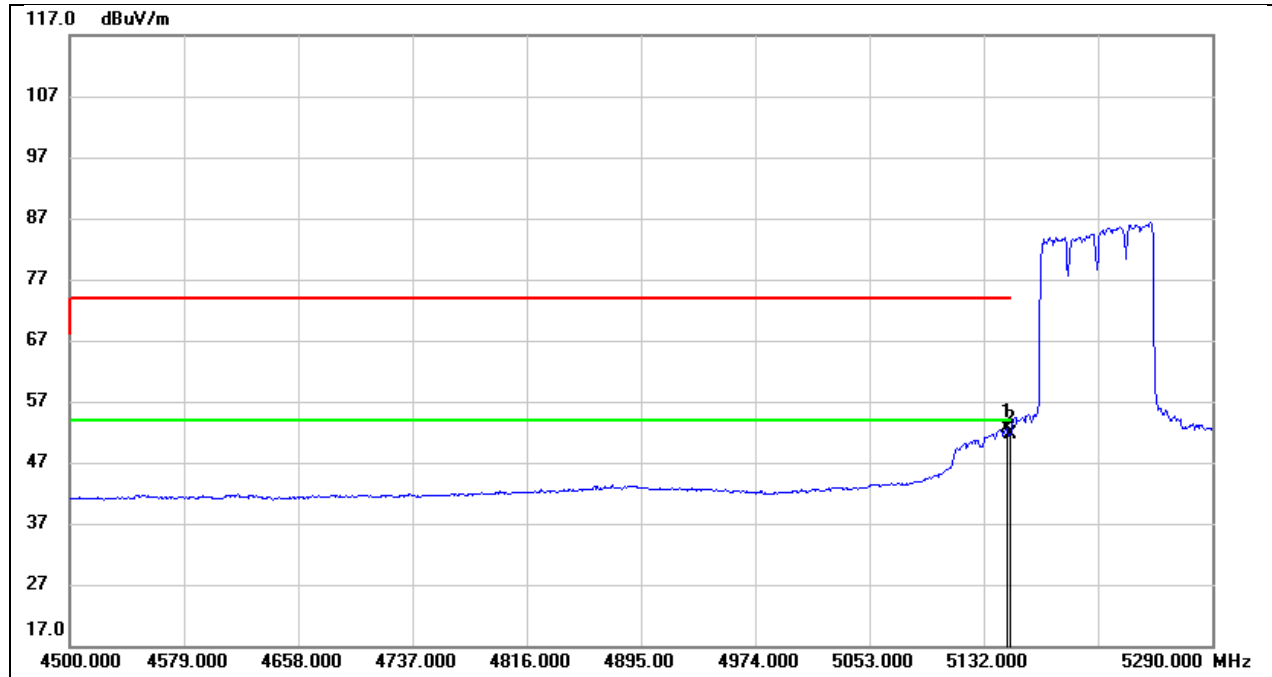


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.800	13.67	38.84	52.51	54.00	-1.49	AVG
2	5150.000	12.69	38.84	51.53	54.00	-2.47	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

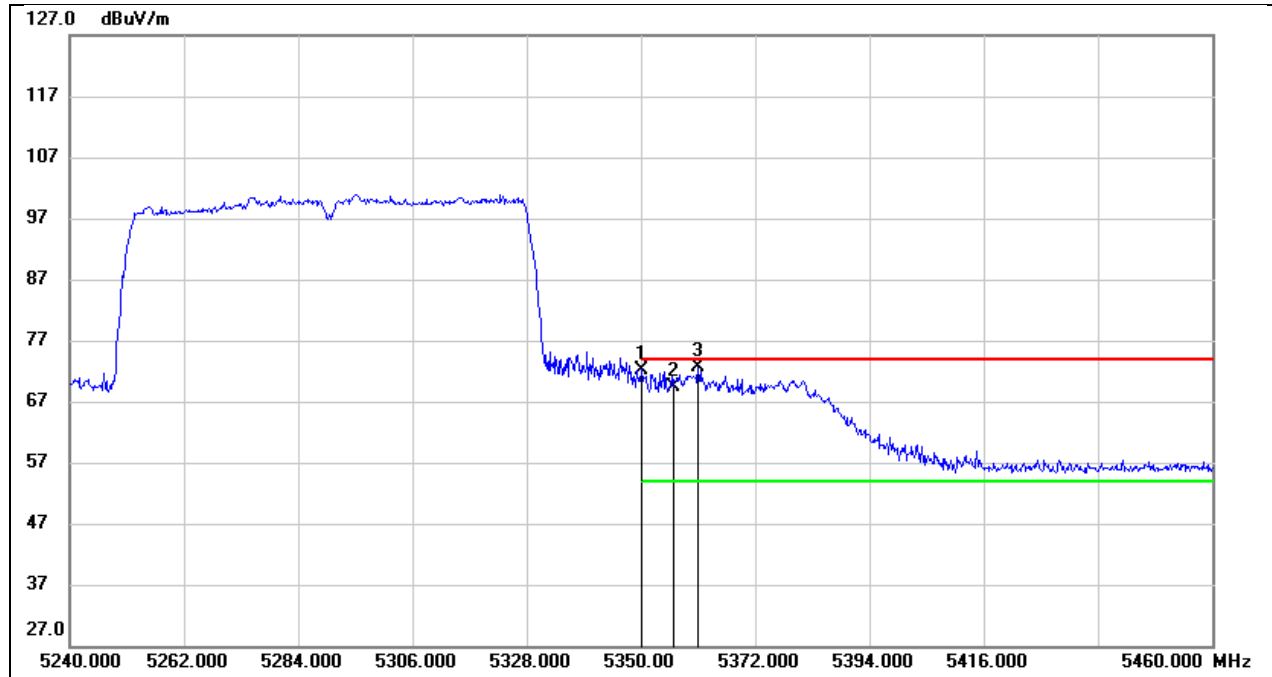


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	32.89	39.29	72.18	74.00	-1.82	peak
2	5356.160	30.15	39.31	69.46	74.00	-4.54	peak
3	5361.000	33.43	39.32	72.75	74.00	-1.25	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

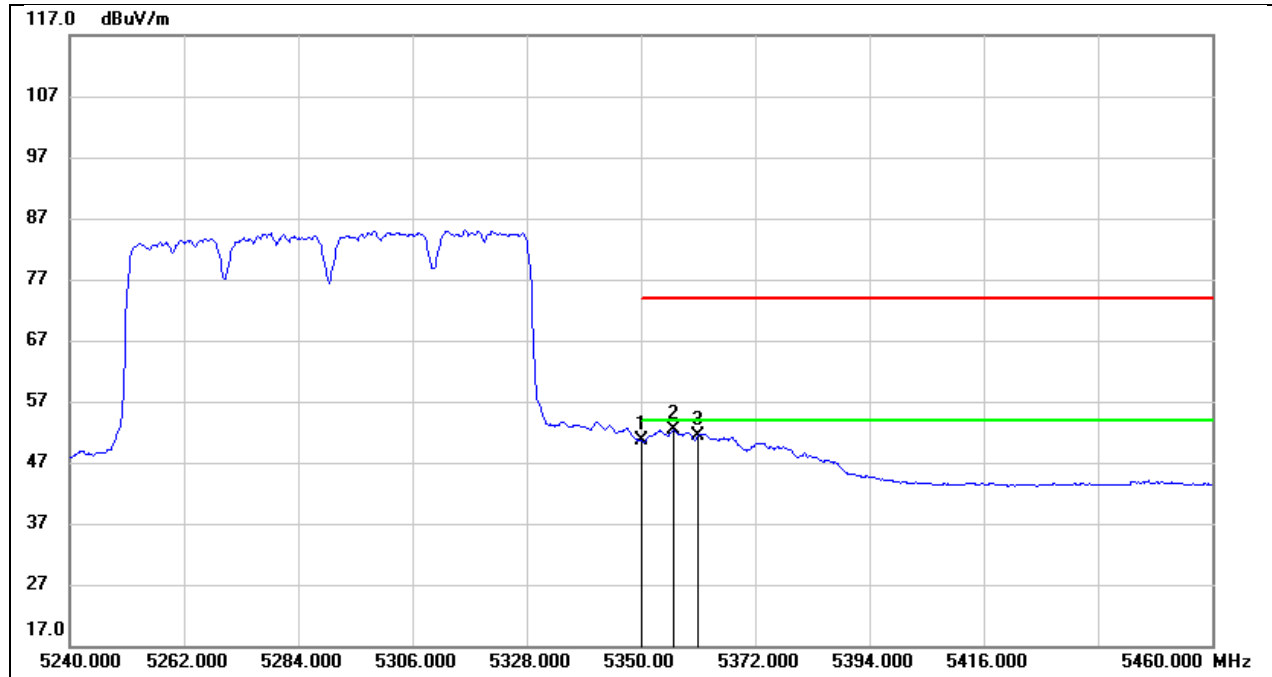


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	11.28	39.29	50.57	54.00	-3.43	AVG
2	5356.160	13.11	39.31	52.42	54.00	-1.58	AVG
3	5361.000	12.01	39.32	51.33	54.00	-2.67	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

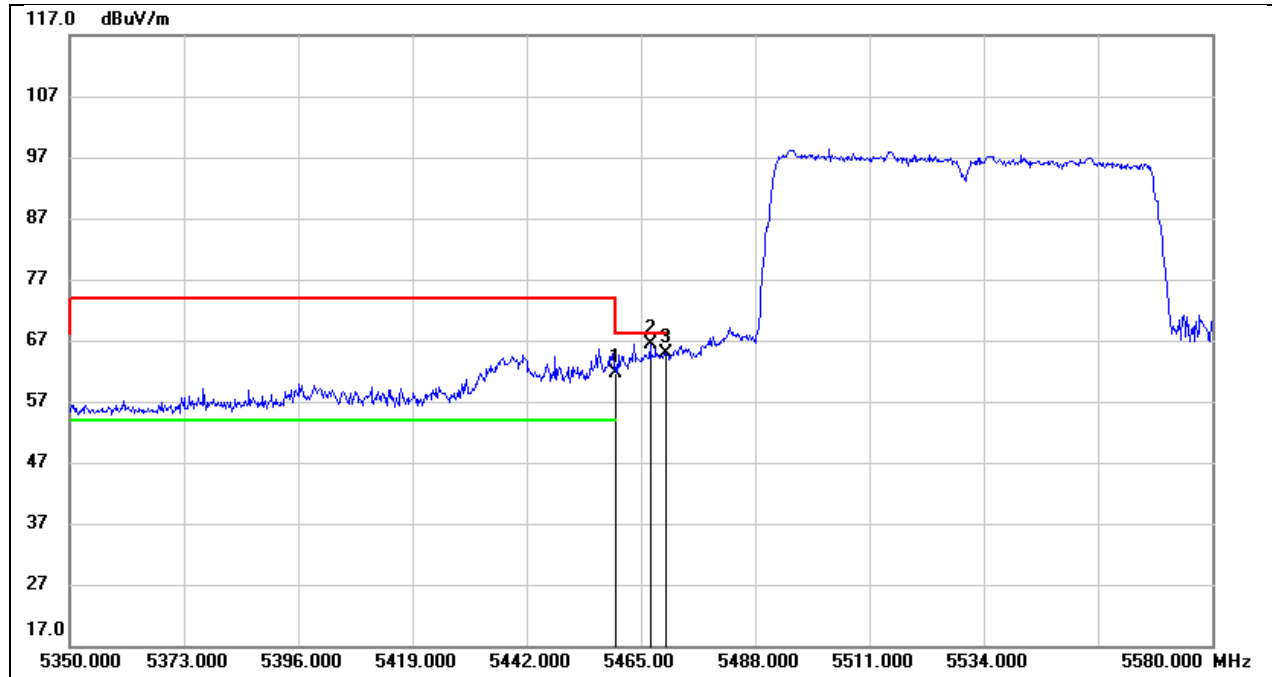


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	21.97	39.56	61.53	68.20	-6.67	peak
2	5466.840	26.90	39.58	66.48	68.20	-1.72	peak
3	5470.000	25.42	39.58	65.00	68.20	-3.20	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

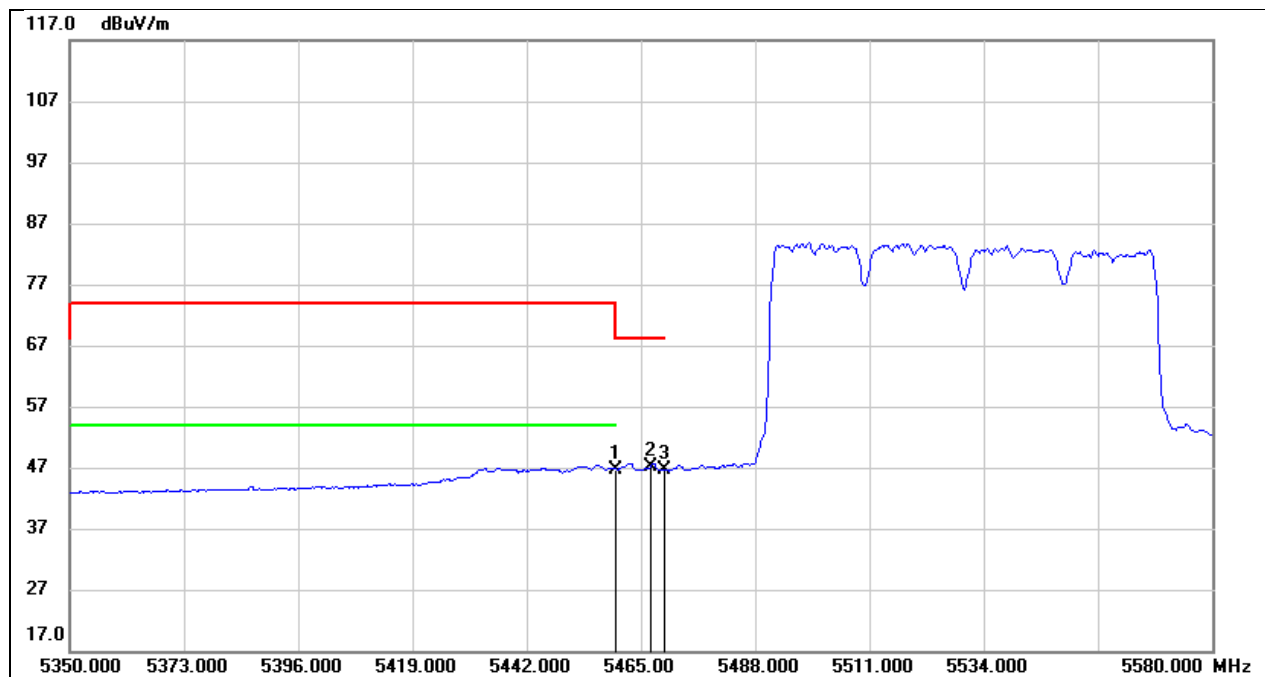


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	7.13	39.56	46.69	54.00	-7.31	AVG
2	5466.840	7.46	39.58	47.04	68.20	-21.16	AVG
3	5470.000	6.99	39.58	46.57	68.20	-21.63	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

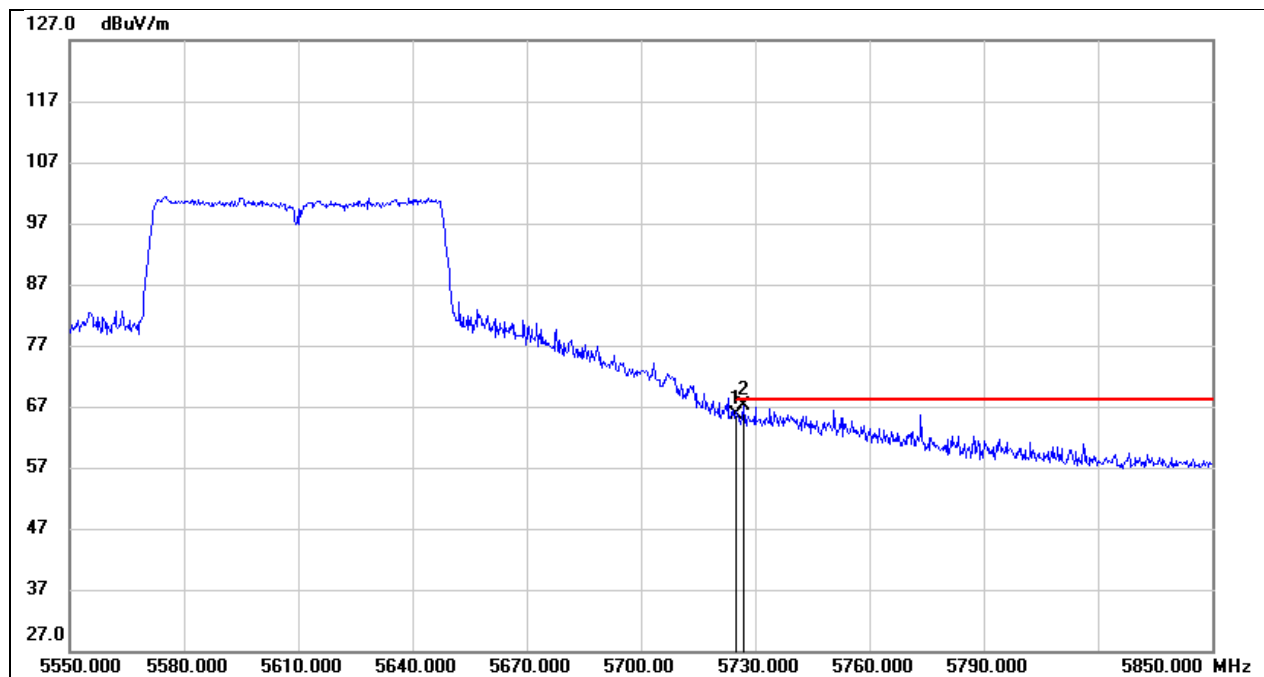


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	25.46	40.09	65.55	68.20	-2.65	peak
2	5727.000	27.05	40.09	67.14	68.20	-1.06	peak

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

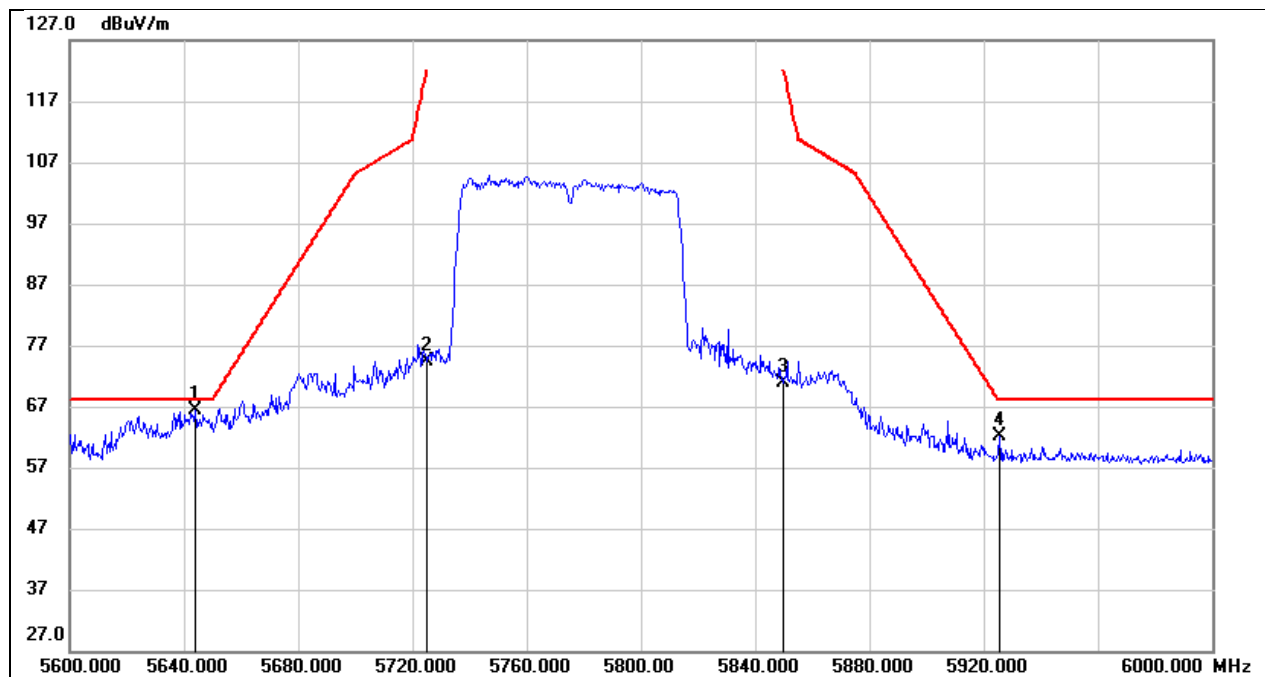


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.000	26.36	39.98	66.34	68.20	-1.86	peak
2	5725.000	34.17	40.09	74.26	122.20	-47.94	peak
3	5850.000	30.61	40.30	70.91	122.20	-51.29	peak
4	5925.600	21.65	40.47	62.12	68.20	-6.08	peak

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

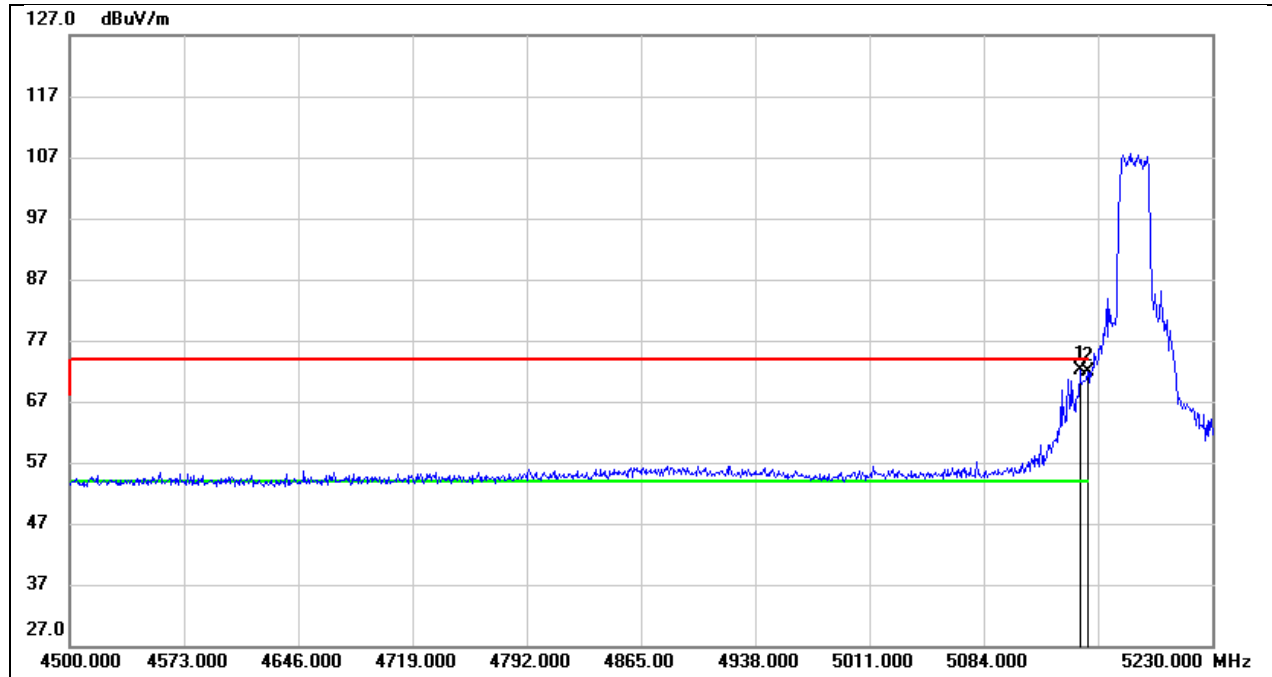


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.320	33.18	38.83	72.01	74.00	-1.99	peak
2	5150.000	32.94	38.84	71.78	74.00	-2.22	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

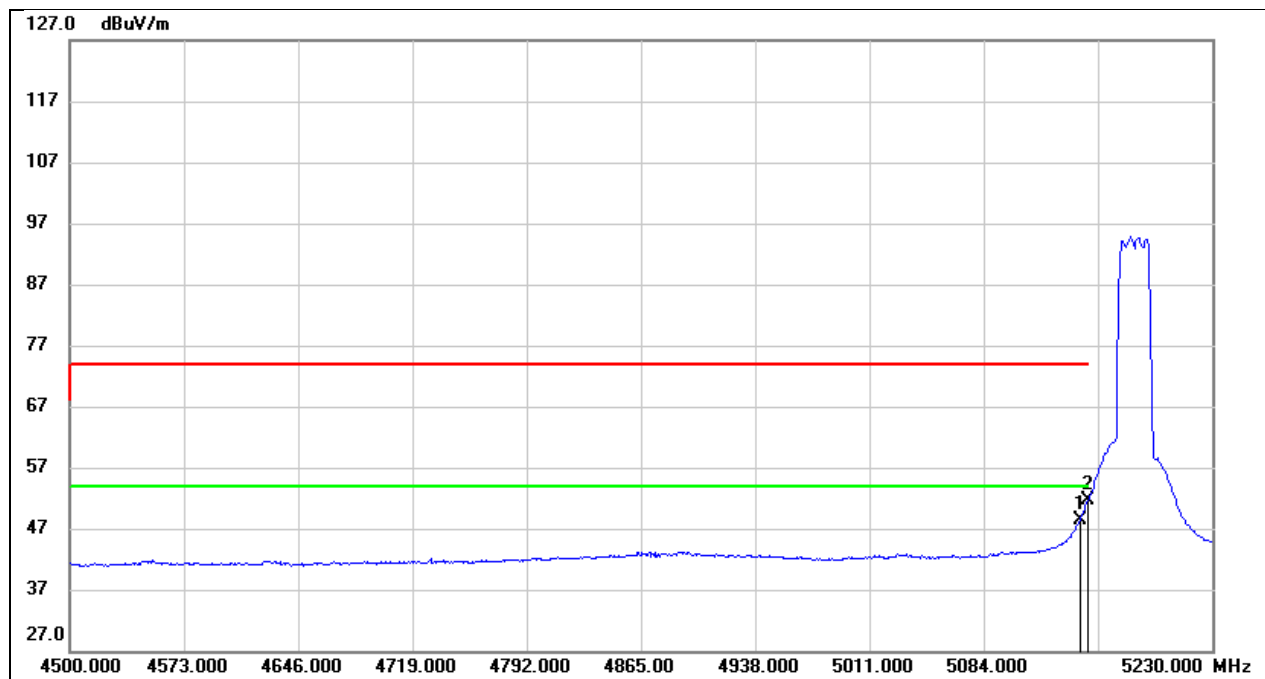


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.320	9.51	38.83	48.34	54.00	-5.66	AVG
2	5150.000	12.81	38.84	51.65	54.00	-2.35	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

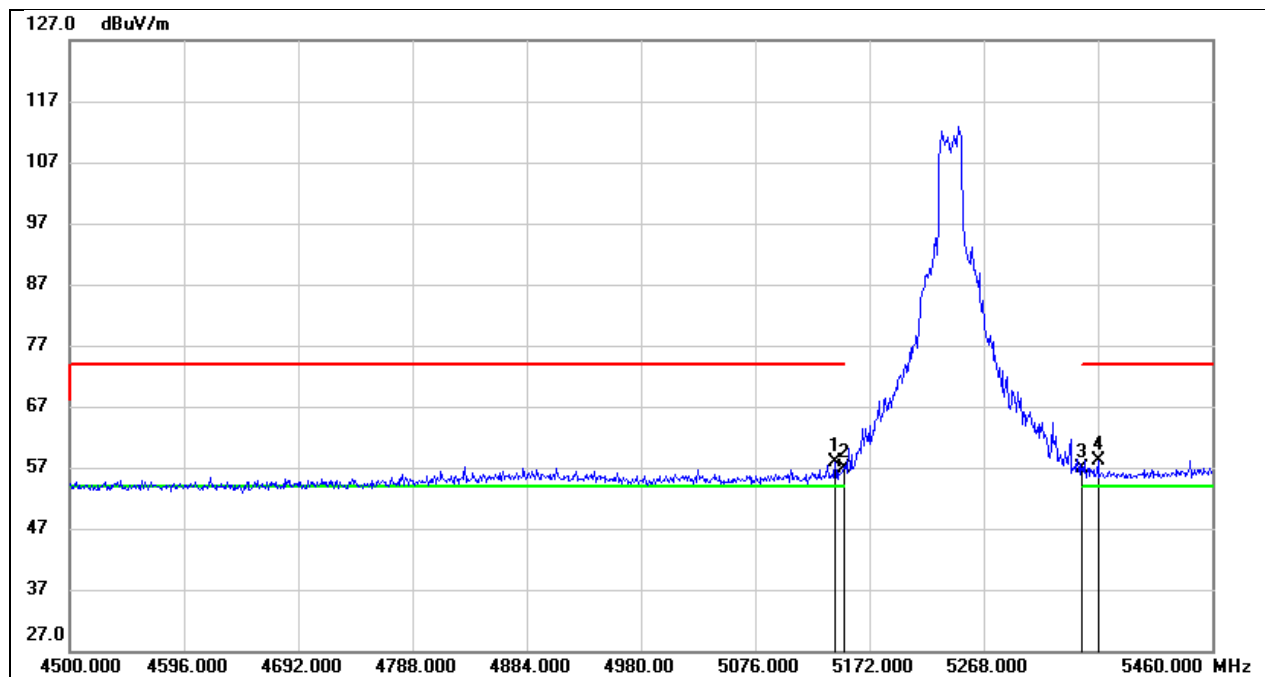


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.200	19.02	38.83	57.85	74.00	-16.15	peak
2	5150.000	18.14	38.84	56.98	74.00	-17.02	peak
3	5350.000	17.68	39.29	56.97	74.00	-17.03	peak
4	5364.000	18.80	39.33	58.13	74.00	-15.87	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

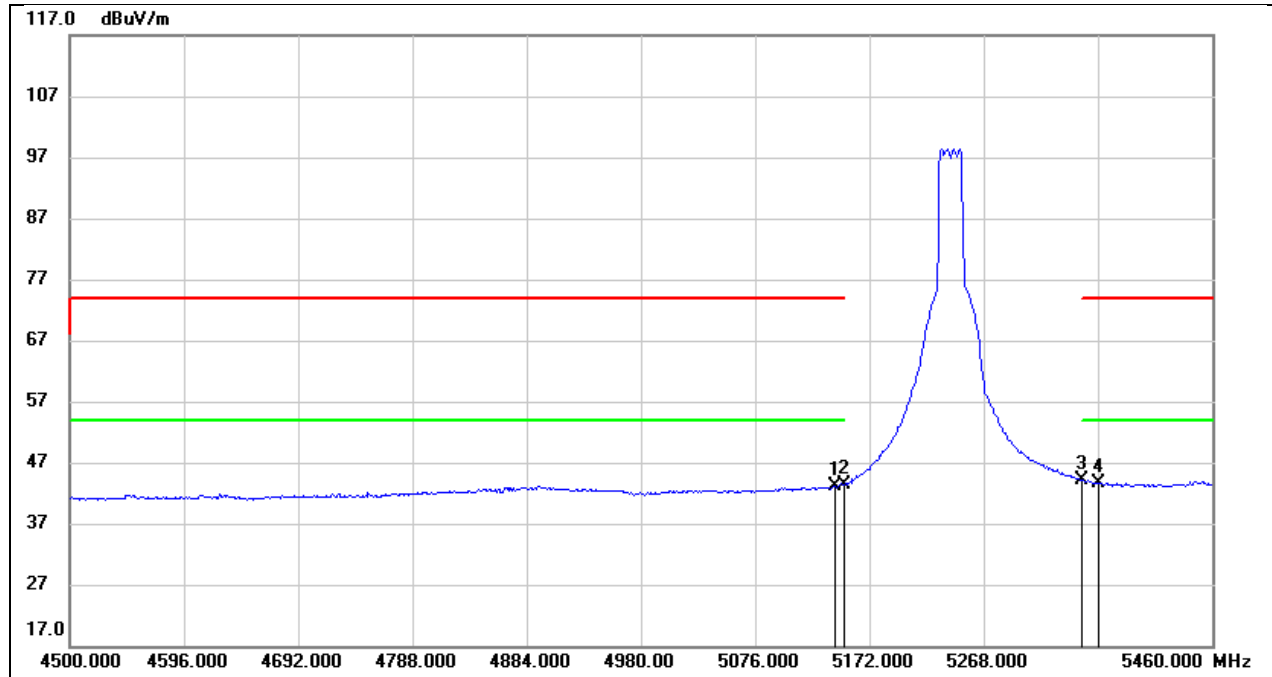


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.200	4.32	38.83	43.15	54.00	-10.85	AVG
2	5150.000	4.66	38.84	43.50	54.00	-10.50	AVG
3	5350.000	4.91	39.29	44.20	54.00	-9.80	AVG
4	5364.000	4.31	39.33	43.64	54.00	-10.36	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

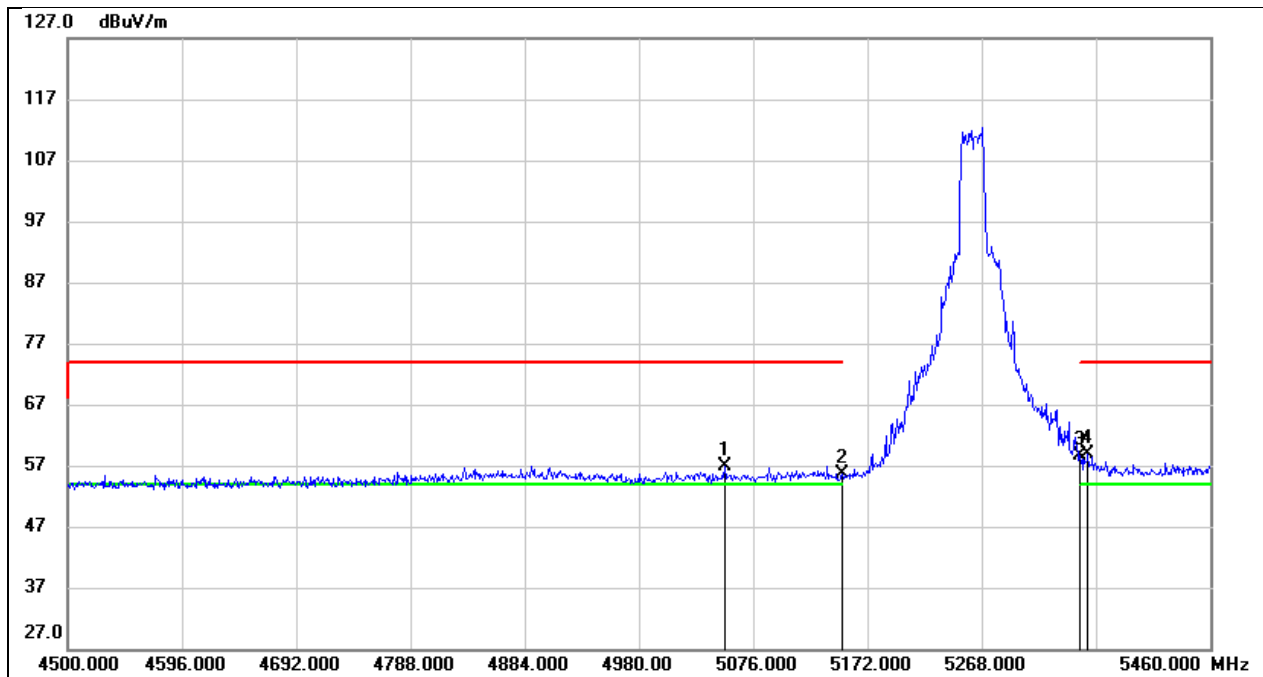


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.000	18.12	38.68	56.80	74.00	-17.20	peak
2	5150.000	16.86	38.84	55.70	74.00	-18.30	peak
3	5350.000	19.30	39.29	58.59	74.00	-15.41	peak
4	5357.280	19.67	39.31	58.98	74.00	-15.02	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

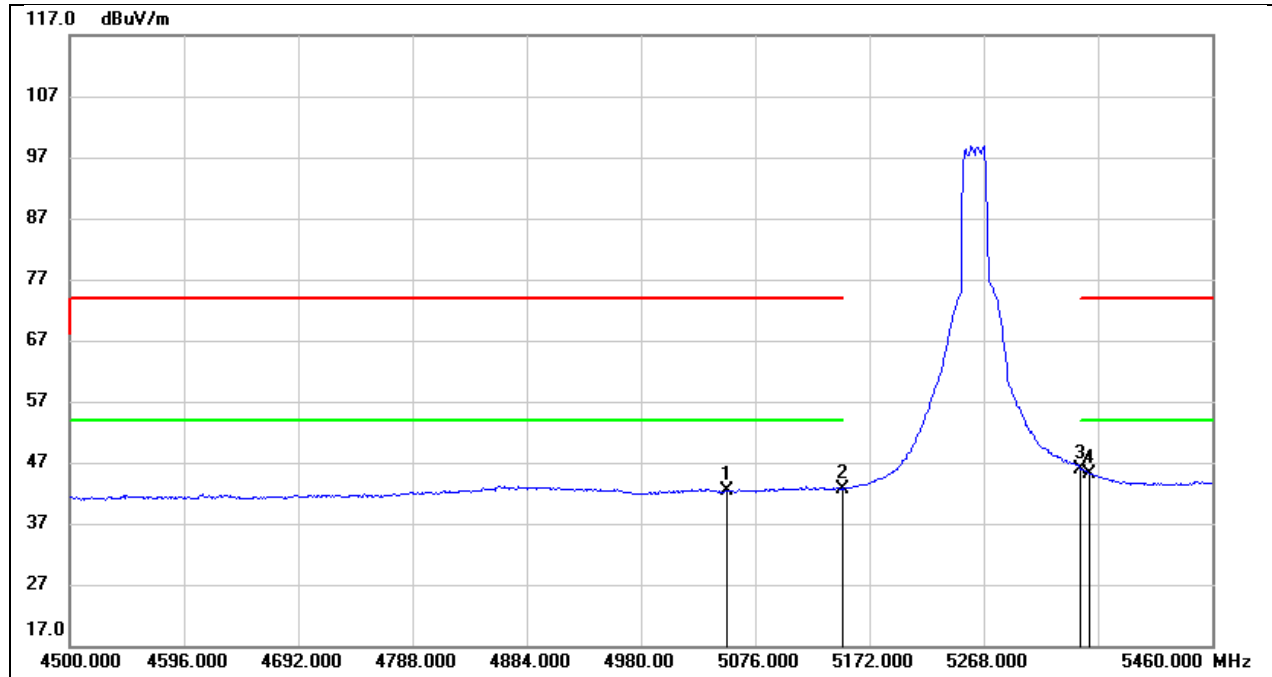


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.000	3.58	38.68	42.26	54.00	-11.74	AVG
2	5150.000	3.89	38.84	42.73	54.00	-11.27	AVG
3	5350.000	6.57	39.29	45.86	54.00	-8.14	AVG
4	5357.280	5.84	39.31	45.15	54.00	-8.85	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

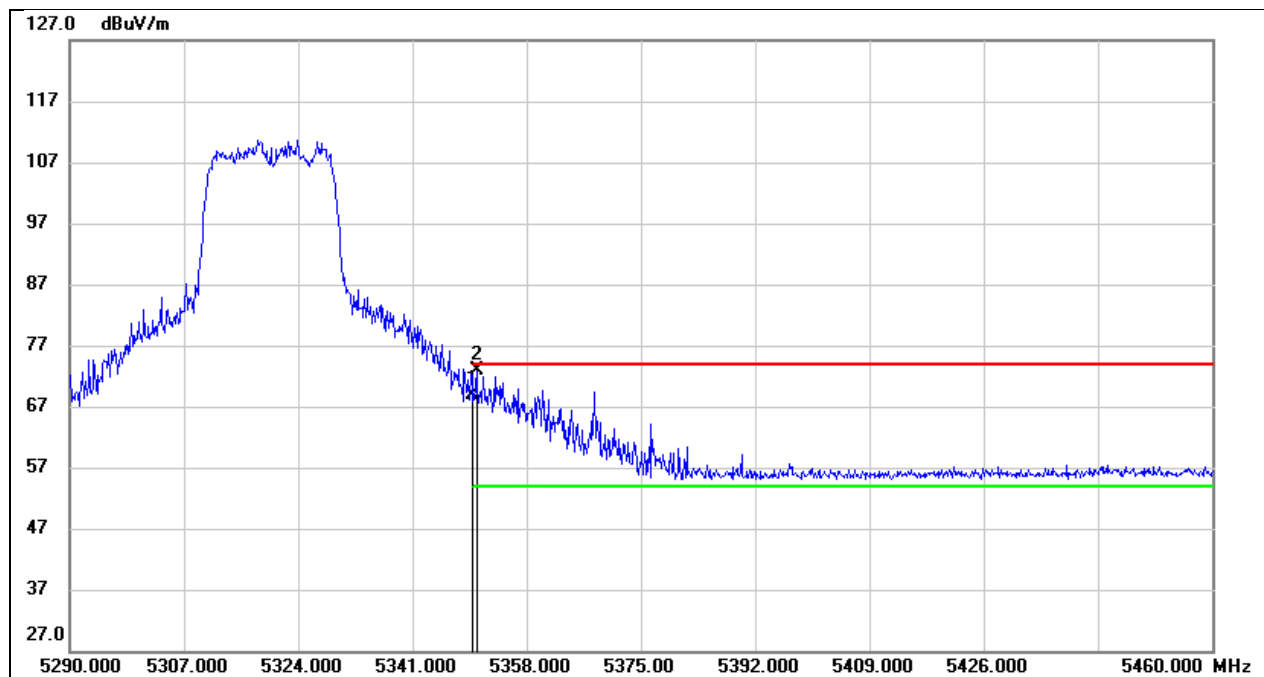


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	29.65	39.29	68.94	74.00	-5.06	peak
2	5350.520	33.57	39.30	72.87	74.00	-1.13	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

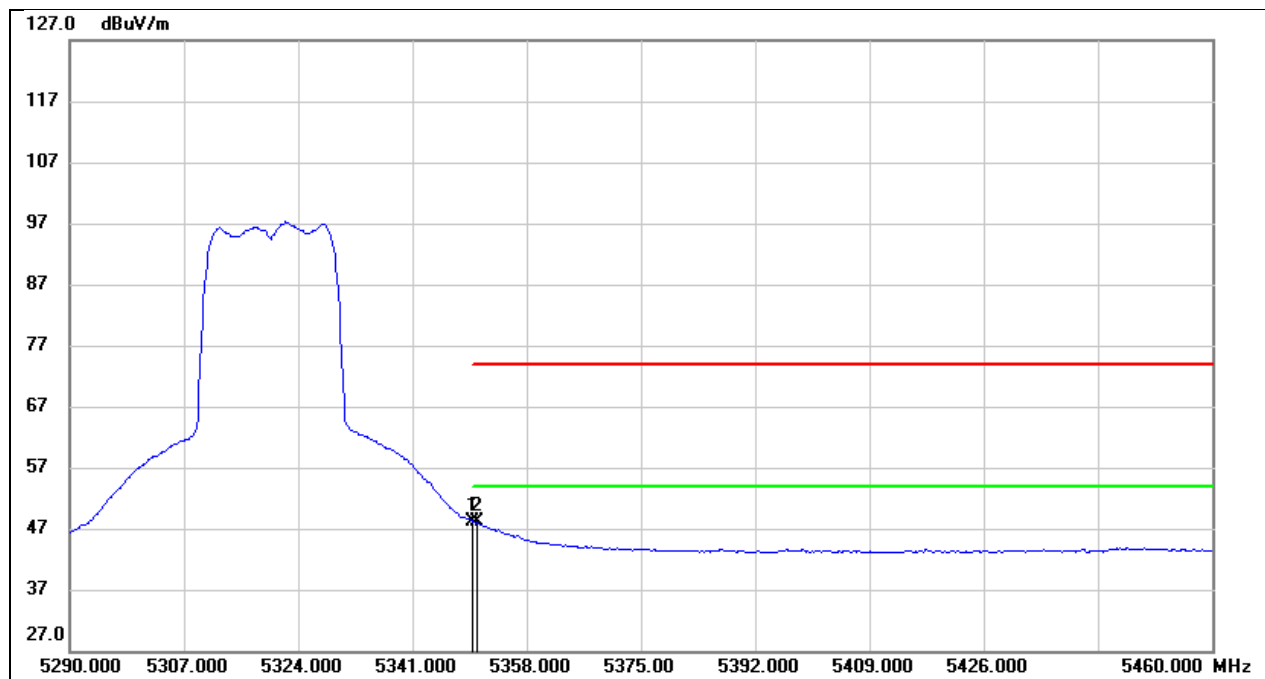


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	8.91	39.29	48.20	54.00	-5.80	AVG
2	5350.520	8.71	39.30	48.01	54.00	-5.99	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

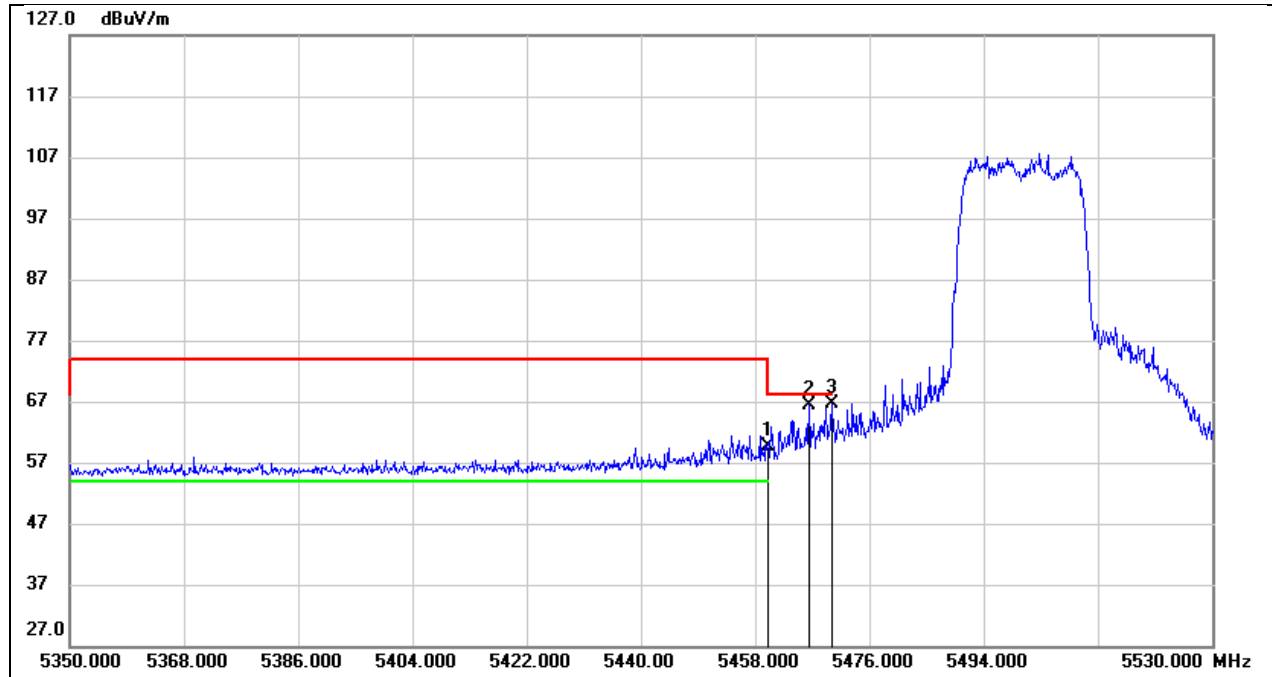


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	19.95	39.56	59.51	68.20	-8.69	peak
2	5466.460	26.92	39.58	66.50	68.20	-1.70	peak
3	5470.000	26.93	39.58	66.51	68.20	-1.69	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

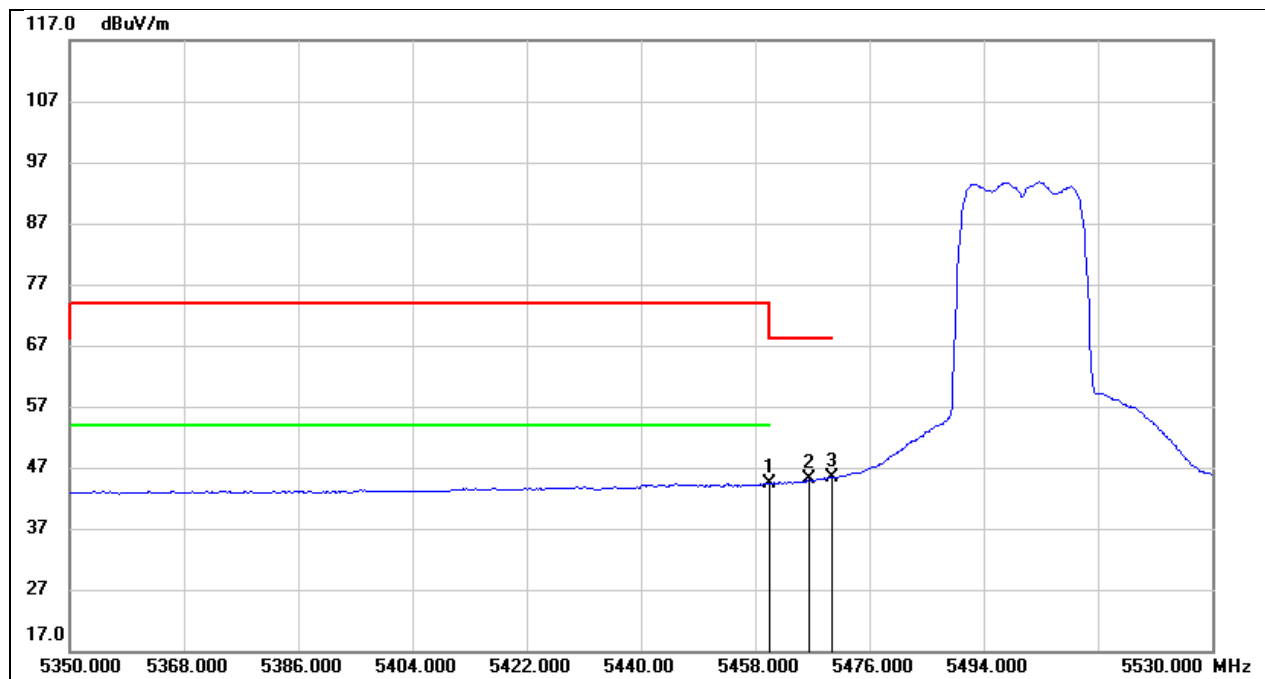


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	4.79	39.56	44.35	54.00	-9.65	AVG
2	5466.460	5.48	39.58	45.06	68.20	-23.14	AVG
3	5470.000	5.76	39.58	45.34	68.20	-22.86	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

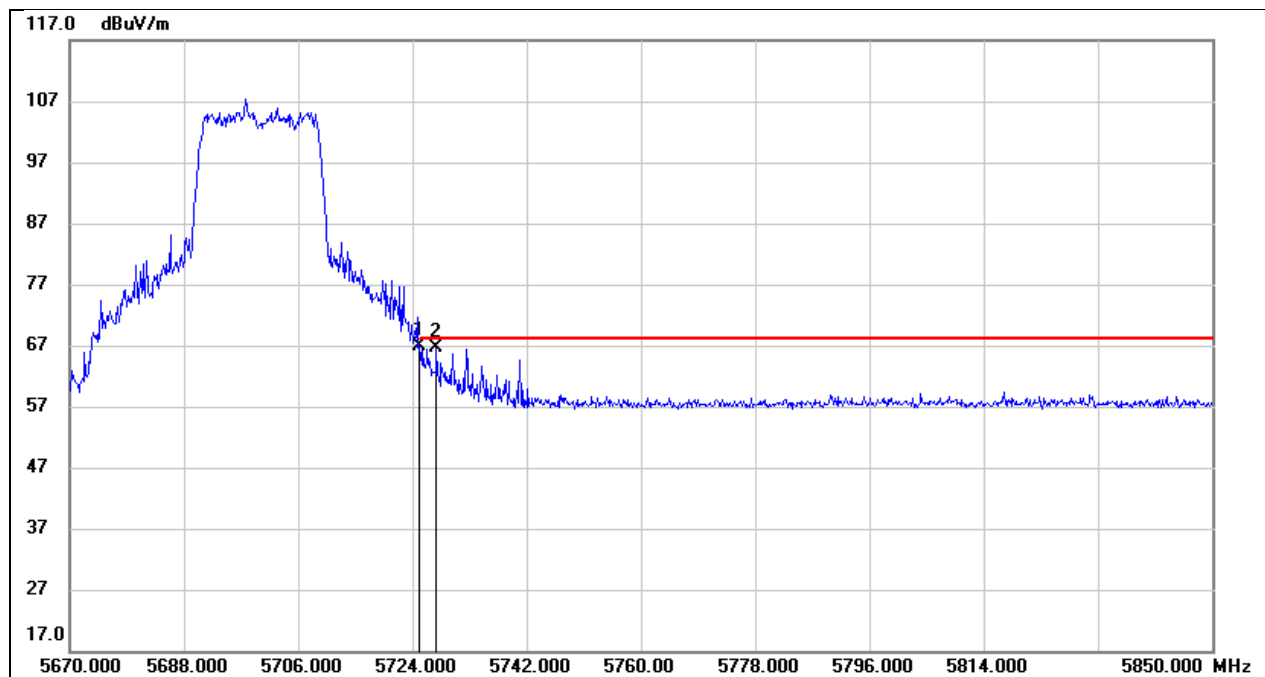


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	26.87	40.09	66.96	68.20	-1.24	peak
2	5727.780	26.55	40.09	66.64	68.20	-1.56	peak

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

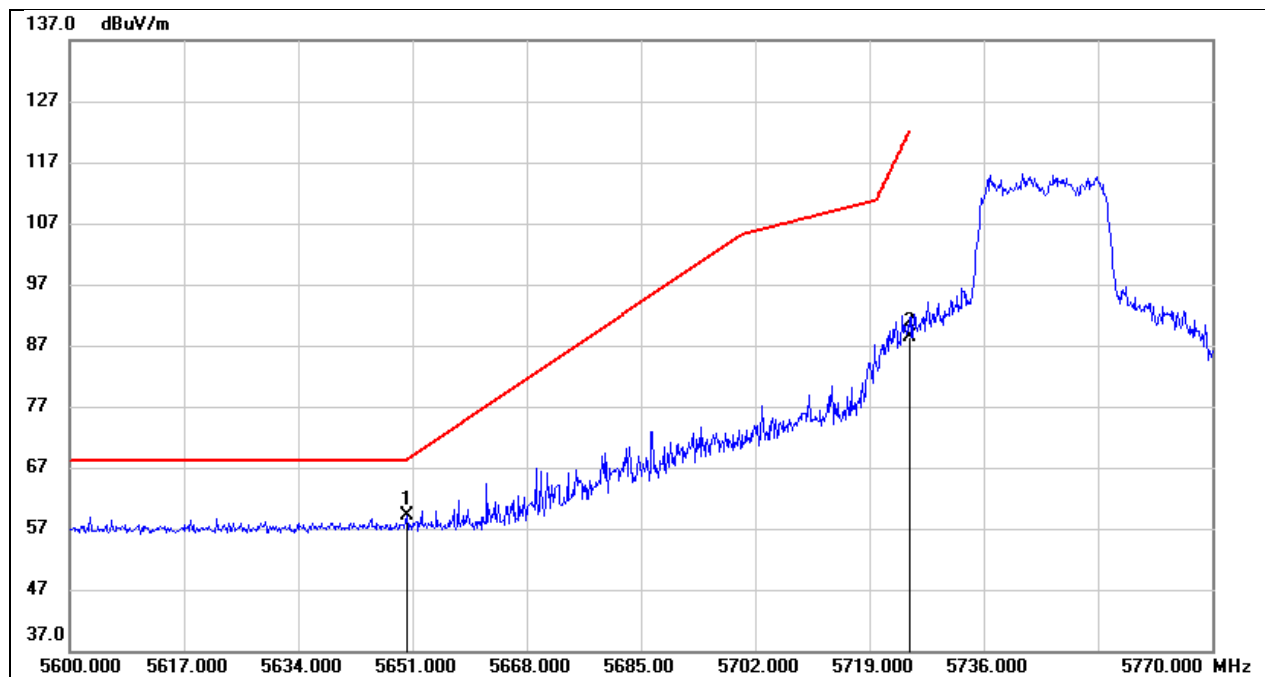


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.150	19.16	39.99	59.15	68.31	-9.16	peak
2	5725.000	48.37	40.09	88.46	122.20	-33.74	peak

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

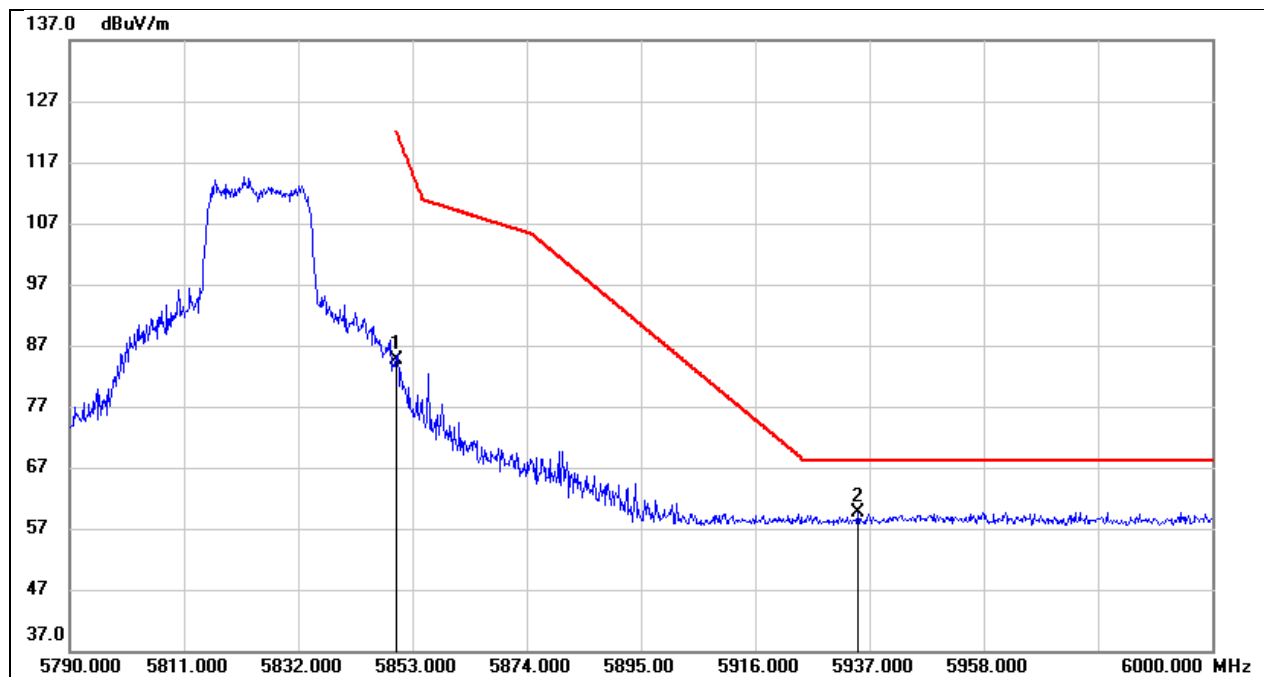


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	44.42	40.30	84.72	122.20	-37.48	peak
2	5934.900	19.02	40.50	59.52	68.20	-8.68	peak

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

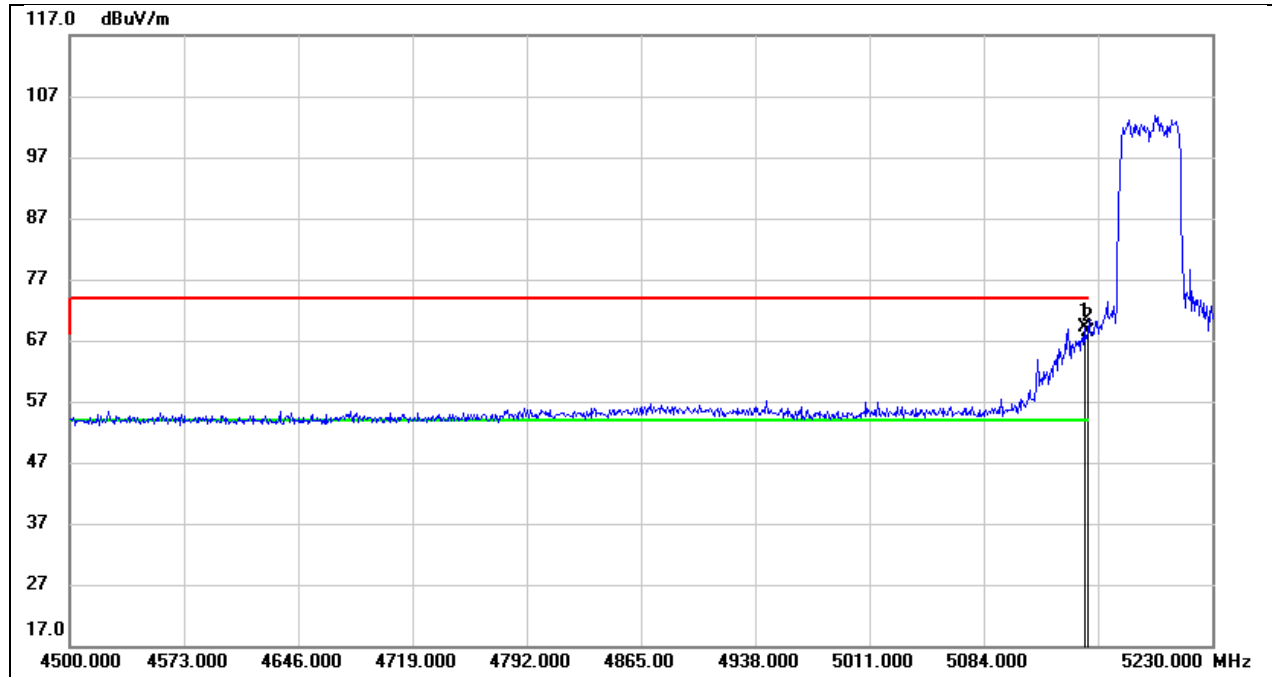


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.240	30.22	38.84	69.06	74.00	-4.94	peak
2	5150.000	29.54	38.84	68.38	74.00	-5.62	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

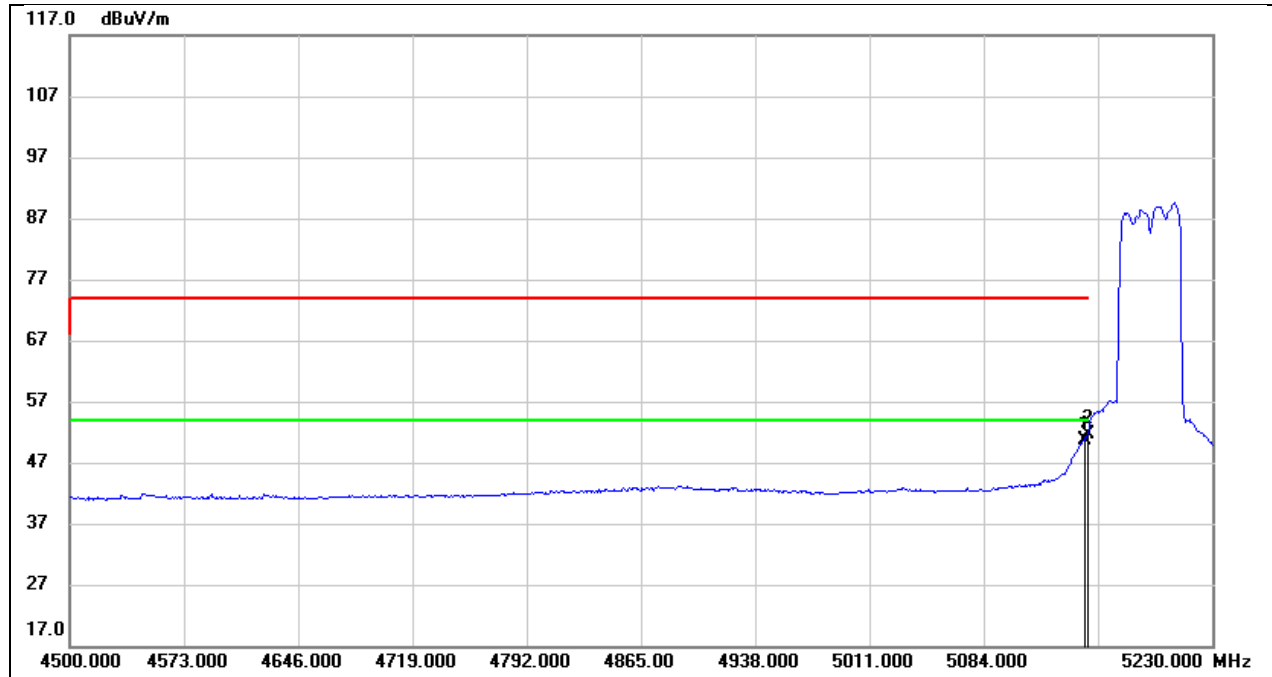


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.240	11.84	38.84	50.68	54.00	-3.32	AVG
2	5150.000	12.85	38.84	51.69	54.00	-2.31	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

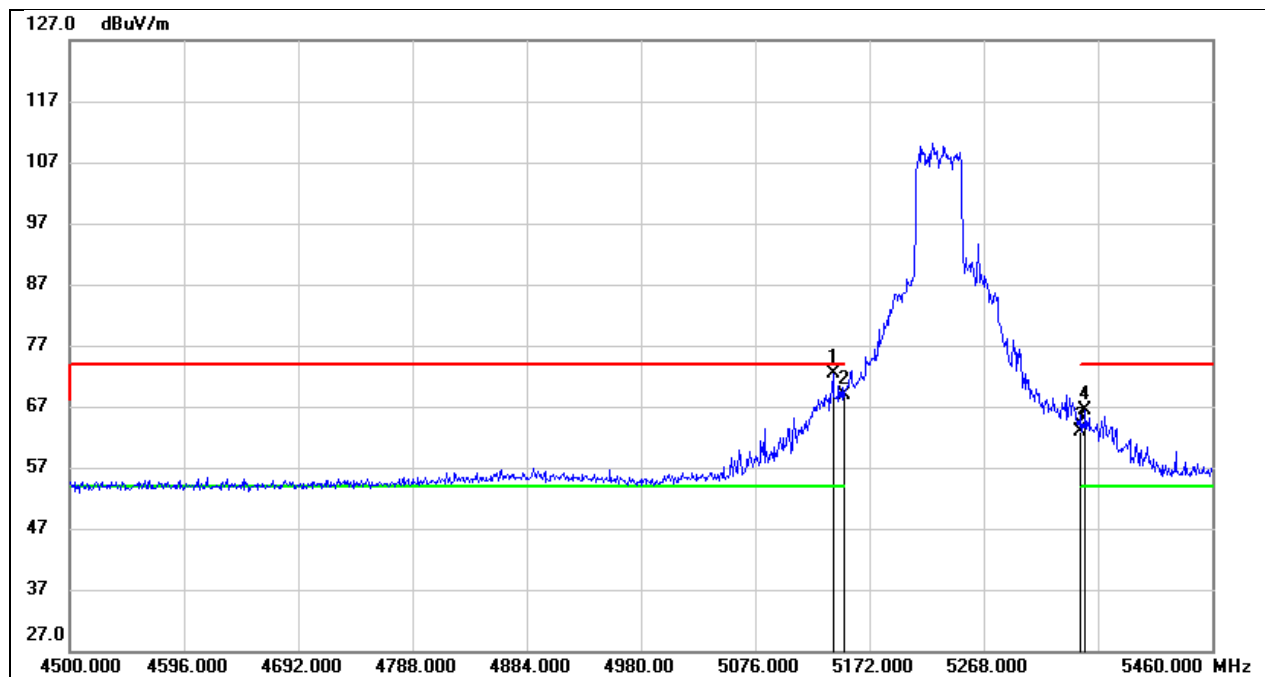


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	33.56	38.83	72.39	74.00	-1.61	peak
2	5150.000	29.98	38.84	68.82	74.00	-5.18	peak
3	5350.000	23.52	39.29	62.81	74.00	-11.19	peak
4	5353.440	27.11	39.30	66.41	74.00	-7.59	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

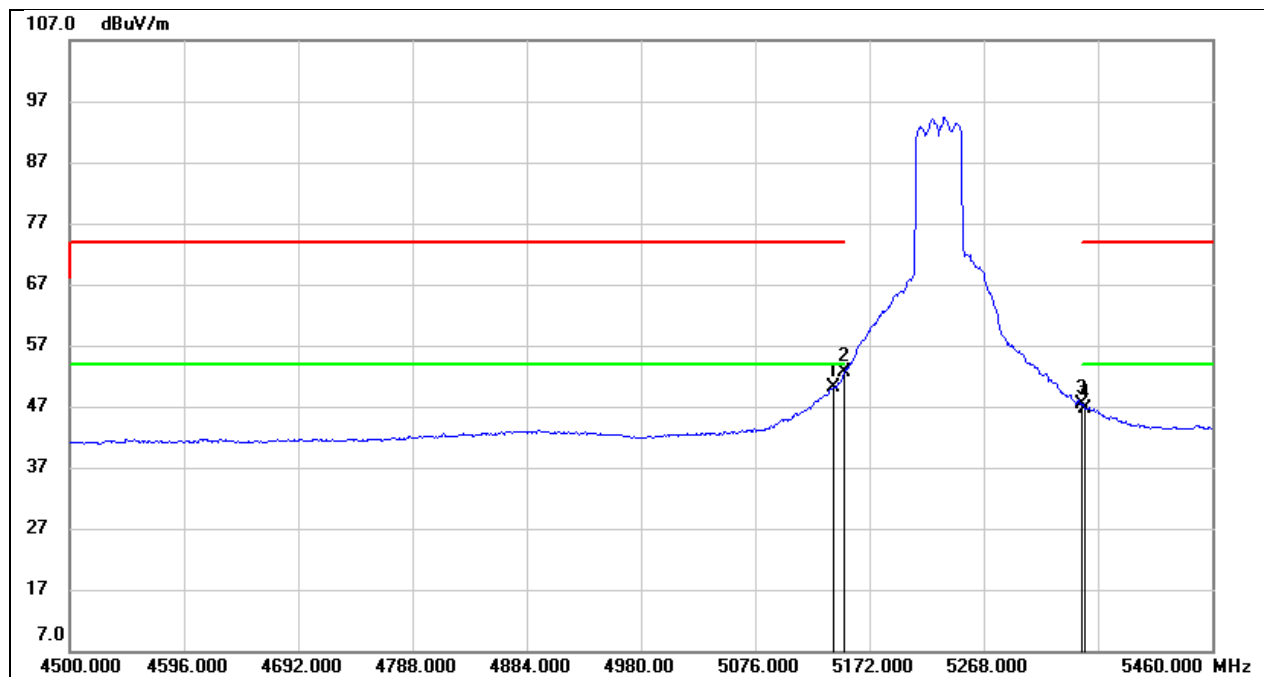


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	11.18	38.83	50.01	54.00	-3.99	AVG
2	5150.000	13.75	38.84	52.59	54.00	-1.41	AVG
3	5350.000	8.01	39.29	47.30	54.00	-6.70	AVG
4	5353.440	7.31	39.30	46.61	54.00	-7.39	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

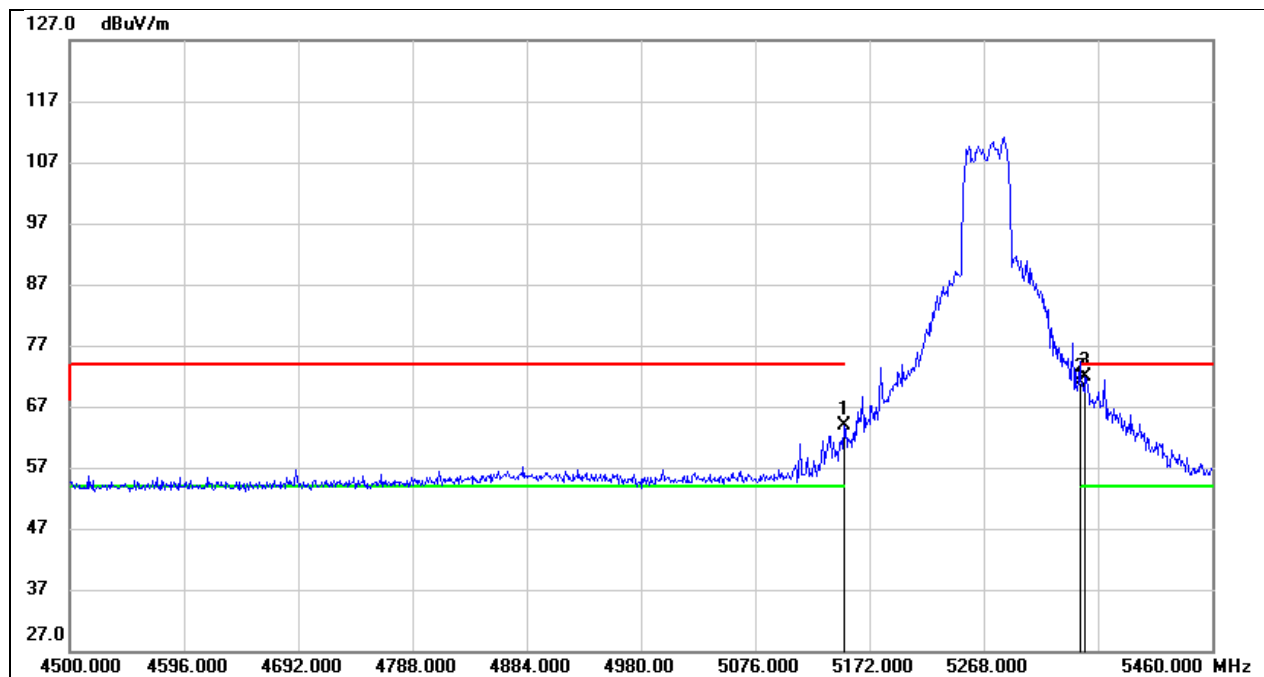


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	24.94	38.84	63.78	74.00	-10.22	peak
2	5350.000	31.63	39.29	70.92	74.00	-3.08	peak
3	5353.440	32.63	39.30	71.93	74.00	-2.07	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

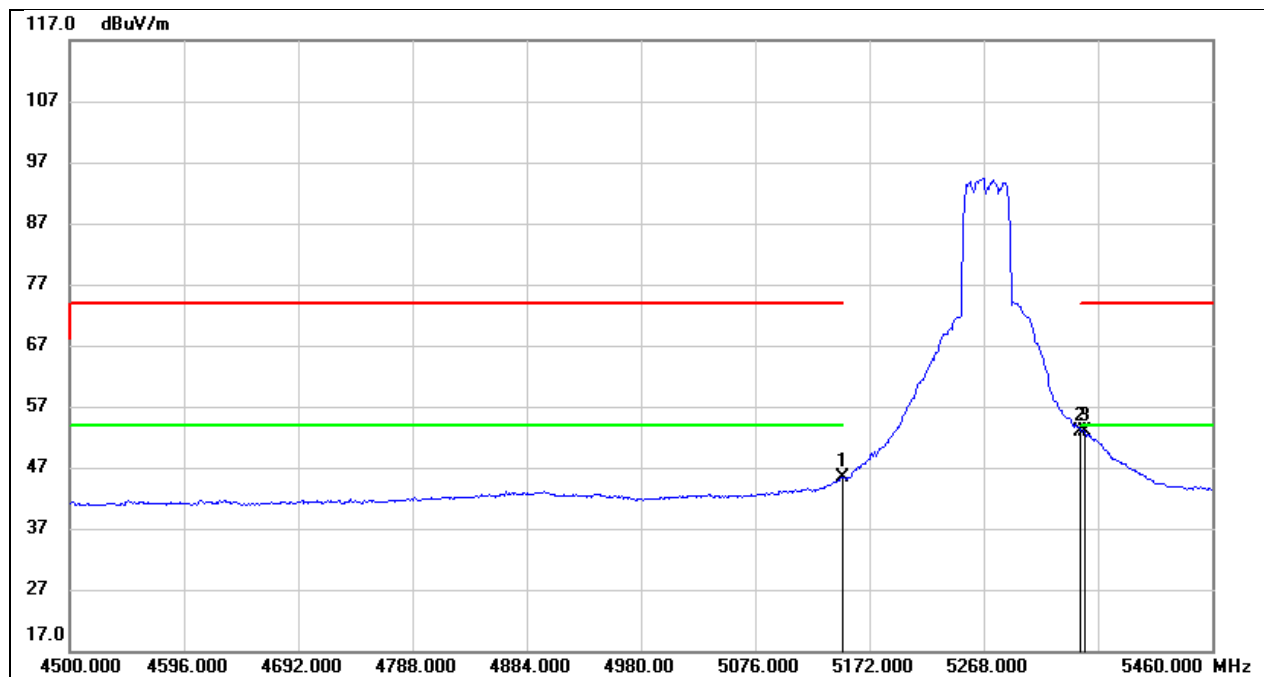


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.55	38.84	45.39	54.00	-8.61	AVG
2	5350.000	13.64	39.29	52.93	54.00	-1.07	AVG
3	5353.440	13.60	39.30	52.90	54.00	-1.10	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

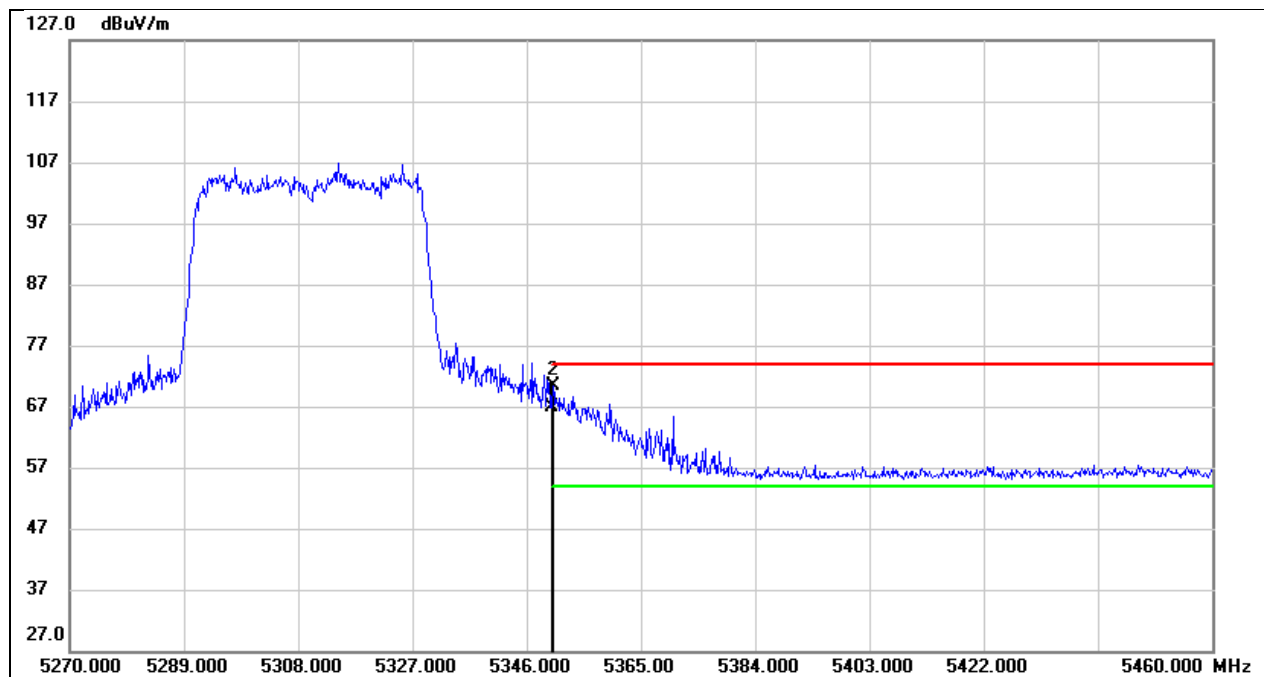


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	27.71	39.29	67.00	74.00	-7.00	peak
2	5350.370	31.19	39.30	70.49	74.00	-3.51	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

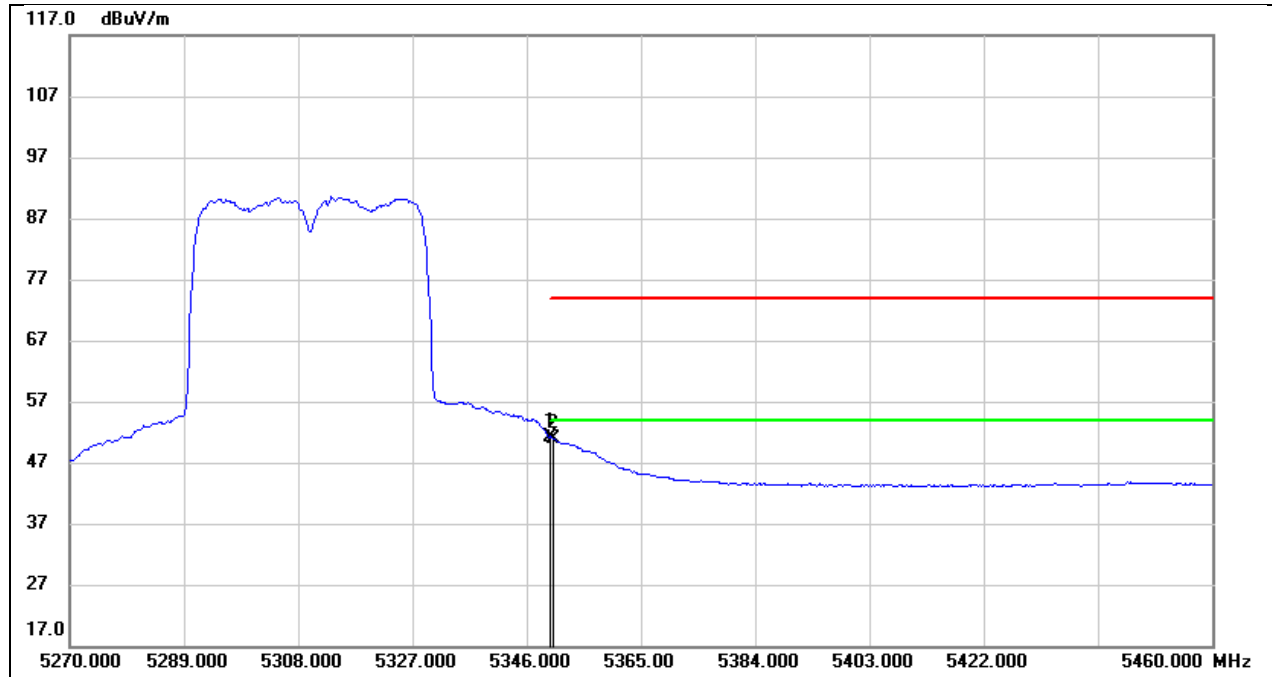


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	11.96	39.29	51.25	54.00	-2.75	AVG
2	5350.370	11.68	39.30	50.98	54.00	-3.02	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

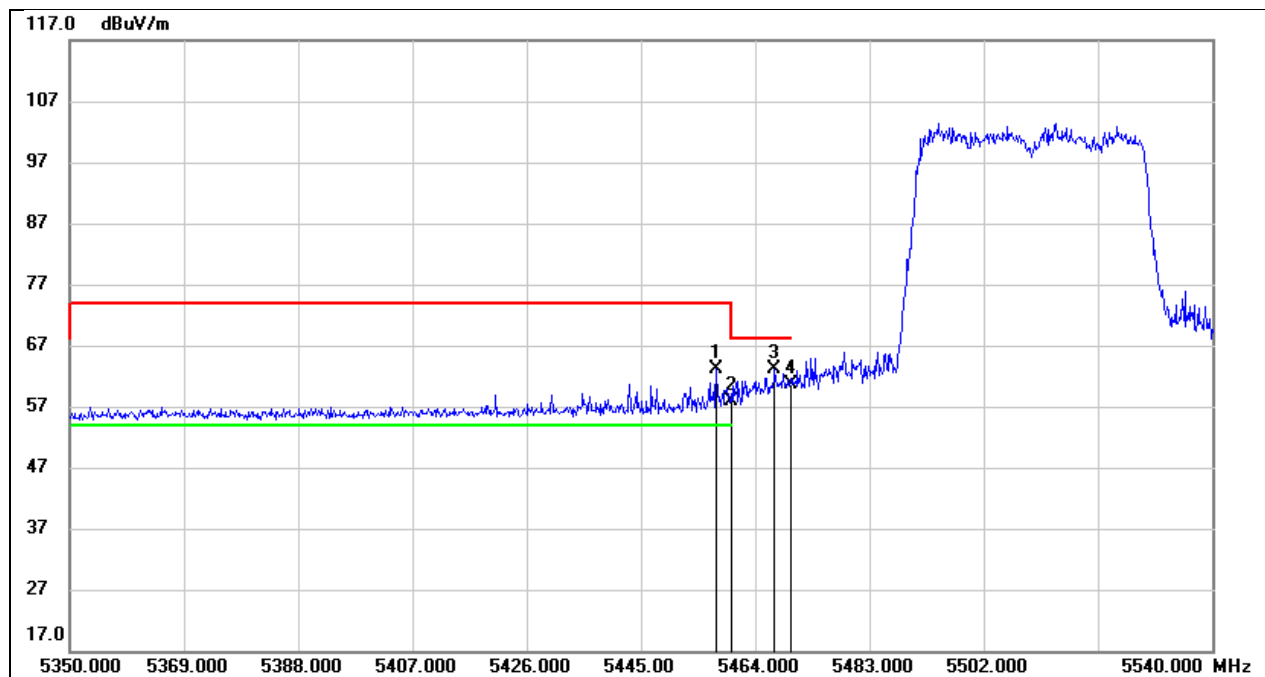


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.540	23.54	39.56	63.10	74.00	-10.90	peak
2	5460.000	18.43	39.56	57.99	68.20	-10.21	peak
3	5467.230	23.51	39.58	63.09	68.20	-5.11	peak
4	5470.000	21.05	39.58	60.63	68.20	-7.57	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

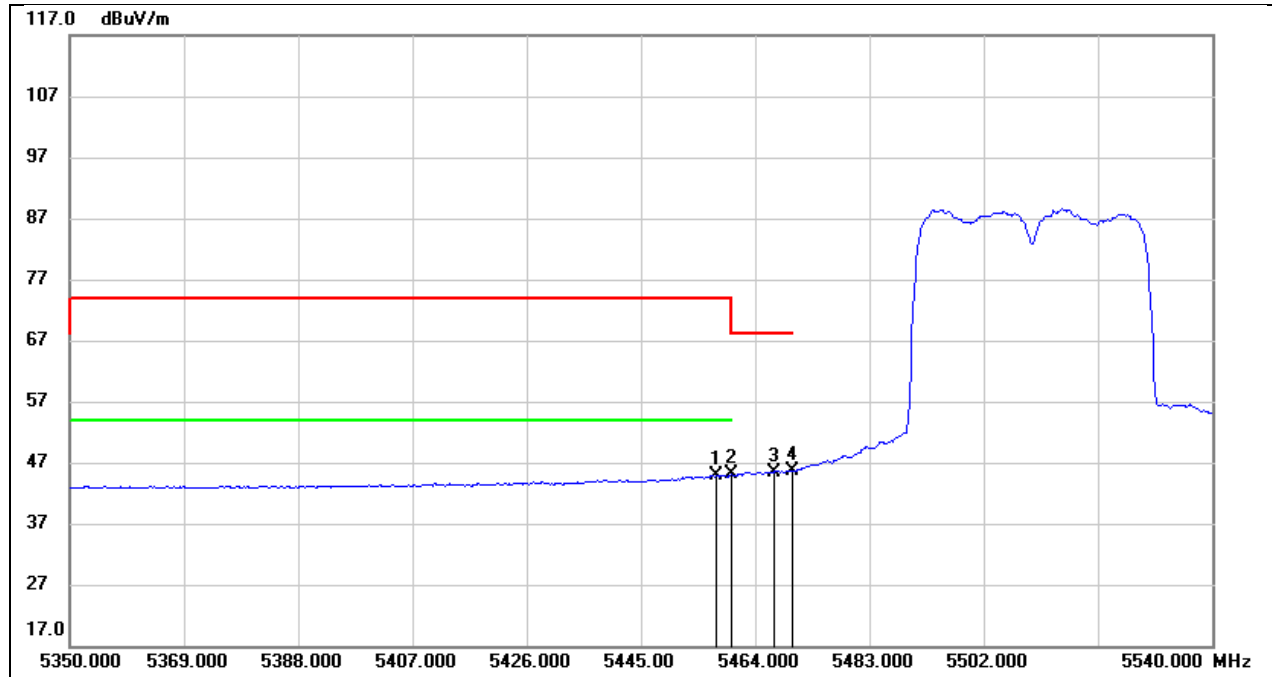


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.540	5.21	39.56	44.77	54.00	-9.23	AVG
2	5460.000	5.45	39.56	45.01	54.00	-8.99	AVG
3	5467.230	5.87	39.58	45.45	68.20	-22.75	AVG
4	5470.000	6.07	39.58	45.65	68.20	-22.55	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

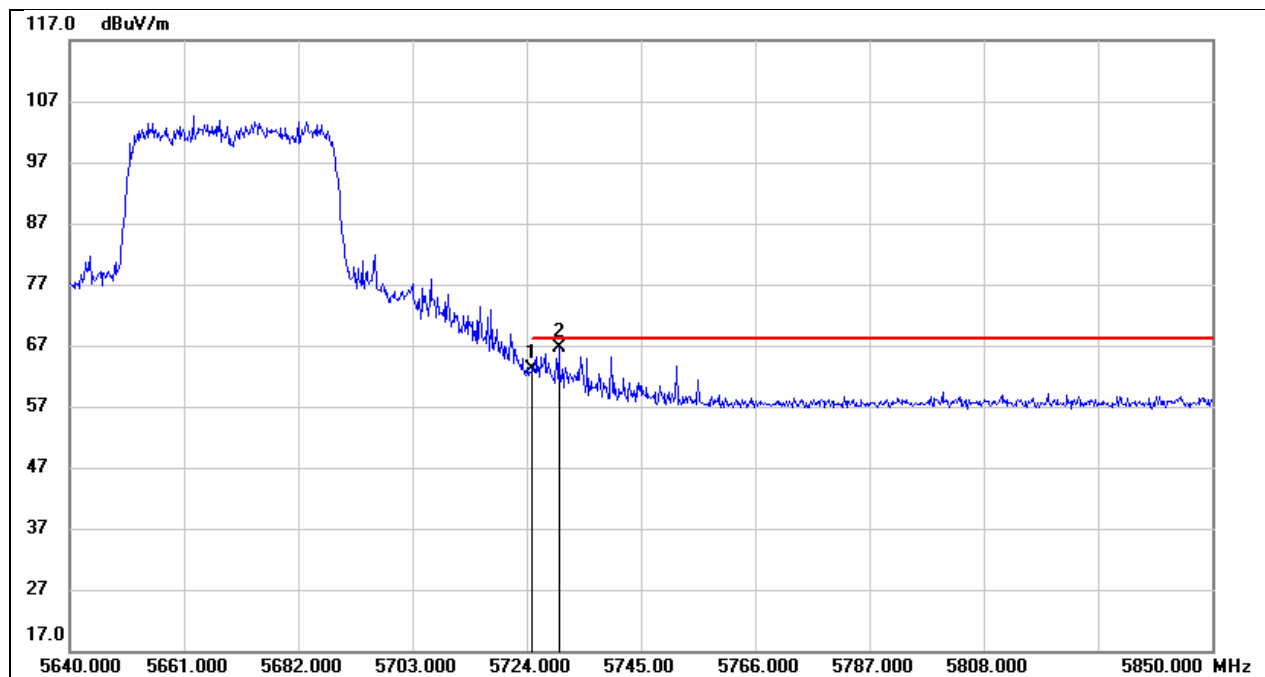


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	23.06	40.09	63.15	68.20	-5.05	peak
2	5729.880	26.60	40.09	66.69	68.20	-1.51	peak

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

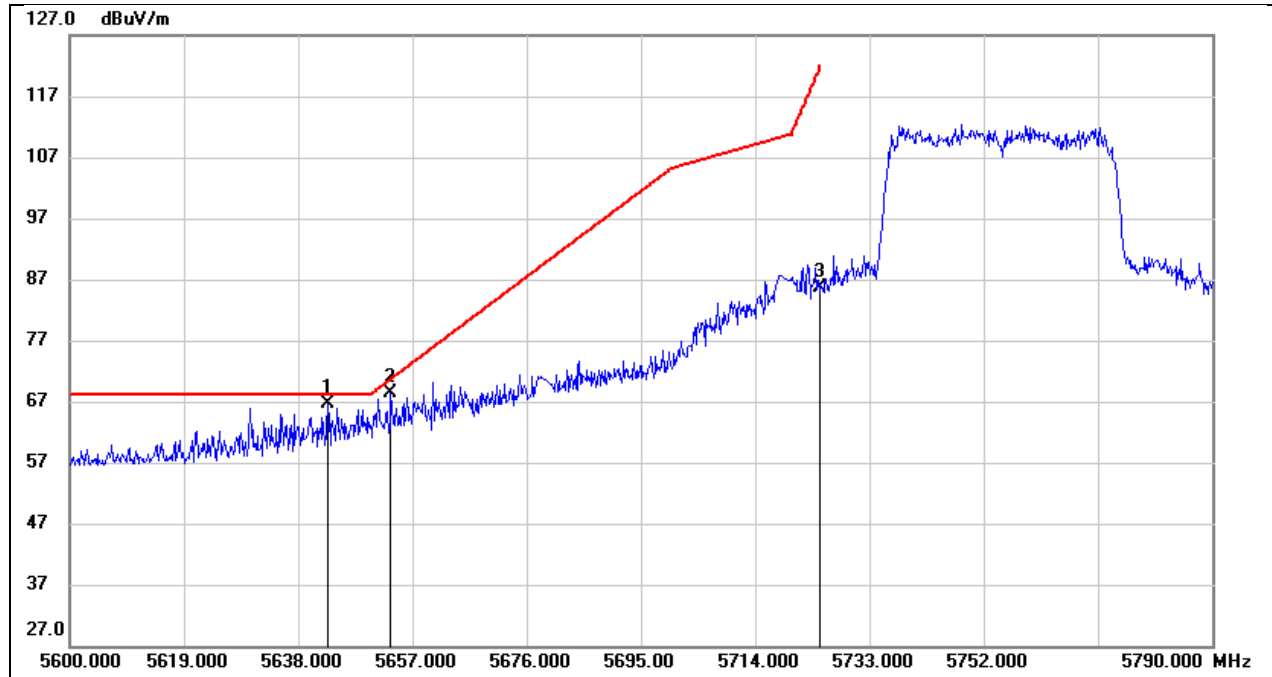


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5642.940	26.70	39.98	66.68	68.20	-1.52	peak
2	5653.390	28.42	40.00	68.42	70.72	-2.30	peak
3	5725.000	45.45	40.09	85.54	122.20	-36.66	peak

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

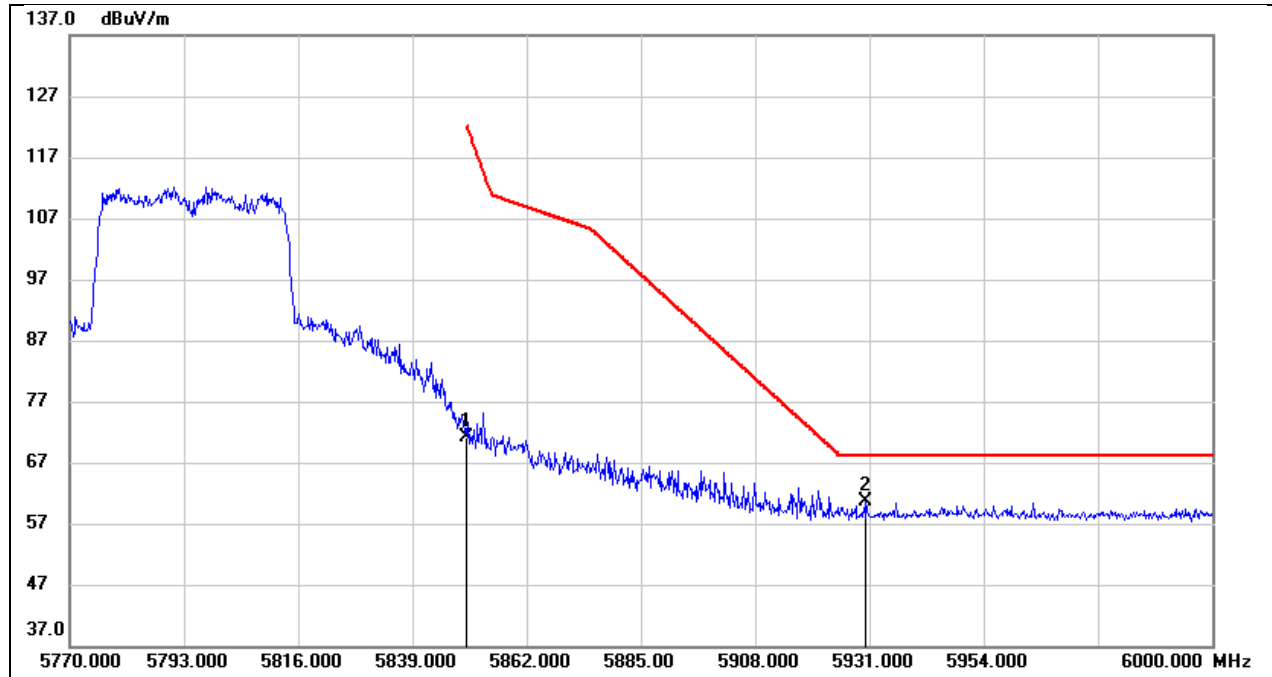


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	30.87	40.30	71.17	122.20	-51.03	peak
2	5930.310	20.21	40.49	60.70	68.20	-7.50	peak

Test Mode:	802.11ax HE80 PK	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

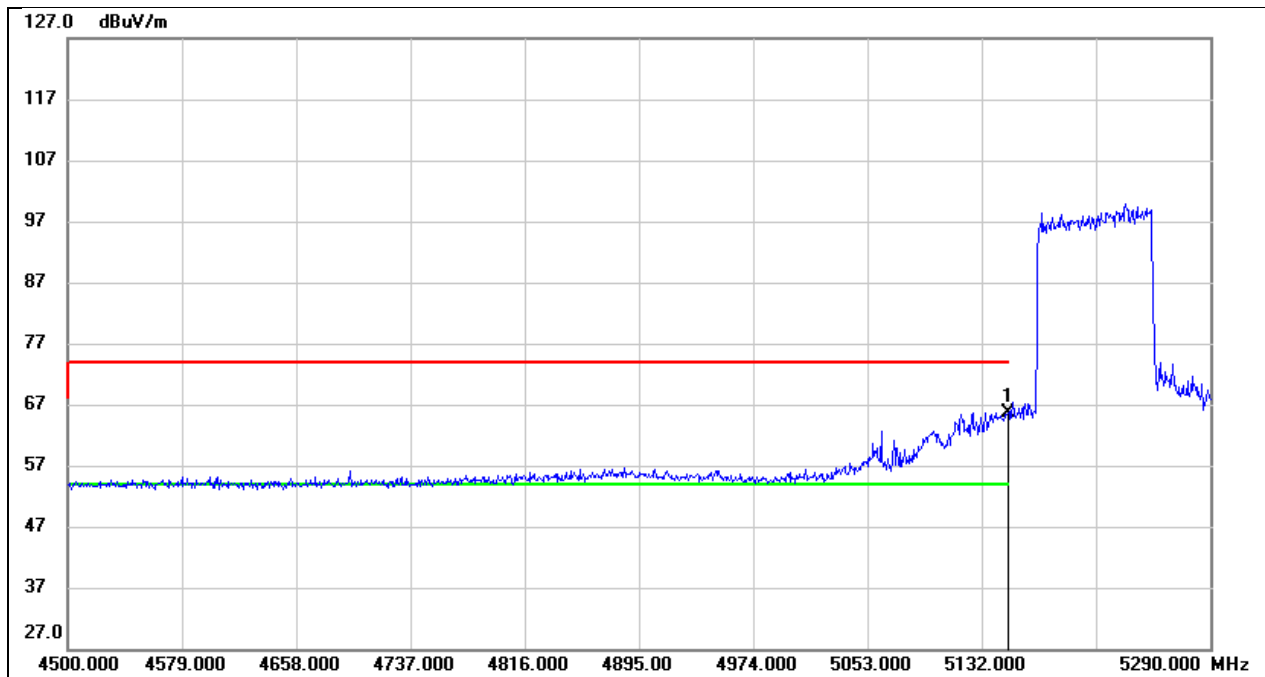


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.88	38.84	65.72	74.00	-8.28	peak

Test Mode:	802.11ax HE80 AV	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

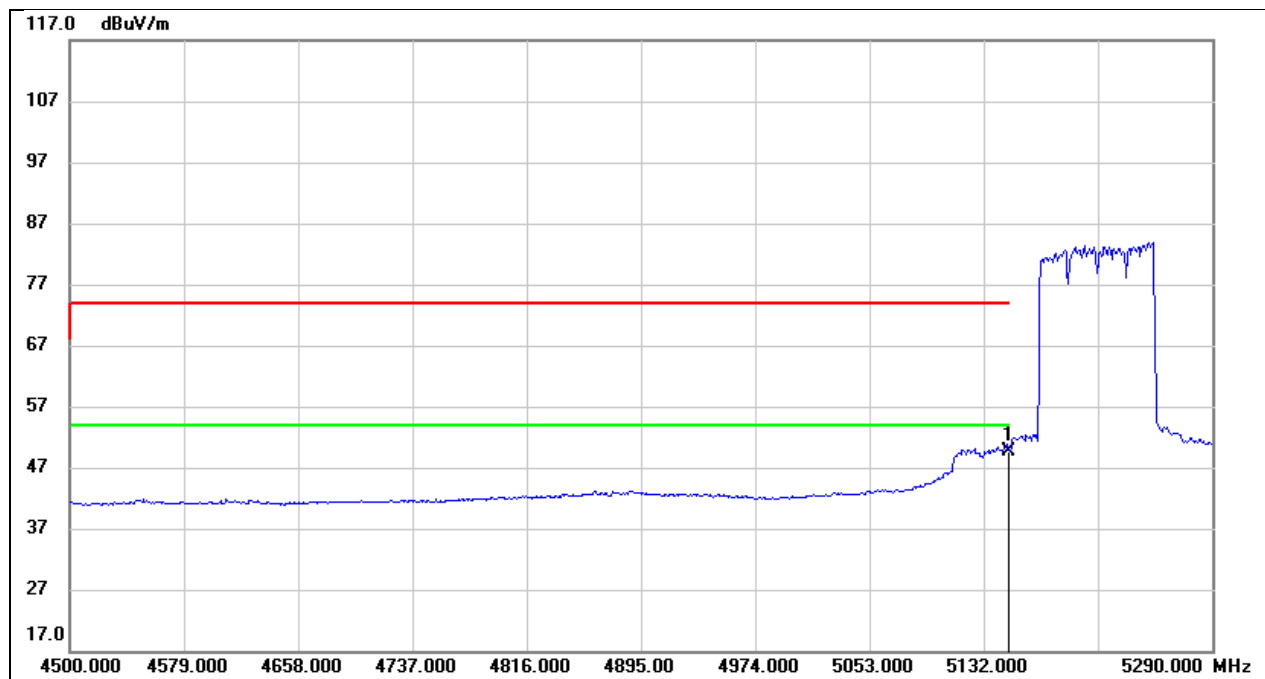


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	10.74	38.84	49.58	54.00	-4.42	AVG

Test Mode:	802.11ax HE80 PK	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

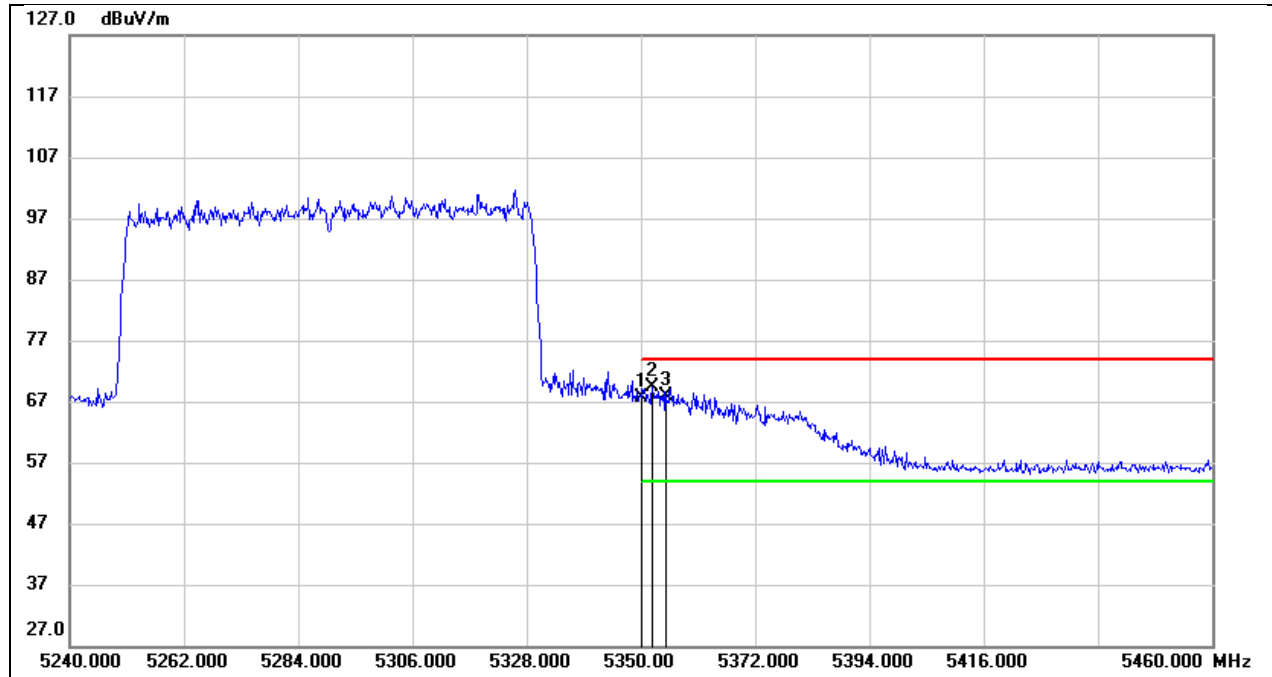


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	28.33	39.29	67.62	74.00	-6.38	peak
2	5352.200	30.04	39.30	69.34	74.00	-4.66	peak
3	5354.840	28.69	39.31	68.00	74.00	-6.00	peak

Test Mode:	802.11ax HE80 AV	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

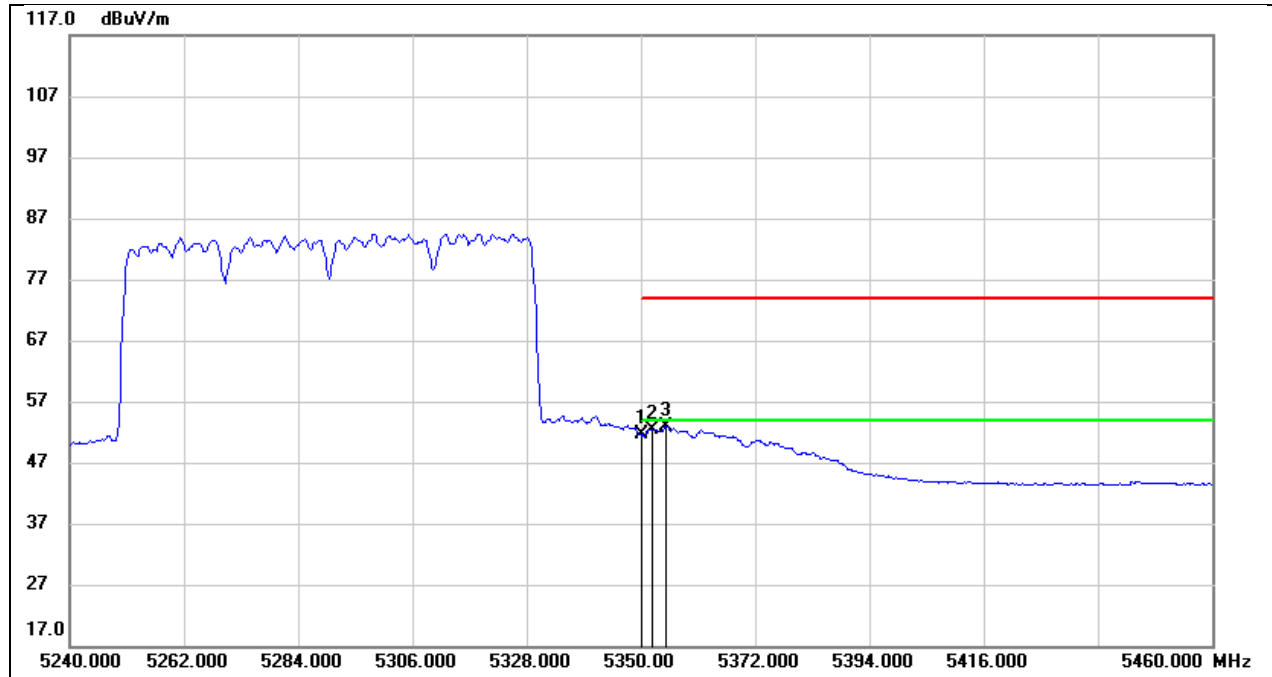


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	12.23	39.29	51.52	54.00	-2.48	AVG
2	5352.200	13.13	39.30	52.43	54.00	-1.57	AVG
3	5354.840	13.57	39.31	52.88	54.00	-1.12	AVG

Test Mode:	802.11ax HE80 PK	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

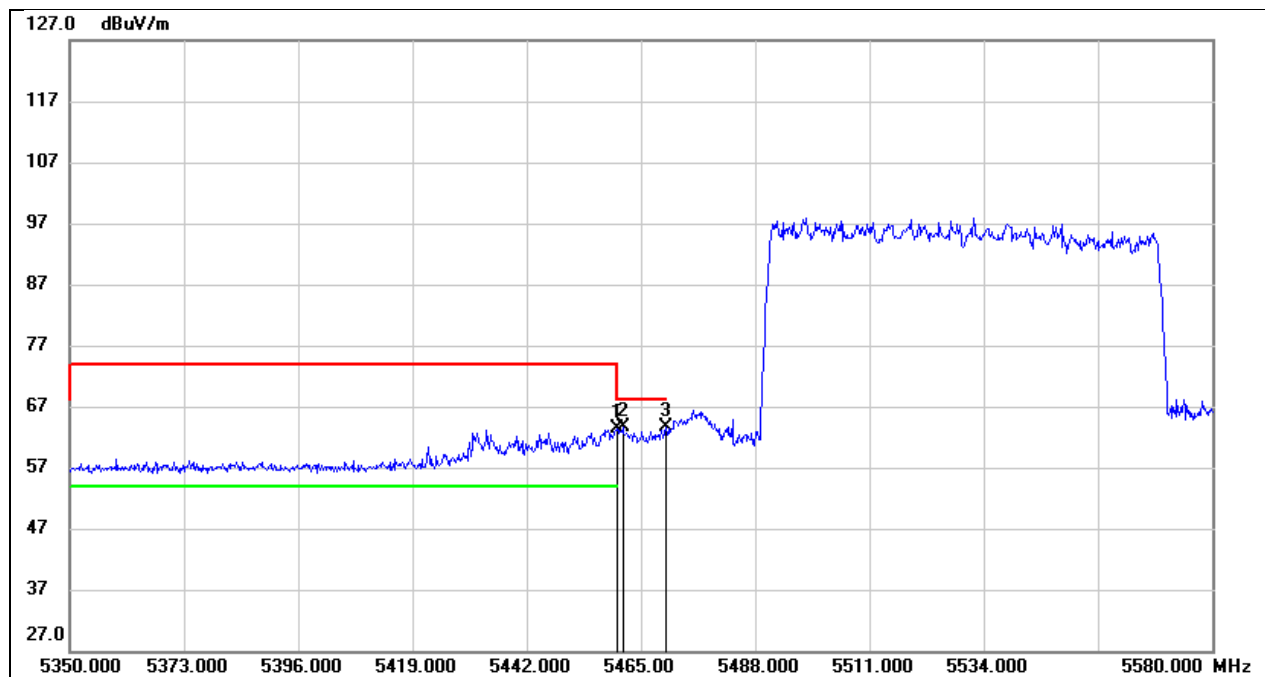


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	22.72	40.76	63.48	68.20	-4.72	peak
2	5461.320	22.89	40.76	63.65	68.20	-4.55	peak
3	5470.000	22.74	40.78	63.52	68.20	-4.68	peak

Test Mode:	802.11ax HE80 AV	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

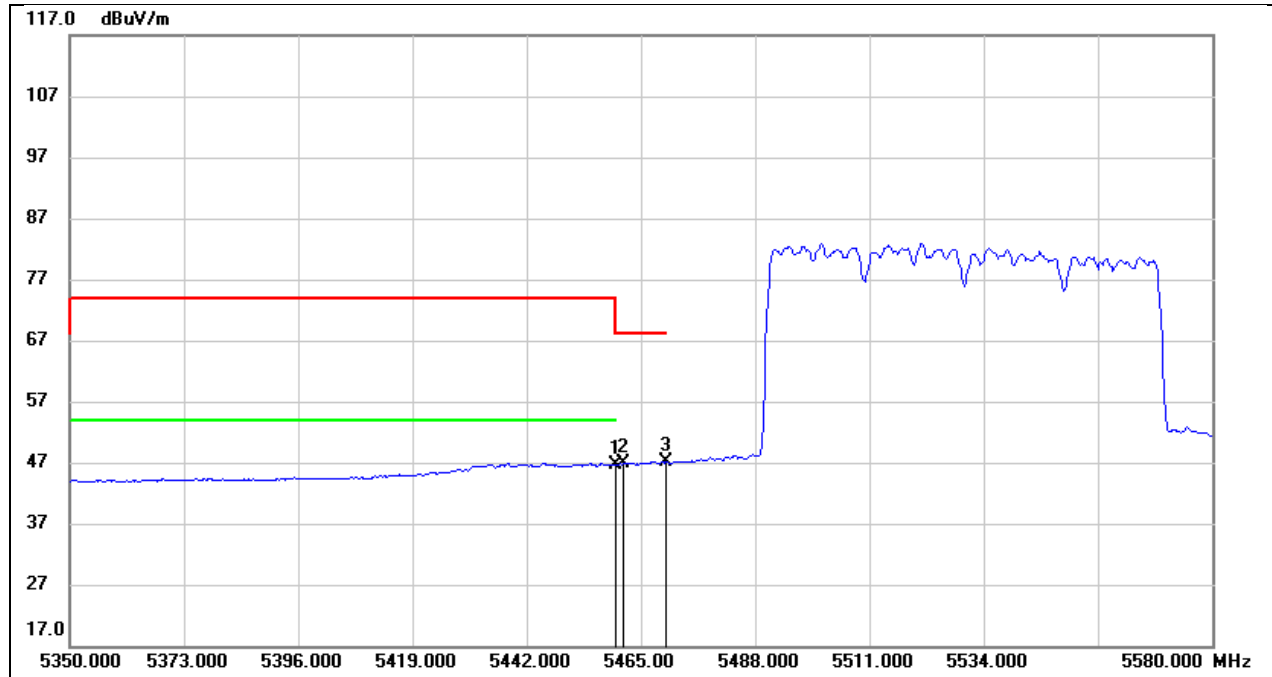


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	5.80	40.76	46.56	54.00	-7.44	AVG
2	5461.320	6.07	40.76	46.83	68.20	-21.37	AVG
3	5470.000	6.30	40.78	47.08	68.20	-21.12	AVG

Test Mode:	802.11ax HE80 PK	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

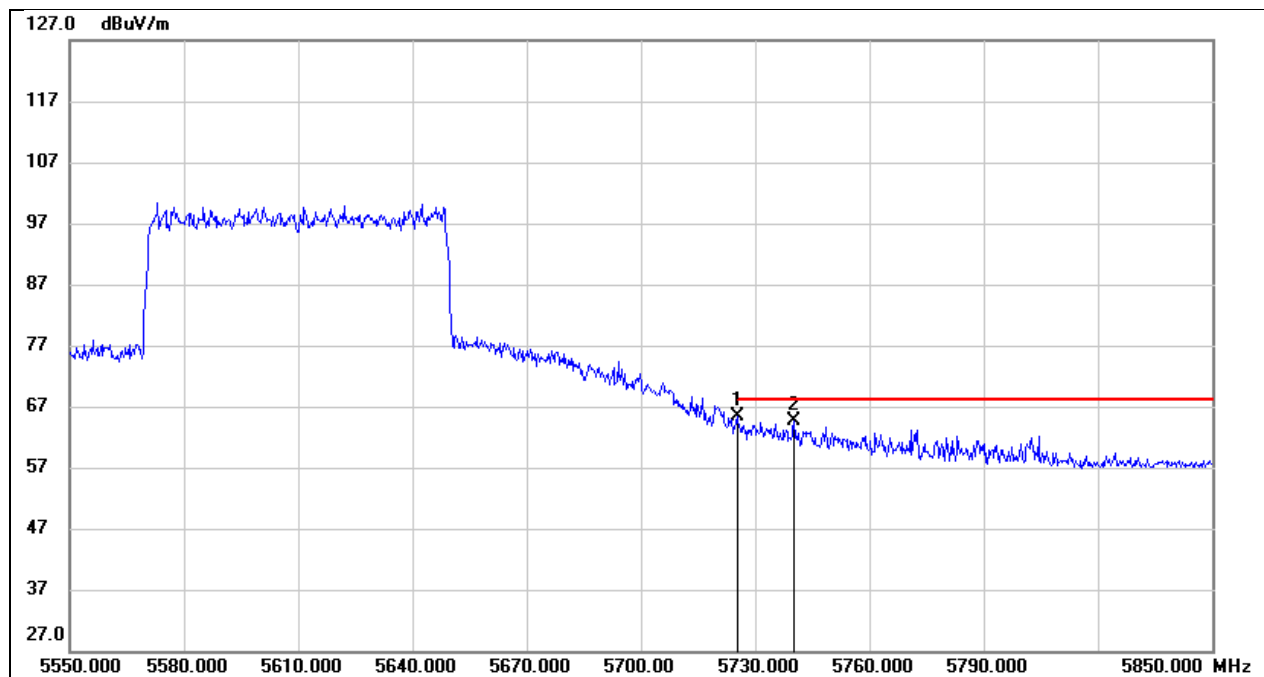

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	25.24	40.09	65.33	68.20	-2.87	peak
2	5740.200	24.57	40.10	64.67	68.20	-3.53	peak


Test Mode:	802.11ax HE80 PK	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

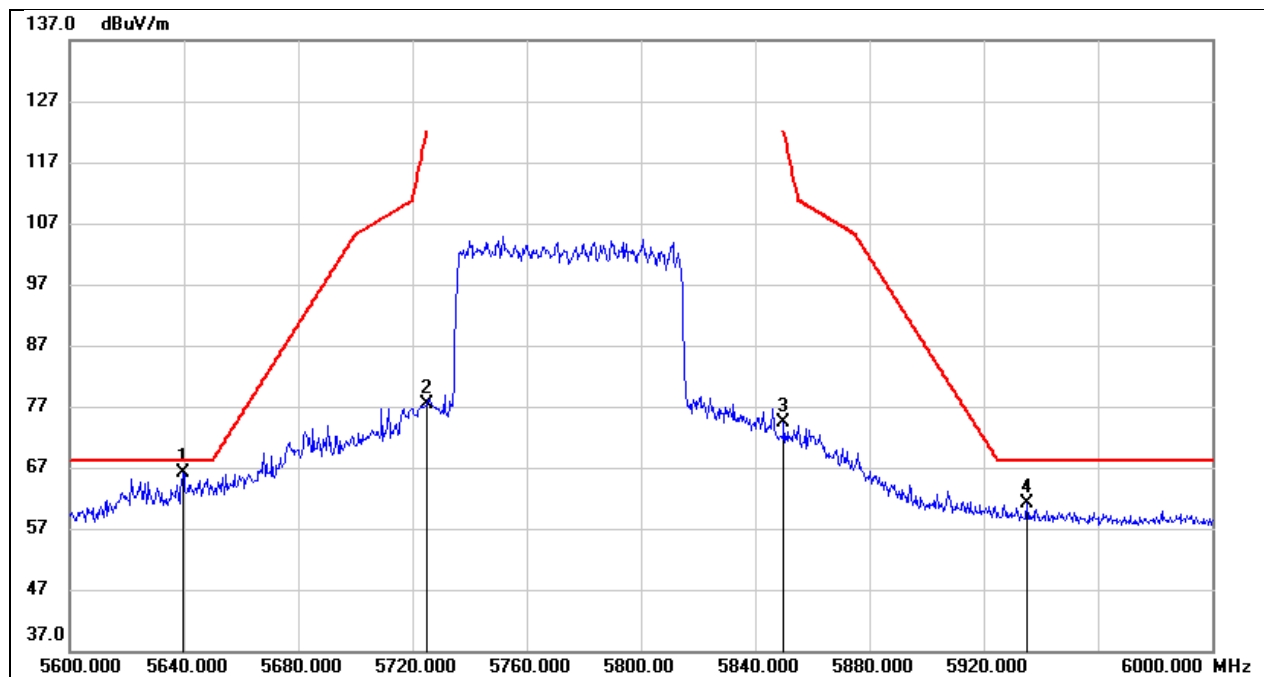

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.600	26.12	39.98	66.10	68.20	-2.10	peak
2	5725.000	37.39	40.09	77.48	122.20	-44.72	peak
3	5850.000	34.15	40.30	74.45	122.20	-47.75	peak
4	5935.200	20.62	40.50	61.12	68.20	-7.08	peak


8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

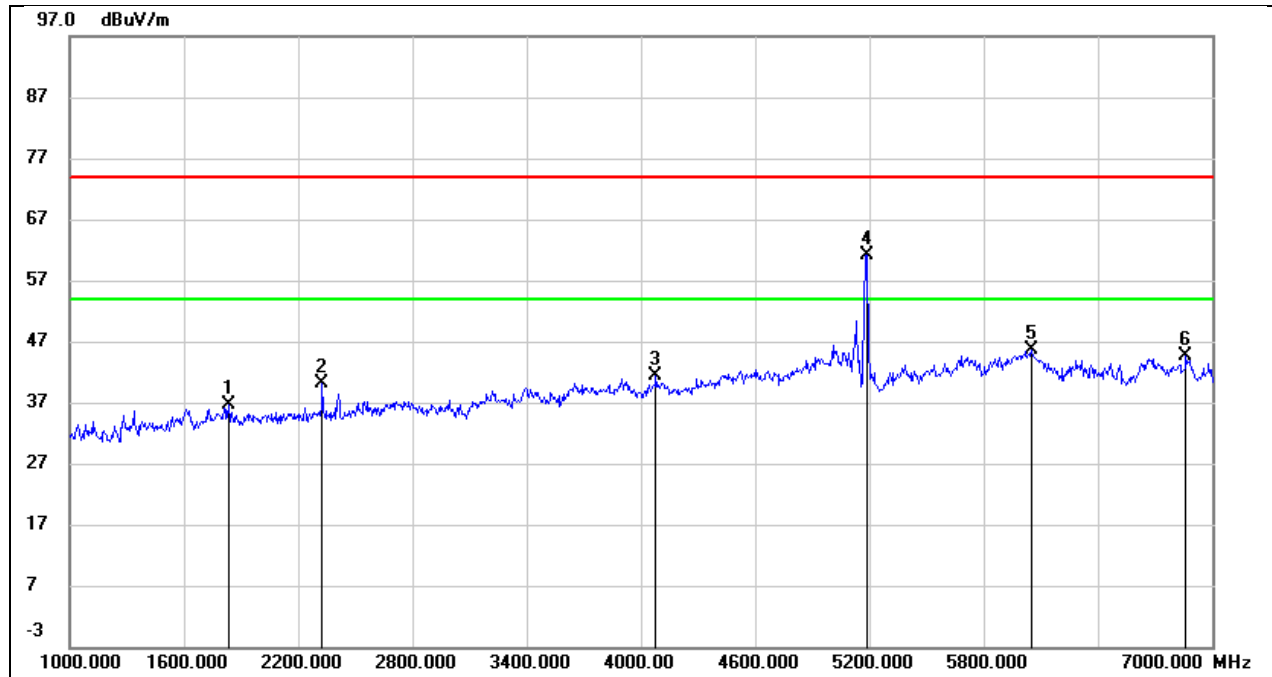


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1834.000	46.70	-9.99	36.71	74.00	-37.29	peak
2	2326.000	49.12	-8.87	40.25	74.00	-33.75	peak
3	4078.000	43.40	-2.12	41.28	74.00	-32.72	peak
4	5188.000	59.16	2.03	61.19	74.00	-12.81	peak
5	6052.000	39.70	5.82	45.52	74.00	-28.48	peak
6	6862.000	38.14	6.56	44.70	74.00	-29.30	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

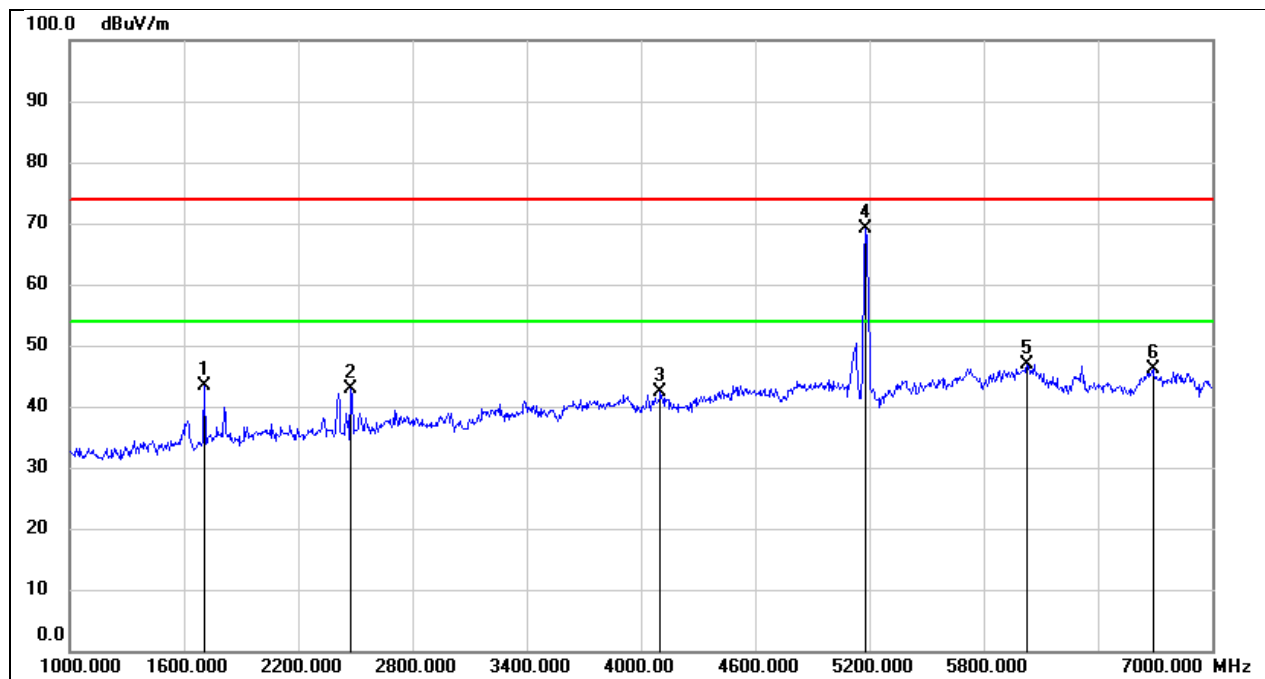


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1708.000	53.50	-10.18	43.32	74.00	-30.68	peak
2	2476.000	50.44	-7.49	42.95	74.00	-31.05	peak
3	4102.000	43.34	-0.98	42.36	74.00	-31.64	peak
4	5176.000	65.80	3.21	69.01	74.00	-4.99	peak
5	6028.000	40.18	6.72	46.90	74.00	-27.10	peak
6	6688.000	39.03	7.15	46.18	74.00	-27.82	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

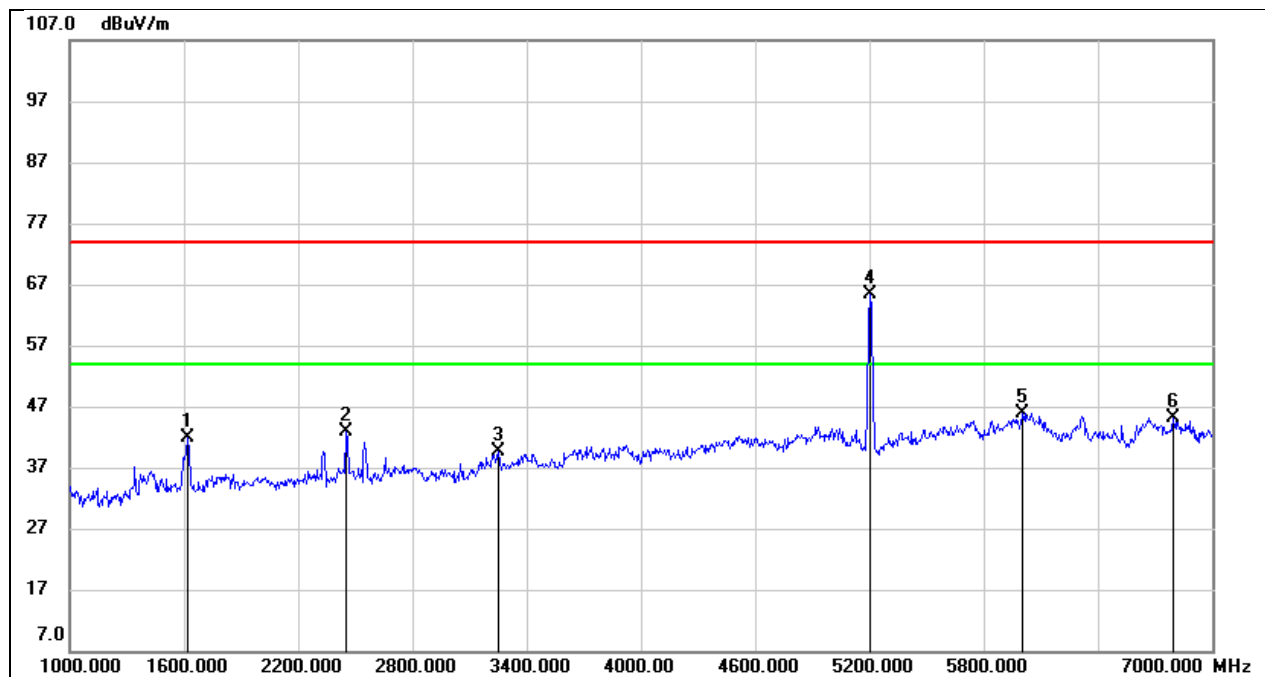


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	53.09	-11.26	41.83	74.00	-32.17	peak
2	2452.000	51.20	-8.40	42.80	74.00	-31.20	peak
3	3250.000	44.51	-4.86	39.65	74.00	-34.35	peak
4	5206.000	63.32	2.07	65.39	74.00	-8.61	peak
5	6004.000	40.32	5.64	45.96	74.00	-28.04	peak
6	6796.000	38.50	6.60	45.10	74.00	-28.90	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

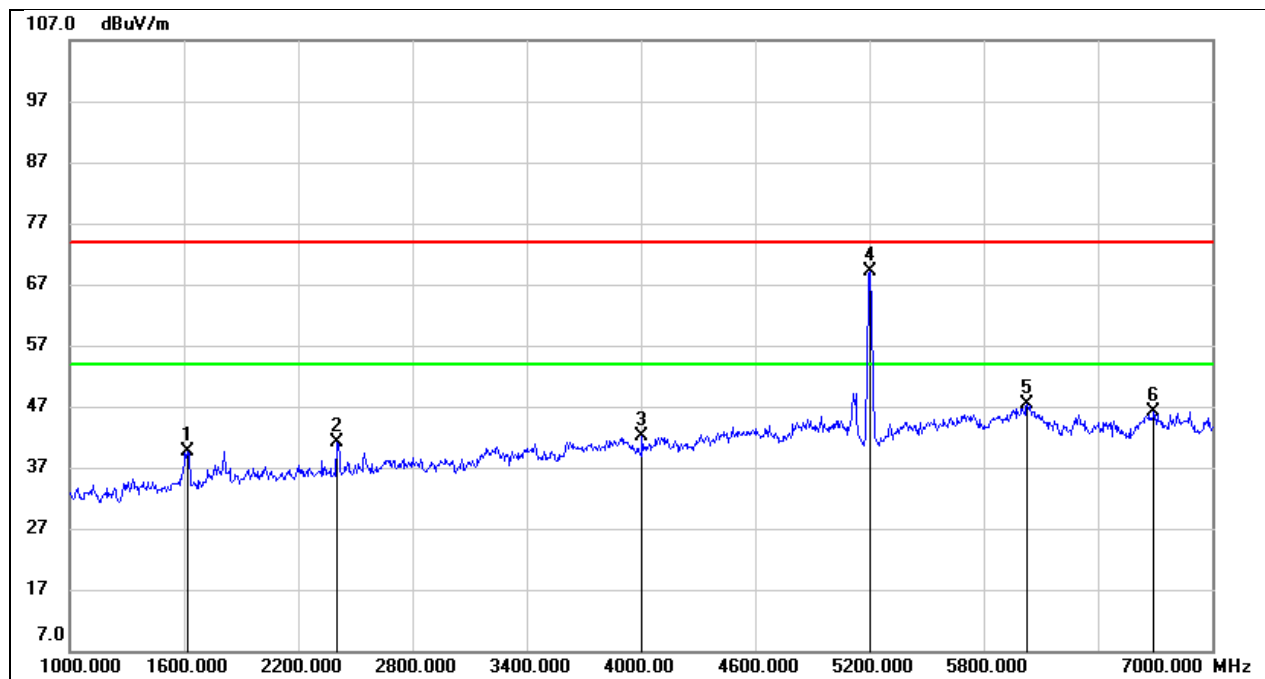


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	50.67	-10.97	39.70	74.00	-34.30	peak
2	2404.000	48.93	-7.76	41.17	74.00	-32.83	peak
3	4006.000	43.33	-1.28	42.05	74.00	-31.95	peak
4	5200.000	65.96	3.24	69.20	74.00	-4.80	peak
5	6028.000	40.76	6.72	47.48	74.00	-26.52	peak
6	6694.000	38.89	7.17	46.06	74.00	-27.94	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

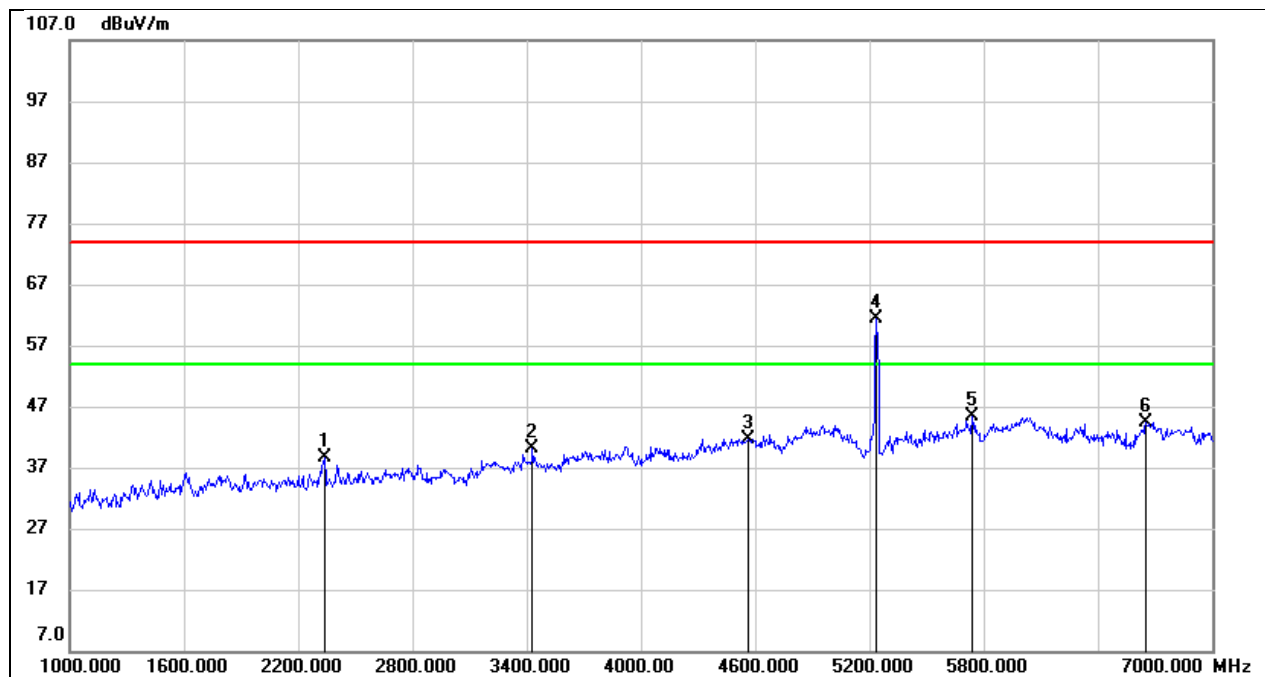


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.000	47.46	-8.82	38.64	74.00	-35.36	peak
2	3430.000	44.28	-4.07	40.21	74.00	-33.79	peak
3	4564.000	41.86	-0.11	41.75	74.00	-32.25	peak
4	5236.000	59.11	2.20	61.31	74.00	-12.69	peak
5	5740.000	41.17	4.24	45.41	74.00	-28.59	peak
6	6652.000	38.29	6.21	44.50	74.00	-29.50	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

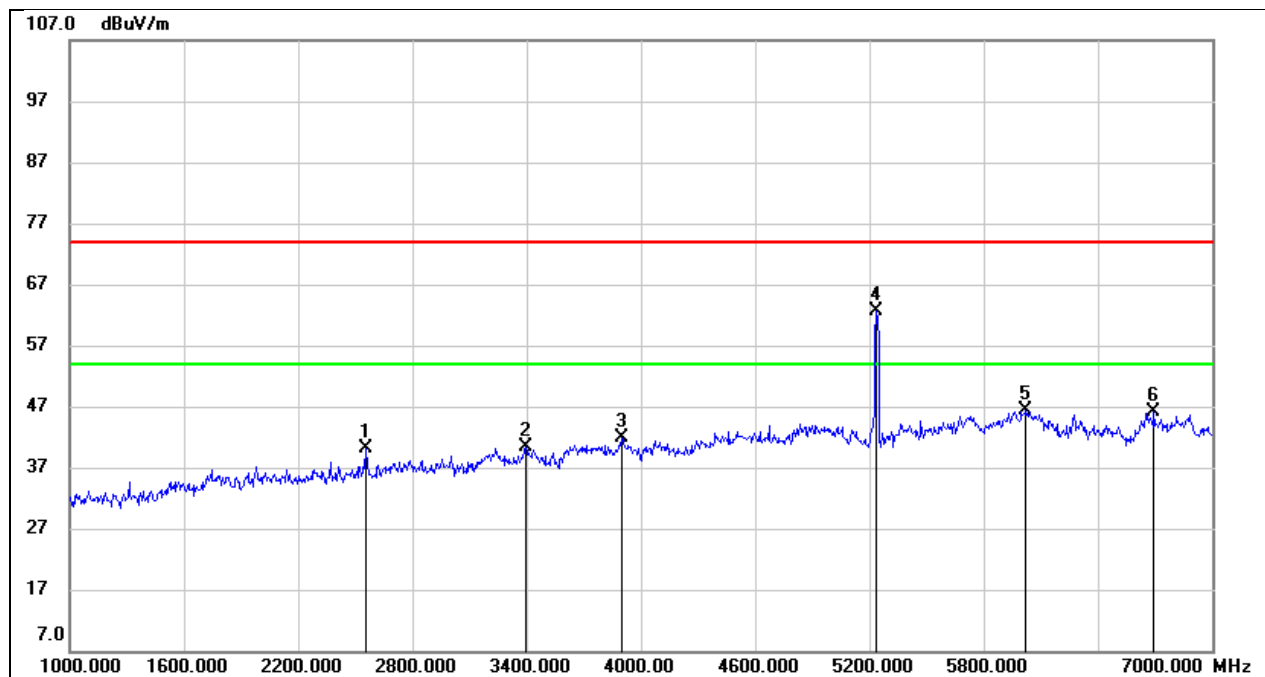


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2554.000	47.27	-7.12	40.15	74.00	-33.85	peak
2	3394.000	43.52	-3.16	40.36	74.00	-33.64	peak
3	3898.000	43.29	-1.52	41.77	74.00	-32.23	peak
4	5236.000	59.23	3.40	62.63	74.00	-11.37	peak
5	6022.000	39.61	6.71	46.32	74.00	-27.68	peak
6	6694.000	38.89	7.17	46.06	74.00	-27.94	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

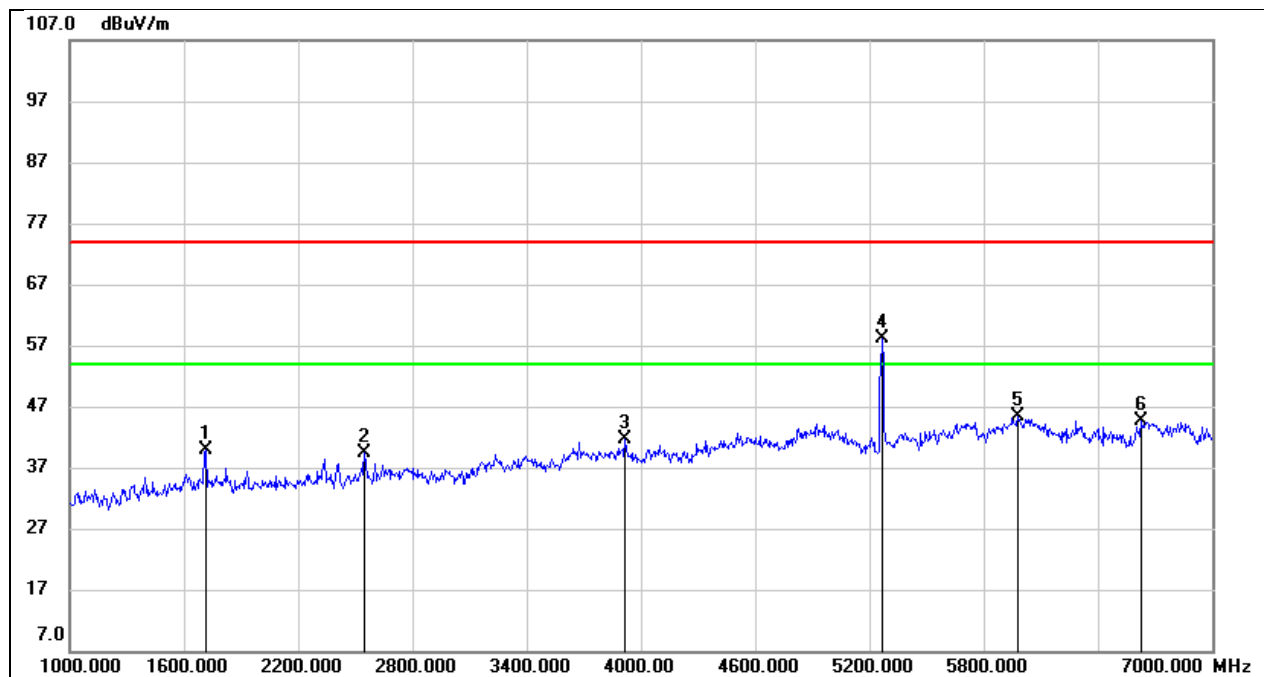


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1714.000	50.56	-10.57	39.99	74.00	-34.01	peak
2	2548.000	47.32	-8.00	39.32	74.00	-34.68	peak
3	3916.000	44.15	-2.57	41.58	74.00	-32.42	peak
4	5266.000	55.87	2.33	58.20	74.00	-15.80	peak
5	5980.000	39.90	5.52	45.42	74.00	-28.58	peak
6	6628.000	38.41	6.15	44.56	74.00	-29.44	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

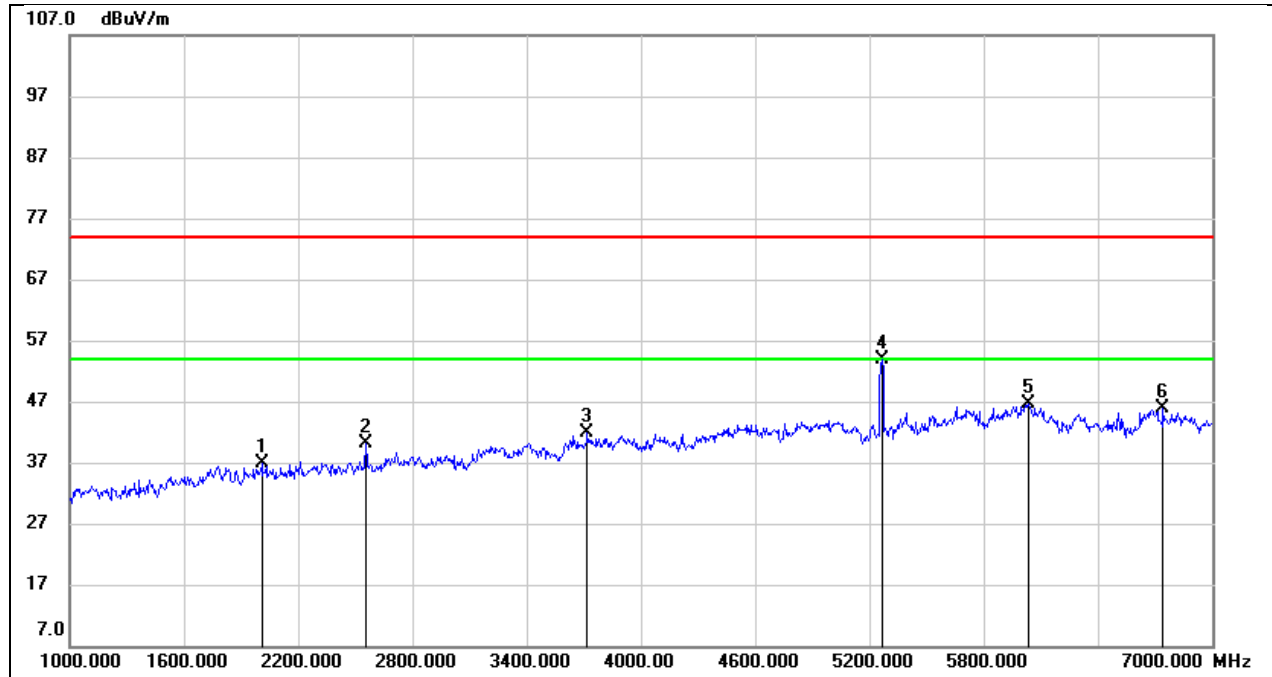


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2008.000	46.07	-9.18	36.89	74.00	-37.11	peak
2	2554.000	47.22	-7.12	40.10	74.00	-33.90	peak
3	3718.000	43.92	-1.96	41.96	74.00	-32.04	peak
4	5266.000	50.32	3.53	53.85	74.00	-20.15	peak
5	6034.000	39.81	6.74	46.55	74.00	-27.45	peak
6	6742.000	38.55	7.31	45.86	74.00	-28.14	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

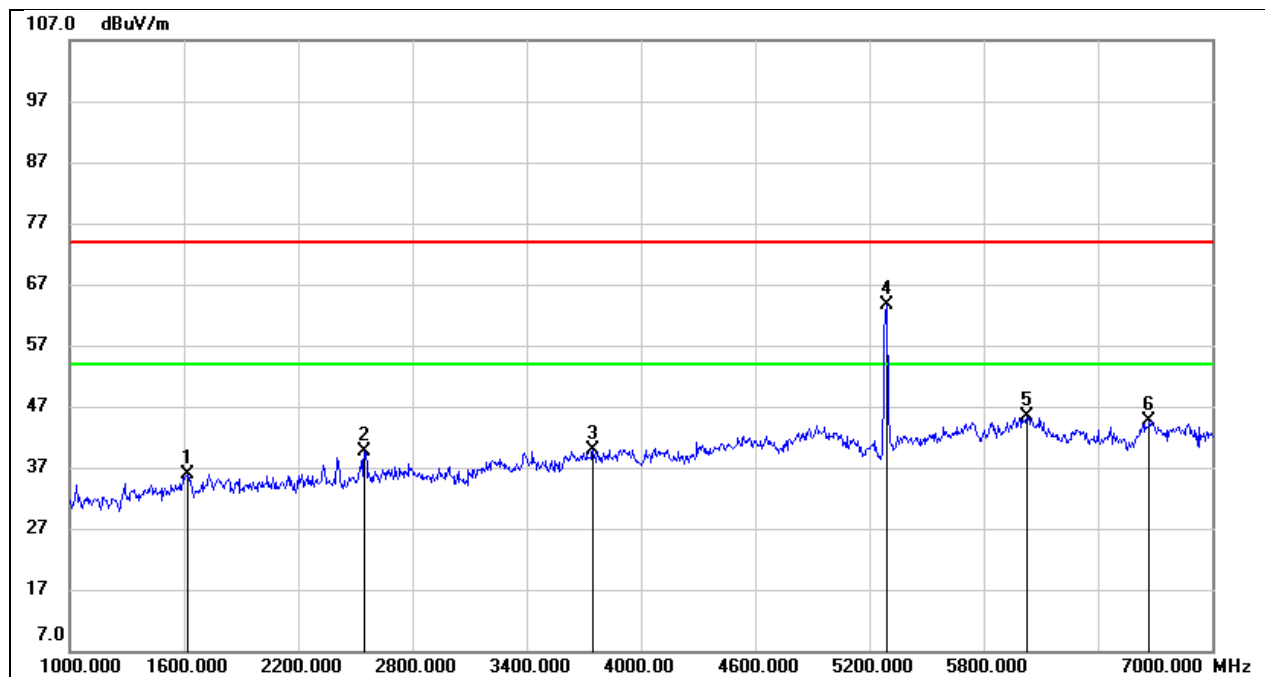


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	47.17	-11.26	35.91	74.00	-38.09	peak
2	2548.000	47.69	-8.00	39.69	74.00	-34.31	peak
3	3748.000	42.72	-2.94	39.78	74.00	-34.22	peak
4	5290.000	61.31	2.44	63.75	74.00	-10.25	peak
5	6028.000	39.58	5.74	45.32	74.00	-28.68	peak
6	6670.000	38.42	6.26	44.68	74.00	-29.32	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

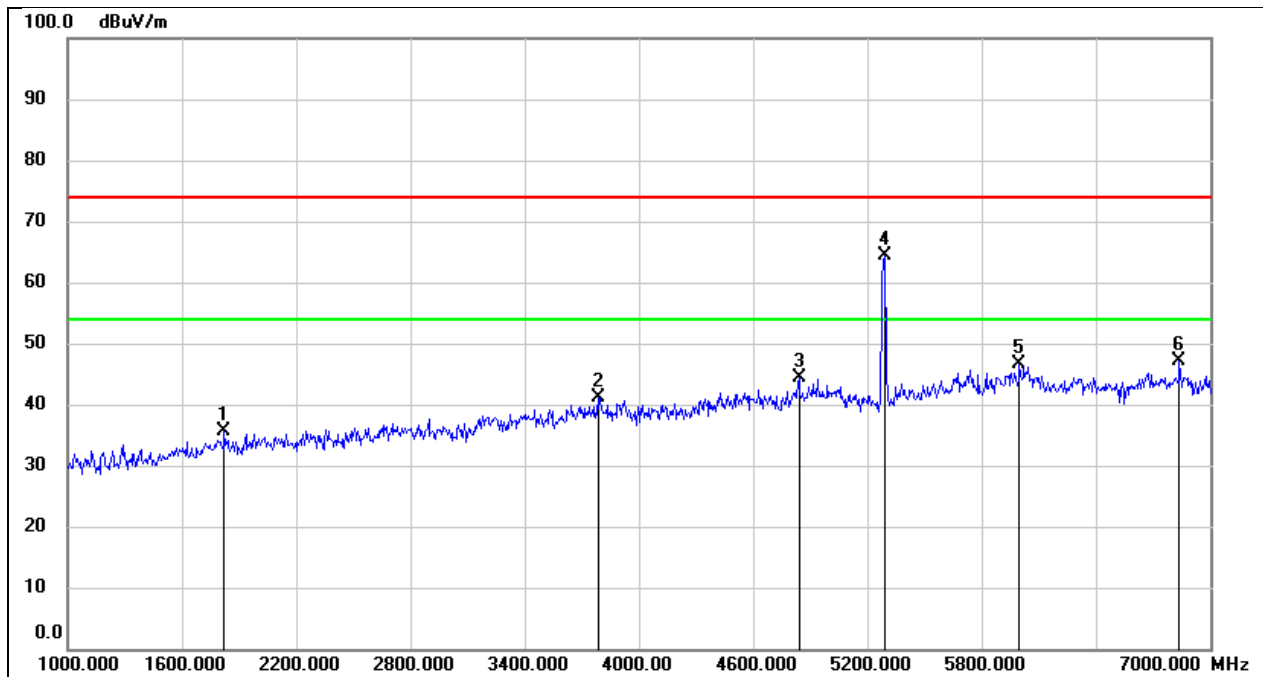


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1822.000	44.91	-9.37	35.54	74.00	-38.46	peak
2	3784.000	42.90	-1.79	41.11	74.00	-32.89	peak
3	4840.000	42.32	2.16	44.48	74.00	-29.52	peak
4	5290.000	60.69	3.64	64.33	74.00	-9.67	peak
5	5998.000	40.03	6.62	46.65	74.00	-27.35	peak
6	6838.000	39.58	7.45	47.03	74.00	-26.97	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

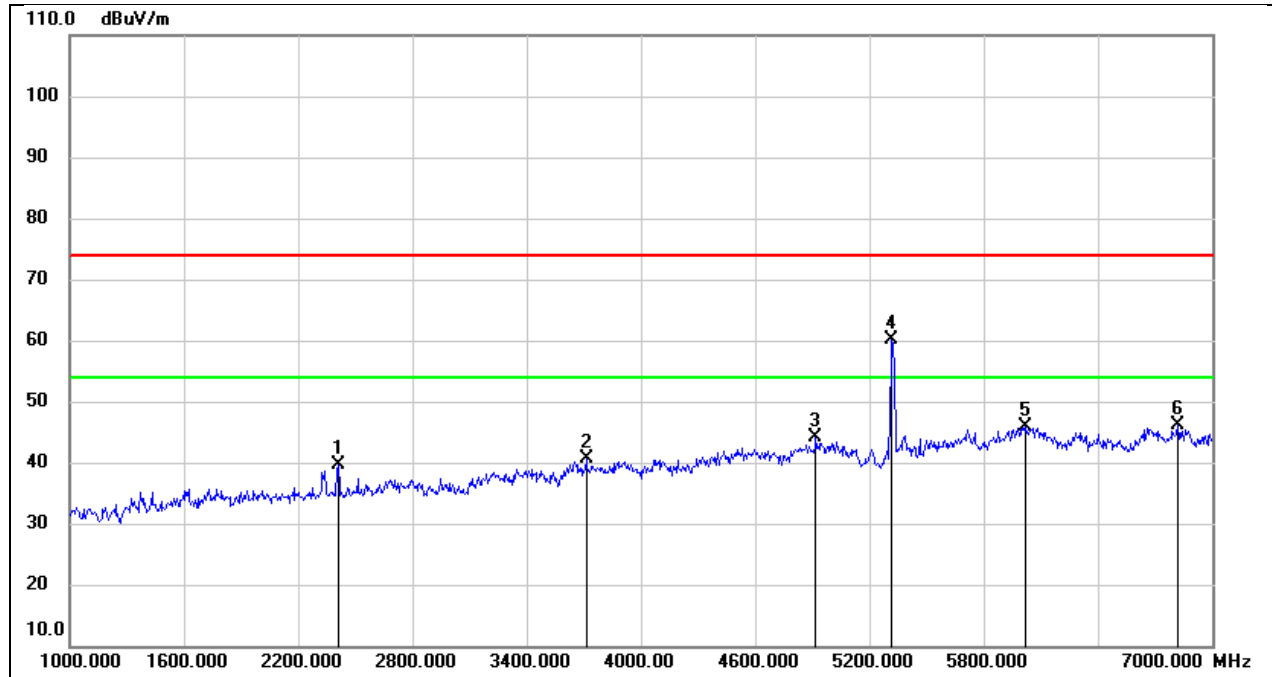


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2410.000	48.16	-8.55	39.61	74.00	-34.39	peak
2	3712.000	43.77	-3.02	40.75	74.00	-33.25	peak
3	4918.000	42.67	1.42	44.09	74.00	-29.91	peak
4	5314.000	57.62	2.54	60.16	74.00	-13.84	peak
5	6016.000	40.22	5.69	45.91	74.00	-28.09	peak
6	6820.000	39.50	6.59	46.09	74.00	-27.91	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

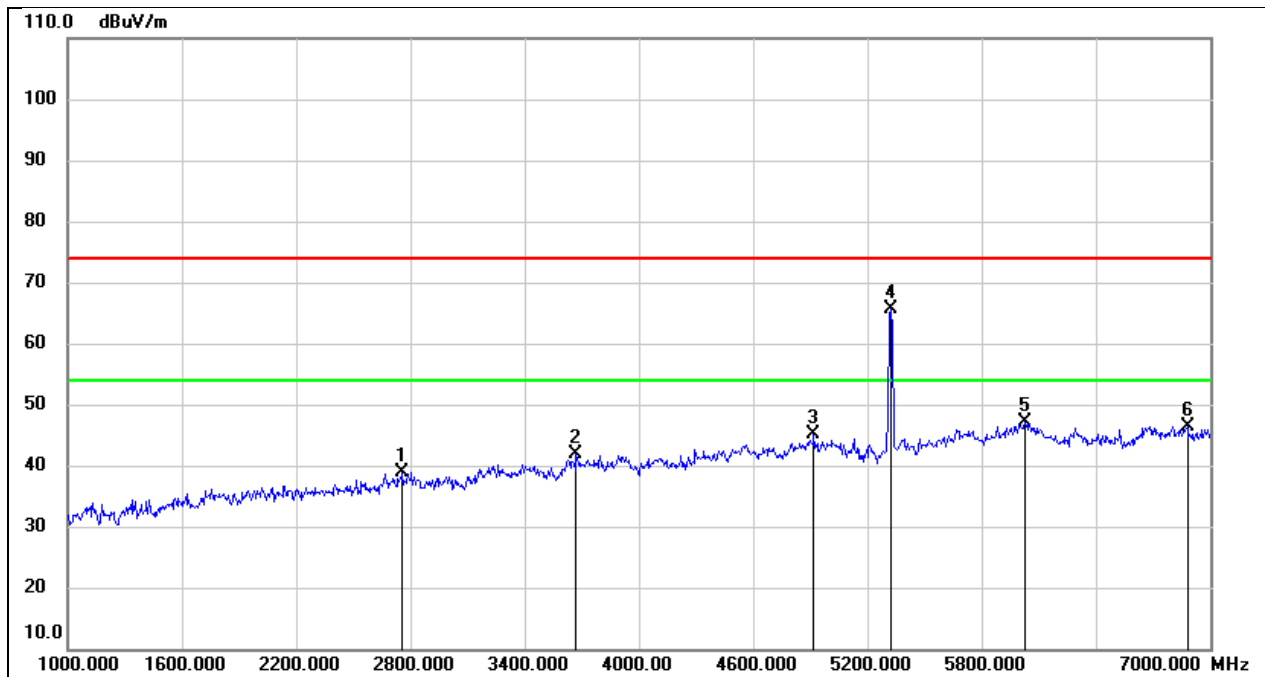


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2758.000	44.84	-6.04	38.80	74.00	-35.20	peak
2	3670.000	44.08	-2.09	41.99	74.00	-32.01	peak
3	4918.000	42.49	2.57	45.06	74.00	-28.94	peak
4	5320.000	61.91	3.76	65.67	74.00	-8.33	peak
5	6028.000	40.48	6.72	47.20	74.00	-26.80	peak
6	6880.000	38.91	7.42	46.33	74.00	-27.67	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

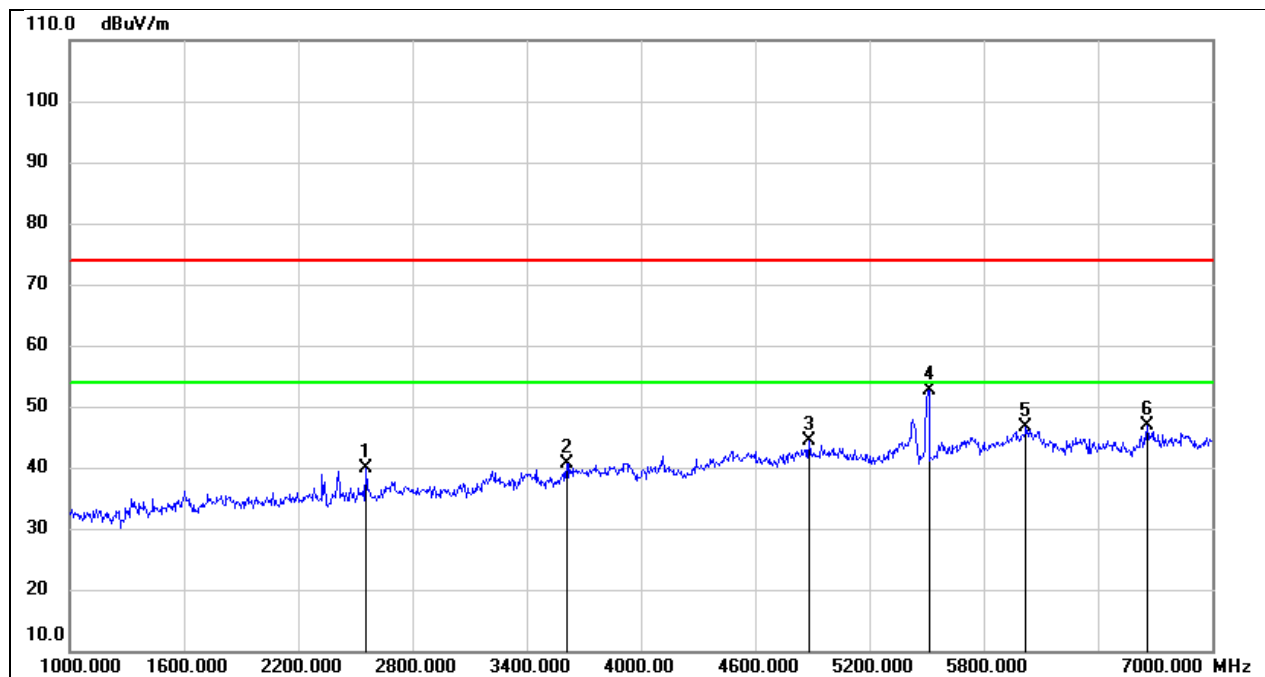


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2554.000	47.84	-7.97	39.87	74.00	-34.13	peak
2	3610.000	43.93	-3.27	40.66	74.00	-33.34	peak
3	4882.000	43.22	1.25	44.47	74.00	-29.53	peak
4	5512.000	49.34	3.29	52.63	74.00	-21.37	peak
5	6022.000	40.97	5.71	46.68	74.00	-27.32	peak
6	6658.000	40.56	6.23	46.79	74.00	-27.21	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

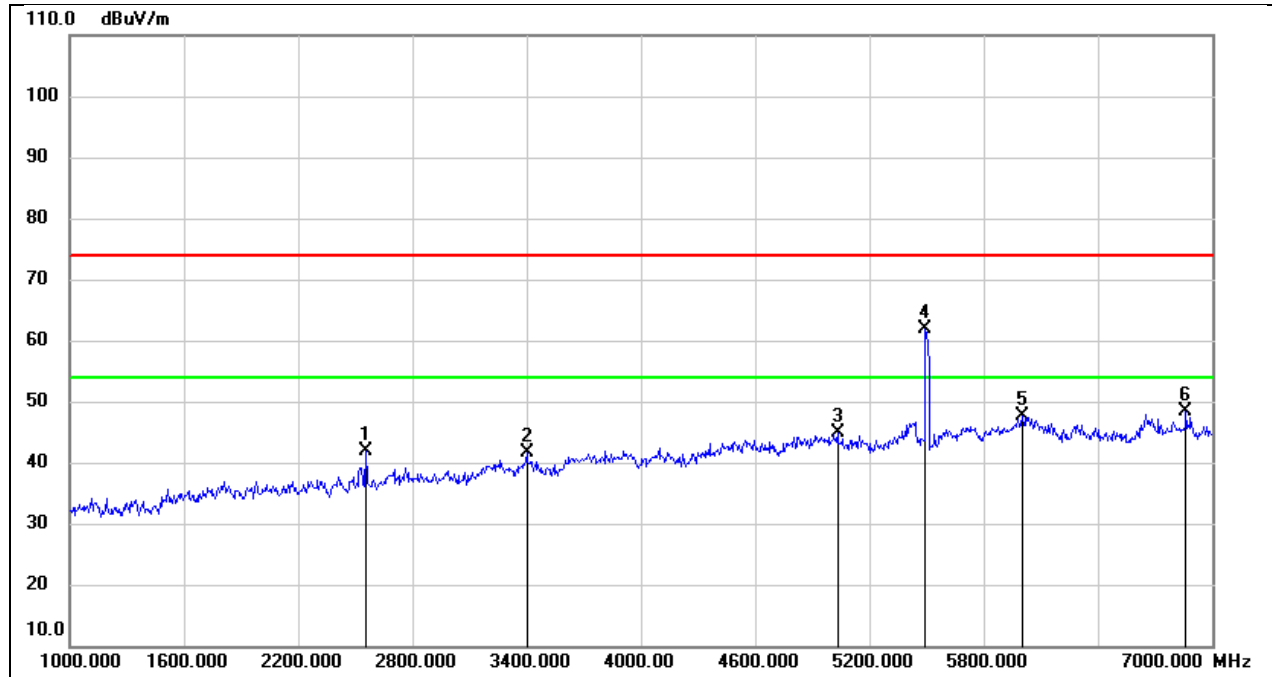


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2554.000	48.97	-7.12	41.85	74.00	-32.15	peak
2	3400.000	44.72	-3.15	41.57	74.00	-32.43	peak
3	5032.000	41.82	3.04	44.86	74.00	-29.14	peak
4	5494.000	57.45	4.42	61.87	74.00	-12.13	peak
5	6004.000	40.91	6.64	47.55	74.00	-26.45	peak
6	6862.000	40.90	7.43	48.33	74.00	-25.67	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

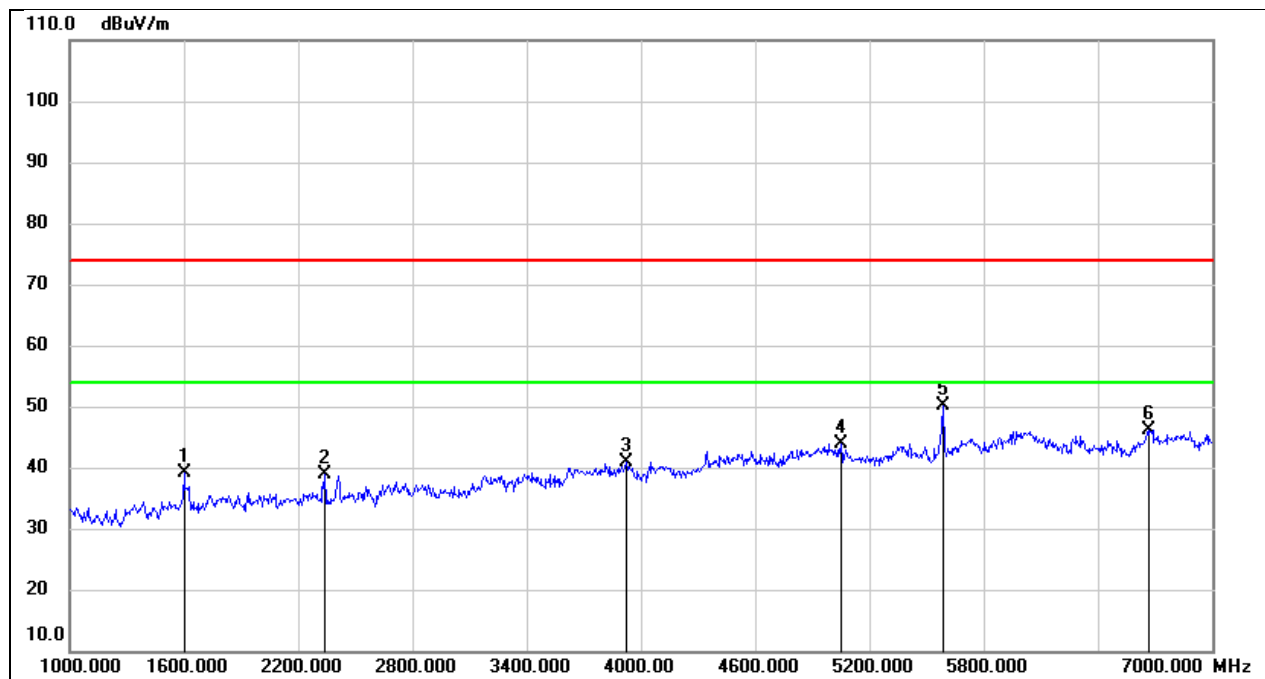


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1600.000	50.44	-11.38	39.06	74.00	-34.94	peak
2	2338.000	47.76	-8.82	38.94	74.00	-35.06	peak
3	3922.000	43.40	-2.56	40.84	74.00	-33.16	peak
4	5050.000	42.05	1.86	43.91	74.00	-30.09	peak
5	5590.000	46.64	3.57	50.21	74.00	-23.79	peak
6	6664.000	39.86	6.25	46.11	74.00	-27.89	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

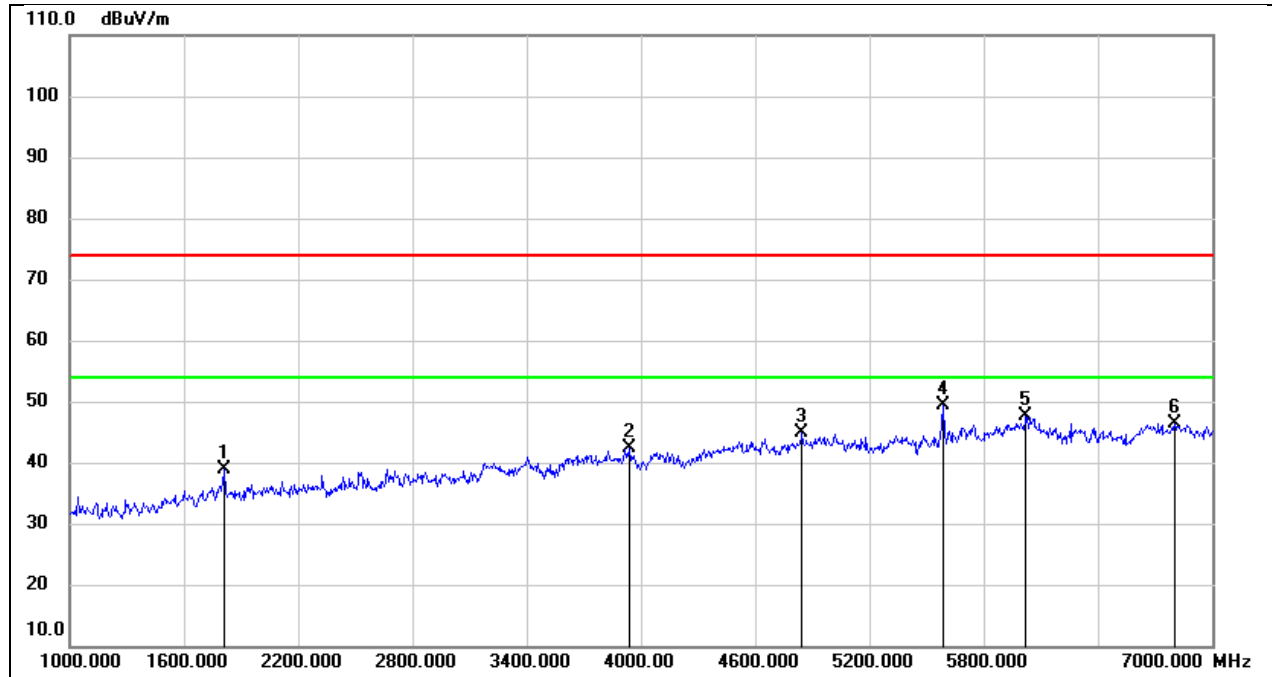


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1810.000	48.35	-9.37	38.98	74.00	-35.02	peak
2	3940.000	43.74	-1.44	42.30	74.00	-31.70	peak
3	4846.000	42.68	2.19	44.87	74.00	-29.13	peak
4	5590.000	44.71	4.74	49.45	74.00	-24.55	peak
5	6022.000	40.90	6.71	47.61	74.00	-26.39	peak
6	6802.000	38.95	7.46	46.41	74.00	-27.59	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

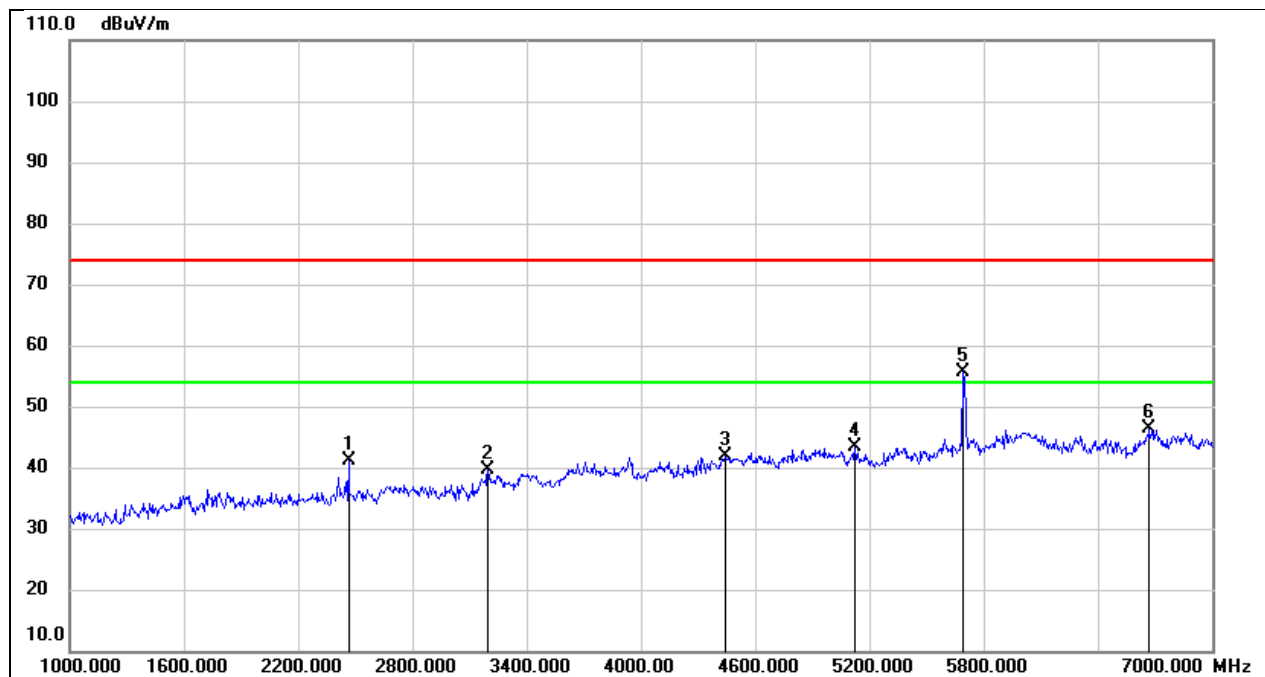


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.000	49.38	-8.34	41.04	74.00	-32.96	peak
2	3196.000	44.82	-5.09	39.73	74.00	-34.27	peak
3	4444.000	42.60	-0.75	41.85	74.00	-32.15	peak
4	5122.000	41.50	1.95	43.45	74.00	-30.55	peak
5	5692.000	51.69	4.03	55.72	74.00	-18.28	peak
6	6670.000	40.07	6.26	46.33	74.00	-27.67	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

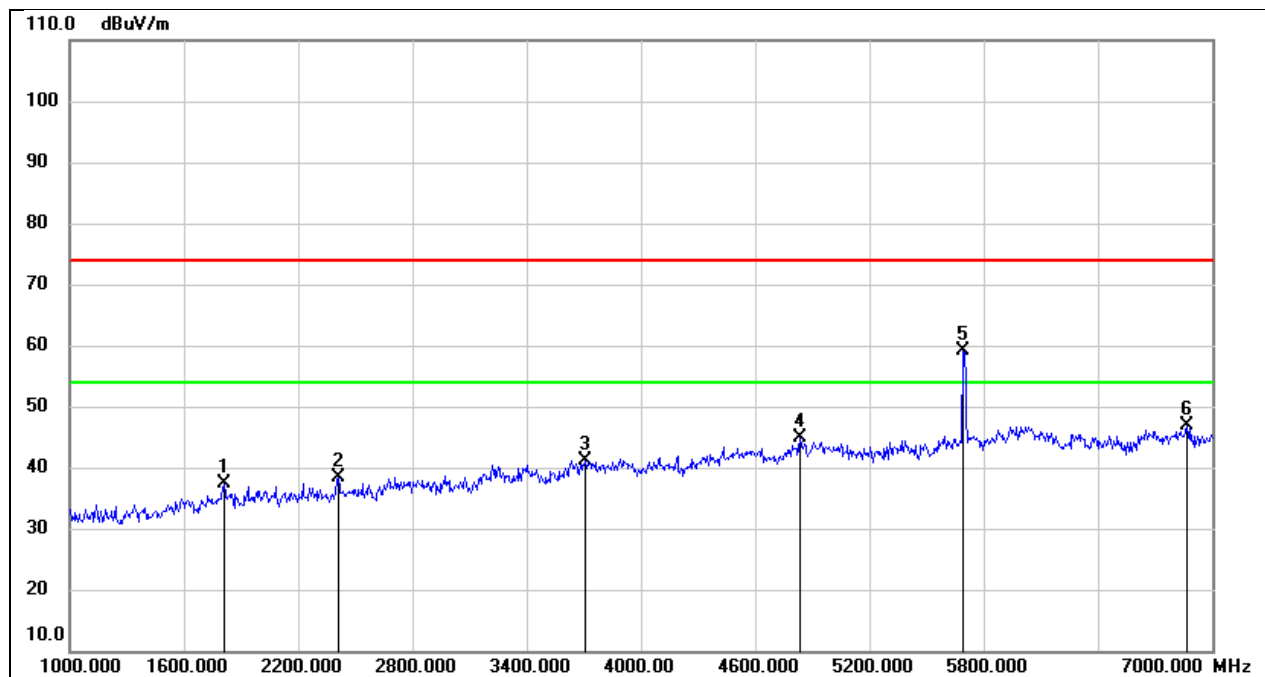


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1810.000	46.63	-9.37	37.26	74.00	-36.74	peak
2	2410.000	46.09	-7.73	38.36	74.00	-35.64	peak
3	3706.000	43.12	-2.00	41.12	74.00	-32.88	peak
4	4834.000	42.65	2.12	44.77	74.00	-29.23	peak
5	5692.000	54.07	5.15	59.22	74.00	-14.78	peak
6	6868.000	39.42	7.43	46.85	74.00	-27.15	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

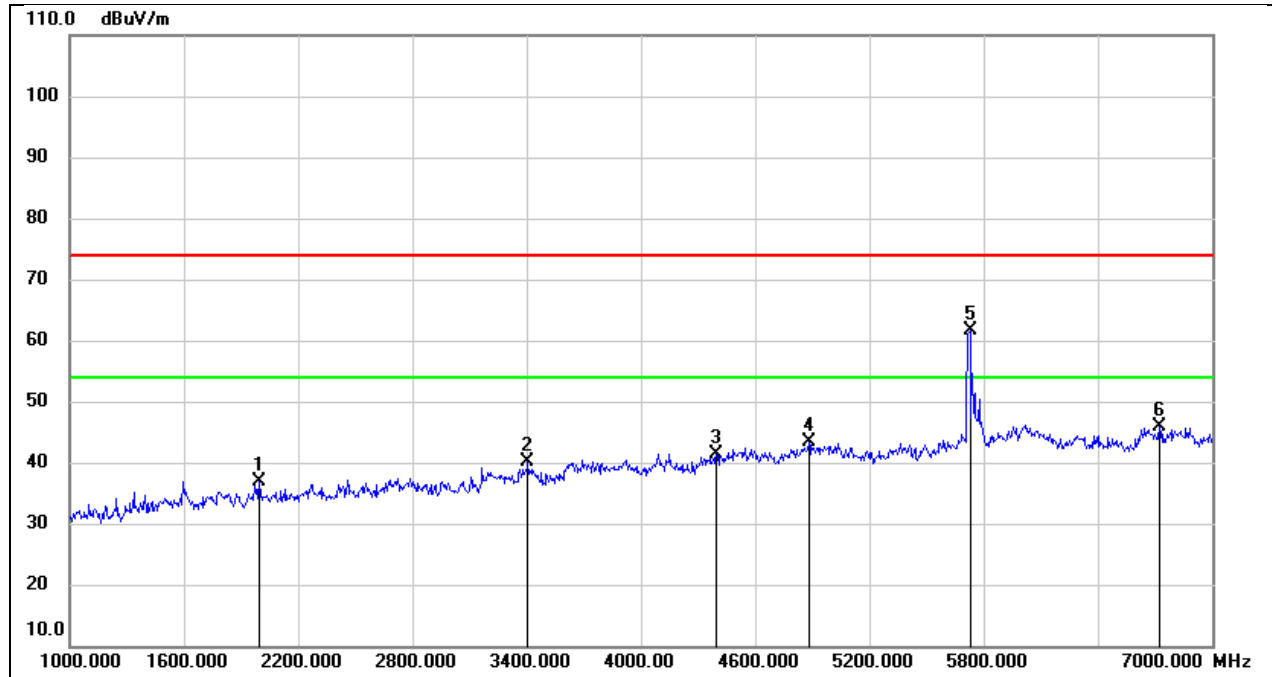


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1996.000	46.98	-10.10	36.88	74.00	-37.12	peak
2	3406.000	44.38	-4.18	40.20	74.00	-33.80	peak
3	4396.000	42.49	-1.02	41.47	74.00	-32.53	peak
4	4882.000	42.12	1.25	43.37	74.00	-30.63	peak
5	5728.000	57.43	4.19	61.62	74.00	-12.38	peak
6	6724.000	39.53	6.41	45.94	74.00	-28.06	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

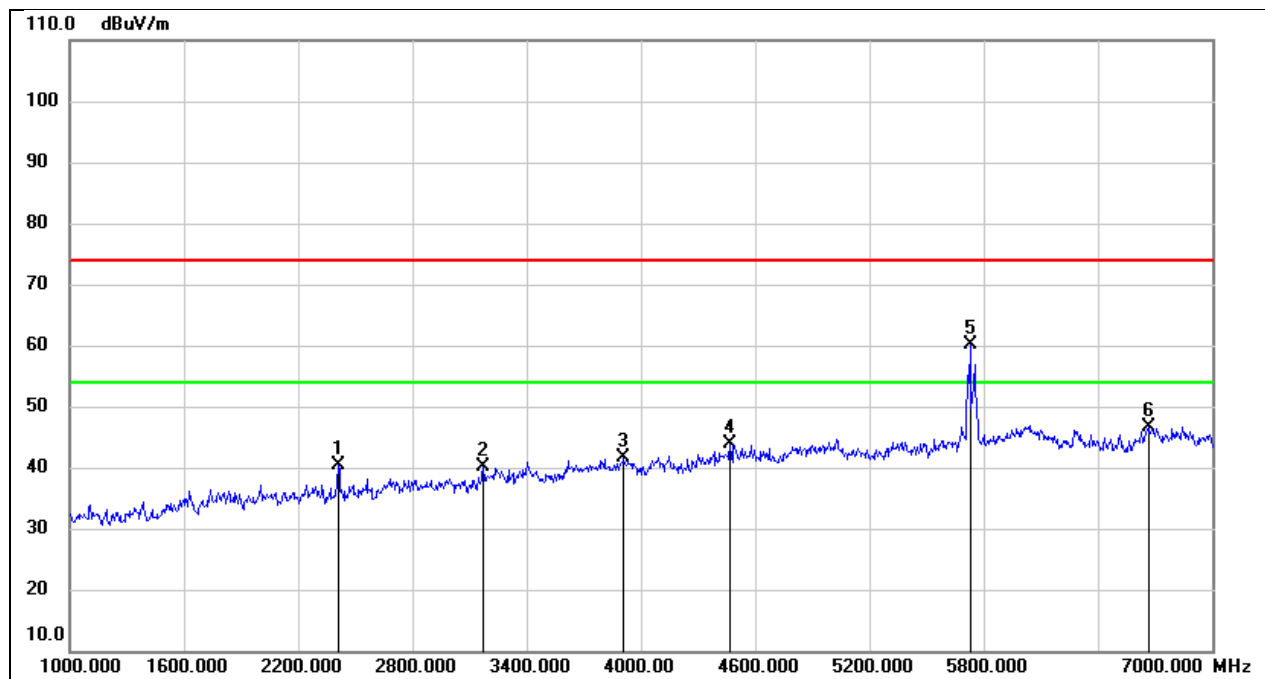


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2410.000	48.19	-7.73	40.46	74.00	-33.54	peak
2	3172.000	44.19	-4.00	40.19	74.00	-33.81	peak
3	3910.000	43.04	-1.51	41.53	74.00	-32.47	peak
4	4468.000	43.63	0.29	43.92	74.00	-30.08	peak
5	5728.000	54.72	5.30	60.02	74.00	-13.98	peak
6	6670.000	39.65	7.10	46.75	74.00	-27.25	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

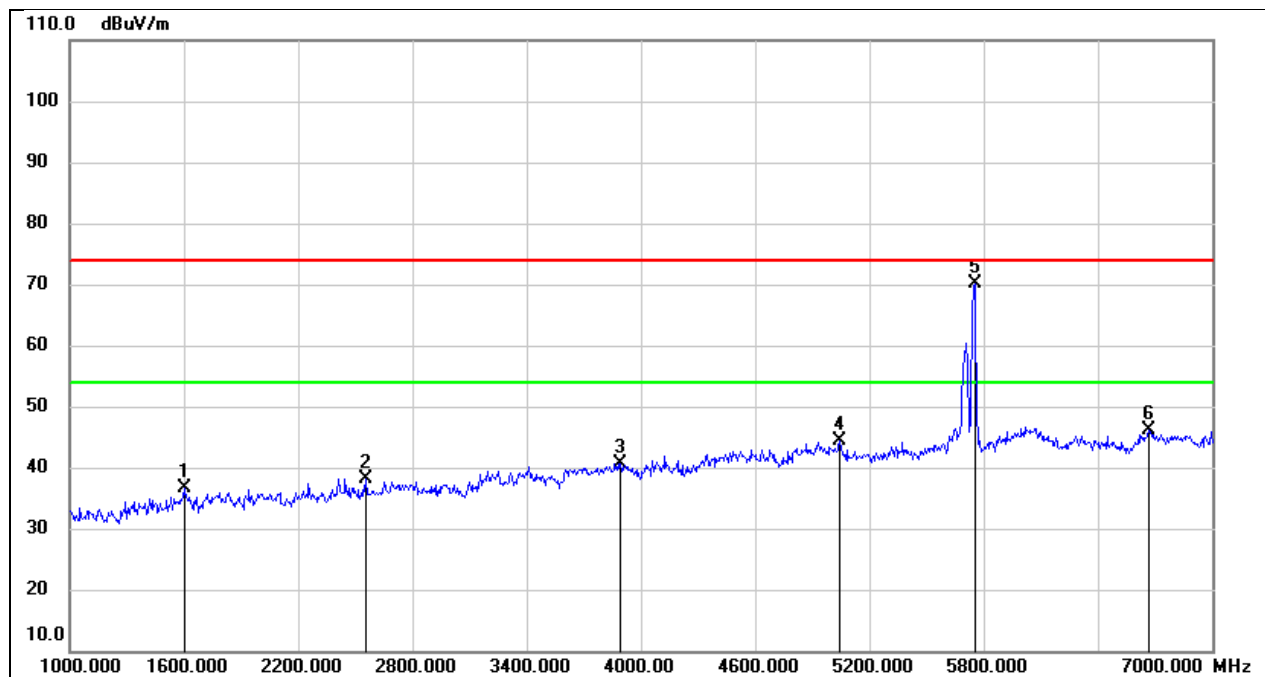


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1600.000	47.96	-11.38	36.58	74.00	-37.42	peak
2	2554.000	46.18	-7.97	38.21	74.00	-35.79	peak
3	3892.000	43.21	-2.61	40.60	74.00	-33.40	peak
4	5044.000	42.45	1.85	44.30	74.00	-29.70	peak
5	5752.000	65.85	4.29	70.14	74.00	-3.86	peak
6	6670.000	39.79	6.26	46.05	74.00	-27.95	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

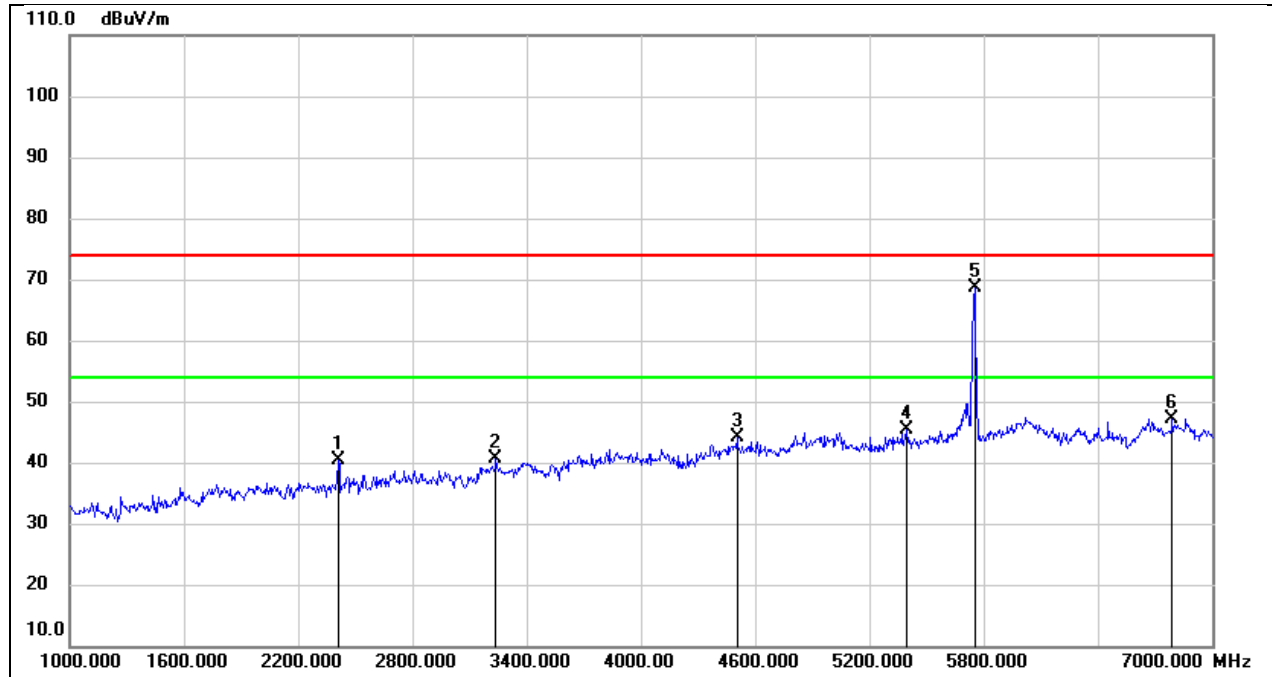


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2410.000	48.07	-7.73	40.34	74.00	-33.66	peak
2	3238.000	44.27	-3.75	40.52	74.00	-33.48	peak
3	4504.000	43.53	0.49	44.02	74.00	-29.98	peak
4	5398.000	41.16	4.11	45.27	74.00	-28.73	peak
5	5752.000	63.36	5.39	68.75	74.00	-5.25	peak
6	6790.000	39.71	7.44	47.15	74.00	-26.85	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

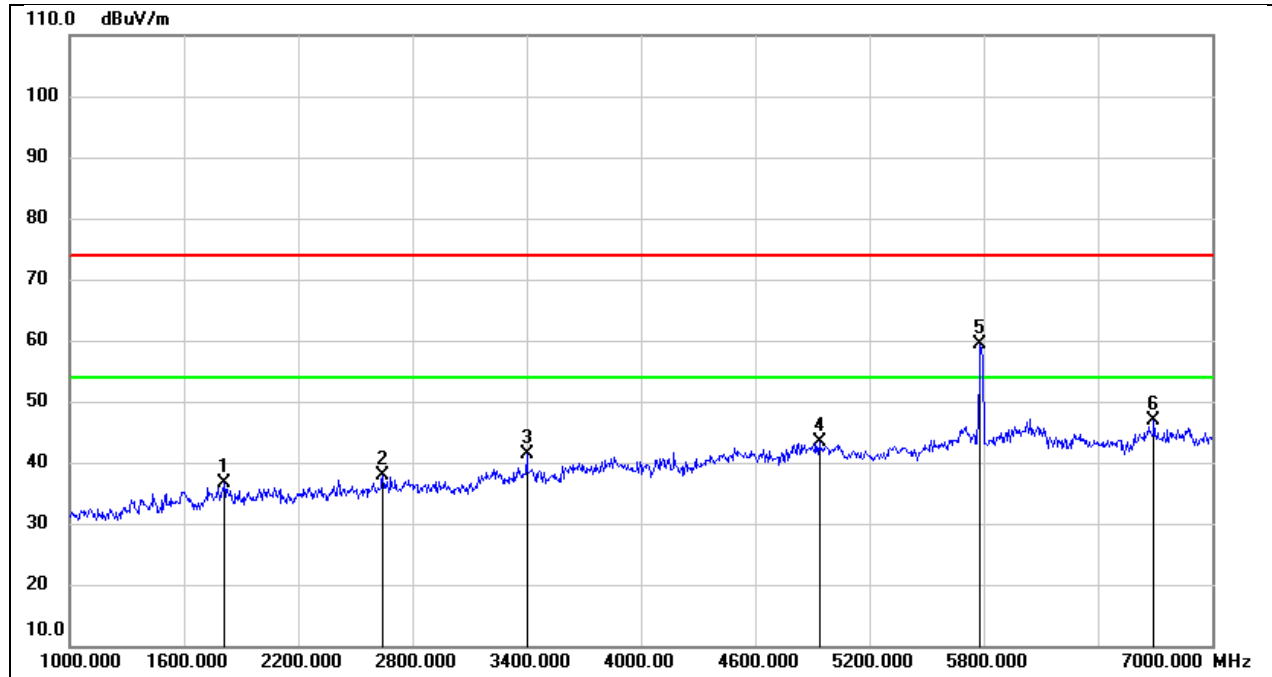


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1810.000	46.50	-9.97	36.53	74.00	-37.47	peak
2	2644.000	45.48	-7.58	37.90	74.00	-36.10	peak
3	3400.000	45.47	-4.21	41.26	74.00	-32.74	peak
4	4936.000	41.93	1.50	43.43	74.00	-30.57	peak
5	5782.000	55.03	4.43	59.46	74.00	-14.54	peak
6	6694.000	40.49	6.33	46.82	74.00	-27.18	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

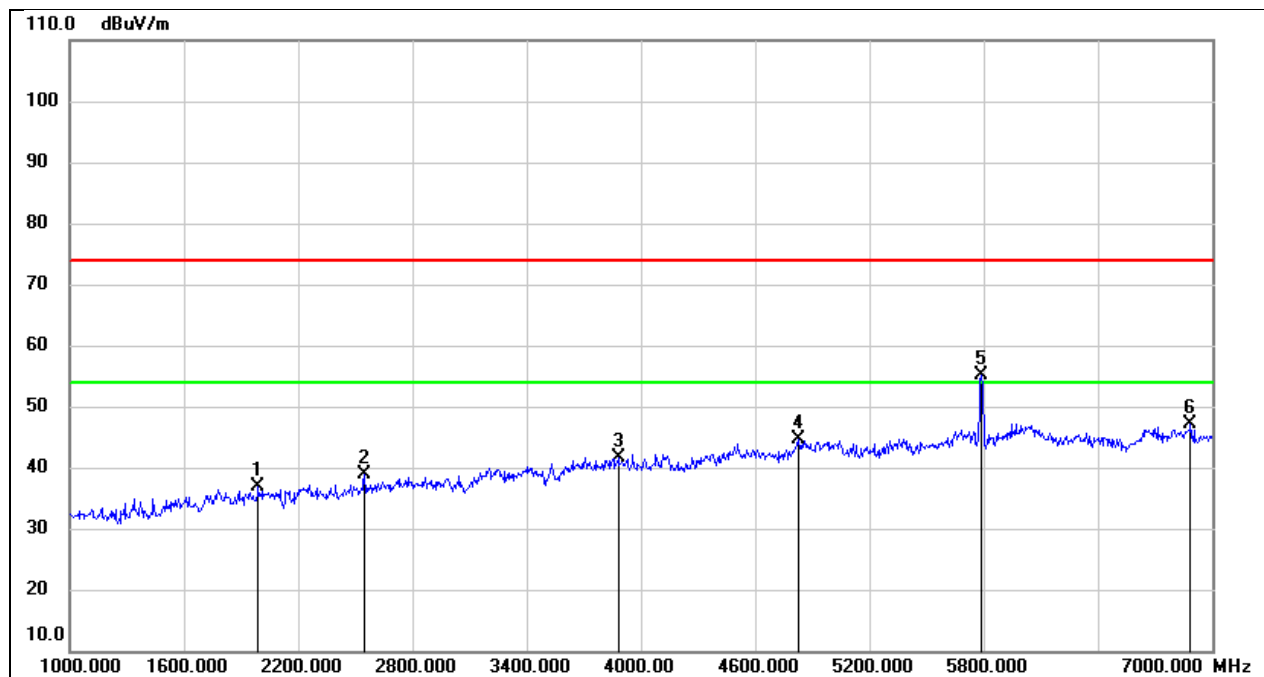


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1990.000	46.03	-9.21	36.82	74.00	-37.18	peak
2	2548.000	46.00	-7.15	38.85	74.00	-35.15	peak
3	3880.000	43.19	-1.57	41.62	74.00	-32.38	peak
4	4828.000	42.52	2.10	44.62	74.00	-29.38	peak
5	5788.000	49.61	5.55	55.16	74.00	-18.84	peak
6	6886.000	39.81	7.41	47.22	74.00	-26.78	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

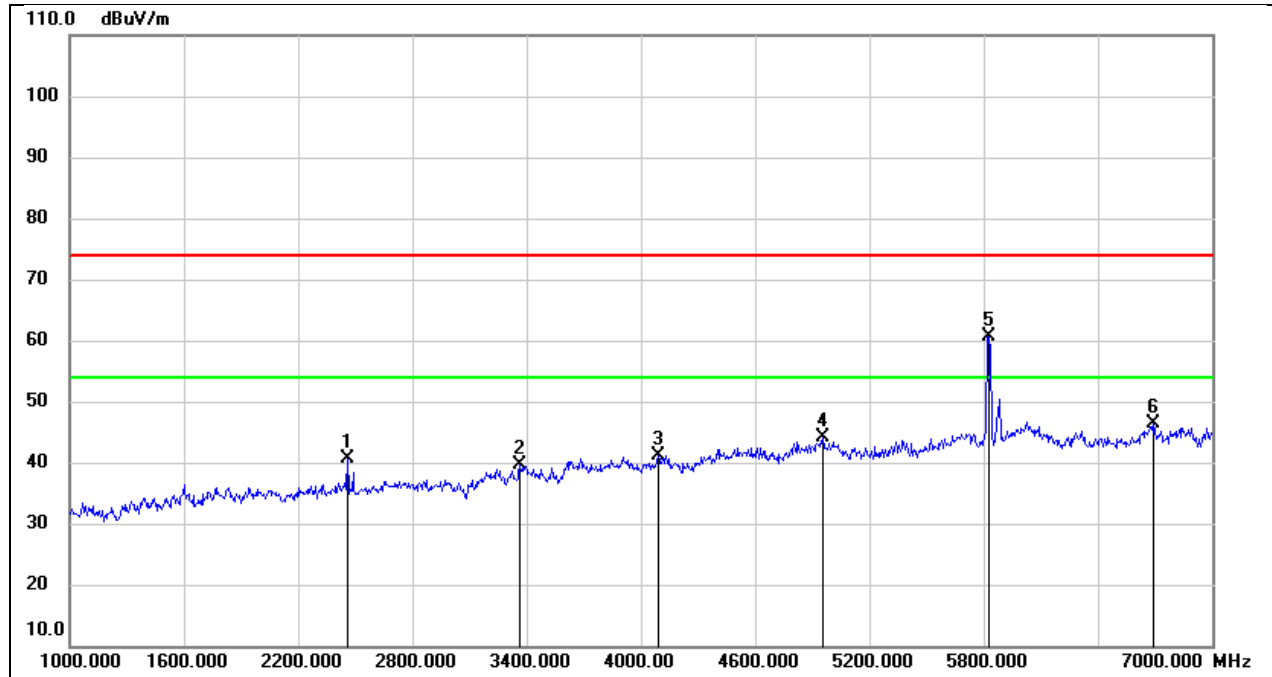

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.000	48.90	-8.37	40.53	74.00	-33.47	peak
2	3364.000	44.06	-4.37	39.69	74.00	-34.31	peak
3	4090.000	43.20	-2.07	41.13	74.00	-32.87	peak
4	4954.000	42.46	1.59	44.05	74.00	-29.95	peak
5	5824.000	56.05	4.64	60.69	74.00	-13.31	peak
6	6694.000	39.98	6.33	46.31	74.00	-27.69	peak


Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

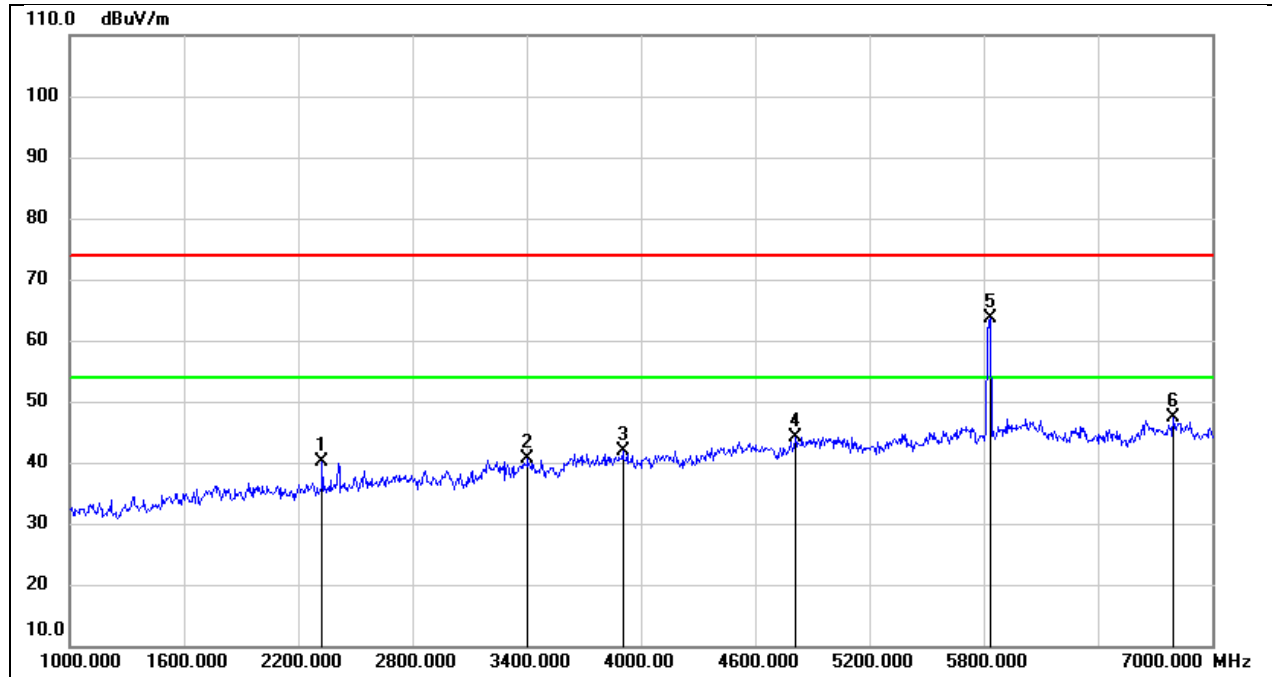

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2326.000	48.13	-8.03	40.10	74.00	-33.90	peak
2	3406.000	43.73	-3.13	40.60	74.00	-33.40	peak
3	3904.000	43.50	-1.52	41.98	74.00	-32.02	peak
4	4810.000	42.15	2.00	44.15	74.00	-29.85	peak
5	5836.000	57.80	5.78	63.58	74.00	-10.42	peak
6	6796.000	39.89	7.46	47.35	74.00	-26.65	peak


8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

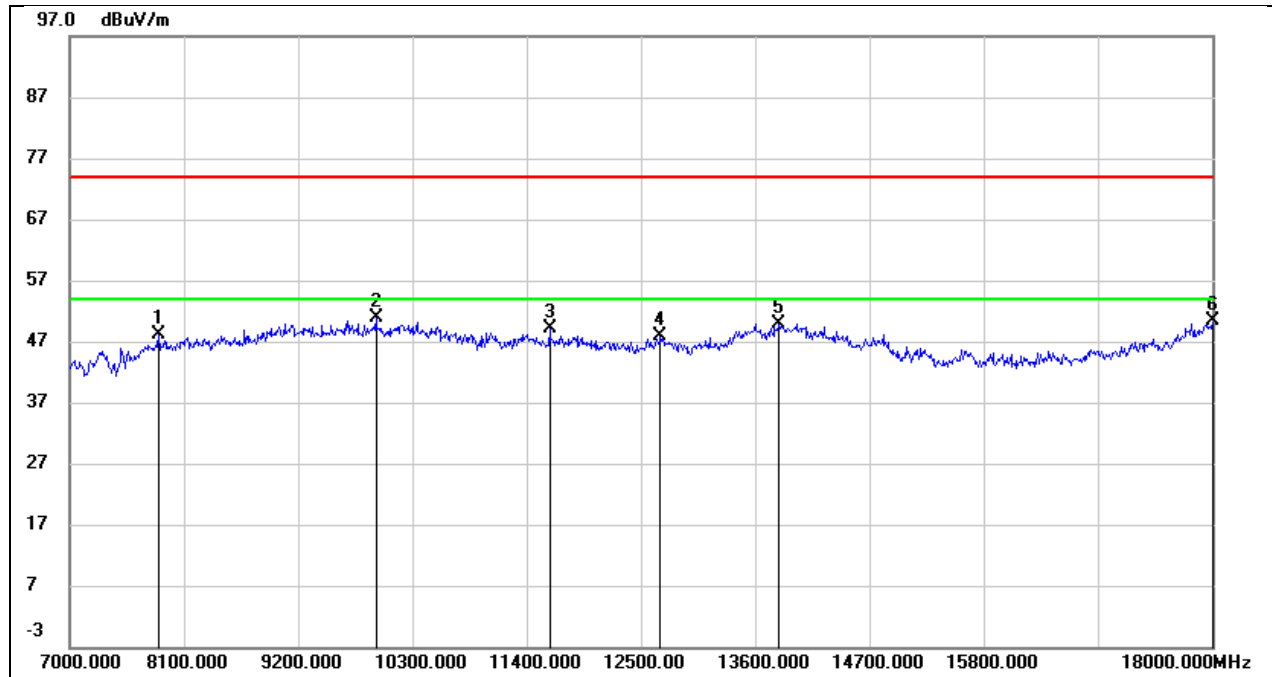


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	40.03	8.02	48.05	74.00	-25.95	peak
2	9948.000	37.45	13.46	50.91	74.00	-23.09	peak
3	11620.000	31.07	18.08	49.15	74.00	-24.85	peak
4	12687.000	28.31	19.52	47.83	74.00	-26.17	peak
5	13831.000	27.02	22.93	49.95	74.00	-24.05	peak
6	18000.000	20.70	29.61	50.31	74.00	-23.69	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

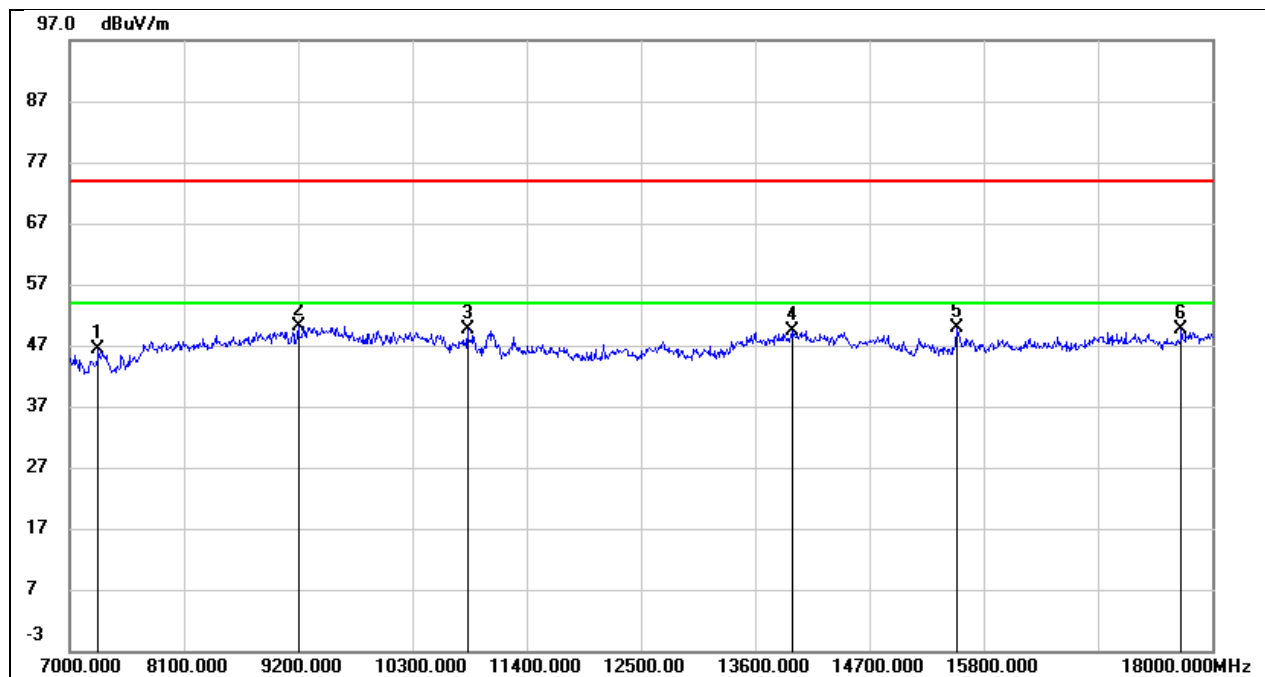


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	38.00	8.28	46.28	74.00	-27.72	peak
2	9200.000	38.33	11.80	50.13	74.00	-23.87	peak
3	10828.000	35.73	13.92	49.65	74.00	-24.35	peak
4	13963.000	27.63	21.85	49.48	74.00	-24.52	peak
5	15536.000	29.09	20.71	49.80	74.00	-24.20	peak
6	17703.000	23.94	25.65	49.59	74.00	-24.41	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

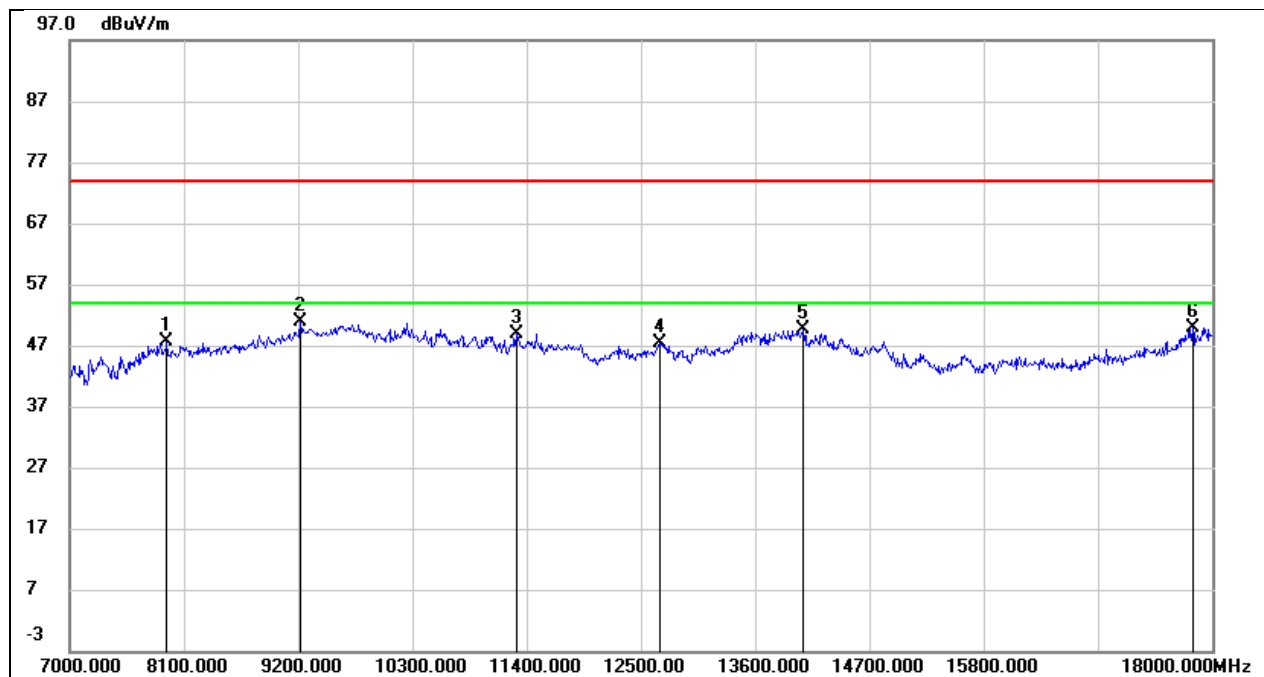


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7935.000	39.68	8.05	47.73	74.00	-26.27	peak
2	9222.000	39.27	11.64	50.91	74.00	-23.09	peak
3	11301.000	32.06	16.76	48.82	74.00	-25.18	peak
4	12676.000	27.95	19.48	47.43	74.00	-26.57	peak
5	14062.000	26.21	23.35	49.56	74.00	-24.44	peak
6	17813.000	22.25	27.62	49.87	74.00	-24.13	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

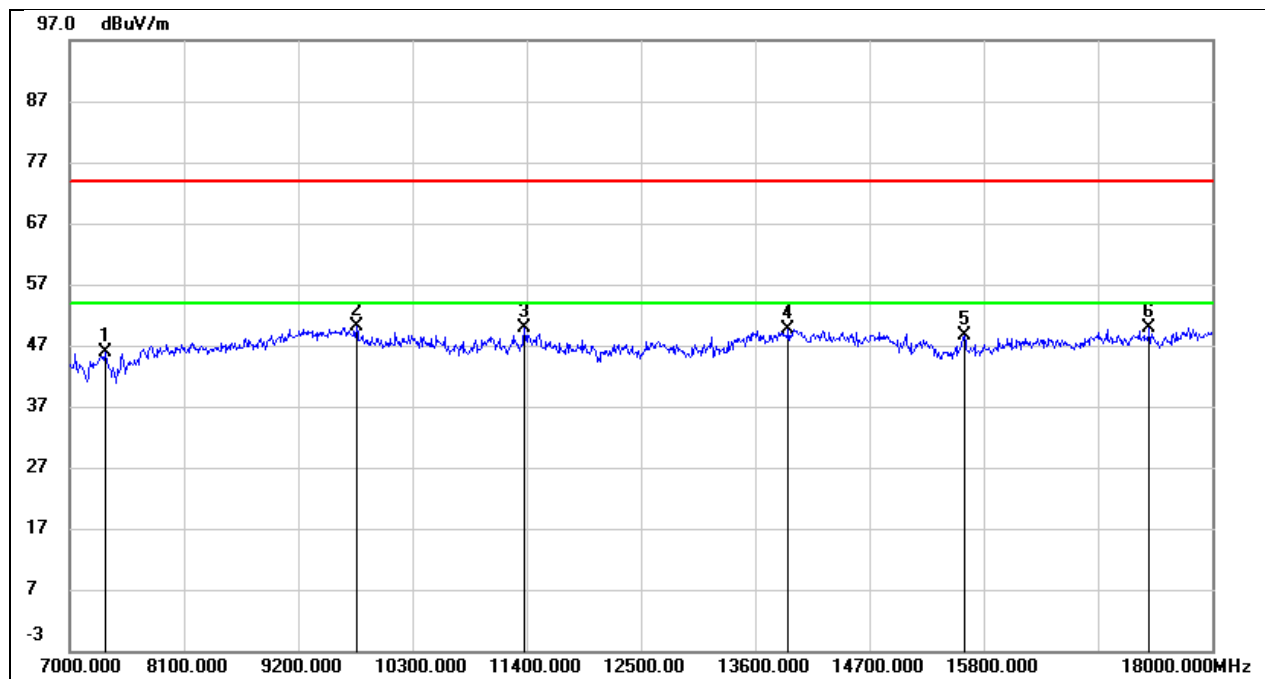


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.63	8.30	45.93	74.00	-28.07	peak
2	9761.000	36.71	13.37	50.08	74.00	-23.92	peak
3	11378.000	33.97	15.90	49.87	74.00	-24.13	peak
4	13919.000	27.86	21.66	49.52	74.00	-24.48	peak
5	15613.000	27.65	20.93	48.58	74.00	-25.42	peak
6	17395.000	24.77	25.06	49.83	74.00	-24.17	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

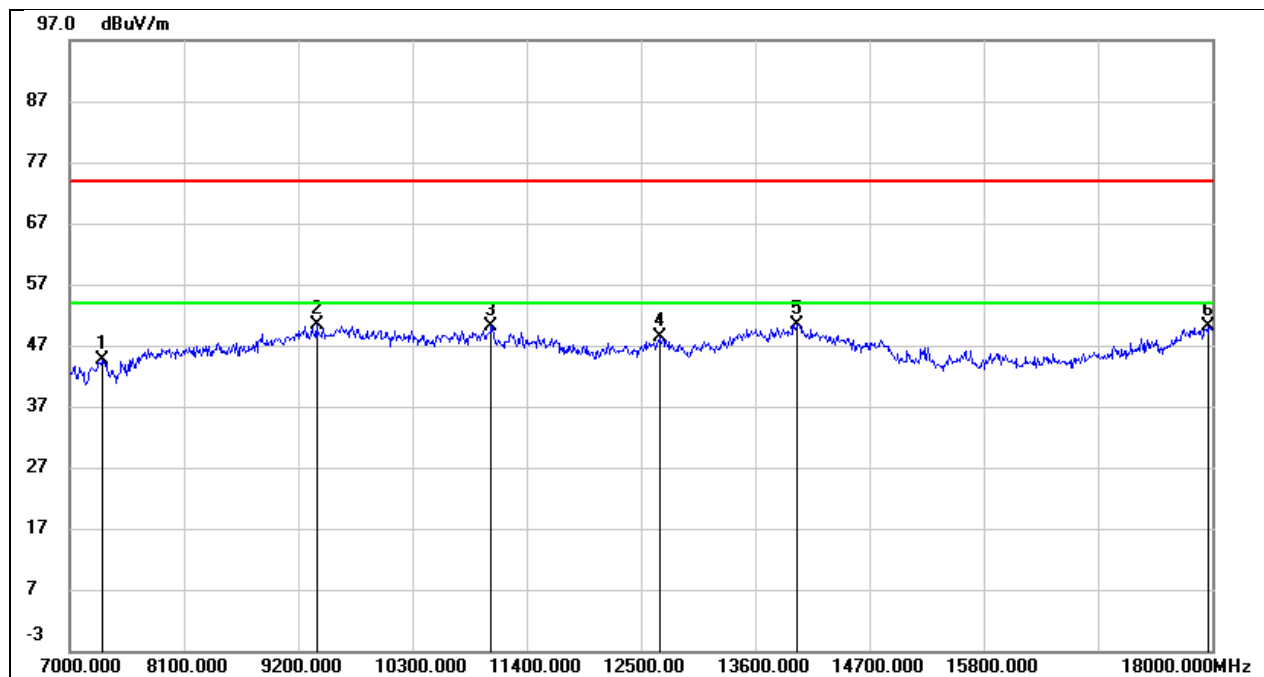


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.96	7.64	44.60	74.00	-29.40	peak
2	9376.000	38.28	12.13	50.41	74.00	-23.59	peak
3	11059.000	34.67	15.39	50.06	74.00	-23.94	peak
4	12676.000	28.89	19.48	48.37	74.00	-25.63	peak
5	13996.000	26.81	23.59	50.40	74.00	-23.60	peak
6	17967.000	20.82	29.26	50.08	74.00	-23.92	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

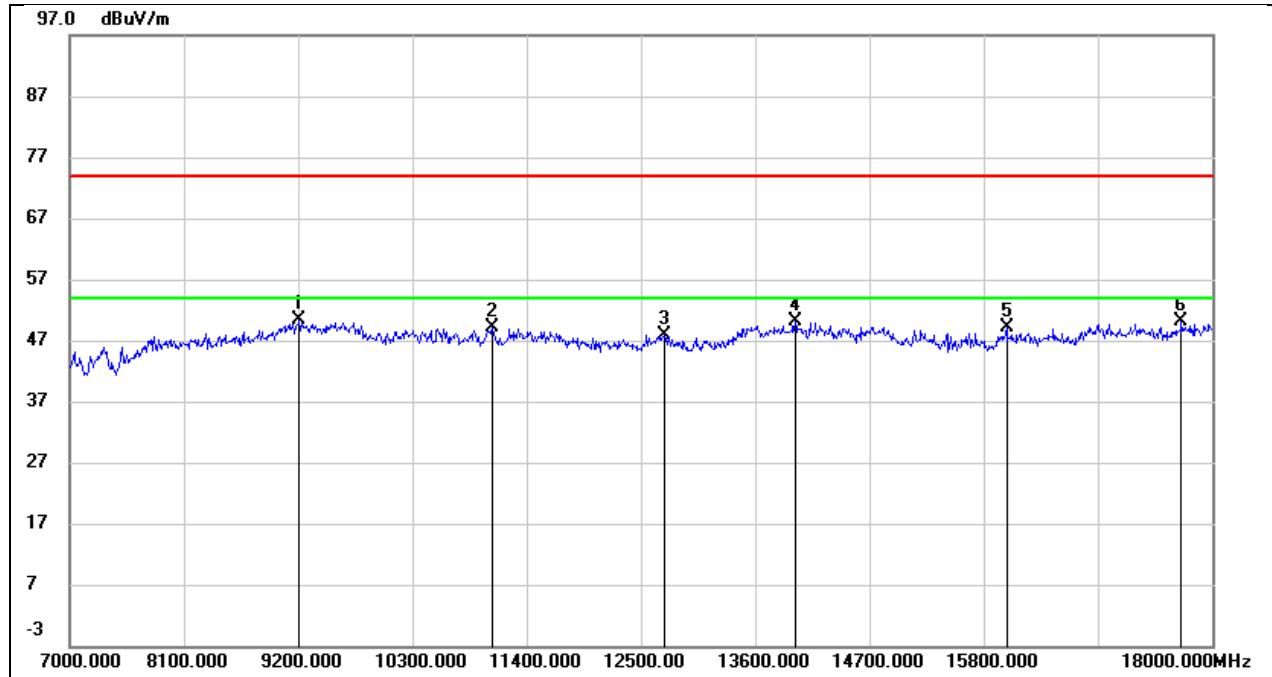


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.56	11.82	50.38	74.00	-23.62	peak
2	11070.000	34.66	14.55	49.21	74.00	-24.79	peak
3	12731.000	29.31	18.66	47.97	74.00	-26.03	peak
4	13985.000	28.26	21.95	50.21	74.00	-23.79	peak
5	16020.000	26.02	23.00	49.02	74.00	-24.98	peak
6	17703.000	24.58	25.65	50.23	74.00	-23.77	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

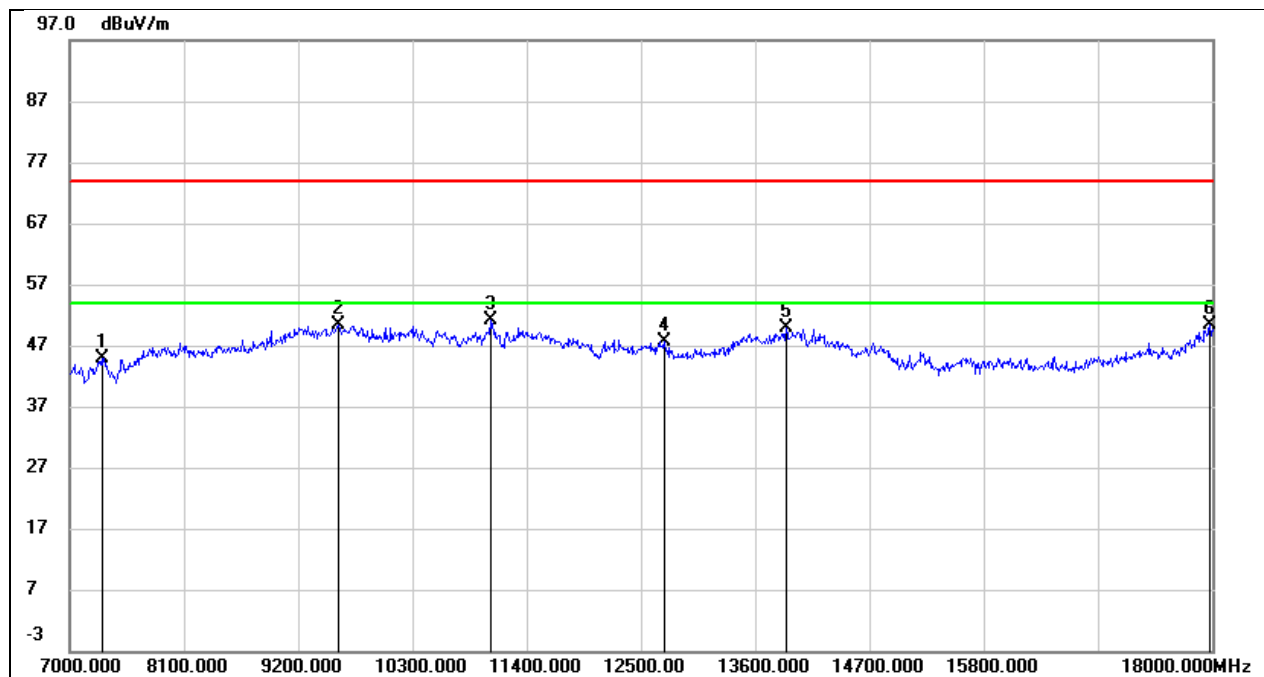


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.33	7.64	44.97	74.00	-29.03	peak
2	9585.000	36.95	13.38	50.33	74.00	-23.67	peak
3	11048.000	35.80	15.33	51.13	74.00	-22.87	peak
4	12731.000	27.95	19.70	47.65	74.00	-26.35	peak
5	13897.000	26.71	23.19	49.90	74.00	-24.10	peak
6	17978.000	20.91	29.38	50.29	74.00	-23.71	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

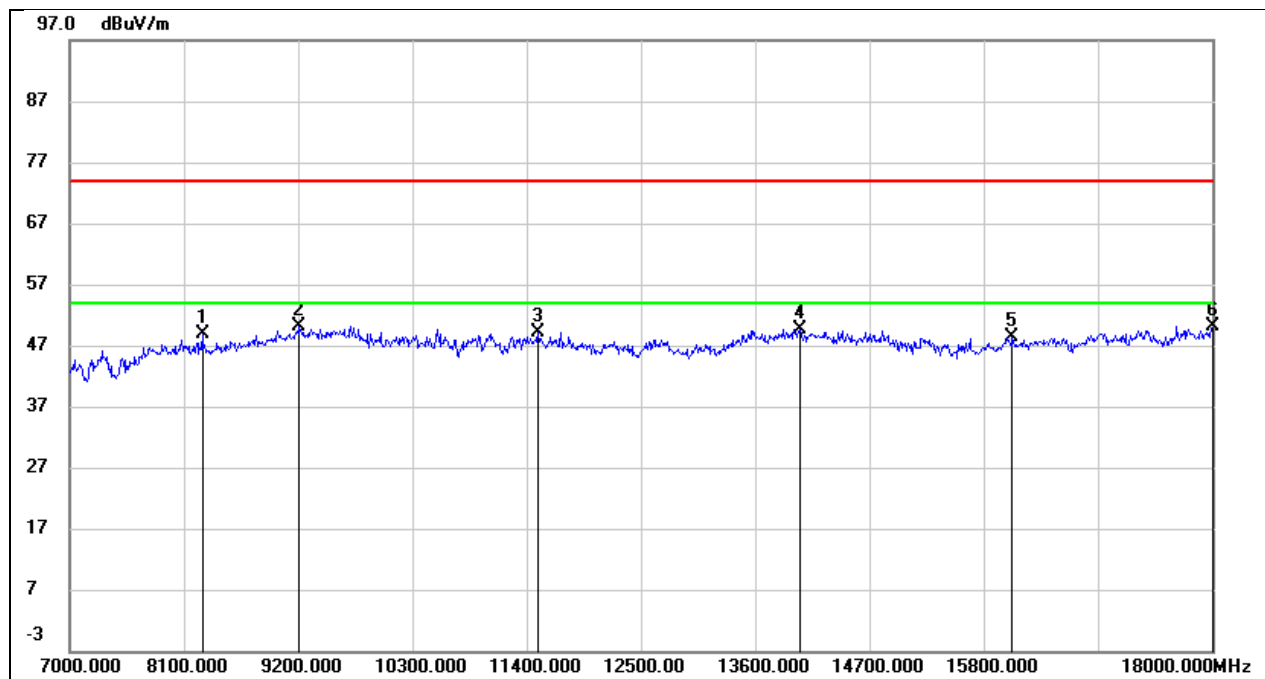


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8276.000	39.89	8.98	48.87	74.00	-25.13	peak
2	9211.000	38.25	11.82	50.07	74.00	-23.93	peak
3	11510.000	32.67	16.37	49.04	74.00	-24.96	peak
4	14029.000	27.75	21.96	49.71	74.00	-24.29	peak
5	16075.000	25.14	23.35	48.49	74.00	-25.51	peak
6	18000.000	22.81	27.41	50.22	74.00	-23.78	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

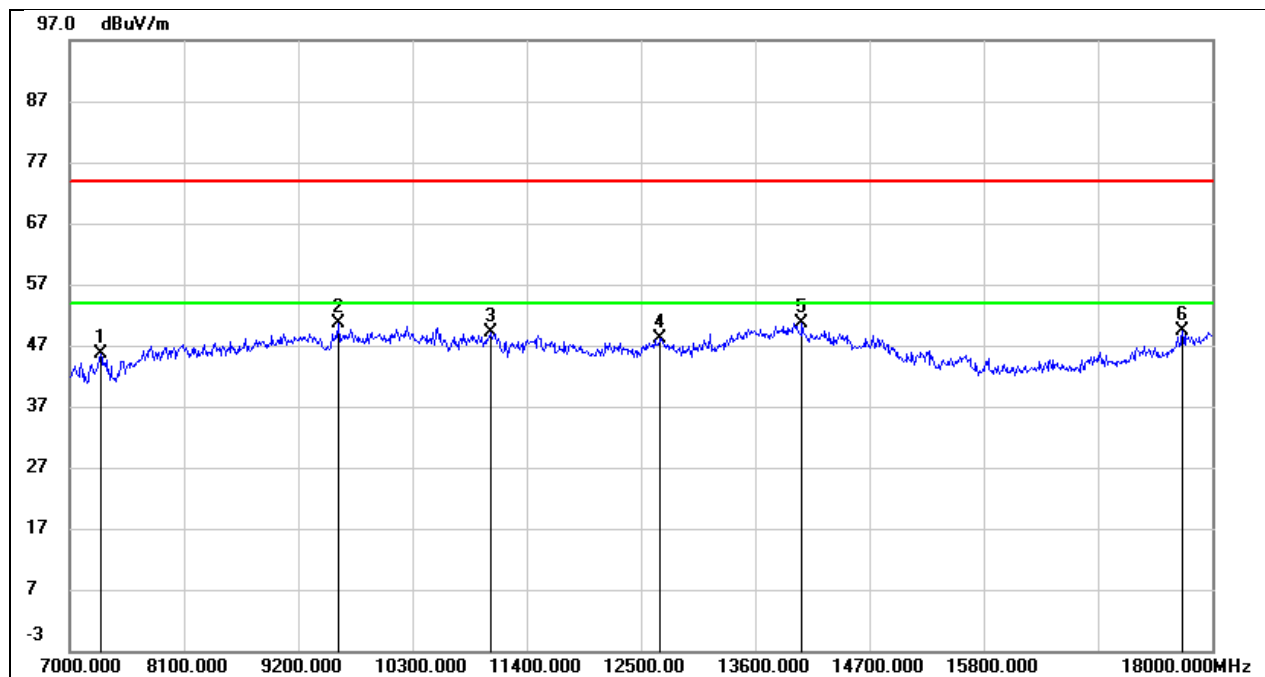


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	38.02	7.64	45.66	74.00	-28.34	peak
2	9585.000	37.14	13.38	50.52	74.00	-23.48	peak
3	11048.000	33.87	15.33	49.20	74.00	-24.80	peak
4	12687.000	28.53	19.52	48.05	74.00	-25.95	peak
5	14051.000	27.30	23.40	50.70	74.00	-23.30	peak
6	17714.000	22.62	26.66	49.28	74.00	-24.72	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

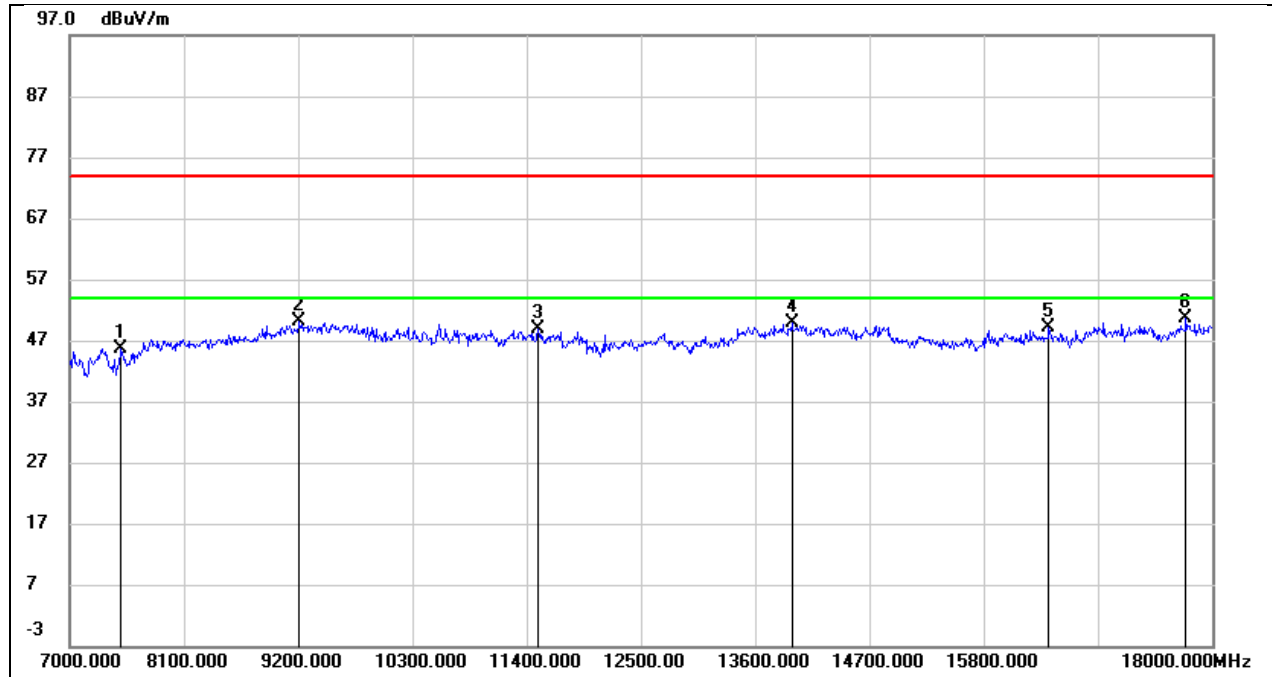


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.18	8.35	45.53	74.00	-28.47	peak
2	9211.000	38.19	11.82	50.01	74.00	-23.99	peak
3	11510.000	32.53	16.37	48.90	74.00	-25.10	peak
4	13952.000	28.15	21.81	49.96	74.00	-24.04	peak
5	16427.000	25.55	23.60	49.15	74.00	-24.85	peak
6	17747.000	24.84	25.89	50.73	74.00	-23.27	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

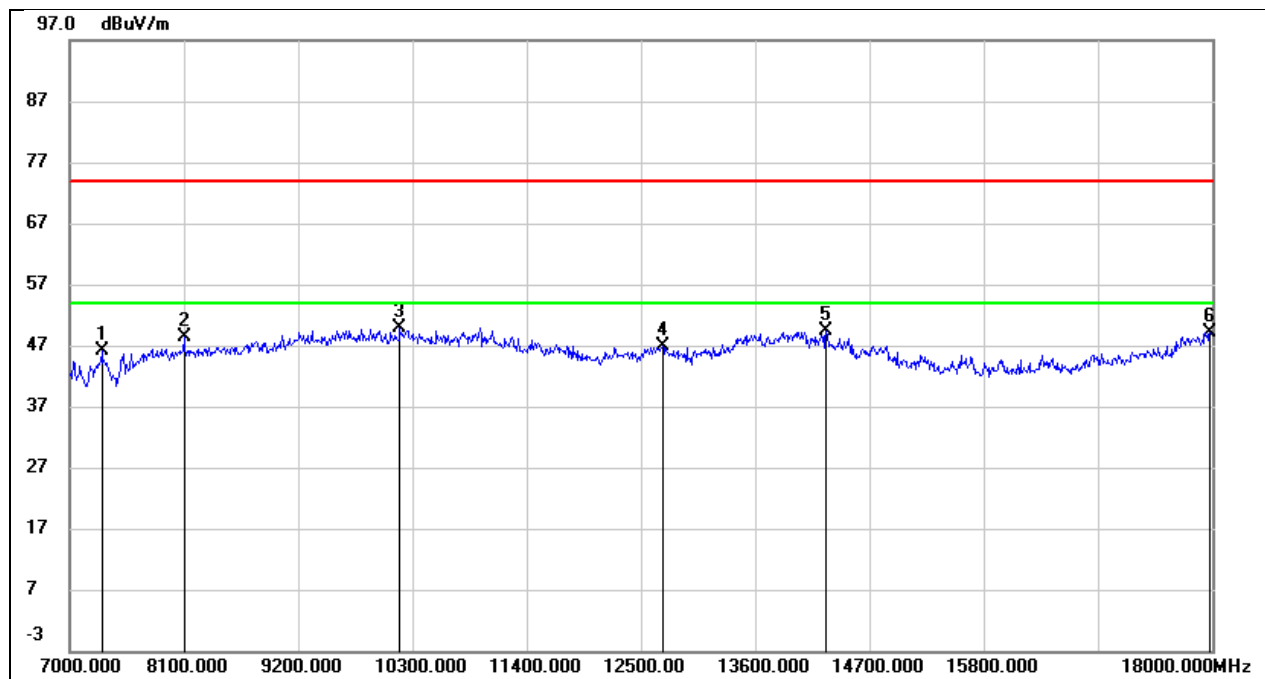


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.60	7.64	46.24	74.00	-27.76	peak
2	8100.000	40.20	8.21	48.41	74.00	-25.59	peak
3	10179.000	36.74	13.20	49.94	74.00	-24.06	peak
4	12709.000	27.38	19.60	46.98	74.00	-27.02	peak
5	14282.000	27.13	22.28	49.41	74.00	-24.59	peak
6	17978.000	19.67	29.38	49.05	74.00	-24.95	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

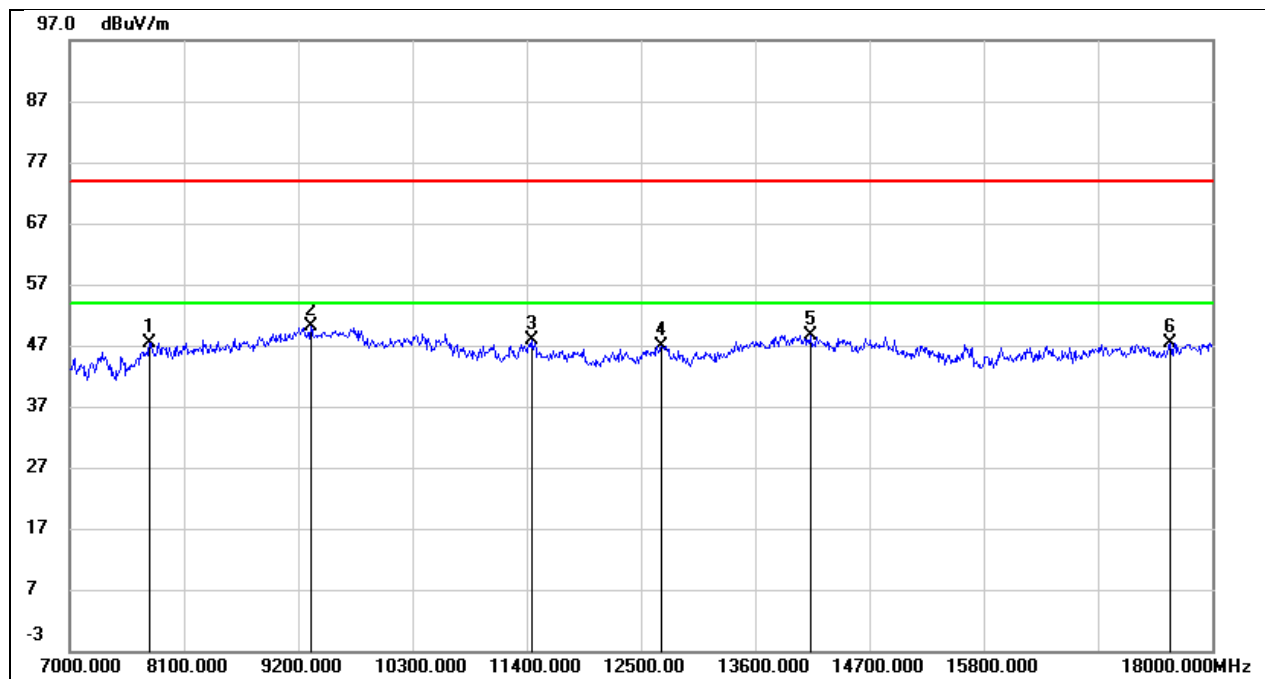


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.94	8.49	47.43	74.00	-26.57	peak
2	9321.000	38.06	12.10	50.16	74.00	-23.84	peak
3	11444.000	31.79	16.15	47.94	74.00	-26.06	peak
4	12698.000	28.29	18.54	46.83	74.00	-27.17	peak
5	14128.000	26.91	21.82	48.73	74.00	-25.27	peak
6	17593.000	22.23	25.10	47.33	74.00	-26.67	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

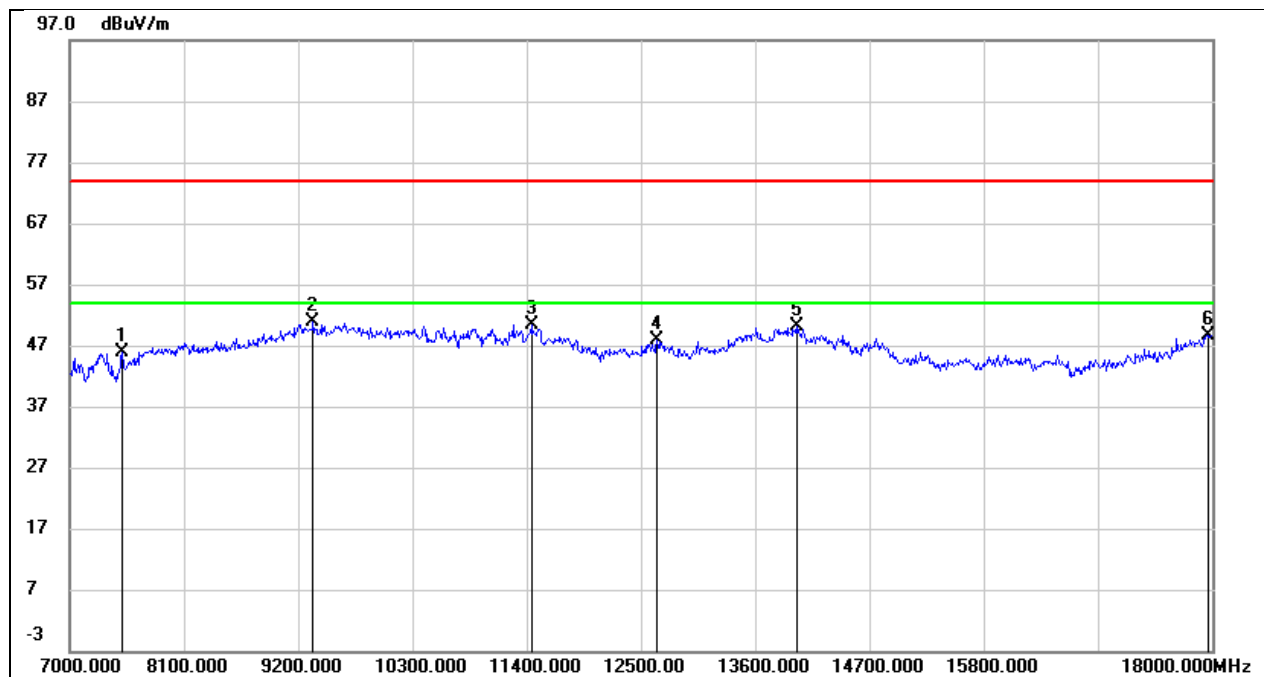


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.92	7.84	45.76	74.00	-28.24	peak
2	9343.000	38.80	12.03	50.83	74.00	-23.17	peak
3	11444.000	32.76	17.57	50.33	74.00	-23.67	peak
4	12654.000	28.38	19.39	47.77	74.00	-26.23	peak
5	13996.000	26.62	23.59	50.21	74.00	-23.79	peak
6	17956.000	19.53	29.14	48.67	74.00	-25.33	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

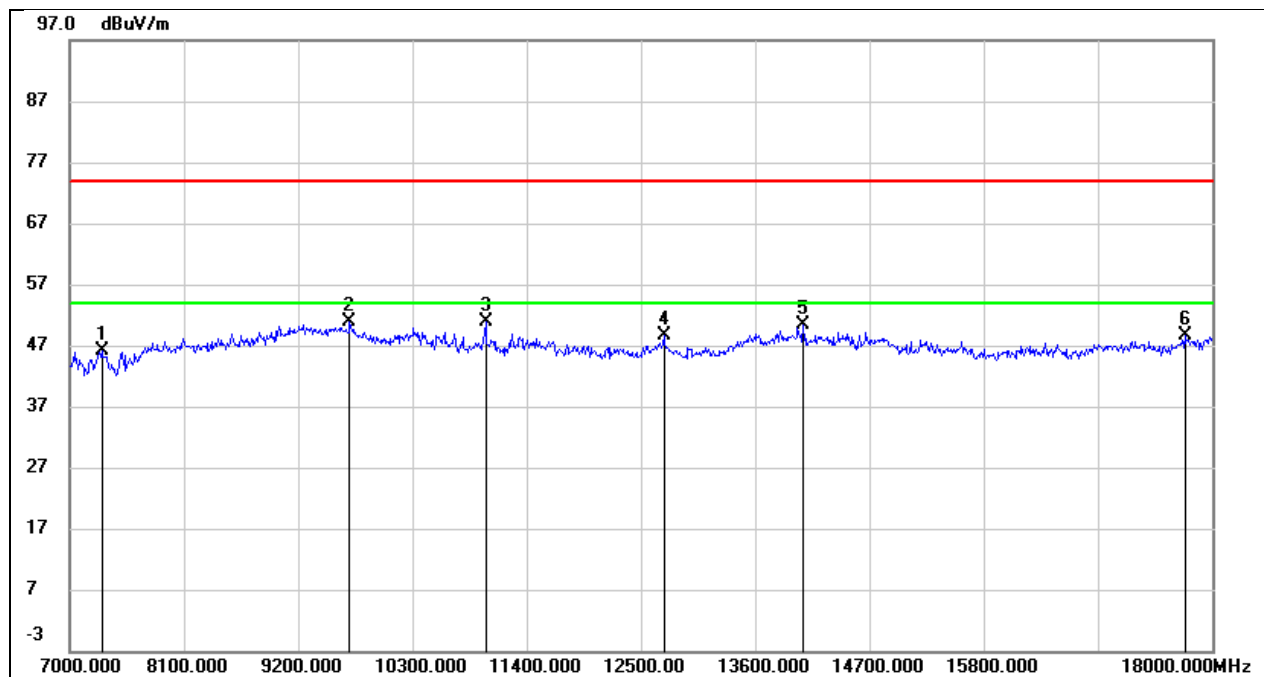


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.84	8.29	46.13	74.00	-27.87	peak
2	9695.000	37.48	13.34	50.82	74.00	-23.18	peak
3	11004.000	36.60	14.27	50.87	74.00	-23.13	peak
4	12720.000	30.03	18.62	48.65	74.00	-25.35	peak
5	14062.000	28.44	21.91	50.35	74.00	-23.65	peak
6	17736.000	22.73	25.83	48.56	74.00	-25.44	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

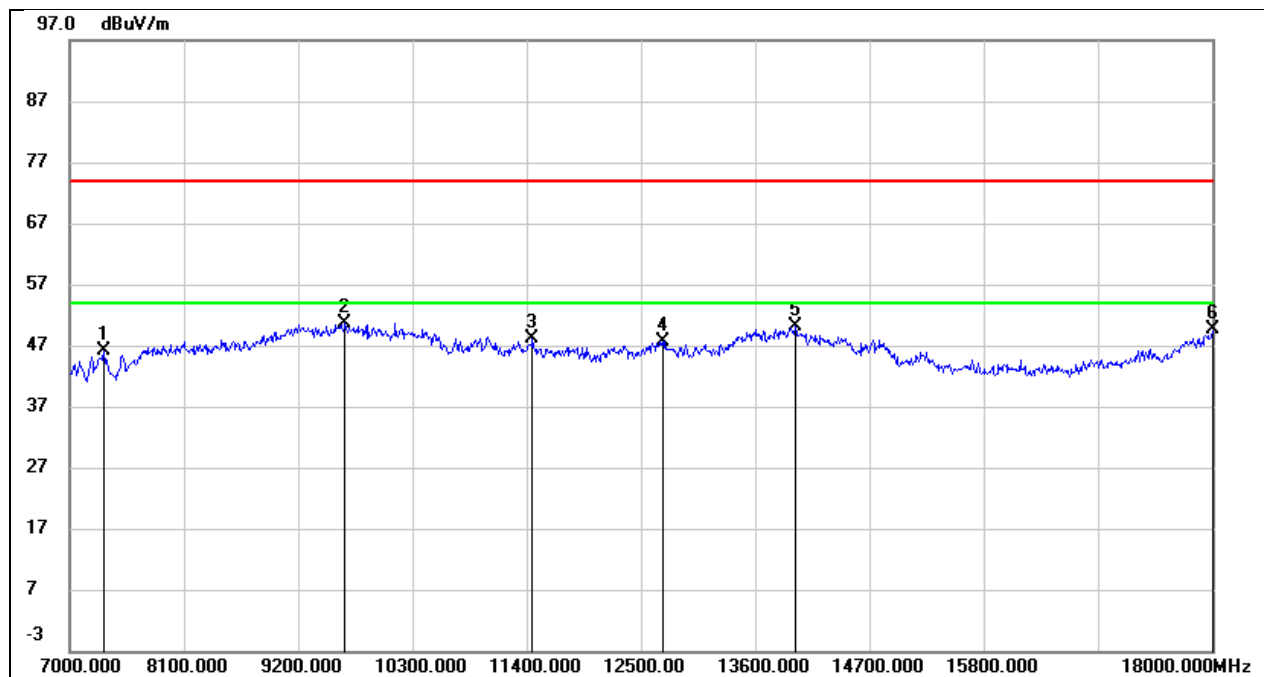


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.39	7.66	46.05	74.00	-27.95	peak
2	9651.000	37.01	13.55	50.56	74.00	-23.44	peak
3	11455.000	30.42	17.62	48.04	74.00	-25.96	peak
4	12709.000	28.12	19.60	47.72	74.00	-26.28	peak
5	13985.000	26.66	23.55	50.21	74.00	-23.79	peak
6	18000.000	19.92	29.61	49.53	74.00	-24.47	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

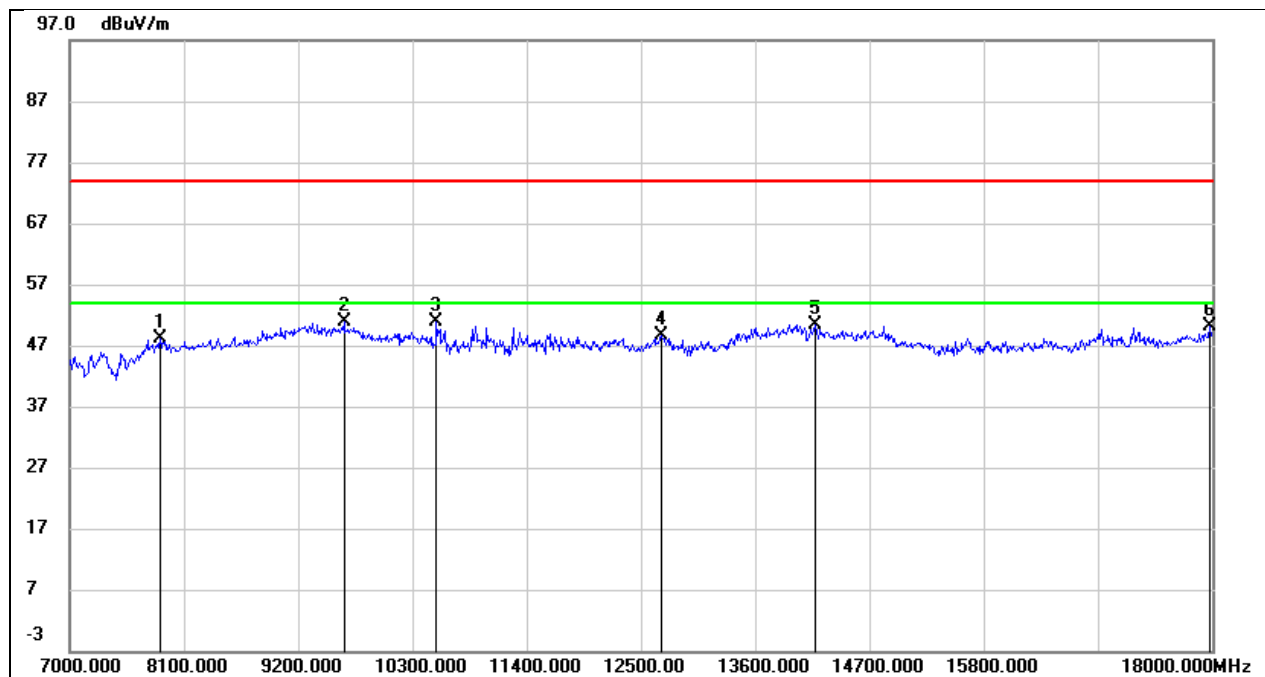


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.60	8.53	48.13	74.00	-25.87	peak
2	9640.000	37.46	13.33	50.79	74.00	-23.21	peak
3	10531.000	37.40	13.39	50.79	74.00	-23.21	peak
4	12698.000	29.97	18.54	48.51	74.00	-25.49	peak
5	14172.000	28.62	21.75	50.37	74.00	-23.63	peak
6	17978.000	22.79	27.28	50.07	74.00	-23.93	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

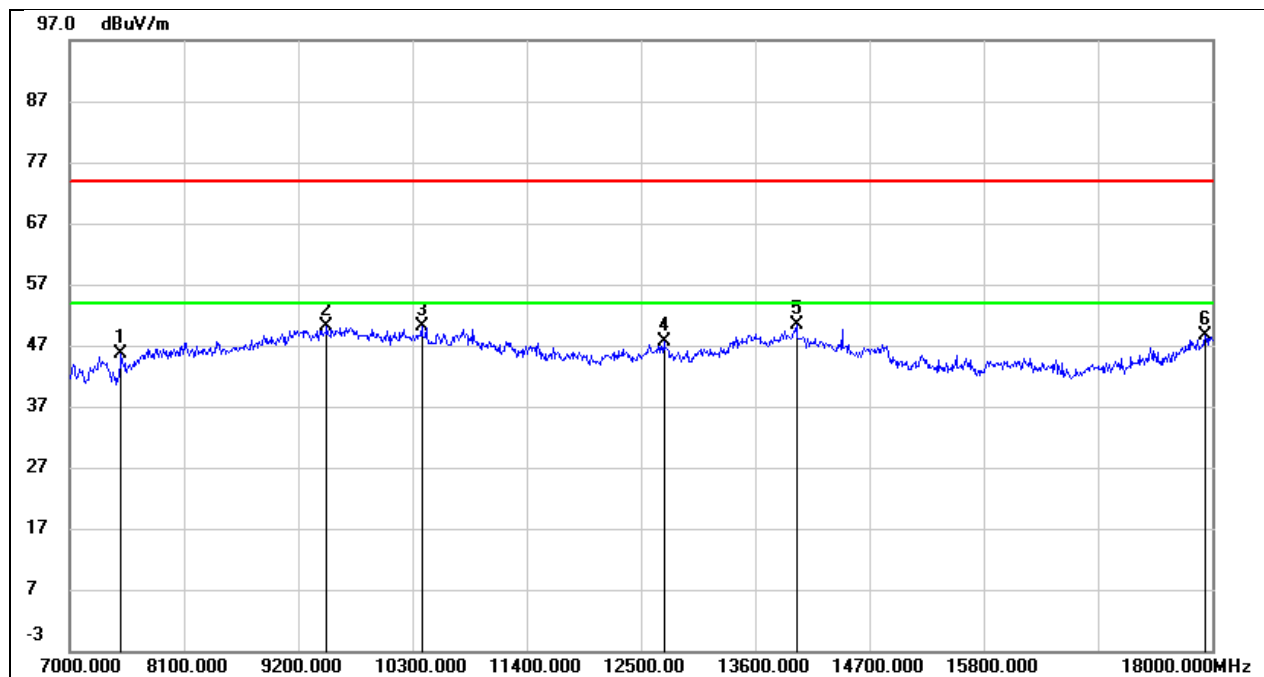


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.69	7.84	45.53	74.00	-28.47	peak
2	9475.000	37.43	12.70	50.13	74.00	-23.87	peak
3	10388.000	36.79	13.33	50.12	74.00	-23.88	peak
4	12720.000	28.00	19.65	47.65	74.00	-26.35	peak
5	13996.000	26.74	23.59	50.33	74.00	-23.67	peak
6	17934.000	19.77	28.91	48.68	74.00	-25.32	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

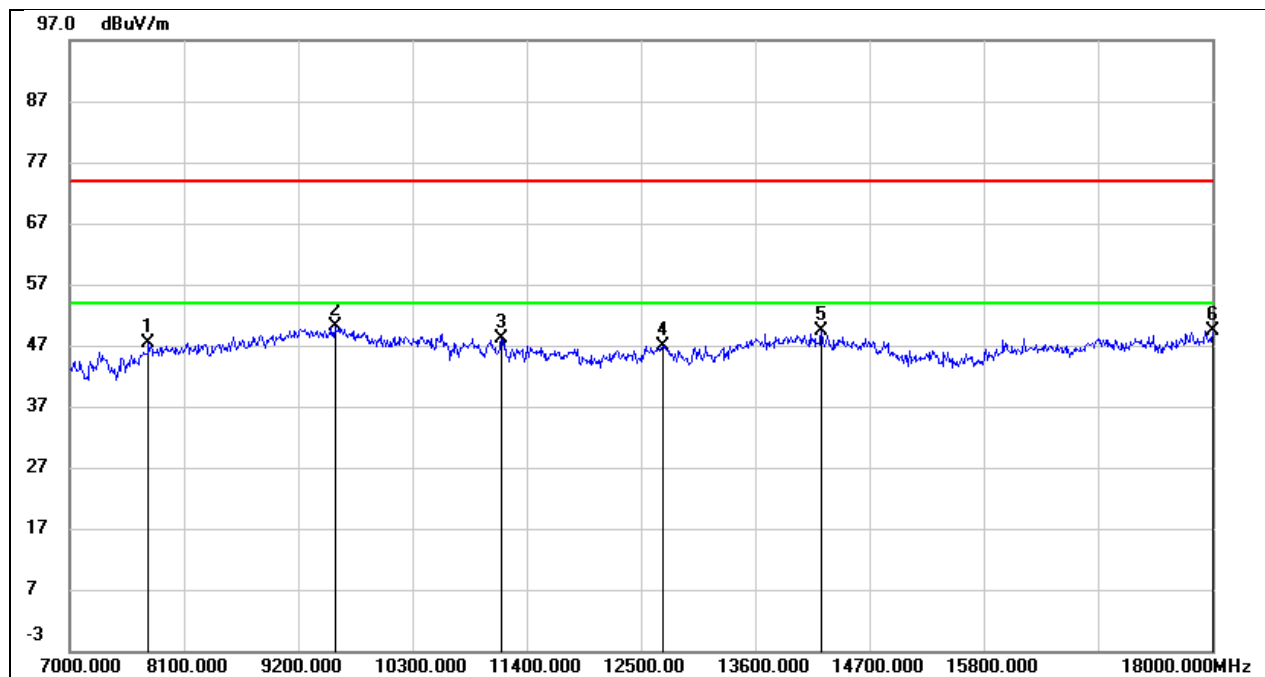


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.89	8.47	47.36	74.00	-26.64	peak
2	9552.000	36.97	13.10	50.07	74.00	-23.93	peak
3	11158.000	33.21	14.91	48.12	74.00	-25.88	peak
4	12709.000	28.35	18.58	46.93	74.00	-27.07	peak
5	14238.000	27.83	21.58	49.41	74.00	-24.59	peak
6	18000.000	21.87	27.41	49.28	74.00	-24.72	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

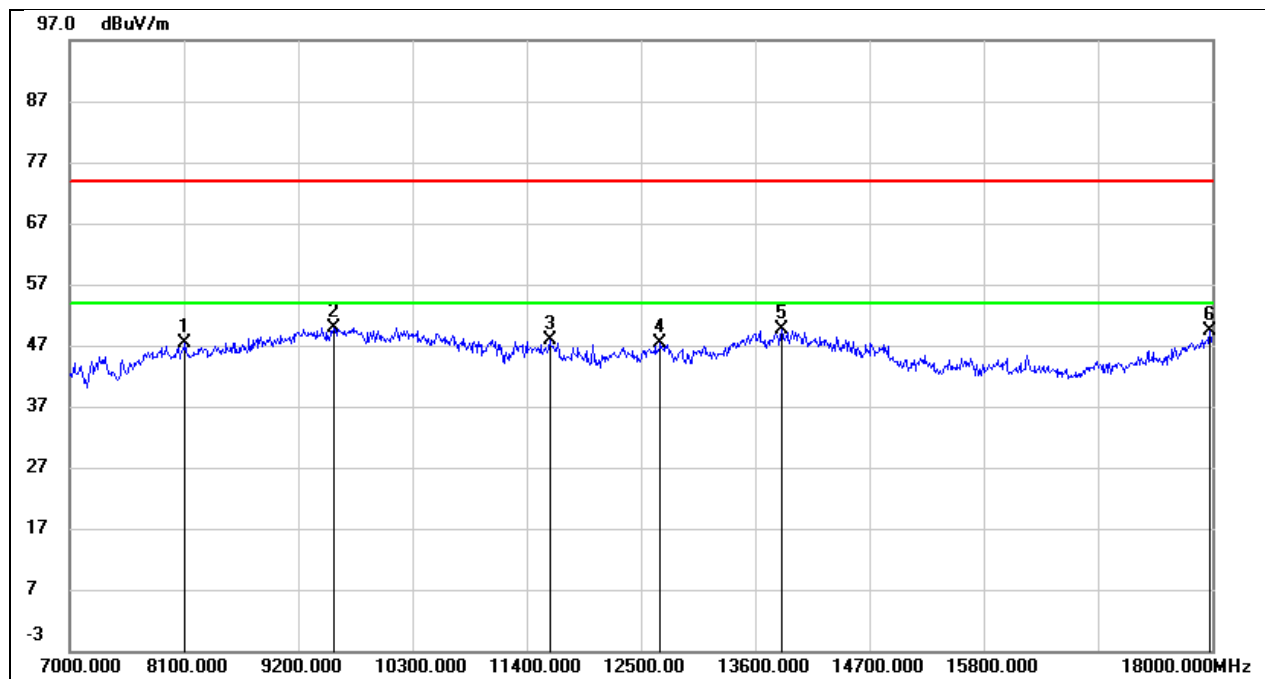


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.12	8.23	47.35	74.00	-26.65	peak
2	9541.000	36.83	13.10	49.93	74.00	-24.07	peak
3	11620.000	29.76	18.08	47.84	74.00	-26.16	peak
4	12687.000	27.87	19.52	47.39	74.00	-26.61	peak
5	13853.000	26.58	23.01	49.59	74.00	-24.41	peak
6	17978.000	19.89	29.38	49.27	74.00	-24.73	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

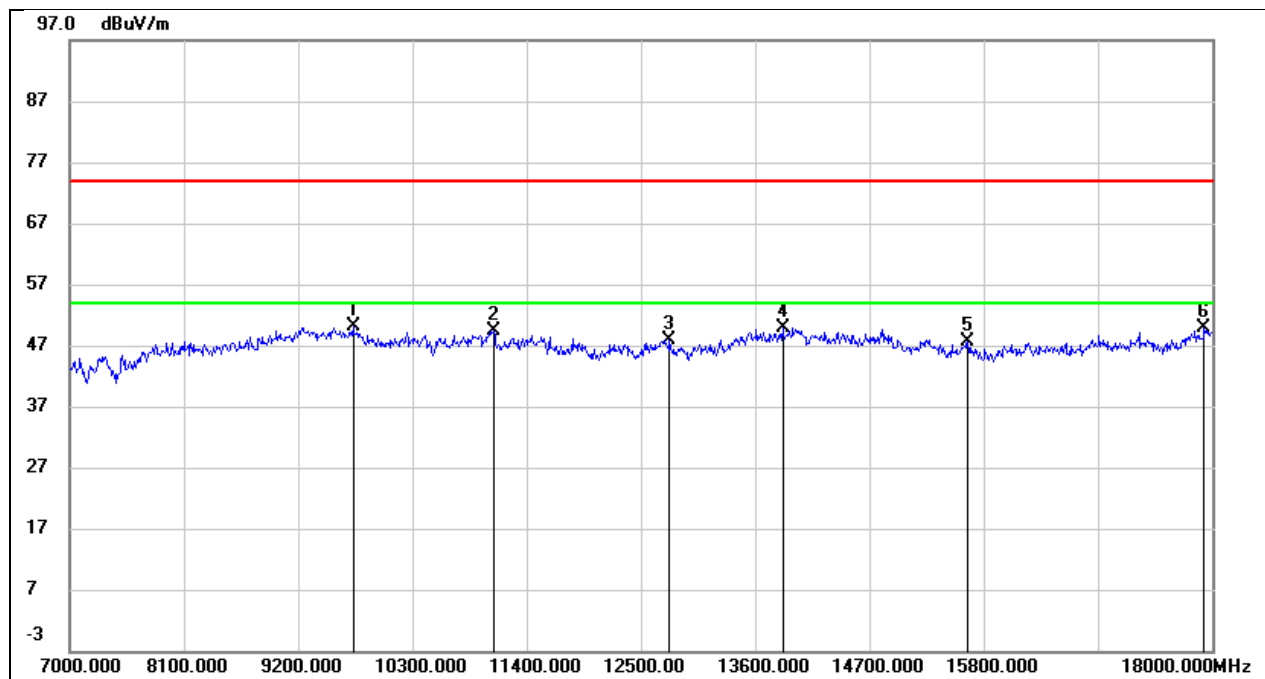


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9728.000	36.80	13.36	50.16	74.00	-23.84	peak
2	11081.000	34.84	14.59	49.43	74.00	-24.57	peak
3	12775.000	29.12	18.82	47.94	74.00	-26.06	peak
4	13864.000	28.51	21.43	49.94	74.00	-24.06	peak
5	15646.000	26.46	21.05	47.51	74.00	-26.49	peak
6	17923.000	22.91	26.92	49.83	74.00	-24.17	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

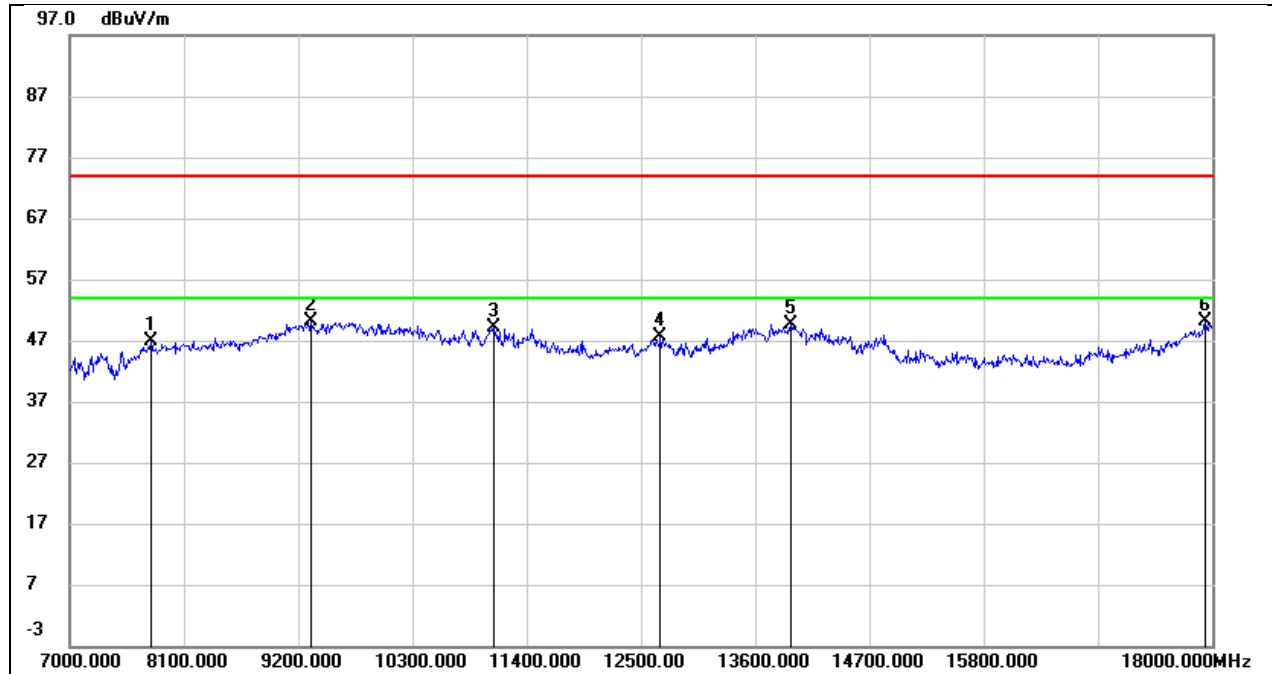


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.77	7.99	46.76	74.00	-27.24	peak
2	9321.000	38.09	11.95	50.04	74.00	-23.96	peak
3	11081.000	33.64	15.51	49.15	74.00	-24.85	peak
4	12687.000	28.06	19.52	47.58	74.00	-26.42	peak
5	13941.000	26.34	23.37	49.71	74.00	-24.29	peak
6	17934.000	21.22	28.91	50.13	74.00	-23.87	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

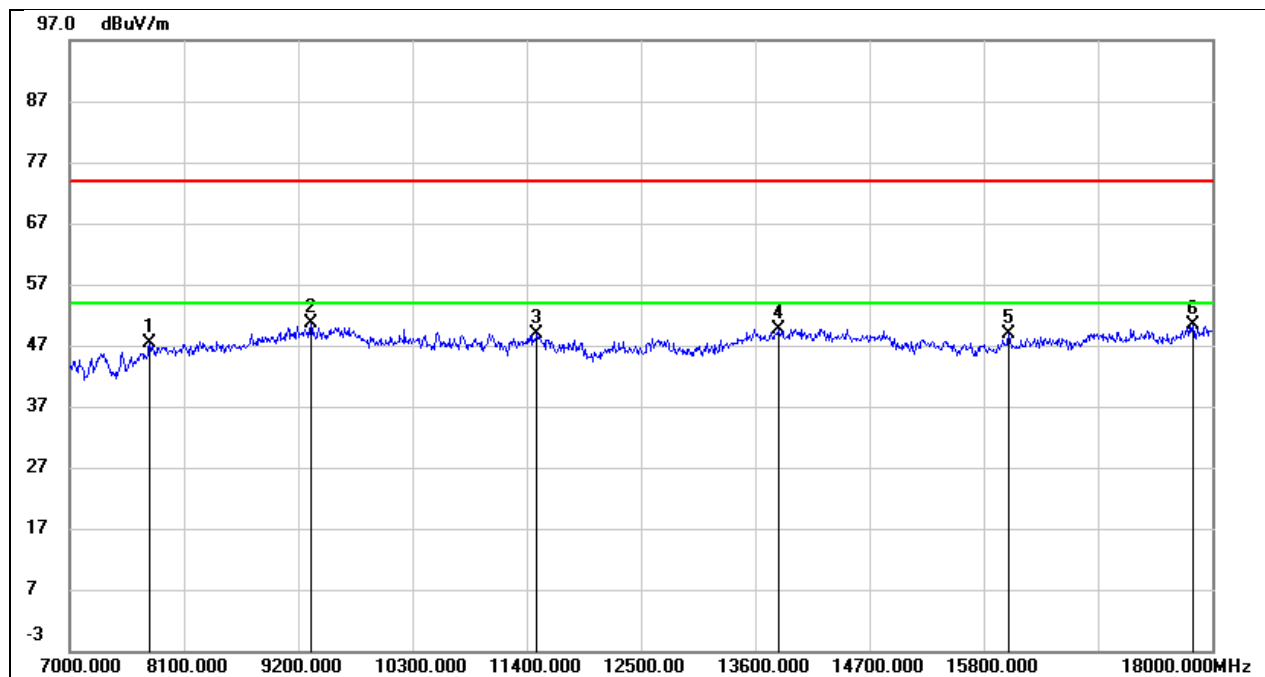


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.80	8.49	47.29	74.00	-26.71	peak
2	9321.000	38.62	12.10	50.72	74.00	-23.28	peak
3	11499.000	32.44	16.33	48.77	74.00	-25.23	peak
4	13831.000	28.44	21.30	49.74	74.00	-24.26	peak
5	16042.000	25.72	23.15	48.87	74.00	-25.13	peak
6	17813.000	24.14	26.24	50.38	74.00	-23.62	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

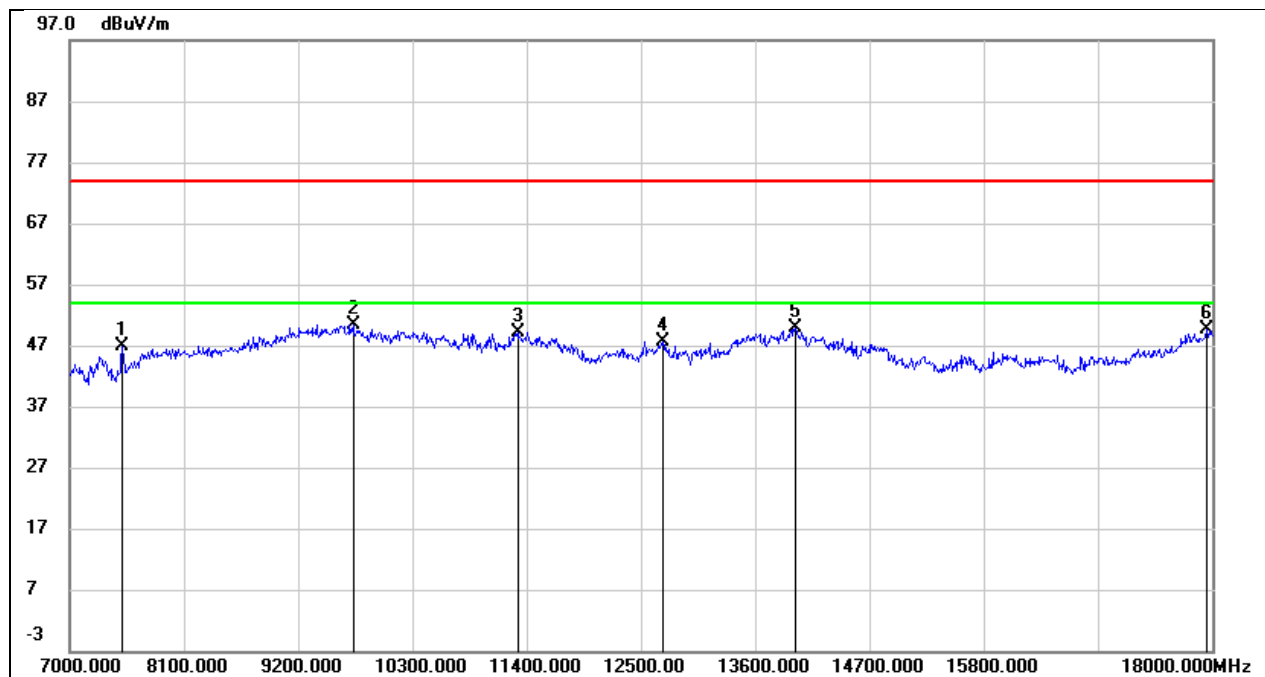


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	38.94	7.84	46.78	74.00	-27.22	peak
2	9728.000	36.81	13.68	50.49	74.00	-23.51	peak
3	11312.000	32.33	16.83	49.16	74.00	-24.84	peak
4	12709.000	28.07	19.60	47.67	74.00	-26.33	peak
5	13985.000	26.32	23.55	49.87	74.00	-24.13	peak
6	17945.000	20.49	29.03	49.52	74.00	-24.48	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

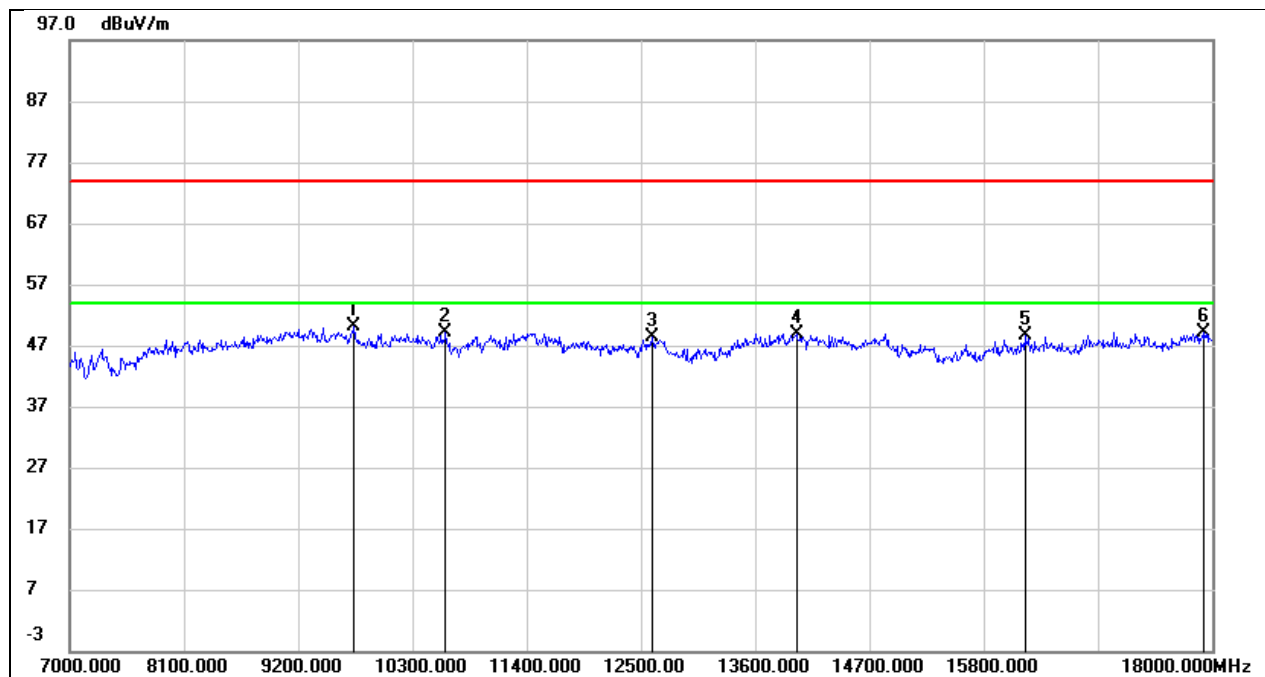


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9739.000	36.73	13.36	50.09	74.00	-23.91	peak
2	10619.000	35.54	13.54	49.08	74.00	-24.92	peak
3	12610.000	30.19	18.24	48.43	74.00	-25.57	peak
4	13996.000	27.00	21.99	48.99	74.00	-25.01	peak
5	16196.000	24.59	24.13	48.72	74.00	-25.28	peak
6	17923.000	22.32	26.92	49.24	74.00	-24.76	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

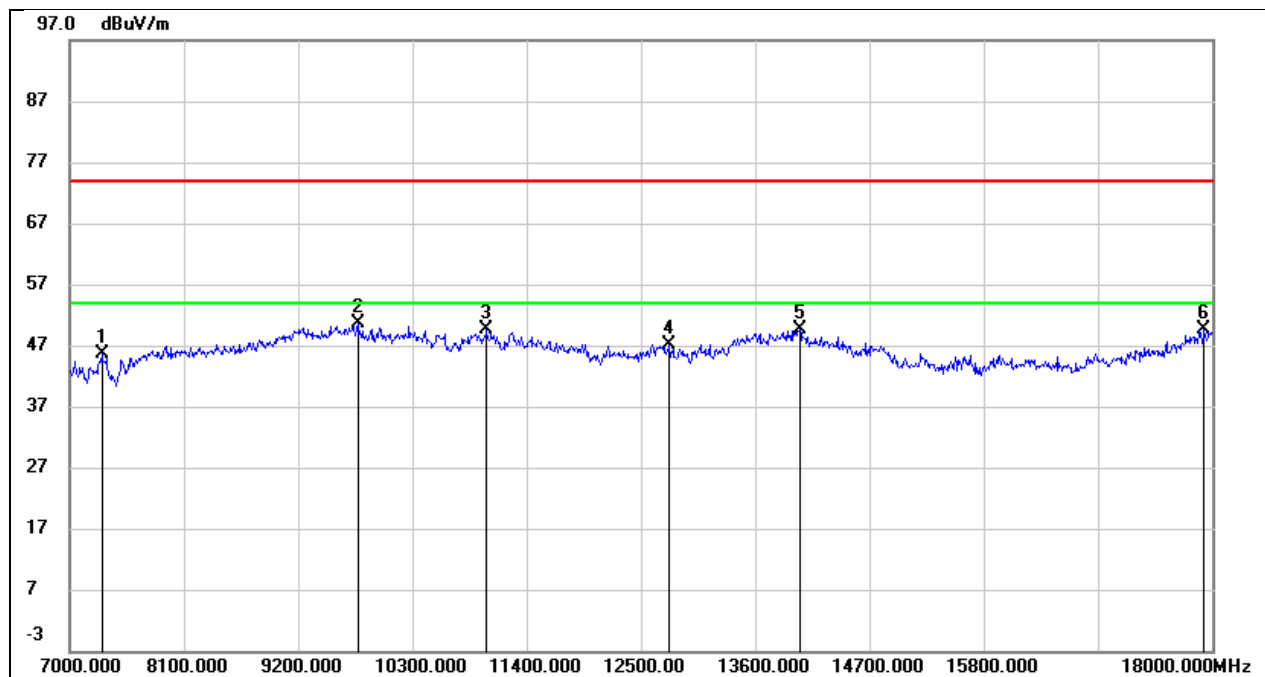


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.91	7.64	45.55	74.00	-28.45	peak
2	9772.000	36.80	13.75	50.55	74.00	-23.45	peak
3	11015.000	34.40	15.14	49.54	74.00	-24.46	peak
4	12775.000	27.23	19.89	47.12	74.00	-26.88	peak
5	14029.000	26.05	23.49	49.54	74.00	-24.46	peak
6	17923.000	20.92	28.78	49.70	74.00	-24.30	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

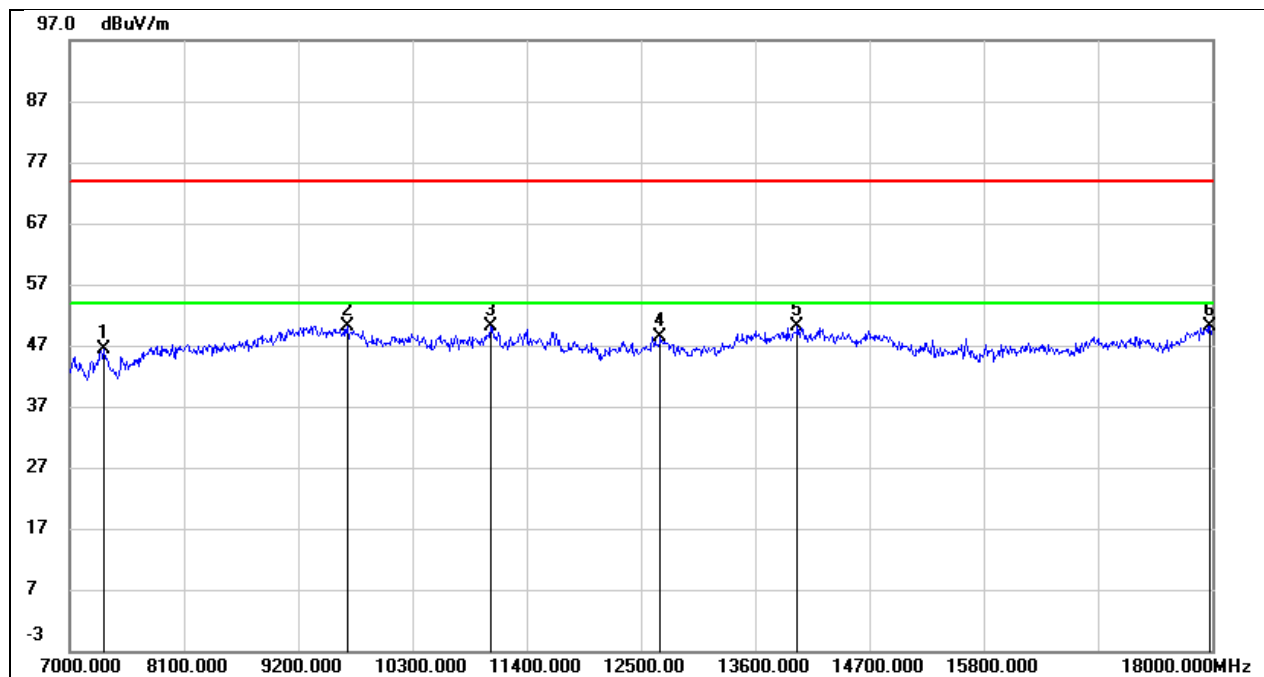


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.09	8.30	46.39	74.00	-27.61	peak
2	9673.000	36.79	13.34	50.13	74.00	-23.87	peak
3	11059.000	35.53	14.51	50.04	74.00	-23.96	peak
4	12687.000	29.96	18.51	48.47	74.00	-25.53	peak
5	14007.000	28.03	22.01	50.04	74.00	-23.96	peak
6	17978.000	22.91	27.28	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

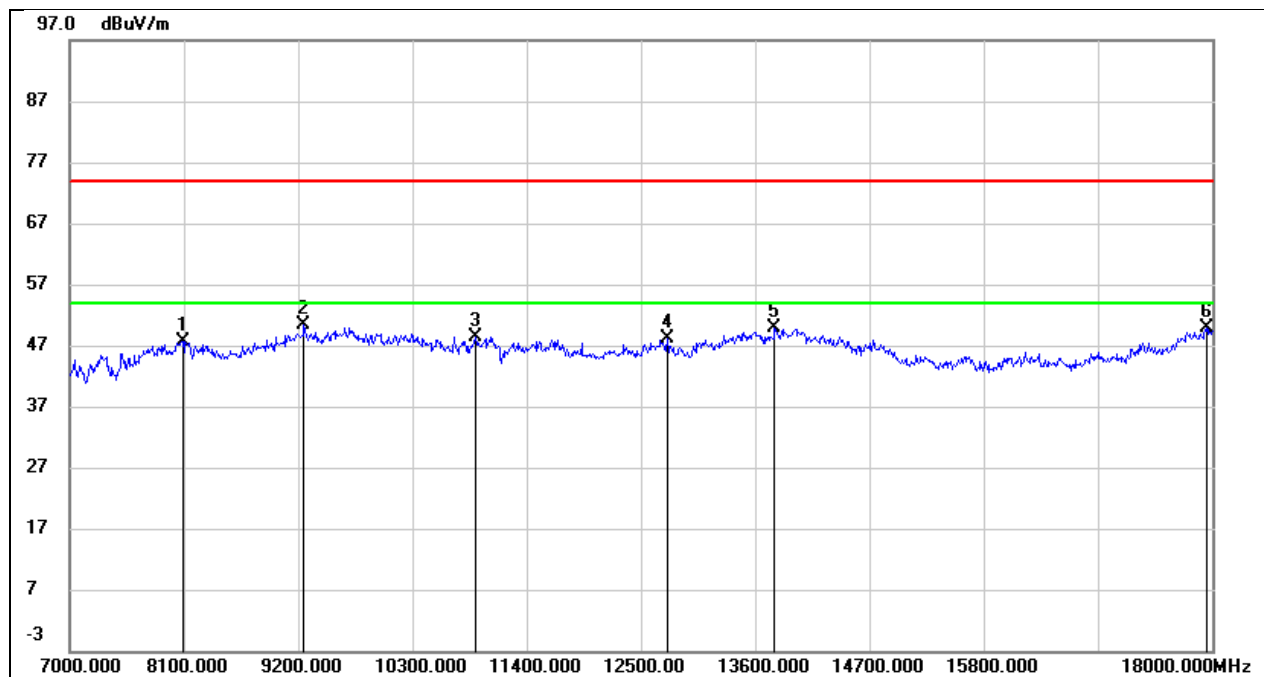


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.46	8.19	47.65	74.00	-26.35	peak
2	9255.000	38.60	11.74	50.34	74.00	-23.66	peak
3	10905.000	33.62	14.75	48.37	74.00	-25.63	peak
4	12753.000	28.29	19.78	48.07	74.00	-25.93	peak
5	13787.000	27.11	22.76	49.87	74.00	-24.13	peak
6	17945.000	20.76	29.03	49.79	74.00	-24.21	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

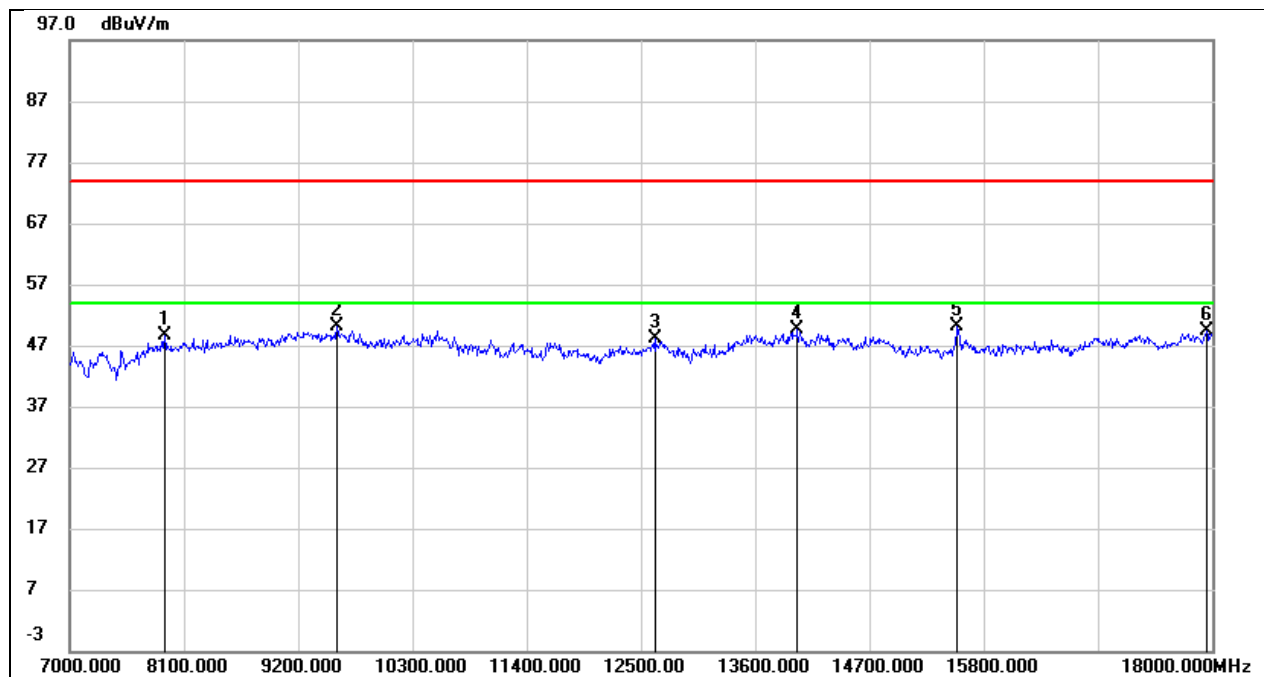


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	39.98	8.55	48.53	74.00	-25.47	peak
2	9574.000	36.91	13.21	50.12	74.00	-23.88	peak
3	12632.000	29.70	18.32	48.02	74.00	-25.98	peak
4	14007.000	27.64	22.01	49.65	74.00	-24.35	peak
5	15547.000	29.34	20.75	50.09	74.00	-23.91	peak
6	17945.000	22.19	27.07	49.26	74.00	-24.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

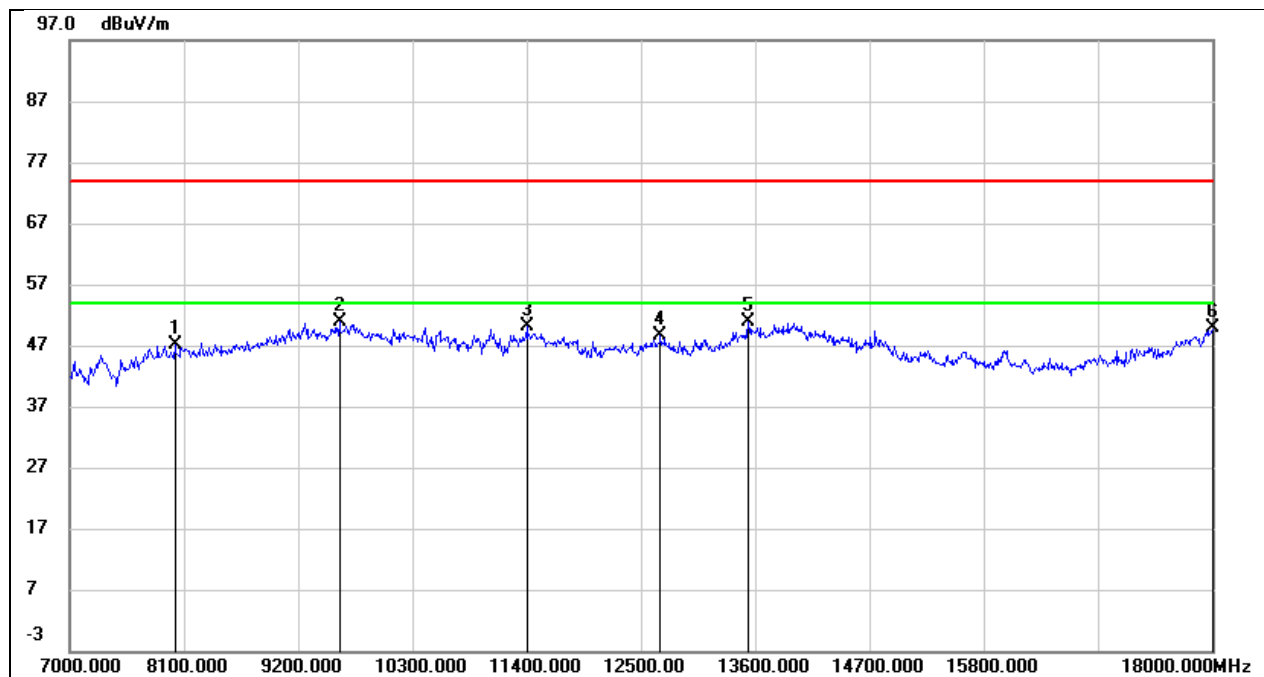


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	39.12	8.09	47.21	74.00	-26.79	peak
2	9596.000	37.51	13.44	50.95	74.00	-23.05	peak
3	11400.000	32.68	17.36	50.04	74.00	-23.96	peak
4	12687.000	29.04	19.52	48.56	74.00	-25.44	peak
5	13534.000	28.71	22.10	50.81	74.00	-23.19	peak
6	18000.000	20.20	29.61	49.81	74.00	-24.19	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

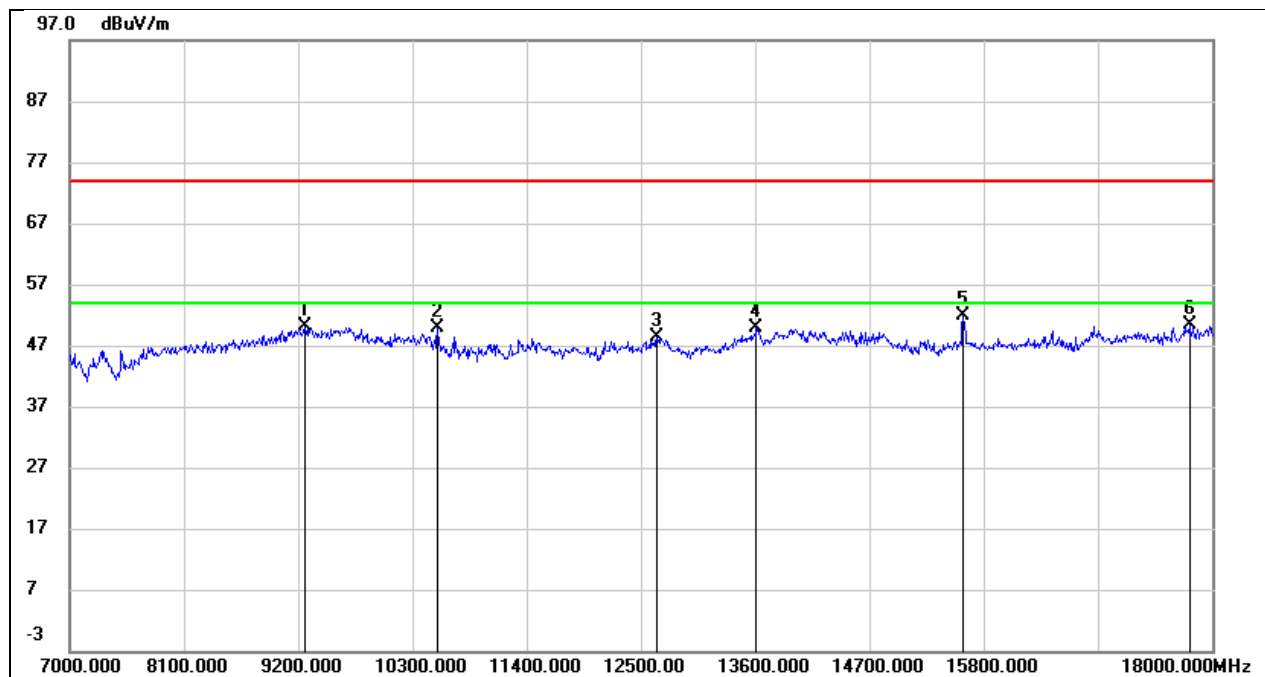


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.23	11.96	50.19	74.00	-23.81	peak
2	10542.000	36.38	13.41	49.79	74.00	-24.21	peak
3	12654.000	29.91	18.39	48.30	74.00	-25.70	peak
4	13611.000	29.39	20.57	49.96	74.00	-24.04	peak
5	15602.000	31.04	20.87	51.91	74.00	-22.09	peak
6	17780.000	24.23	26.06	50.29	74.00	-23.71	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

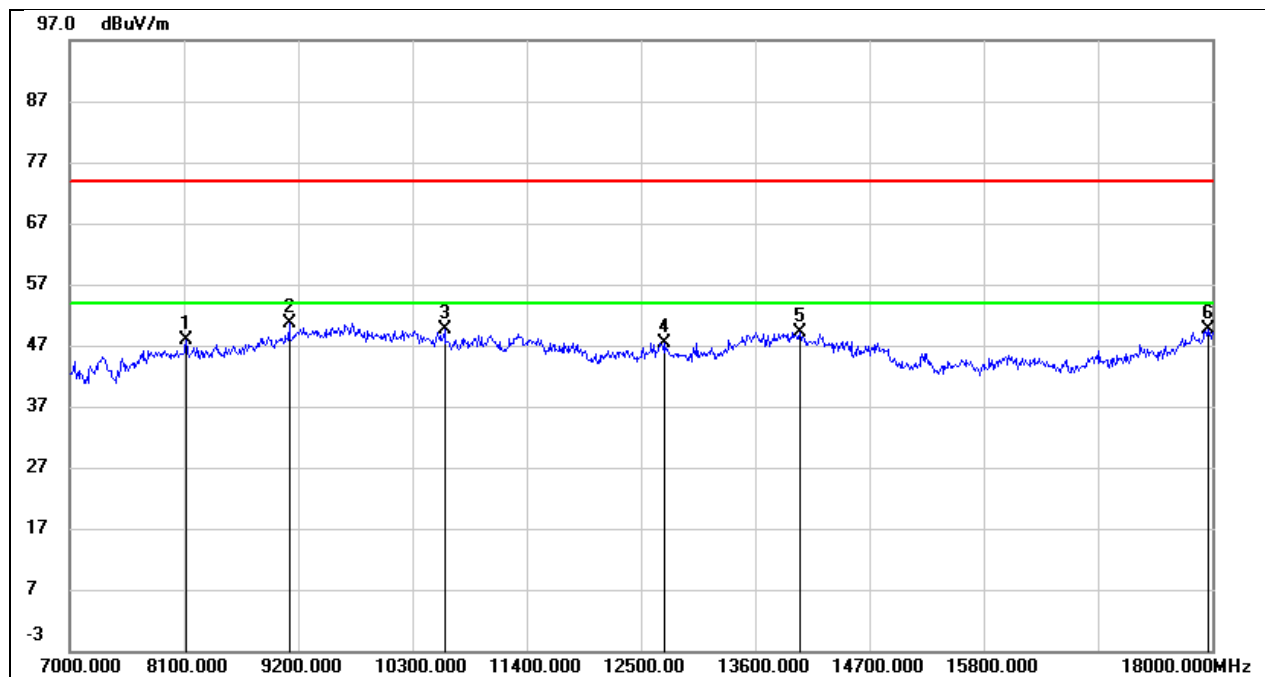


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	39.74	8.24	47.98	74.00	-26.02	peak
2	9112.000	39.42	11.17	50.59	74.00	-23.41	peak
3	10608.000	35.78	13.85	49.63	74.00	-24.37	peak
4	12731.000	27.76	19.70	47.46	74.00	-26.54	peak
5	14029.000	25.66	23.49	49.15	74.00	-24.85	peak
6	17956.000	20.40	29.14	49.54	74.00	-24.46	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

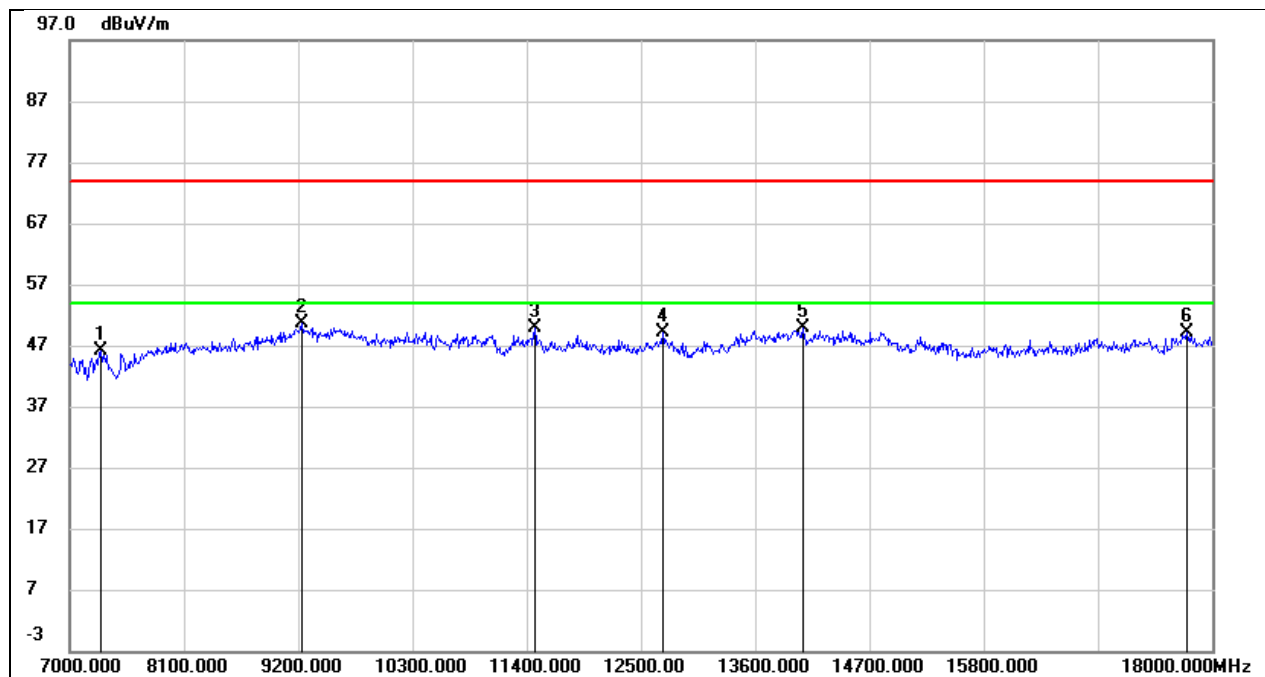


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.77	8.30	46.07	74.00	-27.93	peak
2	9233.000	38.79	11.88	50.67	74.00	-23.33	peak
3	11477.000	33.54	16.26	49.80	74.00	-24.20	peak
4	12709.000	30.65	18.58	49.23	74.00	-24.77	peak
5	14062.000	27.93	21.91	49.84	74.00	-24.16	peak
6	17758.000	23.25	25.94	49.19	74.00	-24.81	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

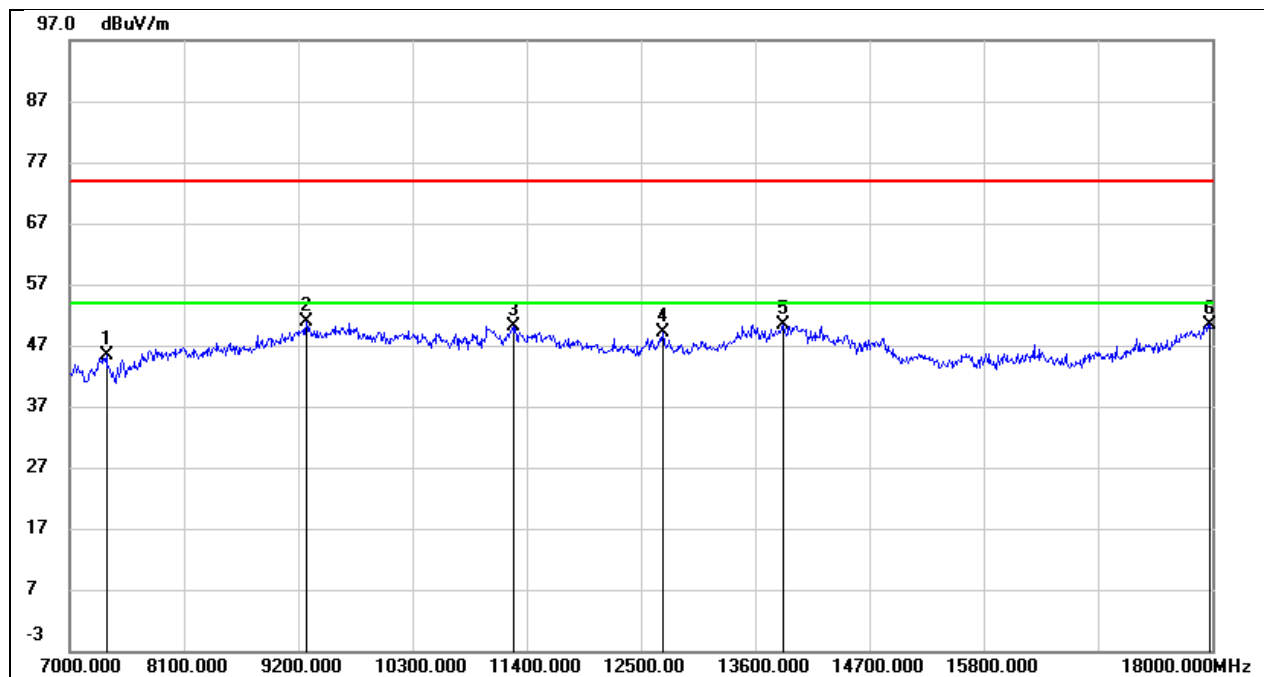


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.58	7.69	45.27	74.00	-28.73	peak
2	9277.000	39.12	11.81	50.93	74.00	-23.07	peak
3	11279.000	33.48	16.63	50.11	74.00	-23.89	peak
4	12709.000	29.65	19.60	49.25	74.00	-24.75	peak
5	13864.000	27.30	23.06	50.36	74.00	-23.64	peak
6	17978.000	21.04	29.38	50.42	74.00	-23.58	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

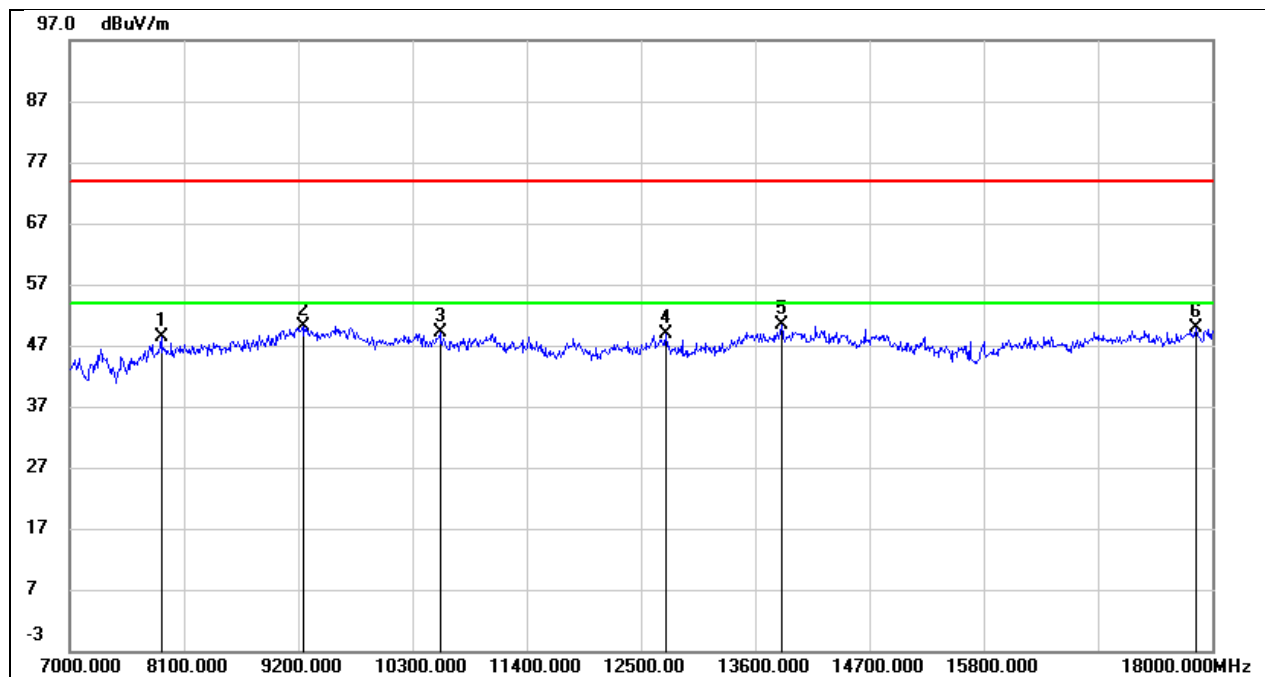


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.96	8.53	48.49	74.00	-25.51	peak
2	9244.000	38.27	11.92	50.19	74.00	-23.81	peak
3	10564.000	35.73	13.44	49.17	74.00	-24.83	peak
4	12742.000	30.25	18.70	48.95	74.00	-25.05	peak
5	13853.000	28.91	21.38	50.29	74.00	-23.71	peak
6	17846.000	23.35	26.45	49.80	74.00	-24.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

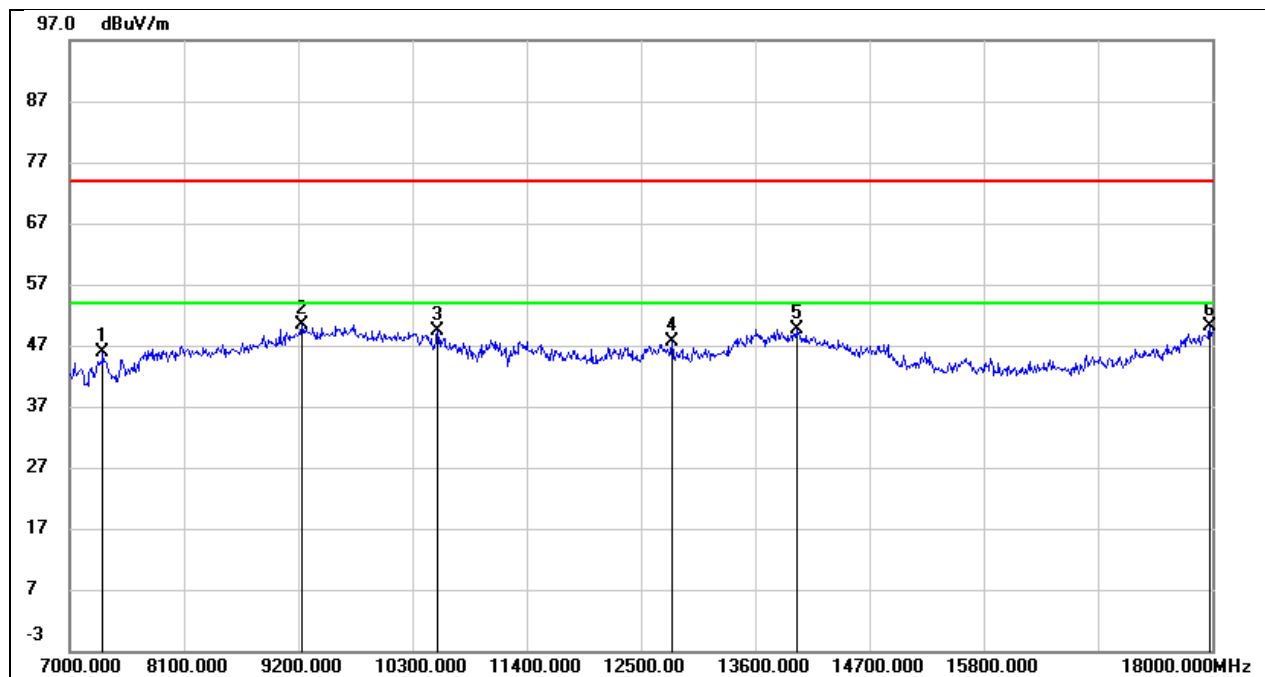


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.33	7.66	45.99	74.00	-28.01	peak
2	9233.000	38.73	11.66	50.39	74.00	-23.61	peak
3	10542.000	35.65	13.66	49.31	74.00	-24.69	peak
4	12797.000	27.56	19.97	47.53	74.00	-26.47	peak
5	13996.000	26.03	23.59	49.62	74.00	-24.38	peak
6	17978.000	20.78	29.38	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

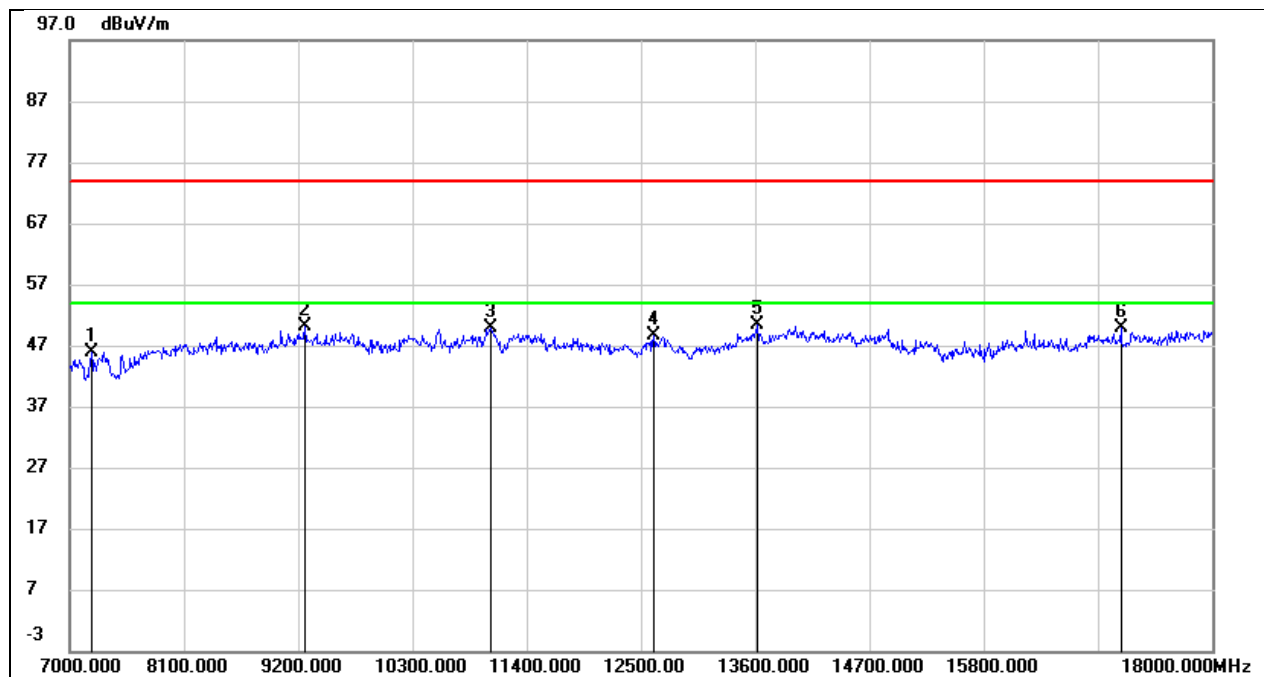


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7209.000	37.62	8.28	45.90	74.00	-28.10	peak
2	9266.000	38.16	11.96	50.12	74.00	-23.88	peak
3	11048.000	35.45	14.46	49.91	74.00	-24.09	peak
4	12621.000	30.43	18.27	48.70	74.00	-25.30	peak
5	13622.000	29.80	20.60	50.40	74.00	-23.60	peak
6	17120.000	25.14	24.71	49.85	74.00	-24.15	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

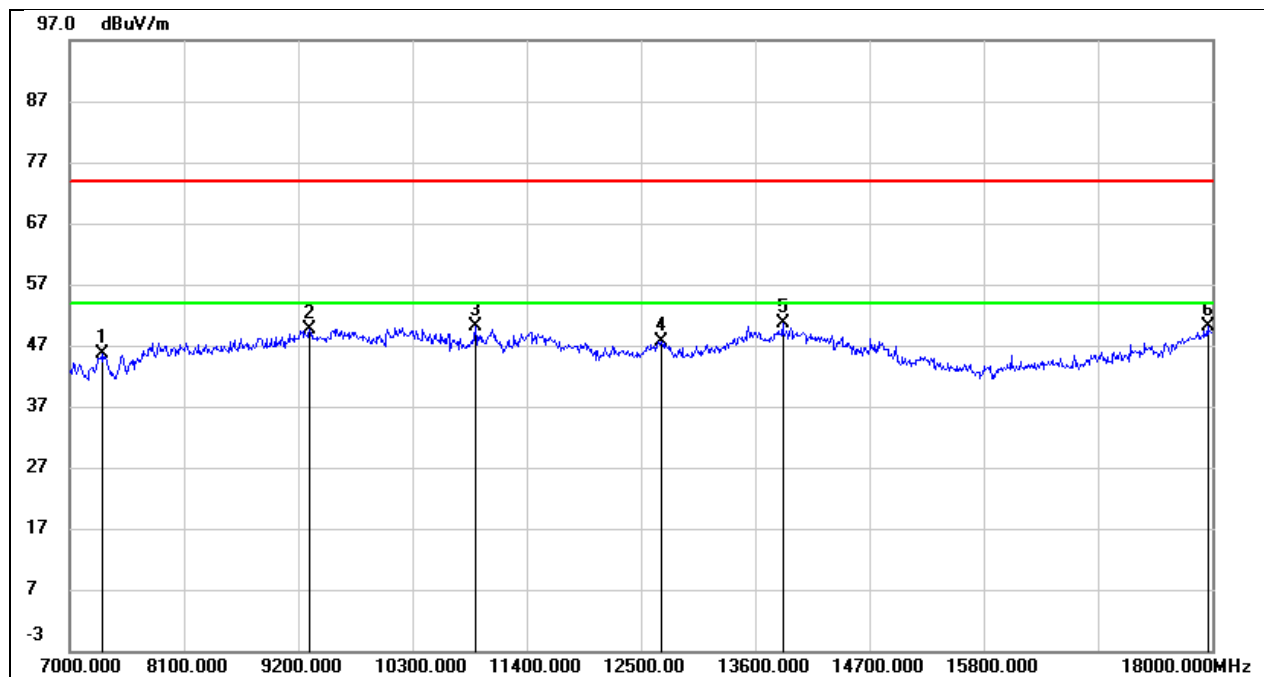


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.07	7.64	45.71	74.00	-28.29	peak
2	9310.000	37.80	11.92	49.72	74.00	-24.28	peak
3	10905.000	35.31	14.75	50.06	74.00	-23.94	peak
4	12698.000	28.01	19.56	47.57	74.00	-26.43	peak
5	13864.000	27.66	23.06	50.72	74.00	-23.28	peak
6	17956.000	20.92	29.14	50.06	74.00	-23.94	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

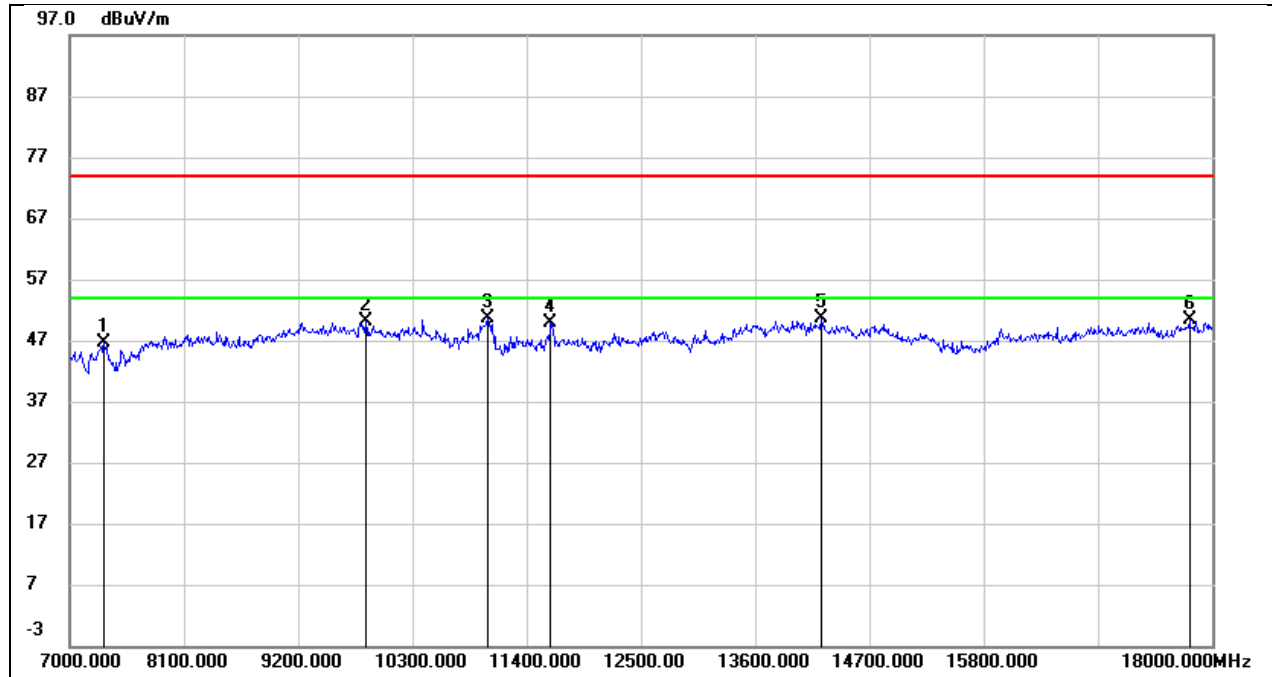


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.34	8.30	46.64	74.00	-27.36	peak
2	9849.000	37.06	13.19	50.25	74.00	-23.75	peak
3	11026.000	36.21	14.37	50.58	74.00	-23.42	peak
4	11631.000	33.16	16.68	49.84	74.00	-24.16	peak
5	14238.000	29.03	21.58	50.61	74.00	-23.39	peak
6	17780.000	24.32	26.06	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

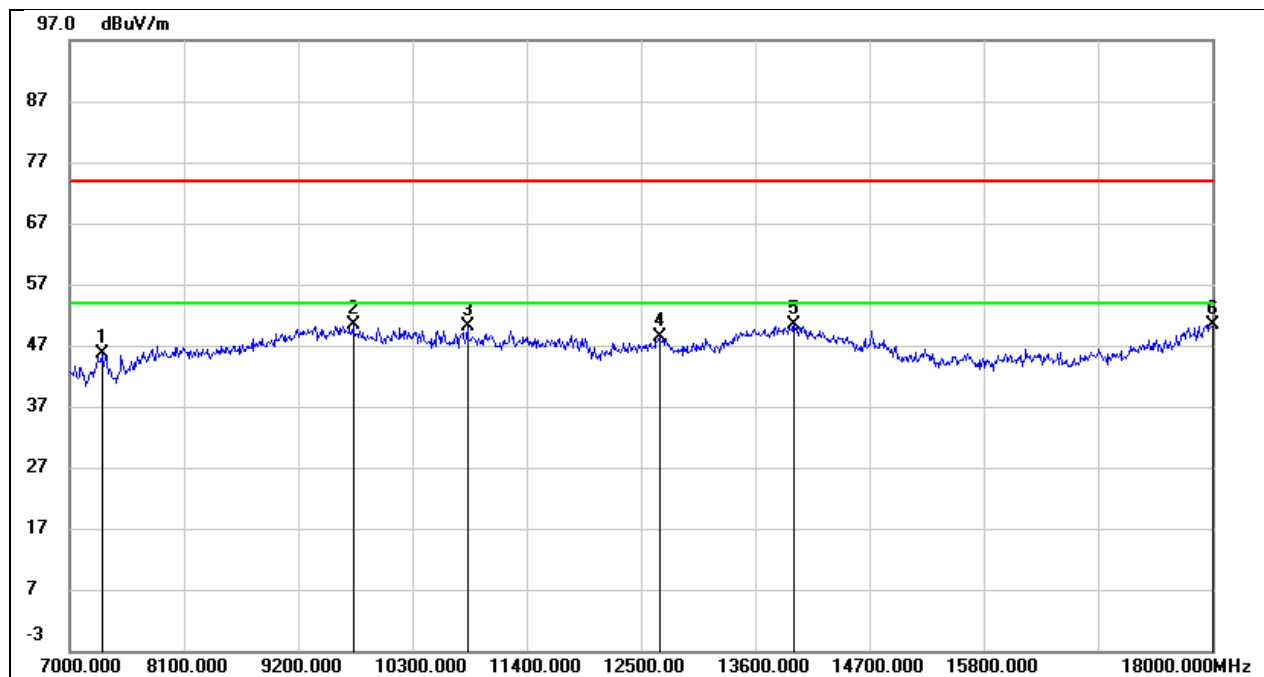


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.87	7.64	45.51	74.00	-28.49	peak
2	9728.000	36.70	13.68	50.38	74.00	-23.62	peak
3	10828.000	35.59	14.51	50.10	74.00	-23.90	peak
4	12676.000	28.98	19.48	48.46	74.00	-25.54	peak
5	13974.000	26.90	23.50	50.40	74.00	-23.60	peak
6	18000.000	20.83	29.61	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

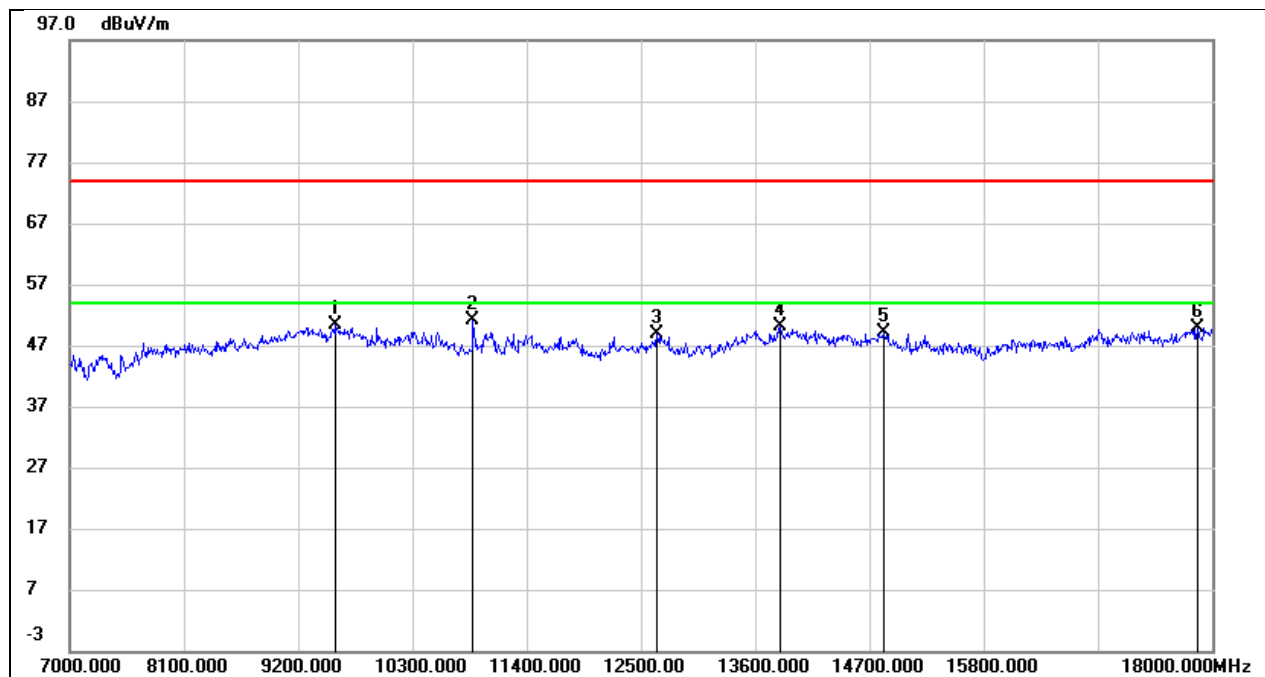


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	37.22	13.10	50.32	74.00	-23.68	peak
2	10883.000	37.13	14.02	51.15	74.00	-22.85	peak
3	12654.000	30.37	18.39	48.76	74.00	-25.24	peak
4	13842.000	28.85	21.33	50.18	74.00	-23.82	peak
5	14832.000	28.65	20.50	49.15	74.00	-24.85	peak
6	17857.000	23.47	26.51	49.98	74.00	-24.02	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

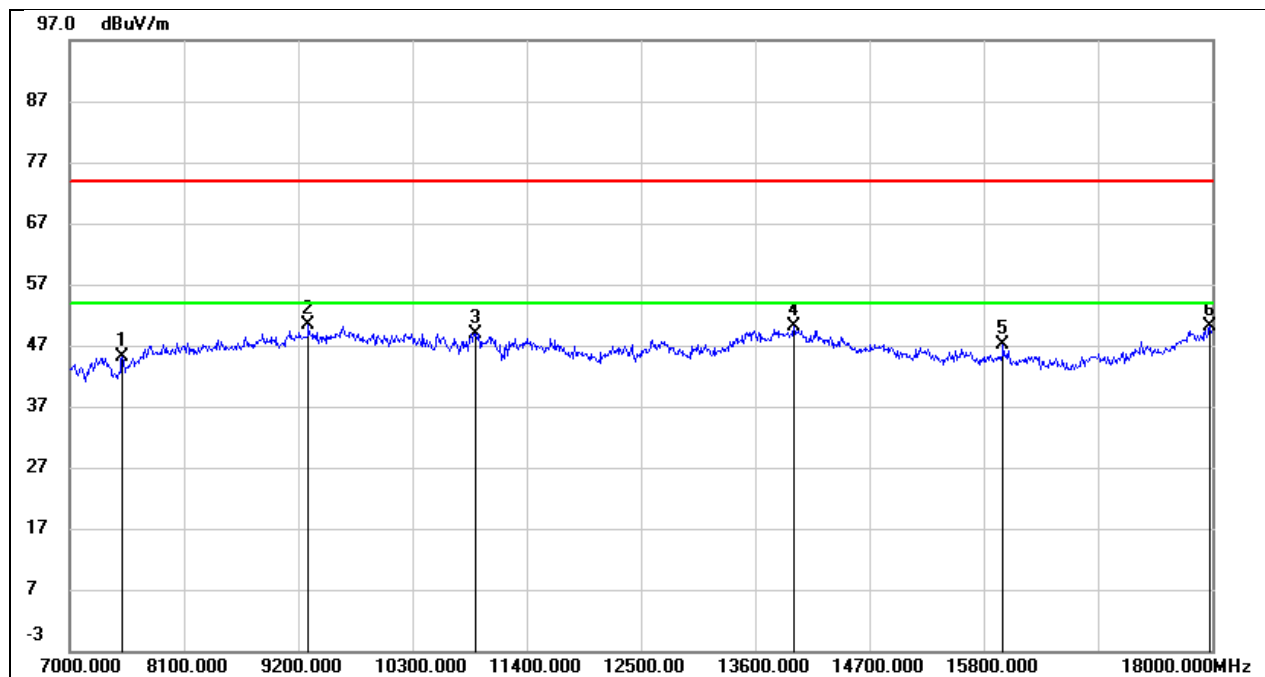


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.20	7.84	45.04	74.00	-28.96	peak
2	9299.000	38.48	11.88	50.36	74.00	-23.64	peak
3	10905.000	34.22	14.75	48.97	74.00	-25.03	peak
4	13974.000	26.63	23.50	50.13	74.00	-23.87	peak
5	15987.000	26.82	20.41	47.23	74.00	-26.77	peak
6	17978.000	20.81	29.38	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

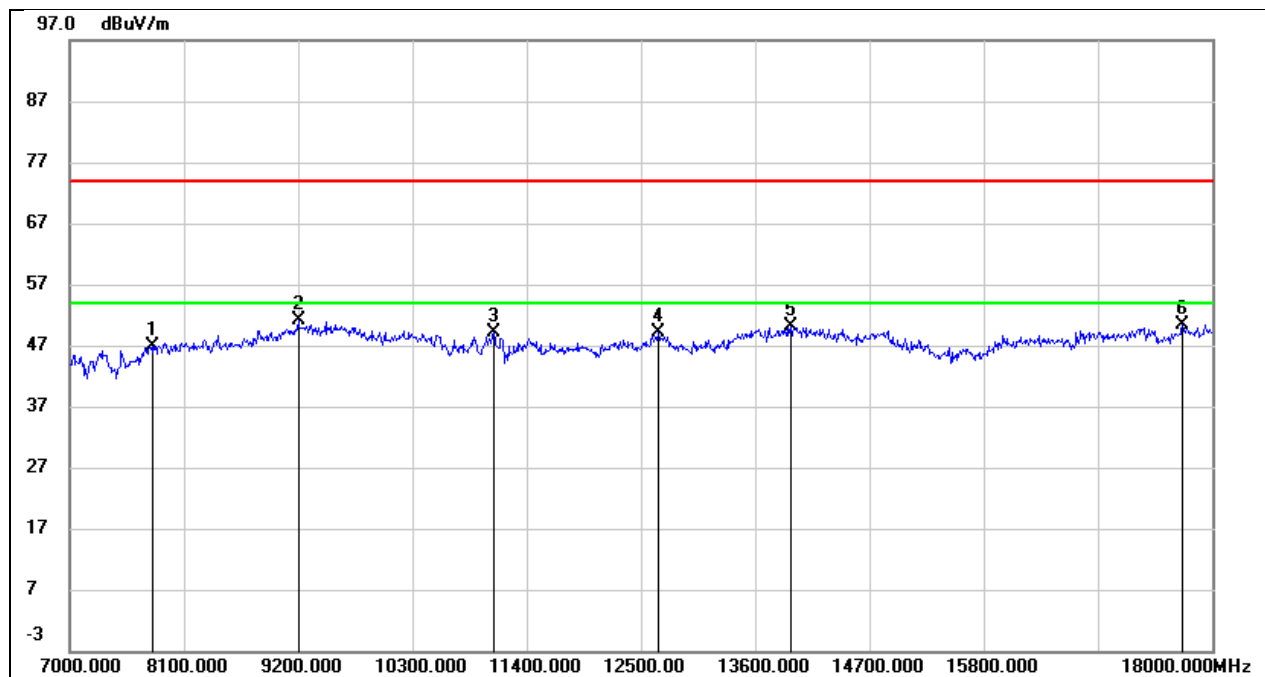


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	38.29	8.51	46.80	74.00	-27.20	peak
2	9200.000	39.40	11.80	51.20	74.00	-22.80	peak
3	11081.000	34.54	14.59	49.13	74.00	-24.87	peak
4	12665.000	30.68	18.42	49.10	74.00	-24.90	peak
5	13941.000	28.49	21.76	50.25	74.00	-23.75	peak
6	17714.000	24.58	25.71	50.29	74.00	-23.71	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

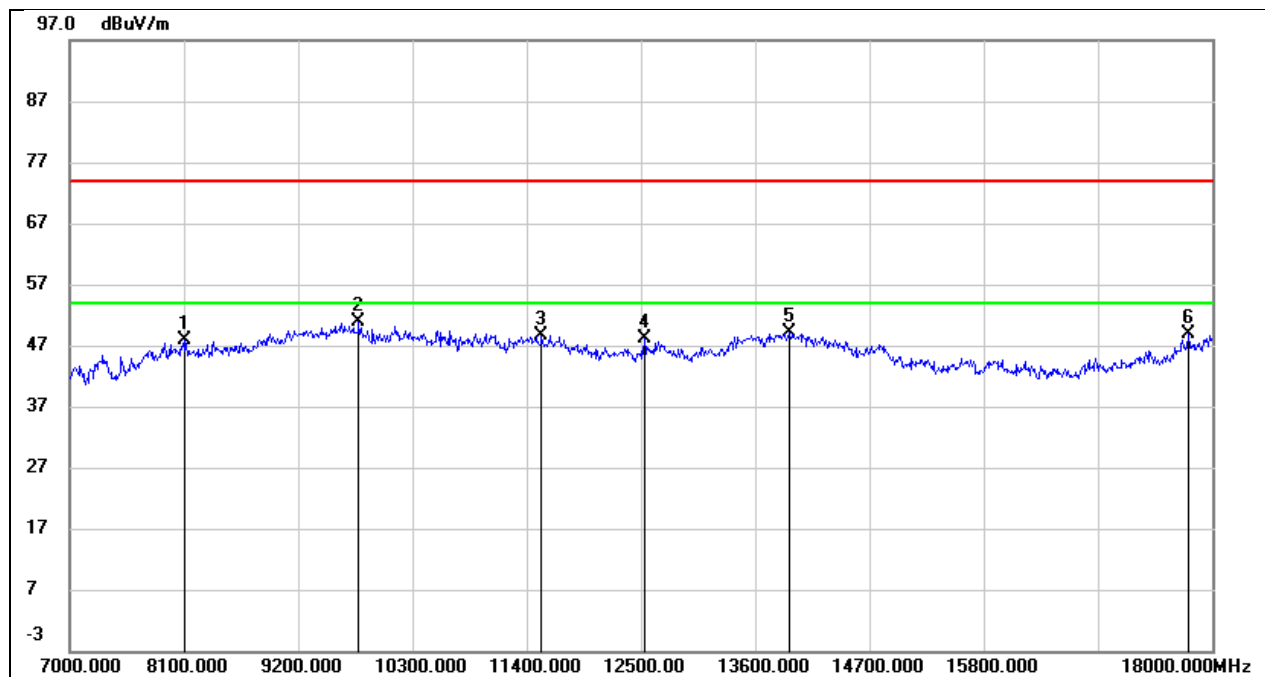


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.69	8.23	47.92	74.00	-26.08	peak
2	9783.000	36.99	13.77	50.76	74.00	-23.24	peak
3	11543.000	30.69	17.94	48.63	74.00	-25.37	peak
4	12533.000	29.17	19.05	48.22	74.00	-25.78	peak
5	13930.000	25.85	23.32	49.17	74.00	-24.83	peak
6	17769.000	21.59	27.18	48.77	74.00	-25.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

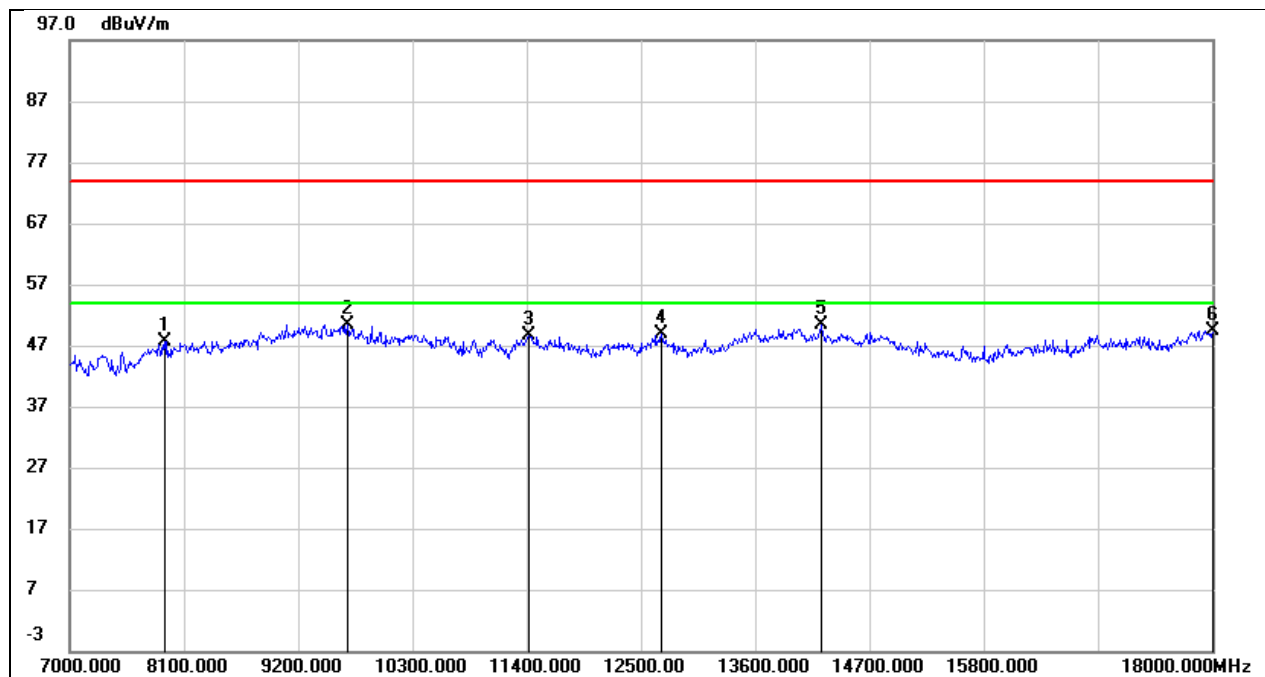


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	39.15	8.55	47.70	74.00	-26.30	peak
2	9673.000	37.08	13.34	50.42	74.00	-23.58	peak
3	11422.000	32.45	16.07	48.52	74.00	-25.48	peak
4	12698.000	30.39	18.54	48.93	74.00	-25.07	peak
5	14238.000	28.74	21.58	50.32	74.00	-23.68	peak
6	18000.000	21.90	27.41	49.31	74.00	-24.69	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

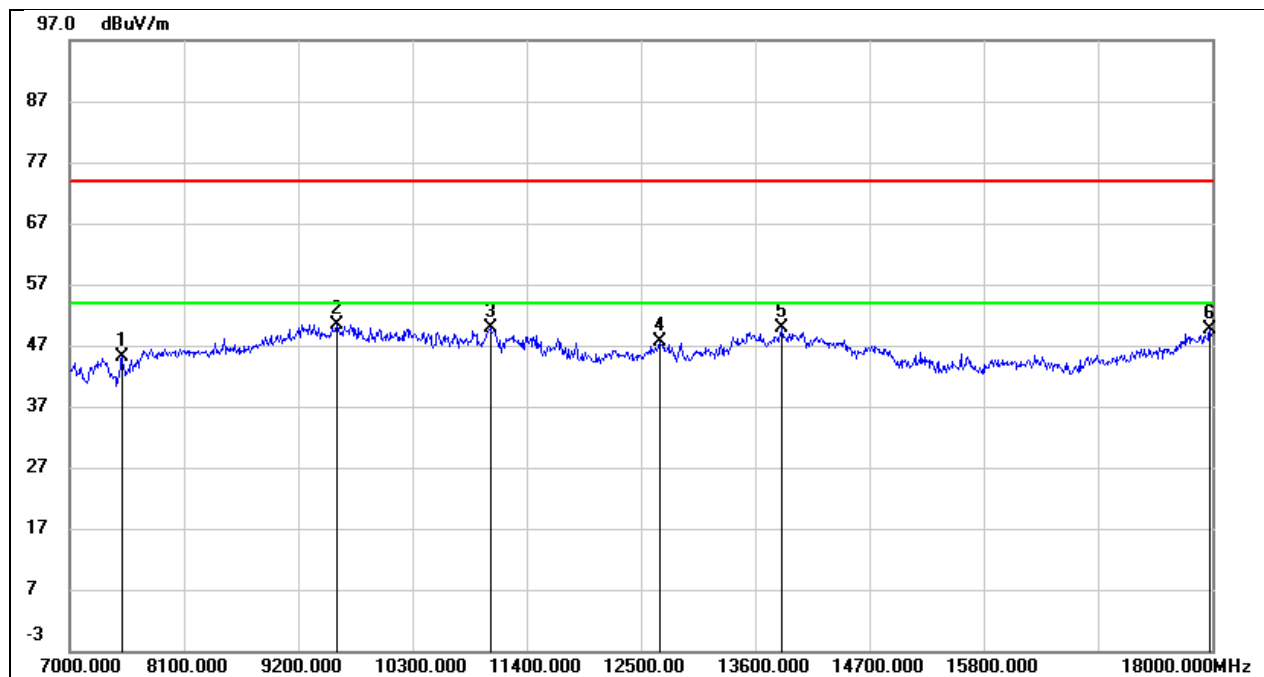


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.17	7.84	45.01	74.00	-28.99	peak
2	9574.000	37.14	13.31	50.45	74.00	-23.55	peak
3	11048.000	34.44	15.33	49.77	74.00	-24.23	peak
4	12676.000	28.18	19.48	47.66	74.00	-26.34	peak
5	13853.000	26.80	23.01	49.81	74.00	-24.19	peak
6	17978.000	20.34	29.38	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

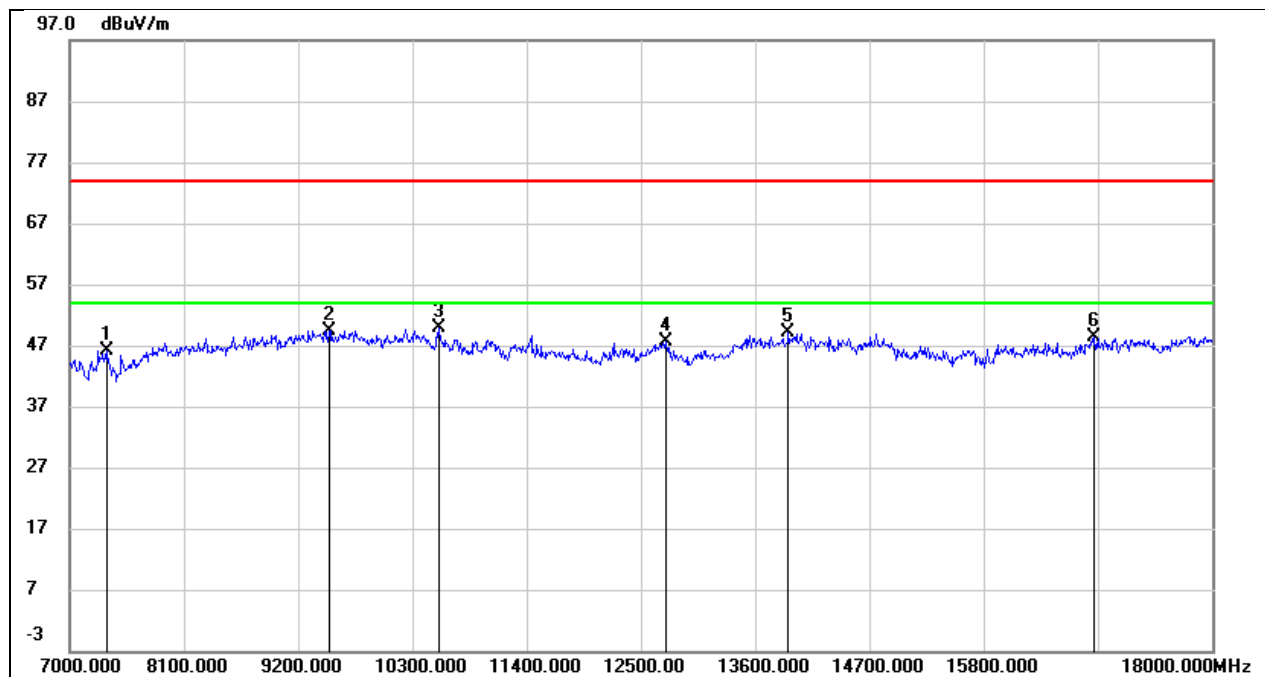


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.73	8.31	46.04	74.00	-27.96	peak
2	9497.000	36.57	12.85	49.42	74.00	-24.58	peak
3	10553.000	36.35	13.43	49.78	74.00	-24.22	peak
4	12742.000	28.85	18.70	47.55	74.00	-26.45	peak
5	13919.000	27.42	21.66	49.08	74.00	-24.92	peak
6	16867.000	24.26	24.17	48.43	74.00	-25.57	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

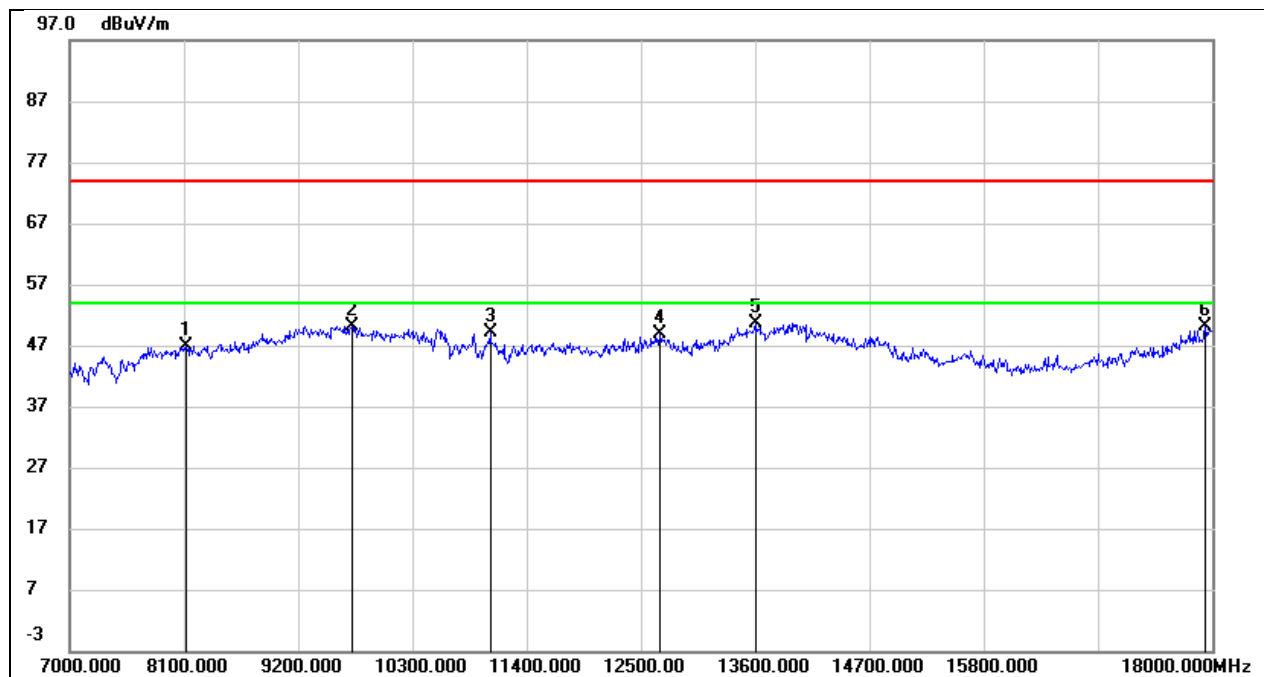


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.67	8.24	46.91	74.00	-27.09	peak
2	9717.000	36.57	13.66	50.23	74.00	-23.77	peak
3	11048.000	33.90	15.33	49.23	74.00	-24.77	peak
4	12687.000	29.41	19.52	48.93	74.00	-25.07	peak
5	13600.000	28.53	22.22	50.75	74.00	-23.25	peak
6	17934.000	21.18	28.91	50.09	74.00	-23.91	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

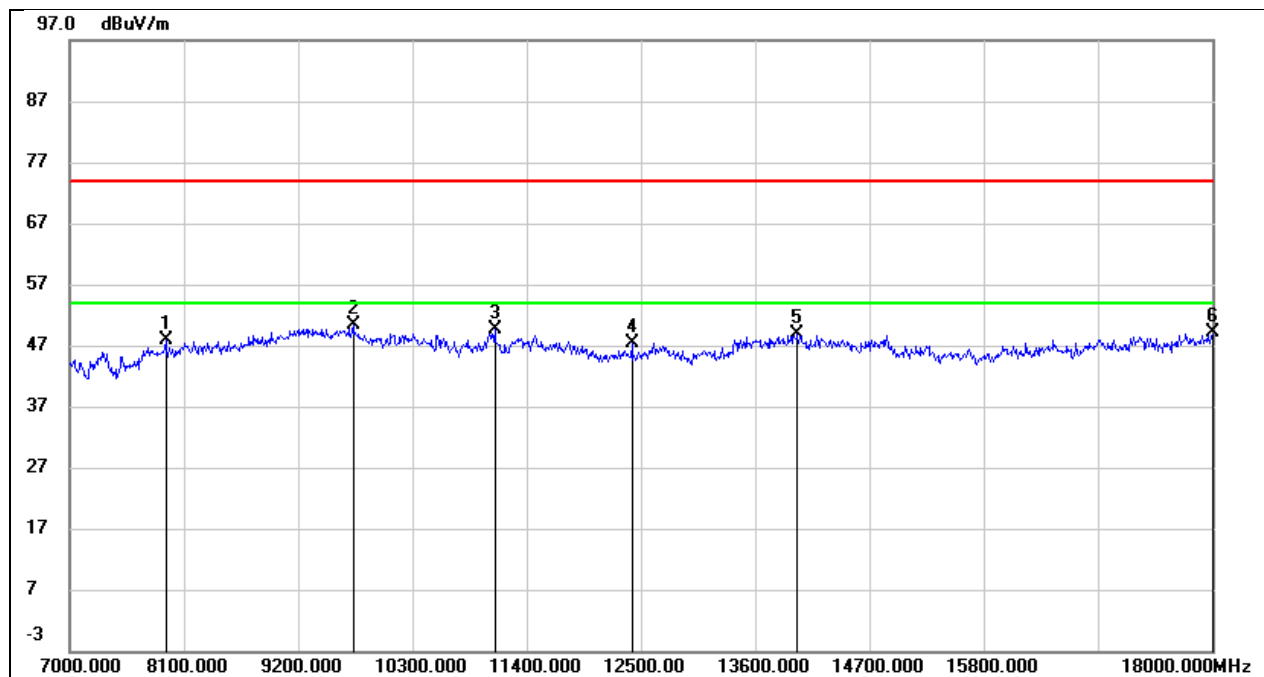


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7924.000	39.26	8.55	47.81	74.00	-26.19	peak
2	9728.000	36.95	13.36	50.31	74.00	-23.69	peak
3	11092.000	35.09	14.63	49.72	74.00	-24.28	peak
4	12412.000	29.38	18.04	47.42	74.00	-26.58	peak
5	14007.000	26.80	22.01	48.81	74.00	-25.19	peak
6	18000.000	21.71	27.41	49.12	74.00	-24.88	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

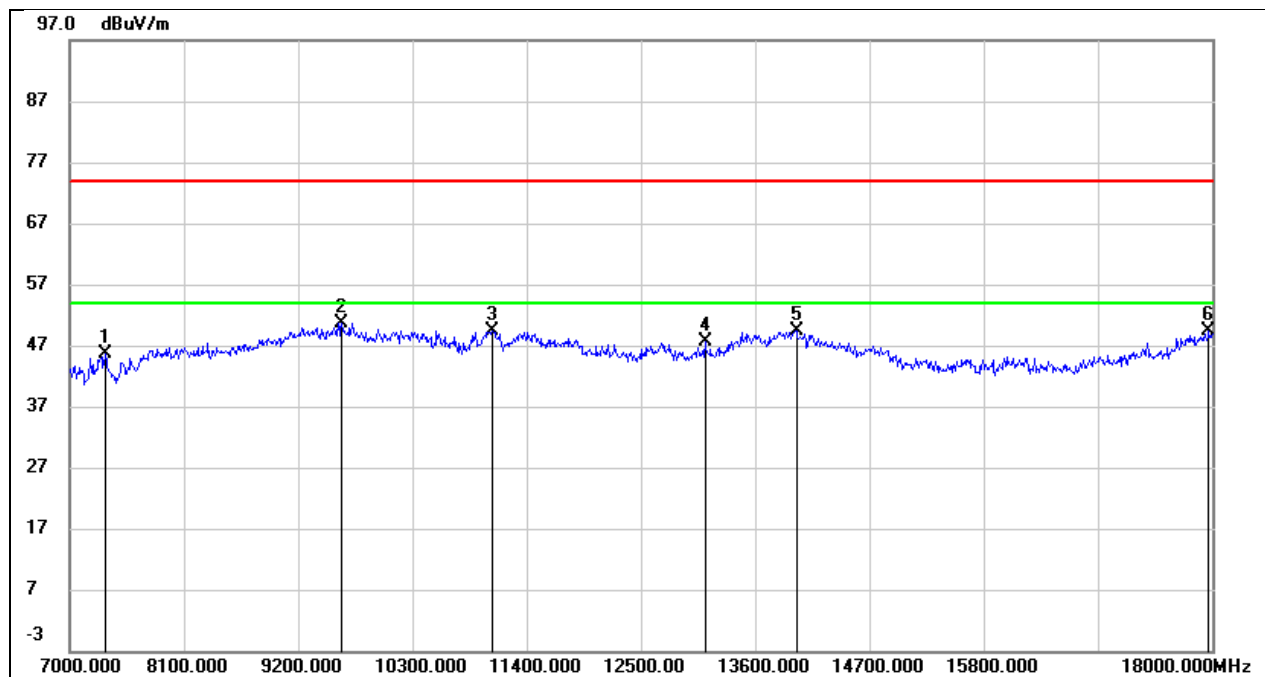


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.91	7.68	45.59	74.00	-28.41	peak
2	9618.000	37.19	13.49	50.68	74.00	-23.32	peak
3	11070.000	33.91	15.44	49.35	74.00	-24.65	peak
4	13116.000	27.00	20.56	47.56	74.00	-26.44	peak
5	13996.000	25.79	23.59	49.38	74.00	-24.62	peak
6	17967.000	20.22	29.26	49.48	74.00	-24.52	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

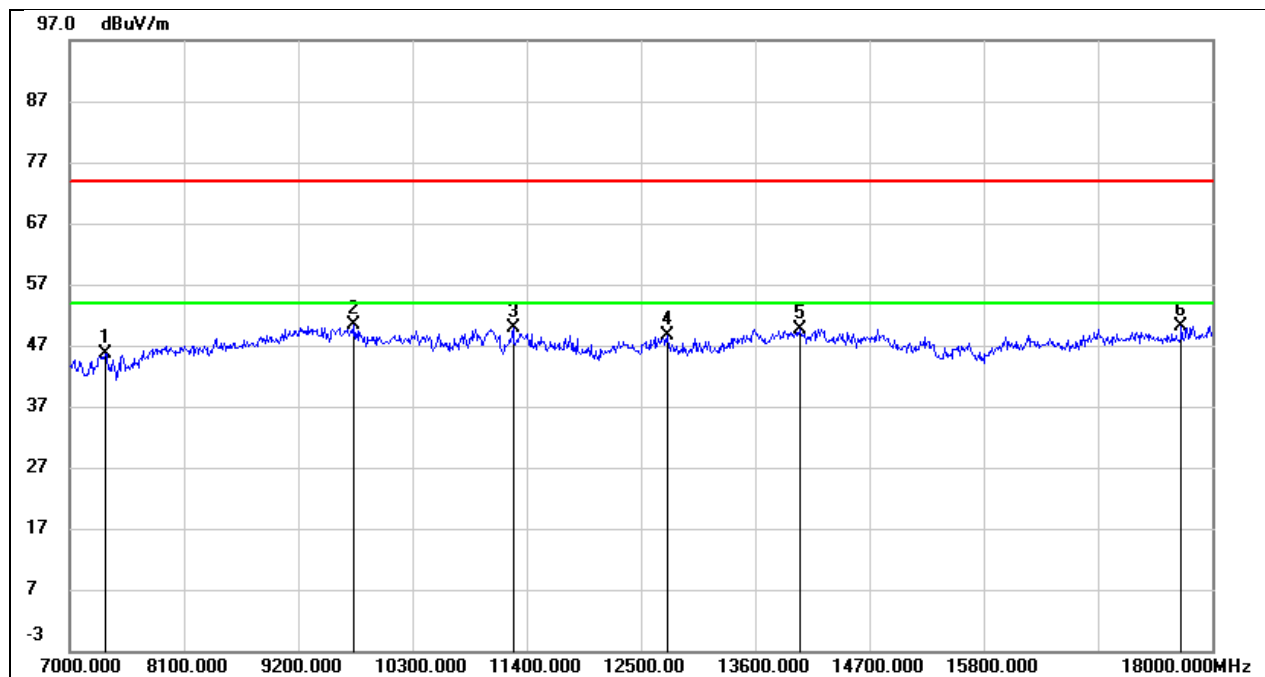


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.40	8.30	45.70	74.00	-28.30	peak
2	9739.000	37.02	13.36	50.38	74.00	-23.62	peak
3	11268.000	34.46	15.39	49.85	74.00	-24.15	peak
4	12753.000	29.80	18.73	48.53	74.00	-25.47	peak
5	14029.000	27.74	21.96	49.70	74.00	-24.30	peak
6	17703.000	24.58	25.65	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

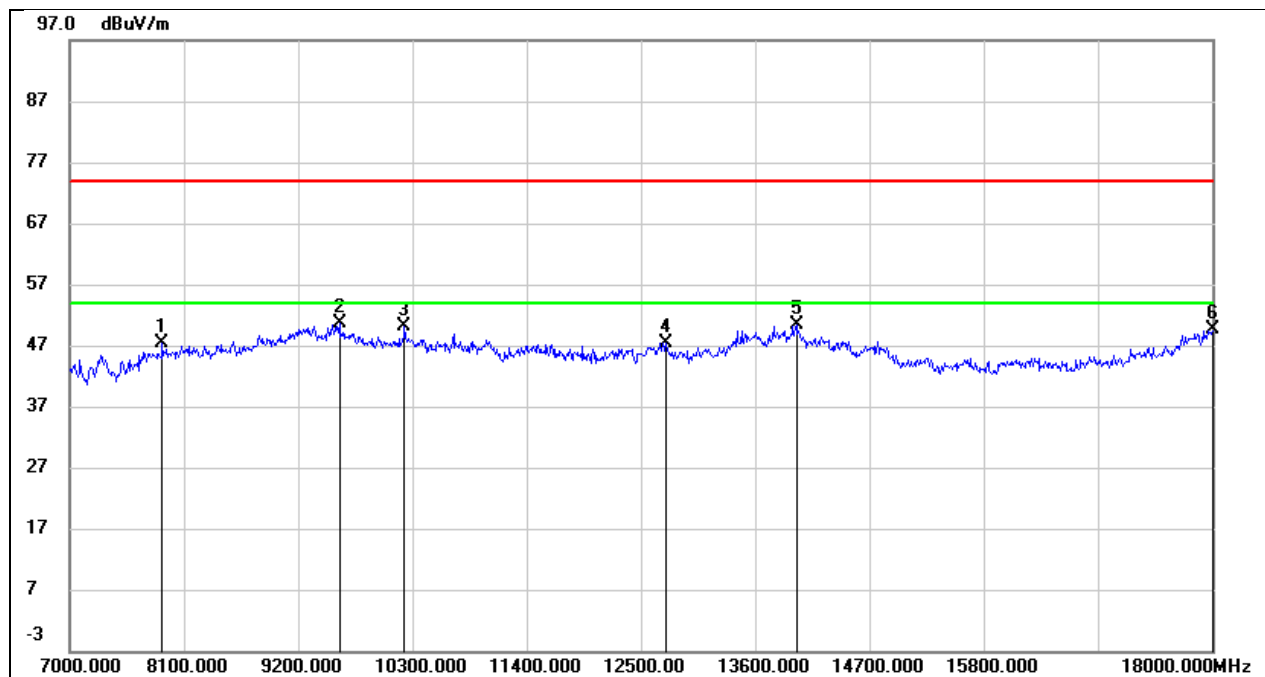


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	39.41	8.04	47.45	74.00	-26.55	peak
2	9596.000	37.08	13.44	50.52	74.00	-23.48	peak
3	10223.000	36.86	13.19	50.05	74.00	-23.95	peak
4	12742.000	27.72	19.75	47.47	74.00	-26.53	peak
5	13996.000	26.77	23.59	50.36	74.00	-23.64	peak
6	18000.000	19.91	29.61	49.52	74.00	-24.48	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

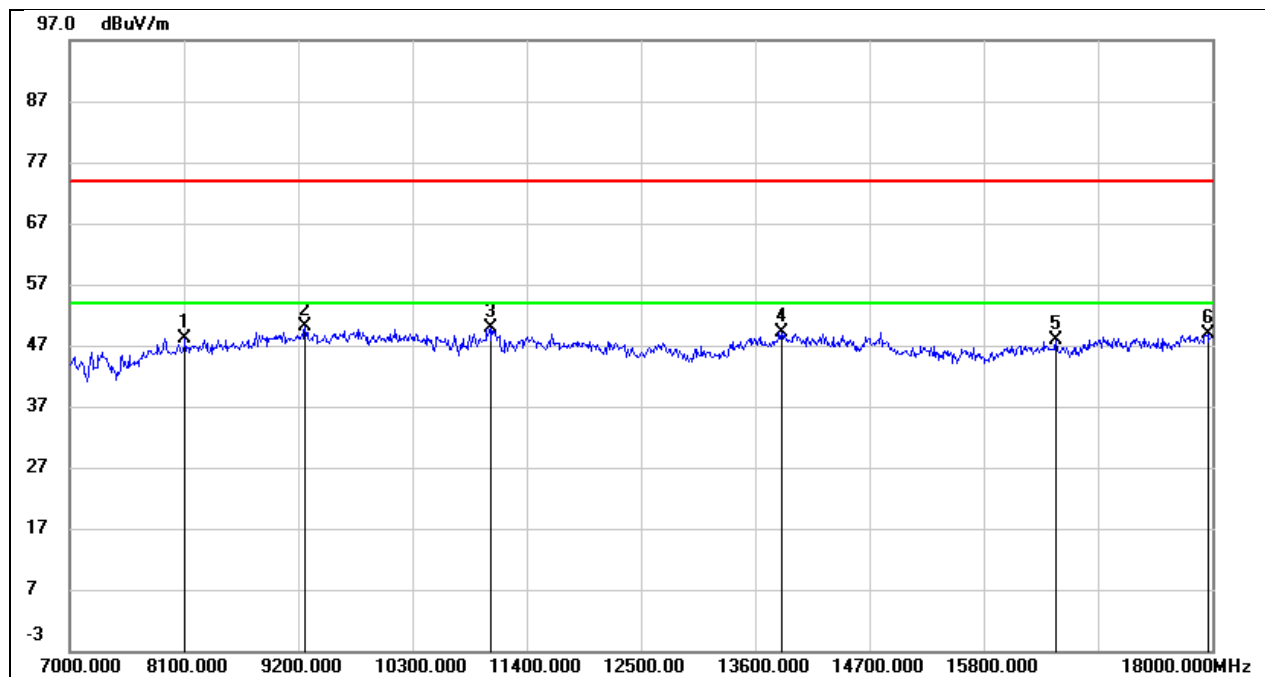


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.45	8.75	48.20	74.00	-25.80	peak
2	9266.000	38.27	11.96	50.23	74.00	-23.77	peak
3	11048.000	35.52	14.46	49.98	74.00	-24.02	peak
4	13853.000	27.82	21.38	49.20	74.00	-24.80	peak
5	16493.000	24.34	23.57	47.91	74.00	-26.09	peak
6	17956.000	21.84	27.13	48.97	74.00	-25.03	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

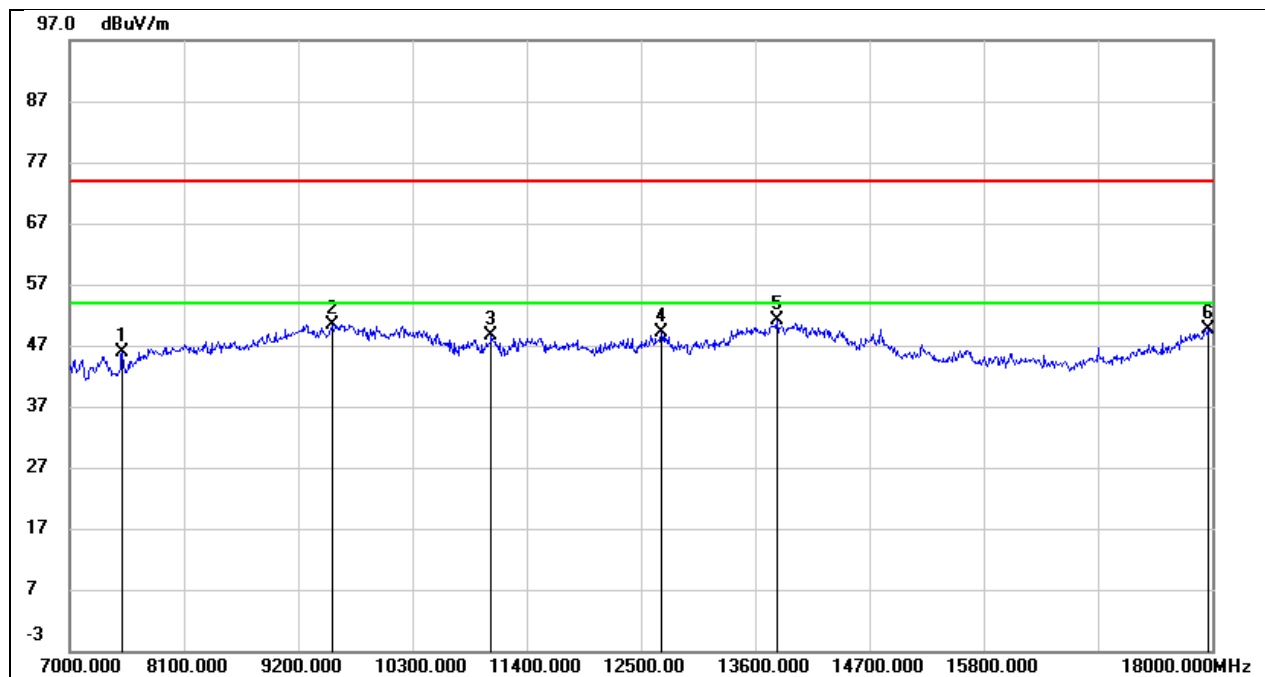


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.93	7.84	45.77	74.00	-28.23	peak
2	9530.000	37.40	13.04	50.44	74.00	-23.56	peak
3	11059.000	33.14	15.39	48.53	74.00	-25.47	peak
4	12698.000	29.53	19.56	49.09	74.00	-24.91	peak
5	13809.000	28.28	22.83	51.11	74.00	-22.89	peak
6	17967.000	20.44	29.26	49.70	74.00	-24.30	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

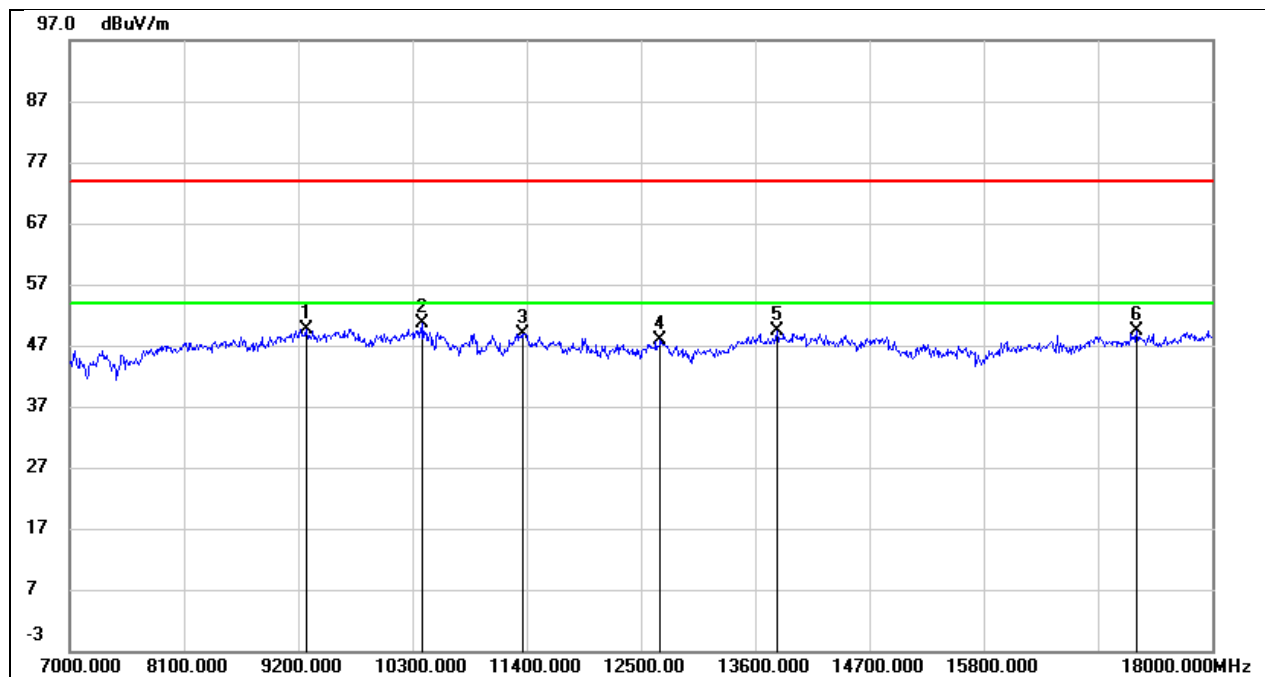


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	37.69	11.99	49.68	74.00	-24.32	peak
2	10399.000	37.48	13.05	50.53	74.00	-23.47	peak
3	11356.000	33.08	15.80	48.88	74.00	-25.12	peak
4	12687.000	29.26	18.51	47.77	74.00	-26.23	peak
5	13809.000	28.15	21.19	49.34	74.00	-24.66	peak
6	17274.000	24.50	24.97	49.47	74.00	-24.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

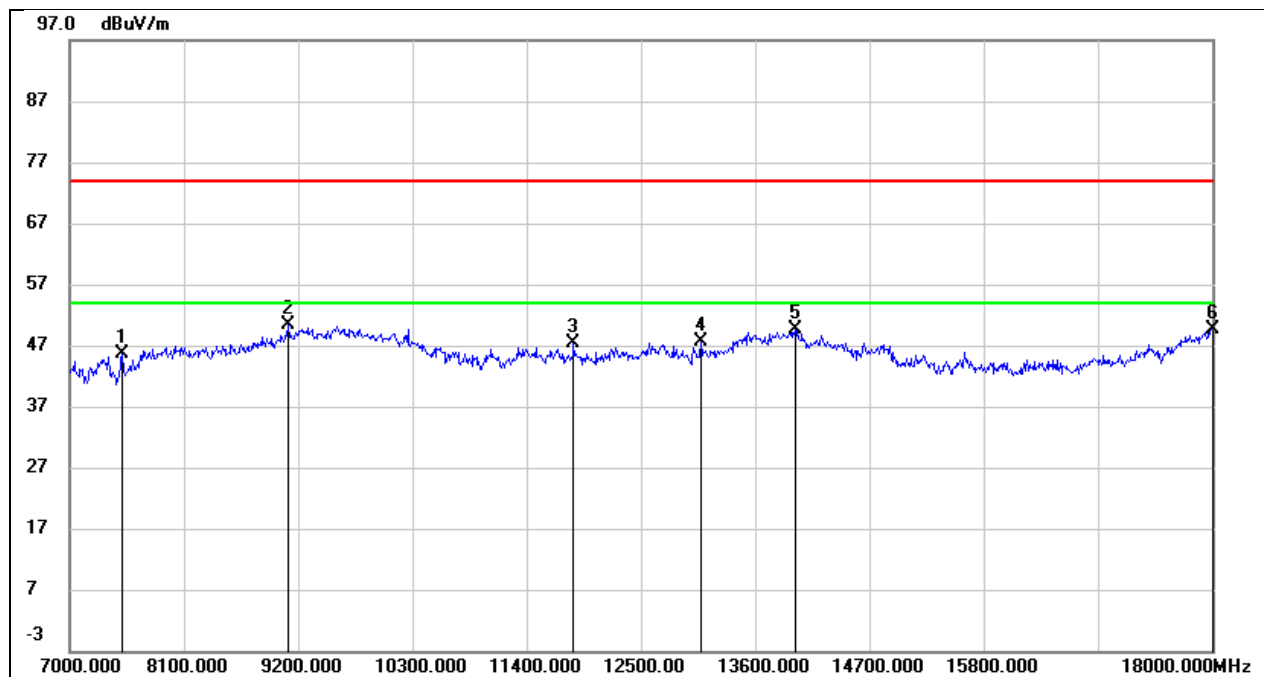


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.83	7.84	45.67	74.00	-28.33	peak
2	9101.000	39.20	11.11	50.31	74.00	-23.69	peak
3	11851.000	29.26	18.11	47.37	74.00	-26.63	peak
4	13083.000	27.27	20.41	47.68	74.00	-26.32	peak
5	13985.000	26.17	23.55	49.72	74.00	-24.28	peak
6	18000.000	20.09	29.61	49.70	74.00	-24.30	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

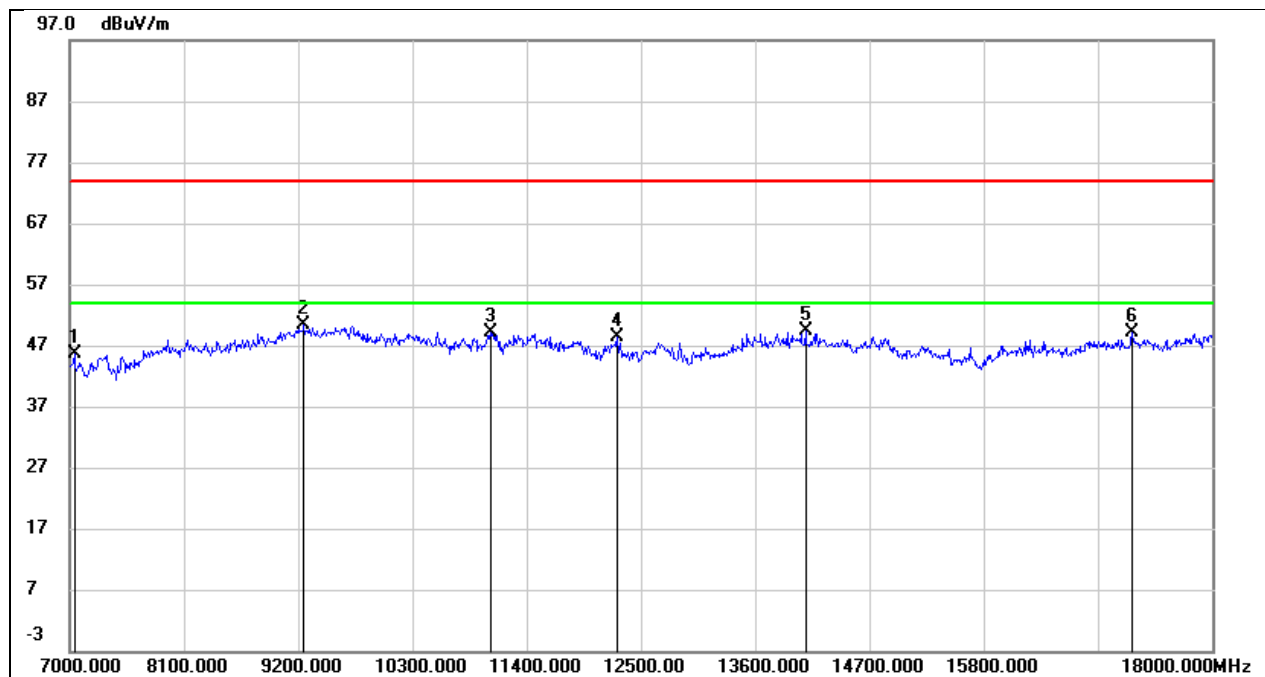


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	37.50	8.08	45.58	74.00	-28.42	peak
2	9255.000	38.51	11.93	50.44	74.00	-23.56	peak
3	11048.000	34.72	14.46	49.18	74.00	-24.82	peak
4	12269.000	30.61	17.80	48.41	74.00	-25.59	peak
5	14084.000	27.38	21.88	49.26	74.00	-24.74	peak
6	17230.000	24.10	24.93	49.03	74.00	-24.97	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

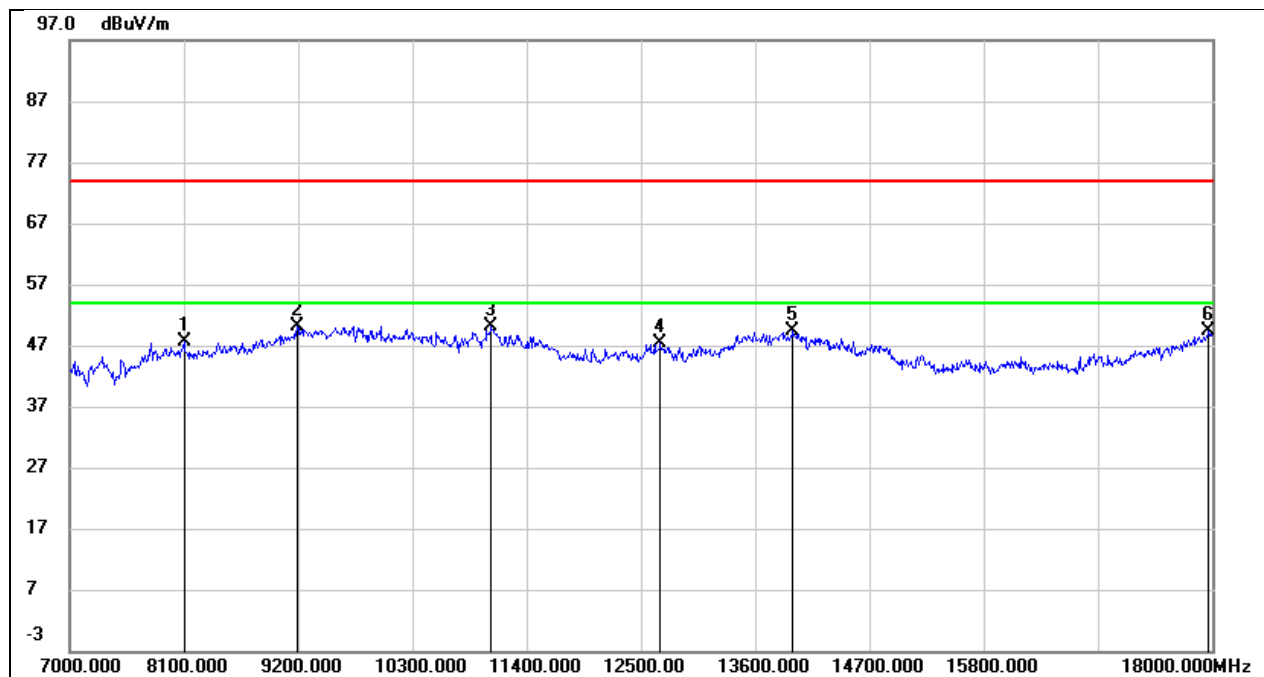


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.31	8.21	47.52	74.00	-26.48	peak
2	9189.000	38.70	11.51	50.21	74.00	-23.79	peak
3	11059.000	34.70	15.39	50.09	74.00	-23.91	peak
4	12687.000	27.75	19.52	47.27	74.00	-26.73	peak
5	13963.000	25.84	23.46	49.30	74.00	-24.70	peak
6	17967.000	20.13	29.26	49.39	74.00	-24.61	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

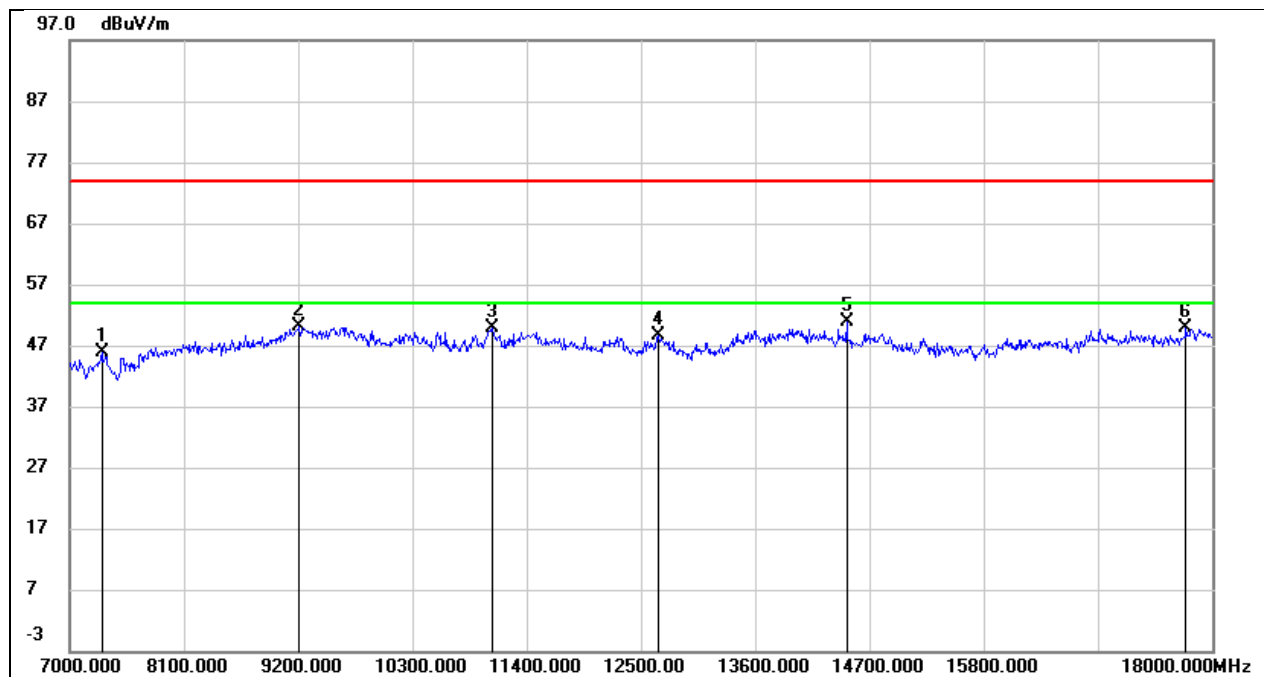


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.57	8.29	45.86	74.00	-28.14	peak
2	9211.000	38.21	11.82	50.03	74.00	-23.97	peak
3	11070.000	35.31	14.55	49.86	74.00	-24.14	peak
4	12665.000	30.24	18.42	48.66	74.00	-25.34	peak
5	14480.000	29.88	20.96	50.84	74.00	-23.16	peak
6	17747.000	24.07	25.89	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

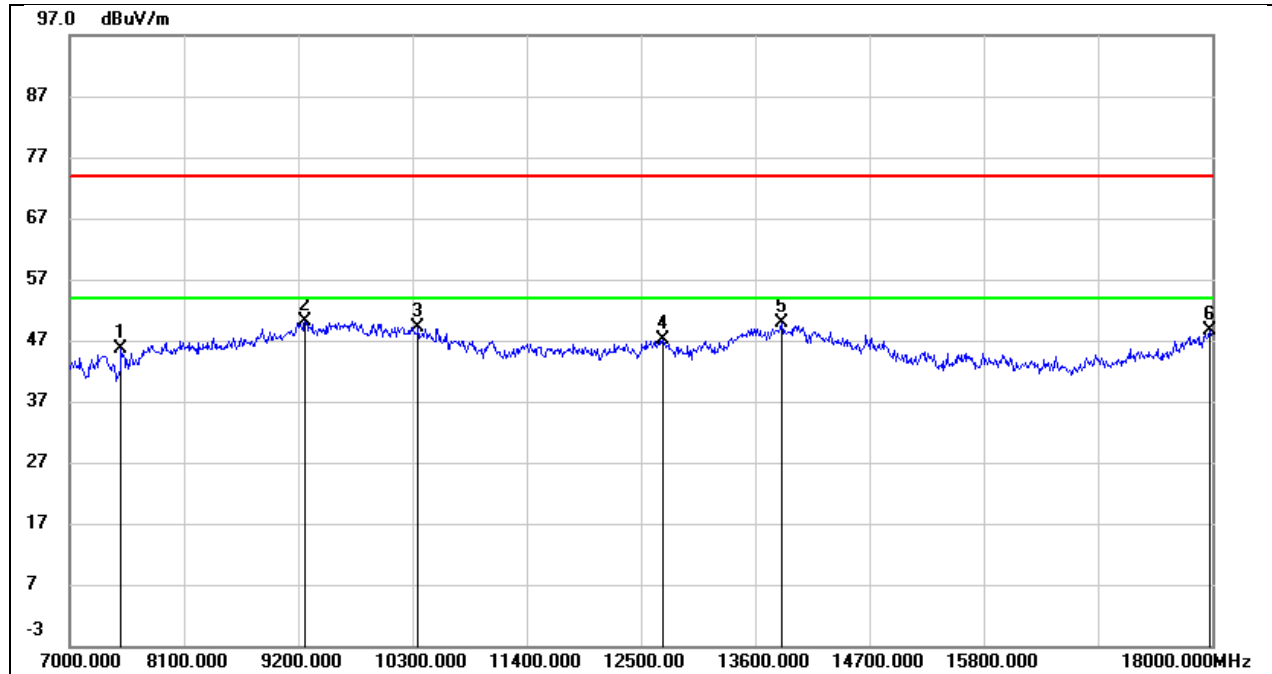


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.83	7.84	45.67	74.00	-28.33	peak
2	9266.000	38.46	11.78	50.24	74.00	-23.76	peak
3	10355.000	35.87	13.31	49.18	74.00	-24.82	peak
4	12709.000	27.43	19.60	47.03	74.00	-26.97	peak
5	13853.000	26.95	23.01	49.96	74.00	-24.04	peak
6	17978.000	19.25	29.38	48.63	74.00	-25.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

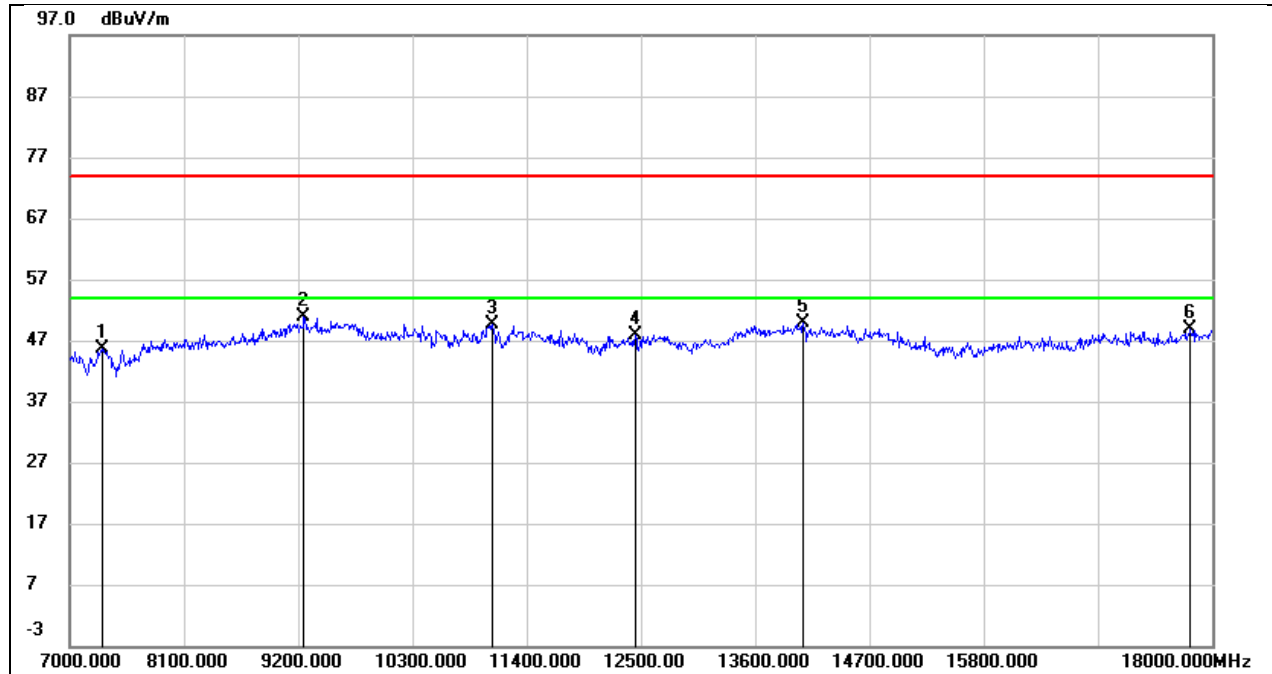


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.46	8.29	45.75	74.00	-28.25	peak
2	9255.000	38.83	11.93	50.76	74.00	-23.24	peak
3	11070.000	35.16	14.55	49.71	74.00	-24.29	peak
4	12445.000	29.82	18.06	47.88	74.00	-26.12	peak
5	14062.000	27.95	21.91	49.86	74.00	-24.14	peak
6	17791.000	22.89	26.11	49.00	74.00	-25.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

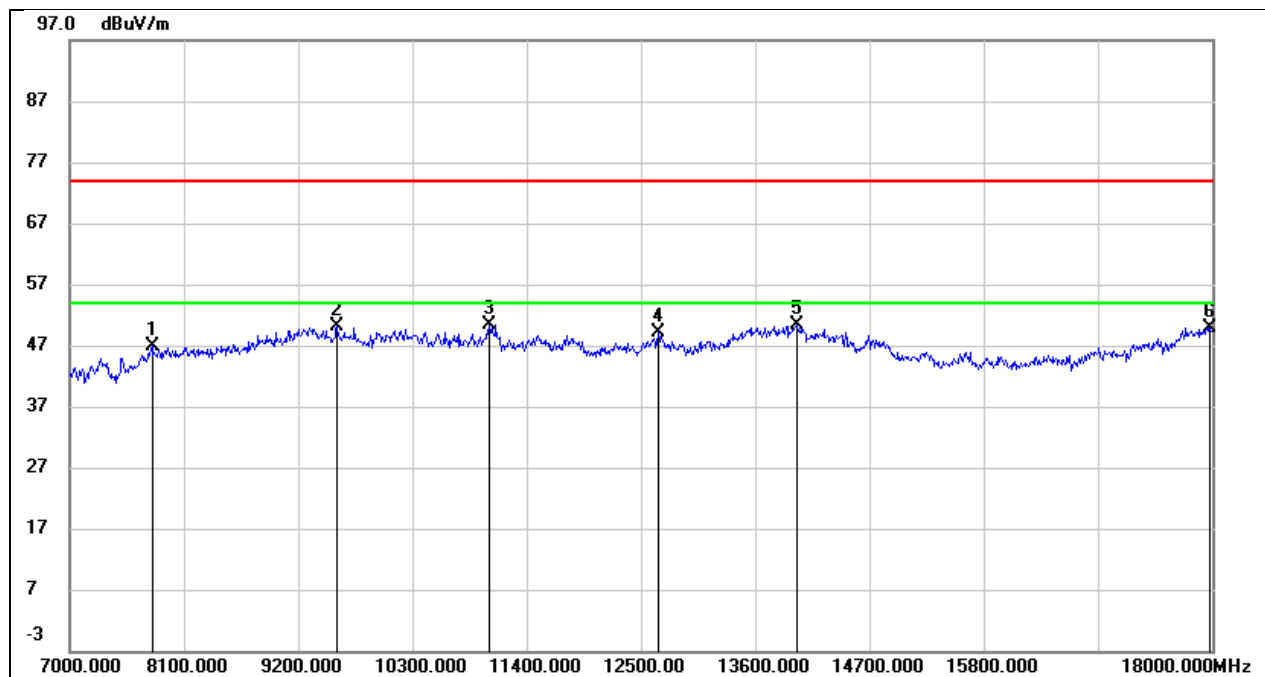


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	38.75	8.01	46.76	74.00	-27.24	peak
2	9574.000	36.74	13.31	50.05	74.00	-23.95	peak
3	11037.000	35.21	15.27	50.48	74.00	-23.52	peak
4	12665.000	29.70	19.42	49.12	74.00	-24.88	peak
5	14007.000	26.75	23.59	50.34	74.00	-23.66	peak
6	17978.000	20.60	29.38	49.98	74.00	-24.02	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

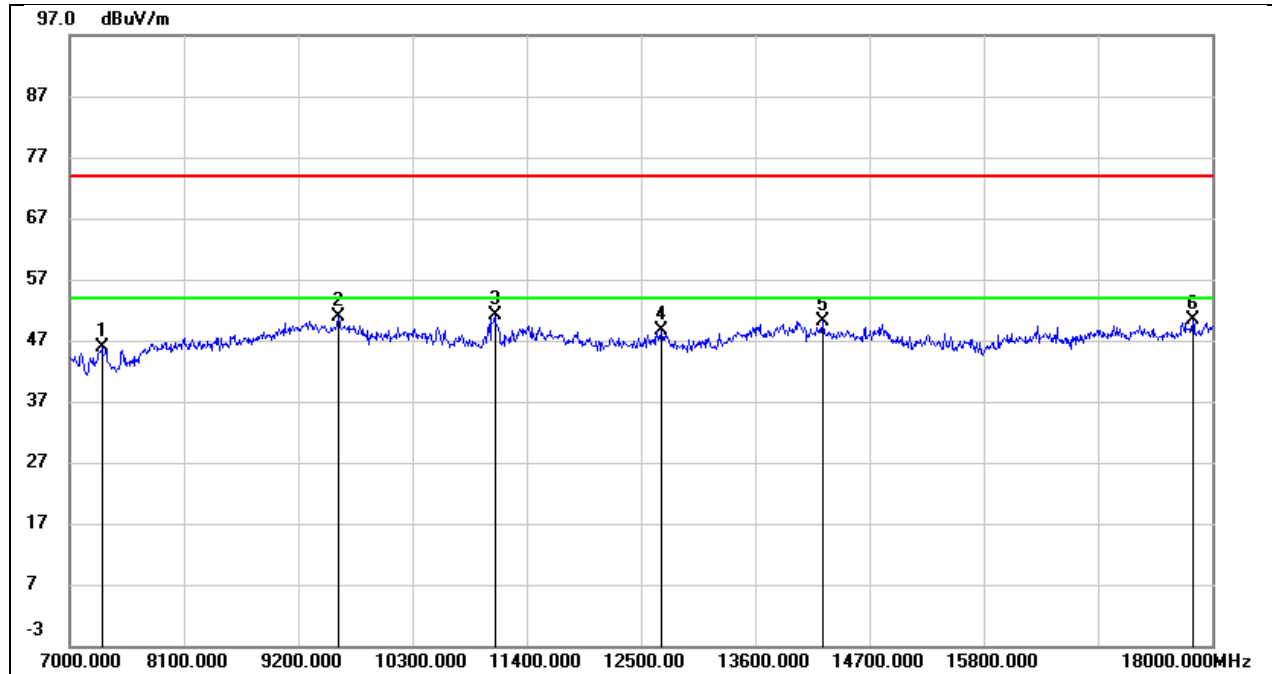


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.63	8.29	45.92	74.00	-28.08	peak
2	9585.000	37.70	13.26	50.96	74.00	-23.04	peak
3	11092.000	36.49	14.63	51.12	74.00	-22.88	peak
4	12698.000	30.00	18.54	48.54	74.00	-25.46	peak
5	14249.000	28.67	21.54	50.21	74.00	-23.79	peak
6	17813.000	24.21	26.24	50.45	74.00	-23.55	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

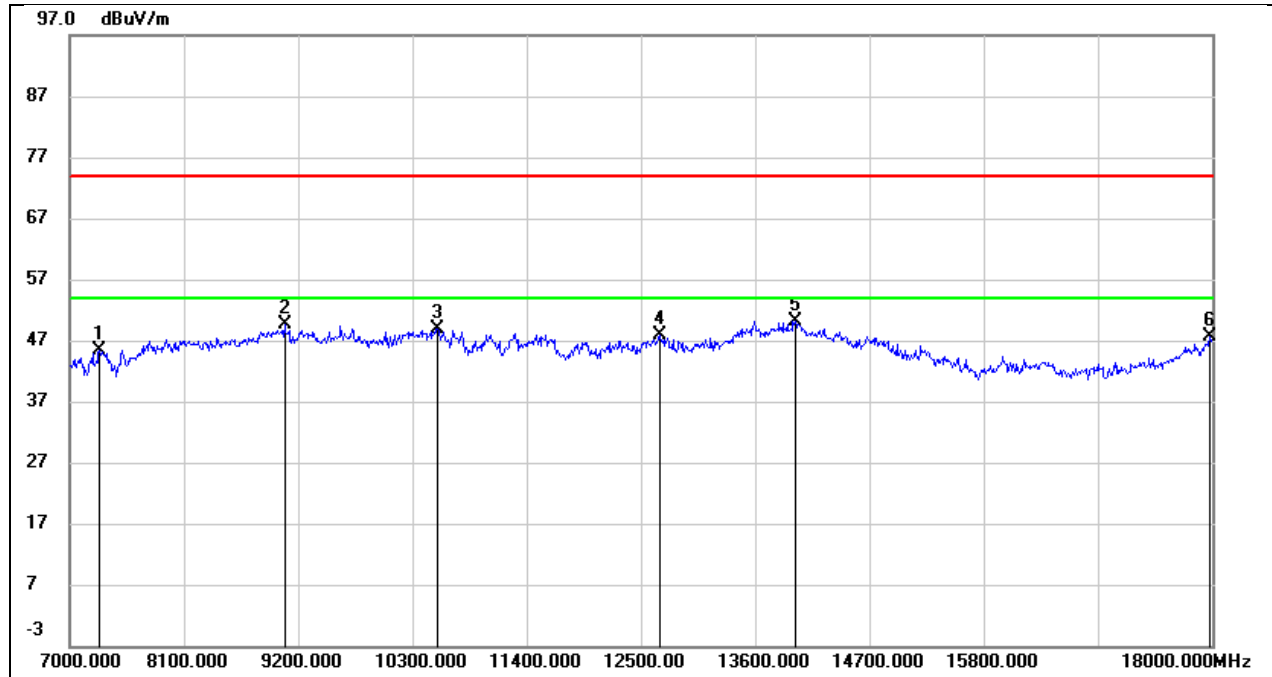


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.78	7.62	45.40	74.00	-28.60	peak
2	9068.000	38.57	10.97	49.54	74.00	-24.46	peak
3	10542.000	35.15	13.66	48.81	74.00	-25.19	peak
4	12676.000	28.50	19.48	47.98	74.00	-26.02	peak
5	13985.000	26.65	23.55	50.20	74.00	-23.80	peak
6	17978.000	18.15	29.38	47.53	74.00	-26.47	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

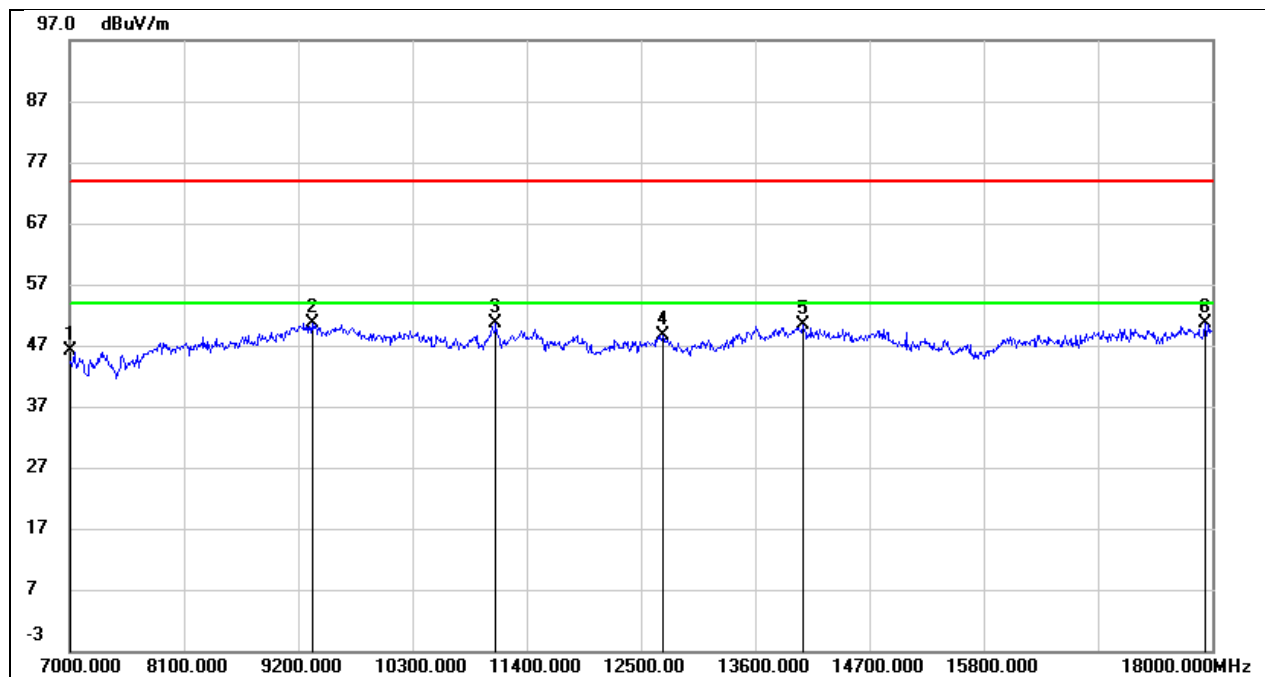


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7000.000	38.02	8.02	46.04	74.00	-27.96	peak
2	9332.000	38.46	12.13	50.59	74.00	-23.41	peak
3	11103.000	36.03	14.68	50.71	74.00	-23.29	peak
4	12709.000	30.17	18.58	48.75	74.00	-25.25	peak
5	14062.000	28.40	21.91	50.31	74.00	-23.69	peak
6	17934.000	23.61	27.00	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

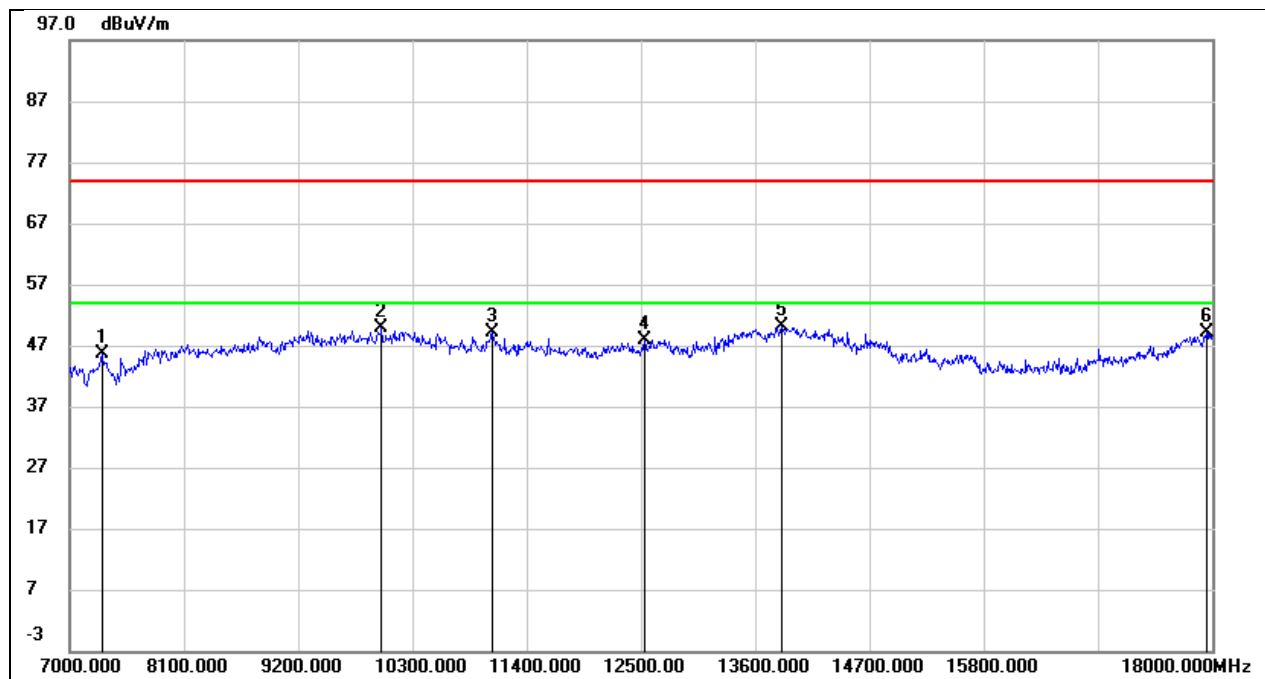


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.95	7.64	45.59	74.00	-28.41	peak
2	10003.000	36.65	13.33	49.98	74.00	-24.02	peak
3	11070.000	33.57	15.44	49.01	74.00	-24.99	peak
4	12533.000	28.90	19.05	47.95	74.00	-26.05	peak
5	13853.000	27.04	23.01	50.05	74.00	-23.95	peak
6	17945.000	20.07	29.03	49.10	74.00	-24.90	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

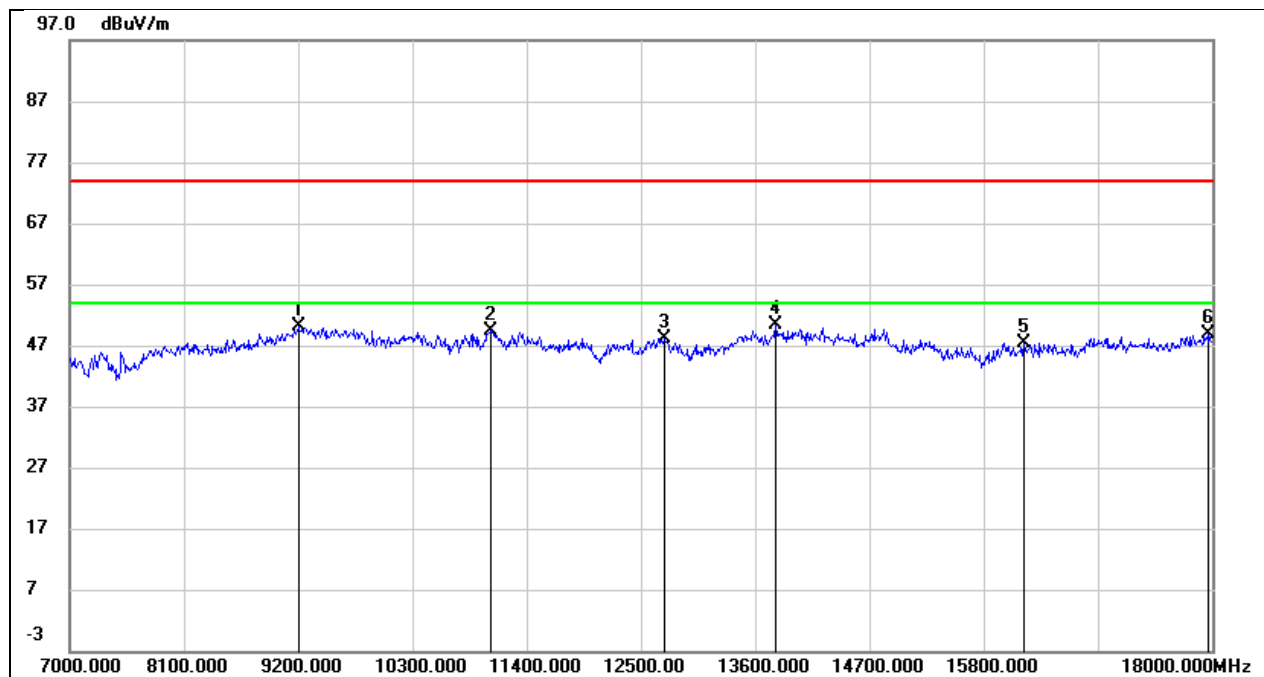


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.45	11.80	50.25	74.00	-23.75	peak
2	11059.000	34.80	14.51	49.31	74.00	-24.69	peak
3	12731.000	29.42	18.66	48.08	74.00	-25.92	peak
4	13798.000	29.27	21.15	50.42	74.00	-23.58	peak
5	16185.000	23.42	24.06	47.48	74.00	-26.52	peak
6	17967.000	21.73	27.20	48.93	74.00	-25.07	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

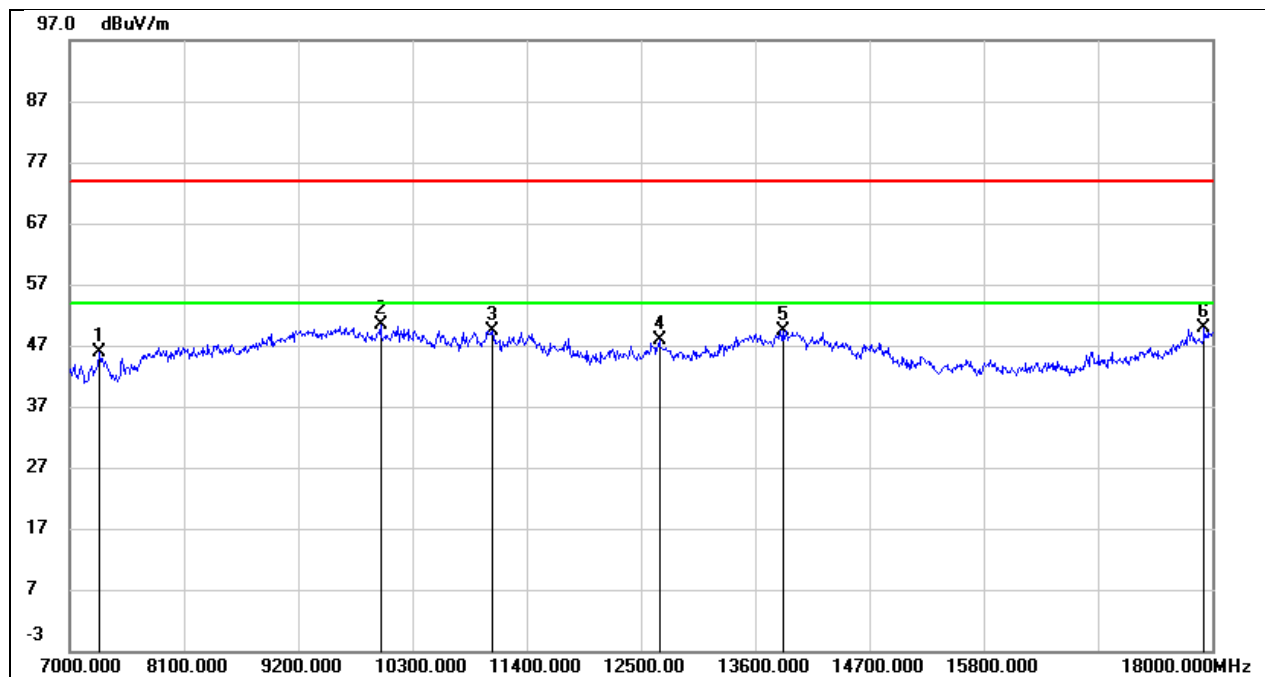


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.33	7.62	45.95	74.00	-28.05	peak
2	9992.000	36.99	13.36	50.35	74.00	-23.65	peak
3	11070.000	34.00	15.44	49.44	74.00	-24.56	peak
4	12676.000	28.43	19.48	47.91	74.00	-26.09	peak
5	13864.000	26.36	23.06	49.42	74.00	-24.58	peak
6	17923.000	21.00	28.78	49.78	74.00	-24.22	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

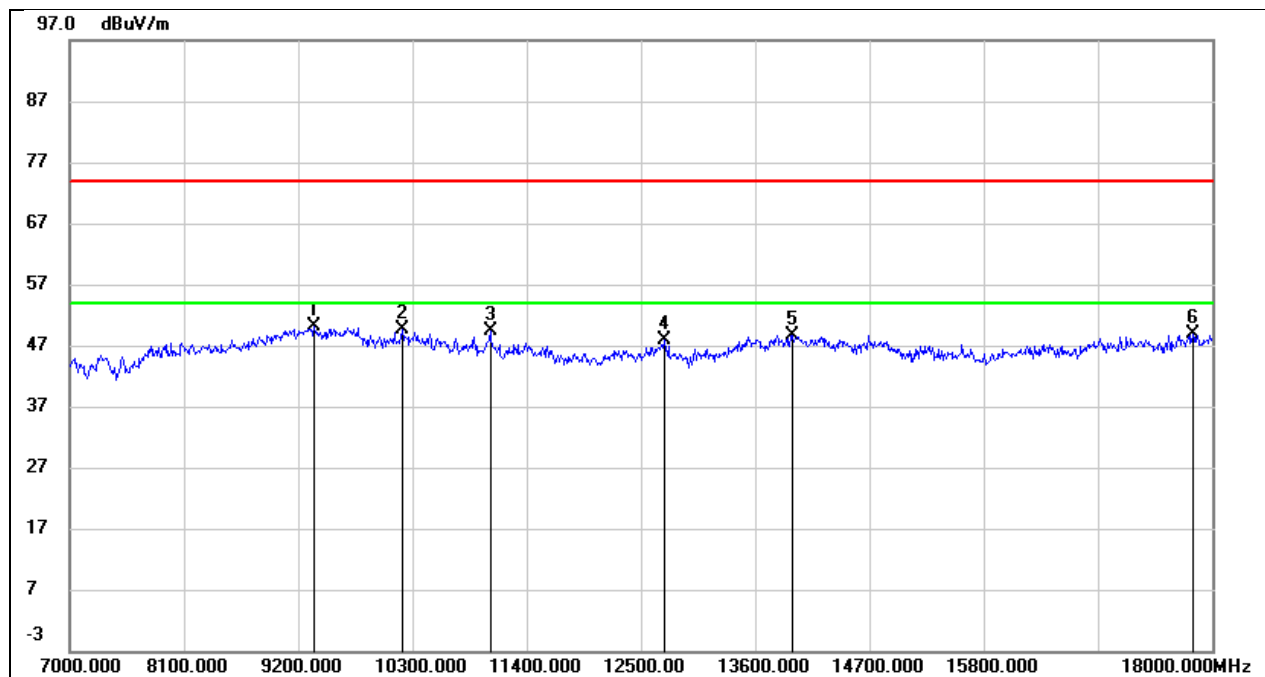


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	38.06	12.17	50.23	74.00	-23.77	peak
2	10201.000	36.84	12.68	49.52	74.00	-24.48	peak
3	11048.000	34.84	14.46	49.30	74.00	-24.70	peak
4	12720.000	29.31	18.62	47.93	74.00	-26.07	peak
5	13952.000	26.86	21.81	48.67	74.00	-25.33	peak
6	17813.000	22.68	26.24	48.92	74.00	-25.08	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

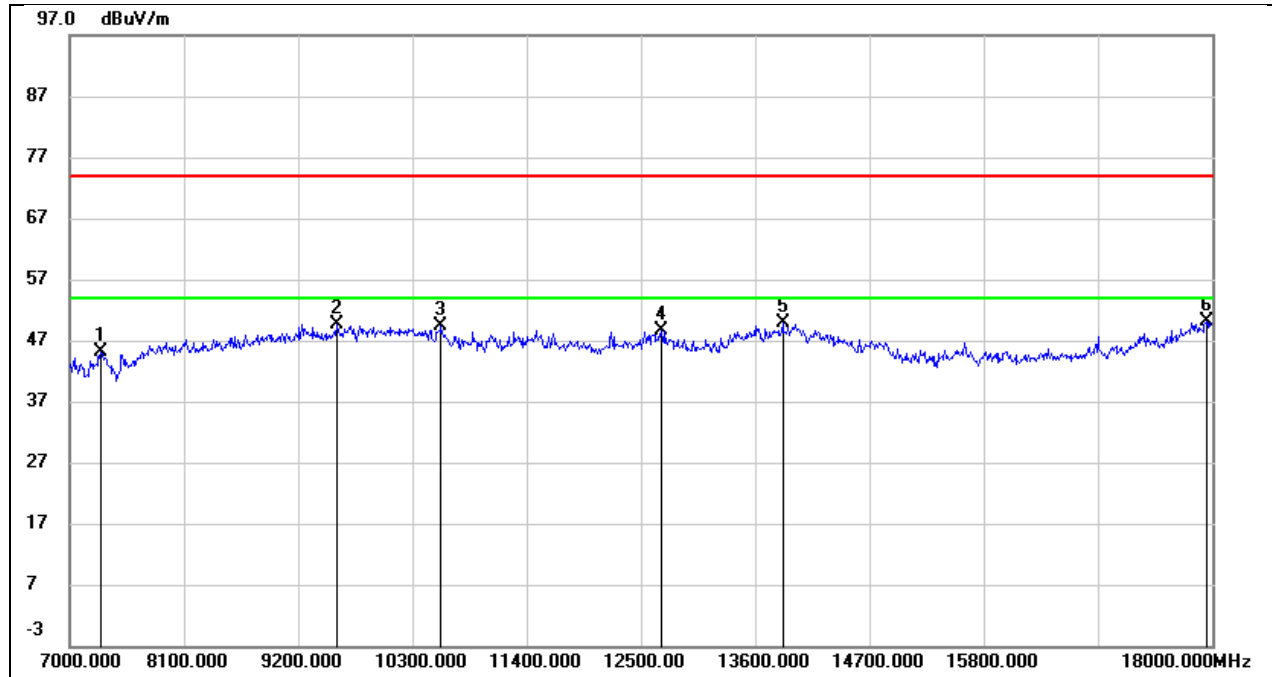


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.46	7.64	45.10	74.00	-28.90	peak
2	9574.000	36.32	13.31	49.63	74.00	-24.37	peak
3	10575.000	35.70	13.75	49.45	74.00	-24.55	peak
4	12698.000	29.08	19.56	48.64	74.00	-25.36	peak
5	13864.000	26.73	23.06	49.79	74.00	-24.21	peak
6	17945.000	21.06	29.03	50.09	74.00	-23.91	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

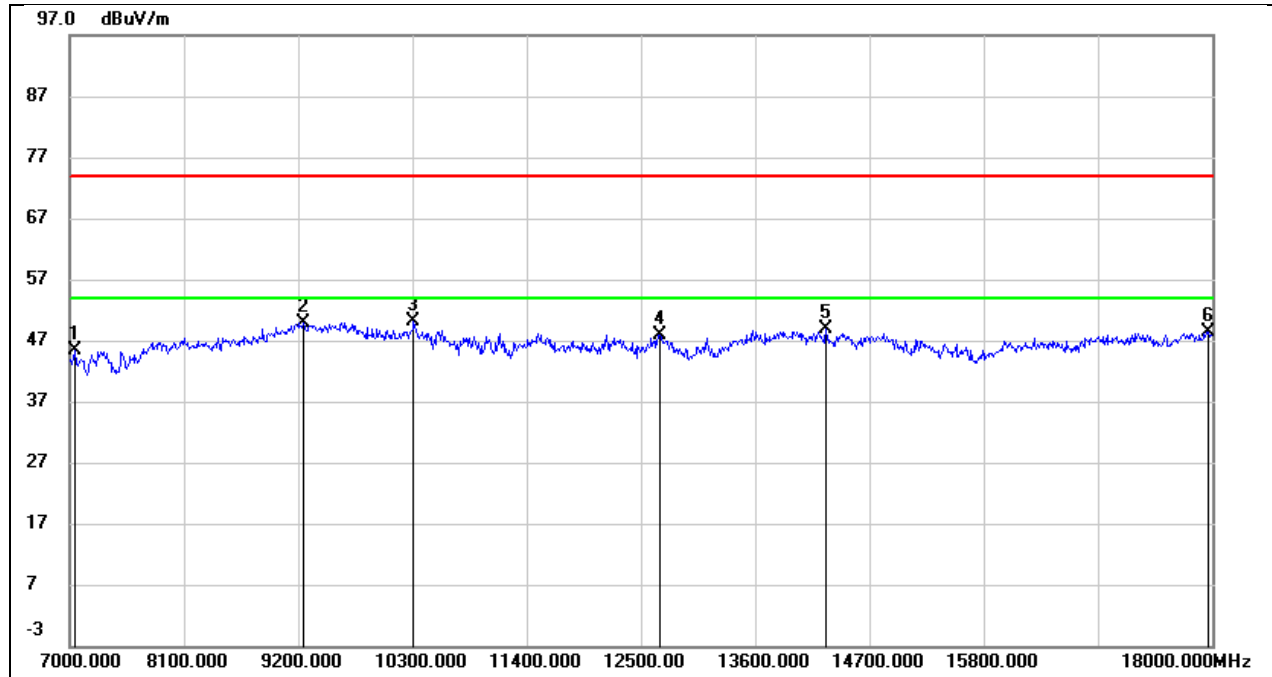


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	37.27	8.08	45.35	74.00	-28.65	peak
2	9255.000	37.85	11.93	49.78	74.00	-24.22	peak
3	10311.000	37.17	12.89	50.06	74.00	-23.94	peak
4	12687.000	29.46	18.51	47.97	74.00	-26.03	peak
5	14282.000	27.39	21.41	48.80	74.00	-25.20	peak
6	17956.000	21.28	27.13	48.41	74.00	-25.59	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

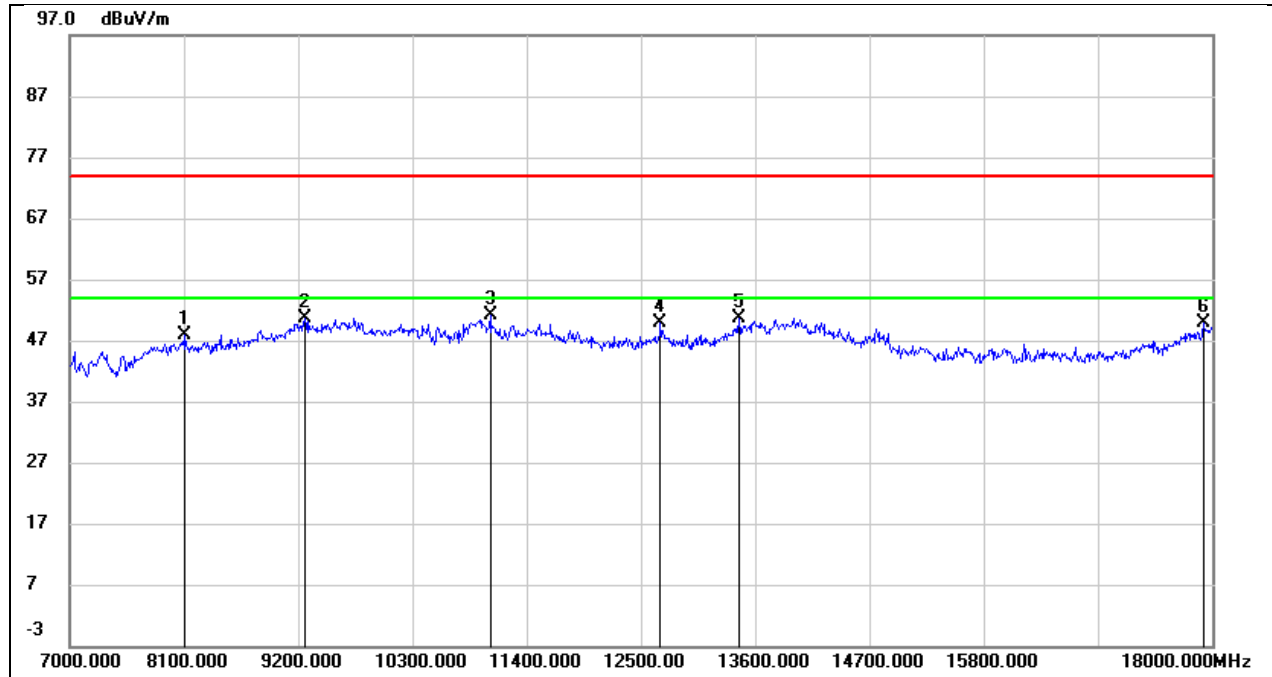


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.54	8.23	47.77	74.00	-26.23	peak
2	9266.000	38.95	11.78	50.73	74.00	-23.27	peak
3	11048.000	35.81	15.33	51.14	74.00	-22.86	peak
4	12687.000	30.46	19.52	49.98	74.00	-24.02	peak
5	13446.000	28.78	21.82	50.60	74.00	-23.40	peak
6	17912.000	21.16	28.68	49.84	74.00	-24.16	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

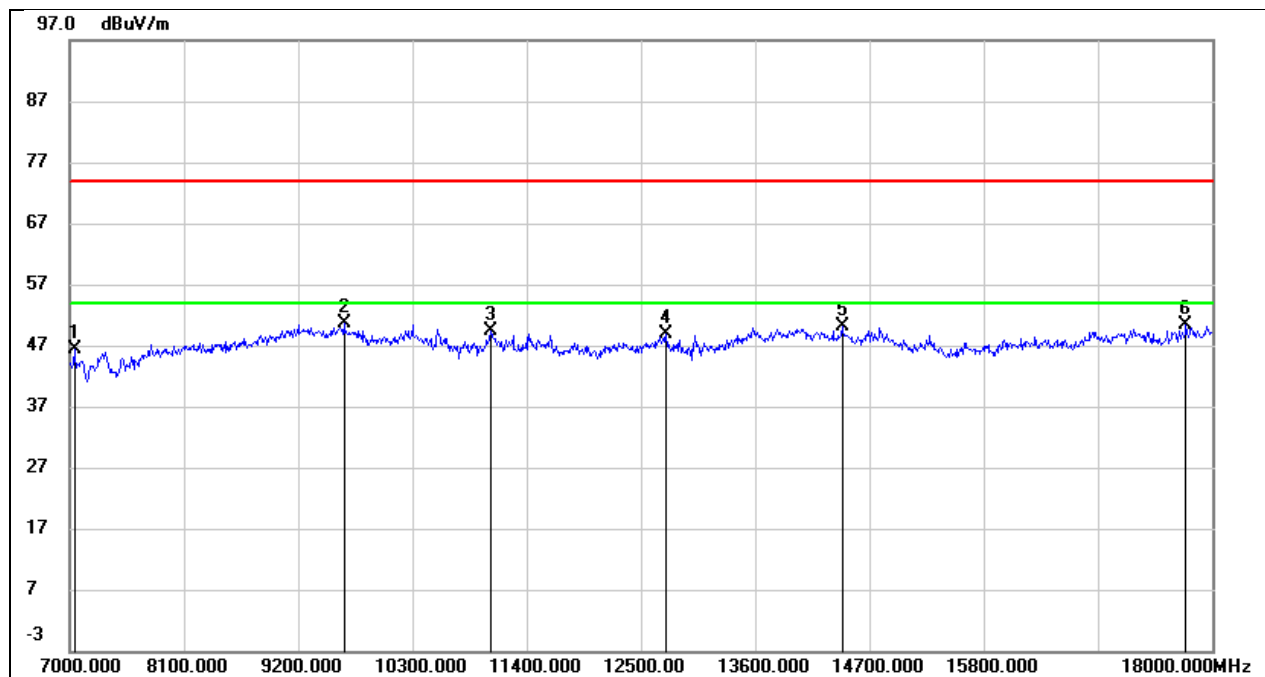


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	38.19	8.08	46.27	74.00	-27.73	peak
2	9640.000	37.31	13.33	50.64	74.00	-23.36	peak
3	11059.000	34.77	14.51	49.28	74.00	-24.72	peak
4	12742.000	30.24	18.70	48.94	74.00	-25.06	peak
5	14436.000	29.25	20.98	50.23	74.00	-23.77	peak
6	17747.000	24.43	25.89	50.32	74.00	-23.68	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

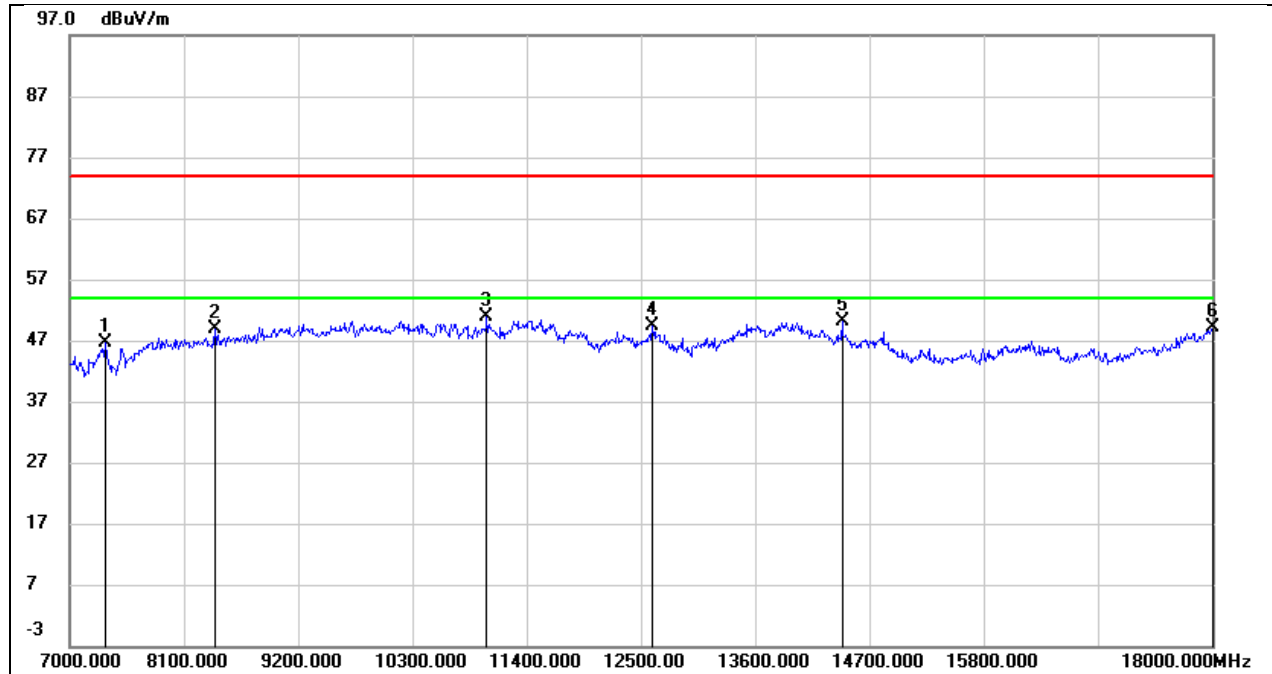


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.89	7.68	46.57	74.00	-27.43	peak
2	8397.000	40.35	8.56	48.91	74.00	-25.09	peak
3	11015.000	35.72	15.14	50.86	74.00	-23.14	peak
4	12610.000	30.13	19.20	49.33	74.00	-24.67	peak
5	14436.000	28.62	21.44	50.06	74.00	-23.94	peak
6	18000.000	19.59	29.61	49.20	74.00	-24.80	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

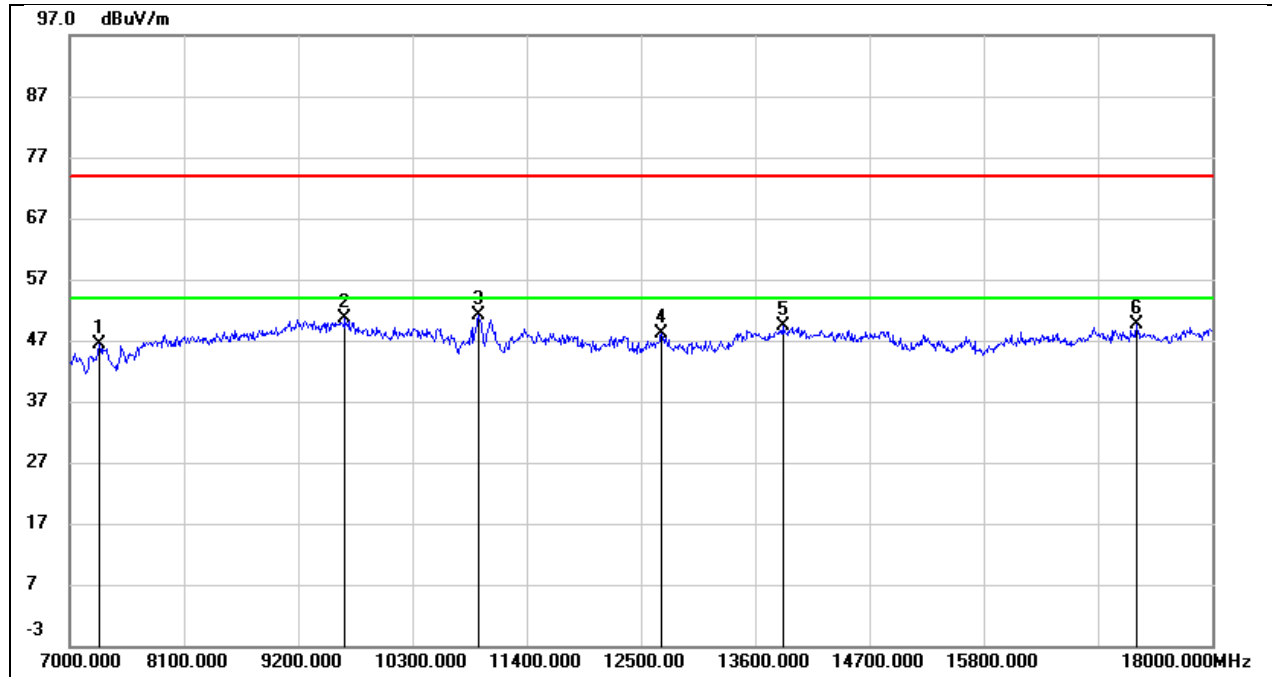


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.06	8.29	46.35	74.00	-27.65	peak
2	9651.000	37.31	13.34	50.65	74.00	-23.35	peak
3	10938.000	37.07	14.13	51.20	74.00	-22.80	peak
4	12698.000	29.70	18.54	48.24	74.00	-25.76	peak
5	13864.000	27.97	21.43	49.40	74.00	-24.60	peak
6	17274.000	24.71	24.97	49.68	74.00	-24.32	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

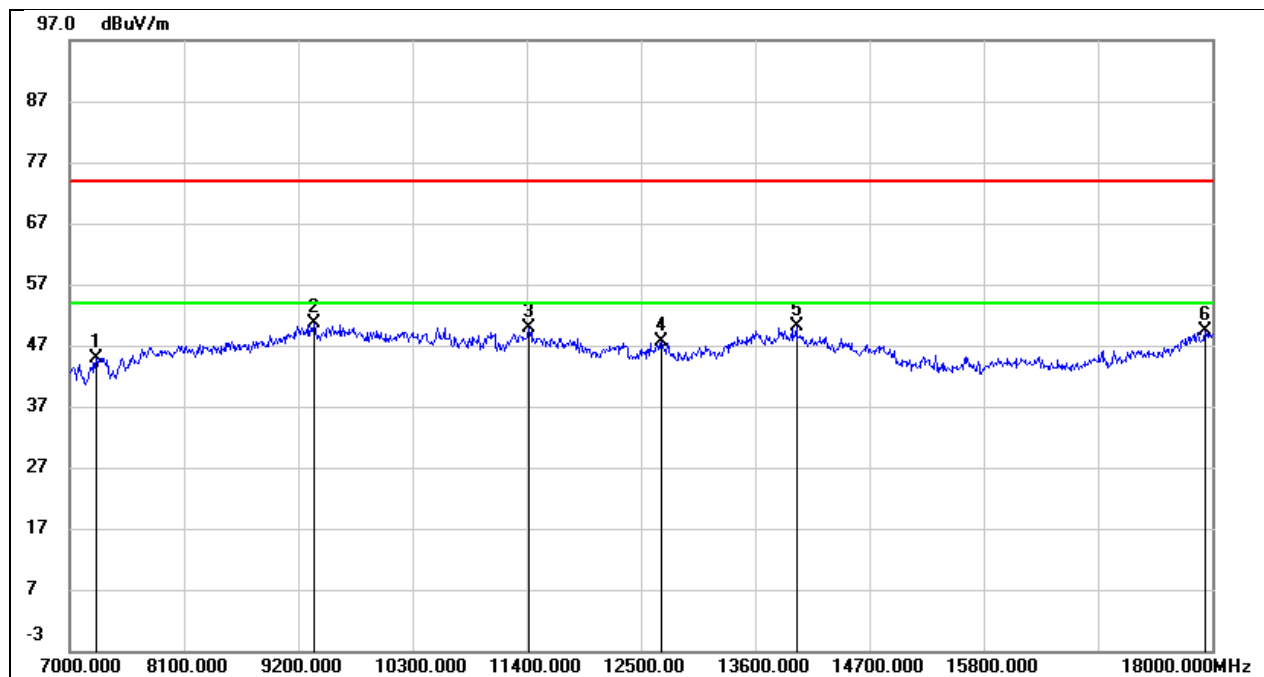


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7253.000	37.31	7.58	44.89	74.00	-29.11	peak
2	9354.000	38.52	12.06	50.58	74.00	-23.42	peak
3	11422.000	32.45	17.46	49.91	74.00	-24.09	peak
4	12698.000	27.97	19.56	47.53	74.00	-26.47	peak
5	13996.000	26.42	23.59	50.01	74.00	-23.99	peak
6	17934.000	20.53	28.91	49.44	74.00	-24.56	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

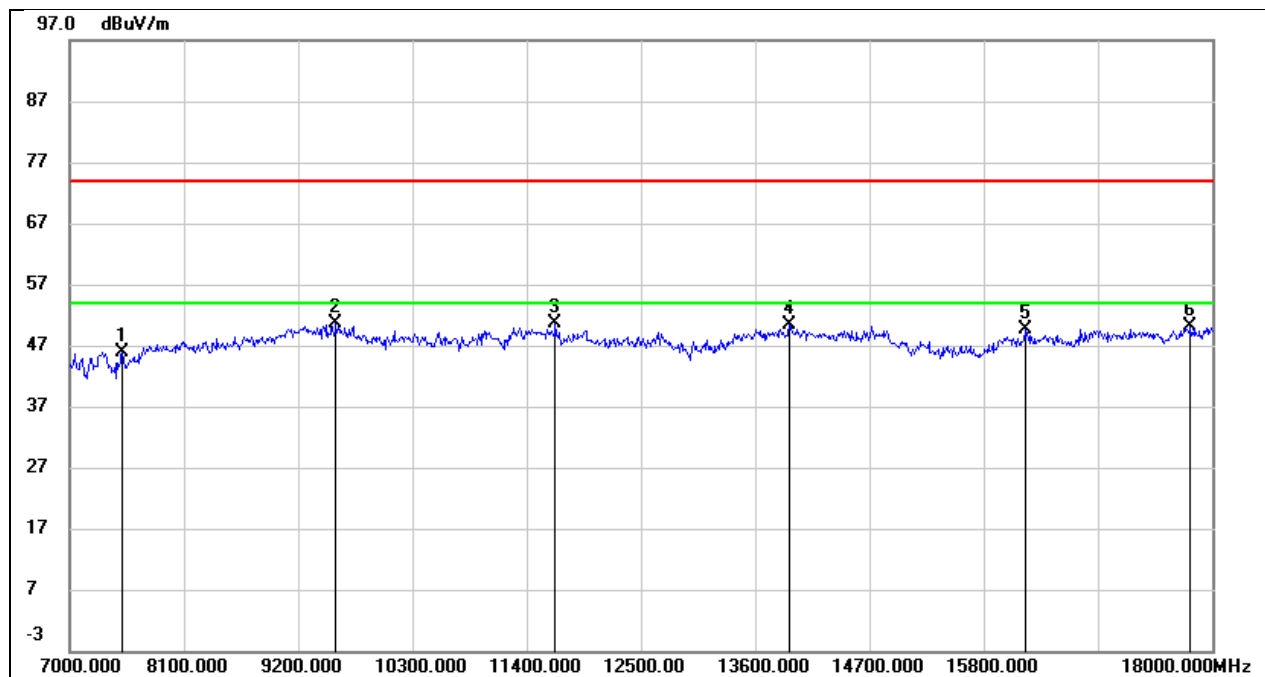


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.57	8.34	45.91	74.00	-28.09	peak
2	9563.000	37.55	13.14	50.69	74.00	-23.31	peak
3	11675.000	33.82	16.69	50.51	74.00	-23.49	peak
4	13930.000	28.59	21.71	50.30	74.00	-23.70	peak
5	16196.000	25.38	24.13	49.51	74.00	-24.49	peak
6	17791.000	24.09	26.11	50.20	74.00	-23.80	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

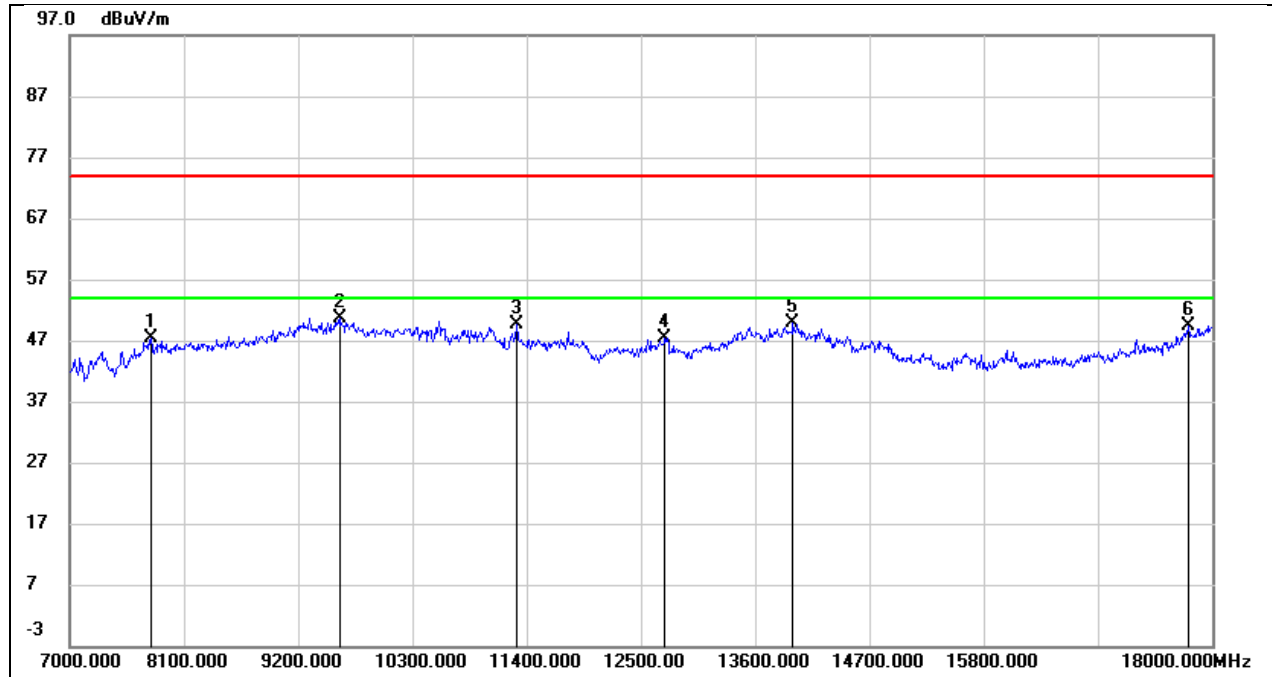


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.35	7.99	47.34	74.00	-26.66	peak
2	9607.000	37.06	13.48	50.54	74.00	-23.46	peak
3	11301.000	32.76	16.76	49.52	74.00	-24.48	peak
4	12731.000	27.73	19.70	47.43	74.00	-26.57	peak
5	13963.000	26.42	23.46	49.88	74.00	-24.12	peak
6	17769.000	22.27	27.18	49.45	74.00	-24.55	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

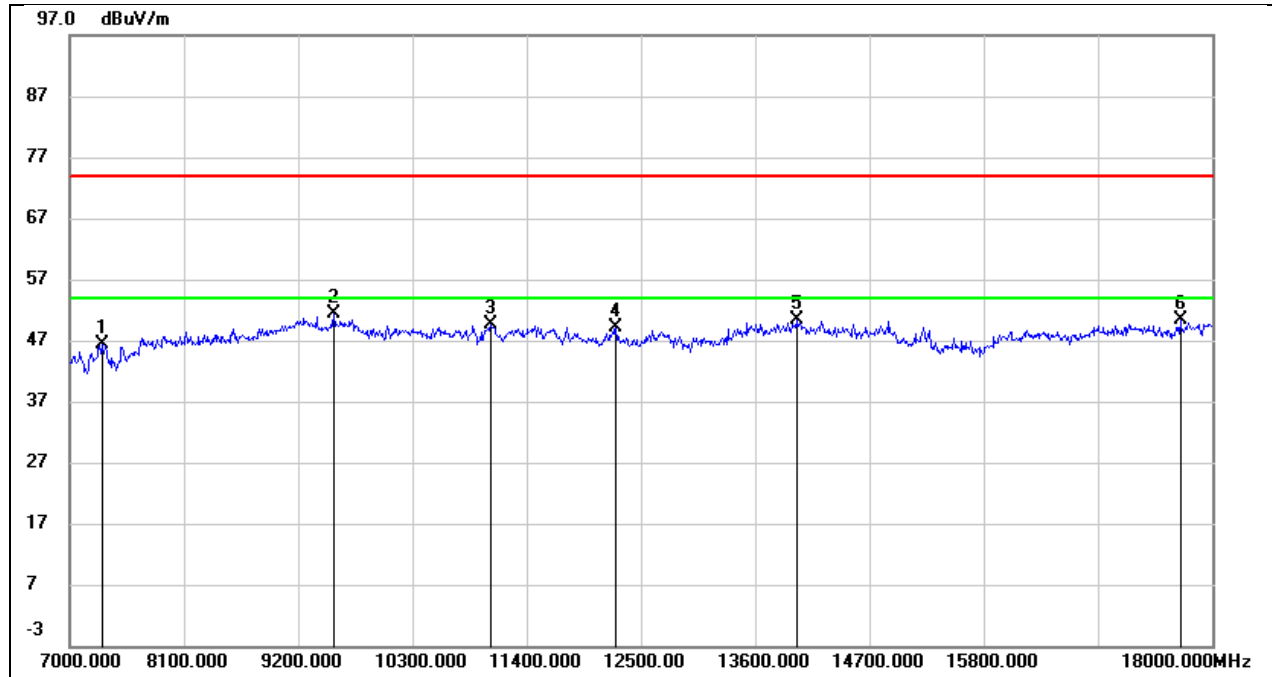


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.97	8.29	46.26	74.00	-27.74	peak
2	9541.000	38.29	13.04	51.33	74.00	-22.67	peak
3	11048.000	35.28	14.46	49.74	74.00	-24.26	peak
4	12258.000	31.44	17.79	49.23	74.00	-24.77	peak
5	13996.000	28.36	21.99	50.35	74.00	-23.65	peak
6	17692.000	24.68	25.59	50.27	74.00	-23.73	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

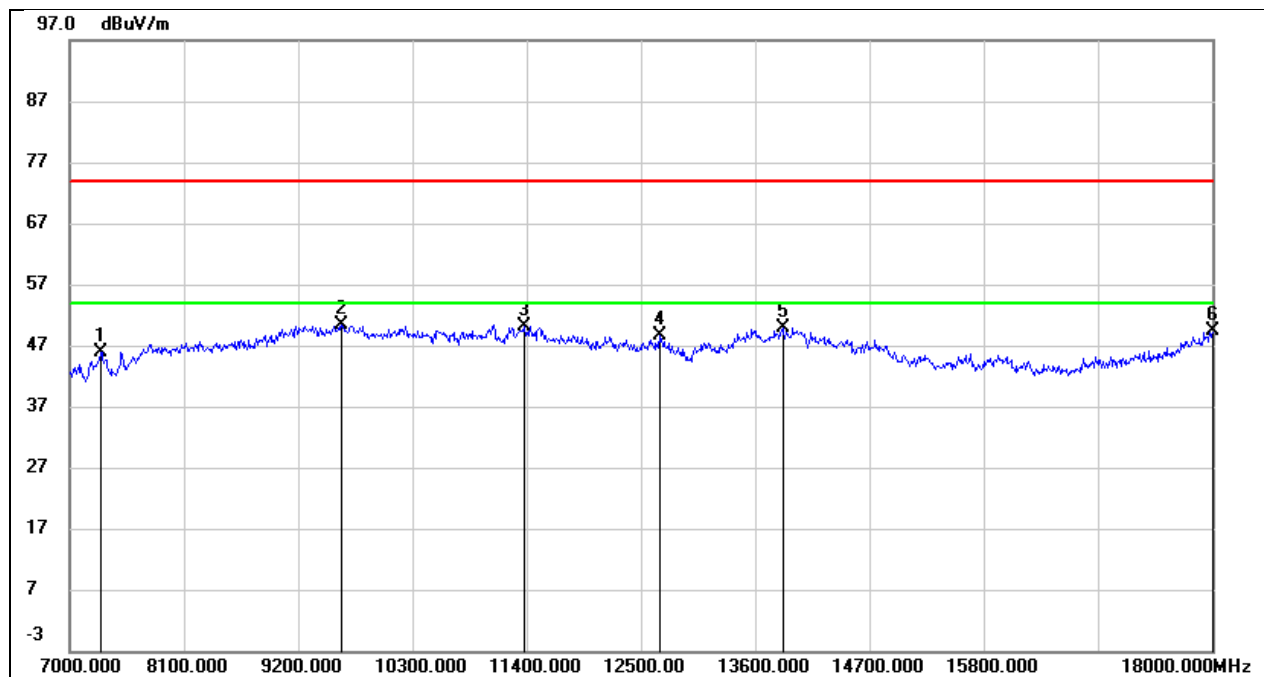


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	38.20	7.64	45.84	74.00	-28.16	peak
2	9618.000	36.85	13.49	50.34	74.00	-23.66	peak
3	11378.000	32.91	17.23	50.14	74.00	-23.86	peak
4	12676.000	29.04	19.48	48.52	74.00	-25.48	peak
5	13864.000	26.85	23.06	49.91	74.00	-24.09	peak
6	18000.000	19.83	29.61	49.44	74.00	-24.56	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

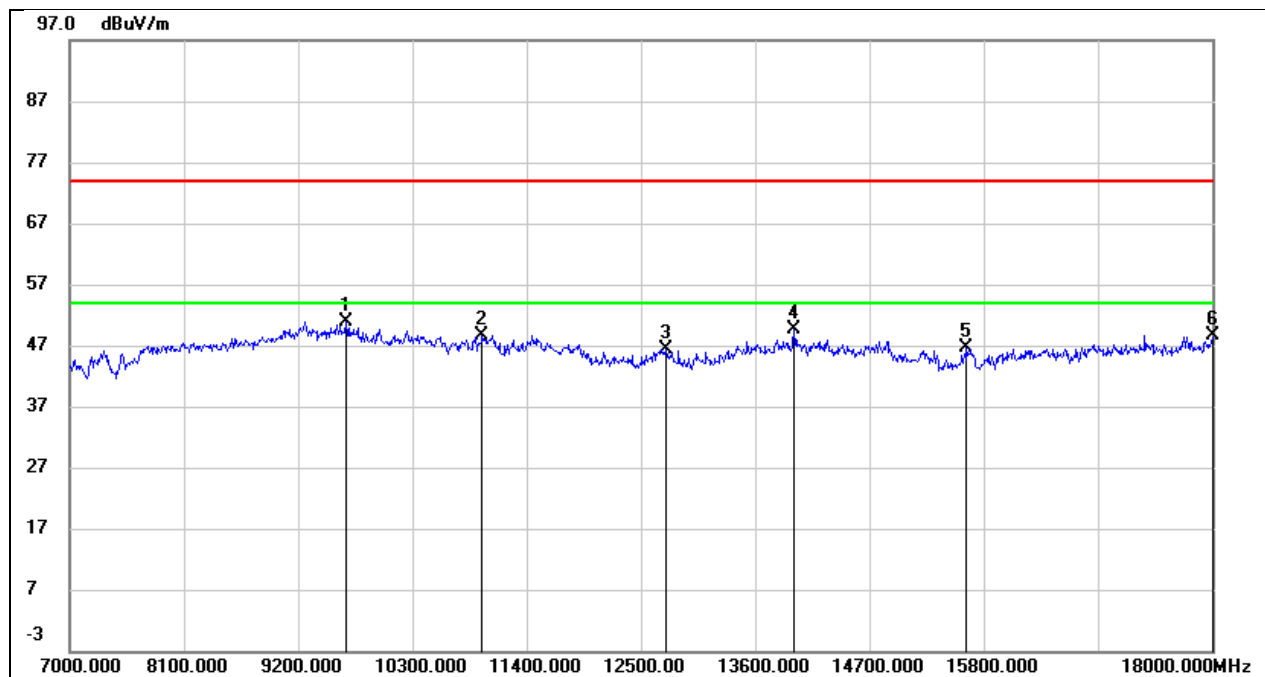


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	37.52	13.34	50.86	74.00	-23.14	peak
2	10971.000	34.36	14.20	48.56	74.00	-25.44	peak
3	12742.000	27.71	18.70	46.41	74.00	-27.59	peak
4	13974.000	27.63	21.89	49.52	74.00	-24.48	peak
5	15635.000	25.58	21.00	46.58	74.00	-27.42	peak
6	18000.000	21.34	27.41	48.75	74.00	-25.25	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

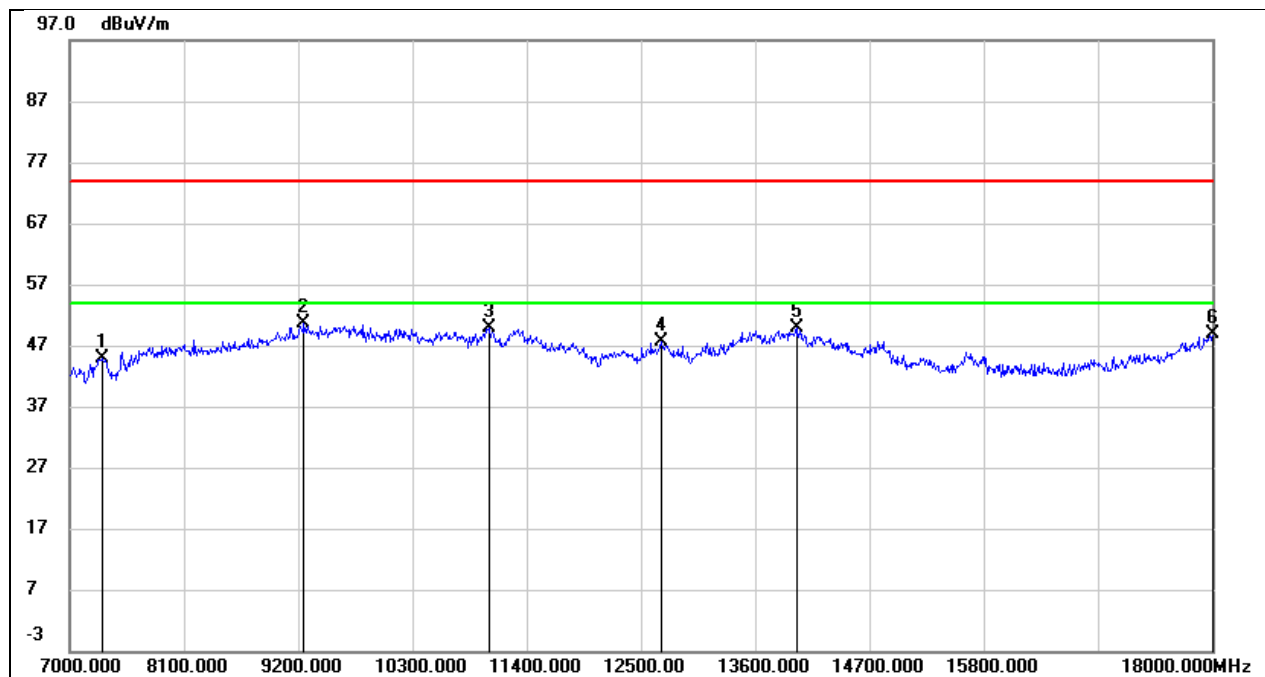


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.27	7.64	44.91	74.00	-29.09	peak
2	9255.000	38.93	11.74	50.67	74.00	-23.33	peak
3	11037.000	34.73	15.27	50.00	74.00	-24.00	peak
4	12698.000	28.13	19.56	47.69	74.00	-26.31	peak
5	13996.000	26.33	23.59	49.92	74.00	-24.08	peak
6	18000.000	19.26	29.61	48.87	74.00	-25.13	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

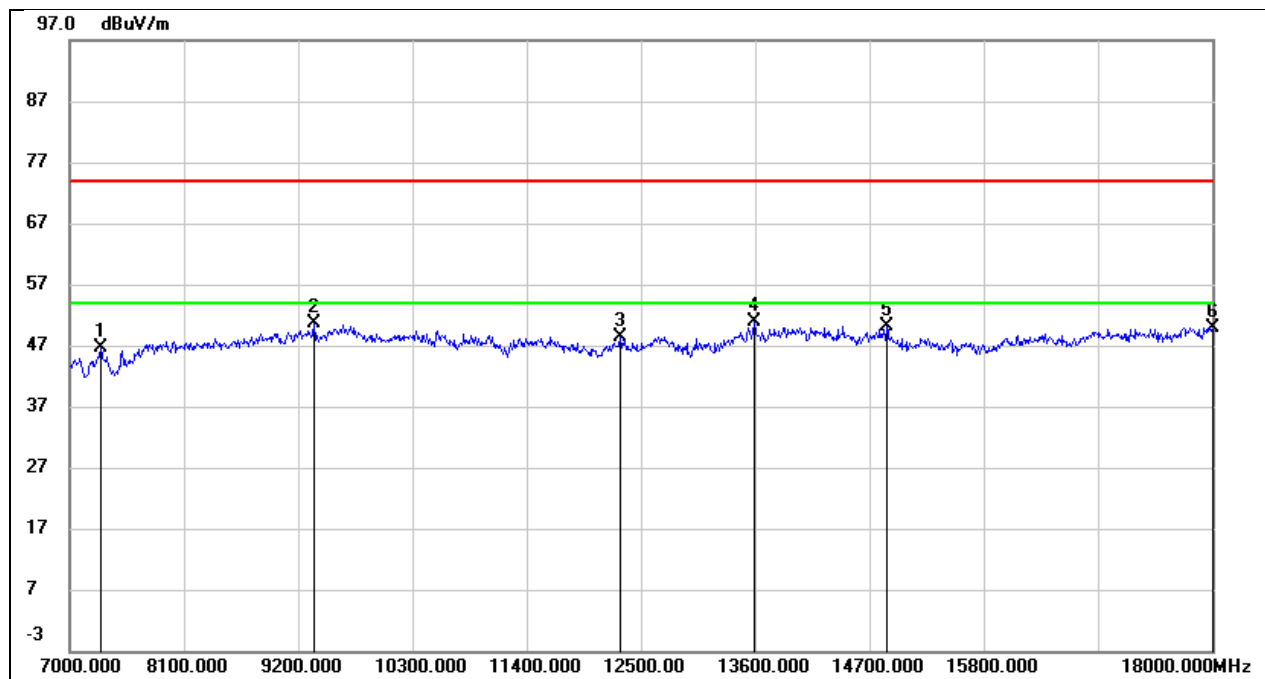


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	38.45	8.30	46.75	74.00	-27.25	peak
2	9354.000	38.35	12.17	50.52	74.00	-23.48	peak
3	12302.000	30.52	17.87	48.39	74.00	-25.61	peak
4	13589.000	30.29	20.52	50.81	74.00	-23.19	peak
5	14865.000	29.68	20.40	50.08	74.00	-23.92	peak
6	18000.000	22.56	27.41	49.97	74.00	-24.03	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

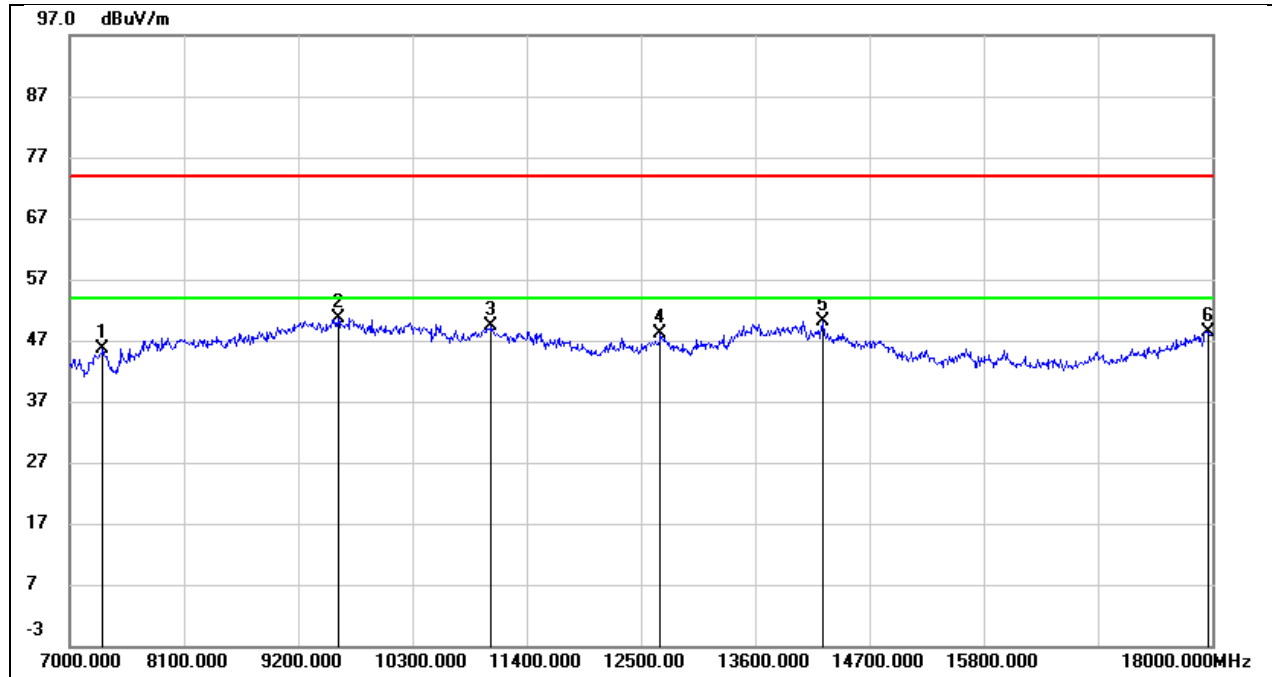


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.90	7.66	45.56	74.00	-28.44	peak
2	9585.000	37.35	13.38	50.73	74.00	-23.27	peak
3	11059.000	33.97	15.39	49.36	74.00	-24.64	peak
4	12687.000	28.61	19.52	48.13	74.00	-25.87	peak
5	14249.000	27.57	22.49	50.06	74.00	-23.94	peak
6	17967.000	19.23	29.26	48.49	74.00	-25.51	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

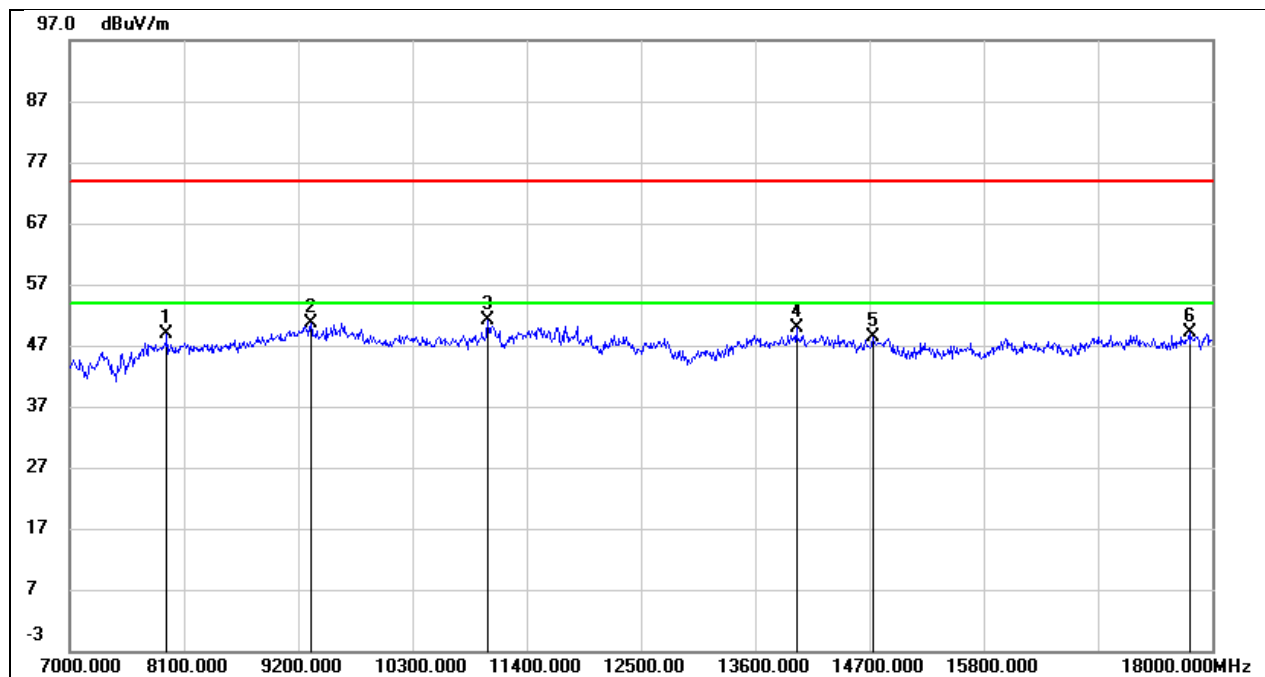


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7935.000	40.44	8.55	48.99	74.00	-25.01	peak
2	9321.000	38.62	12.10	50.72	74.00	-23.28	peak
3	11026.000	36.87	14.37	51.24	74.00	-22.76	peak
4	13996.000	27.80	21.99	49.79	74.00	-24.21	peak
5	14733.000	27.58	20.69	48.27	74.00	-25.73	peak
6	17780.000	23.07	26.06	49.13	74.00	-24.87	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

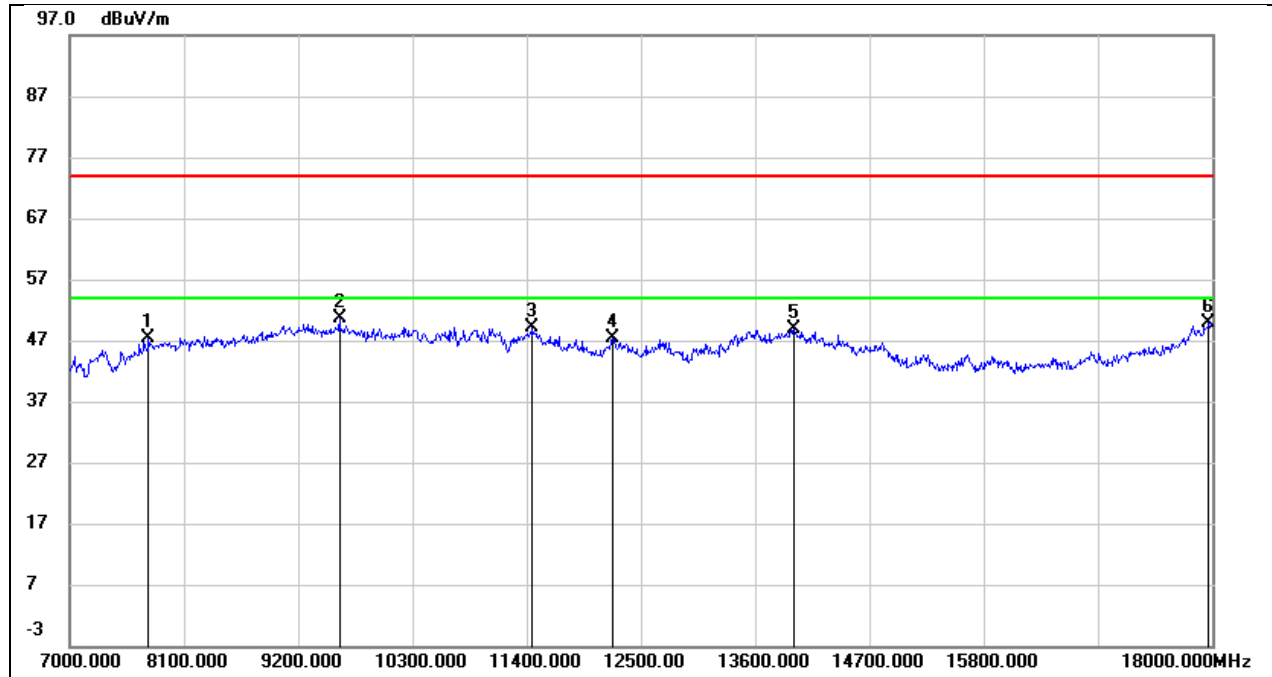


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.30	7.97	47.27	74.00	-26.73	peak
2	9596.000	37.13	13.44	50.57	74.00	-23.43	peak
3	11455.000	31.41	17.62	49.03	74.00	-24.97	peak
4	12225.000	28.52	18.74	47.26	74.00	-26.74	peak
5	13974.000	25.38	23.50	48.88	74.00	-25.12	peak
6	17967.000	20.74	29.26	50.00	74.00	-24.00	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

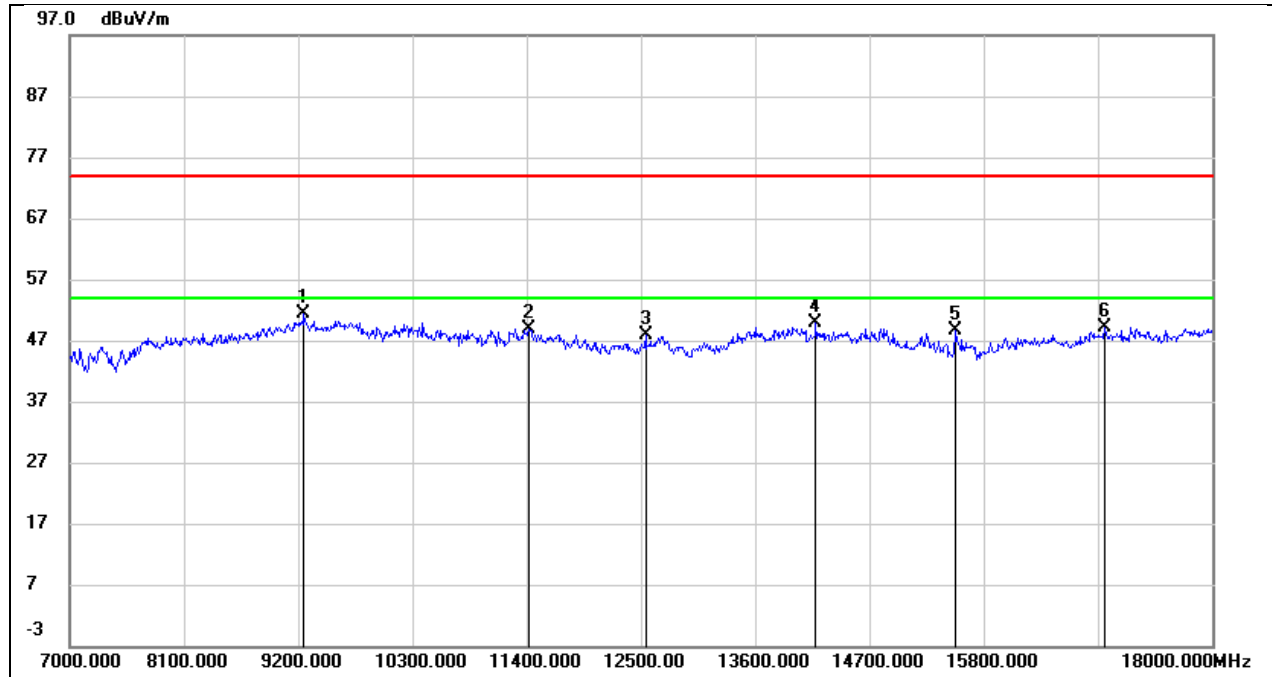


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	39.38	11.93	51.31	74.00	-22.69	peak
2	11422.000	32.71	16.07	48.78	74.00	-25.22	peak
3	12544.000	29.73	18.14	47.87	74.00	-26.13	peak
4	14183.000	28.21	21.73	49.94	74.00	-24.06	peak
5	15525.000	28.01	20.68	48.69	74.00	-25.31	peak
6	16966.000	24.74	24.36	49.10	74.00	-24.90	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

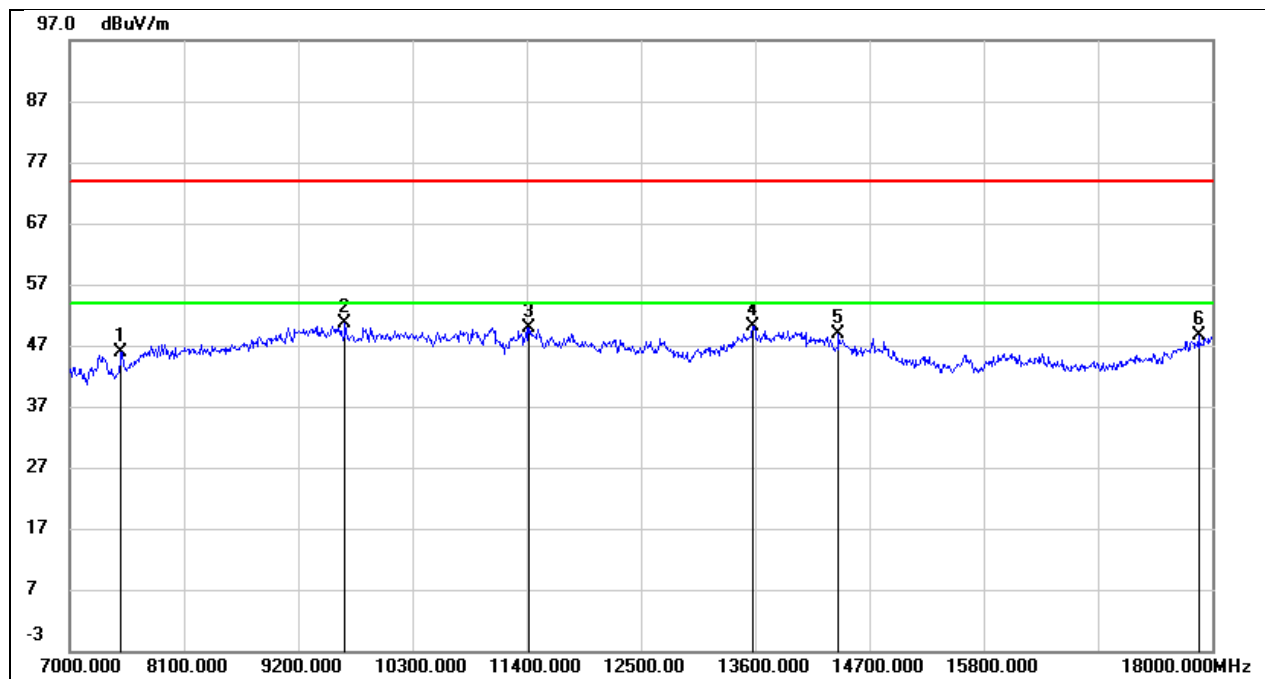


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.93	7.84	45.77	74.00	-28.23	peak
2	9651.000	37.18	13.55	50.73	74.00	-23.27	peak
3	11422.000	32.38	17.46	49.84	74.00	-24.16	peak
4	13578.000	27.99	22.18	50.17	74.00	-23.83	peak
5	14403.000	27.38	21.55	48.93	74.00	-25.07	peak
6	17868.000	20.34	28.21	48.55	74.00	-25.45	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

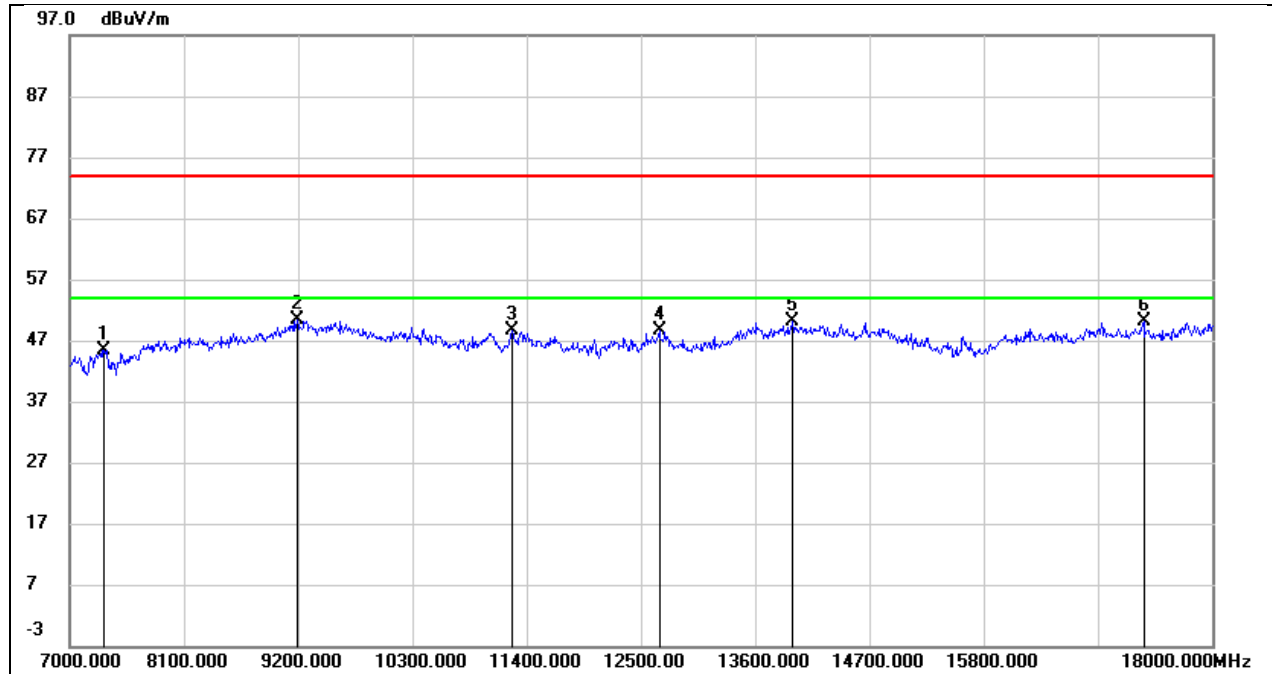


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.19	8.30	45.49	74.00	-28.51	peak
2	9189.000	38.71	11.76	50.47	74.00	-23.53	peak
3	11257.000	33.33	15.35	48.68	74.00	-25.32	peak
4	12676.000	30.24	18.47	48.71	74.00	-25.29	peak
5	13963.000	28.35	21.85	50.20	74.00	-23.80	peak
6	17340.000	25.04	25.01	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

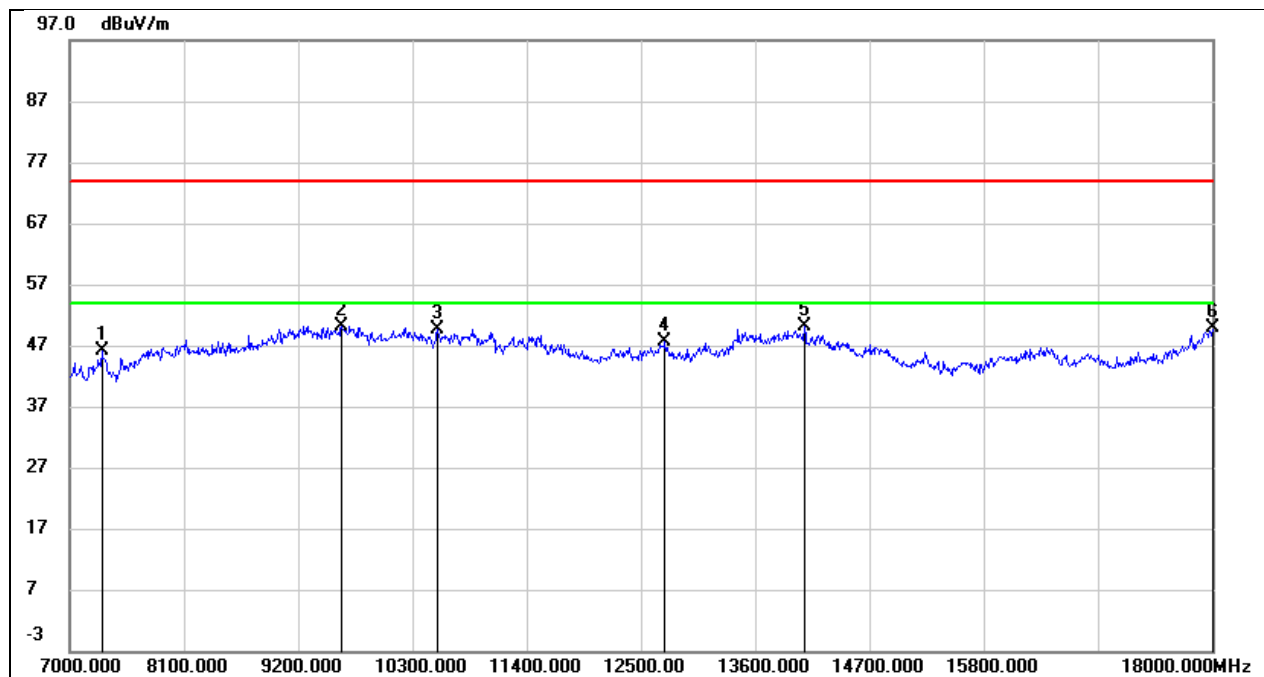


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.51	7.64	46.15	74.00	-27.85	peak
2	9618.000	36.73	13.49	50.22	74.00	-23.78	peak
3	10542.000	36.08	13.66	49.74	74.00	-24.26	peak
4	12731.000	27.85	19.70	47.55	74.00	-26.45	peak
5	14073.000	26.84	23.31	50.15	74.00	-23.85	peak
6	18000.000	20.15	29.61	49.76	74.00	-24.24	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

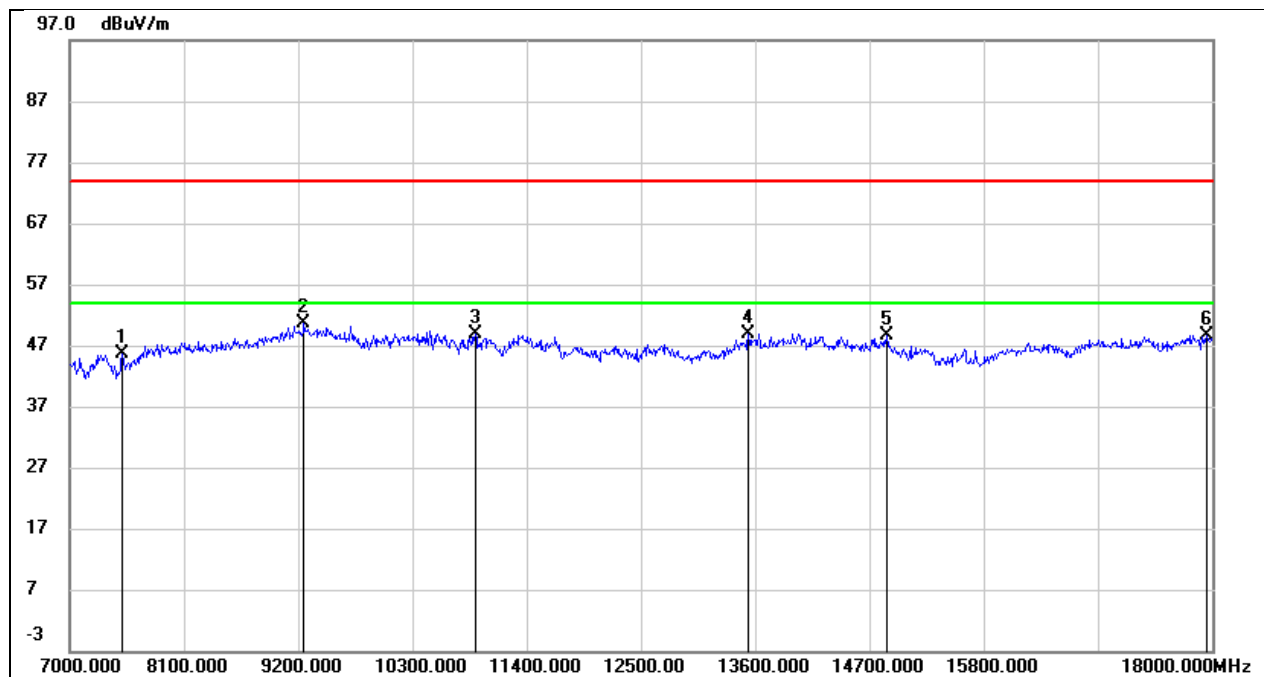


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.17	8.34	45.51	74.00	-28.49	peak
2	9255.000	38.60	11.93	50.53	74.00	-23.47	peak
3	10905.000	34.76	14.06	48.82	74.00	-25.18	peak
4	13534.000	28.56	20.41	48.97	74.00	-25.03	peak
5	14865.000	28.18	20.40	48.58	74.00	-25.42	peak
6	17945.000	21.62	27.07	48.69	74.00	-25.31	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

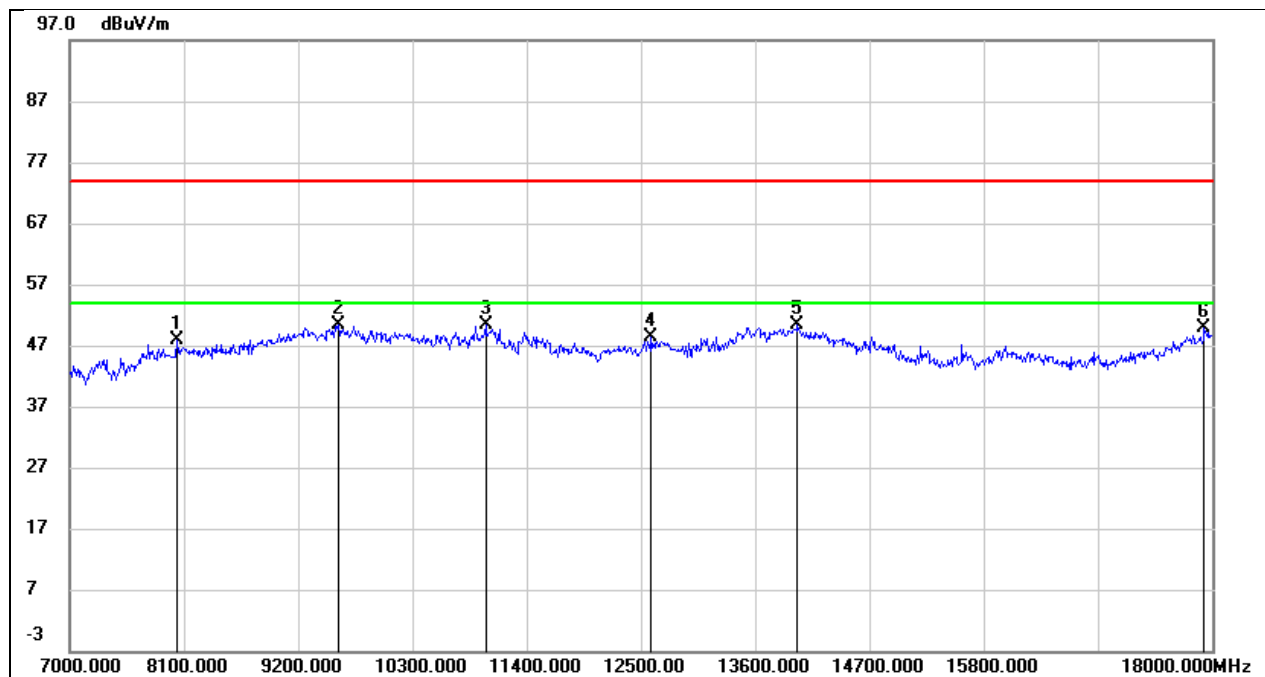


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8034.000	39.77	8.12	47.89	74.00	-26.11	peak
2	9585.000	36.93	13.38	50.31	74.00	-23.69	peak
3	11004.000	35.26	15.08	50.34	74.00	-23.66	peak
4	12599.000	29.28	19.16	48.44	74.00	-25.56	peak
5	14007.000	26.78	23.59	50.37	74.00	-23.63	peak
6	17923.000	21.06	28.78	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

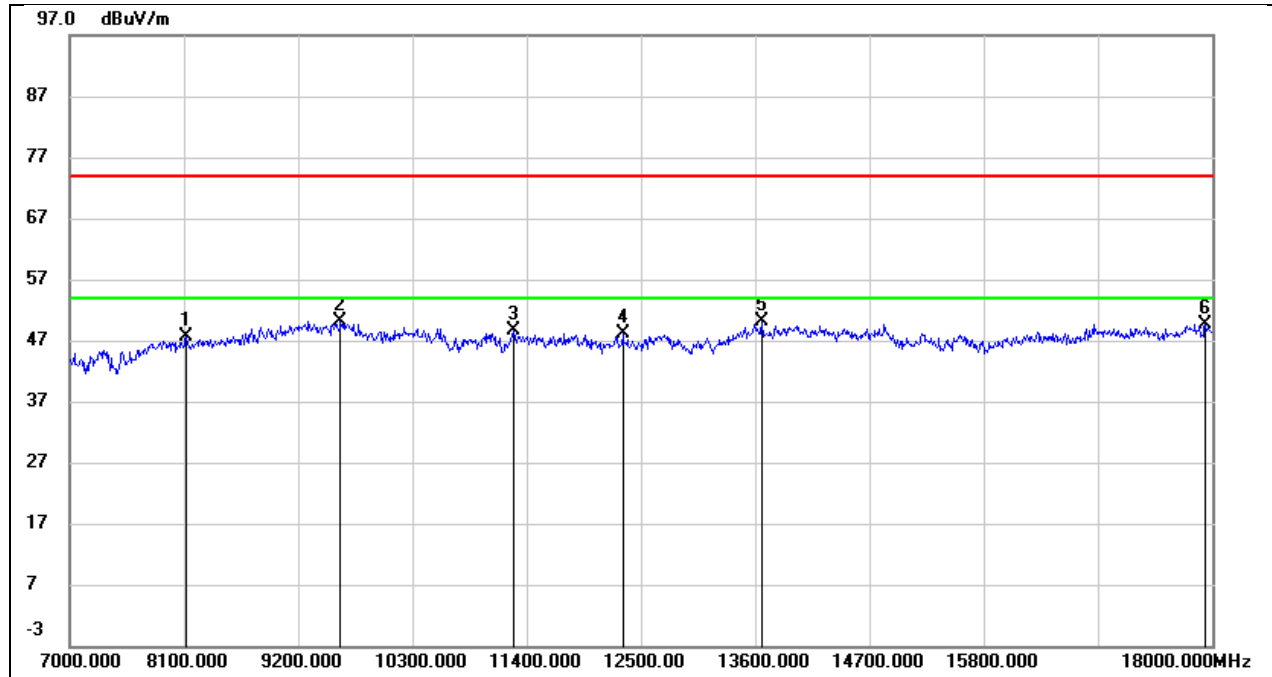


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.82	8.77	47.59	74.00	-26.41	peak
2	9607.000	36.80	13.33	50.13	74.00	-23.87	peak
3	11279.000	33.22	15.44	48.66	74.00	-25.34	peak
4	12324.000	30.11	17.90	48.01	74.00	-25.99	peak
5	13666.000	29.46	20.74	50.20	74.00	-23.80	peak
6	17934.000	22.63	27.00	49.63	74.00	-24.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

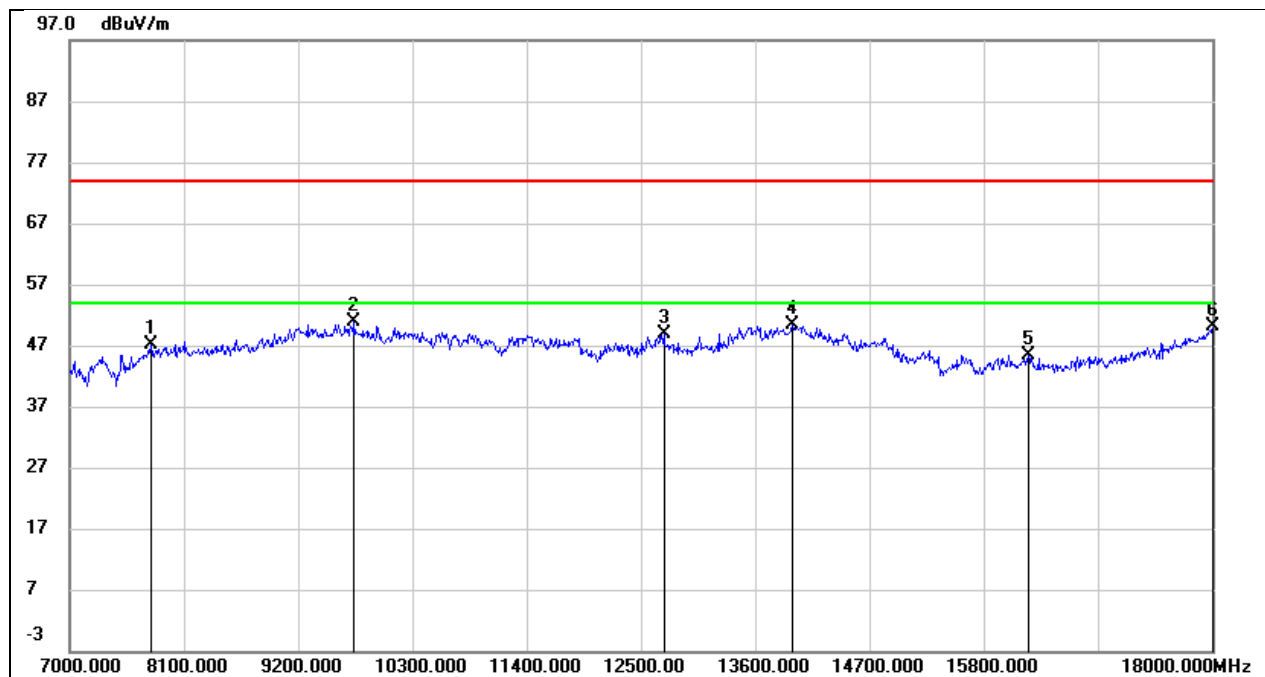


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.08	7.99	47.07	74.00	-26.93	peak
2	9739.000	37.26	13.70	50.96	74.00	-23.04	peak
3	12720.000	29.12	19.65	48.77	74.00	-25.23	peak
4	13963.000	26.87	23.46	50.33	74.00	-23.67	peak
5	16229.000	23.44	22.01	45.45	74.00	-28.55	peak
6	18000.000	20.63	29.61	50.24	74.00	-23.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

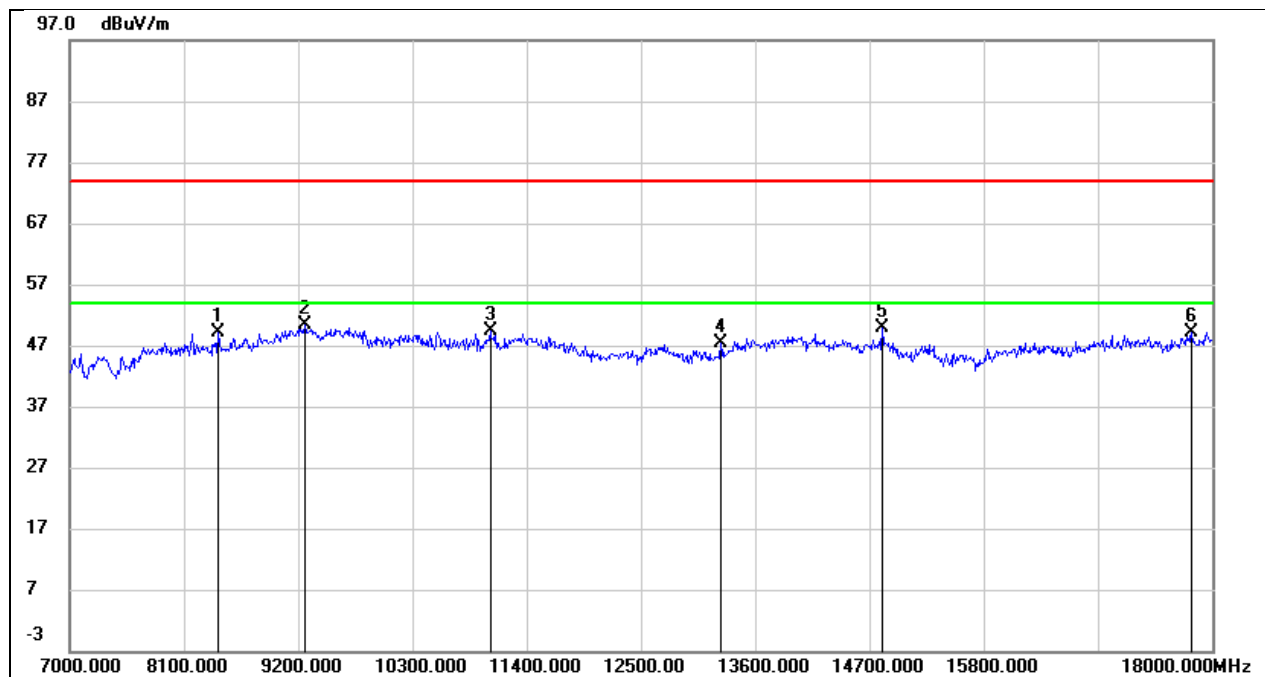


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8430.000	39.84	9.17	49.01	74.00	-24.99	peak
2	9266.000	38.35	11.96	50.31	74.00	-23.69	peak
3	11048.000	34.90	14.46	49.36	74.00	-24.64	peak
4	13270.000	27.58	19.69	47.27	74.00	-26.73	peak
5	14821.000	29.34	20.54	49.88	74.00	-24.12	peak
6	17802.000	23.03	26.18	49.21	74.00	-24.79	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

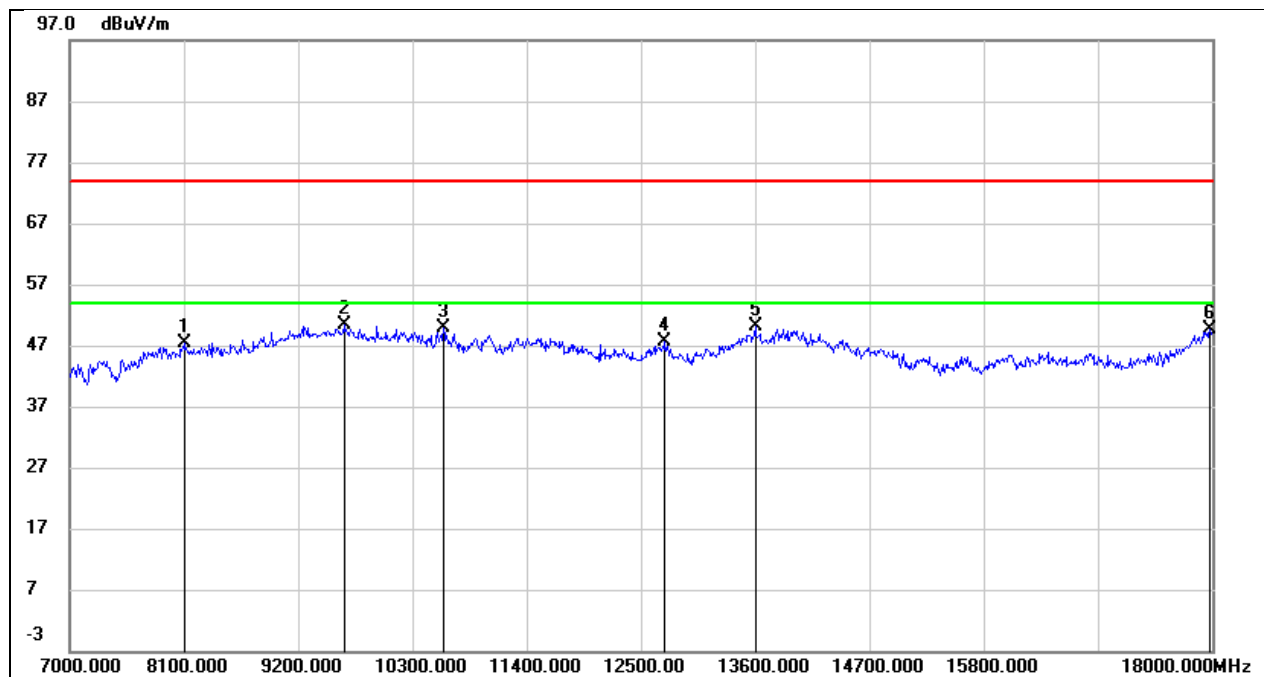


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.22	8.21	47.43	74.00	-26.57	peak
2	9640.000	36.86	13.53	50.39	74.00	-23.61	peak
3	10597.000	36.02	13.82	49.84	74.00	-24.16	peak
4	12731.000	27.86	19.70	47.56	74.00	-26.44	peak
5	13600.000	27.81	22.22	50.03	74.00	-23.97	peak
6	17978.000	20.27	29.38	49.65	74.00	-24.35	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

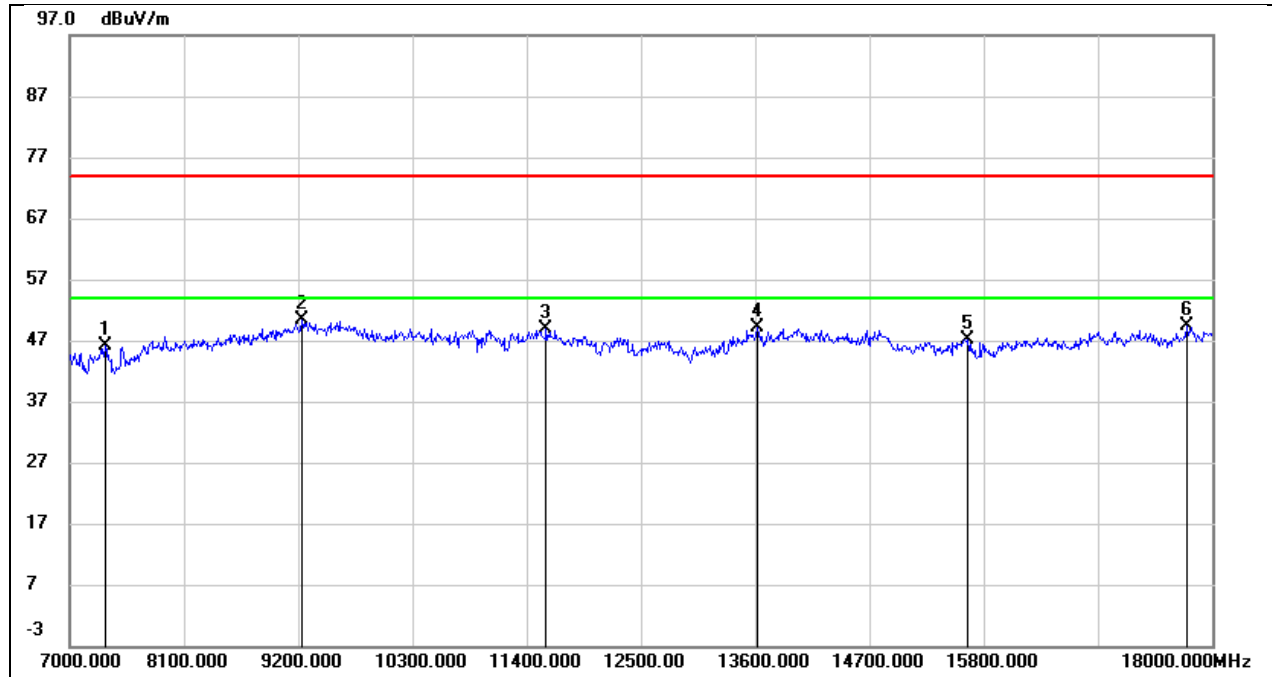


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.77	8.30	46.07	74.00	-27.93	peak
2	9233.000	38.45	11.88	50.33	74.00	-23.67	peak
3	11587.000	32.24	16.64	48.88	74.00	-25.12	peak
4	13622.000	28.48	20.60	49.08	74.00	-24.92	peak
5	15646.000	26.06	21.05	47.11	74.00	-26.89	peak
6	17758.000	23.33	25.94	49.27	74.00	-24.73	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

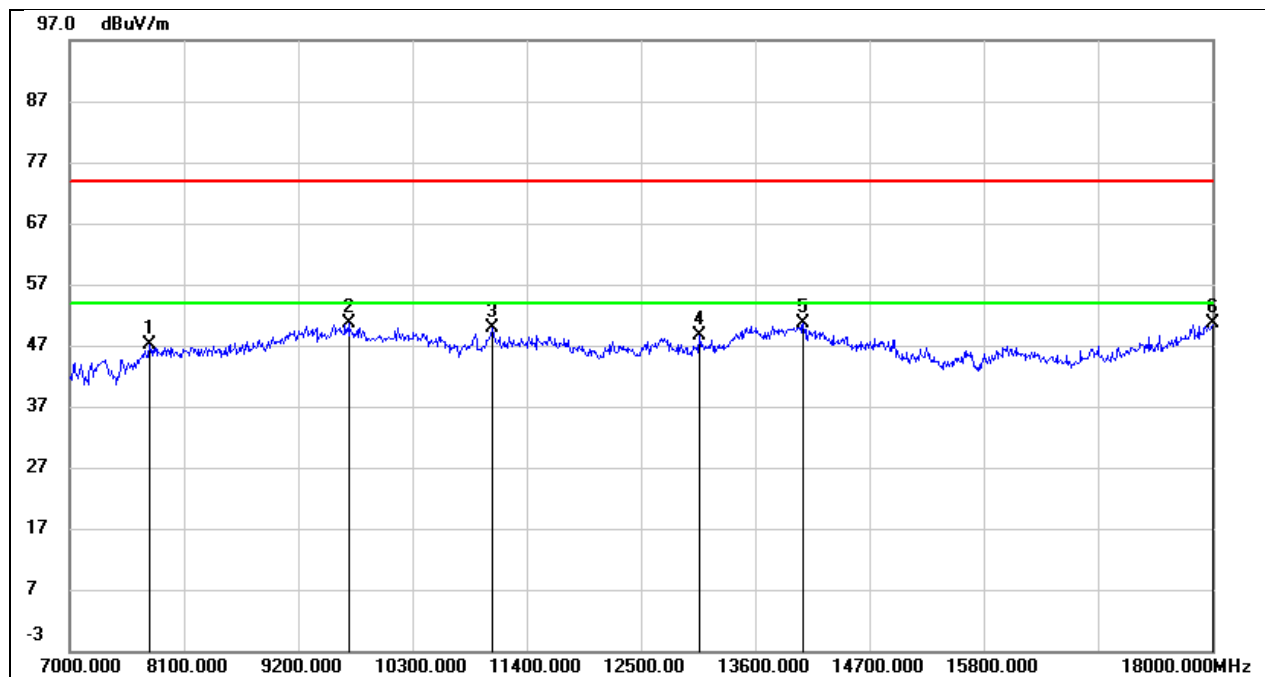


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	39.07	7.99	47.06	74.00	-26.94	peak
2	9684.000	37.10	13.60	50.70	74.00	-23.30	peak
3	11070.000	34.46	15.44	49.90	74.00	-24.10	peak
4	13061.000	28.27	20.31	48.58	74.00	-25.42	peak
5	14062.000	27.35	23.35	50.70	74.00	-23.30	peak
6	18000.000	20.95	29.61	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

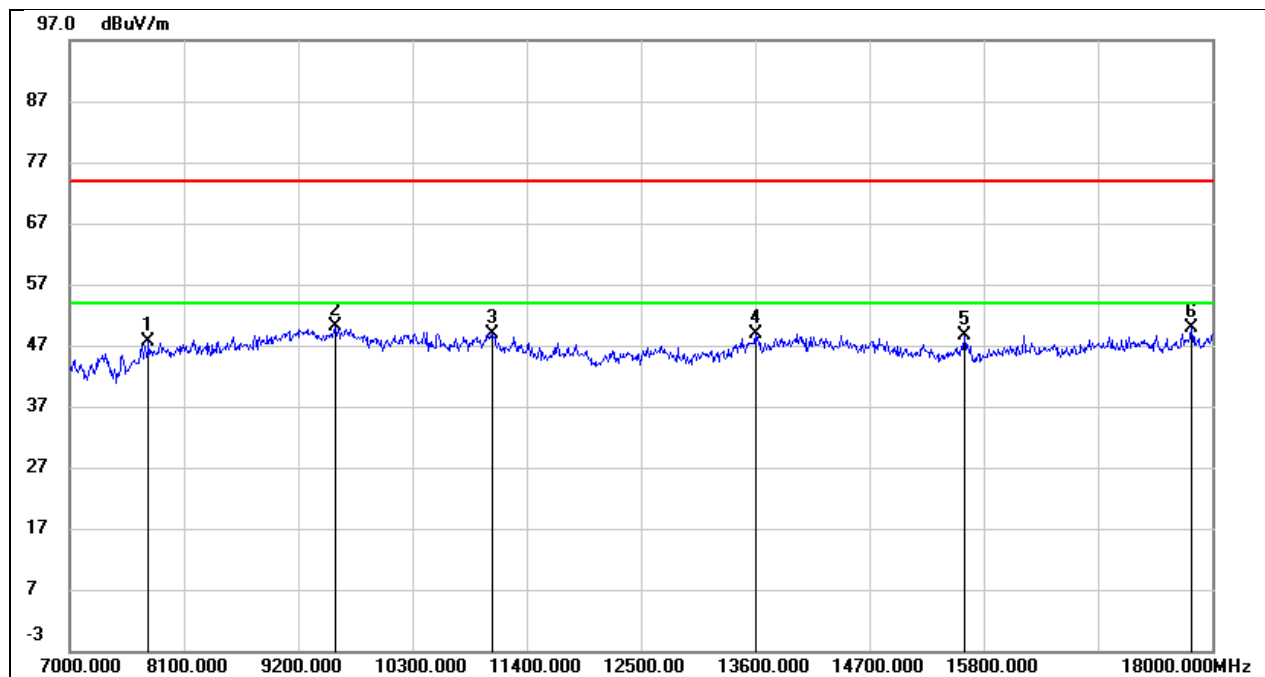


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.07	8.47	47.54	74.00	-26.46	peak
2	9552.000	36.92	13.10	50.02	74.00	-23.98	peak
3	11070.000	34.45	14.55	49.00	74.00	-25.00	peak
4	13600.000	28.43	20.54	48.97	74.00	-25.03	peak
5	15613.000	27.72	20.93	48.65	74.00	-25.35	peak
6	17802.000	23.69	26.18	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

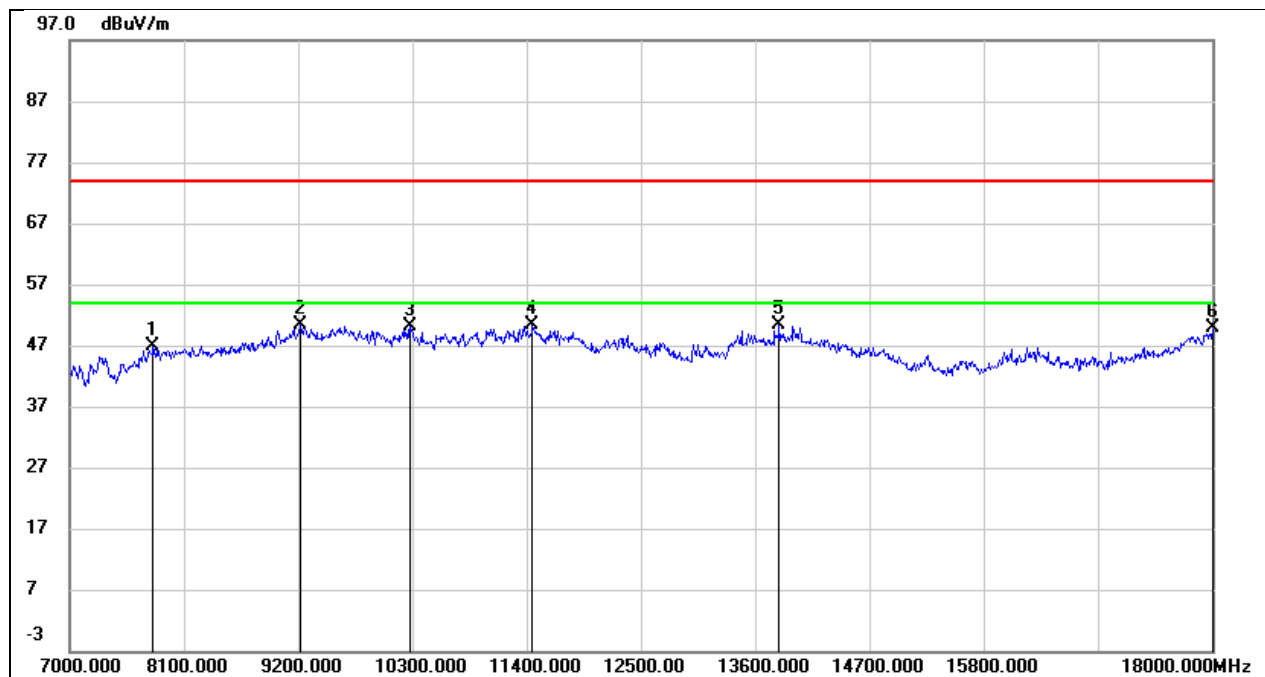


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	38.79	8.01	46.80	74.00	-27.20	peak
2	9222.000	38.78	11.64	50.42	74.00	-23.58	peak
3	10278.000	36.79	13.25	50.04	74.00	-23.96	peak
4	11455.000	32.71	17.62	50.33	74.00	-23.67	peak
5	13831.000	27.57	22.93	50.50	74.00	-23.50	peak
6	18000.000	20.15	29.61	49.76	74.00	-24.24	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

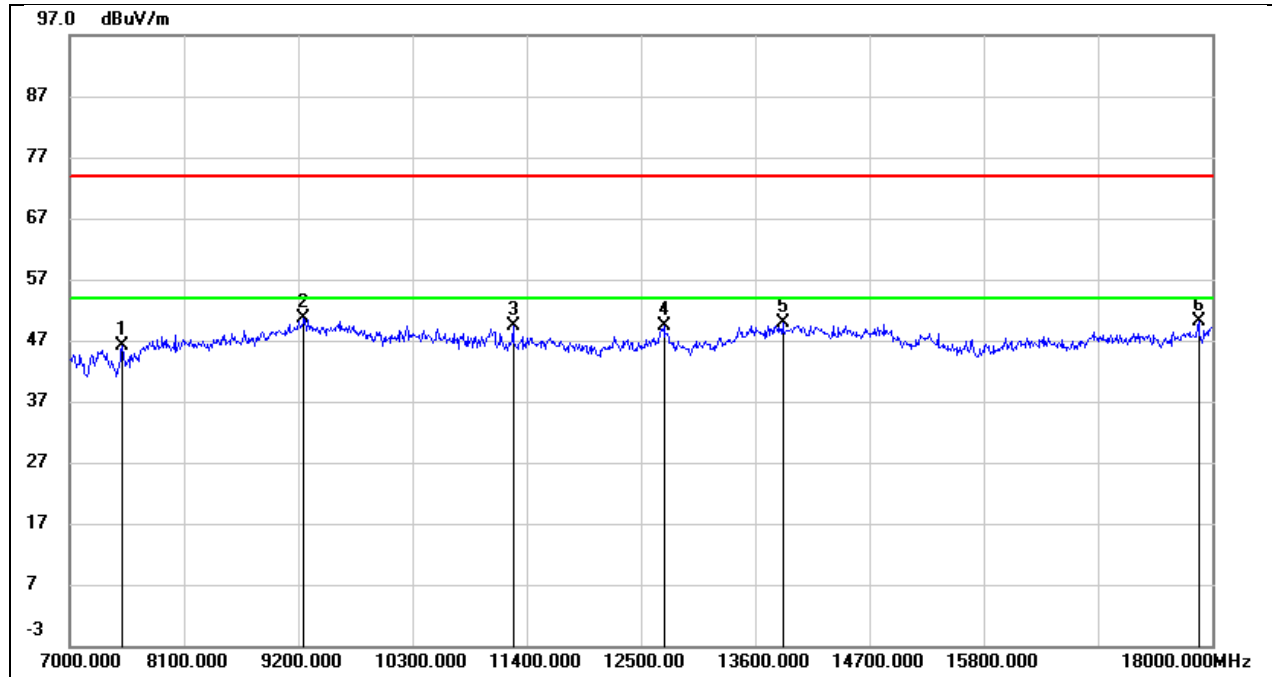


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.69	8.34	46.03	74.00	-27.97	peak
2	9255.000	38.61	11.93	50.54	74.00	-23.46	peak
3	11268.000	34.11	15.39	49.50	74.00	-24.50	peak
4	12720.000	30.69	18.62	49.31	74.00	-24.69	peak
5	13864.000	28.52	21.43	49.95	74.00	-24.05	peak
6	17868.000	23.43	26.59	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

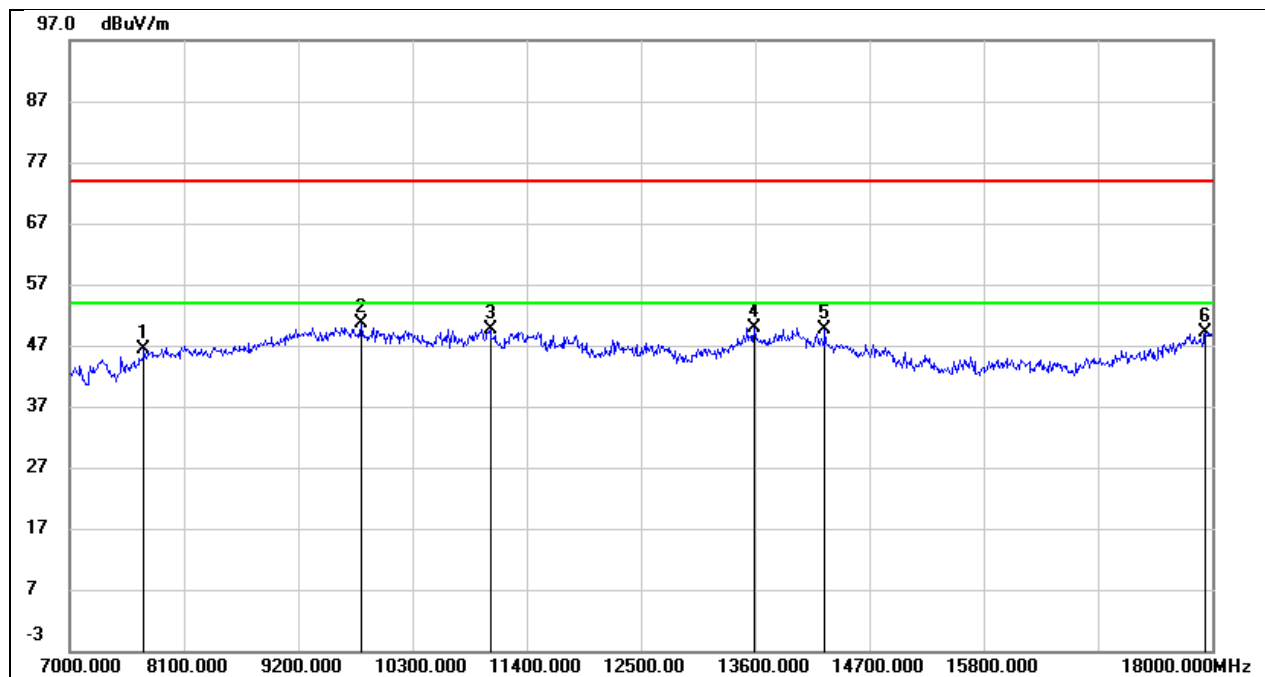


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.35	7.95	46.30	74.00	-27.70	peak
2	9805.000	36.79	13.80	50.59	74.00	-23.41	peak
3	11048.000	34.34	15.33	49.67	74.00	-24.33	peak
4	13589.000	27.73	22.20	49.93	74.00	-24.07	peak
5	14271.000	27.20	22.36	49.56	74.00	-24.44	peak
6	17934.000	20.14	28.91	49.05	74.00	-24.95	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

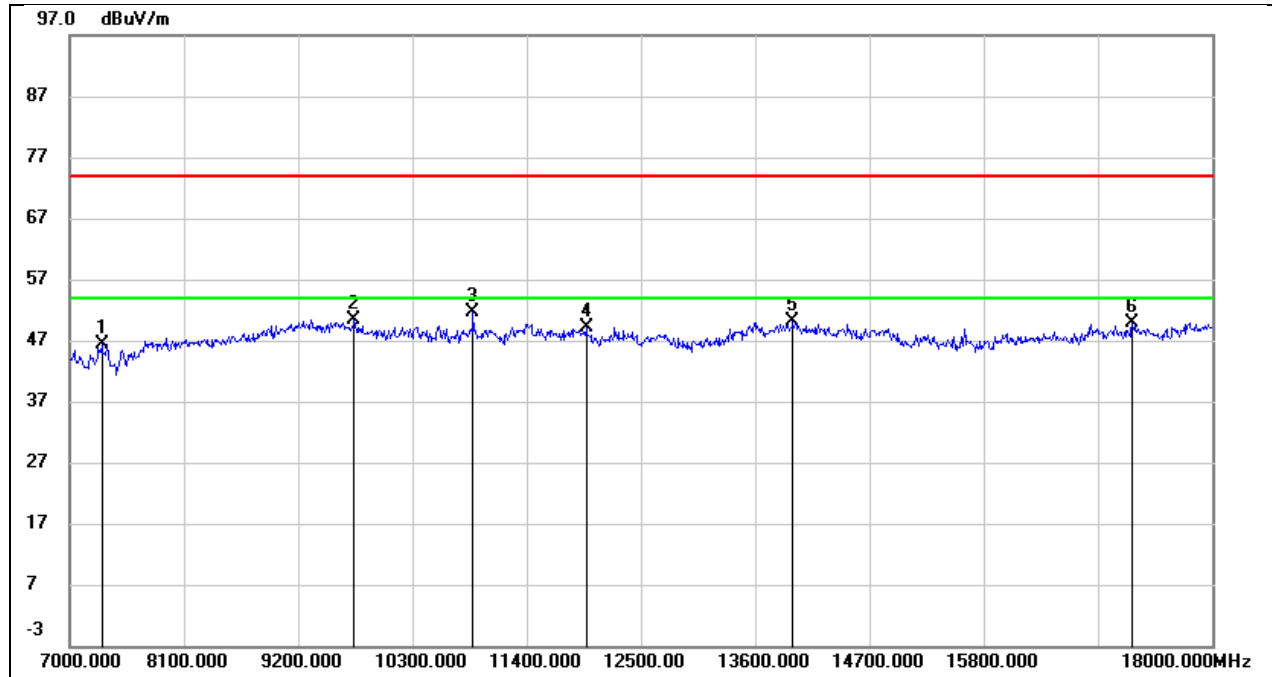


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.08	8.29	46.37	74.00	-27.63	peak
2	9739.000	37.12	13.36	50.48	74.00	-23.52	peak
3	10883.000	37.52	14.02	51.54	74.00	-22.46	peak
4	11972.000	31.95	17.30	49.25	74.00	-24.75	peak
5	13963.000	28.38	21.85	50.23	74.00	-23.77	peak
6	17230.000	25.02	24.93	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

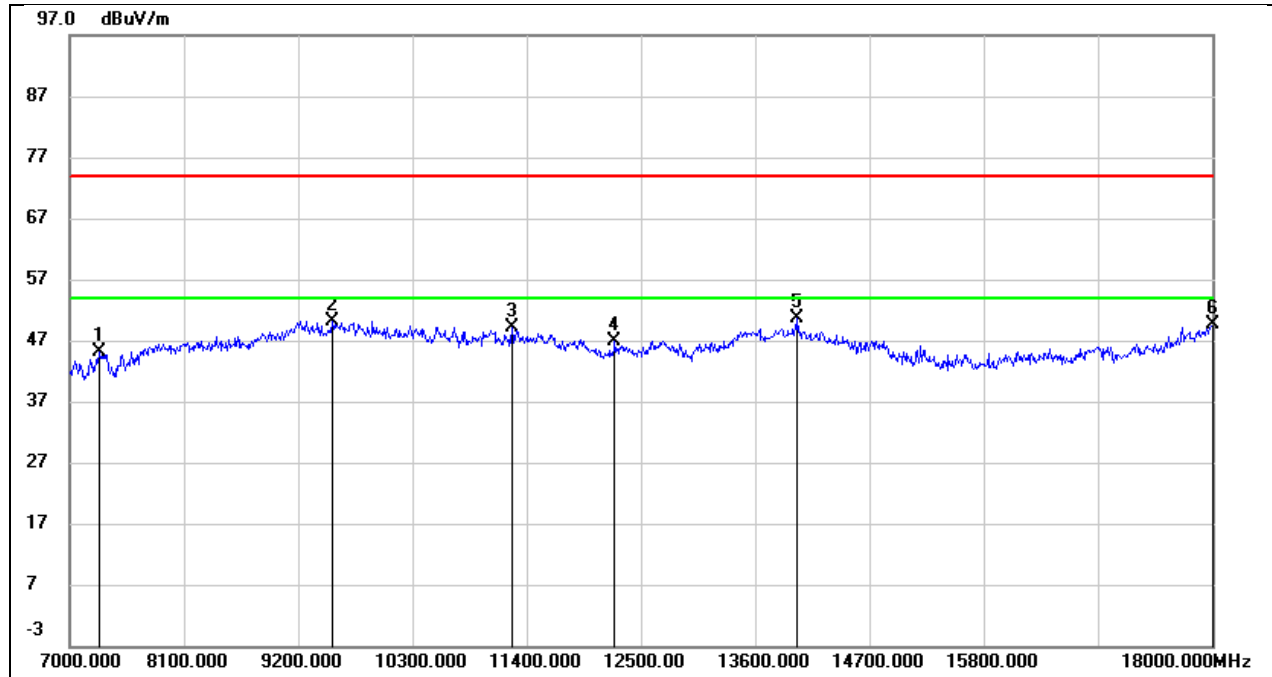


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.39	7.62	45.01	74.00	-28.99	peak
2	9530.000	37.15	13.04	50.19	74.00	-23.81	peak
3	11257.000	32.52	16.51	49.03	74.00	-24.97	peak
4	12247.000	28.17	18.77	46.94	74.00	-27.06	peak
5	14007.000	26.93	23.59	50.52	74.00	-23.48	peak
6	18000.000	20.05	29.61	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

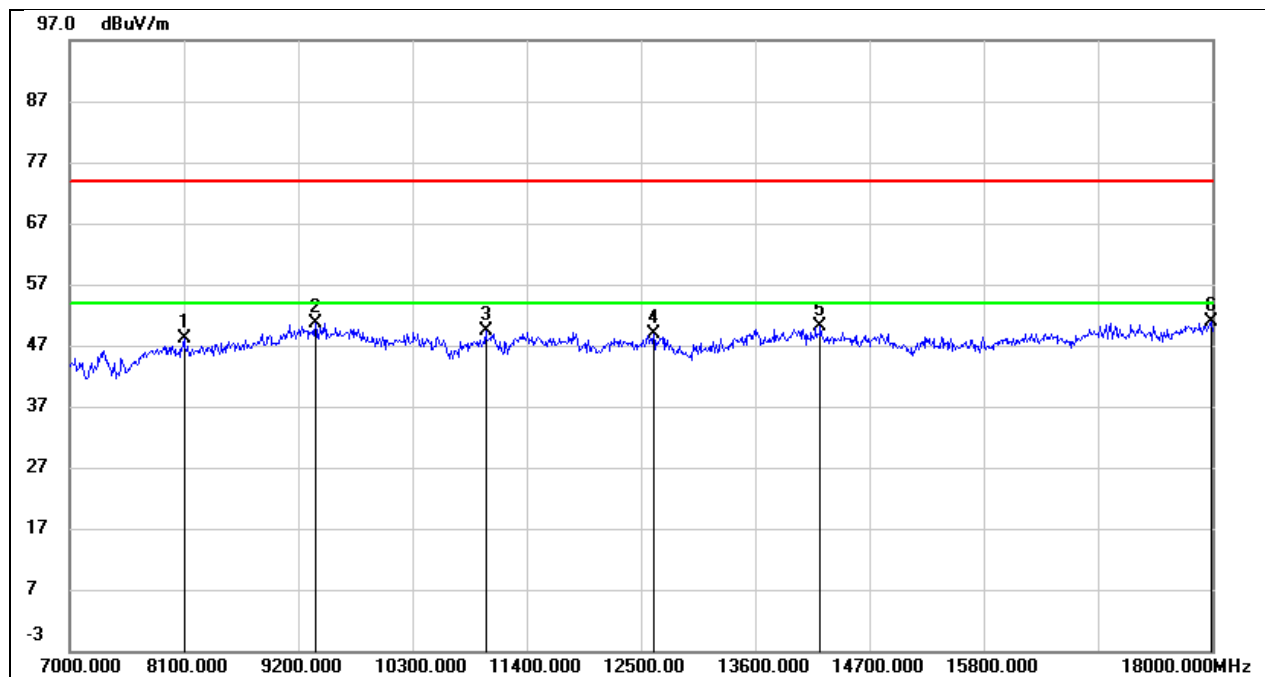


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.37	8.73	48.10	74.00	-25.90	peak
2	9365.000	38.54	12.20	50.74	74.00	-23.26	peak
3	11004.000	35.00	14.27	49.27	74.00	-24.73	peak
4	12621.000	30.62	18.27	48.89	74.00	-25.11	peak
5	14227.000	28.42	21.61	50.03	74.00	-23.97	peak
6	17989.000	23.46	27.33	50.79	74.00	-23.21	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

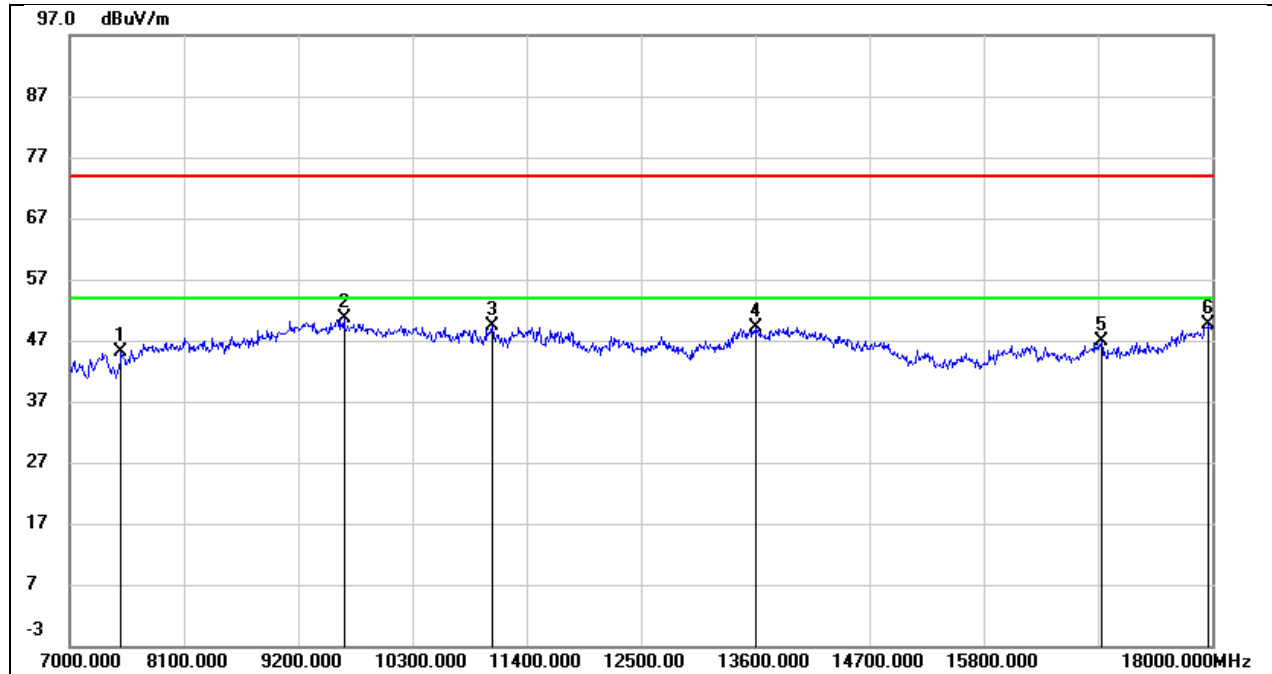


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.30	7.84	45.14	74.00	-28.86	peak
2	9640.000	37.17	13.53	50.70	74.00	-23.30	peak
3	11070.000	33.90	15.44	49.34	74.00	-24.66	peak
4	13611.000	26.96	22.25	49.21	74.00	-24.79	peak
5	16933.000	24.25	22.60	46.85	74.00	-27.15	peak
6	17967.000	20.33	29.26	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

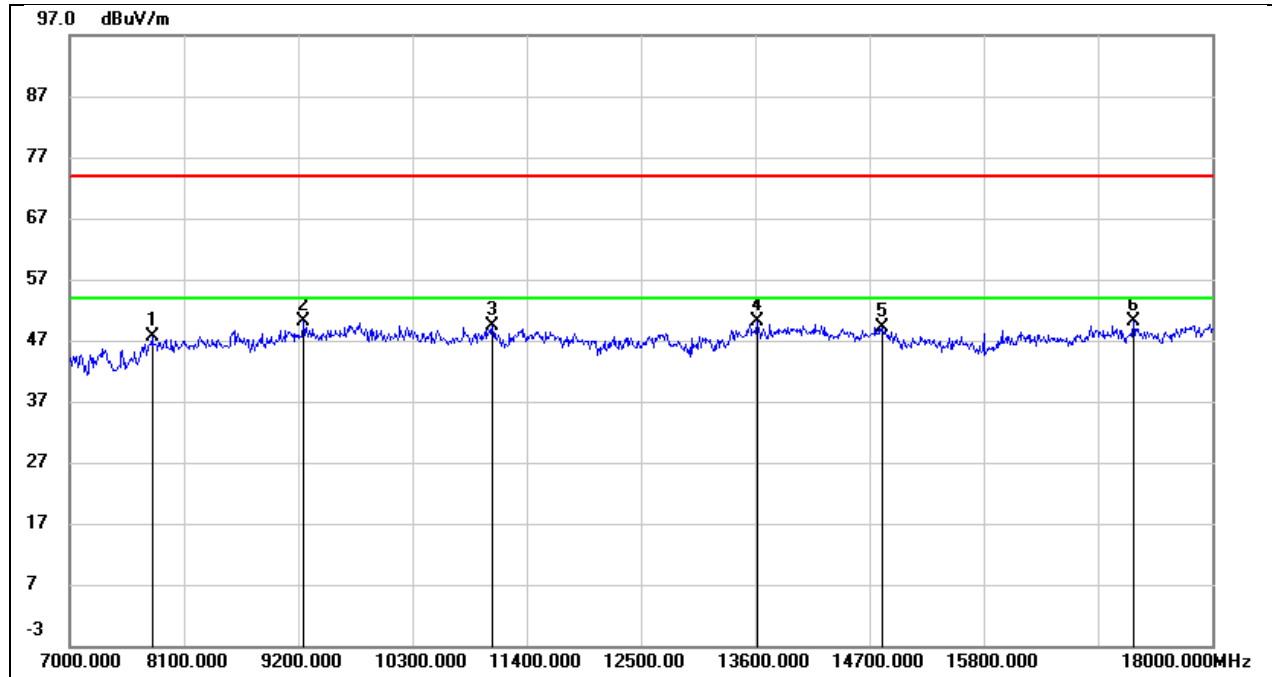


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	39.18	8.51	47.69	74.00	-26.31	peak
2	9255.000	38.25	11.93	50.18	74.00	-23.82	peak
3	11070.000	34.93	14.55	49.48	74.00	-24.52	peak
4	13622.000	29.47	20.60	50.07	74.00	-23.93	peak
5	14821.000	28.63	20.54	49.17	74.00	-24.83	peak
6	17241.000	25.07	24.94	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

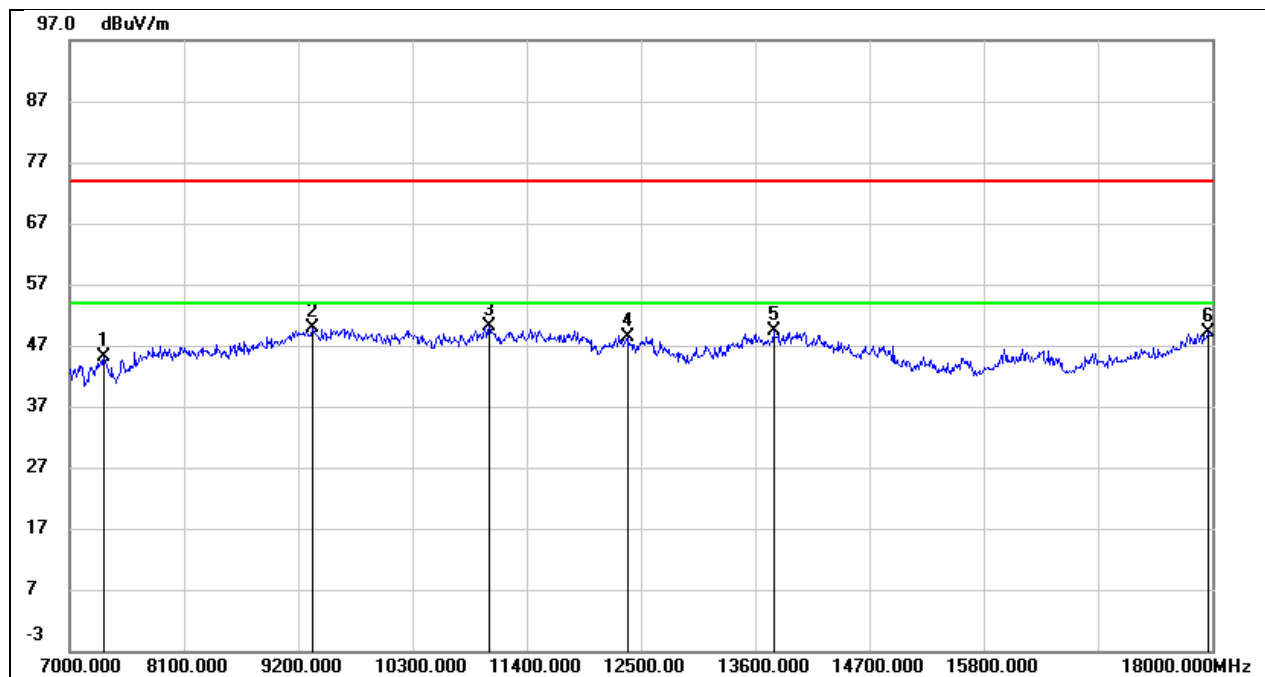


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.54	7.66	45.20	74.00	-28.80	peak
2	9343.000	37.89	12.03	49.92	74.00	-24.08	peak
3	11037.000	34.92	15.27	50.19	74.00	-23.81	peak
4	12368.000	29.53	18.94	48.47	74.00	-25.53	peak
5	13776.000	26.75	22.73	49.48	74.00	-24.52	peak
6	17956.000	20.05	29.14	49.19	74.00	-24.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

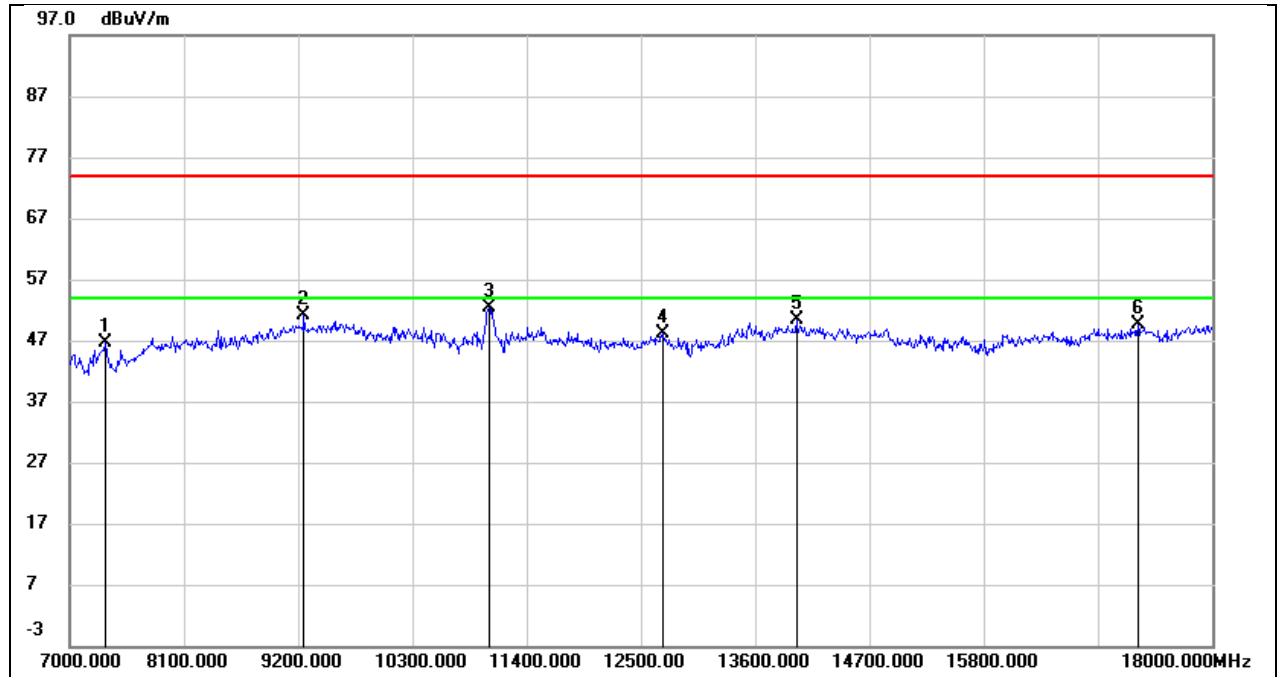


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.45	8.30	46.75	74.00	-27.25	peak
2	9255.000	39.09	11.93	51.02	74.00	-22.98	peak
3	11037.000	37.91	14.42	52.33	74.00	-21.67	peak
4	12709.000	29.43	18.58	48.01	74.00	-25.99	peak
5	13996.000	28.34	21.99	50.33	74.00	-23.67	peak
6	17285.000	24.76	24.97	49.73	74.00	-24.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

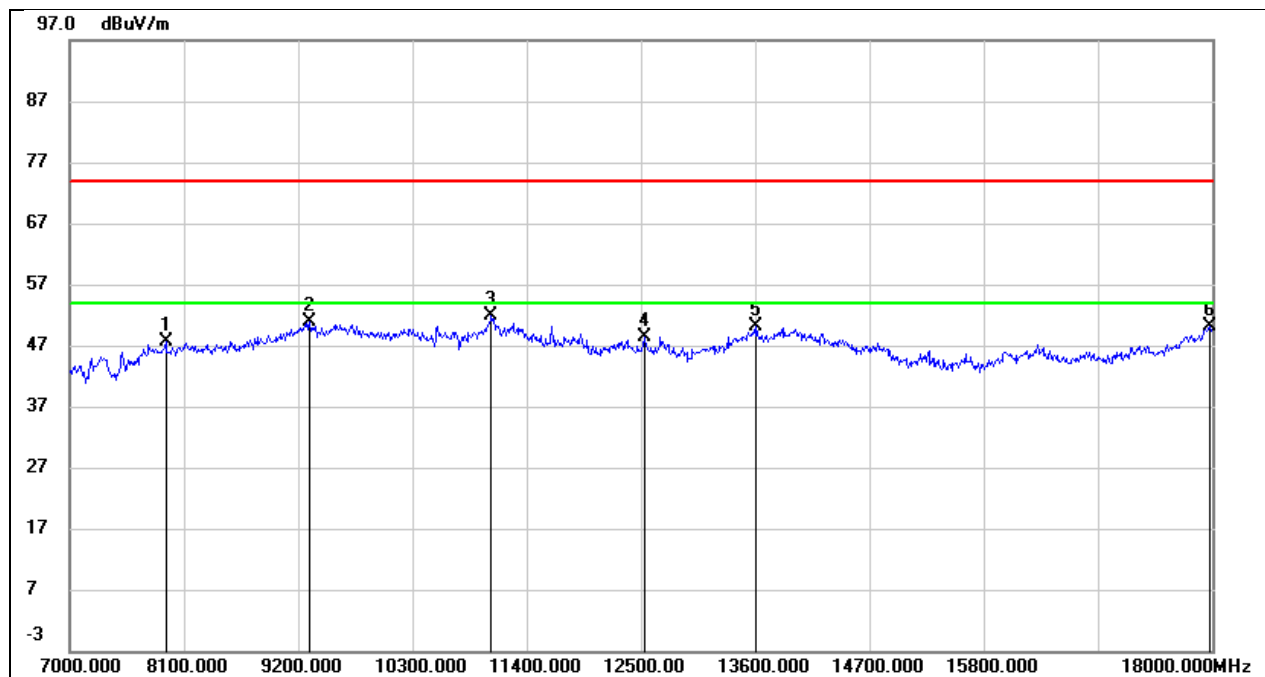


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7924.000	39.68	8.05	47.73	74.00	-26.27	peak
2	9310.000	38.85	11.92	50.77	74.00	-23.23	peak
3	11059.000	36.41	15.39	51.80	74.00	-22.20	peak
4	12533.000	29.35	19.05	48.40	74.00	-25.60	peak
5	13611.000	27.83	22.25	50.08	74.00	-23.92	peak
6	17978.000	20.72	29.38	50.10	74.00	-23.90	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

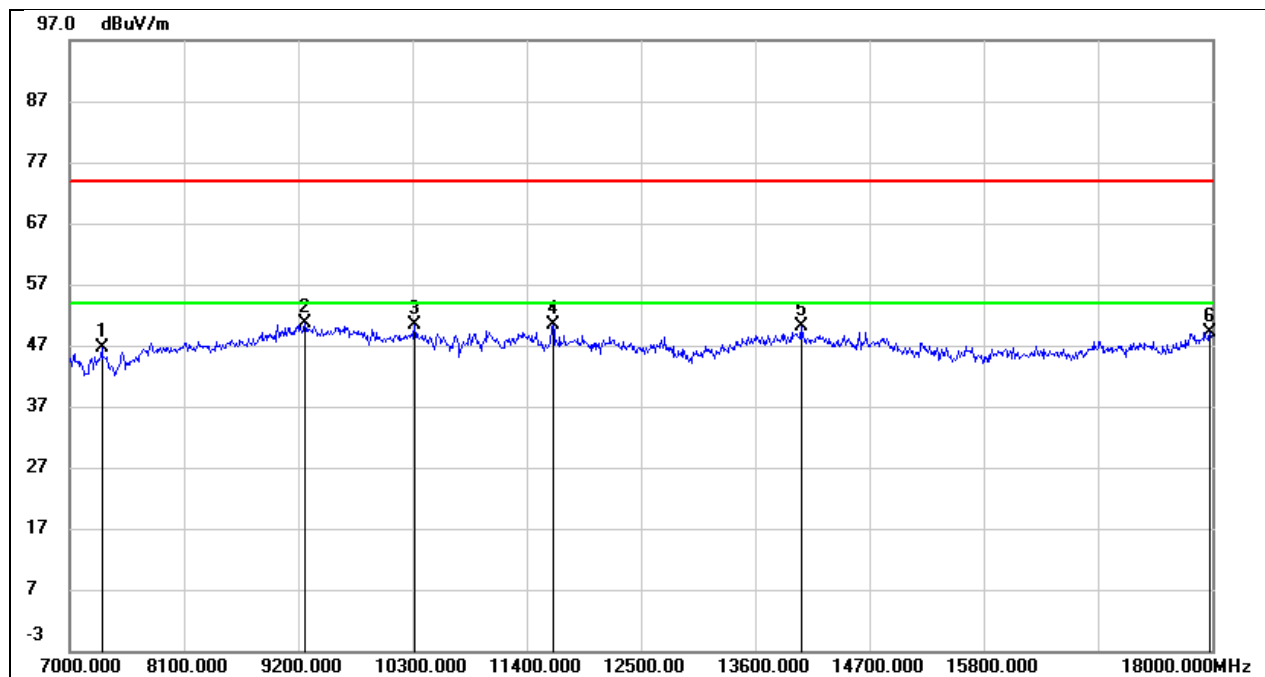


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.27	8.29	46.56	74.00	-27.44	peak
2	9266.000	38.59	11.96	50.55	74.00	-23.45	peak
3	10322.000	37.43	12.91	50.34	74.00	-23.66	peak
4	11653.000	33.59	16.68	50.27	74.00	-23.73	peak
5	14040.000	28.12	21.95	50.07	74.00	-23.93	peak
6	17978.000	21.81	27.28	49.09	74.00	-24.91	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

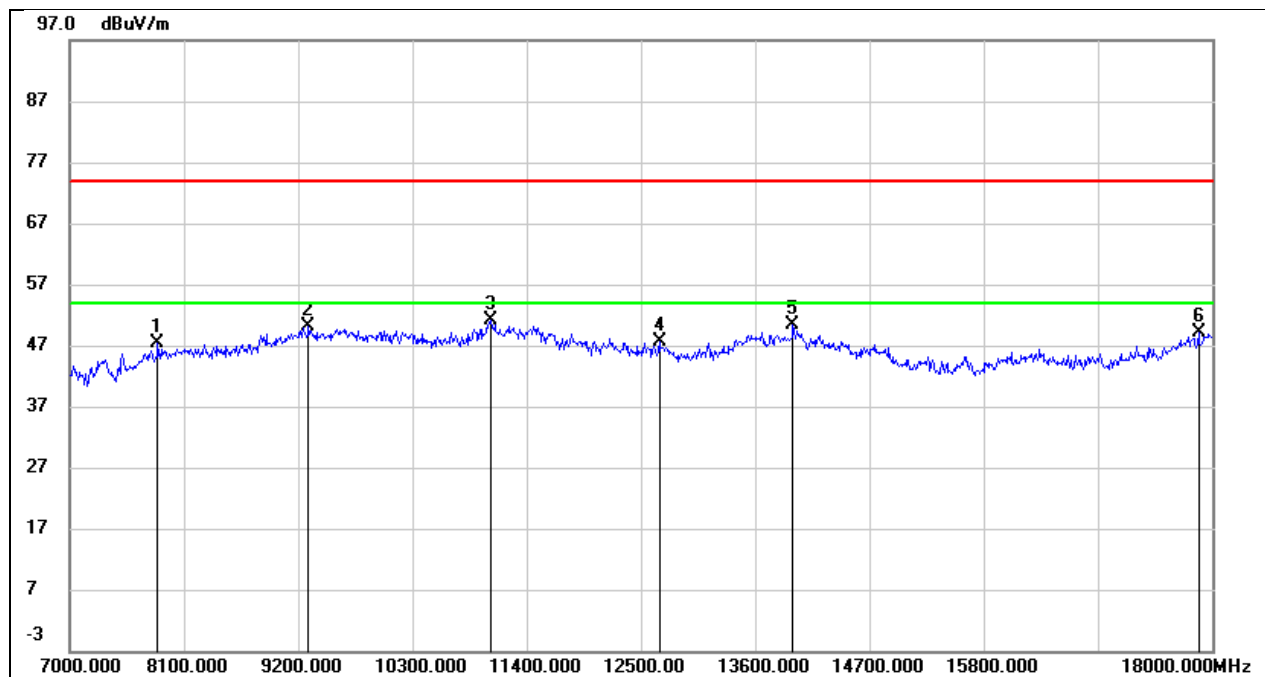


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	39.39	8.03	47.42	74.00	-26.58	peak
2	9299.000	38.25	11.88	50.13	74.00	-23.87	peak
3	11059.000	35.75	15.39	51.14	74.00	-22.86	peak
4	12676.000	28.14	19.48	47.62	74.00	-26.38	peak
5	13963.000	27.01	23.46	50.47	74.00	-23.53	peak
6	17868.000	20.88	28.21	49.09	74.00	-24.91	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

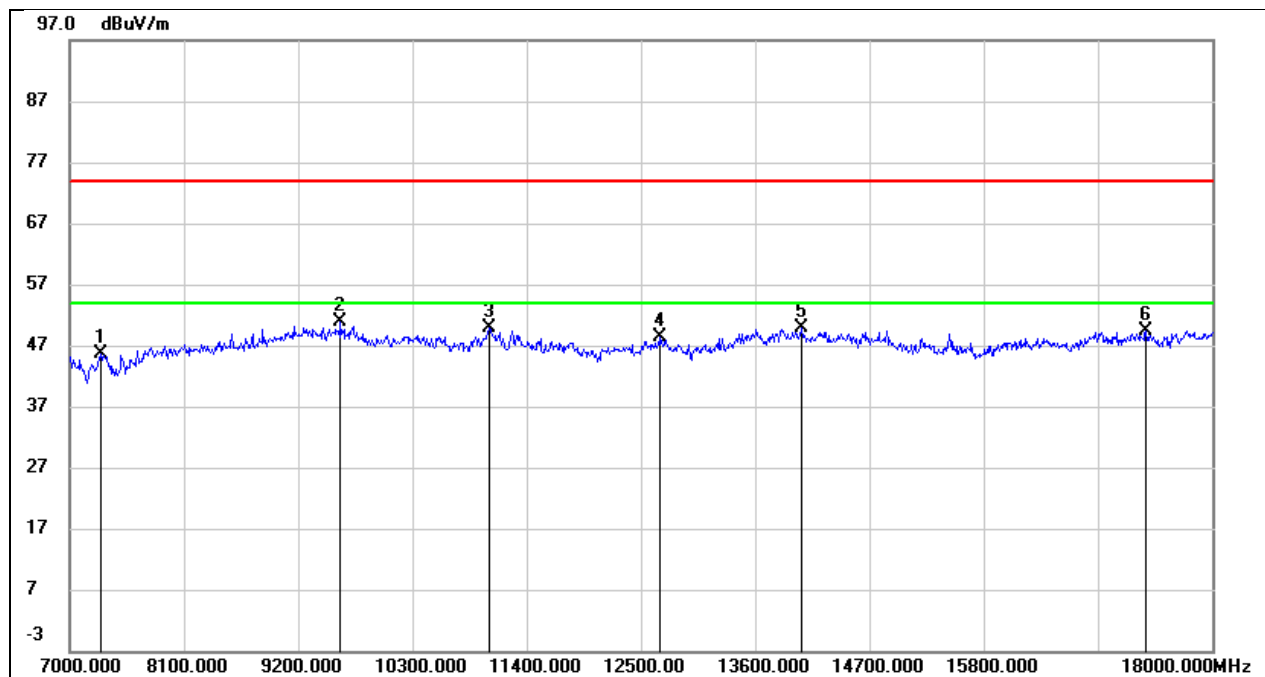


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.39	8.30	45.69	74.00	-28.31	peak
2	9607.000	37.66	13.33	50.99	74.00	-23.01	peak
3	11037.000	35.38	14.42	49.80	74.00	-24.20	peak
4	12676.000	29.85	18.47	48.32	74.00	-25.68	peak
5	14051.000	27.95	21.93	49.88	74.00	-24.12	peak
6	17362.000	24.40	25.03	49.43	74.00	-24.57	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

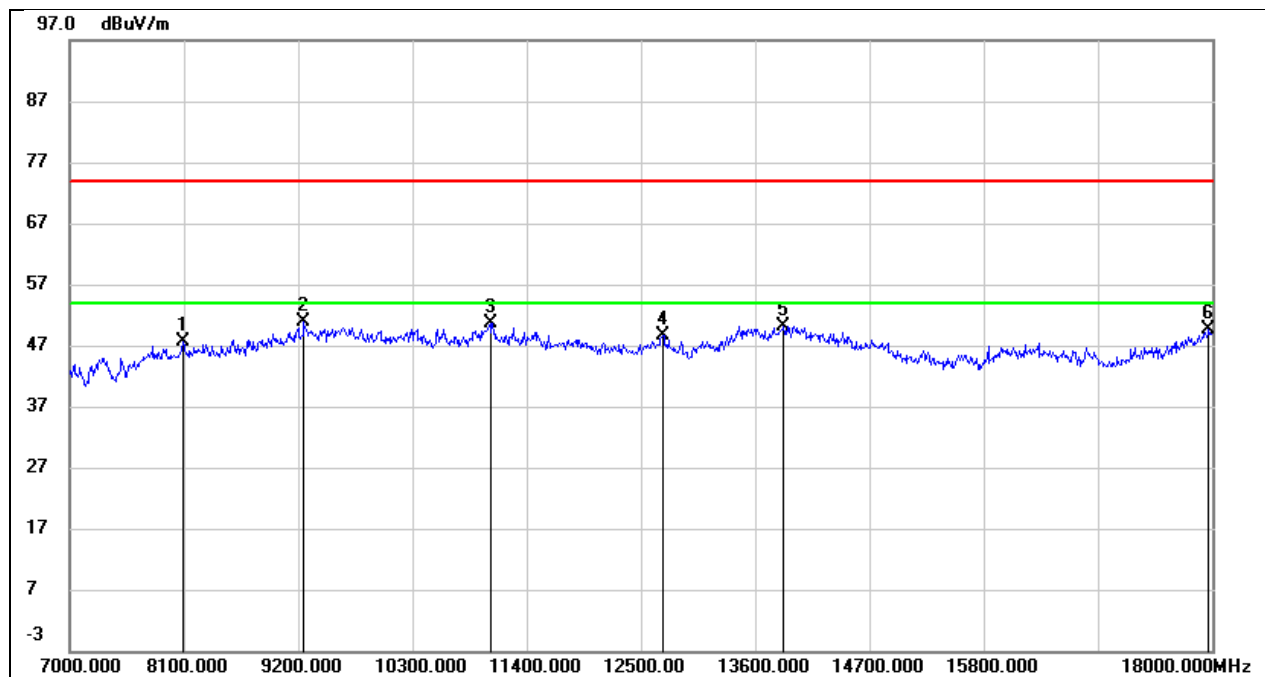


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.40	8.19	47.59	74.00	-26.41	peak
2	9255.000	39.10	11.74	50.84	74.00	-23.16	peak
3	11048.000	35.33	15.33	50.66	74.00	-23.34	peak
4	12709.000	29.15	19.60	48.75	74.00	-25.25	peak
5	13875.000	27.08	23.11	50.19	74.00	-23.81	peak
6	17967.000	20.45	29.26	49.71	74.00	-24.29	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

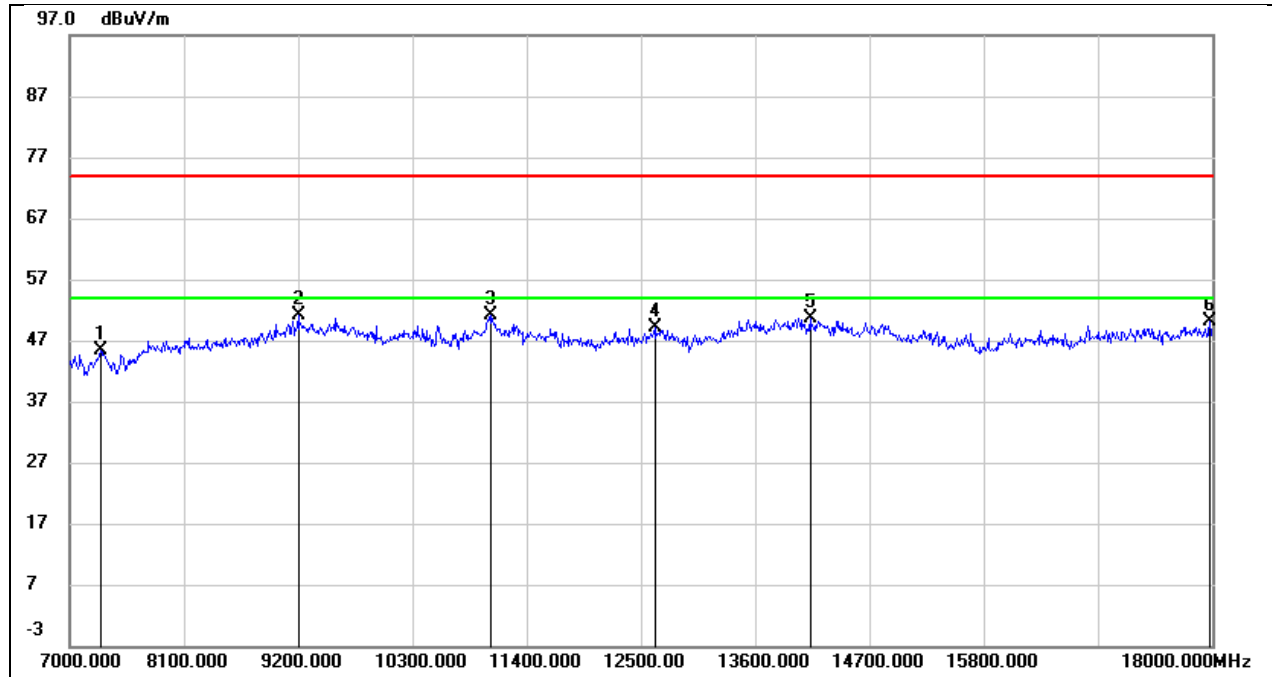


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.15	8.30	45.45	74.00	-28.55	peak
2	9200.000	39.27	11.80	51.07	74.00	-22.93	peak
3	11059.000	36.74	14.51	51.25	74.00	-22.75	peak
4	12632.000	30.73	18.32	49.05	74.00	-24.95	peak
5	14128.000	28.85	21.82	50.67	74.00	-23.33	peak
6	17978.000	22.84	27.28	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

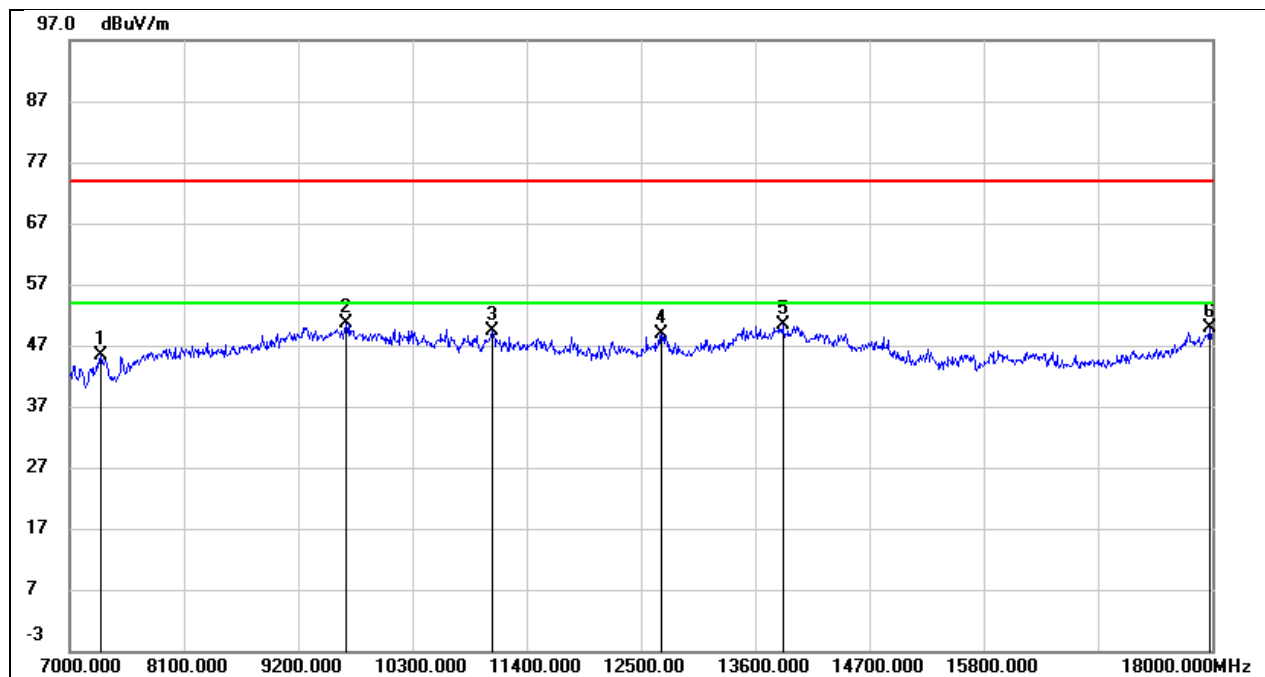


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.86	7.64	45.50	74.00	-28.50	peak
2	9662.000	37.13	13.56	50.69	74.00	-23.31	peak
3	11070.000	34.05	15.44	49.49	74.00	-24.51	peak
4	12698.000	29.23	19.56	48.79	74.00	-25.21	peak
5	13864.000	27.21	23.06	50.27	74.00	-23.73	peak
6	17978.000	20.47	29.38	49.85	74.00	-24.15	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

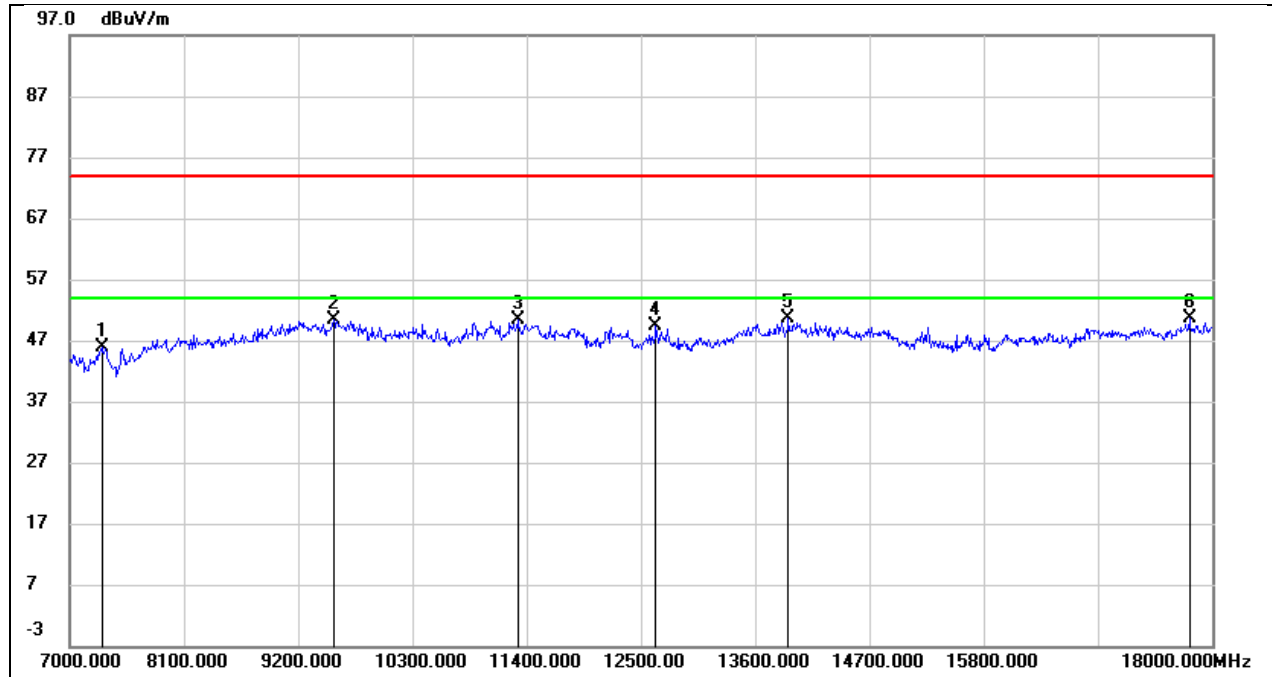


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.53	8.29	45.82	74.00	-28.18	peak
2	9541.000	37.42	13.04	50.46	74.00	-23.54	peak
3	11312.000	34.75	15.59	50.34	74.00	-23.66	peak
4	12643.000	30.99	18.35	49.34	74.00	-24.66	peak
5	13919.000	28.91	21.66	50.57	74.00	-23.43	peak
6	17780.000	24.50	26.06	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

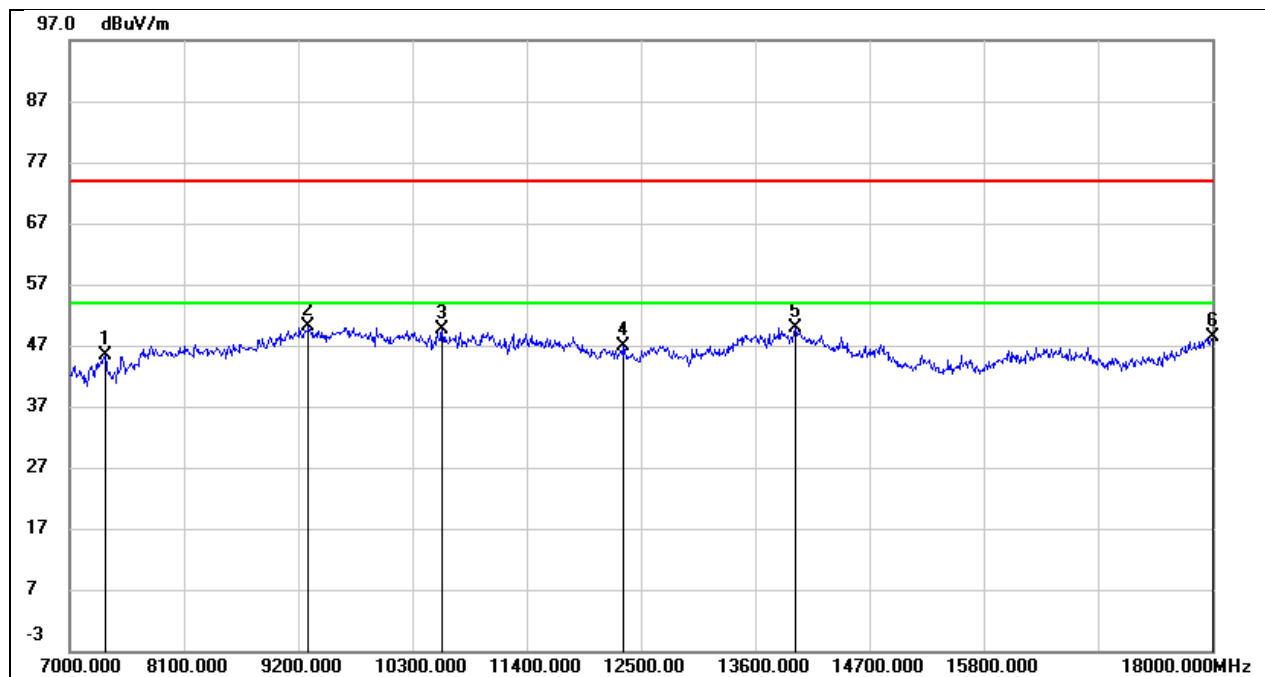


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.79	7.68	45.47	74.00	-28.53	peak
2	9299.000	38.33	11.88	50.21	74.00	-23.79	peak
3	10586.000	35.85	13.78	49.63	74.00	-24.37	peak
4	12324.000	28.07	18.88	46.95	74.00	-27.05	peak
5	13985.000	26.37	23.55	49.92	74.00	-24.08	peak
6	18000.000	18.73	29.61	48.34	74.00	-25.66	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

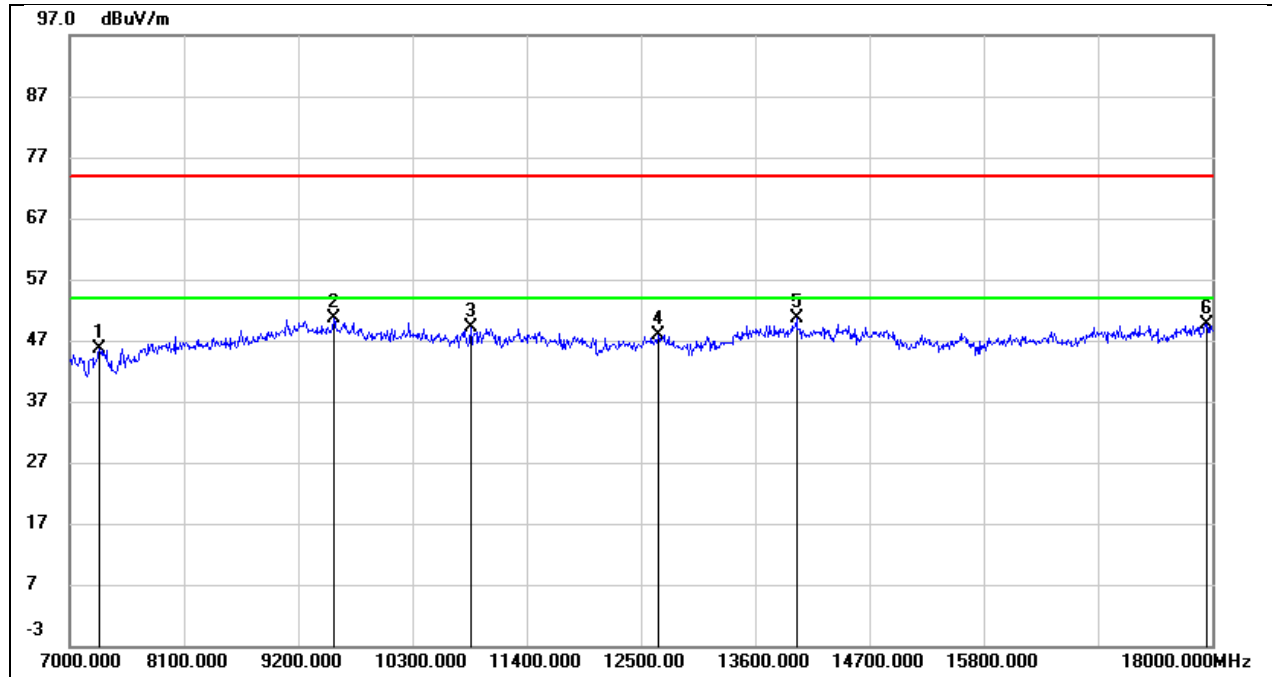


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.33	8.29	45.62	74.00	-28.38	peak
2	9541.000	37.57	13.04	50.61	74.00	-23.39	peak
3	10861.000	35.16	13.98	49.14	74.00	-24.86	peak
4	12665.000	29.48	18.42	47.90	74.00	-26.10	peak
5	13996.000	28.73	21.99	50.72	74.00	-23.28	peak
6	17945.000	22.47	27.07	49.54	74.00	-24.46	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

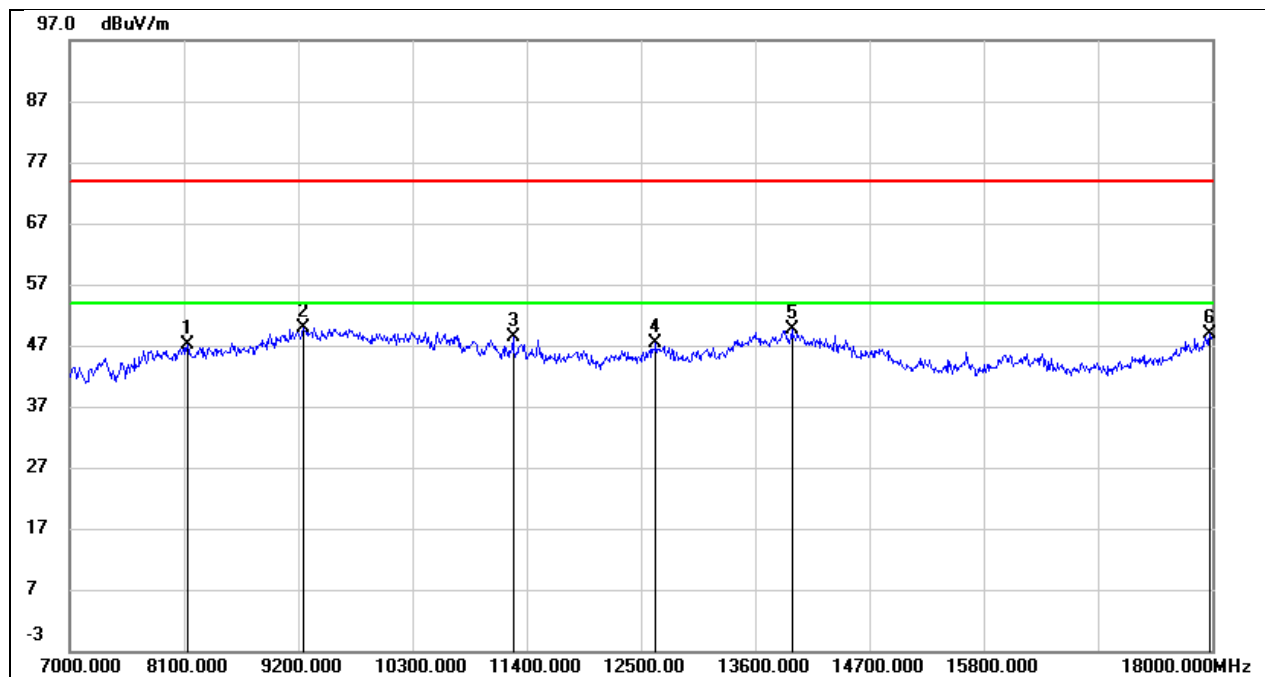


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8133.000	38.75	8.26	47.01	74.00	-26.99	peak
2	9255.000	38.24	11.74	49.98	74.00	-24.02	peak
3	11268.000	31.84	16.57	48.41	74.00	-25.59	peak
4	12643.000	27.92	19.34	47.26	74.00	-26.74	peak
5	13952.000	26.27	23.42	49.69	74.00	-24.31	peak
6	17978.000	19.50	29.38	48.88	74.00	-25.12	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

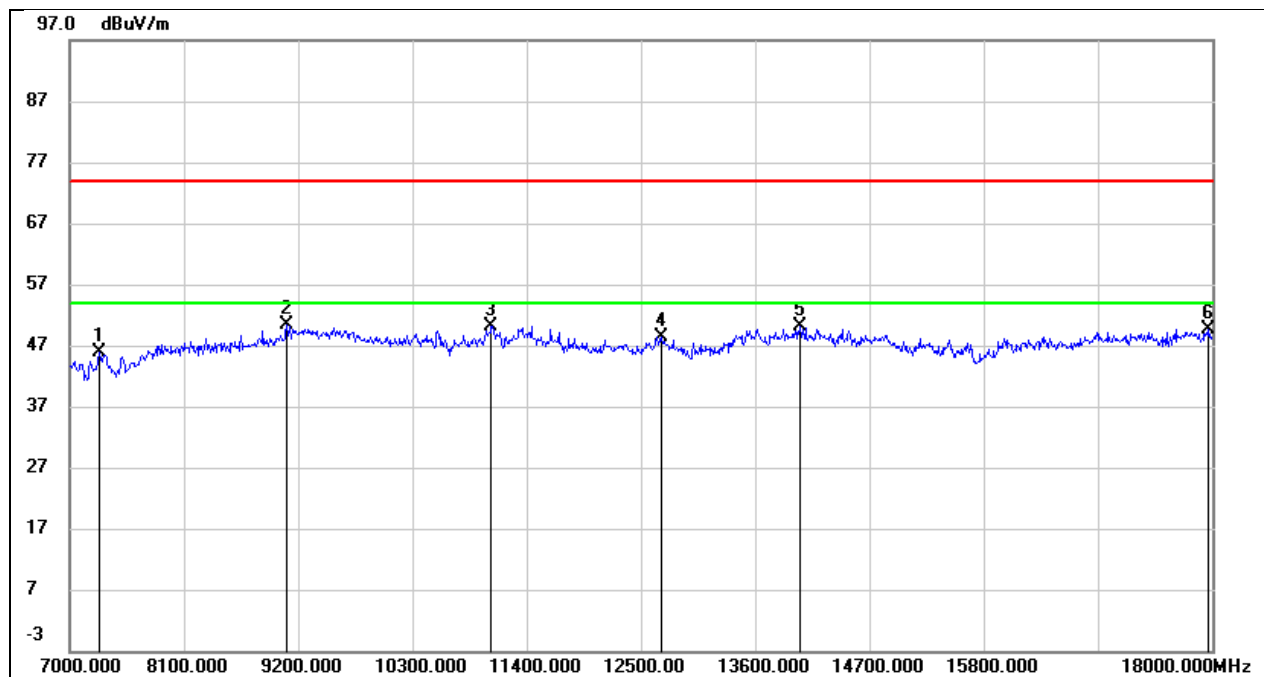


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.51	8.29	45.80	74.00	-28.20	peak
2	9090.000	39.00	11.39	50.39	74.00	-23.61	peak
3	11059.000	35.72	14.51	50.23	74.00	-23.77	peak
4	12698.000	29.87	18.54	48.41	74.00	-25.59	peak
5	14029.000	28.25	21.96	50.21	74.00	-23.79	peak
6	17967.000	22.52	27.20	49.72	74.00	-24.28	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

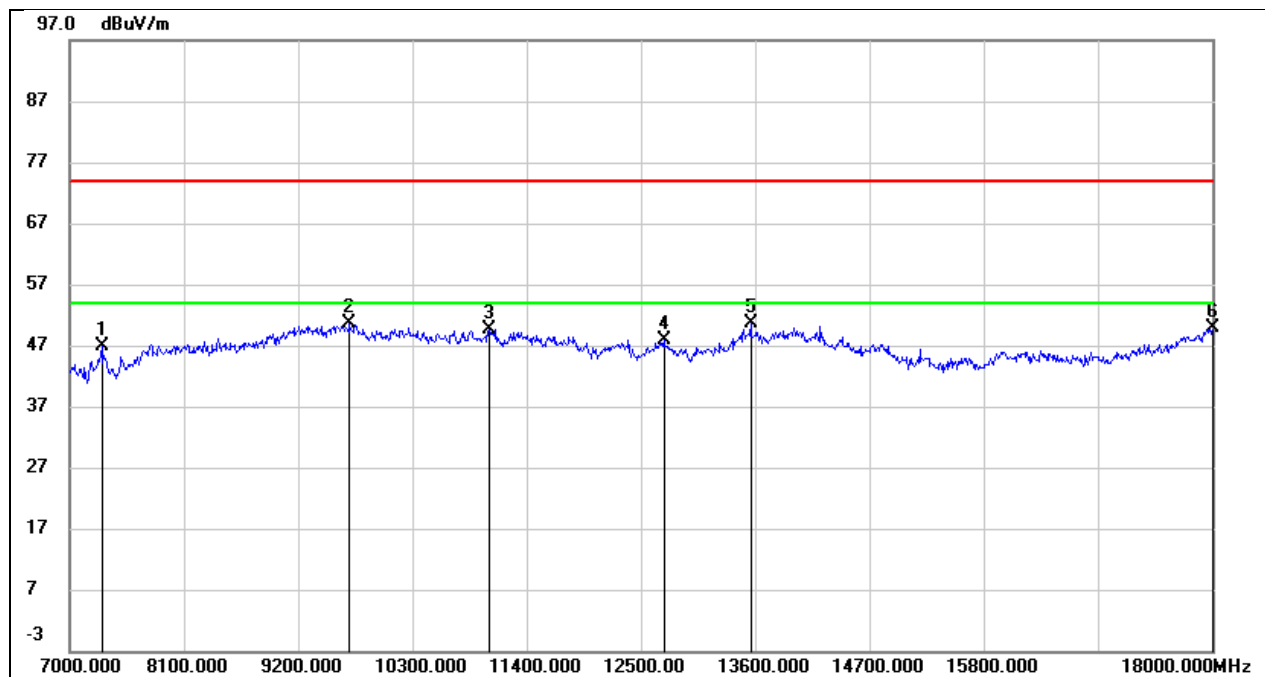


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	39.19	7.64	46.83	74.00	-27.17	peak
2	9695.000	36.90	13.62	50.52	74.00	-23.48	peak
3	11037.000	34.46	15.27	49.73	74.00	-24.27	peak
4	12720.000	28.34	19.65	47.99	74.00	-26.01	peak
5	13556.000	28.44	22.14	50.58	74.00	-23.42	peak
6	18000.000	20.18	29.61	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

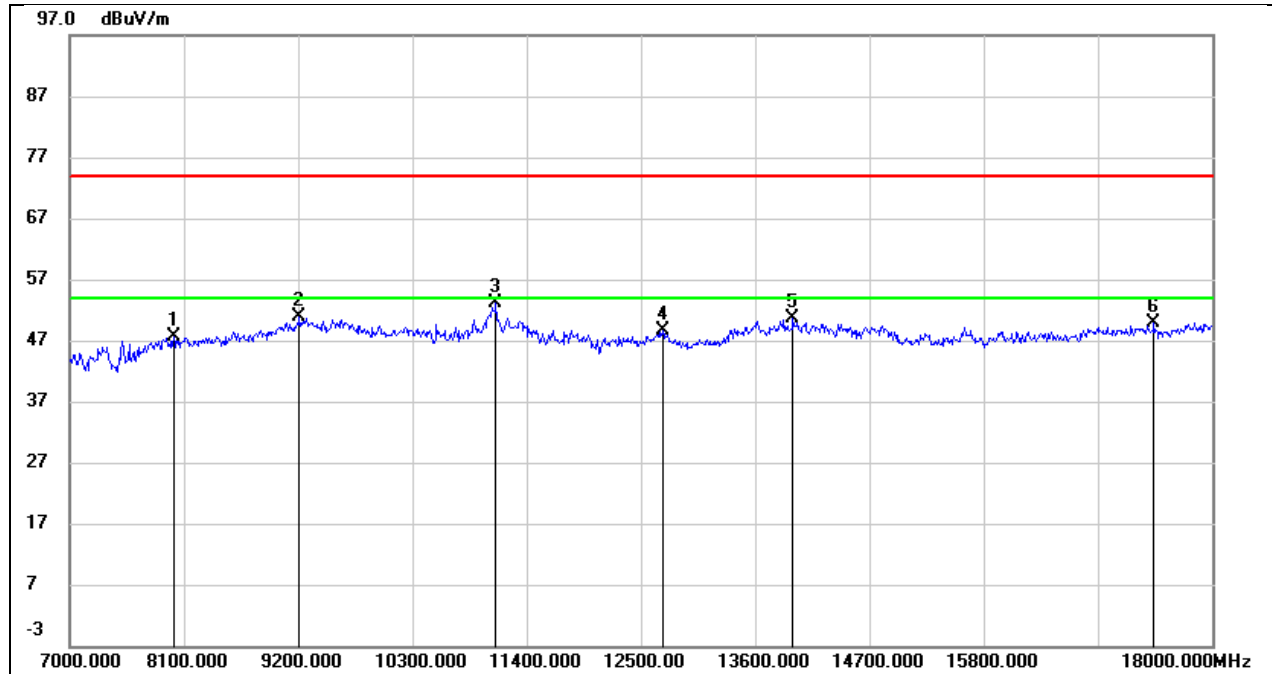


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8001.000	39.18	8.57	47.75	74.00	-26.25	peak
2	9211.000	38.95	11.82	50.77	74.00	-23.23	peak
3	11103.000	38.43	14.68	53.11	74.00	-20.89	peak
4	12709.000	30.04	18.58	48.62	74.00	-25.38	peak
5	13963.000	28.88	21.85	50.73	74.00	-23.27	peak
6	17439.000	24.83	25.02	49.85	74.00	-24.15	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

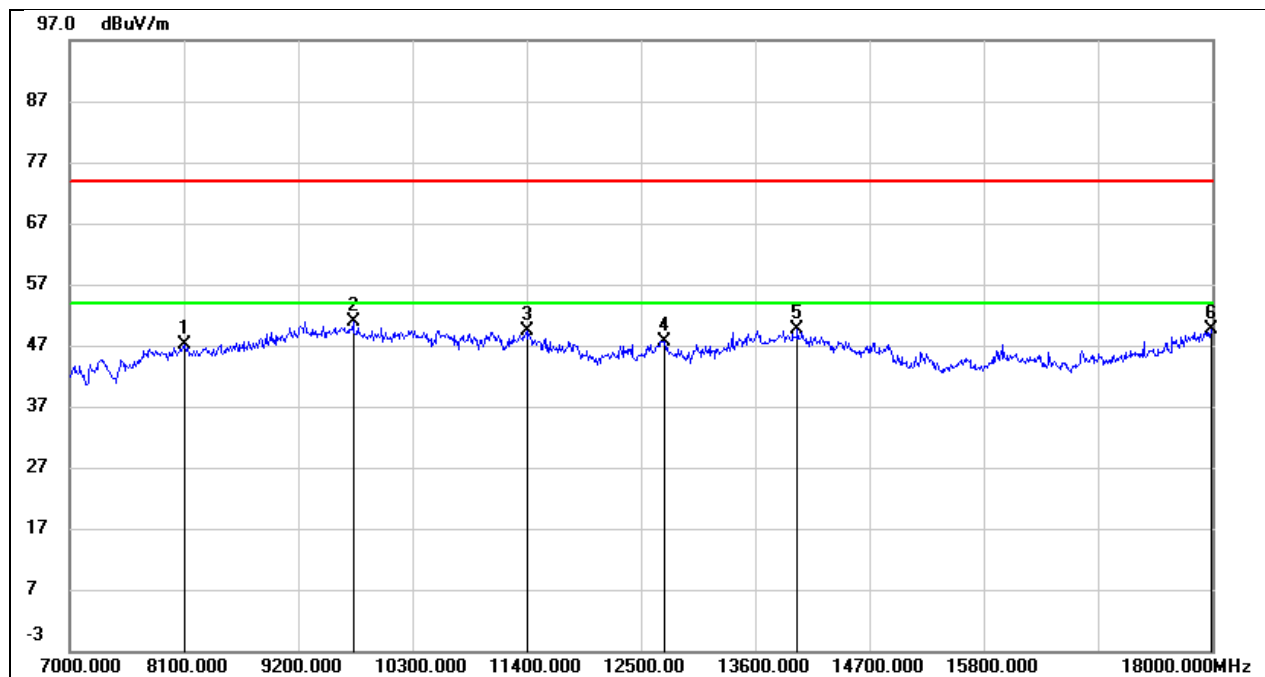


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.80	8.23	47.03	74.00	-26.97	peak
2	9728.000	37.23	13.68	50.91	74.00	-23.09	peak
3	11400.000	32.08	17.36	49.44	74.00	-24.56	peak
4	12731.000	27.95	19.70	47.65	74.00	-26.35	peak
5	14007.000	26.01	23.59	49.60	74.00	-24.40	peak
6	17989.000	20.25	29.49	49.74	74.00	-24.26	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

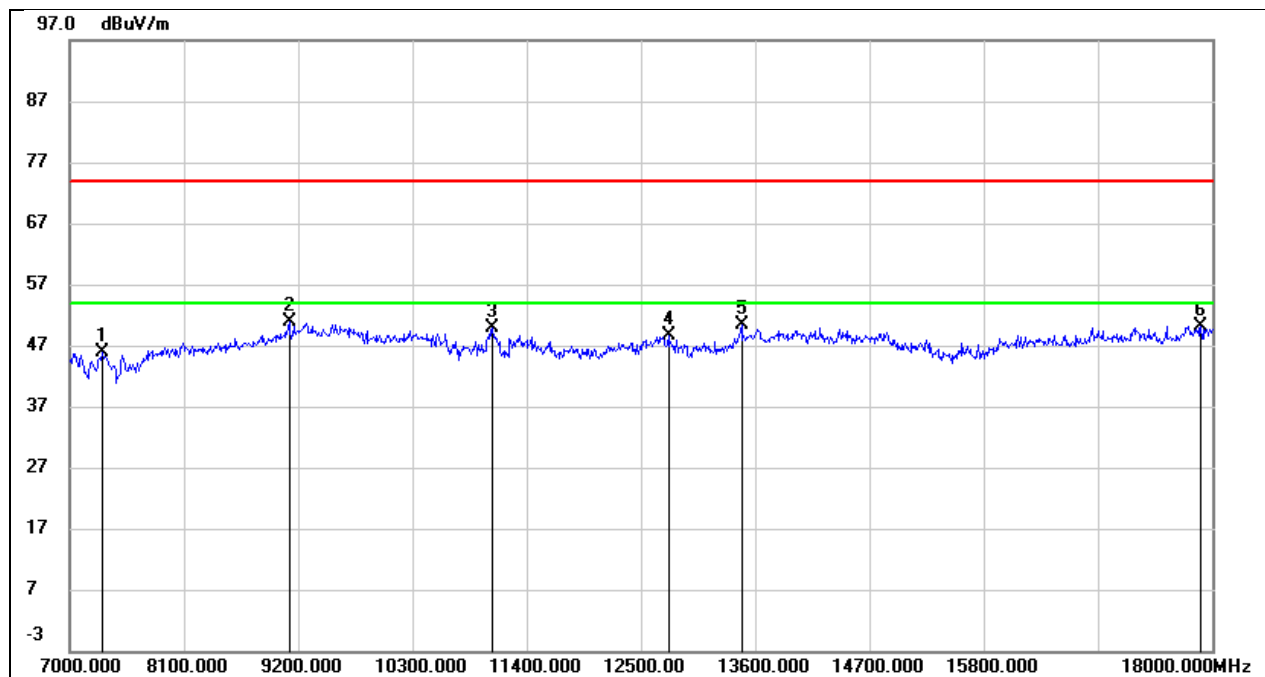


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.55	8.30	45.85	74.00	-28.15	peak
2	9112.000	39.32	11.48	50.80	74.00	-23.20	peak
3	11070.000	35.26	14.55	49.81	74.00	-24.19	peak
4	12764.000	29.98	18.77	48.75	74.00	-25.25	peak
5	13468.000	30.13	20.24	50.37	74.00	-23.63	peak
6	17890.000	23.41	26.72	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

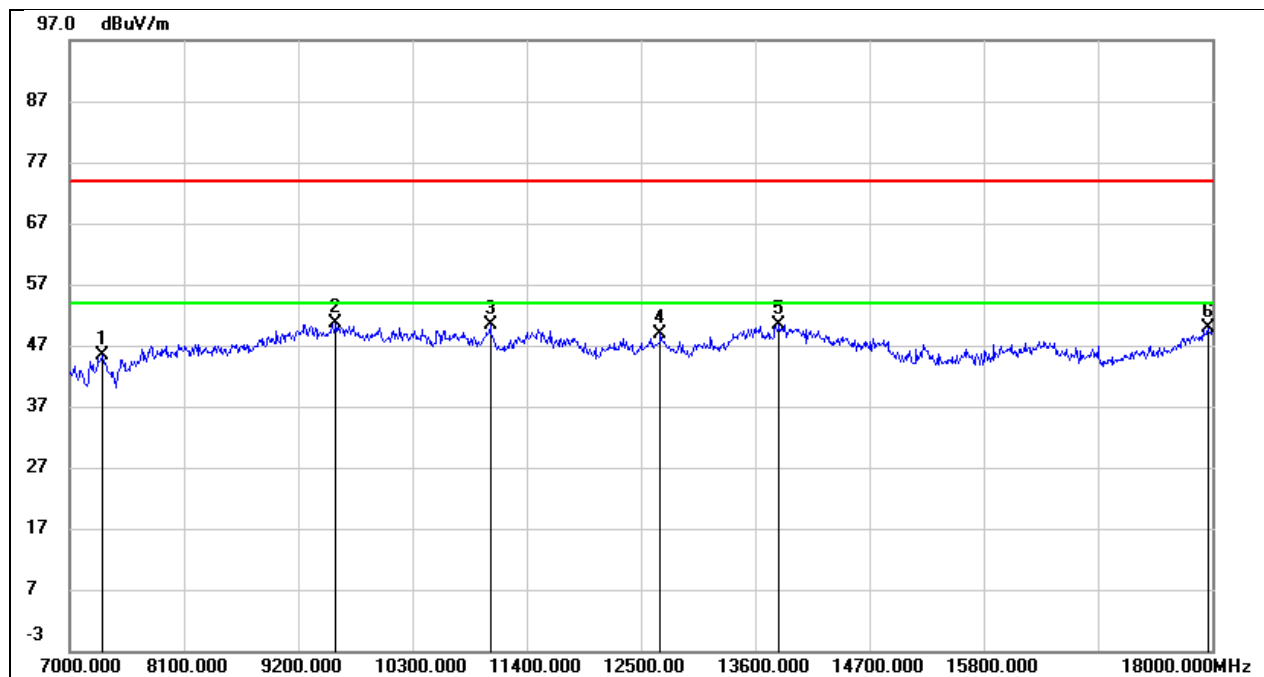


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.73	7.66	45.39	74.00	-28.61	peak
2	9563.000	37.32	13.23	50.55	74.00	-23.45	peak
3	11048.000	35.03	15.33	50.36	74.00	-23.64	peak
4	12687.000	29.37	19.52	48.89	74.00	-25.11	peak
5	13831.000	27.43	22.93	50.36	74.00	-23.64	peak
6	17956.000	20.65	29.14	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

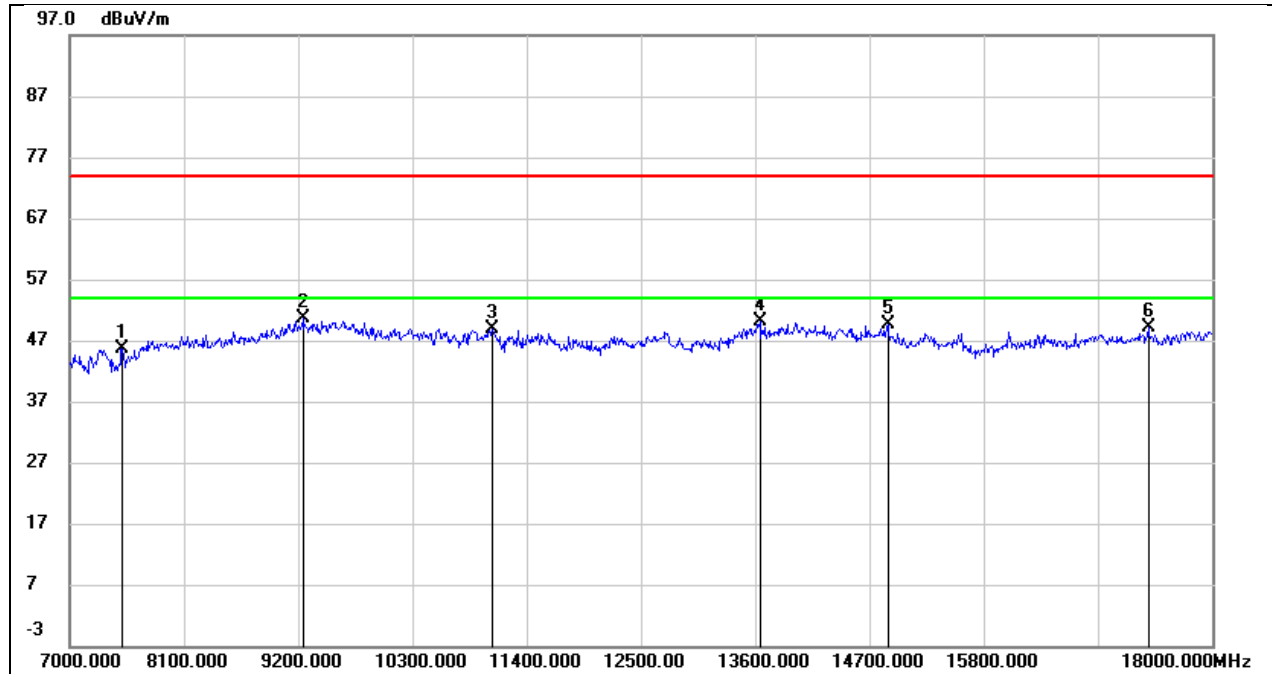


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.26	8.34	45.60	74.00	-28.40	peak
2	9244.000	38.65	11.92	50.57	74.00	-23.43	peak
3	11070.000	34.23	14.55	48.78	74.00	-25.22	peak
4	13644.000	29.45	20.68	50.13	74.00	-23.87	peak
5	14876.000	29.36	20.36	49.72	74.00	-24.28	peak
6	17384.000	23.96	25.05	49.01	74.00	-24.99	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

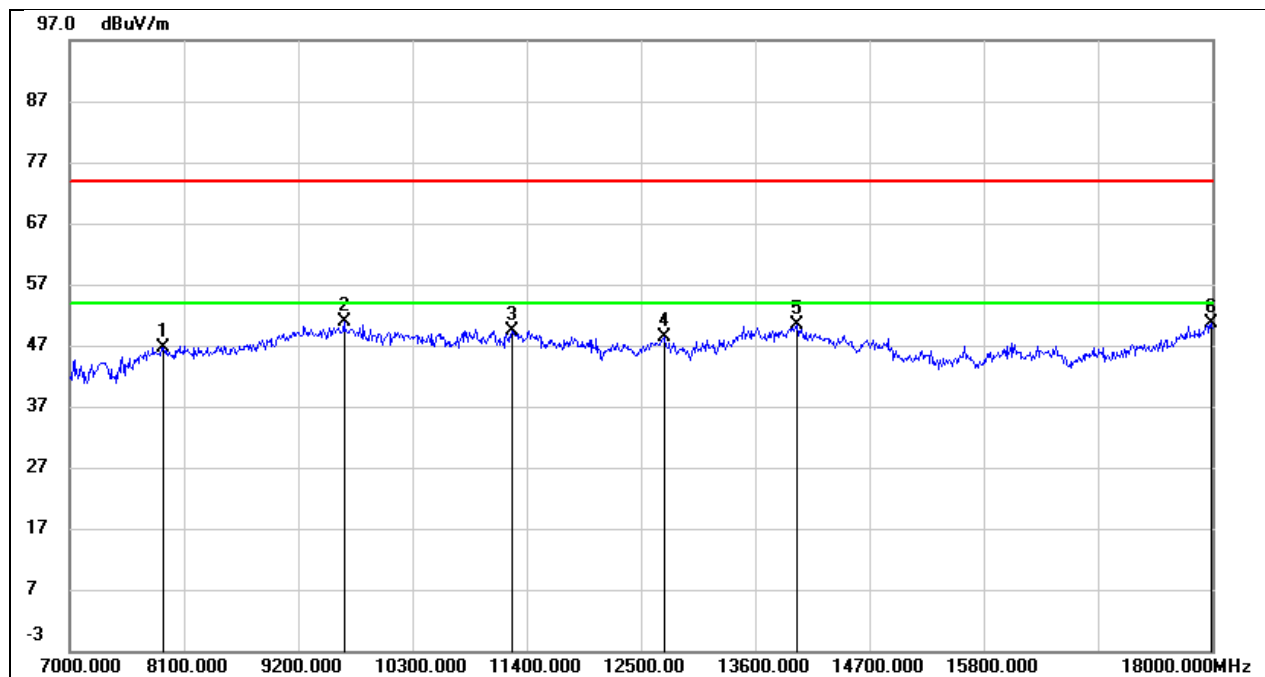


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7902.000	38.70	8.04	46.74	74.00	-27.26	peak
2	9640.000	37.29	13.53	50.82	74.00	-23.18	peak
3	11257.000	32.92	16.51	49.43	74.00	-24.57	peak
4	12720.000	28.74	19.65	48.39	74.00	-25.61	peak
5	14007.000	26.86	23.59	50.45	74.00	-23.55	peak
6	17989.000	21.24	29.49	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

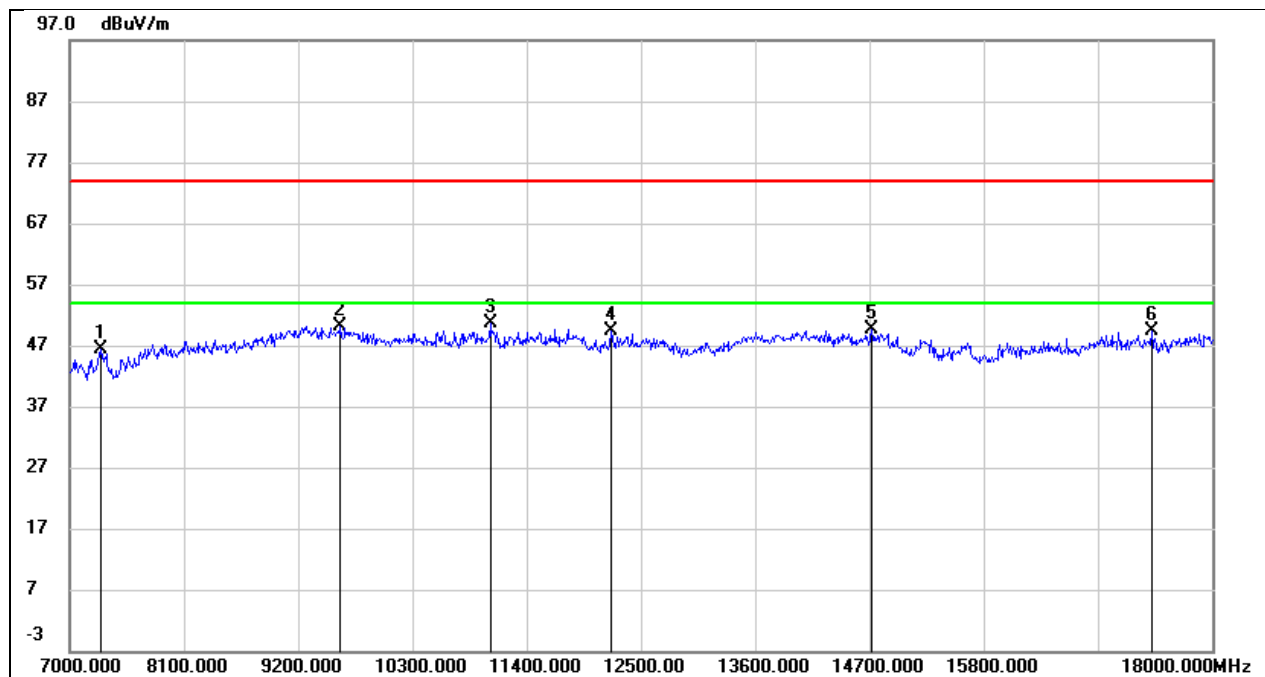


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	38.12	8.30	46.42	74.00	-27.58	peak
2	9607.000	36.84	13.33	50.17	74.00	-23.83	peak
3	11048.000	36.14	14.46	50.60	74.00	-23.40	peak
4	12214.000	31.70	17.71	49.41	74.00	-24.59	peak
5	14722.000	28.91	20.71	49.62	74.00	-24.38	peak
6	17417.000	24.23	25.04	49.27	74.00	-24.73	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

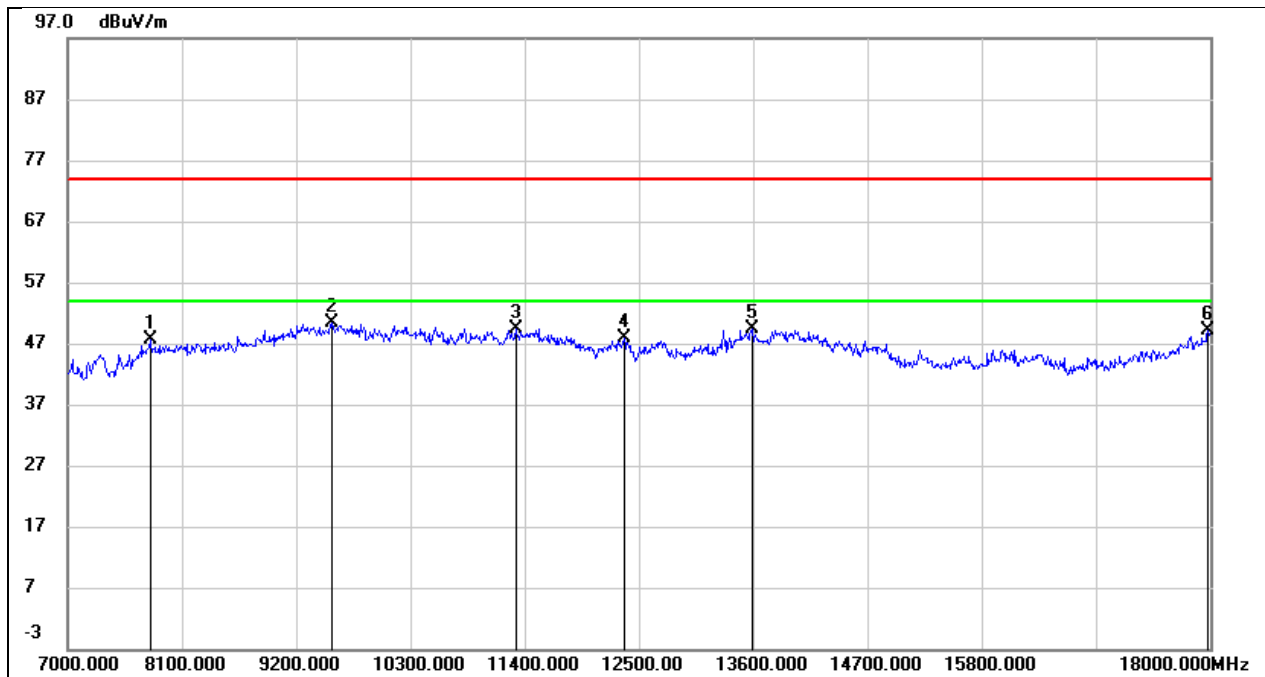


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	39.53	8.01	47.54	74.00	-26.46	peak
2	9541.000	37.25	13.10	50.35	74.00	-23.65	peak
3	11312.000	32.66	16.83	49.49	74.00	-24.51	peak
4	12357.000	28.97	18.92	47.89	74.00	-26.11	peak
5	13589.000	27.07	22.20	49.27	74.00	-24.73	peak
6	17978.000	19.85	29.38	49.23	74.00	-24.77	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

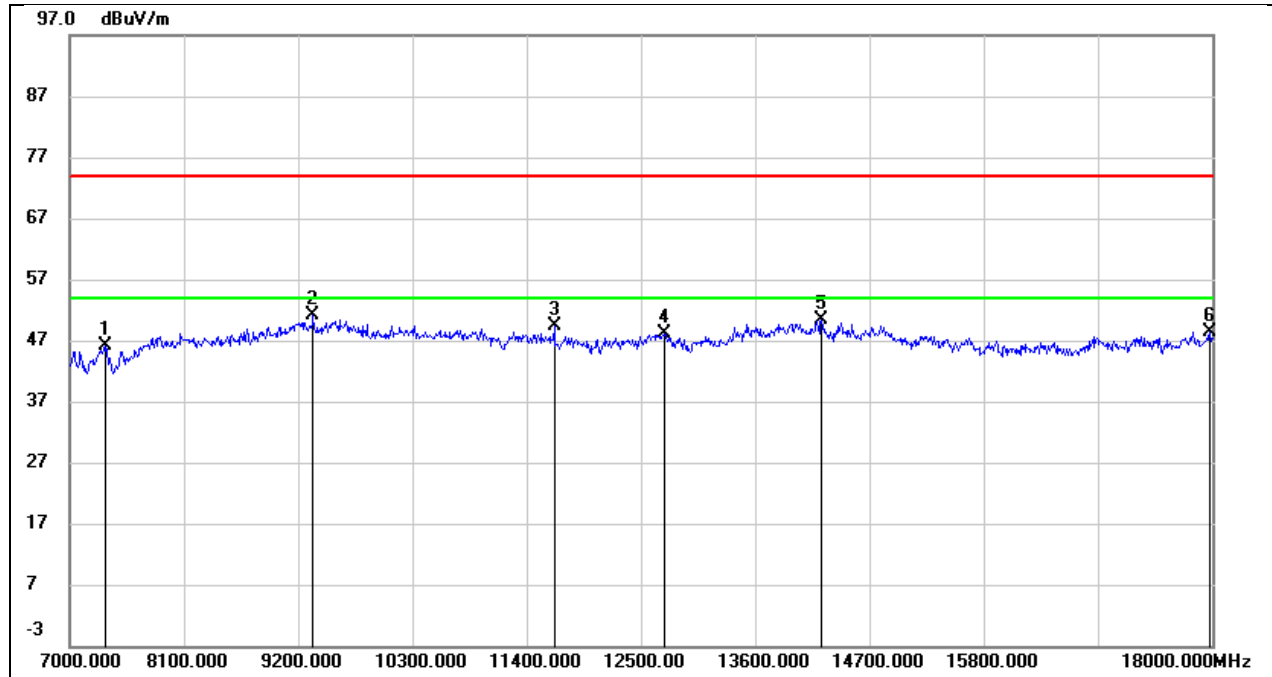


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.82	8.30	46.12	74.00	-27.88	peak
2	9343.000	38.87	12.15	51.02	74.00	-22.98	peak
3	11664.000	32.62	16.68	49.30	74.00	-24.70	peak
4	12731.000	29.41	18.66	48.07	74.00	-25.93	peak
5	14238.000	28.78	21.58	50.36	74.00	-23.64	peak
6	17978.000	21.18	27.28	48.46	74.00	-25.54	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

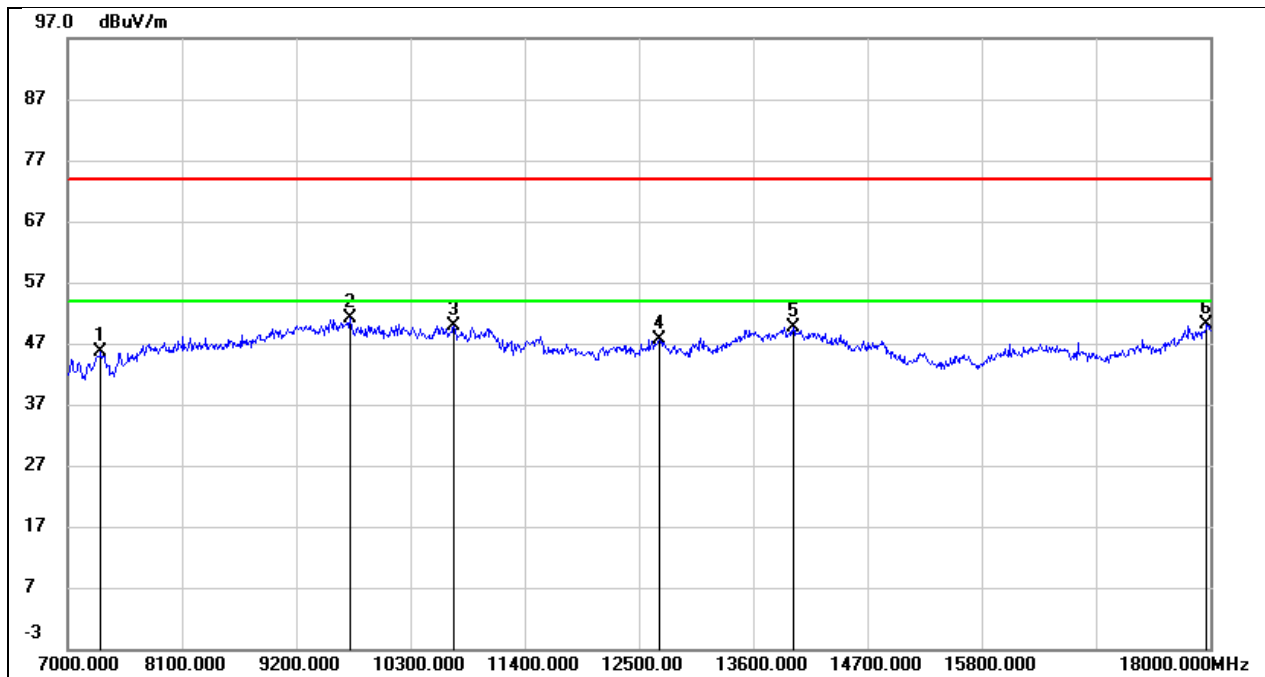


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.86	7.66	45.52	74.00	-28.48	peak
2	9717.000	37.49	13.66	51.15	74.00	-22.85	peak
3	10718.000	35.59	14.18	49.77	74.00	-24.23	peak
4	12698.000	28.03	19.56	47.59	74.00	-26.41	peak
5	13985.000	26.11	23.55	49.66	74.00	-24.34	peak
6	17967.000	20.82	29.26	50.08	74.00	-23.92	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

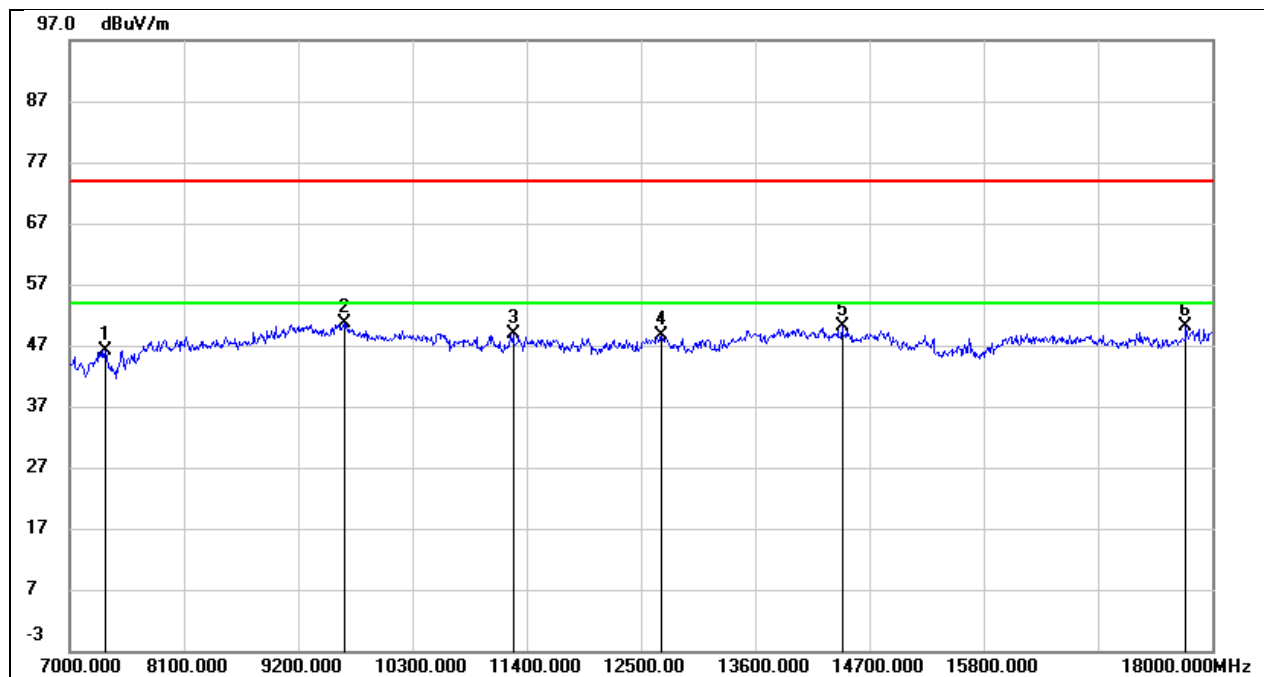


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.90	8.30	46.20	74.00	-27.80	peak
2	9640.000	37.36	13.33	50.69	74.00	-23.31	peak
3	11268.000	33.40	15.39	48.79	74.00	-25.21	peak
4	12698.000	30.16	18.54	48.70	74.00	-25.30	peak
5	14436.000	29.18	20.98	50.16	74.00	-23.84	peak
6	17747.000	24.15	25.89	50.04	74.00	-23.96	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

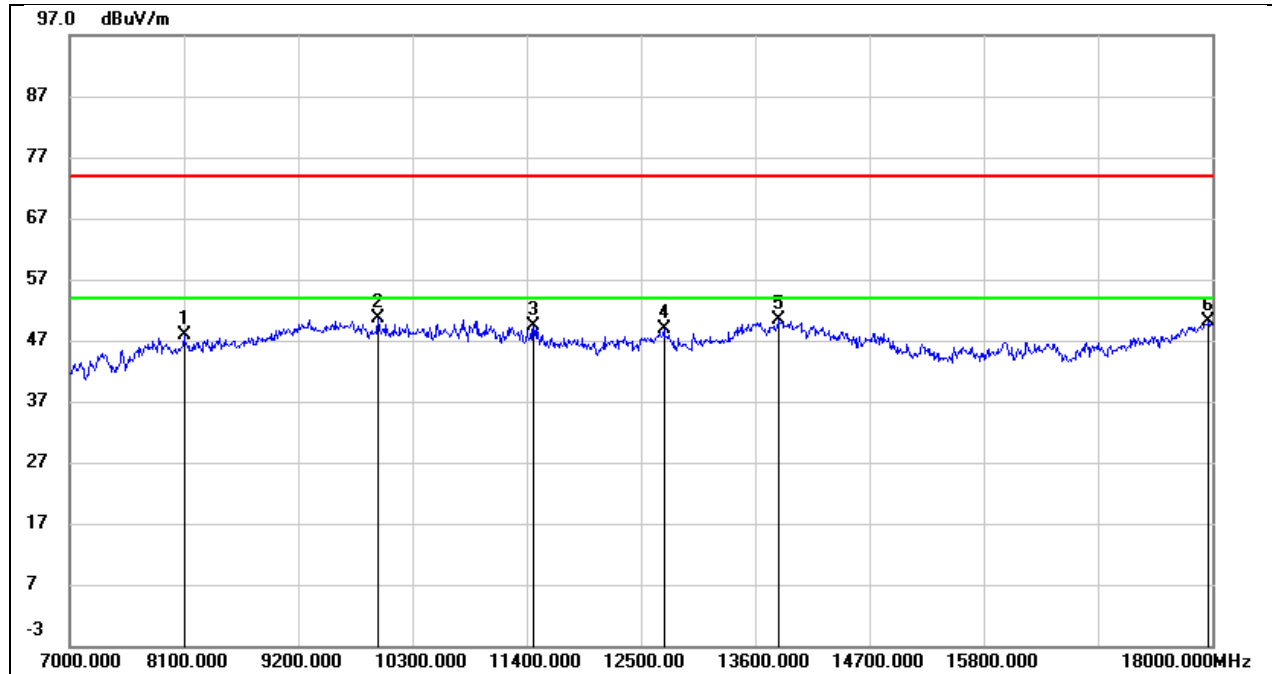


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.66	8.21	47.87	74.00	-26.13	peak
2	9970.000	37.10	13.41	50.51	74.00	-23.49	peak
3	11466.000	31.76	17.68	49.44	74.00	-24.56	peak
4	12720.000	29.16	19.65	48.81	74.00	-25.19	peak
5	13820.000	27.48	22.88	50.36	74.00	-23.64	peak
6	17967.000	20.76	29.26	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

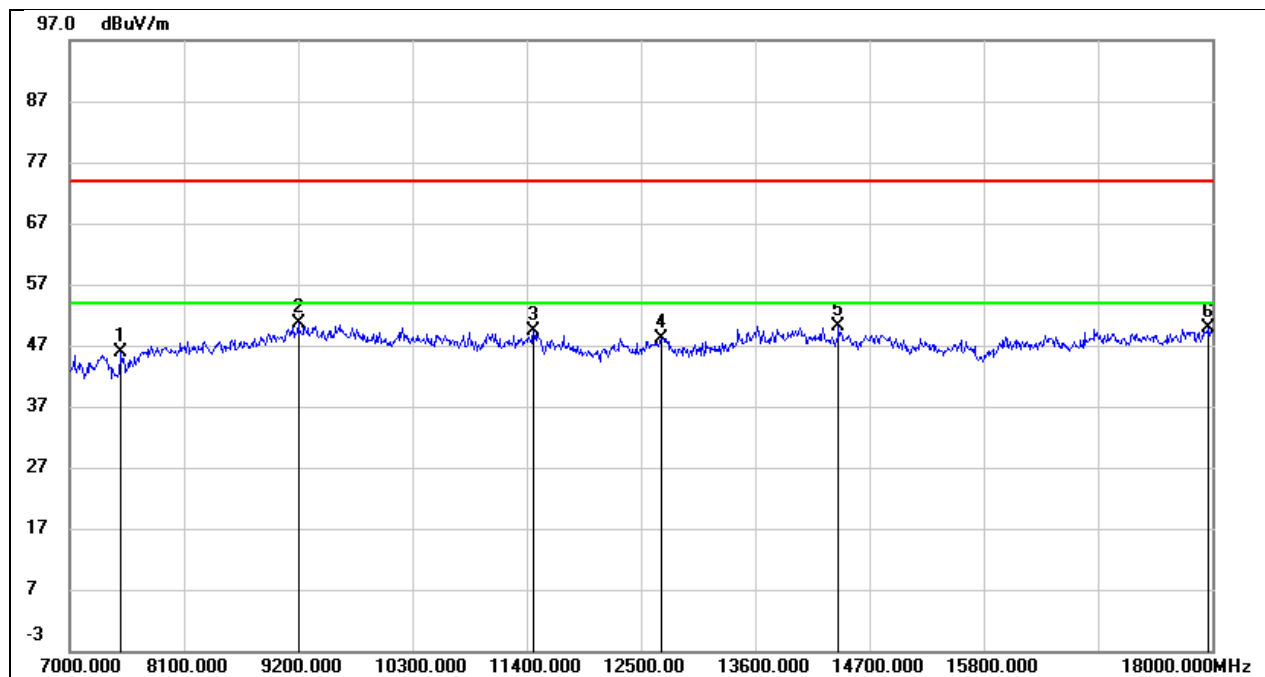


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.47	8.35	45.82	74.00	-28.18	peak
2	9200.000	38.75	11.80	50.55	74.00	-23.45	peak
3	11466.000	33.19	16.22	49.41	74.00	-24.59	peak
4	12698.000	29.60	18.54	48.14	74.00	-25.86	peak
5	14403.000	29.13	21.00	50.13	74.00	-23.87	peak
6	17967.000	22.69	27.20	49.89	74.00	-24.11	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

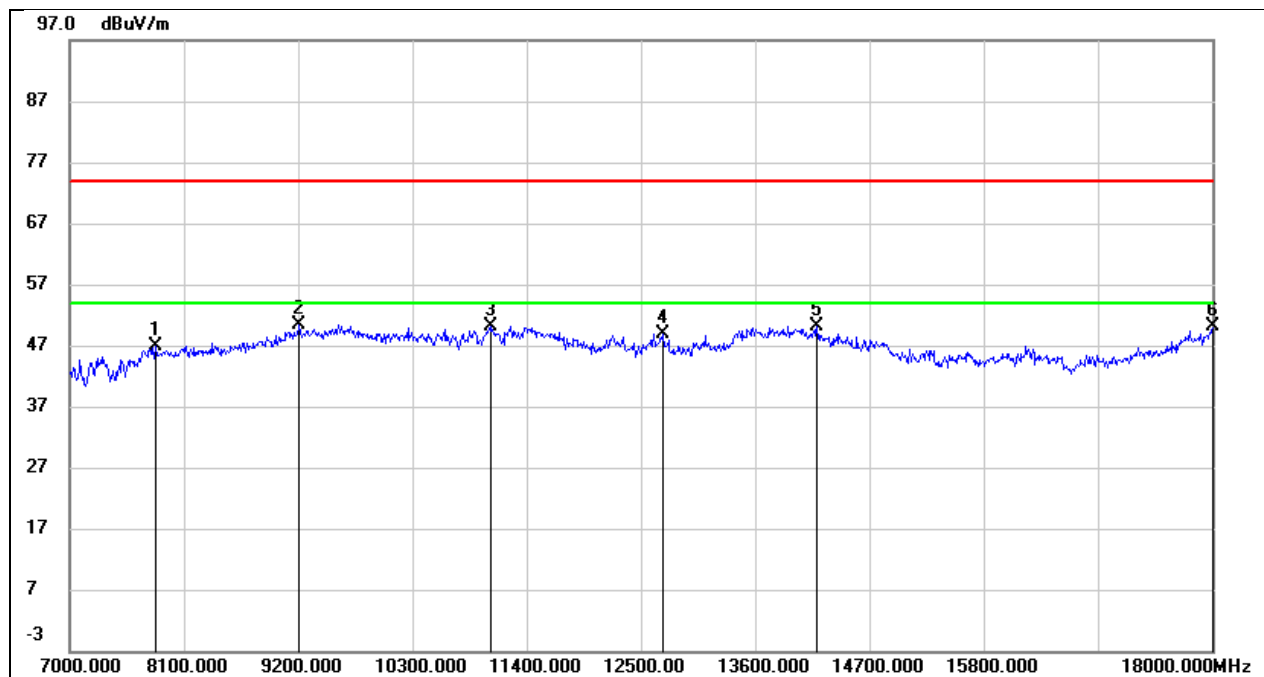


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7825.000	38.98	8.02	47.00	74.00	-27.00	peak
2	9211.000	38.84	11.59	50.43	74.00	-23.57	peak
3	11048.000	34.82	15.33	50.15	74.00	-23.85	peak
4	12709.000	29.17	19.60	48.77	74.00	-25.23	peak
5	14194.000	27.29	22.81	50.10	74.00	-23.90	peak
6	18000.000	20.41	29.61	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

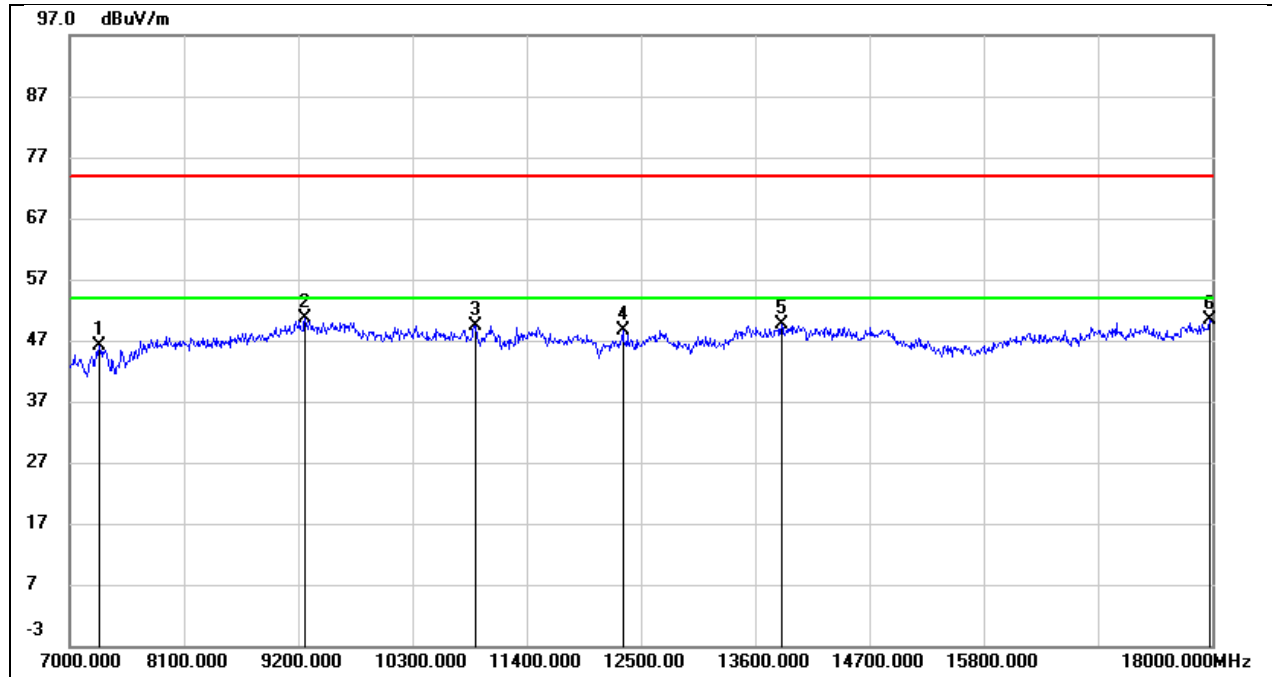


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.79	8.29	46.08	74.00	-27.92	peak
2	9266.000	38.72	11.96	50.68	74.00	-23.32	peak
3	10905.000	35.43	14.06	49.49	74.00	-24.51	peak
4	12324.000	30.79	17.90	48.69	74.00	-25.31	peak
5	13853.000	28.18	21.38	49.56	74.00	-24.44	peak
6	17978.000	23.13	27.28	50.41	74.00	-23.59	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

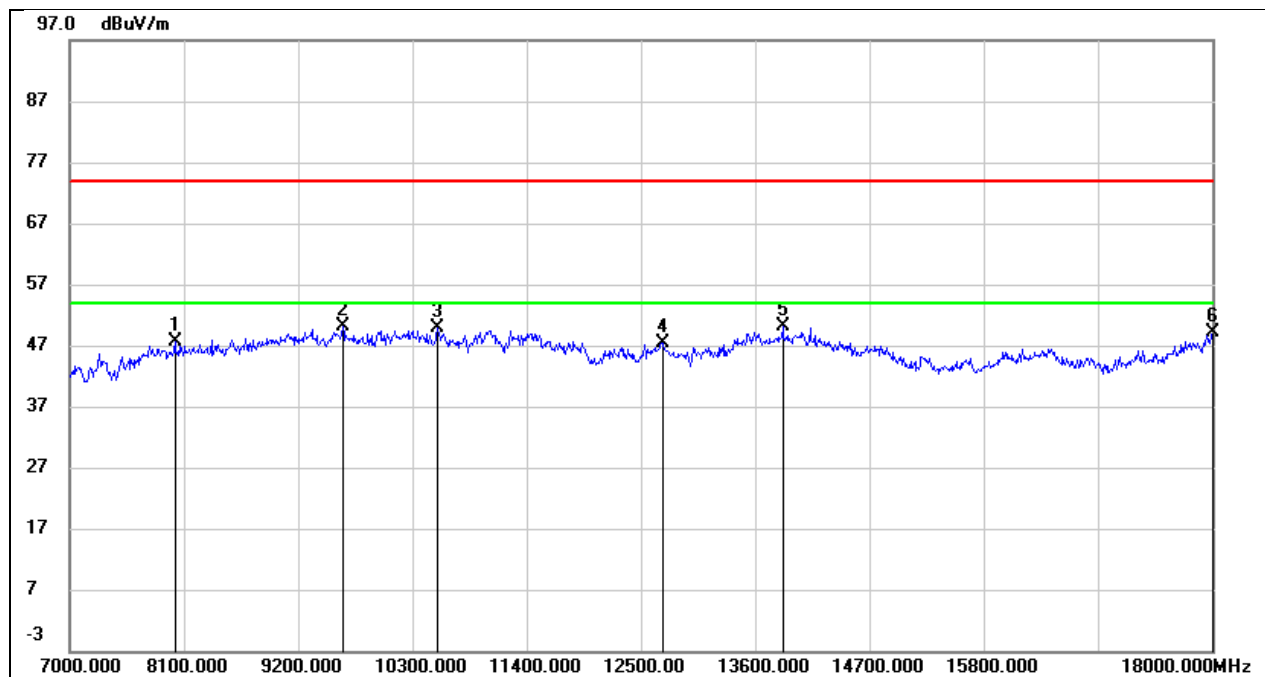


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	39.43	8.09	47.52	74.00	-26.48	peak
2	9629.000	36.69	13.51	50.20	74.00	-23.80	peak
3	10542.000	36.22	13.66	49.88	74.00	-24.12	peak
4	12709.000	27.76	19.60	47.36	74.00	-26.64	peak
5	13864.000	26.98	23.06	50.04	74.00	-23.96	peak
6	18000.000	19.40	29.61	49.01	74.00	-24.99	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

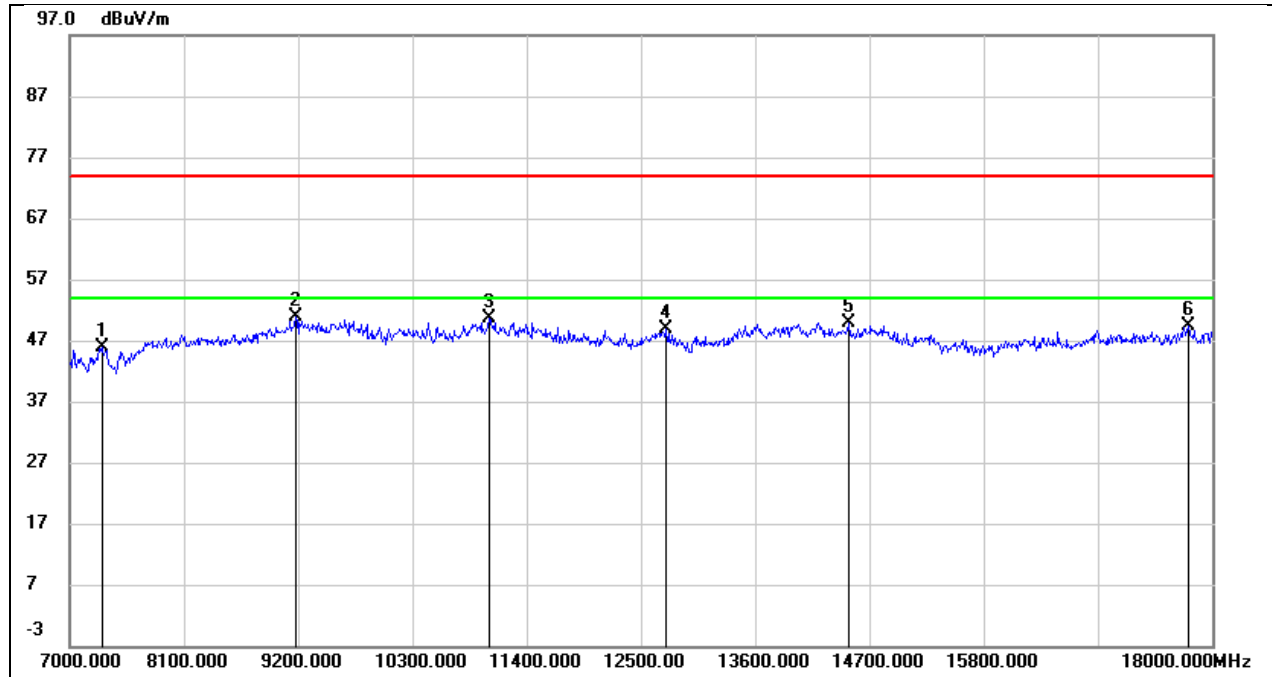


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.52	8.29	45.81	74.00	-28.19	peak
2	9178.000	39.13	11.71	50.84	74.00	-23.16	peak
3	11037.000	36.26	14.42	50.68	74.00	-23.32	peak
4	12742.000	30.26	18.70	48.96	74.00	-25.04	peak
5	14502.000	28.94	20.95	49.89	74.00	-24.11	peak
6	17769.000	23.33	26.00	49.33	74.00	-24.67	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

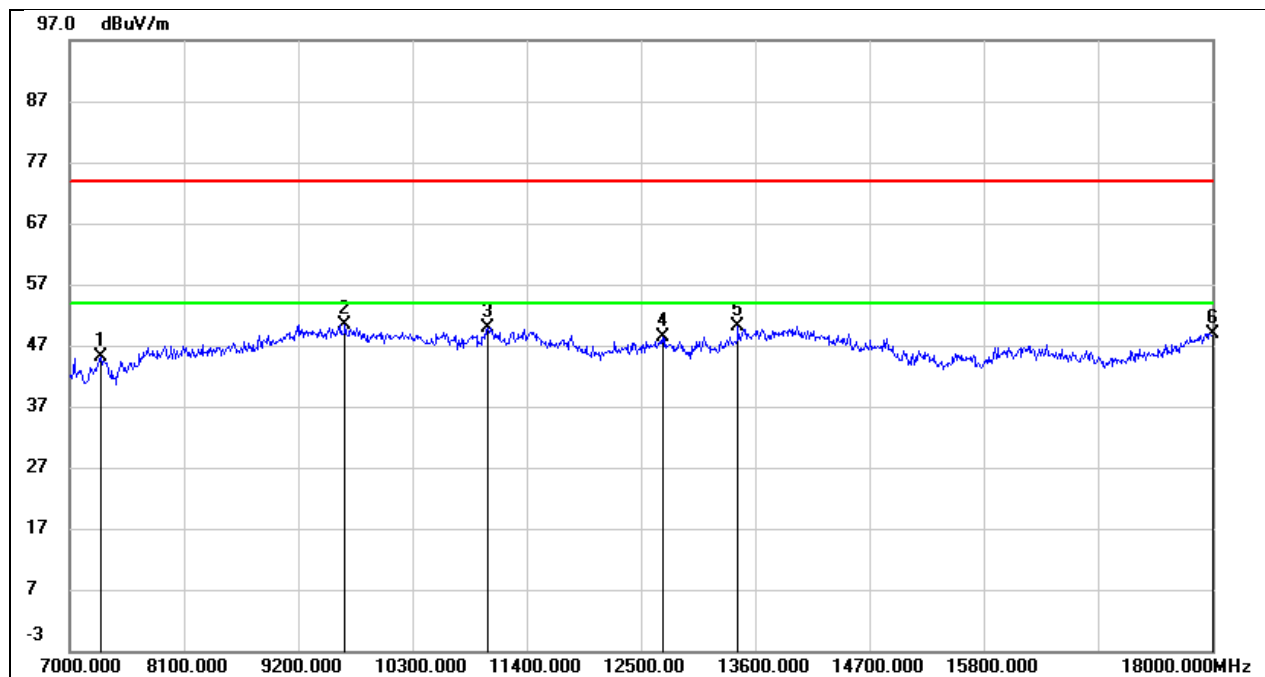


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.43	7.64	45.07	74.00	-28.93	peak
2	9651.000	36.83	13.55	50.38	74.00	-23.62	peak
3	11026.000	34.56	15.21	49.77	74.00	-24.23	peak
4	12709.000	28.66	19.60	48.26	74.00	-25.74	peak
5	13435.000	28.36	21.79	50.15	74.00	-23.85	peak
6	18000.000	19.28	29.61	48.89	74.00	-25.11	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

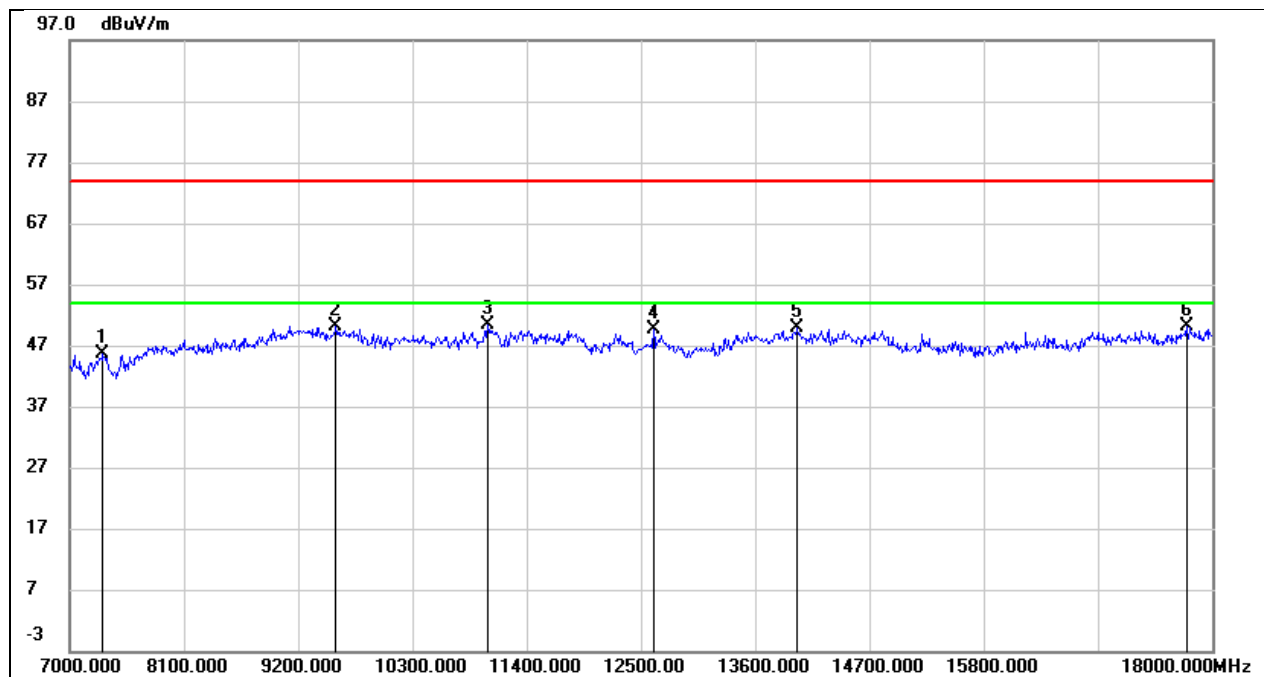


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.22	8.30	45.52	74.00	-28.48	peak
2	9563.000	37.07	13.14	50.21	74.00	-23.79	peak
3	11026.000	35.99	14.37	50.36	74.00	-23.64	peak
4	12621.000	31.48	18.27	49.75	74.00	-24.25	peak
5	14007.000	27.91	22.01	49.92	74.00	-24.08	peak
6	17758.000	24.07	25.94	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

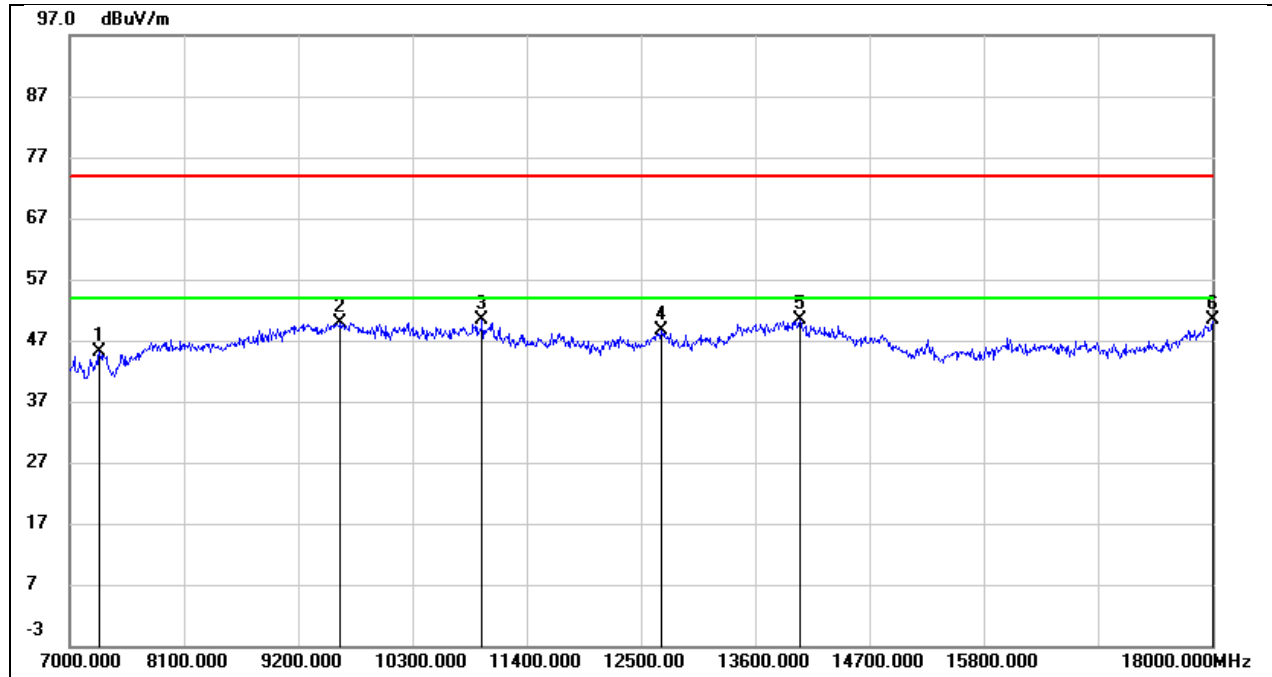

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.55	7.62	45.17	74.00	-28.83	peak
2	9607.000	36.31	13.48	49.79	74.00	-24.21	peak
3	10971.000	35.41	14.97	50.38	74.00	-23.62	peak
4	12698.000	29.18	19.56	48.74	74.00	-25.26	peak
5	14029.000	26.81	23.49	50.30	74.00	-23.70	peak
6	18000.000	20.77	29.61	50.38	74.00	-23.62	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

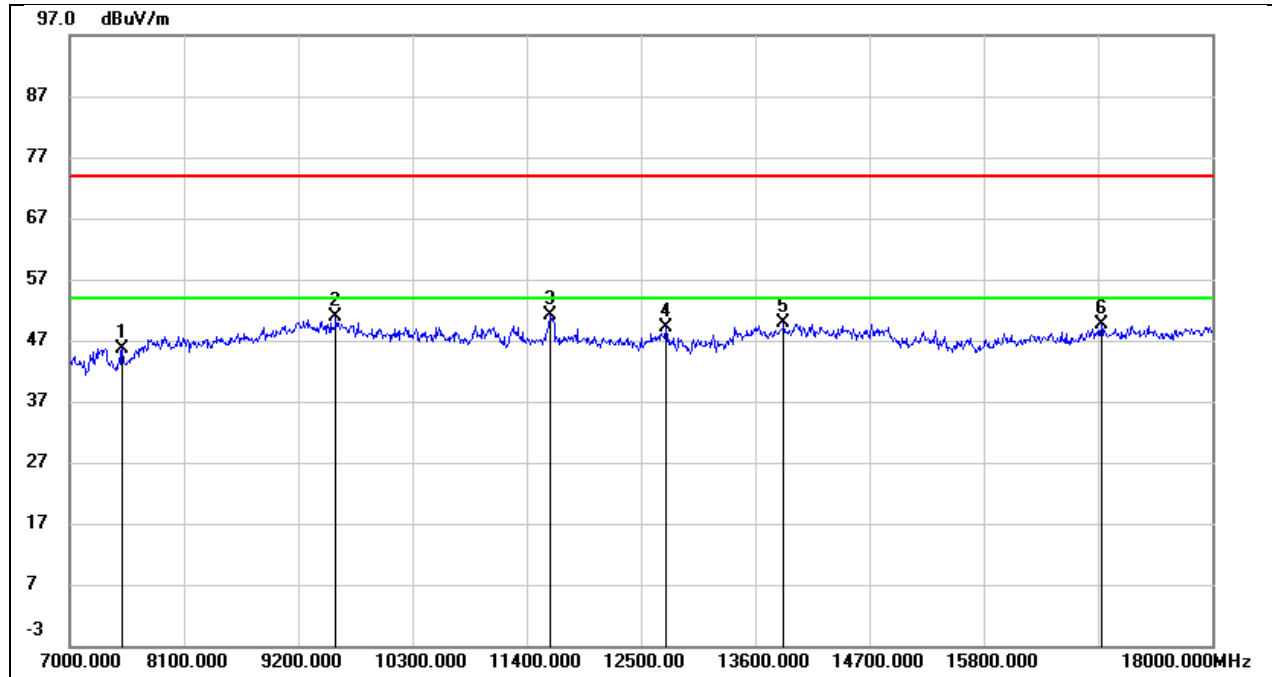

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.34	8.34	45.68	74.00	-28.32	peak
2	9563.000	37.65	13.14	50.79	74.00	-23.21	peak
3	11631.000	34.40	16.68	51.08	74.00	-22.92	peak
4	12742.000	30.51	18.70	49.21	74.00	-24.79	peak
5	13875.000	28.39	21.49	49.88	74.00	-24.12	peak
6	16933.000	25.41	24.30	49.71	74.00	-24.29	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

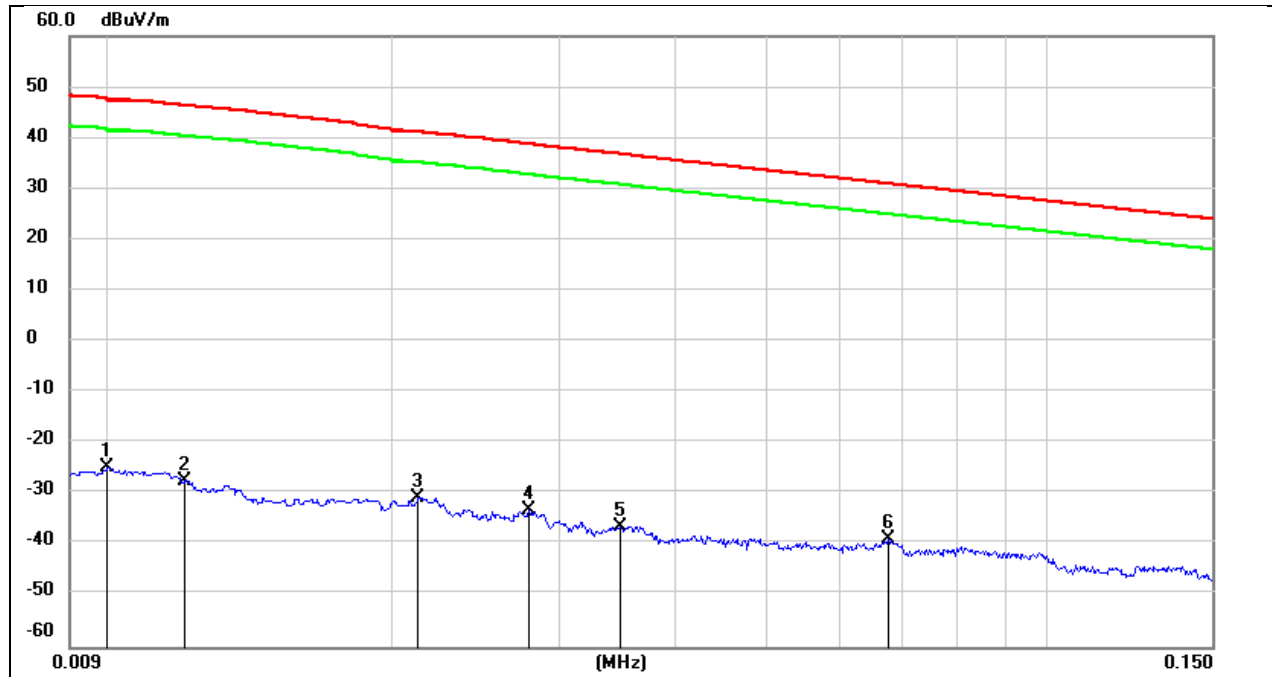


No.	Frequency (KHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	76.72	-101.40	-24.68	47.60	-72.28	peak
2	0.0120	73.86	-101.39	-27.53	46.40	-73.93	peak
3	0.0212	70.54	-101.35	-30.81	41.16	-71.97	peak
4	0.0279	68.17	-101.38	-33.21	38.80	-72.01	peak
5	0.0349	65.03	-101.41	-36.38	36.84	-73.22	peak
6	0.0675	62.64	-101.56	-38.92	31.03	-69.95	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

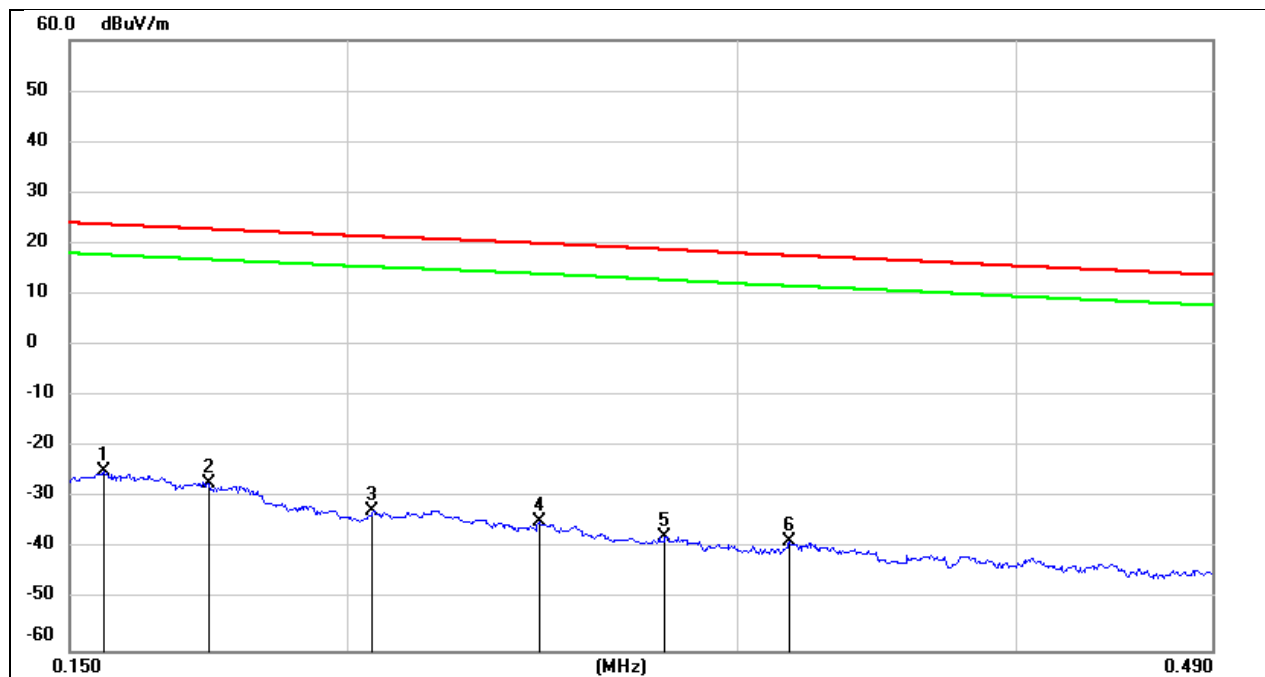

No.	Frequency (KHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	76.77	-101.65	-24.88	23.78	-48.66	peak
2	0.1733	74.42	-101.67	-27.25	22.84	-50.09	peak
3	0.2053	69.29	-101.73	-32.44	21.39	-53.83	peak
4	0.2442	67.03	-101.79	-34.76	20.02	-54.78	peak
5	0.2782	64.29	-101.83	-37.54	18.83	-56.37	peak
6	0.3163	63.20	-101.87	-38.67	17.65	-56.32	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

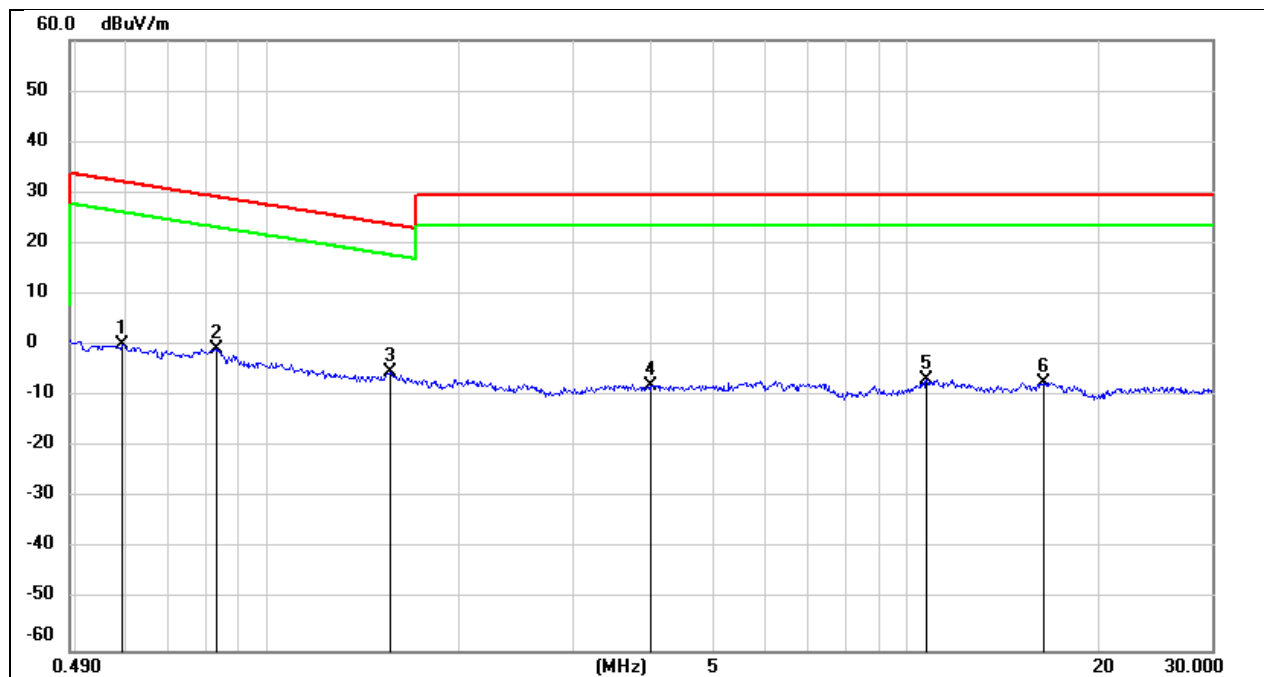

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5917	62.24	-62.08	0.16	32.17	-32.01	peak
2	0.8296	61.44	-62.17	-0.73	29.24	-29.97	peak
3	1.5564	56.68	-62.02	-5.34	23.76	-29.10	peak
4	3.9786	53.44	-61.34	-7.90	29.54	-37.44	peak
5	10.7299	53.98	-60.83	-6.85	29.54	-36.39	peak
6	16.3959	53.67	-60.96	-7.29	29.54	-36.83	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

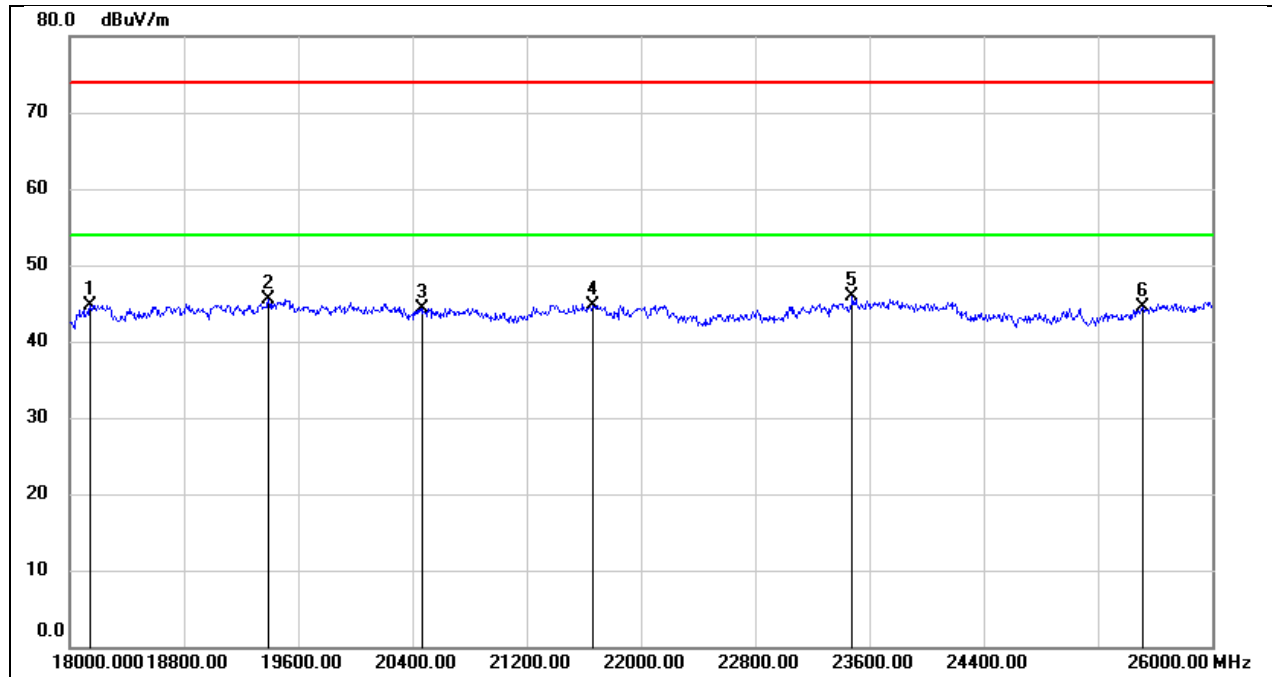

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	20472.000	49.69	-5.39	44.30	74.00	-29.70	peak
4	21664.000	49.15	-4.45	44.70	74.00	-29.30	peak
5	23480.000	49.04	-3.16	45.88	74.00	-28.12	peak
6	25512.000	46.30	-1.73	44.57	74.00	-29.43	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60HZ

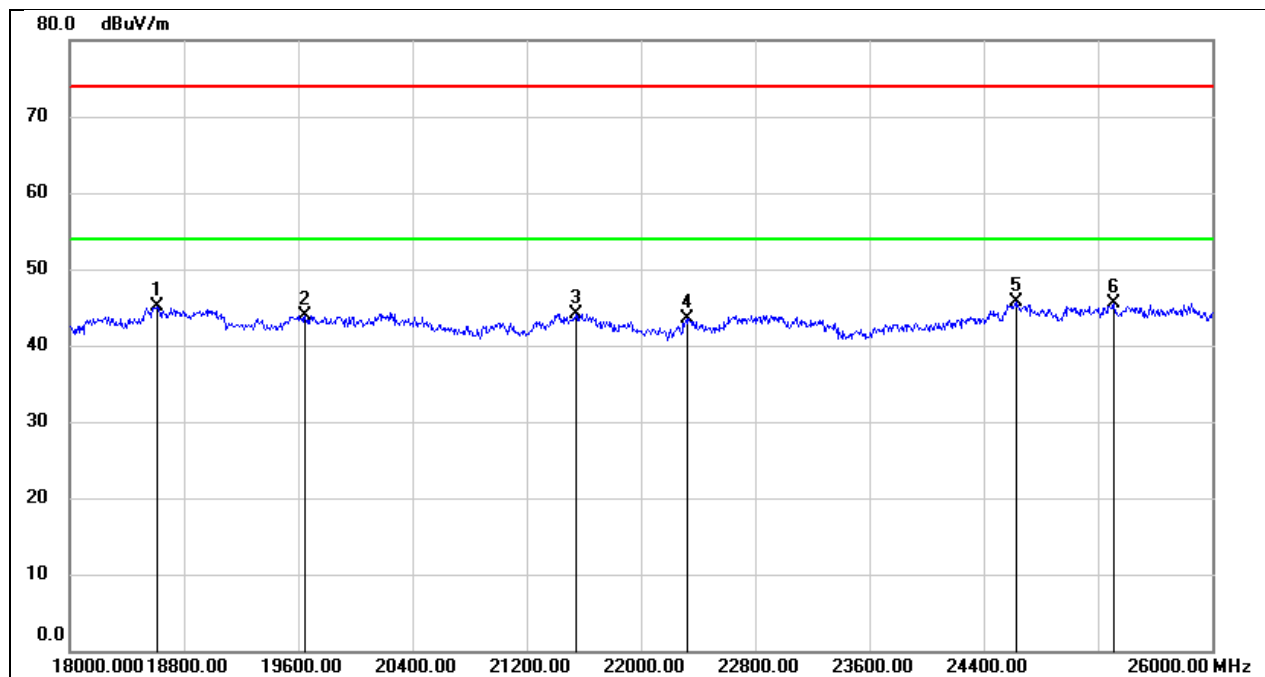

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	50.39	-5.34	45.05	74.00	-28.95	peak
2	19648.000	49.23	-5.37	43.86	74.00	-30.14	peak
3	21544.000	48.76	-4.63	44.13	74.00	-29.87	peak
4	22328.000	47.70	-4.11	43.59	74.00	-30.41	peak
5	24624.000	47.99	-2.33	45.66	74.00	-28.34	peak
6	25312.000	47.20	-1.70	45.50	74.00	-28.50	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

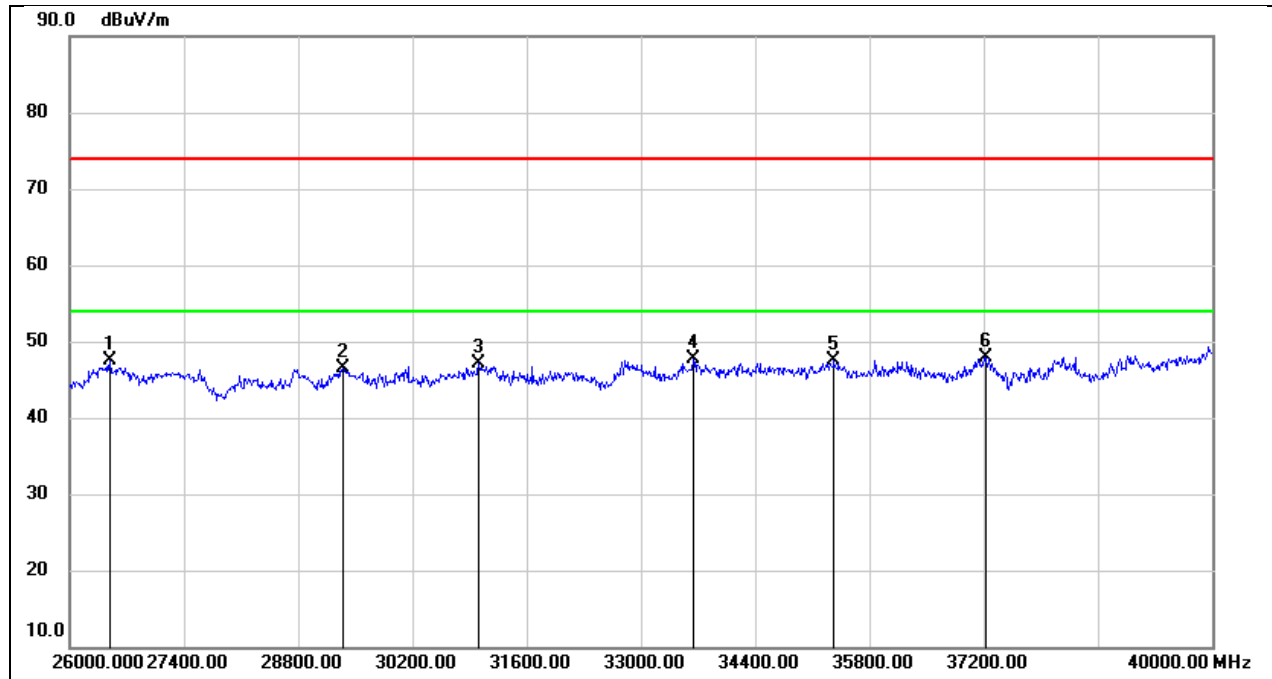

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	52.29	-4.74	47.55	74.00	-26.45	peak
2	29346.000	47.38	-0.91	46.47	74.00	-27.53	peak
3	31012.000	47.83	-0.71	47.12	74.00	-26.88	peak
4	33644.000	47.31	0.42	47.73	74.00	-26.27	peak
5	35366.000	44.90	2.59	47.49	74.00	-26.51	peak
6	37228.000	44.73	3.14	47.87	74.00	-26.13	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60HZ

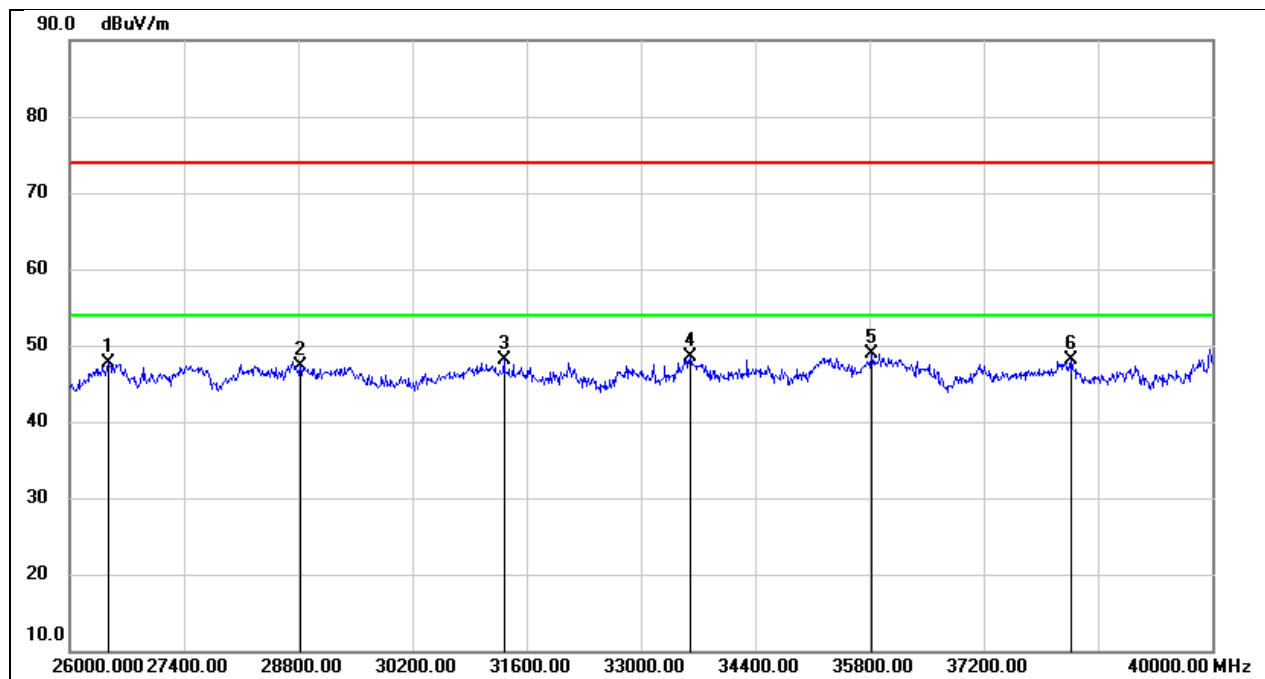

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	52.53	-4.78	47.75	74.00	-26.25	peak
2	28828.000	48.13	-0.79	47.34	74.00	-26.66	peak
3	31320.000	49.11	-0.93	48.18	74.00	-25.82	peak
4	33602.000	48.01	0.46	48.47	74.00	-25.53	peak
5	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
6	38278.000	44.32	3.82	48.14	74.00	-25.86	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

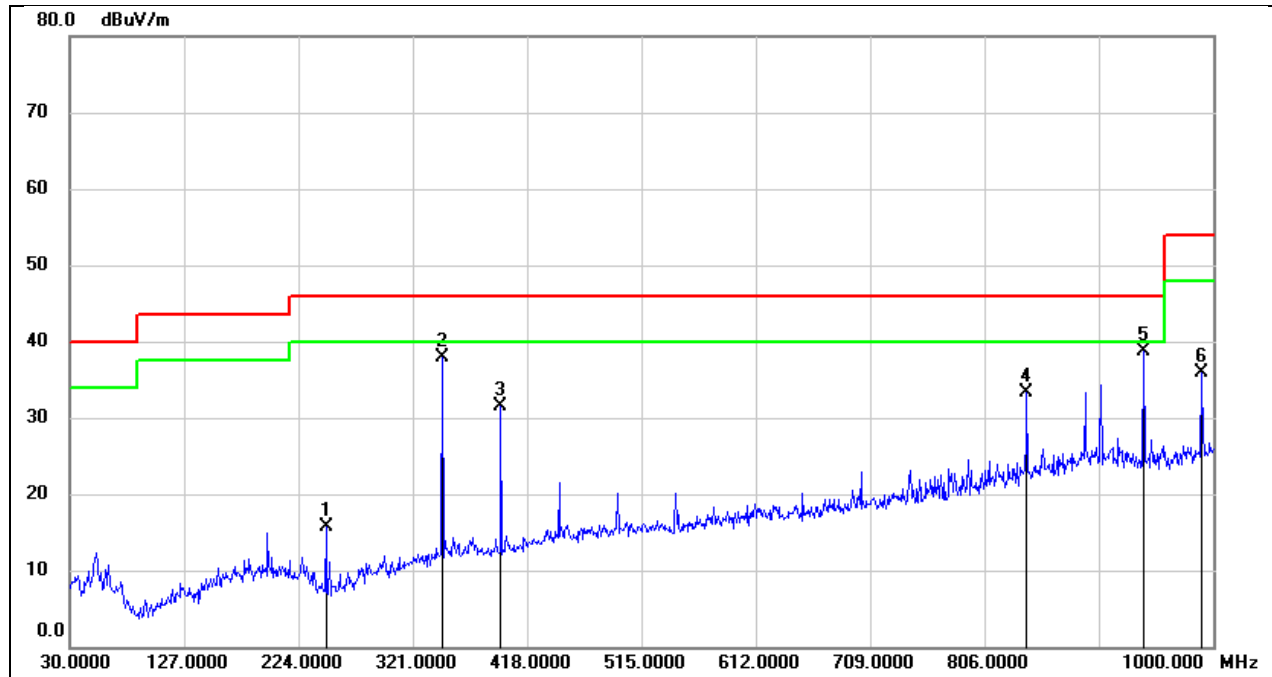

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	247.2800	30.20	-14.43	15.77	46.00	-30.23	QP
2	346.2200	47.58	-9.69	37.89	46.00	-8.11	QP
3	395.6900	41.11	-9.62	31.49	46.00	-14.51	QP
4	841.8900	34.75	-1.47	33.28	46.00	-12.72	QP
5	940.8300	39.48	-0.74	38.74	46.00	-7.26	QP
6	990.3000	36.07	-0.23	35.84	54.00	-18.16	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

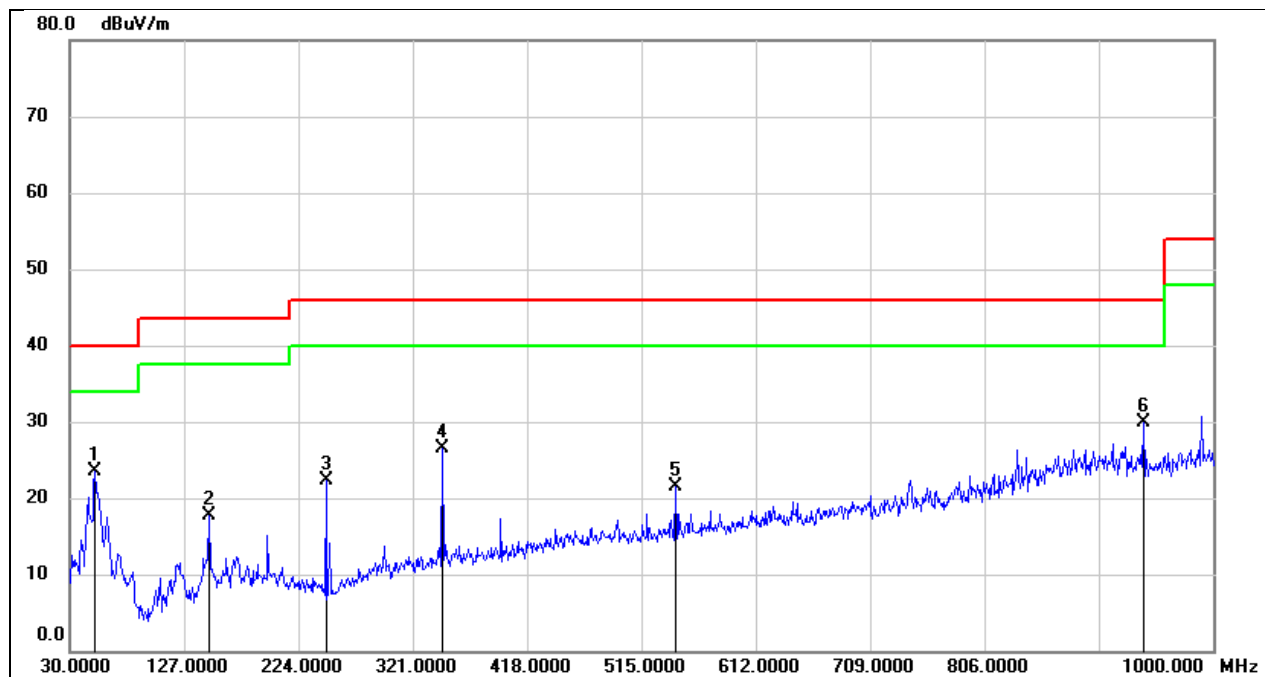

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	38.49	-15.07	23.42	40.00	-16.58	QP
2	148.3400	31.26	-13.56	17.70	43.50	-25.80	QP
3	247.2800	36.70	-14.43	22.27	46.00	-23.73	QP
4	346.2200	36.26	-9.69	26.57	46.00	-19.43	QP
5	544.1000	28.54	-7.13	21.41	46.00	-24.59	QP
6	940.8300	30.70	-0.74	29.96	46.00	-16.04	QP

END OF REPORT

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

END OF REPORT