

## HCT CO., LTD.

**Product Compliance Division** 

TEL: +82 31 639 8518 FAX: +82 31 639 8525

### CERTIFICATE OF COMPLIANCE

**Applicant Name:** 

SeAH Networks Co., Ltd.

Address:

9F, IT Venture Tower East Wing 78 Karak-Dong,

Songpa-Gu, Seoul, Korea(138-950)

Date of Issue:

September 22, 2009

Test Site/Location:

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,

Kyungki-do, Korea

Test Report No.: HCTR0909FR08

HCT FRN: 0005866421

IC Recognition No.: 5944A-1

FCC ID: **XQE-T-7DIS-WF-KIT** 

APPLICANT: SeAH Networks Co., Ltd.

Model(s):

T-7DIS-WF-KIT

**EUT Type:** 

**NIAGARA** 

FCC Rule Part(s):

Part 15 Subpart C (15.239)

**Application Type:** 

Certification

Frequency Range

88.5 ~ 107.9 MHz

FCC Rule Part(s)

FCC Part 15 Low Power Communication Device TX (DXX)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.862

Report prepared by

: Hyo Sun Kwak

Test engineer of RF Team

Approved by

: Sang Jun Lee

Manager of RF Team

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



# **Table of Contents**

1. GENERAL INFORMATION	3
2. EUT DESCRIPTION	3
3. TEST METHODOLOGY	4
3.1 EUT CONFIGURATION	4
3.2 EUT EXERCISE	4
3.3 GENERAL TEST PROCEDURES	4
3.4 DESCRIPTION OF TEST MODES	4
4. INSTRUMENT CALIBRATION	5
5. FACILITIES AND ACCREDITATIONS	5
5.1 FACILITIES	5
5.2 EQUIPMENT	5
6. ANTENNA REQUIREMENTS	5
7. TEST RESULT	6
7.1 20dB Bandwidth Measurement	7
7.2 Field Strength Measurements	1 0
7.3 Number of Channels (Tuning Range)	1 2
7.4 Radiated Spurious Emissions	1 3
7.5 POWERLINE CONDUCTED EMISSIONS	1 8
9. LIST OF TEST EQUIPMENT	2 4

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



## 1. GENERAL INFORMATION

Applicant: SeAH Networks Co., Ltd.

**Address:** 9F, IT Venture Tower East Wing 78 Karak-Dong,

Songpa-Gu, Seoul, Korea(138-950)

FCC ID: XQE-T-7DIS-WF-KIT

Application Type: Certification
EUT: NIAGARA
Model name(s): T-7DIS-WF-KIT

**Date of Test:** September 14, 2009 ~ September 22, 2009

Contact person: Name: Kyung Soo Lee

Phone #: +82-2-2142-0881 Fax #: +82-2-2142-0808

## 2. EUT DESCRIPTION

Product	NIAGARA
Model name(s):	T-7DIS-WF-KIT
Power Supply	DC 5.0 V
Frequency Range	88.5 ~ 107.9 MHz
FCC CLASSIFICATION	FCC Part 15 Low Power Communication Device TX (DXX)
Antenna Specification	Antenna type: WIRE ANTENNA

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT

Page 3 of 24



### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz(ANSI C63.4-2003)

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.205, 15.207, 15.209 and 15.239 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

#### 5. FACILITIES AND ACCREDITATIONS

#### **5.1 FACILITIES**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

#### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 6. ANTENNA REQUIREMENTS

#### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT

<sup>\*</sup> The antennas of this E.U.T are permanently attached.

<sup>\*</sup>The E.U.T Complies with the requirement of §15.203



### 7. TEST RESULT

## **Summary**

The intentional radiator has been bench tested to demonstrate compliance with the relevant FCC performance and procedural standards. The volume was set to maximum with the cell phone software playing the MP3 file and the FM transmitter was transmitting at full power on the selected frequency. The frequencies tested are high (107.9MHz), middle(97.7 MHz) and low (88.5 MHz) of the allocated band. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of antenna and I/O cabing, antenna seach height, and antenna polarization. The unit was tested at the lowest, highest and mid frequency of operation in three orthogonal positions with the worst case reported.

Method/System:	FM Transmitter	
Number of Channels :	_5	

#### **Summary of Test Results**

FCC Part	RSS	Test Description	Toot Limit	Test	Test
Section(s)	Section		Test Limit	Condition	Result
TRANSMITT	ER MODE (T	X)			
15.239(a)	RSS-210	20dB Bandwidth	< 200 kHz		PASS
	[A.2.8]				
15.239(b)	RSS-210	Field Strength	< 250 uV/m @ 3 meters		PASS
	[A.2.8]				
15.239(a)	RSS-210	Number of Channels	200 Channels		PASS
	[A.2.8]			Radiated	
15.205	RSS-210	General Field Strength	<fcc 15.209="" limits="" or<="" td=""><td></td><td>PASS</td></fcc>		PASS
15.209	[A.2.8]	Limits( Restricted Bands	<rss-210 3limits<="" table="" td=""><td></td><td></td></rss-210>		
		and Radiated Emission	Emissions in restricted bands		
		Limits)	must meet the radiated limits		
			detailed in 15.209		
15.207	RSS-GEN	AC Conducted Emissions	<fcc 15.207="" limits="" or<="" td=""><td>Line</td><td>PASS</td></fcc>	Line	PASS
	[7.2.2]	150kHz ~ 30MHz	<rss-gen 2="" limits<="" table="" td=""><td>Conducted</td><td></td></rss-gen>	Conducted	

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



#### 7.1 20dB Bandwidth Measurement

Test Requirements and limit, §15.239(a)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. For maximum power and bandwidth the volume was set to maximum with the cell phone software playing the MP3 file.

The maximum permissible 20dB bandwidth is 200 kHz.

#### **■ TEST PROCEDURE**

The spectrum analyzer is set to:

- 1. Span = 200 kHz
- 2. RBW = 30 kHz
- 3. VBW = 100 kHz

### **■ TEST RESULTS**


## 20dB Bandwidth Measurements

FREQUENCY (MHz)	20dB BW (kHz)	Limit (kHz)	Results
88.5	105.6	200	Pass
97.7	126.4	200	Pass
107.9	102.8	200	Pass

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT




## 20dB Bandwidth plot (Low Channel: 88.5 MHz)

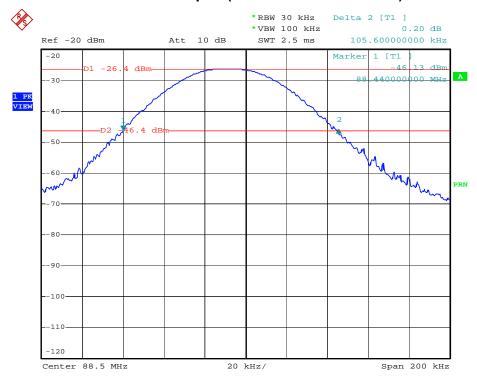

Date: 14.SEP.2009 09:43:29

## 20dB Bandwidth plot (Mid Channel: 97.7 MHz)

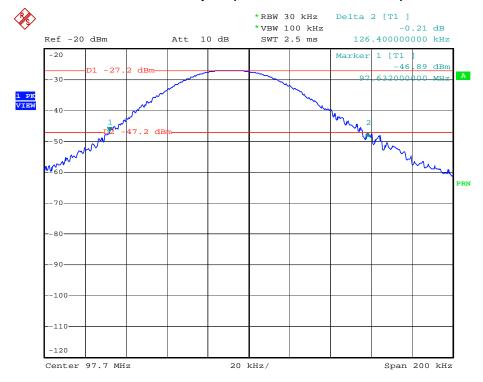


Date: 14.SEP.2009 09:45:19

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



# 20dB Bandwidth plot ( High Channel : 107.9 MHz)

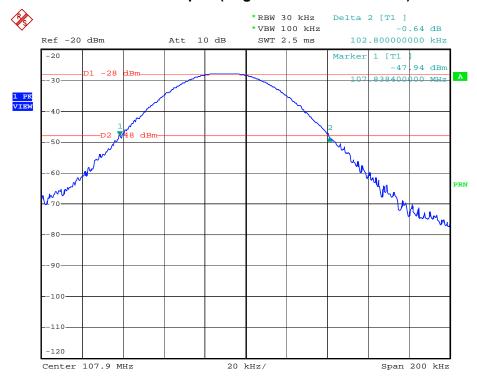

Date: 14.SEP.2009 09:46:12

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



# 7.2 Field Strength Measurements

## Test Requirements and limit, §15.239

### Note:

The unit was tested with the lowest, highest and mid channels. Three orthogonal positions were tested with the worst case levels reported.

## **■ TEST RESULTS**

## Field Strength Measurements at 3 meters

Frequency [MHz]	Reading dBuV	Ant. Factor	Cable Loss	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]	Detect
88.5	33.68	8.3	2.2	Н	2.5	90.5	44.18	67.96	23.78	PK
88.5	31.99	8.3	2.2	Н	2.5	90.5	42.49	47.96	5.47	AV
88.5	34.71	8.3	2.2	V	1.0	37.8	45.21	67.96	22.75	PK
88.5	33.45	8.3	2.2	V	1.0	37.8	43.95	47.96	4.01	AV
97.7	31.04	8.8	2.4	Н	1.4	273.8	42.24	67.96	25.72	PK
97.7	28.83	8.8	2.4	Н	1.4	273.8	40.03	47.96	7.93	AV
97.7	32.54	8.8	2.4	V	1.3	249.6	43.74	67.96	24.22	PK
97.7	30.67	8.8	2.4	V	1.3	249.6	41.87	47.96	6.09	AV
107.9	29.05	9.7	2.5	Н	1.4	97.4	41.25	67.96	26.71	PK
107.9	25.24	9.7	2.5	Н	1.4	97.4	37.44	47.96	10.52	AV
107.9	31.78	9.7	2.5	V	1.0	172.0	43.98	67.96	23.98	PK
107.9	29.50	9.7	2.5	V	1.0	172.0	41.70	47.96	6.26	AV

- 1. The antenna is manipulated through typical positions, polarity and length during the testing.
- 2. The EUT is supplied with the nominal DC voltage or / and new / fully re-charged battery.
- 3. Levels recorded in the above table are average and peak measurements.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



## 7.2.1 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 25.44 dBuV is obtained. The Antenna Factor of 8.1 dB/m and a Cable Factor of 2.2 dB is added. The 35.74 dBuV/m value is mathematically converted to its corresponding level in uV/m.

FS = 26.4 + 8.1 + 2.2 = 36.7 dBuV/m

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



# 7.3 Number of Channels (Tuning Range)

## Test Requirements and limit, §15.239

Measurement is made while EUT is operating in transmitting mode.

## Frequency / Channel Operations

Ch.	Frequency(MHz)
00	88.5
01	92.5
02	97.7
03	104.9
04	107.9

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



## 7.4 Radiated Spurious Emissions

## <u>LIMIT</u>

1. 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)		
0.009 - 0.490	2400/F(kHz)	300		
0.490 - 1.705	24000/F(kHz)	30		
1.705 – 30	30 (29.5 dBuV/m)	30		
30-88	100 (40 dBuV/m)	3		
88-216	150 (43.5 dBuV/m)	3		
216-960	200 (46 dBuV/m)	3		
Above 960	500 (54 dBuV/m)	3		


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	

Page 1 3 of 24




#### **Test Configuration**

#### **Below 30 MHz**

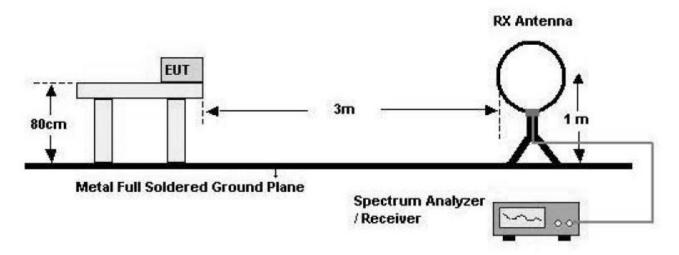

#### 30 MHz - 1 GHz

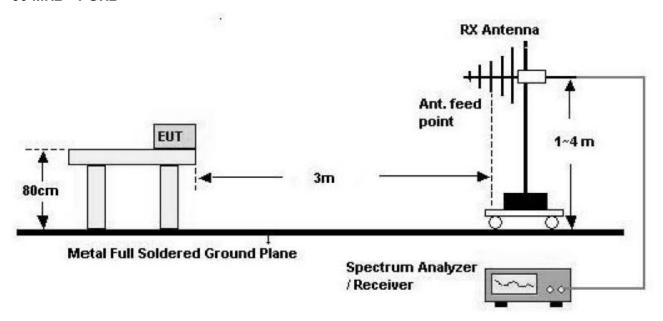

#### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



## 7.4.1 Radiated Spurious Measurements

## Test Requirements and limit, §15.239

Mode:	TX
Measurement Distance :	3 Meters
Operating Frequency :	107.9 MHz

## Radiated Spurious Measurements at 3 – meters

Frequency [MHz]	Reading dBuv	Ant. Factor	Cable Loss dB	ANT Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]
215.80	-3.43	10.4	1.6	Н	1.3	128.4	18.10	43.5	25.40
215.80	0.03	10.4	1.6	٧	1.0	268.4	19.30	43.5	24.20
323.69	-3.43	13.5	1.9	Н	1.5	118.2	22.18	46.0	23.82
323.69	-0.37	13.5	1.9	V	1.0	258.3	21.66	46.0	24.34

- 1. The antenna is manipulated through typical positions, polarity and length during the testing
- 2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
- 3. The spectrum is measured from 9kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- 4. There is detected level above reference noise floor spectrum analyzer. Except above frequency.

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



## Radiated Spurious Measurements(cont.)

## Test Requirements and limit, §15.239

Mode:	TX
Measurement Distance :	3 Meters
Operating Frequency :	97.7 MHz

## Radiated Spurious Measurements at 3 – meters

Frequency [MHz]	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]
195.40	-2.96	10.3	1.5	Н	1.2	98.4	17.66	43.5	25.84
195.40	-0.45	10.3	1.5	٧	1.0	212.4	17.65	43.5	25.85
293.10	-3.02	12.9	1.9	Н	1.1	103.2	20.89	46.0	25.11
293.10	-0.76	12.9	1.9	٧	1.0	245.1	20.77	46.0	25.23

- 1. The antenna is manipulated through typical positions, polarity and length during the testing
- 2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
- 3. The spectrum is measured from 9kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- 4. There is detected level above reference noise floor spectrum analyzer. Except above frequency

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



## Radiated Spurious Measurements(cont.)

## Test Requirements and limit, §15.239

Mode:	TX
Measurement Distance :	3 Meters
Operating Frequency :	88.5 MHz

## Radiated Spurious Measurements at 3 – meters

Frequency [MHz]	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]
177.00	-1.98	11.7	1.4	Н	1.2	78.4	18.09	43.5	25.41
177.00	-1.86	11.7	1.4	٧	1.0	154.8	17.86	43.5	25.64
265.50	-0.81	11.9	1.8	Н	1.5	85.3	20.06	46.0	25.94
265.50	-1.32	11.9	1.8	٧	1.3	162.0	19.39	46.0	26.61

- 1. The antenna is manipulated through typical positions, polarity and length during the testing
- 2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
- 3. The spectrum is measured from 9kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- 4. There is detected level above reference noise floor spectrum analyzer. Except above frequency

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



## 7.5 POWERLINE CONDUCTED EMISSIONS

#### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Eroquenov Bongo (MHz)	Limits (dBμV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

#### **Test Configuration**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

#### **TEST PROCEDURE**

- 1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



## **■ RESULT PLOTS**

#### HCT


#### **EMC**

EUT: T-7DIS-WF-KIT
Manufacturer: SeAH Networks
Operating Condition: FMT
Test Site: SHIELD ROOM
Operator: HS-KWKA
Test Specification: CISPR22 CLASS B

Comment:

#### SCAN TABLE: "EN 55022 Voltage"

Short Desc:	ription:	EN	55022 Vol	tage		
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
			Average			

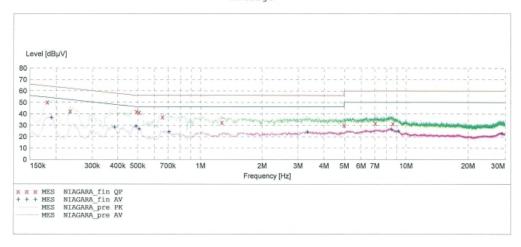

#### MEASUREMENT RESULT: "NIAGARA\_fin QP"

					6PM	9/22/2009 2:3
PE	Line	Margin	Limit	Transd	Level	Frequency
		dB	dΒμV	dB	dBµV	MHz
	1	14.1	64	10.0	50.30	0.182100
	1	20.0	62	10.1	42.30	0.234100
	1	14.1	56	10.1	42.00	0.494100
	1	14.8	56	10.1	41.20	0.508000
	1	18.8	56	10.1	37.20	0.660000
	1	23.6	56	10.2	32.40	1.268000
	1	25.8	56	10.5	30.20	5.000000
	1	28.1	60	10.8	31.90	7.040000
	1	28.5	60	11.0	31.50	8.608000

#### MEASUREMENT RESULT: "NIAGARA fin AV"

9/22/2009 2:36PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.190100	36.60	10.0	54	17.4	1	
0.386100	28.40	10.1	48	19.8	1	

Page 1/2 9/22/2009 2:36PM HCT Lab.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



## MEASUREMENT RESULT: "NIAGARA\_fin AV"

(continued) Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.490100	29.30	10.1	46	16.8	1	
0.508000	26.70	10.1	46	19.3	1	
0.708000	24.30	10.1	46	21.7	1	
3.332000	24.10	10.4	46	21.9	1	
8.460000	26.40	11.0	50	23.6	1	
9.136000	25.00	11.0	50	25.0	1	-
28.964000	22.90	12.8	50	27.1	1	

Page 2/2 9/22/2009 2:36PM HCT Lab.

HCT PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT




#### HCT

#### EMC

EUT: T-7DIS-WF-KIT
Manufacturer: SeAH Networks
Operating Condition: FMT
Test Site: SHIELD ROOM
Operator: HS-KWKA
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "EN 55022 Voltage"

Short Desc	ription:	EN	55022 Vol	tage		
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak Average	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak Average	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak Average	10.0 ms	9 kHz	ESH3-Z5-2009.9.16

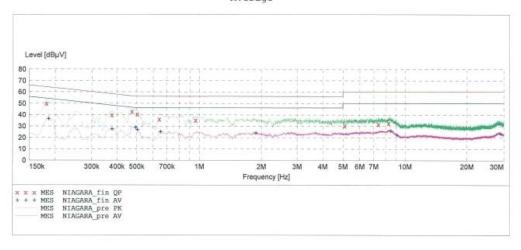

#### MEASUREMENT RESULT: "NIAGARA\_fin QP"

- (이라) (현기는 아이들의 아이들이 얼마나 되었다.) [편	OPM					
Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dΒμV	dB	dBμV	dB		
0.182100	50.00	10.0	64	14.4	1	
0.378100	39.80	10.1	58	18.6	1	
0.474100	42.70	10.1	56	13.7	1	
0.504000	40.50	10.1	56	15.5	1	
0.644000	36.00	10.1	56	20.0	1	
0.960000	35.10	10.1	56	20.9	1	
5.092000	30.40	10.6	60	29.6	1	
7.376000	31.70	10.9	60	28.3	1	
8.288000	32.70	10.9	60	27.3	1	

## MEASUREMENT RESULT: "NIAGARA\_fin AV"

9/22/2009 2:4	OPM					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.186100	36.70	10.0	54	17.5	1	
0.378100	27.60	10.1	48	20.8	1	

Page 1/2 9/22/2009 2:40PM HCT Lab.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



## MEASUREMENT RESULT: "NIAGARA\_fin AV"

(continued) Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.494100	29.00	10.1	46	17.1	1	
0.504000	27.00	10.1	46	19.0	1	
0.652000	25.20	10.1	46	20.8	1	
1.876000	24.00	10.2	46	22.0	1	
8.480000	25.90	11.0	50	24.1	1	
9.128000	22.30	11.0	50	27.7	1	
28.944000	23.60	12.8	50	26.4	1	

Page 2/2 9/22/2009 2:40PM HCT Lab.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT



# 8. CONCLUSION

The data collected relate only the item(s) tested and show that the SeAH Networks Co., Ltd. Portable Navigation FCC ID: XQE-T-7DIS-WF-KIT is in compliance with Part 15 Subpart C 15.239) of the FCC Rules.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	



# 9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	04/10/2010	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	06/13/2010	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/18/2010	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/30/2009	375.8810.352
MITEQ	AMF-60-0010 1800-35-20P/AMP	Annual	05/20/2010	1200937
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	03/26/2010	147
Rohde & Schwarz	6502/Loop Antenna	Biennial	12/26/2009	9009-2536
Rohde & Schwarz	FSP30/Spectrum Analyzer	Annual	07/31/2010	839117/011
Agilent	E4416A /Power Meter	Annual	01/21/2010	GB41291412
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/29/2010	1
Hewlett Packard	11636B/Power Divider	Annual	12/24/2009	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/07/2010	3110117

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Test Dates:	EUT Type:	FCC ID:	
HCTR0909FR08	September 22, 2009	NIAGARA	XQE-T-7DIS-WF-KIT	