







ISO/IEC17025 Accredited Lab.

Report No: FCC1412060-01 File reference No: 2014-12-16

Applicant: GUANGZHOU SUNDAY ELECTRONICS CO., LTD

Product: Wireless Receiver

Model No: RX101

Brand Name: SUNDAY

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: December 16, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Date: 2014-12-16



Page 2 of 35

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Date: 2014-12-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	6
3.1	Summary of Test Results.	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	11
6.1	Test Method and Test Procedure.	11
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	12
6.5	Test Result.	13
7.0	Band Edge	2
7.1	Test Method and Test Procedure.	2
7.2	Radiated Test Setup.	2
7.3	Configuration of the EUT	2
7.4	EUT Operating Condition.	2
7.5	Band Edge Limit	2
7.6	Band Edge Test Result.	22
8.0	Antenna Requirement	26
9.0	20dB bandwidth measurement	27
10.0	FCC ID Label	30
11 0	Photo of Test Setup and FLIT View	3

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-12-16



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: GUANGZHOU SUNDAY ELECTRONICS CO.,LTD

Address: No.236-238, Minsheng Rd., Lanhe Town, Nansha District, Guangzhou, China

Telephone: 020-84928933-805 Fax: 020-84928823

1.3 Description of EUT

Product: Wireless Receiver

Manufacturer: GUANGZHOU SUNDAY ELECTRONICS CO.,LTD

Address: No.236-238, Minsheng Rd., Lanhe Town, Nansha District, Guangzhou, China

Brand Name: SUNDAY
Model Number: RX101
Additional Model Name N/A
Additional Trade Name N/A

Rating: DC5.0V, Powered by PC

Modulation Type: GFSK

Operation Frequency 2402-2480MHz

Antenna Designation PCB Printed antenna, which is built-in, designed as an indispensable part of the

EUT. Antenna gain is 0dBi

1.4 Submitted Sample

1 Sample

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC1412060-01 Page 5 of 35

Date: 2014-12-16



1.5 Test Duration: 2014-12-03 to 2014-12-15

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0		Test Equip	ments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2014-08-23	2015-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2014-08-24	2015-08-23
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2014-08-23	2015-08-22
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2014-08-22	2015-08-21
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2014-08-23	2015-08-22
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2014-08-26	2015-08-25
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2014-08-26	2015-08-25
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-22	2015-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-22	2015-08-21
EMI Test Receiver	RS	ESCS30	100139	2014-08-23	2015-08-22

Page 6 of 35

Report No: FCC1412060-01

Date: 2014-12-16



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the	ie ionowing speci	iications.	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Page 7 of 35


Report No: FCC1412060-01

Date: 2014-12-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Actual Working Voltage and Frequency: 120V~, 60Hz (PC Host)

Block diagram of Test setup

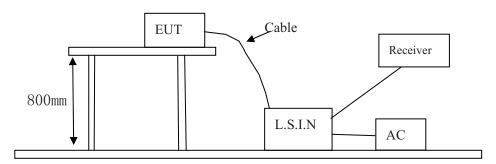

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Windless Dessiver	GUANGZHOU SUNDAY ELECTRONICS	RX101	VOI CD1116101
Wireless Receiver	CO.,LTD	KA101	XQLSD1116101

Page 8 of 35

Report No: FCC1412060-01

Date: 2014-12-16



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
Notebook	LENOVO	E43L	FCC DOC	
Notebook	IBM	R4	FCC DOC	
Passive				
Earphone			FCC VOC	Data cable of 1.5m length unshielded
LCD Monitor	SUMSANG	PH2450	FCC DOC	
Monitor	DELL	D710	FCC DOC	

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Fraguanay(MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2014-12-16



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

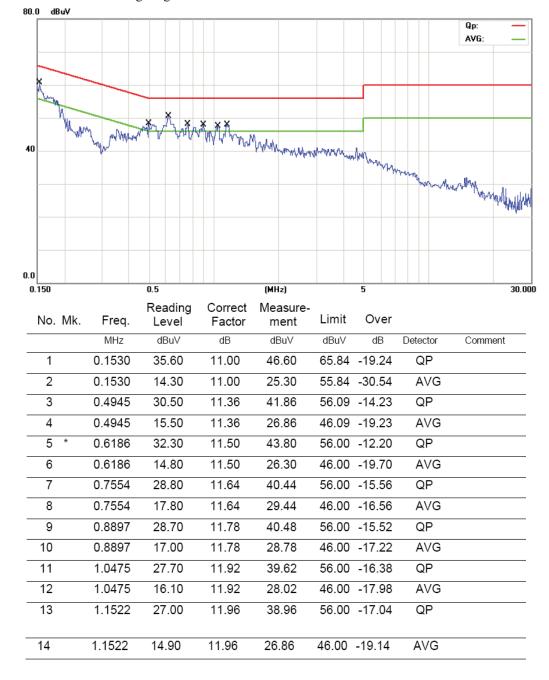

Date: 2014-12-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

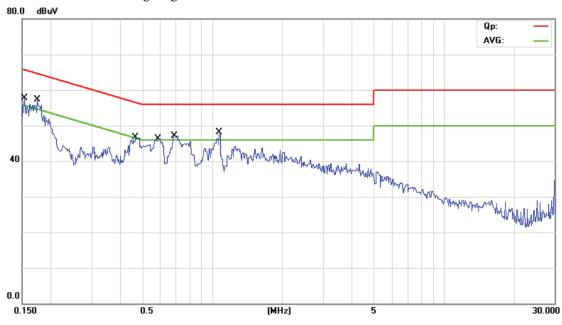

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1537	38.10	11.00	49.10	65.80	-16.70	QP	
2	0.1537	14.80	11.00	25.80	55.80	-30.00	AVG	
3	0.1734	38.70	11.02	49.72	64.80	-15.08	QP	
4	0.1734	10.90	11.02	21.92	54.80	-32.88	AVG	
5	0.4634	27.40	11.33	38.73	56.63	-17.90	QP	
6	0.4634	6.40	11.33	17.73	46.63	-28.90	AVG	
7 *	0.5854	30.40	11.46	41.86	56.00	-14.14	QP	
8	0.5854	9.60	11.46	21.06	46.00	-24.94	AVG	
9	0.6870	28.60	11.57	40.17	56.00	-15.83	QP	
10	0.6870	9.30	11.57	20.87	46.00	-25.13	AVG	
11	1.0697	23.60	11.93	35.53	56.00	-20.47	QP	
12	1.0697	8.30	11.93	20.23	46.00	-25.77	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 11 of 35

Report No: FCC1412060-01


Date: 2014-12-16



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

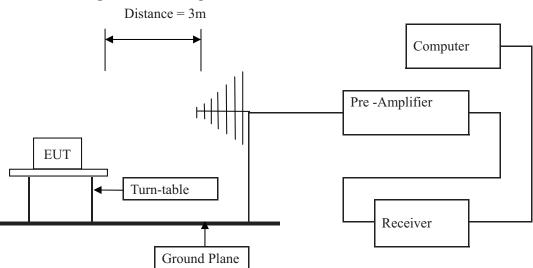

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Page 12 of 35

Report No: FCC1412060-01

Date: 2014-12-16



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK

Report No: FCC1412060-01 Page 13 of 35

Date: 2014-12-16



6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Product:	Wireless Receiver	Test Mode:	Low Channel—Keep Transmitting
Test Item:	Fundamental Radiated Emission	Temperature:	25℃
	Data		
Test Voltage:	5.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2402	83.48(PK)	Н	114/94	-10.52
2402	83.58(PK)	V	114/94	-10.42
4804		H/V	74/54	
7206		H/V	74/54	
9608		H/V	74/54	
12010		H/V	74/54	
14412		H/V	74/54	
16814		H/V	74/54	
19216		H/V	74/54	
21618		H/V	74/54	
24020		H/V	74/54	

Page 14 of 35

Report No: FCC1412060-01



Product:	Wireless Receiver	Test Mode:	Middle Channel—Keep Transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2448	84.28(PK)	Н	114/94	-9.72
2448	84.52(PK)	V	114/94	-9.48
4896		H/V	74/54	
7344		H/V	74/54	
9792		H/V	74/54	
12240		H/V	74/54	
14688		H/V	74/54	
17136		H/V	74/54	
19584		H/V	74/54	
22032		H/V	74/54	
24480		H/V	74/54	

Page 15 of 35

Report No: FCC1412060-01

Date: 2014-12-16



Product:	Wireless Receiver	Test Mode:	High Channel—Keep Transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2480	85.06(PK)	Н	114/94	-8.93
2480	85.57(PK)	V	114/94	-8.43
4960		H/V	74/54	
7440		H/V	74/54	
9920		H/V	74/54	
12400		H/V	74/54	
14880		H/V	74/54	
17360		H/V	74/54	
19840		H/V	74/54	
22320		H/V	74/54	
24800		H/V	74/54	

Note: (1) PK= Peak, AV= Average


- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.
- (6) for fundamental emissions measurement, RBW=3MHz, VBW=10MHz

Date: 2014-12-16




Please refer to the following test plots for details:

Low Channel: Horizontal

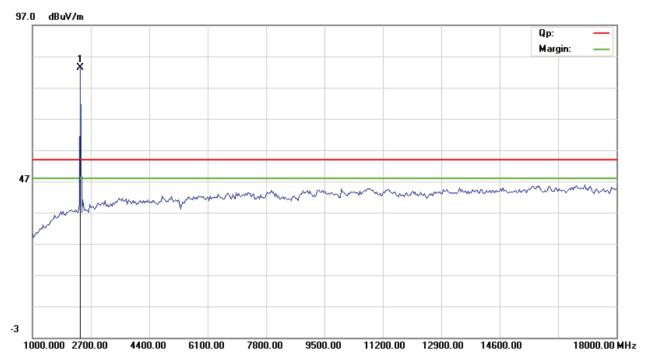

Low Channel: Vertical

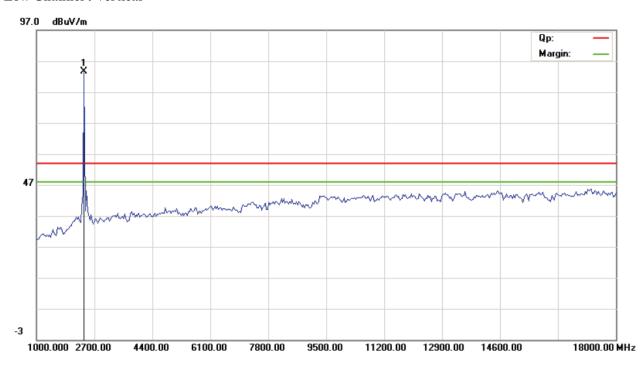

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 17 of 35

Report No: FCC1412060-01


Date: 2014-12-16



Middle Channel: Horizontal

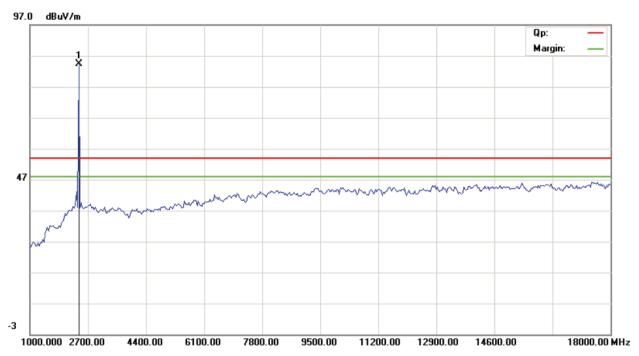

Middle Channel: Vertical

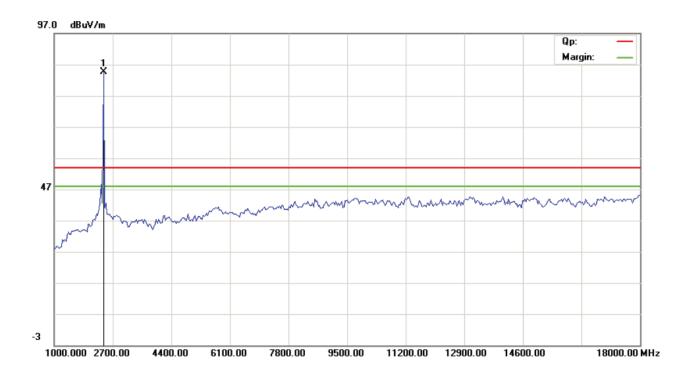

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 18 of 35

Report No: FCC1412060-01

Date: 2014-12-16



High Channel: Horizontal

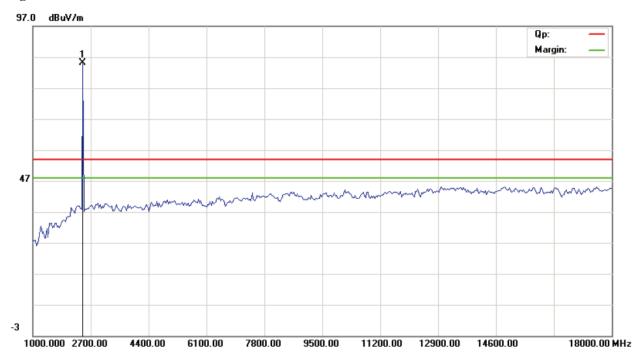

High Channel: Vertical



Note: for the radiated emissions from 18-25GHz, it was the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Date: 2014-12-16




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting

Mode: Low Channel (worst case)

Results: Pass

Please refer to following diagram for individual

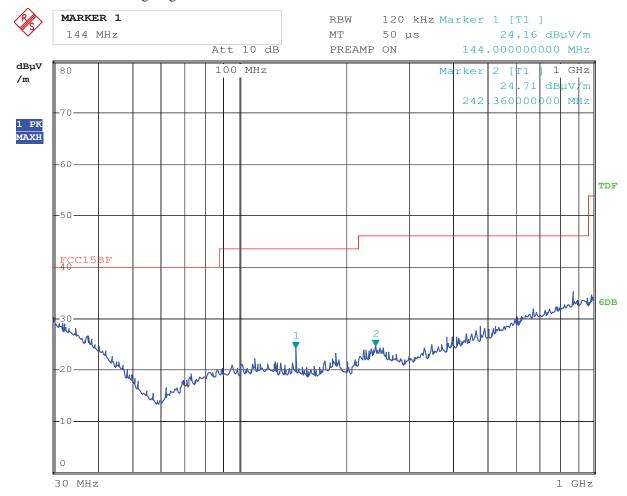

Date: 3.DEC.2014 10:13:02

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
144.000	24.16	Н	43.50
242.360	24.71	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

Page 20 of 35



Date: 2014-12-16




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting

Mode: Low Channel (worst case)

Results: Pass

Please refer to following diagram for individual

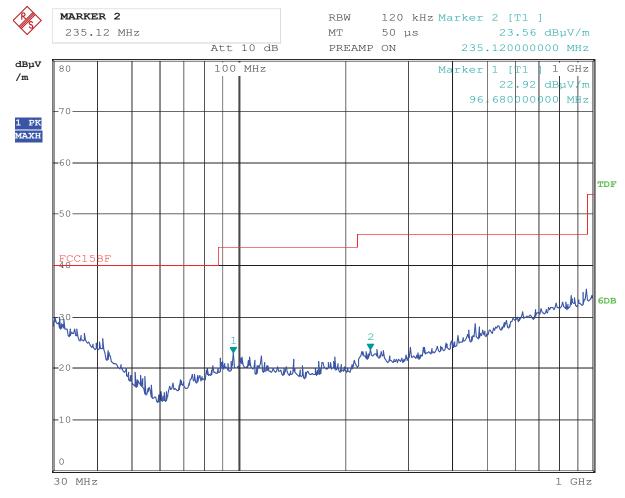

Date:	3.DEC.2014	10:09:41

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
235.120	23.56	V	46.00
96.680	22.92	V	43.50

Date: 2014-12-16




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=VBW=1MHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

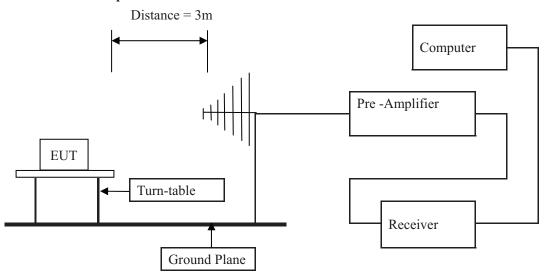

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Remark: low, mid and high channel all have been tested; only worse case is reported.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 22 of 35

Report No: FCC1412060-01

Date: 2014-12-16




7.6 Restrict Band Test Result

Product:	Wireles	s Receiver	Test Mode:	Low Channel
Mode	Keeping Transmitting		Test Voltage	DC5V
Temperature	24 (deg. C	Humidity	56% RH
Test Result:	F	Pass	Detector	PK
2390MHz	tle Keeping Transfer ature 24 deg. Consult: Pass PASS PK (dB μ V/m) AV(dB μ V/m) PK (dB μ V/m)	39.61	Limit	74(dBµV/m)
2390IVITIZ	AV(dBμV/m)		Lillit	54(dBµV/m)
2400MHz	PK (dBμV/m)	44.69	Limit	74(dBµV/m)
2400MIZ	AV(dBμV/m)		Lillill	$54(dB\mu V/m)$

Test Figure:

Horizontal:

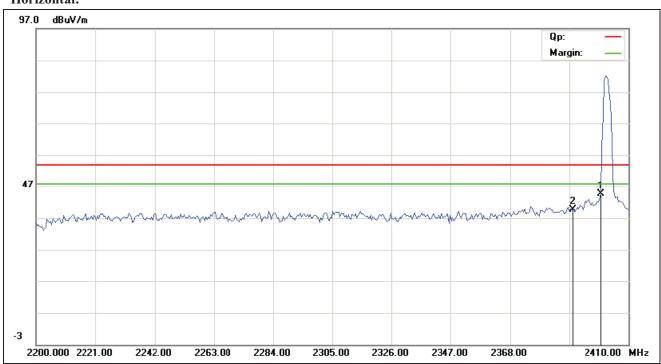

Page 23 of 35

Report No: FCC1412060-01

Date: 2014-12-16




7.6 Restrict Band Test Result

Product:	Wireles	s Receiver	Test Mode:	Low Channel
Mode	Keeping	Transmitting	Test Voltage	DC5V
Temperature	24 0	deg. C	Humidity	56% RH
Test Result:	F	ass	Detector	PK
2200MHz	Mode Keeping Transmitting perature 24 deg. C Result: Pass PK (dBμV/m) 38.53 AV(dBμV/m)	38.53	Limit	74(dBµV/m)
2390MHZ			LIIIII	54(dBµV/m)
2400MHz	PK (dBμV/m)	44.46	Limit	74(dBµV/m)
	AV(dBμV/m)			54(dBµV/m)

Test Figure:

Vertical:

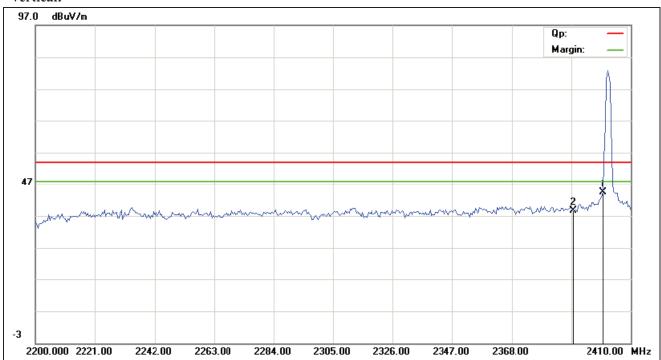

Page 24 of 35

Report No: FCC1412060-01

Date: 2014-12-16




7.6 Restrict Band Test Result

Product:	Wireless Receiver		Wireless Receiver		Test Mode:	High Channel
Mode	Keeping Transmitting		Keeping Transmitting		Test Voltage	DC5V
Temperature	24 (24 deg. C		56% RH		
Test Result:	Pass		Detector	PK		
2492 5MHz	PK (dBμV/m)	36.98	Limit	$74(dB\mu V/m)$		
2483.5MHz	$AV(dB\mu V/m)$		Lillit	54(dBµV/m)		

Test Figure:

Horizontal:

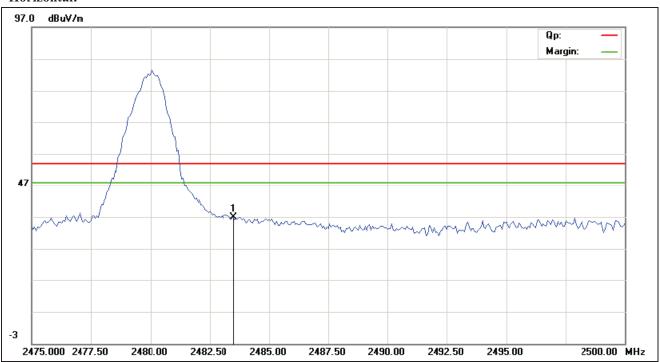

Page 25 of 35

Report No: FCC1412060-01

Date: 2014-12-16




7.6 Restrict Band Test Result

Product:	Wireless Receiver		Wireless Receiver		Test Mode:	High Channel
Mode	Keeping Transmitting		Test Voltage	DC5V		
Temperature	24 (24 deg. C		56% RH		
Test Result:	F	Pass		PK		
2483.5MHz	PK (dBμV/m)	36.52	Limit	74(dBµV/m)		
2463.3WIIIZ	$AV(dB\mu V/m)$		Lillit	54(dBµV/m)		

Test Figure:

Vertical:

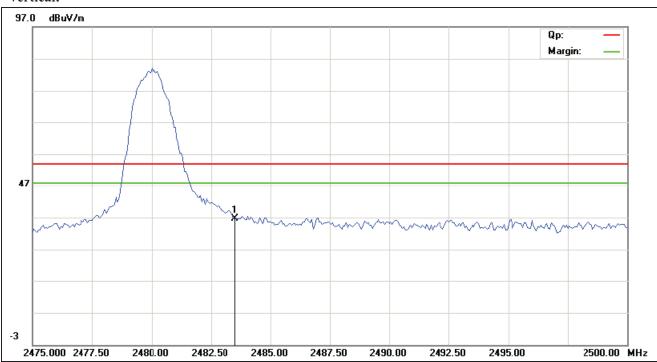

Date: 2014-12-16



Page 26 of 35

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB permanent antenna, fulfill the requirement of this section.

Test Result: Pass

Page 27 of 35

Report No: FCC1412060-01



Product:	Wireless Receiver Keeping Transmitting		ict: Wireless Receiver Test Mode:		t Mode:	Low Channel DC5V		
Mode			Test	Voltage				
Temperature	24 deg.	С,	Humic	Humidity		56% RH		
Test Result:	Pass		De	etector		P	K	
0dB Bandwidth 1.070MHz					_	_		
>	Delta 1 [T1	.]	RBW	30 kF	Iz 1	RF Att	20 dB	
Ref Lvl		0.27 dB	VBW	100 kF	łz			
10 dBm	1.070	14028 MHz	SWT	6 ms	3 1	Unit	dBm	n
10				v ₁	[T1]	-39	.19 dBm	Æ
						2.40129	259 GHz	
0				1	[T1]		.27 dB	
				v ₂	[T1]		028 MHz	II .
-10					1 1 1 1		391 GHz	II .
		2 V						
-20		$\overline{}$						
1MAX		/\						1M
-30	M.	Marina Ma	Mun					
1		WYU	** ~~	- 1				
-40 $-D1$ -38.437	d/Bm				l solo	1.		
-30 -40 -50					*/		marly w	1
-50 M								
-60								
-70								
-80								
-90								
Center 2.40	2 GHz	200 }	Hz/	<u> </u>		sa2	an 2 MHz	23

Page 28 of 35

Report No: FCC1412060-01



Product: Wireless Receiver		Test Mode:		Middle Channel					
Mode Keeping Transmitting Temperature 24 deg. C,			Test	Voltage	DC5V				
			Humidity		56% RH				
Test Result:				PK					
dB Bandwidth	1.138M	Hz							
<u>, </u>	Delta 1 [T	1]	RBW	30 kH	Iz RF	Att 2	20 dB		
Ref Lvl		-0.32 dB	VBW	100 kH	łz				
10 dBm	1.13	327655 MHz	SWT	6 ms	s Uni	t	dBm	l	
10				v ₁	[T1]	-42.0)4 dBm	_	
					I	.4472444		A	
0				1	[T1]	-0.3	32 dB		
					1	.1382765	5 MHz		
-10				v ₂	[T1]	-22.4	ll dBm		
					2	.4479539	1 GHz		
-20		2							
1MAX								1M	
-30	. , ,,,,,,	Varan 1		5 .					
-40 D1 -42 Tarv	TRANSPORT			T MUM1					
Man Man	BBM WWW			•	whom	me Men	o		
-50							-~~~~		
-60				+					
-70									
-80									
-90									
Center 2.448	GHz	200 k	Hz/			Span	2 MHz		

Page 29 of 35

Report No: FCC1412060-01



Product: Wireless Receiver			Tes	t Mode:	High Channel				
Mode				Test Voltage		DC5V			
Temperature 24 deg. C, Test Result: Pass			Humidity Detector		56% RH PK				
									OdB Bandwidth
Ref Lvl	Delta		01 10	RBW	30 k		RF Att	20 dB	
Ref Lvi 10 dBm		-2.81 dB 1.13426854 MHz		VBW 100 kH					m
10 (18)		1.134200) J4 MIIZ	SWI			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	T	
					v ₁	[T1]		1.75 dBr	A
0								4449 GHz	z
					▲ 1	[T1]		2.81 dB	
					v ₂	[T1]		6854 MHz 4.39 dBr	- 11
-10						1 + + 1		4990 GHz	
-20			2						1
1MAX			X						1M
-30			 						1
		A la B	/ \	Marchala					
-40 <u>1</u>	men Manda da d	Mar Market	W 4	The All	CALL.				-
-D1 -44	dBm 444	Ť							+
-50						mhi	·····a.a.	mlling ar	_
rv									
-60									
-70									
-80									1
-90									<u> </u>

Report No: FCC1412060-01 Page 30 of 35

Date: 2014-12-16




10.0 FCC ID Label

FCC ID: XQLSD1116101

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

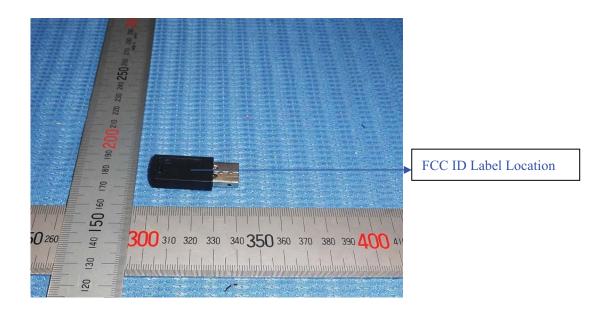

Page 31 of 35


Date: 2014-12-16

Report No: FCC1412060-01



11.0 Photo of testing

11.1 Conducted test View--

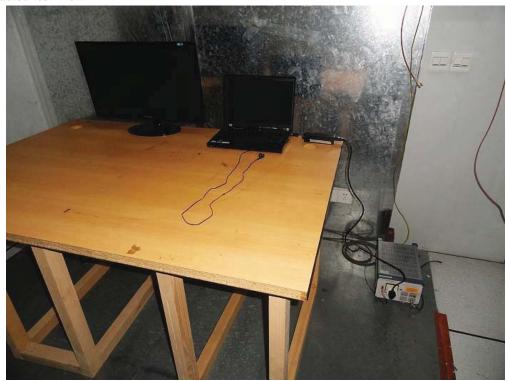

Page 32 of 35

Report No: FCC1412060-01

Date: 2014-12-16



11.2 Radiated emission test view



11.2 Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 33 of 35

Report No: FCC1412060-01

Date: 2014-12-16



11.3 Photo for the EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 34 of 35

Report No: FCC1412060-01

Date: 2014-12-16



Photo for the EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 35 of 35


Report No: FCC1412060-01

Date: 2014-12-16



Interior View

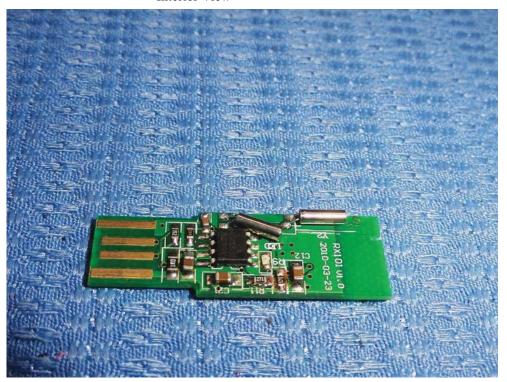

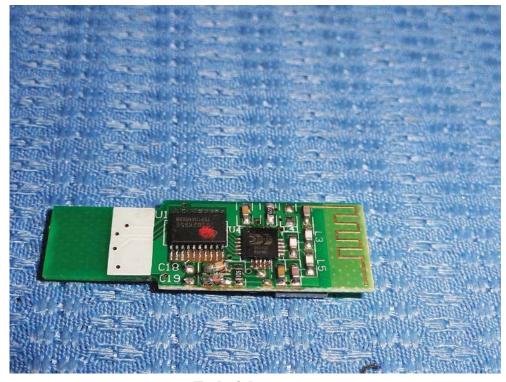

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.