



# InterLab®

## Final Report on

### Wireless Wrist Modem EmSeeQ200

#### HW: 1.0

#### SW: 1.1.0

**Report Reference:** ODE\_MUS\_EMFINDERS\_0902\_FCCa

Test Specification FCC15b

**Date:** September 14, 2009

**Test Laboratory:**

7 layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



DAT-P-192/99-01

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Markus Becker  
Vorstand • Board:  
Chairman Dr. Hans-Jürgen Meckelburg  
René Schildknecht, Dr. Herman Buitkamp, Wilfried Klassmann

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Mr. Boris Binger  
*Date Of Test Report:* 2009/09/14  
*Date of first test:* 2009/09/10  
*Date of last test:* 2009/09/10

### 1.2 Applicant Data

*Company Name:* 7layers Inc.

*Street:* 15 Musick  
*City:* Irvine, CA 92618  
*Country:* USA

*Contact Person:* Mr. Patrick Lomax

*Fax:* +1-949-716-6521

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE


---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01

### 1.4 Signature of the Testing Responsible




Mr. Andreas Petz

responsible for tests performed in: Lab 1, Lab 2



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 1.5 Signature of the Accreditation Responsible



B. Retka (B. RETKA)

Accreditation scope responsible person  
responsible for Lab 1, Lab 2



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: EmSeeQ200

Type / Model / Family:	Wireless Wrist Modem EmSeeQ200
	HW: 1.0
	SW: 1.1.0

#### Manufacturer:

Company Name:	EmFinders
Street:	6170 Research Rd
City:	Frisco, Tx 75034
Country:	USA

#### Contact Person:

Mr. Chris Buehler

cbuehler@emfinders.com

#### Parameter List:

Parameter name	Value
----------------	-------

#### Ancillary Equipment: EPS060100

Type / Model / Family:	AC Charger
------------------------	------------

#### Manufacturer:

Company Name:	CUI Inc.
Street:	20050 SW 112th Ave.
	Tualatin, OR 97062

#### Contact Person:

Mr. Nordstrom

## 2.2 Detailed Description of OUT Samples

### Sample : b01

<i>OUT Identifier</i>	EmSeeQ200
<i>Sample Description</i>	sample #01 7L DE radiated
<i>Serial No.</i>	AAA0501
<i>HW Status</i>	1.0
<i>SW Status</i>	1.1.0

### Sample : AC\_01

<i>OUT Identifier</i>	EPS060100
<i>Sample Description</i>	AC Charger #01 7L DE
<i>Serial No.</i>	EPS060100-P7P
<i>HW Status</i>	not present
<i>SW Status</i>	not present

## 2.3 OUT Features

### Features for OUT: EmSeeQ200

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
<b>Features for scope: FCC_v2</b>			
DC	The OUT is powered by or connected to DC Mains		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		

## 2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE AE01	Pulsar Charger & Protection				Charging Stand

## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>		
	<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
<b>Setup_b01_01</b>				
	Sample: AC_01	AC Charger #01 7L DE	AE AE01	Charging Stand
	Sample: b01	sample #01 7L DE radiated		

### 3 Results

#### 3.1 General

<b>Documentation of tested devices:</b>	Available at the test laboratory.
<b>Interpretation of the test results:</b>	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
<b>Note:</b>	<p>The end-user product EmSeeQ200 is using the GSM module GE864 (see FCC Grant RI7GE864). Technical differences between the module GE864 and this product EmSeeQ200 have been analyzed by the accredited test laboratory. As a consequence of this exercise it was necessary to repeat some specific testing on product EmSeeQ200 in reference to the test plan for the module GE864. This Test Report lists all tests which are related to FCC part 15b that have been carried out on this product EmSeeQ200.</p>

#### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

#### 3.3 List of Test Specification

*Test Specification:* FCC part 2 and 15  
*Date / Version* 2009/03/26 Version: 10-1-08 Edition  
*Title:* PART 2 - GENERAL RULES AND REGULATIONS  
PART 15 - RADIO FREQUENCY DEVICES



---

Reference: ODE\_MUS\_EMFINDERS\_0902\_FCCa

Test Specification FCC15b

### 3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<i>Test (condition)</i>				
<b>15b.1 Conducted Emissions (AC Power Line) §15.107</b> 15b.1; Mode = transmit	Passed	2009/09/10	Lab 1	Setup_b01_01
<b>15b.2 Spurious Radiated Emissions §15.109</b> 15b.2; Mode = transmit	Passed	2009/09/10	Lab 2	Setup_b01_01

### 3.5 Detailed Results

#### 3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

Test: 15b.1; Mode = transmit

Result: Passed

Setup No.: Setup\_b01\_01


Date of Test: 2009/09/10 7:20

Body: FCC47CFRCHIPART15bRADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

##### Detailed Results:

###### AC MAINS CONDUCTED

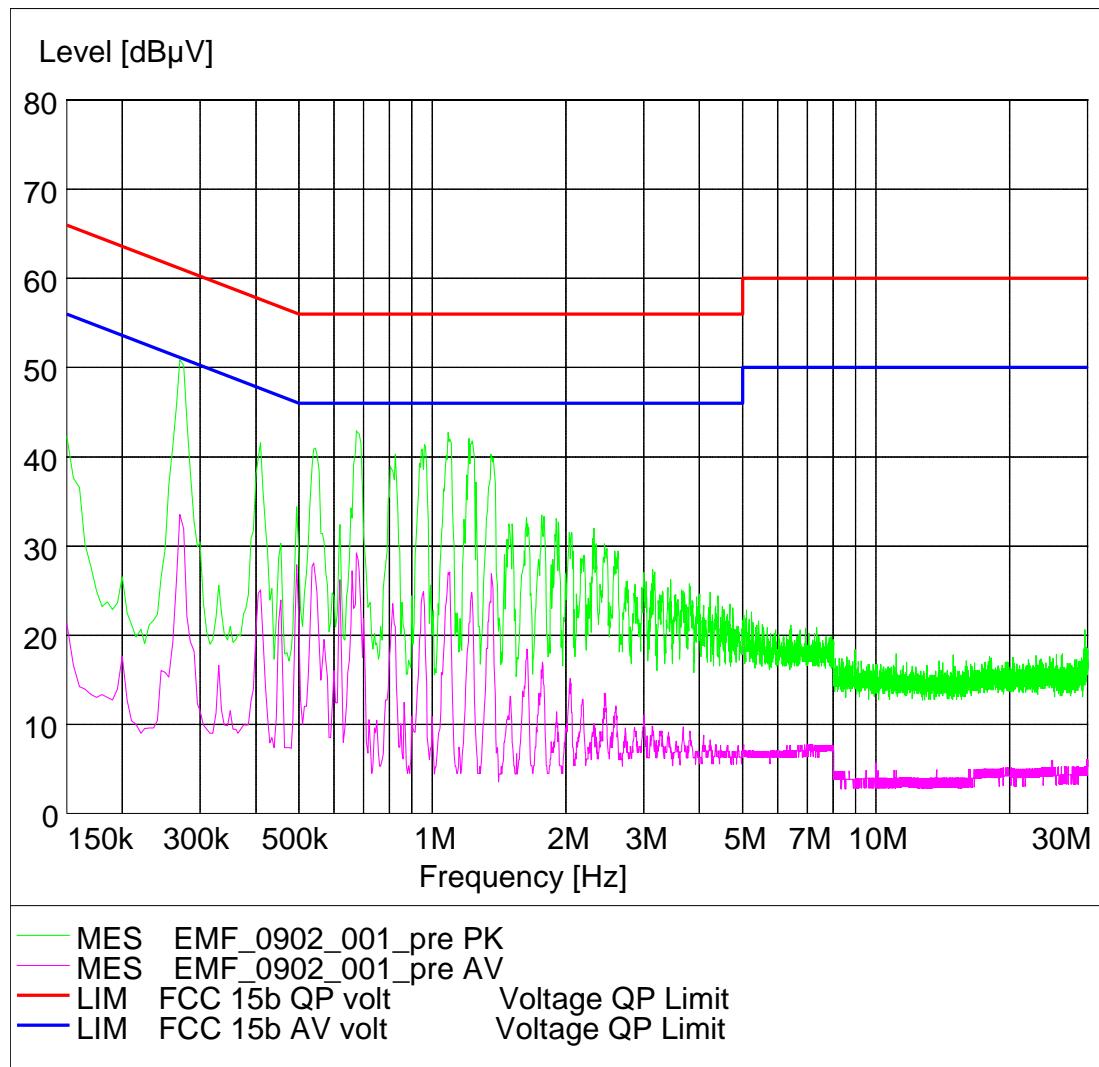



---

Reference: ODE\_MUS\_EMFINDERS\_0902\_FCCa

Test Specification FCC15b

### **3.5.2 15b.2 Spurious Radiated Emissions §15.109**

#### **Test: 15b.2; Mode = transmit**

*Result:* Passed

*Setup No.:* Setup\_b01\_01


*Date of Test:* 2009/09/10 17:15

*Body:* FCC47CFRChIPART15bRADIO FREQUENCY DEVICES

*Test Specification:* FCC part 2 and 15

**Detailed Results:**
**EMI RADIATED TEST**

EUT: EmSeeQ (IG020b01) + Cradle + Charger  
 Manufacturer: EmFinders  
 Operating Condition: GSM 1900 TCH661  
 Test Site: 7 layers, Ratingen, Operator: Pet  
 Test Specification: FCC part 15 b  
 Comment: Horizontal EUT position  
 Start of Test: 10.09.2009 / 15:48:02

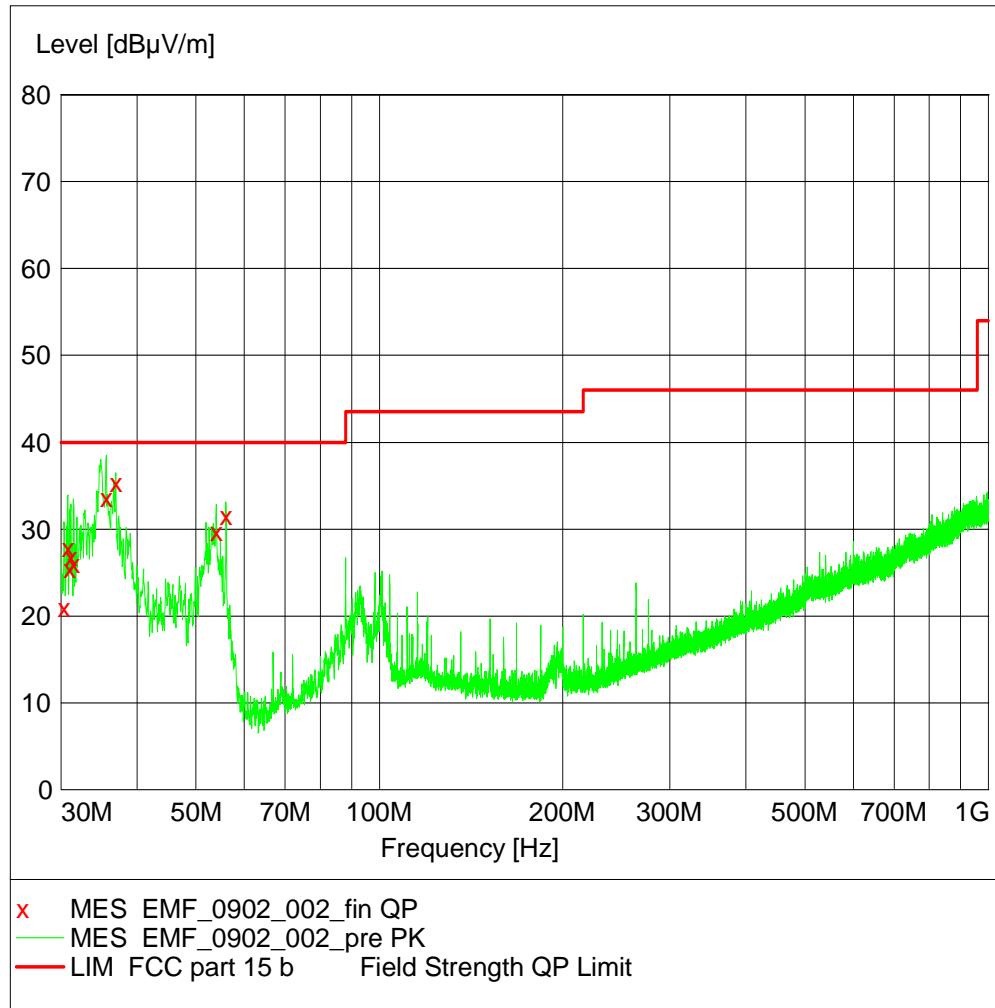
**MEASUREMENT RESULT: "EMF\_0902\_002\_fin QP"**

10.09.2009 16:45	Frequency	Level	Transd	Limit	Margin	Height	Azimuth	Polarisation
	MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB	cm	deg	
	30.360000	20.90	20.6	40.0	19.1	160.0	67.00	VERTICAL
	30.780000	27.80	20.3	40.0	12.2	105.0	112.00	VERTICAL
	30.960000	25.40	20.1	40.0	14.6	100.0	112.00	VERTICAL
	31.140000	26.80	20.2	40.0	13.2	100.0	359.00	VERTICAL
	31.440000	26.10	19.9	40.0	13.9	100.0	158.00	VERTICAL
	35.580000	33.60	17.7	40.0	6.4	100.0	202.00	VERTICAL
	36.900000	35.40	16.8	40.0	4.6	100.0	247.00	VERTICAL
	53.940000	29.80	6.5	40.0	10.2	100.0	83.00	VERTICAL
	55.980000	31.50	5.3	40.0	8.5	125.0	68.00	VERTICAL

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

Lab ID:	Lab 2	Last Execution	Next Exec.
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6		
	<i>Calibration Details</i>		
	FCC renewal	2006/12/19	2009/12/19
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

#### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18	2009/01/07	2011/01/06
	ANSI C64.3 NSA	2009/01/21	2011/01/20
Controller Innco 2000	CO 2000	CO2000/328/1247 0406/L	Innco innovative constructions GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

#### Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

#### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Coupling-Decoupling-Network	CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration	2008/03/06	2011/03/05
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration	2008/10/13	2011/10/12

**Test Equipment Auxiliary Equipment for Radiated emissions**
**Lab ID:**

Description:

Serial Number:

**Lab 2**

Equipment for emission measurements

see single devices

**Single Devices for Auxiliary Equipment for Radiated emissions**

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P		HD GmbH
Biconical dipole	VUBA 9117 <i>Calibration Details</i>	9117108	Schwarzbeck <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/10/27   2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P <i>Calibration Details</i>	849785	Miteq <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4 <i>Calibration Details</i>	-	Miteq <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P <i>Calibration Details</i>	896037	Miteq <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Cable "ESI to EMI Antenna"	EcoFlex10 <i>Calibration Details</i>	W18.01- 2+W38.01-2	Kabel Kusch <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Cable "ESI to Horn Antenna"	UFB311A+UFB293C <i>Calibration Details</i>	W18.02- 2+W38.02-2	Rosenberger Micro-Coax <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Double-ridged horn	HF 906 <i>Calibration Details</i>	357357/001	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/16   2012/04/15
Double-ridged horn	HF 906 <i>Calibration Details</i>	357357/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/28   2012/04/27
Dreheinheit	DE 325		HD GmbH
High Pass Filter	4HC1600/12750-1.5-KK <i>Calibration Details</i>	9942011	Trilithic <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
High Pass Filter	5HC2700/12750-1.5-KK <i>Calibration Details</i>	9942012	Trilithic <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
High Pass Filter	5HC3500/12750-1.2-KK <i>Calibration Details</i>	200035008	Trilithic <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18   2009/11/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG

**Single Devices for Auxiliary Equipment for Radiated emissions (continued)**

Single Device Name	Type	Serial Number	Manufacturer
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/05/27 2012/05/26
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/07 2011/10/06
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH

**Test Equipment Auxiliary Test Equipment**

**Lab ID:** Lab 2  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

**Single Devices for Auxiliary Test Equipment**

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 01 (Multimeter)	Voltcraft M-3860M	IJ096055	Conrad Electronics
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
Digital Oscilloscope [SA2] (Aux)	TDS 784C	B021311	Tektronix GmbH
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/06 2011/10/05

### Test Equipment Digital Signalling Devices

**Lab ID:**
**Lab 1, Lab 2**
**Description:**

Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/08/14 2011/08/13
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/07 2010/10/06
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/02/16 2011/02/15
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware:		2007/07/16
	B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		
	Software:		
	K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware:		
	$\mu$ P1 8v50 02.05.06		
	---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options:		2007/01/02
	B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		
	SW options:		
	K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware:		
	$\mu$ P1 8v40 01.12.05		
	---		
	SW:		2008/11/03
	K62, K69		
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2008/10/28 2011/10/27

### Test Equipment Emission measurement devices

**Lab ID:** **Lab 1, Lab 2**  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell		Dell
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2007/12/05 2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2007/12/06 2009/12/05

### Test Equipment Shielded Room 02

**Lab ID:** **Lab 1**  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

## 4.2 Laboratory Environmental Conditions

Laboratory	Date	Temperature	Humidity	Air Pressure
Lab 1	2009/09/10	26 °C	38 %	1024 hPa
Lab 2	2009/09/10	26 °C	40 %	1026 hPa

## 5 Annex

### 5.1 Additional Information for OUT Description



back view



---

Reference: ODE\_MUS\_EMFINDERS\_0902\_FCCa

Test Specification FCC15b




front view

## 5.2 Additional Information for Test Plan



Test setup for the test conducted emissions

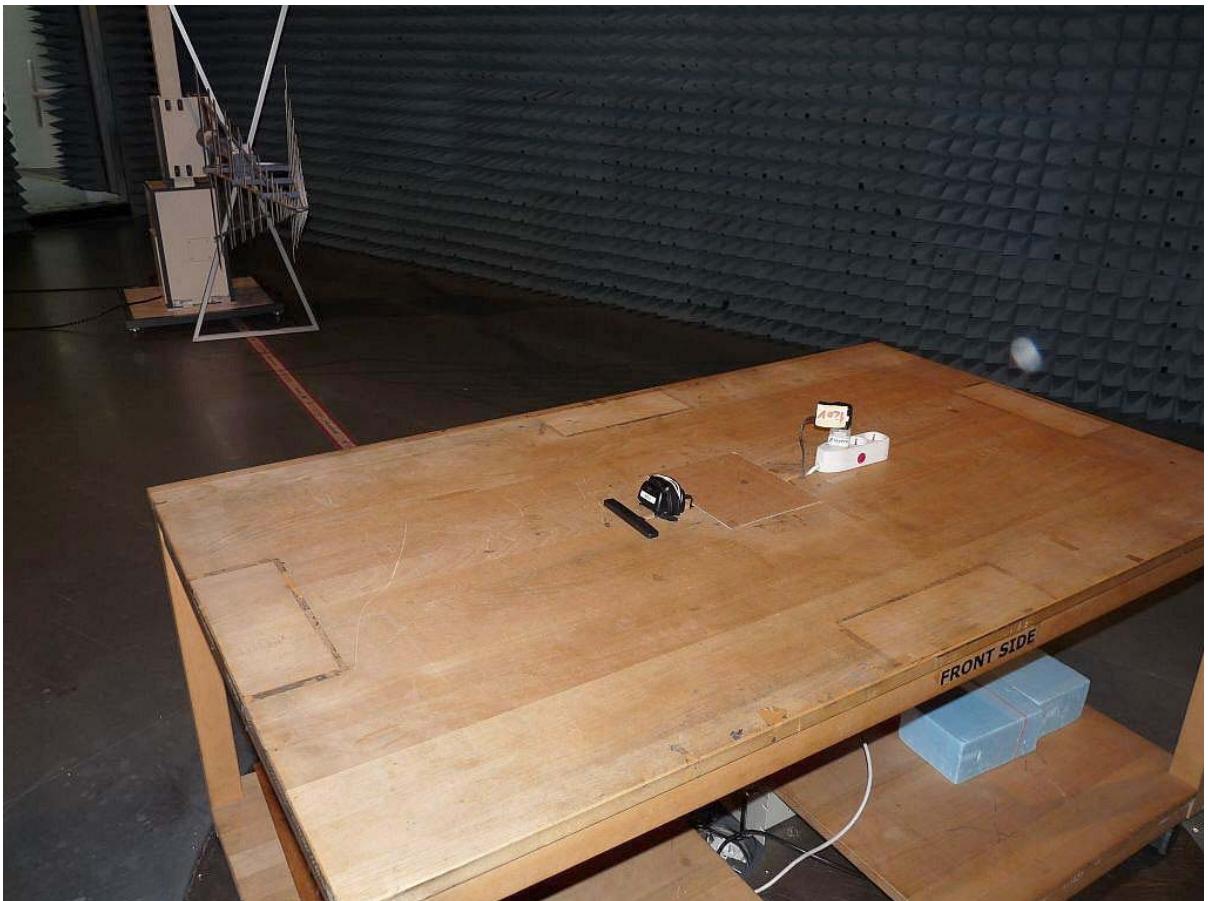

Test setup for the test radiated emissions



---

Reference: ODE\_MUS\_EMFINDERS\_0902\_FCCa

Test Specification FCC15b

### **5.3 Additional Information for Report**



## Test Description

---

---

---

## Conducted emissions (AC power line)

---

Standard      FCC Part 15, 10-1-08  
Subpart B

The test was performed according to: ANSI C 63.4, 2003

## Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from  $50\mu\text{H} \parallel 50 \text{ Ohm Line Impedance Stabilization Network (LISN)}$ . The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

## Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

## EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

## Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

## EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

## Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

## FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

## FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

---

---

Spurious radiated emissions

---

## Standard FCC Part 15, 10-1-08, Subpart B

The test was performed according to: ANSI C 63.4, 2003

## Test Description

## Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range:  $-180^\circ$  to  $180^\circ$
- Turntable step size:  $90^\circ$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180^\circ$  to  $180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

#### Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to + 22.5 ° around the determined value
- Height variation range: -0.25m to + 0.25m around the determined value

#### Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:  
 The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

#### Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dB $\mu$ V/m)

Frequency Range (MHz)	Class B Limit (dB $\mu$ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz) Class A Limit (dB $\mu$ V/m) / @ 3m !

30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0

#### §15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....


Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

---

Setup Drawings

---

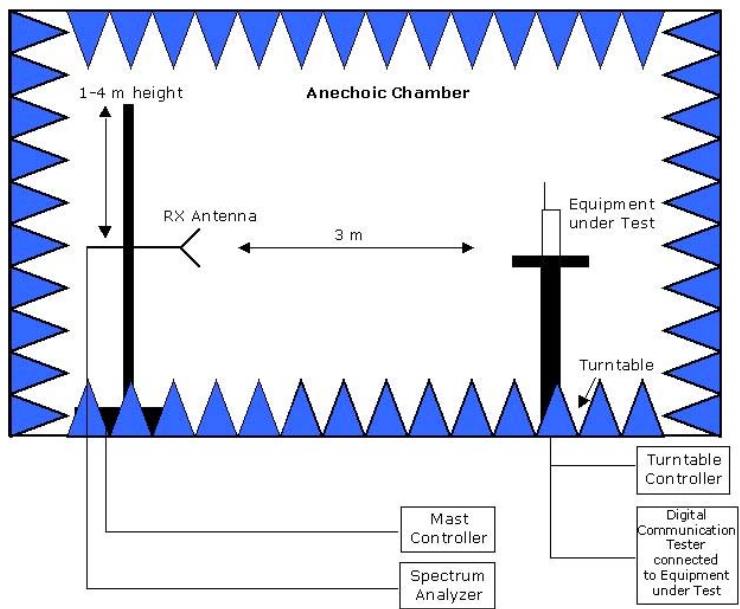

**Remark:** Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	4
2.4	Auxiliary Equipment	4
2.5	Setups used for Testing	4
3	Results	5
3.1	General	5
3.2	List of the Applicable Body	5
3.3	List of Test Specification	5
3.4	Summary	6
3.5	Detailed Results	7
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	7
3.5.2	15b.2 Spurious Radiated Emissions §15.109	8
4	Test Equipment Details	10
4.1	List of Used Test Equipment	10
4.2	Laboratory Environmental Conditions	14
5	Annex	15
5.1	Additional Information for OUT Description	15
5.2	Additional Information for Test Plan	17
5.3	Additional Information for Report	19
6	Index	24