

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

- (7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RBW is set at 1 MHz, VBW is set at 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure).

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in BLE 1M/2M Tx 2440 MHz mode.

Note3: If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Note4: For emission above 1GHz that over the limit are fundamental.

Note 5: Two alternative Crystal oscillator products have been tested, only recorded the worse model: CXA-032000-ADCD41' test data on this report.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-19

Tested By: Johnson Huang

EUT: Guitar Headphone Amplifier

Model Number: Mustang Micro Plus

Test Mode: BLE 1M TX mode


Power Supply: DC 5V

Condition: Temp:22.3°C;Humi:61.8%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC BELOW
1G\20230919-214534_H

Memo: Sample Number:S23090520-06 Power Setting:NA

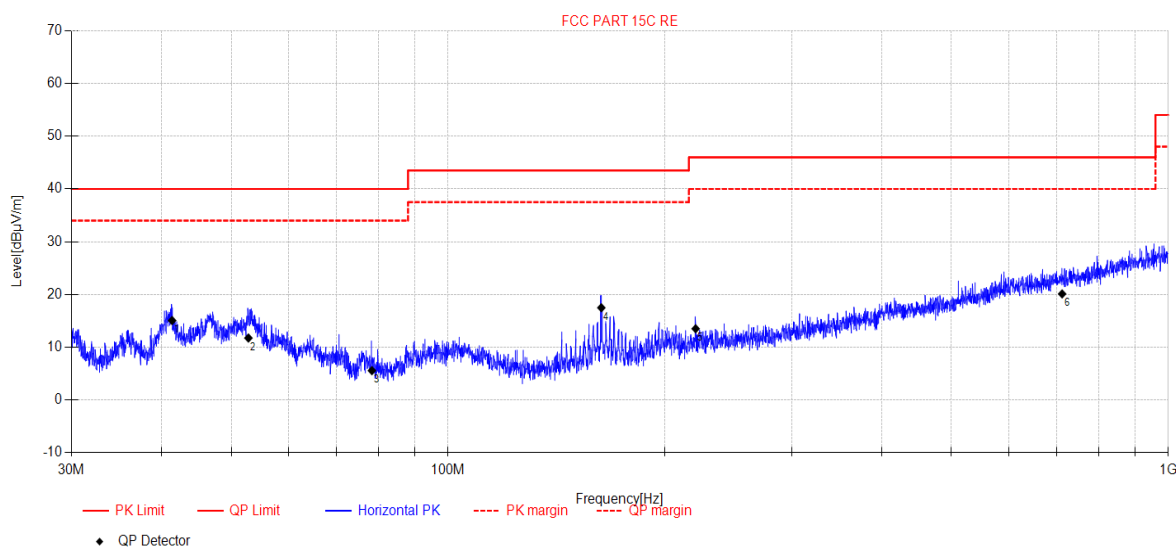


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	41.39	28.89	12.38	4.62	-30.83	15.06	40.00	24.94	QP	Horizontal
2	52.83	24.77	12.92	4.74	-30.68	11.75	40.00	28.25	QP	Horizontal
3	78.40	24.26	7.00	4.82	-30.51	5.57	40.00	34.43	QP	Horizontal
4	163.24	34.65	8.12	5.43	-30.71	17.49	43.50	26.01	QP	Horizontal
5	220.68	27	11.23	5.82	-30.54	13.51	46.00	32.49	QP	Horizontal
6	712.22	22.02	20.20	7.79	-29.90	20.11	46.00	25.89	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-19
Tested By: Johnson Huang
EUT: Guitar Headphone Amplifier
Model Number: Mustang Micro Plus
Test Mode: BLE 1M TX mode
Power Supply: DC 5V
Condition: Temp:22.3°C;Humi:61.8%
Test Site: DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC BELOW 1G\20230919-214547_V
Memo: Sample Number:S23090520-06 Power Setting:NA

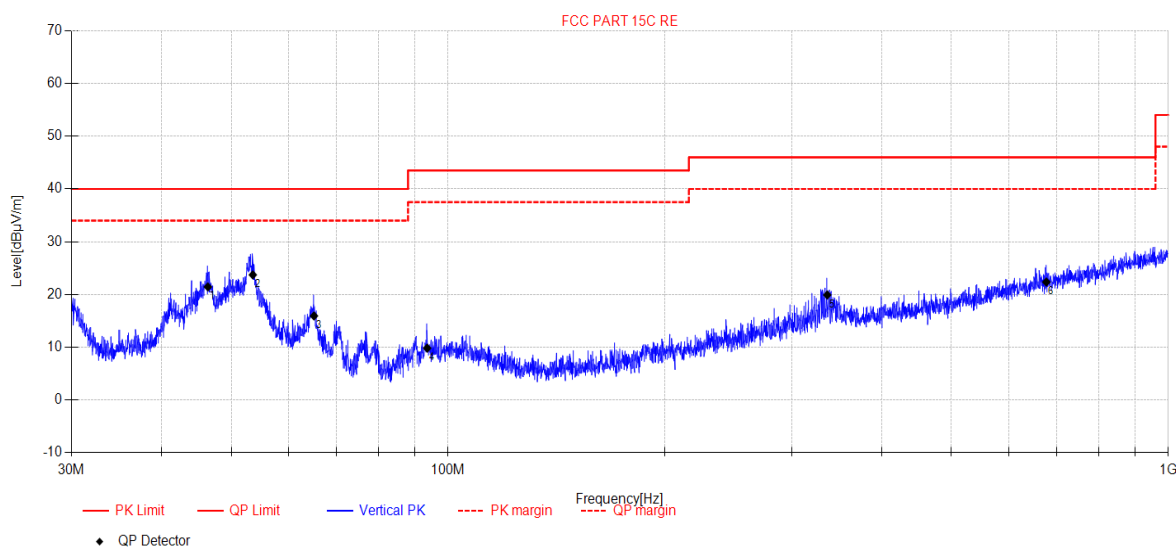


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.40	34.37	13.14	4.68	-30.75	21.44	40.00	18.56	QP	Vertical
2	53.57	36.82	12.84	4.74	-30.68	23.72	40.00	16.28	QP	Vertical
3	65.15	31.24	10.52	4.78	-30.60	15.94	40.00	24.06	QP	Vertical
4	93.55	25.5	10.11	4.99	-30.77	9.83	43.50	33.67	QP	Vertical
5	336.11	29.55	14.24	6.35	-30.23	19.91	46.00	26.09	QP	Vertical
6	677.16	24.9	19.70	7.66	-29.90	22.36	46.00	23.64	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-19 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX mode **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC BELOW
1G\20230919-214612_H
Memo: Sample Number:S23090520-06 Power Setting:NA

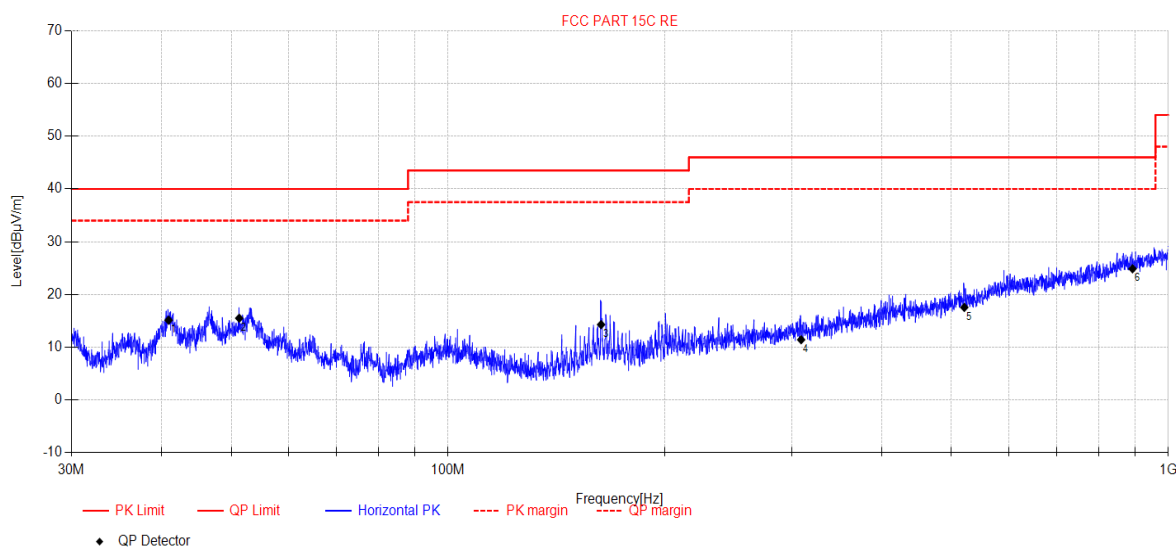


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	40.93	29.07	12.29	4.61	-30.84	15.13	40.00	24.87	QP	Horizontal
2	51.30	28.39	13.07	4.73	-30.69	15.50	40.00	24.50	QP	Horizontal
3	163.13	31.46	8.11	5.43	-30.71	14.29	43.50	29.21	QP	Horizontal
4	309.20	22.02	13.48	6.20	-30.28	11.42	46.00	34.58	QP	Horizontal
5	520.96	23.12	17.32	7.01	-29.90	17.55	46.00	28.45	QP	Horizontal
6	892.00	23.24	22.40	8.31	-29.07	24.88	46.00	21.12	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-19 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX mode **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC BELOW
1G\20230919-214625_V
Memo: Sample Number:S23090520-06 Power Setting:NA

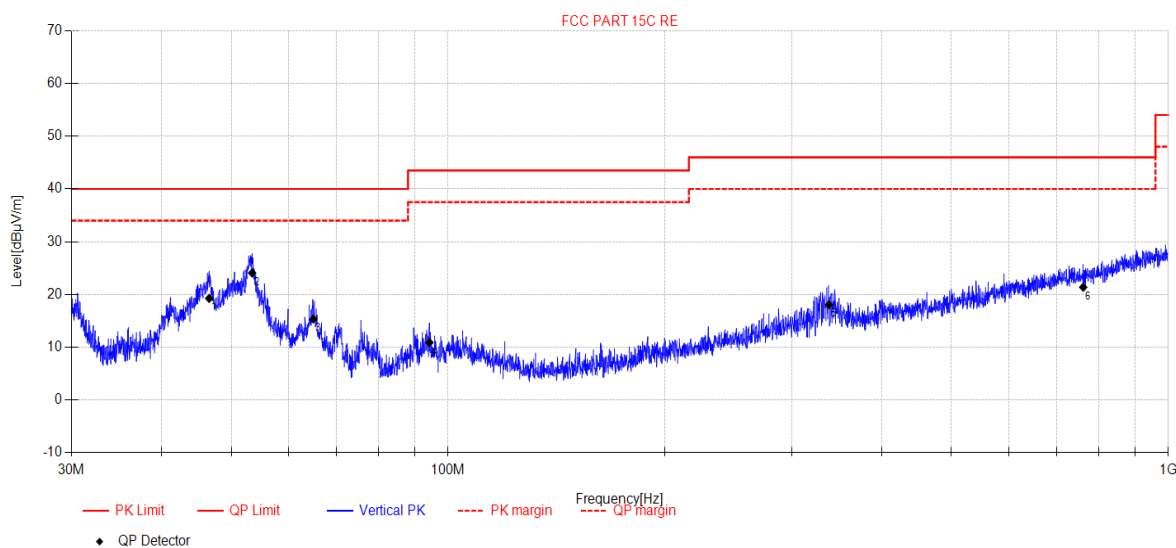

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.60	32.16	13.16	4.69	-30.75	19.26	40.00	20.74	QP	Vertical
2	53.46	37.17	12.85	4.74	-30.68	24.08	40.00	15.92	QP	Vertical
3	65.01	30.59	10.59	4.78	-30.60	15.36	40.00	24.64	QP	Vertical
4	94.21	26.45	10.22	5.00	-30.78	10.89	43.50	32.61	QP	Vertical
5	338.00	27.61	14.32	6.36	-30.22	18.07	46.00	27.93	QP	Vertical
6	761.81	22.53	20.84	7.90	-29.90	21.37	46.00	24.63	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26

Tested By: Johnson Huang

EUT: Guitar Headphone Amplifier

Model Number: Mustang Micro Plus

Test Mode: BLE 1M TX 2402MHz

Power Supply: DC 5V


Condition: Temp:22.3°C;Humi:61.8%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\33

Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

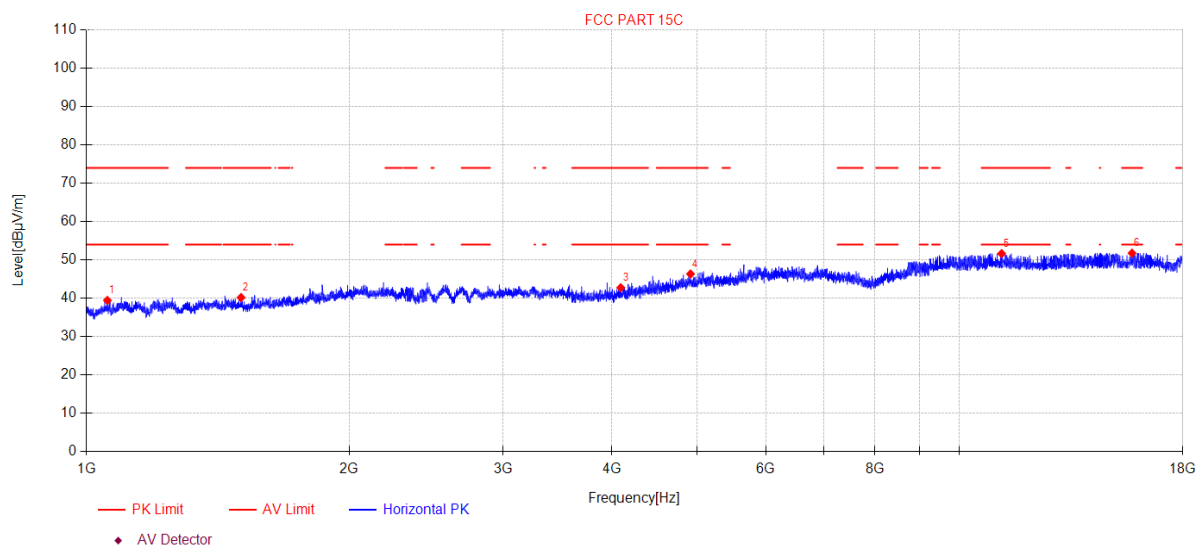

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1057.06	47.74	3.10	25.50	-36.89	39.45	74.00	34.55	PK	Horizontal
2	1503.93	47.15	4.51	25.49	-36.95	40.20	74.00	33.80	PK	Horizontal
3	4092.70	46.25	6.04	30.89	-40.42	42.76	74.00	31.24	PK	Horizontal
4	4919.97	46.06	7.71	32.68	-40.11	46.34	74.00	27.66	PK	Horizontal
5	11176.32	41.91	9.81	39.10	-39.17	51.65	74.00	22.35	PK	Horizontal
6	15763.81	37.94	14.81	38.24	-39.22	51.77	74.00	22.23	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\34
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

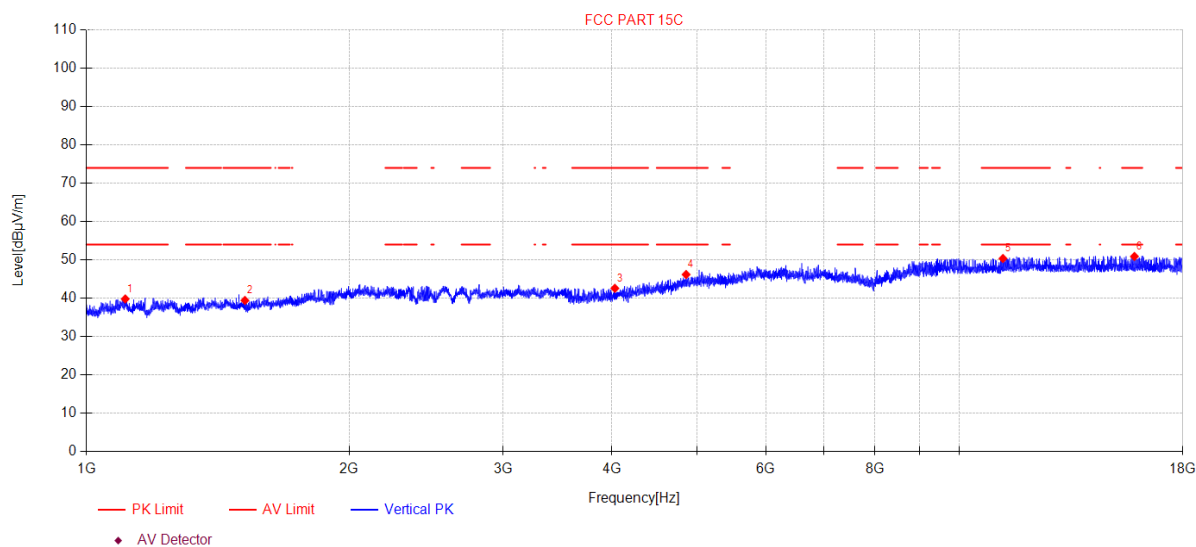

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1108.05	47.94	3.26	25.52	-36.89	39.83	74.00	34.17	PK	Vertical
2	1519.22	46.37	4.56	25.46	-36.95	39.44	74.00	34.56	PK	Vertical
3	4030.49	46.37	5.91	30.76	-40.44	42.60	74.00	31.40	PK	Vertical
4	4863.42	46.21	7.59	32.53	-40.13	46.20	74.00	27.80	PK	Vertical
5	11215.15	40.62	9.84	39.10	-39.19	50.37	74.00	23.63	PK	Vertical
6	15864.36	36.78	15.27	38.14	-39.28	50.91	74.00	23.09	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2440MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\35
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

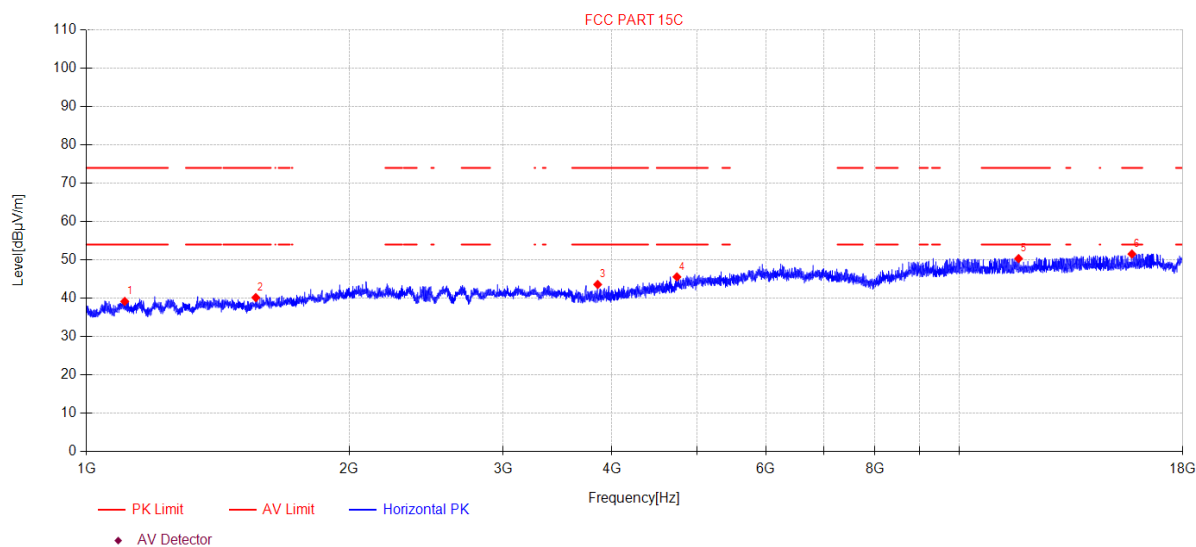

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1106.45	47.31	3.26	25.51	-36.89	39.19	74.00	34.81	PK	Horizontal
2	1563.31	47.04	4.69	25.40	-36.95	40.18	74.00	33.82	PK	Horizontal
3	3851.69	47.74	5.82	30.40	-40.36	43.60	74.00	30.40	PK	Horizontal
4	4746.78	46.30	7.36	32.09	-40.17	45.58	74.00	28.42	PK	Horizontal
5	11688.36	40.68	10.26	38.81	-39.41	50.34	74.00	23.66	PK	Horizontal
6	15759.26	37.73	14.79	38.24	-39.22	51.54	74.00	22.46	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2440MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\36
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

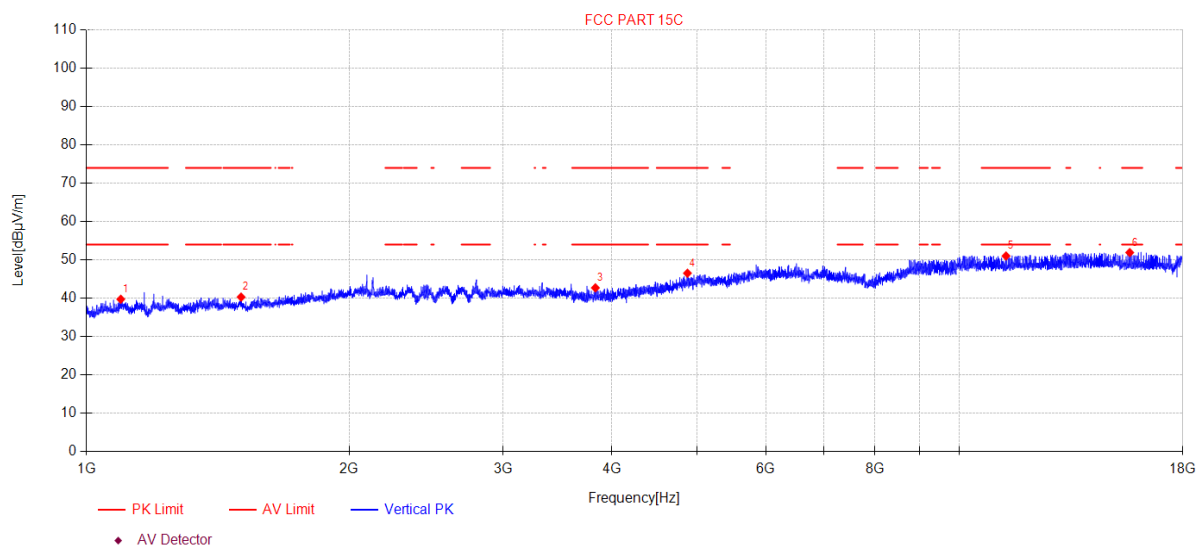

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1094.99	47.93	3.22	25.50	-36.89	39.76	74.00	34.24	PK	Vertical
2	1503.93	47.27	4.51	25.49	-36.95	40.32	74.00	33.68	PK	Vertical
3	3828.39	46.90	5.81	30.36	-40.35	42.72	74.00	31.28	PK	Vertical
4	4880.32	46.46	7.63	32.56	-40.12	46.53	74.00	27.47	PK	Vertical
5	11306.27	41.23	9.92	39.10	-39.23	51.02	74.00	22.98	PK	Vertical
6	15668.43	38.37	14.38	38.33	-39.16	51.92	74.00	22.08	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\37
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

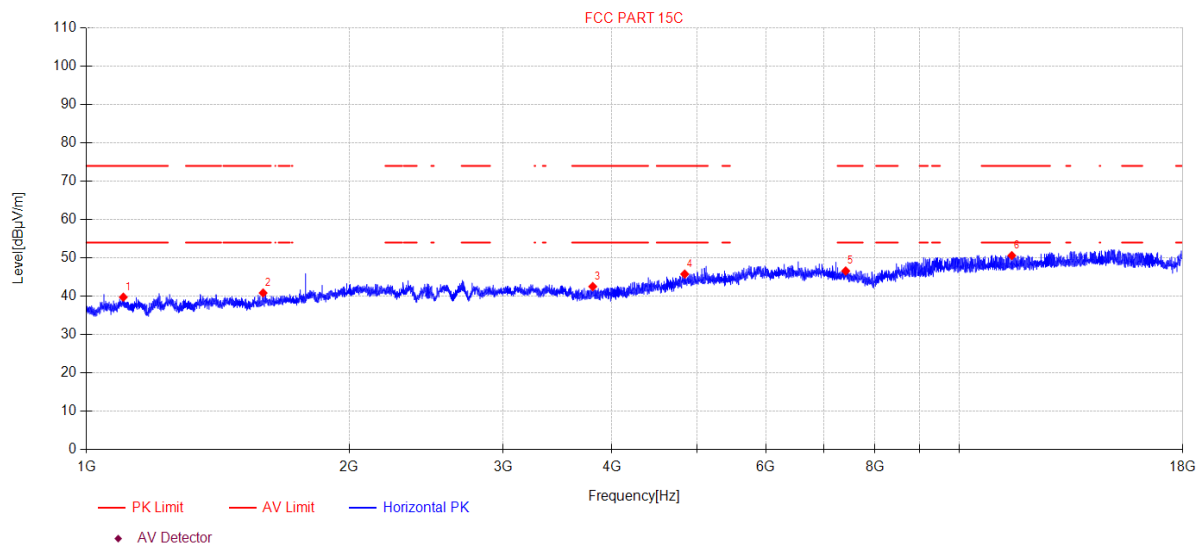

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1102.30	47.92	3.24	25.50	-36.89	39.77	74.00	34.23	PK	Horizontal
2	1593.88	47.64	4.79	25.40	-36.96	40.87	74.00	33.13	PK	Horizontal
3	3801.92	46.75	5.81	30.30	-40.33	42.53	74.00	31.47	PK	Horizontal
4	4845.18	45.89	7.56	32.48	-40.14	45.79	74.00	28.21	PK	Horizontal
5	7407.84	44.18	7.64	36.50	-41.72	46.60	74.00	27.40	PK	Horizontal
6	11480.79	40.83	10.08	39.02	-39.32	50.61	74.00	23.39	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\38
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

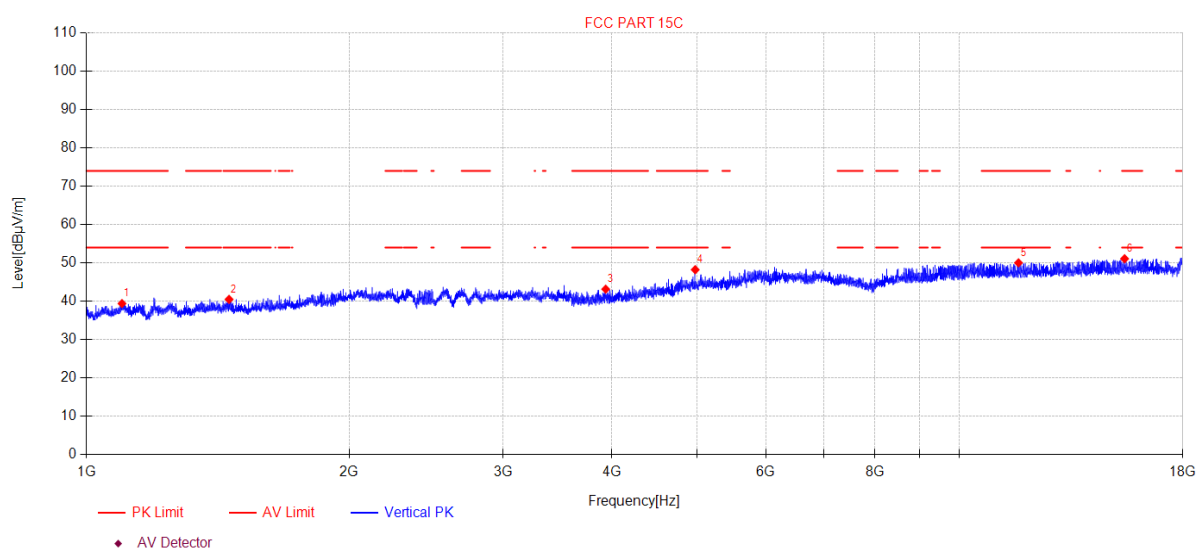

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1098.48	47.58	3.23	25.50	-36.89	39.42	74.00	34.58	PK	Vertical
2	1456.87	47.50	4.36	25.59	-36.94	40.51	74.00	33.49	PK	Vertical
3	3933.82	47.16	5.84	30.57	-40.41	43.16	74.00	30.84	PK	Vertical
4	4981.49	47.69	7.83	32.80	-40.09	48.23	74.00	25.77	PK	Vertical
5	11684.98	40.35	10.26	38.82	-39.41	50.02	74.00	23.98	PK	Vertical
6	15457.04	38.05	13.42	38.64	-39.03	51.08	74.00	22.92	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\39
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

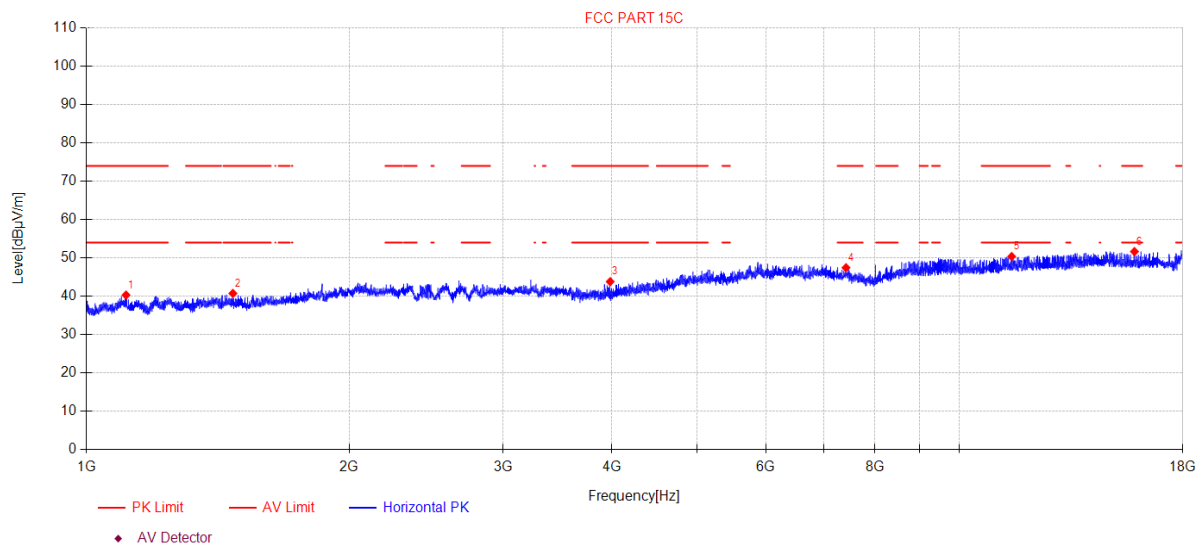

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1110.29	48.41	3.27	25.52	-36.89	40.31	74.00	33.69	PK	Horizontal
2	1471.68	47.72	4.41	25.56	-36.94	40.75	74.00	33.25	PK	Horizontal
3	3980.71	47.75	5.85	30.66	-40.44	43.82	74.00	30.18	PK	Horizontal
4	7414.26	45.05	7.64	36.50	-41.74	47.45	74.00	26.55	PK	Horizontal
5	11477.47	40.59	10.07	39.02	-39.31	50.37	74.00	23.63	PK	Horizontal
6	15864.36	37.52	15.27	38.14	-39.28	51.65	74.00	22.35	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\40
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

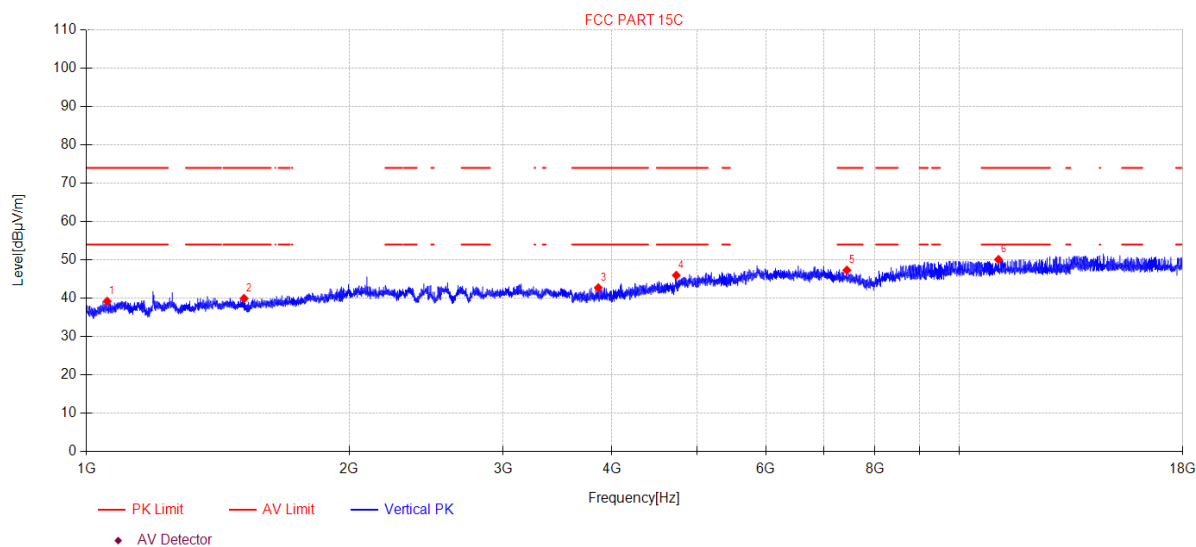

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1056.45	47.52	3.10	25.50	-36.89	39.23	74.00	34.77	PK	Vertical
2	1515.71	46.89	4.54	25.47	-36.95	39.95	74.00	34.05	PK	Vertical
3	3858.38	46.86	5.82	30.42	-40.36	42.74	74.00	31.26	PK	Vertical
4	4738.55	46.75	7.34	32.08	-40.18	45.99	74.00	28.01	PK	Vertical
5	7431.42	44.96	7.64	36.50	-41.78	47.32	74.00	26.68	PK	Vertical
6	11086.24	40.40	9.73	39.10	-39.13	50.10	74.00	23.90	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2440MHZ **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\41
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

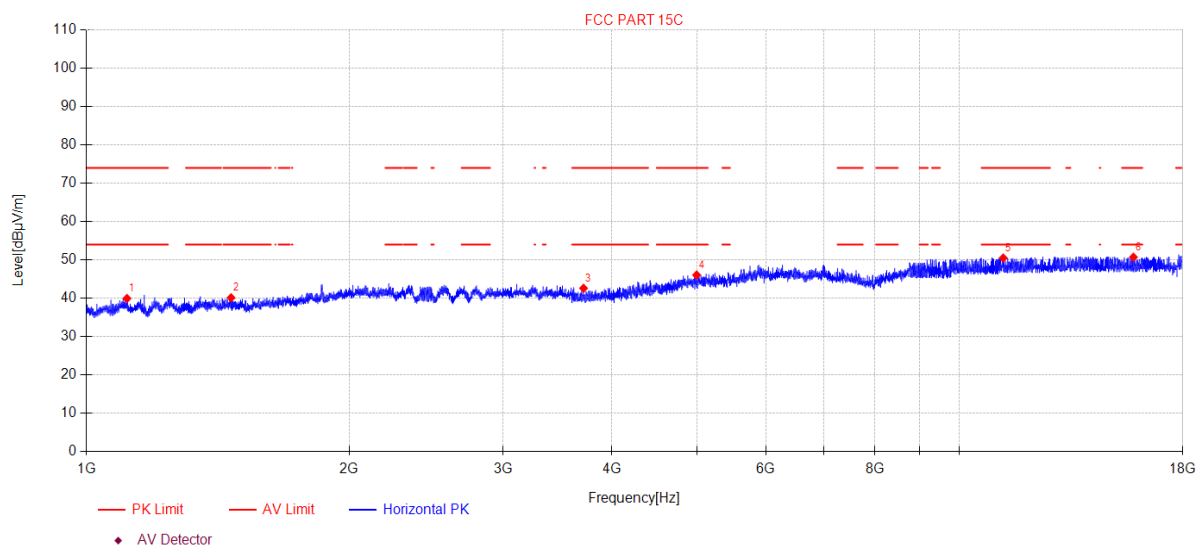

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1112.86	48.03	3.28	25.53	-36.89	39.95	74.00	34.05	PK	Horizontal
2	1464.47	47.13	4.38	25.57	-36.94	40.14	74.00	33.86	PK	Horizontal
3	3710.74	47.08	5.79	30.02	-40.27	42.62	74.00	31.38	PK	Horizontal
4	5000.25	45.48	7.87	32.80	-40.08	46.07	74.00	27.93	PK	Horizontal
5	11224.87	40.74	9.85	39.10	-39.20	50.49	74.00	23.51	PK	Horizontal
6	15823.15	36.71	15.08	38.18	-39.25	50.72	74.00	23.28	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2440MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\42
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

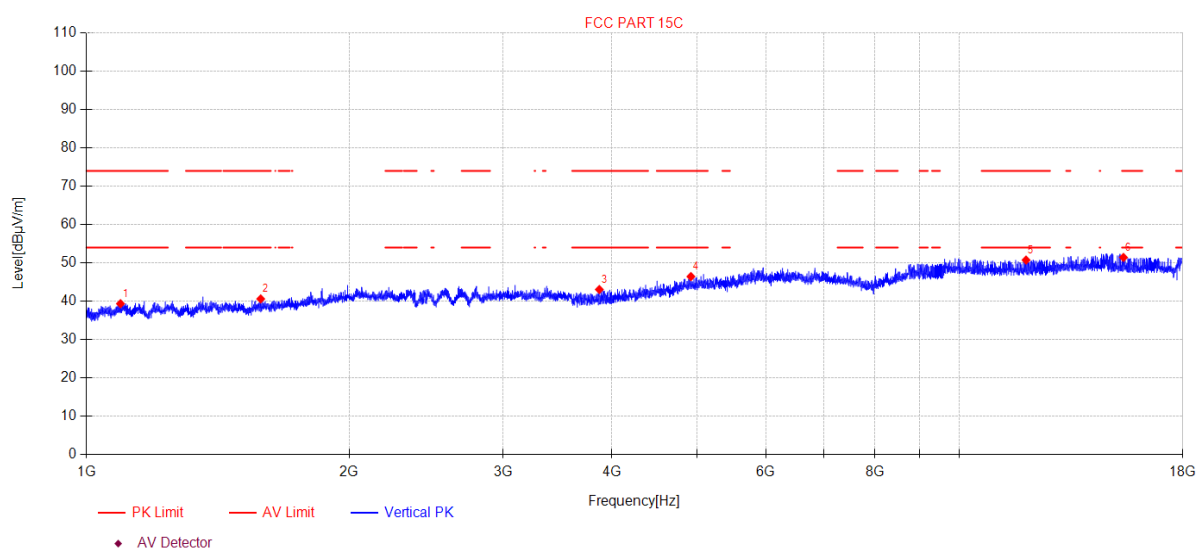

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1094.04	47.54	3.22	25.50	-36.89	39.37	74.00	34.63	PK	Vertical
2	1583.78	47.42	4.76	25.40	-36.96	40.62	74.00	33.38	PK	Vertical
3	3868.43	47.19	5.82	30.44	-40.37	43.08	74.00	30.92	PK	Vertical
4	4925.66	46.13	7.72	32.70	-40.11	46.44	74.00	27.56	PK	Vertical
5	11920.34	40.97	10.47	38.82	-39.52	50.74	74.00	23.26	PK	Vertical
6	15412.43	38.53	13.22	38.69	-39.01	51.43	74.00	22.57	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\43
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

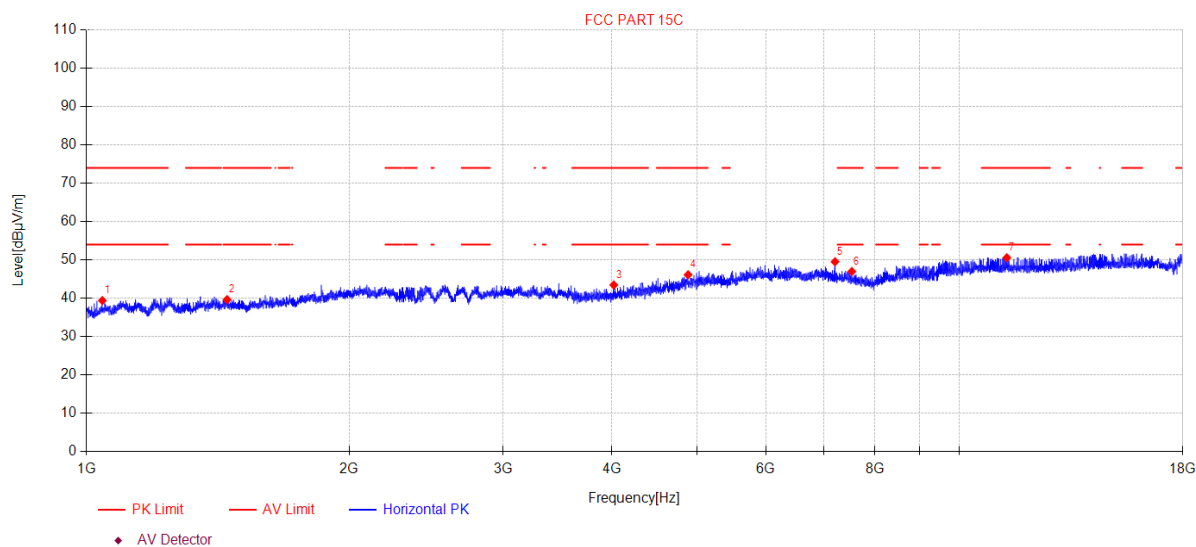

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1043.10	47.75	3.06	25.49	-36.89	39.41	74.00	34.59	PK	Horizontal
2	1449.31	46.65	4.34	25.60	-36.94	39.65	74.00	34.35	PK	Horizontal
3	4018.85	47.28	5.89	30.74	-40.44	43.47	74.00	30.53	PK	Horizontal
4	4888.79	46.02	7.65	32.58	-40.12	46.13	74.00	27.87	PK	Horizontal
5	7203.05	46.62	7.62	36.50	-41.21	49.53	-	-	PK	Horizontal
6	7528.70	44.95	7.65	36.40	-42.02	46.98	74.00	27.02	PK	Horizontal
7	11332.44	40.77	9.95	39.10	-39.25	50.57	74.00	23.43	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\44
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

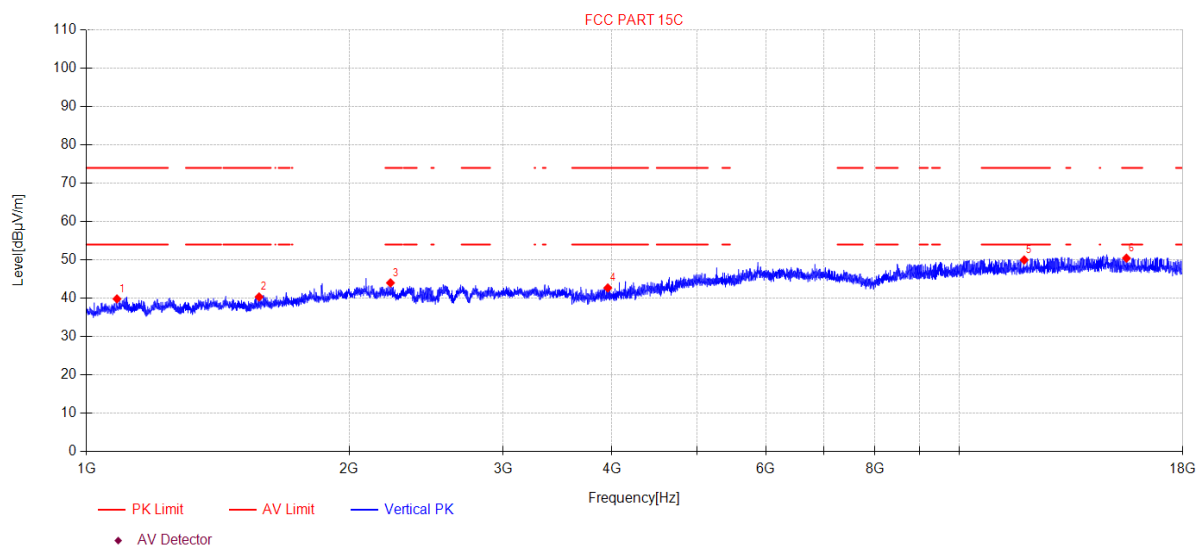

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1083.97	48.05	3.18	25.50	-36.89	39.84	74.00	34.16	PK	Vertical
2	1576.93	47.16	4.74	25.40	-36.96	40.34	74.00	33.66	PK	Vertical
3	2229.99	48.44	5.97	27.26	-37.66	44.01	74.00	29.99	PK	Vertical
4	3955.48	46.67	5.84	30.61	-40.42	42.70	74.00	31.30	PK	Vertical
5	11861.91	40.27	10.42	38.80	-39.50	49.99	74.00	24.01	PK	Vertical
6	15533.17	37.24	13.77	38.53	-39.08	50.46	74.00	23.54	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

Note:


- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).


9.4. Test result


Mode	Frequency (MHz)	Verdict
BLE_1M	2402	Pass
	2440	Pass
	2480	Pass
BLE_2M	2402	Pass
	2440	Pass
	2480	Pass


9.5. Original test data




Sample S23090520-05:

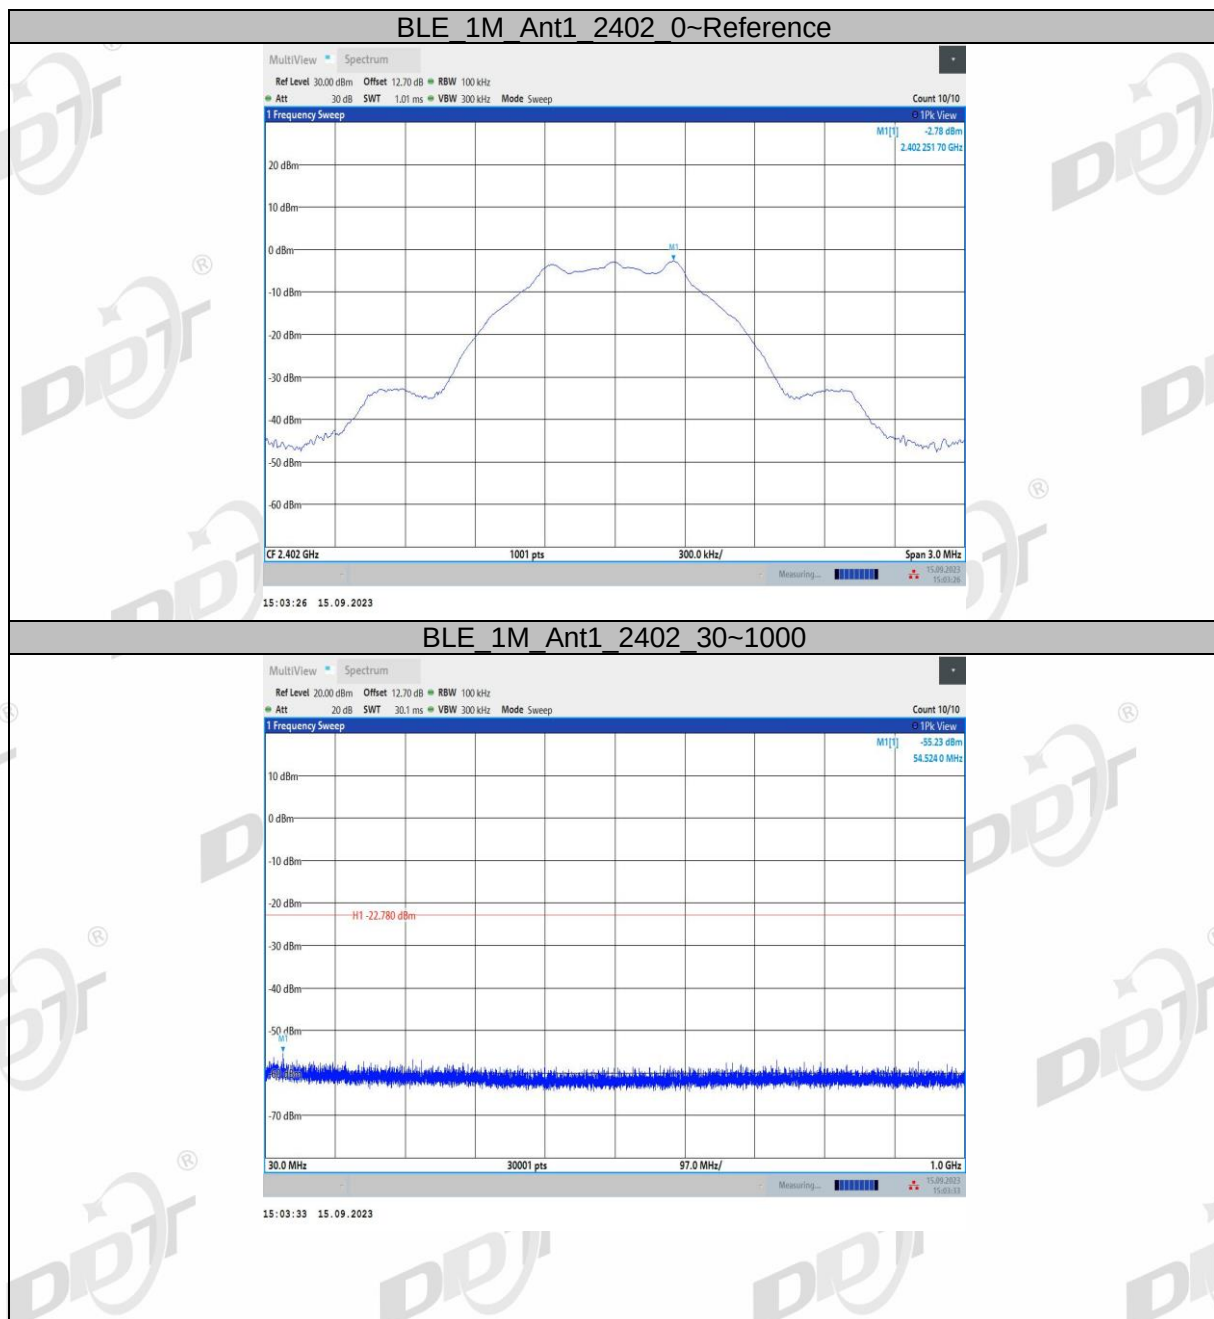


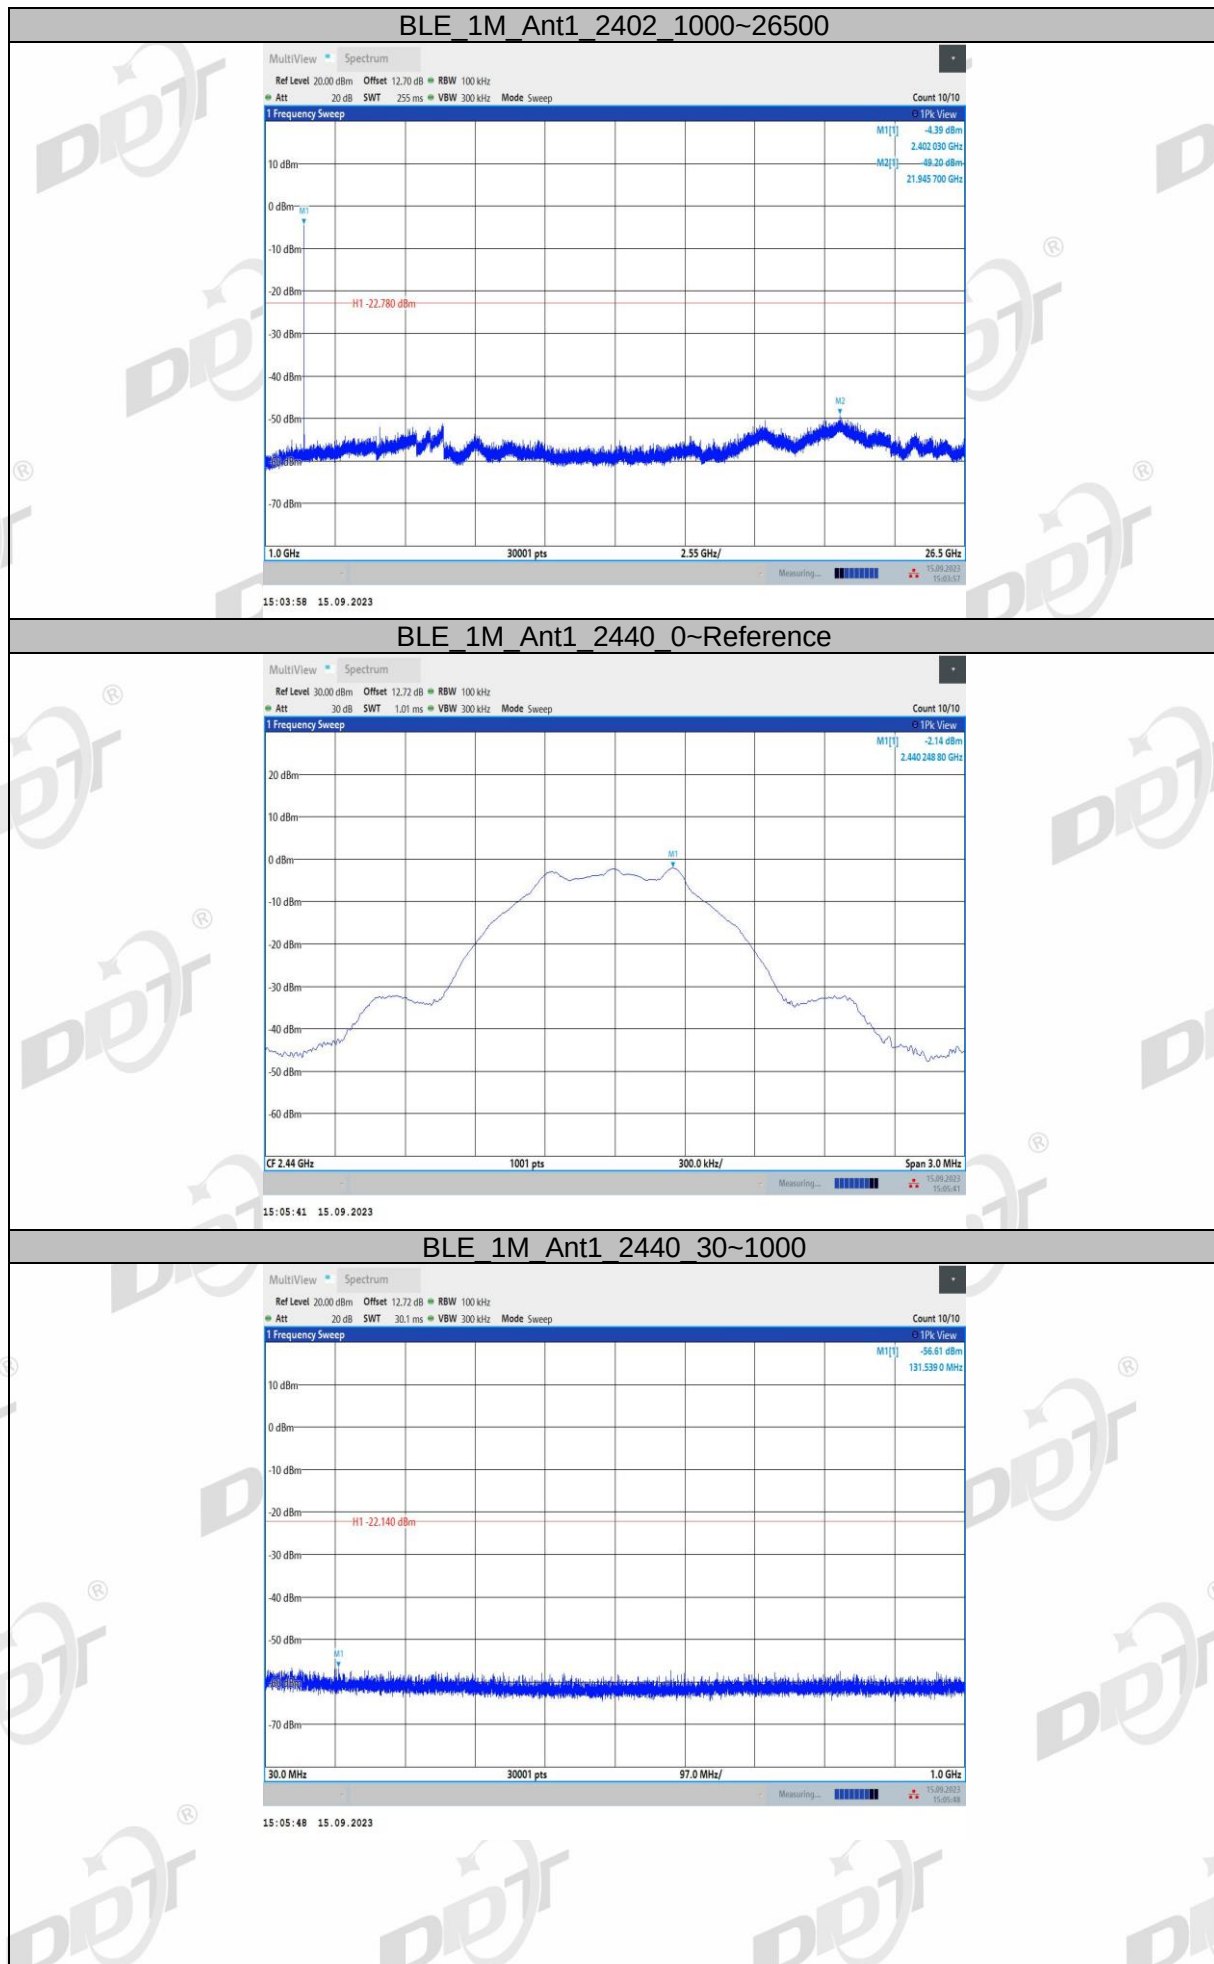


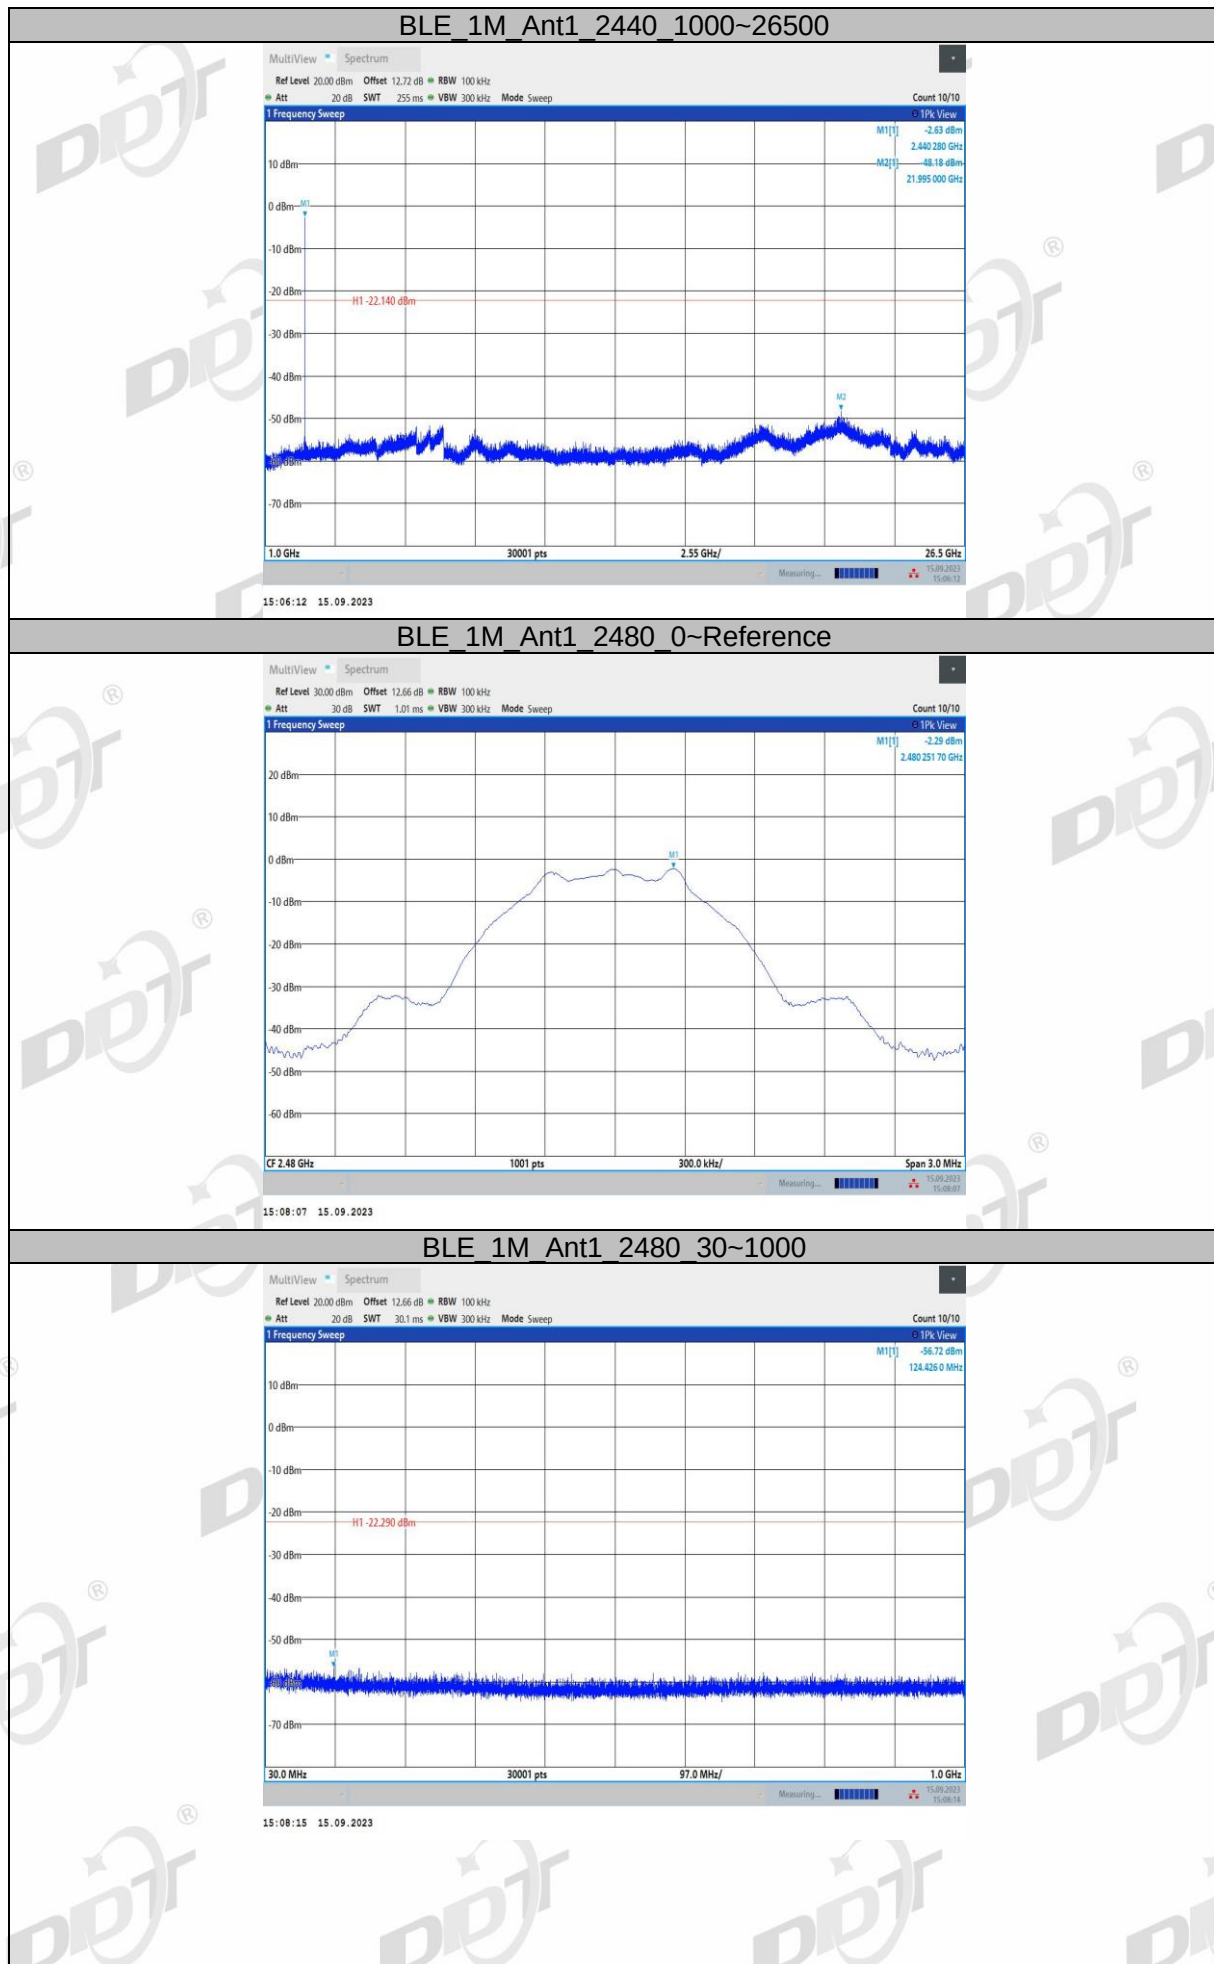


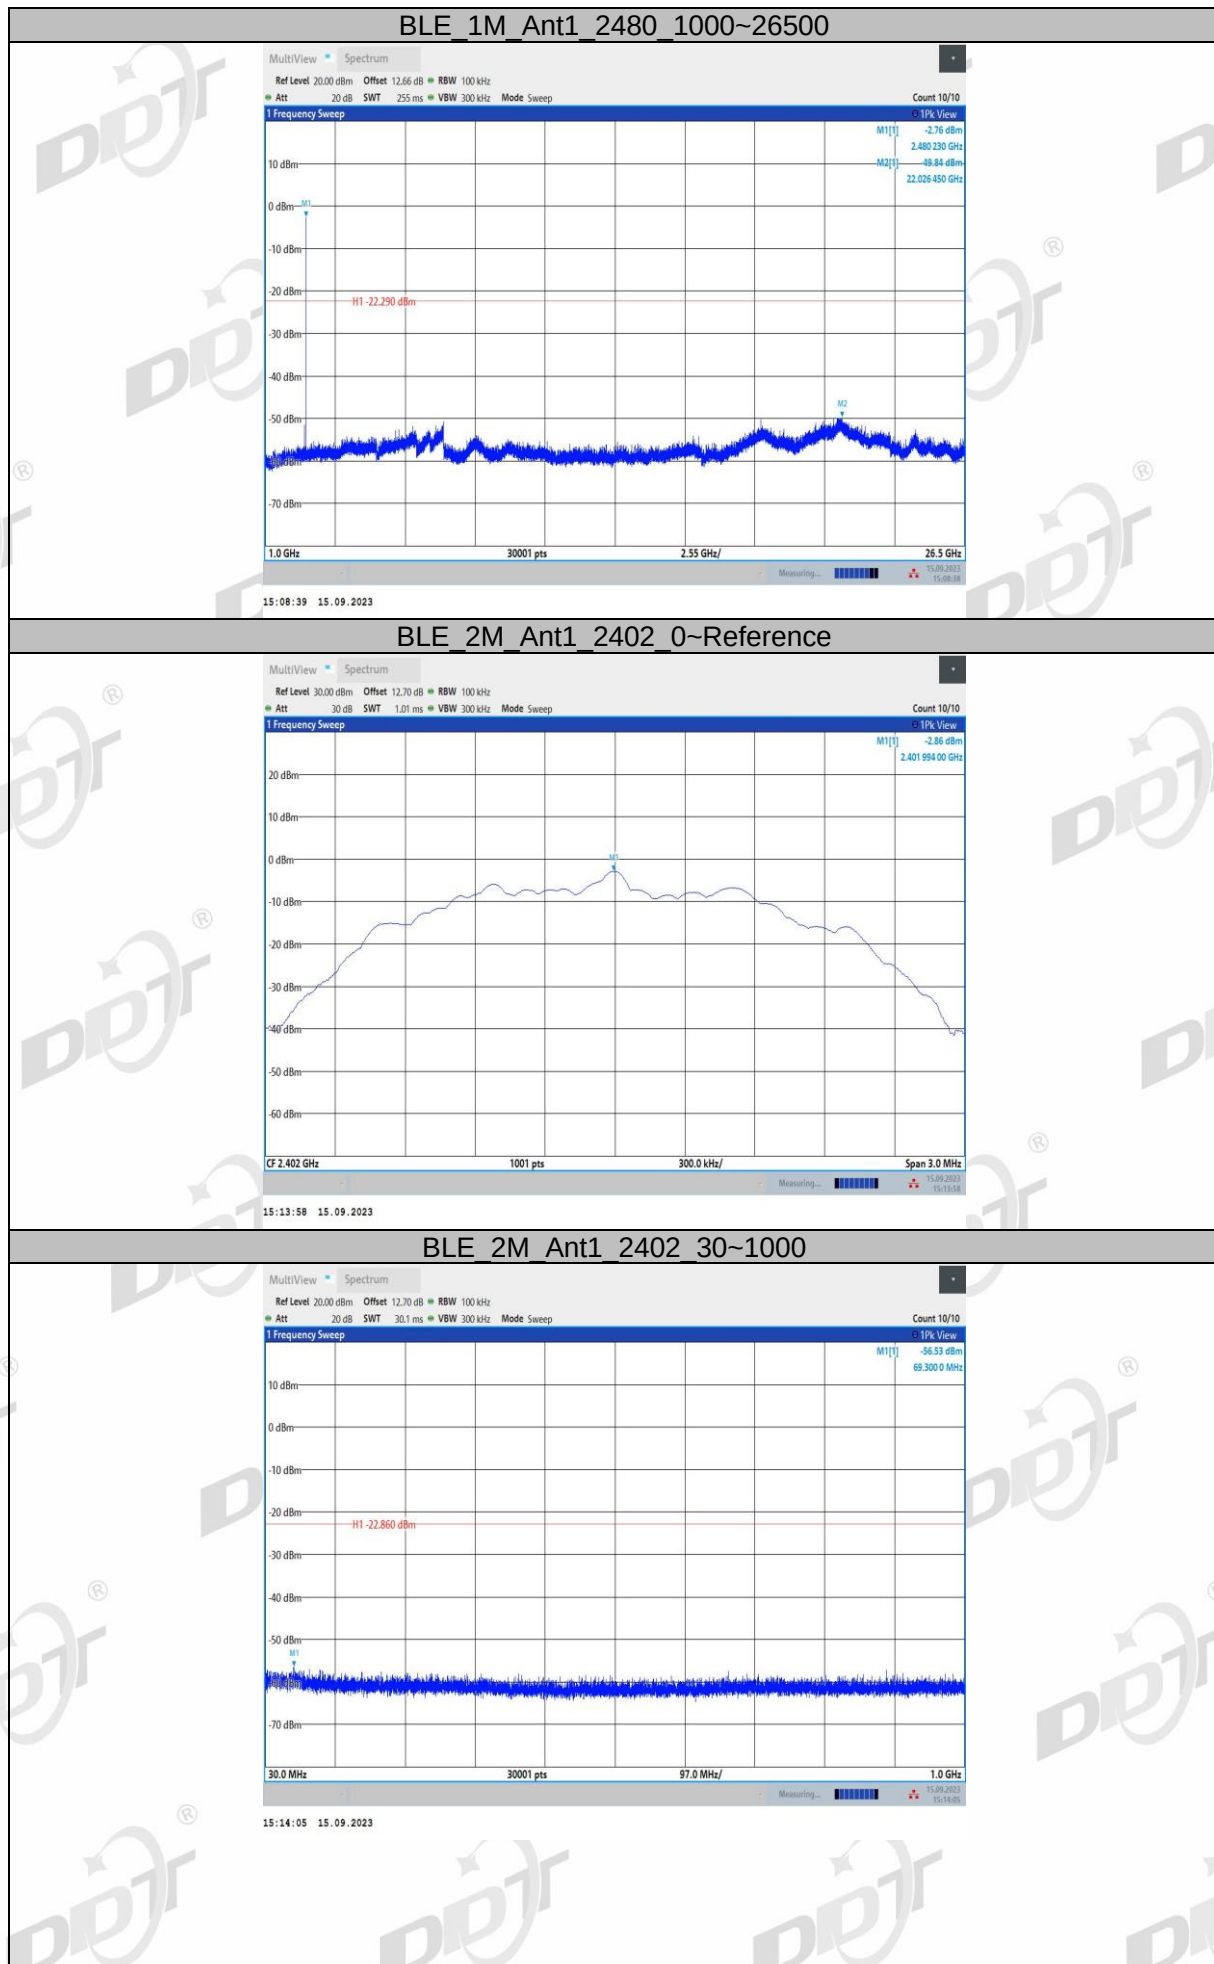


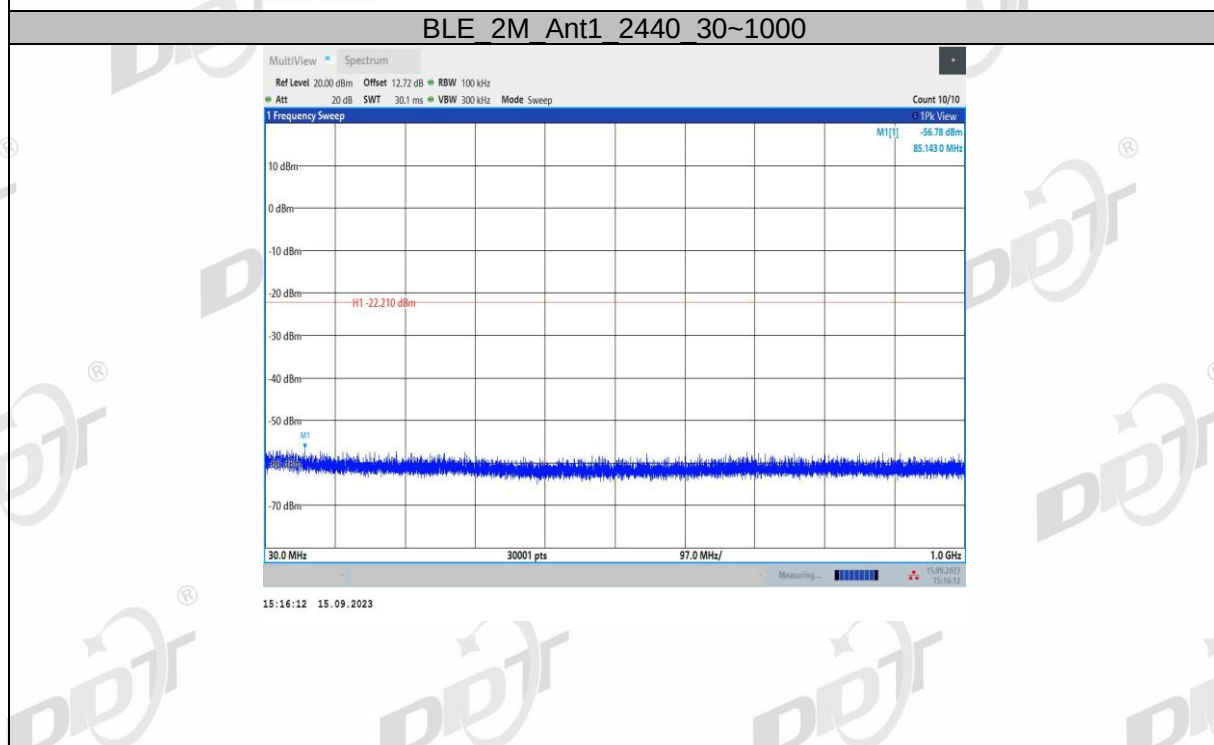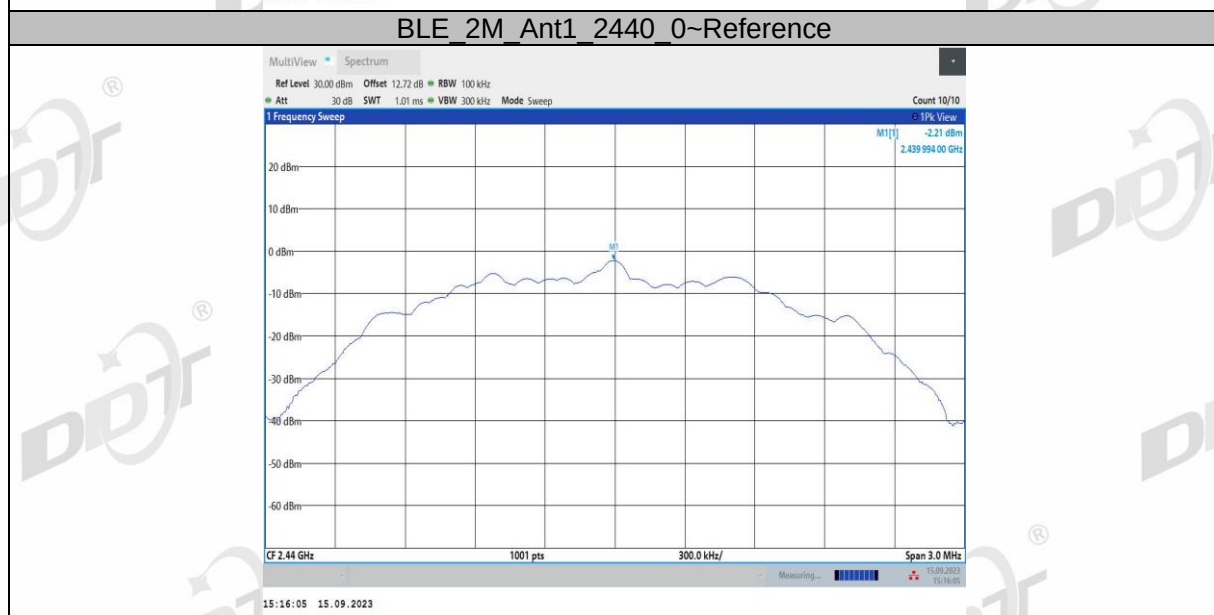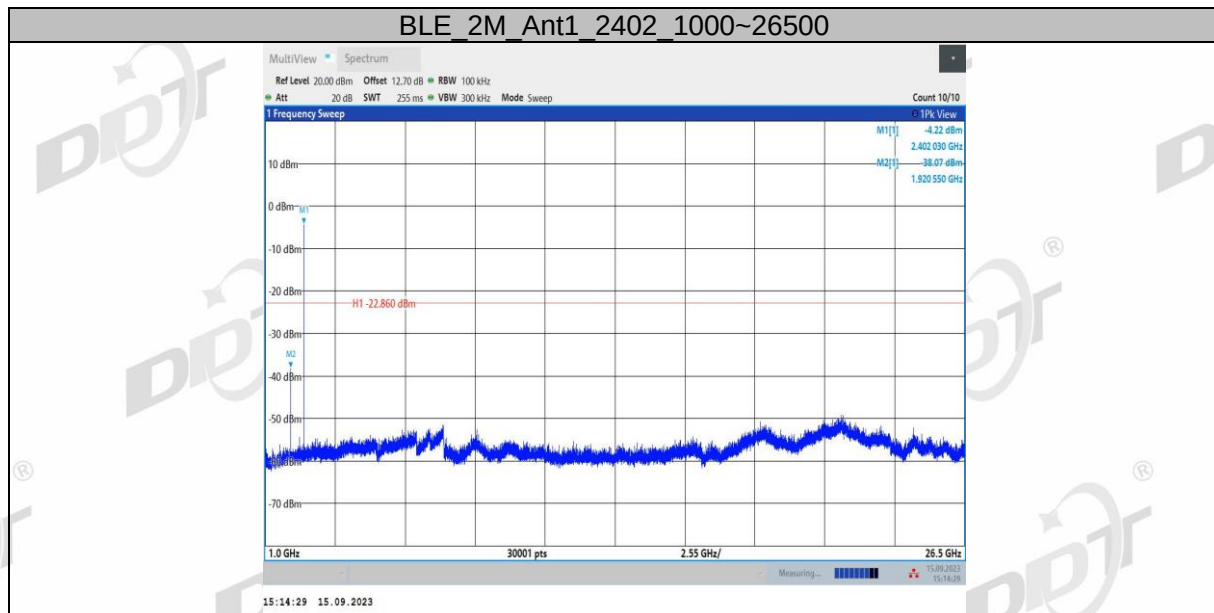


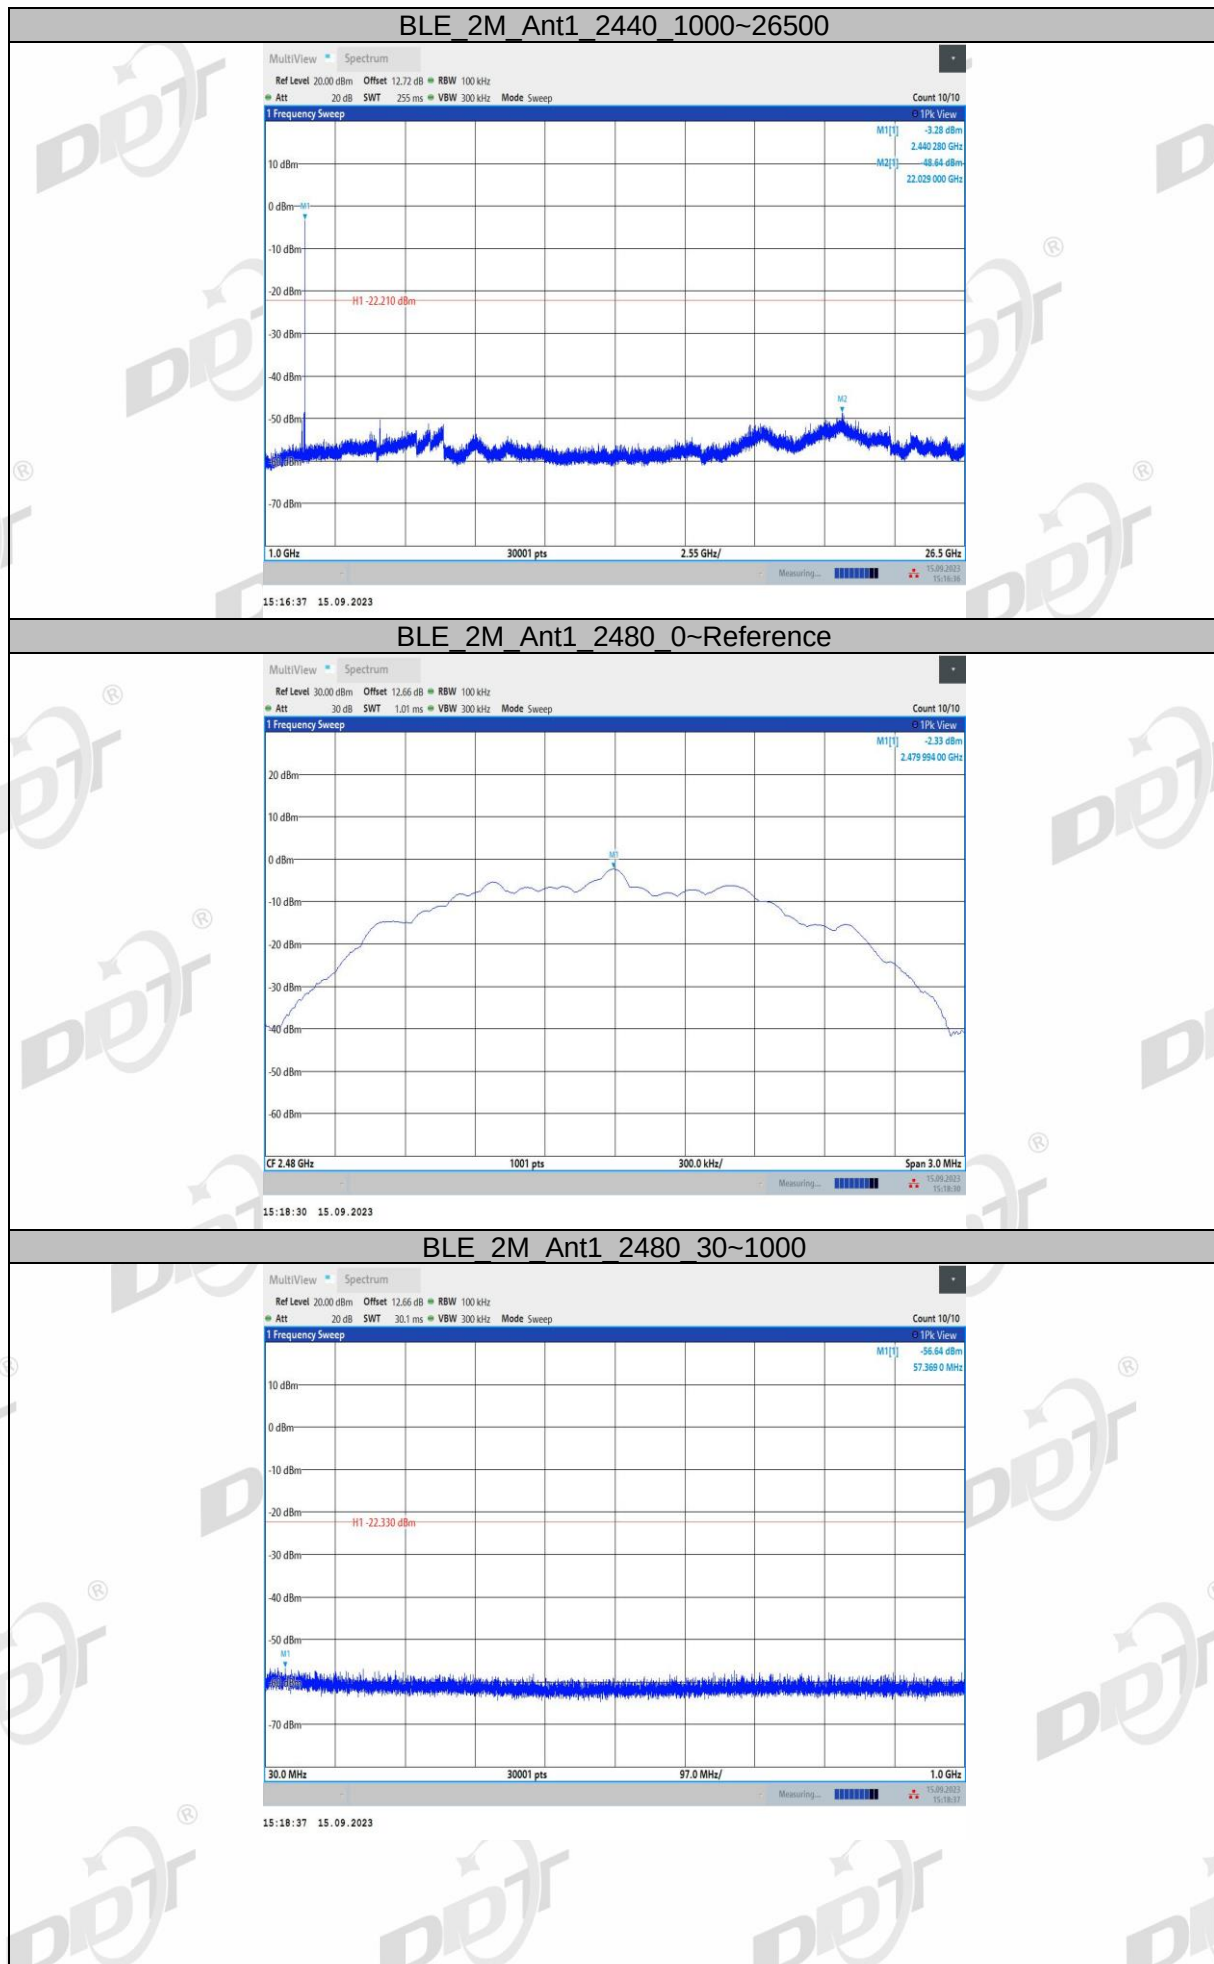


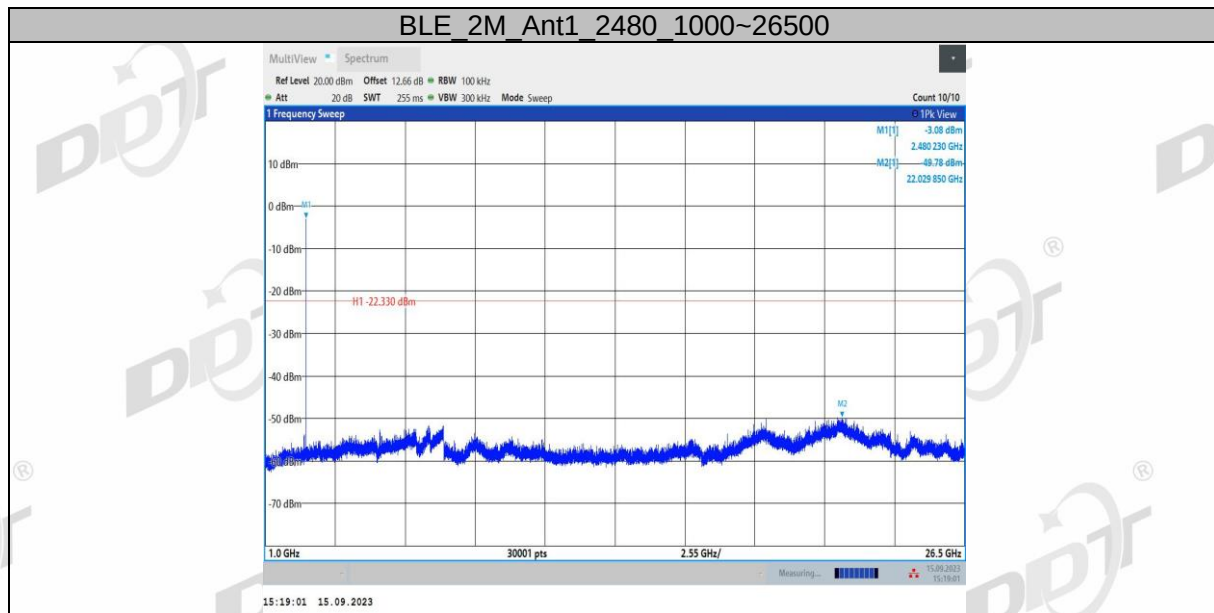


Sample S23090520-16:

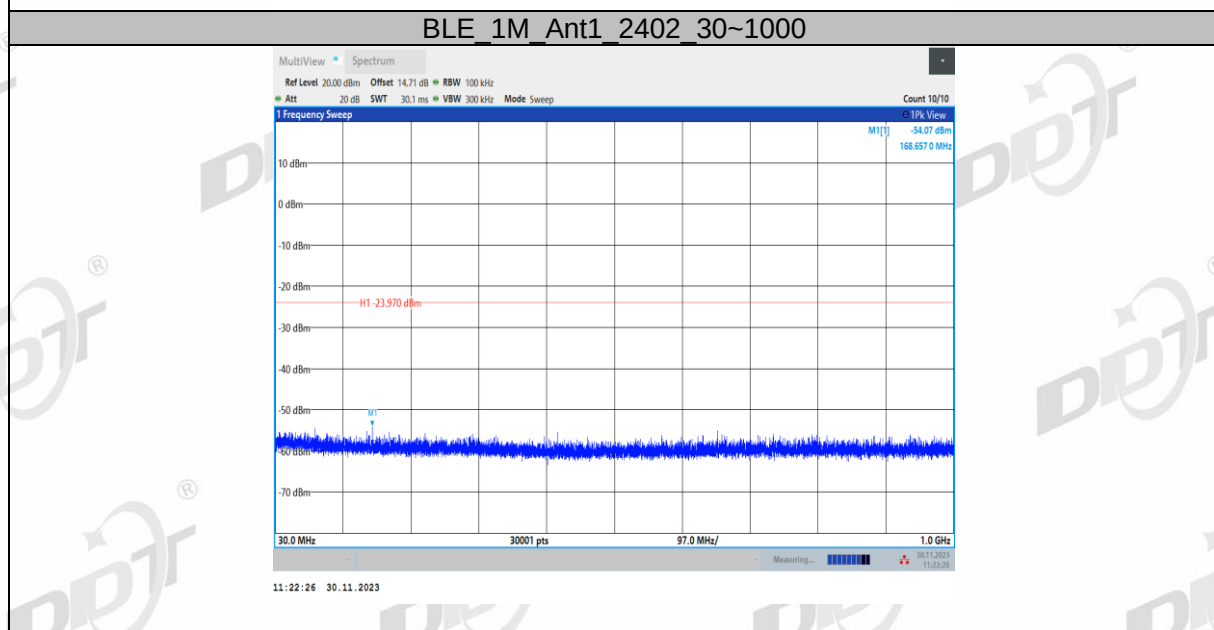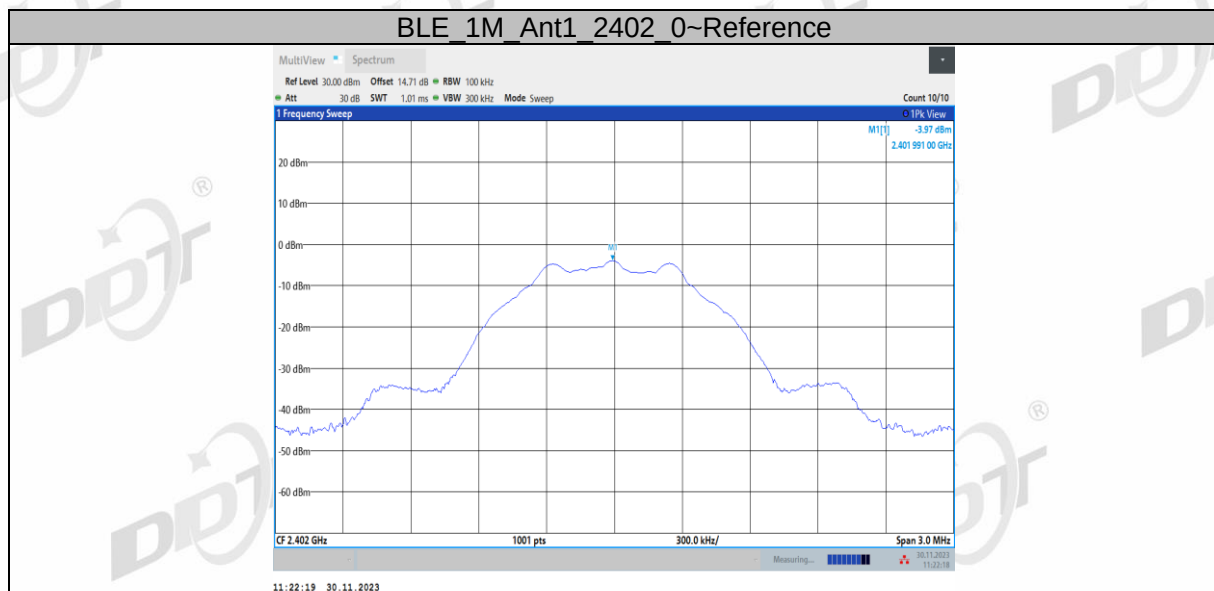

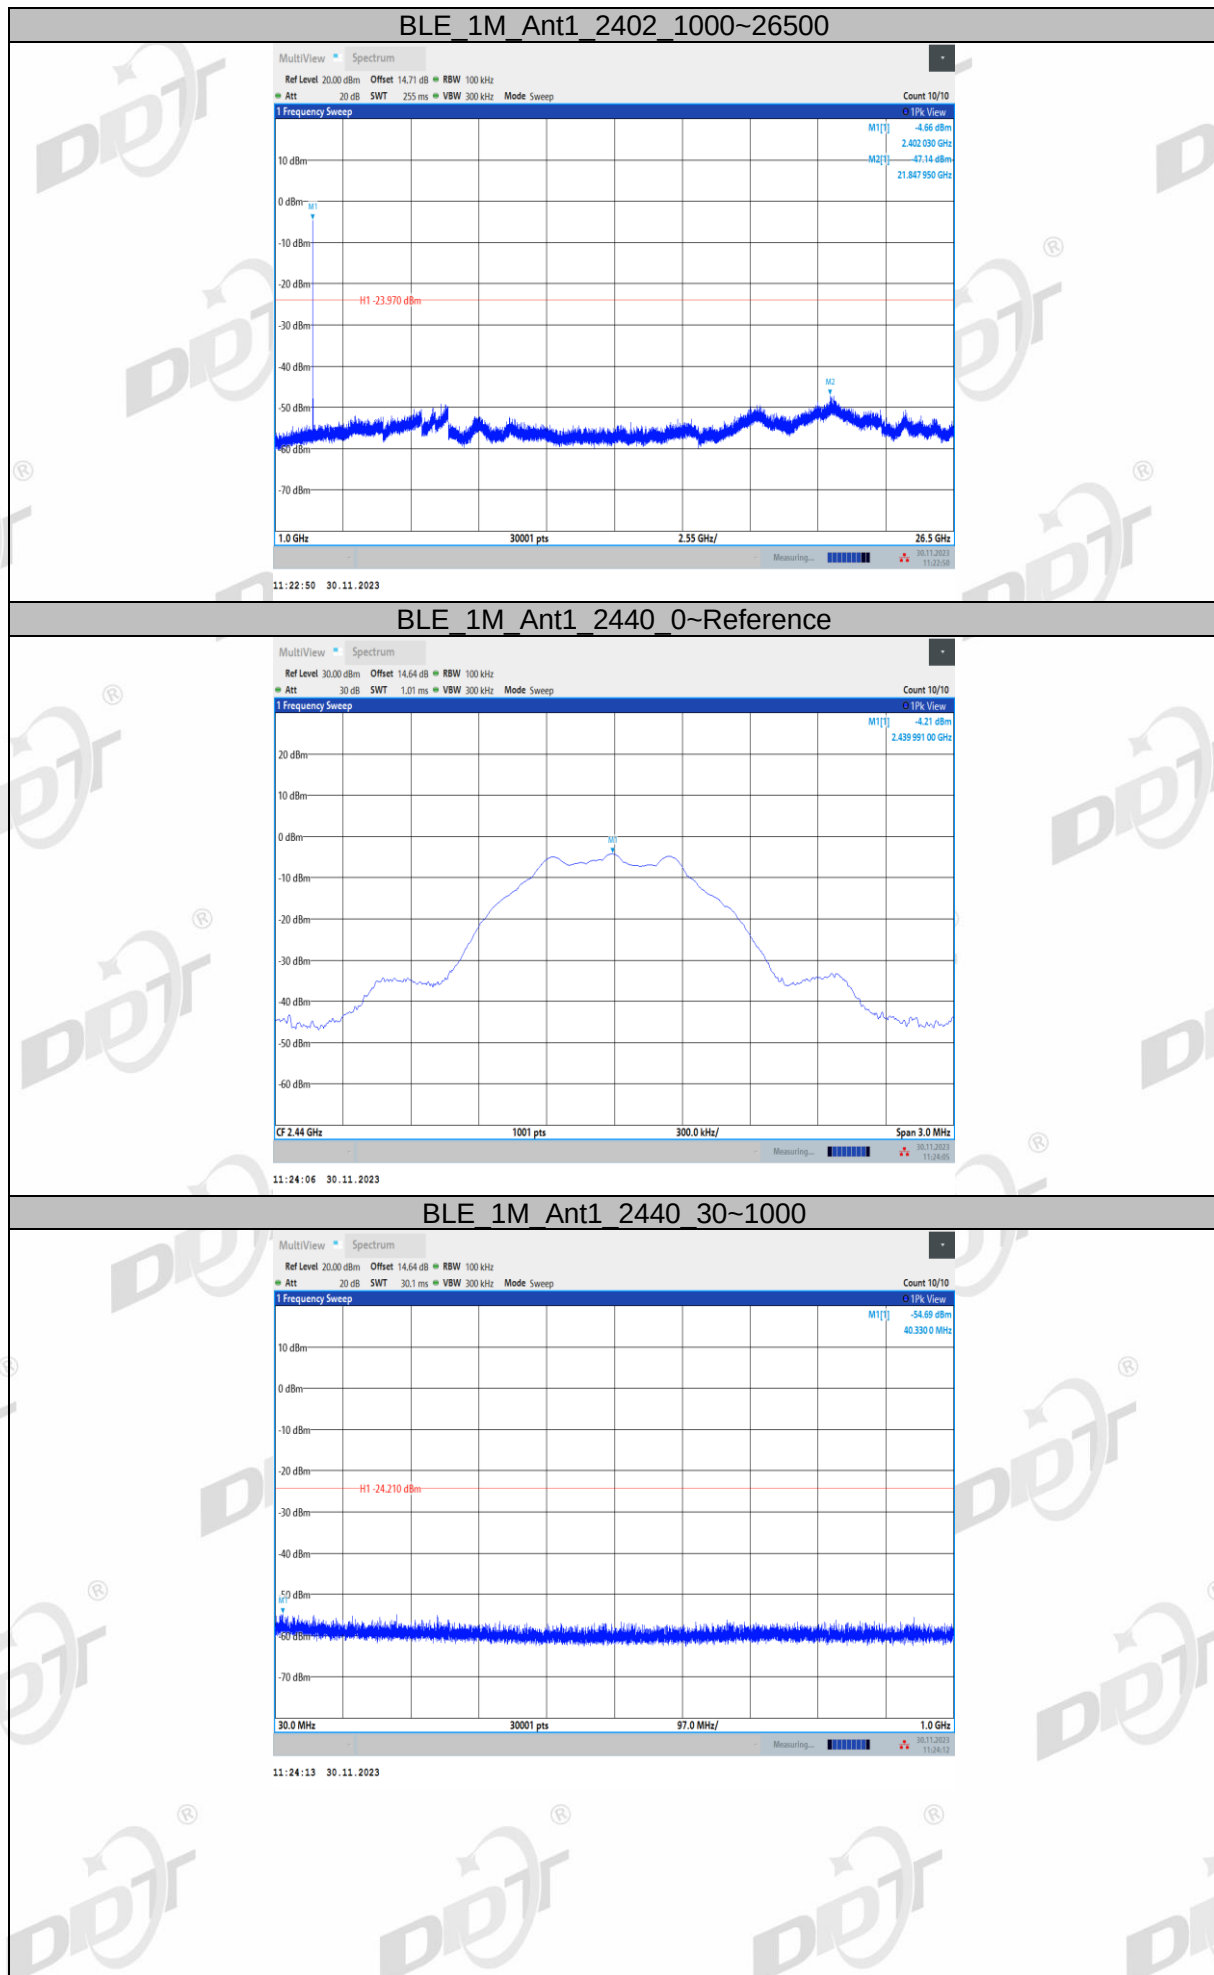


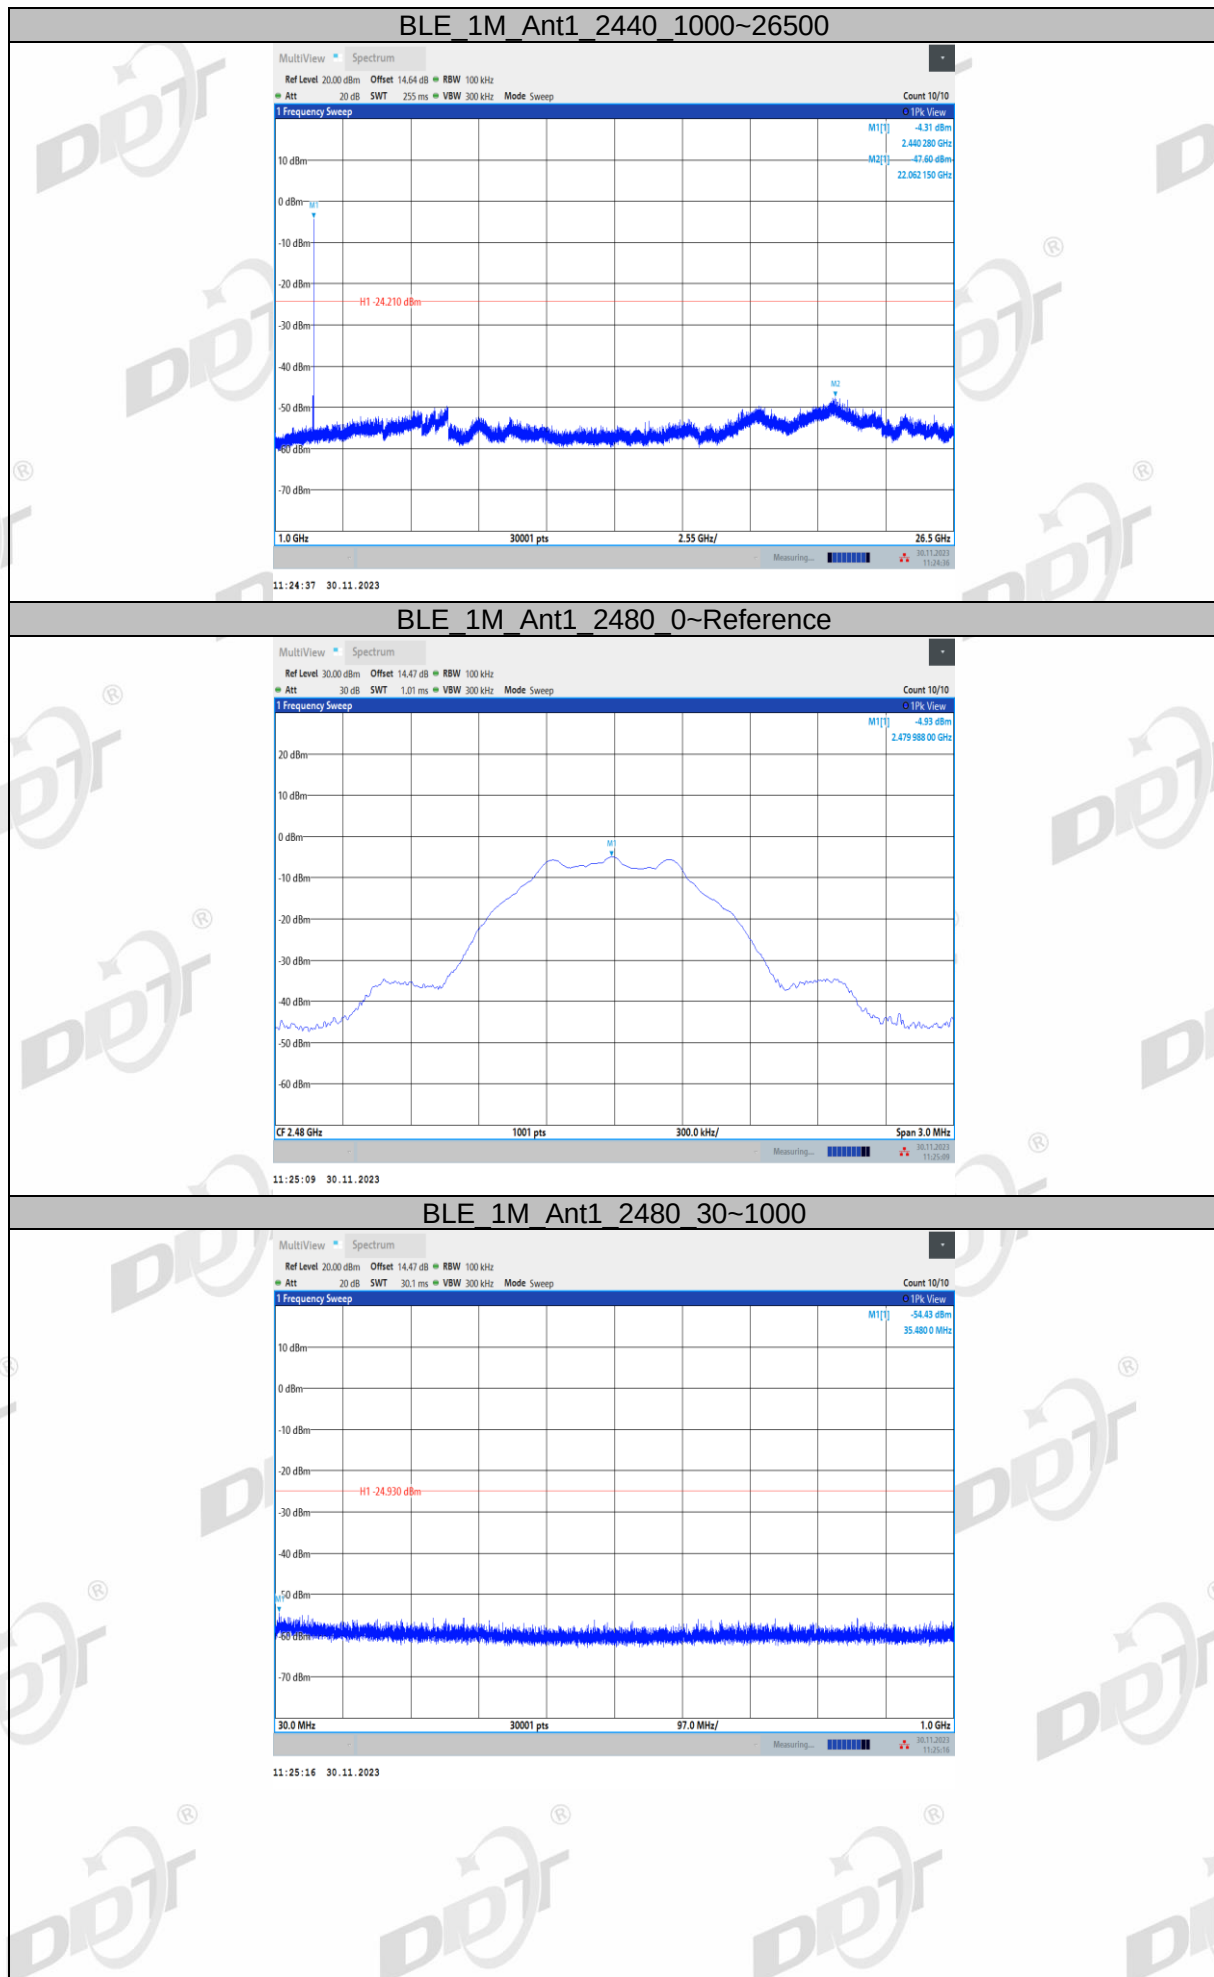


BLE 1M Ant1 2480 1000~26500

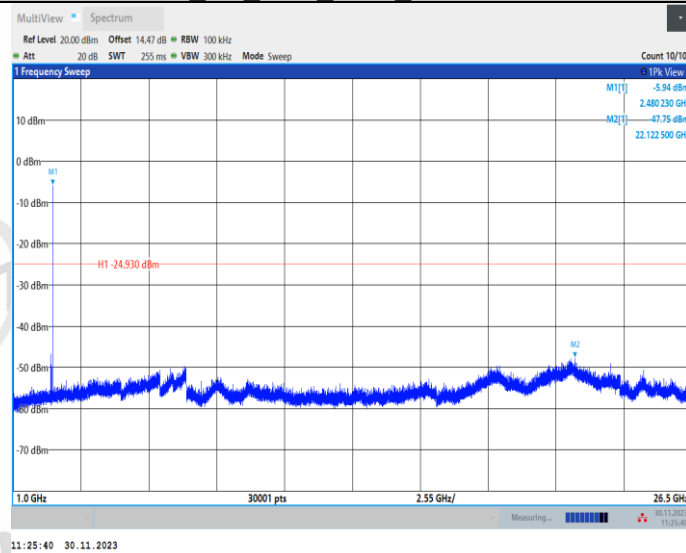


BLE 2M Ant1 2402 0~Reference

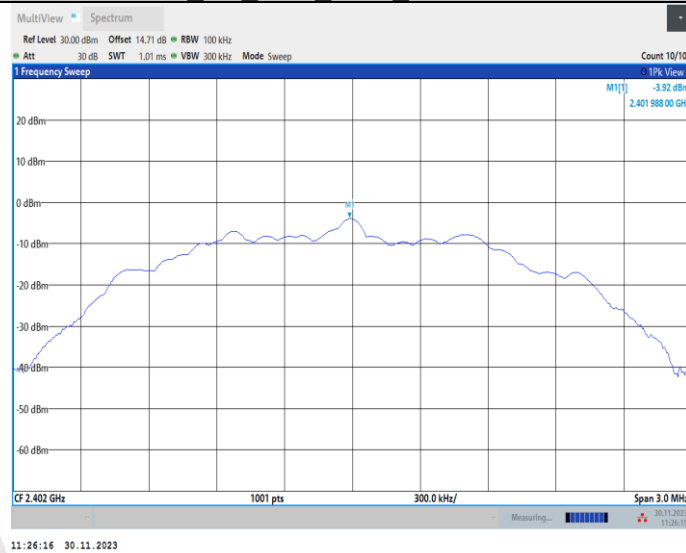


BLE 2M Ant1 2402 30~1000

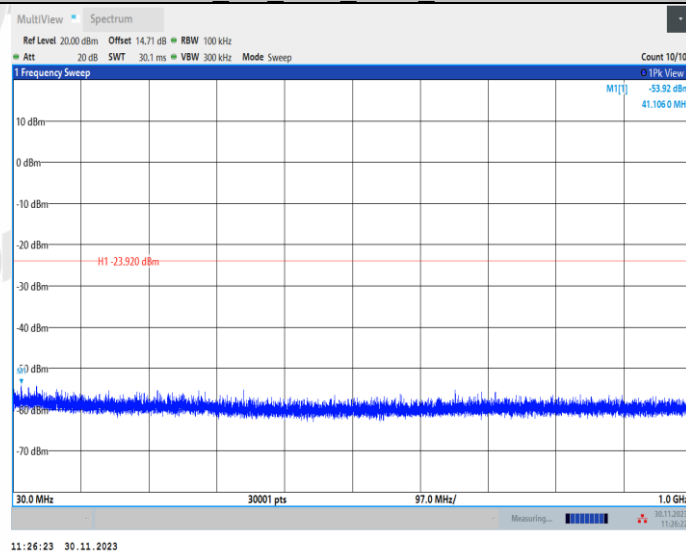


BLE 2M Ant1 2402 1000~26500

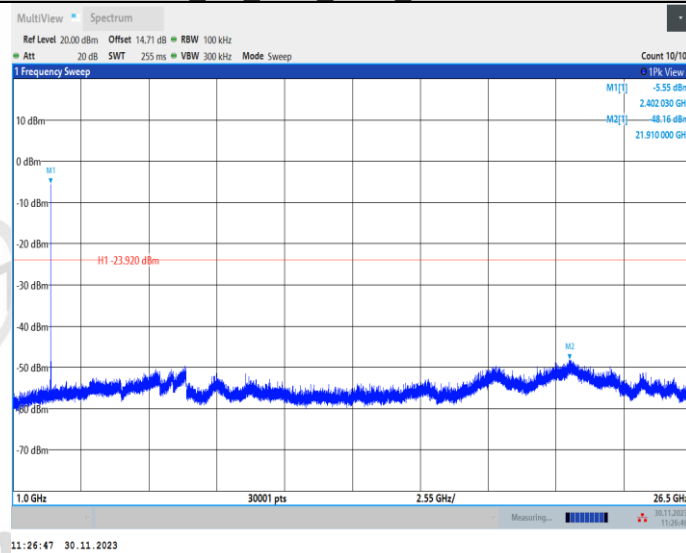



BLE 2M Ant1 2440 0~Reference

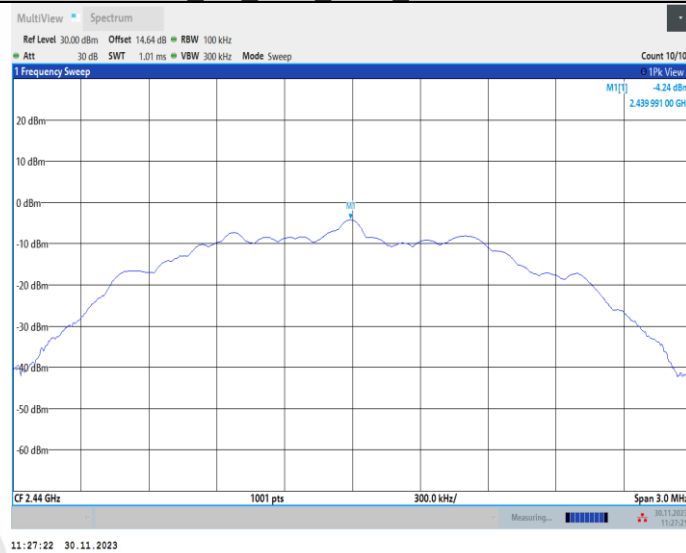

BLE 2M Ant1 2440 30~1000

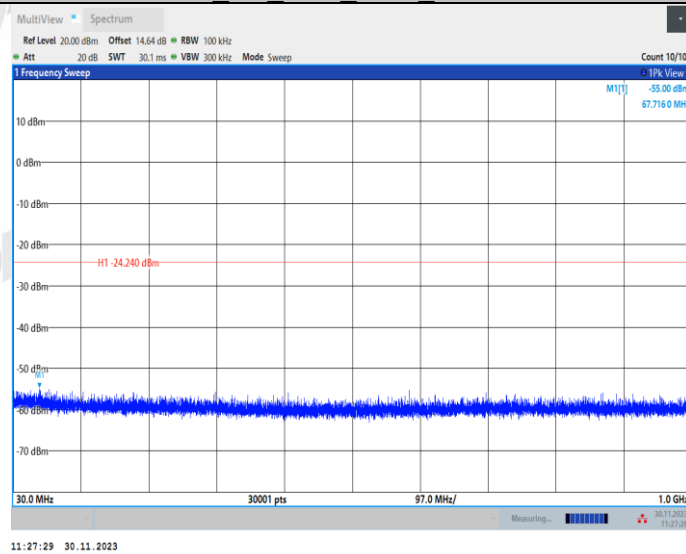


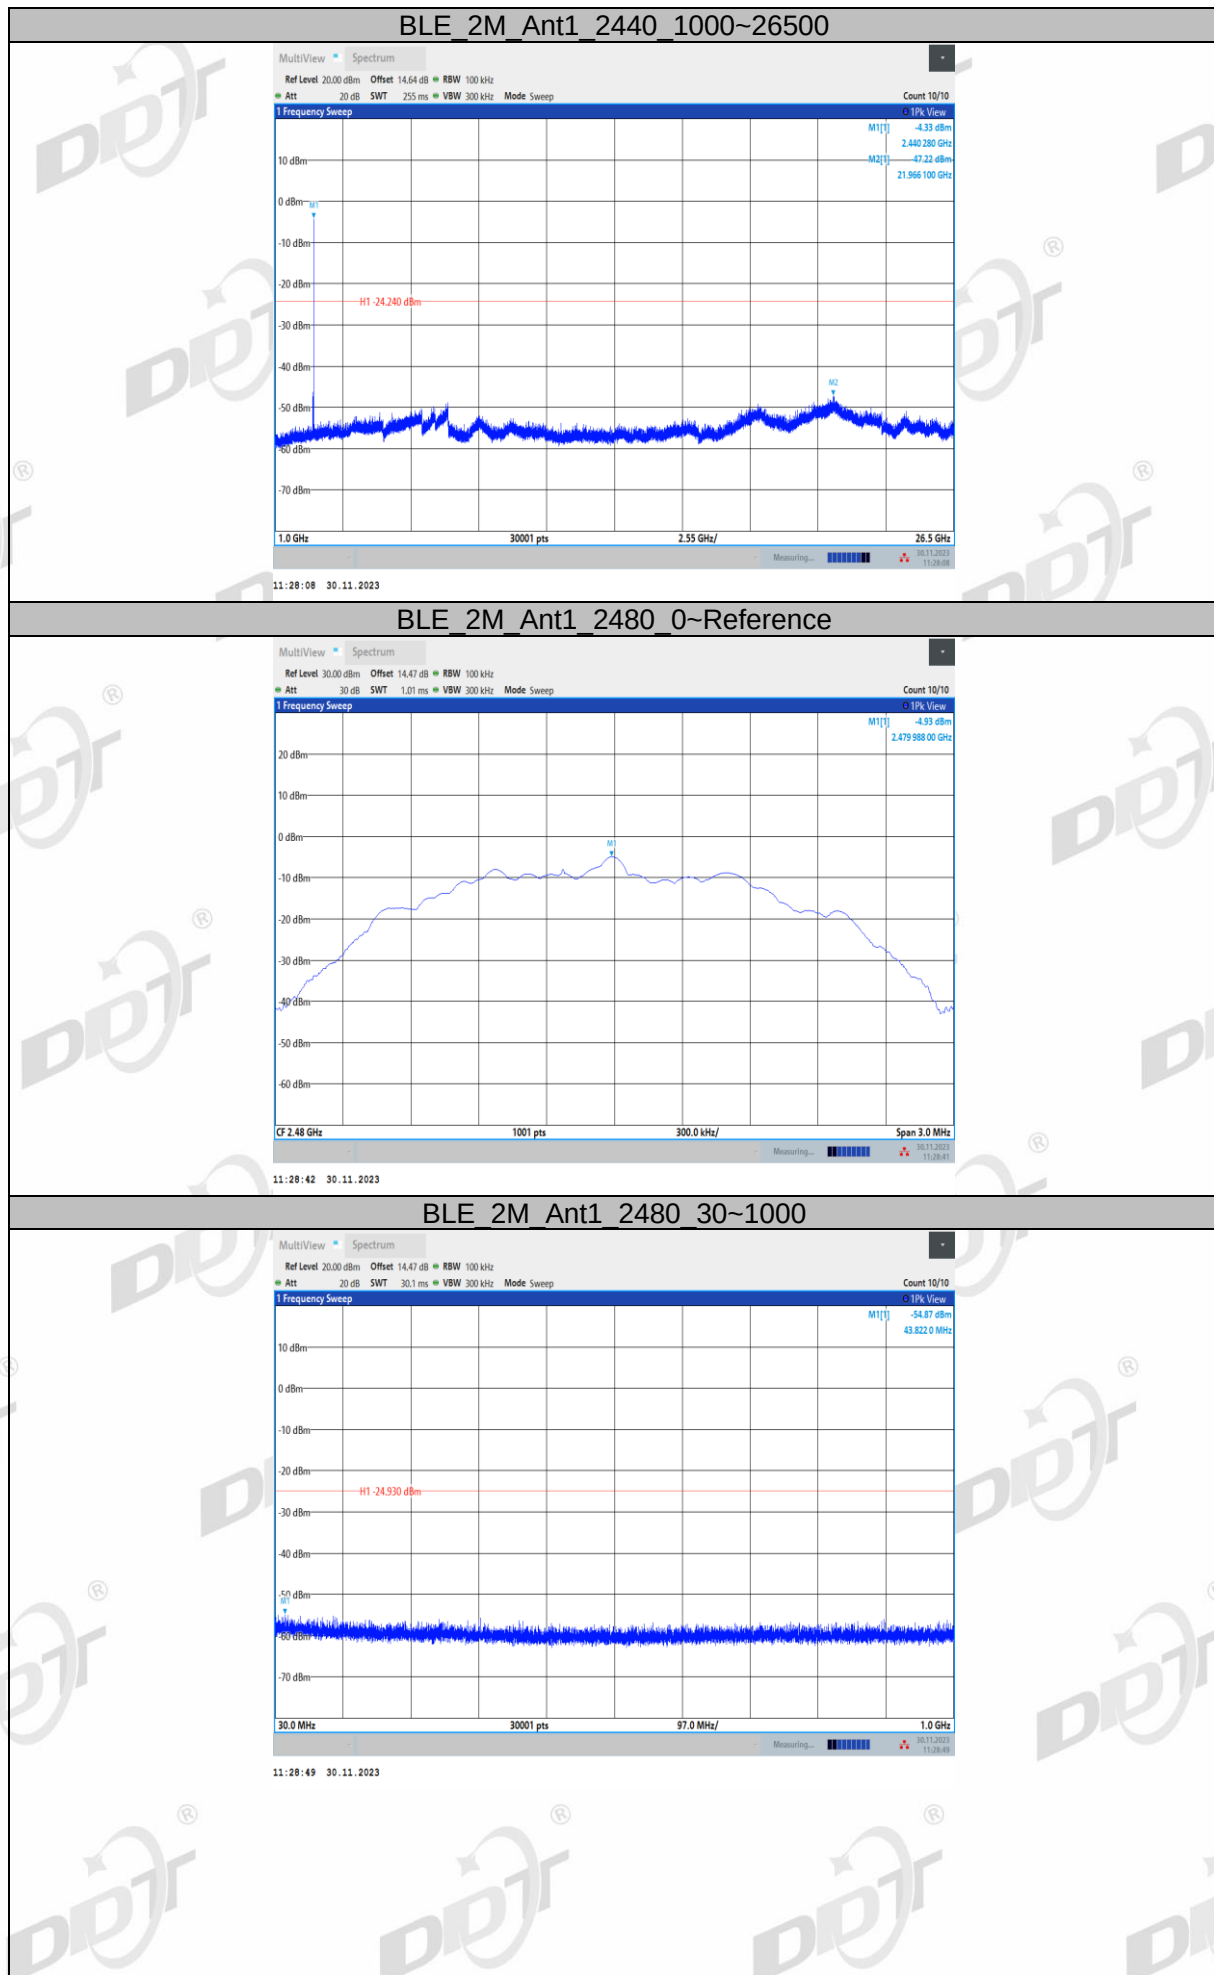

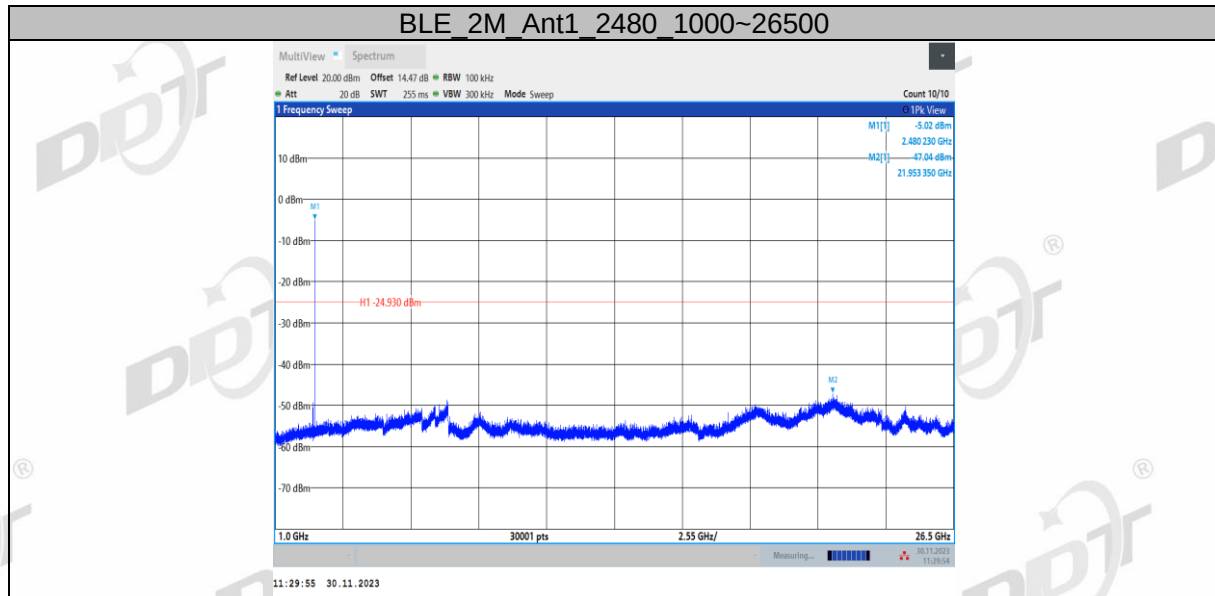

10. Emissions in Restricted Frequency Bands

10.1. Block diagram of test setup

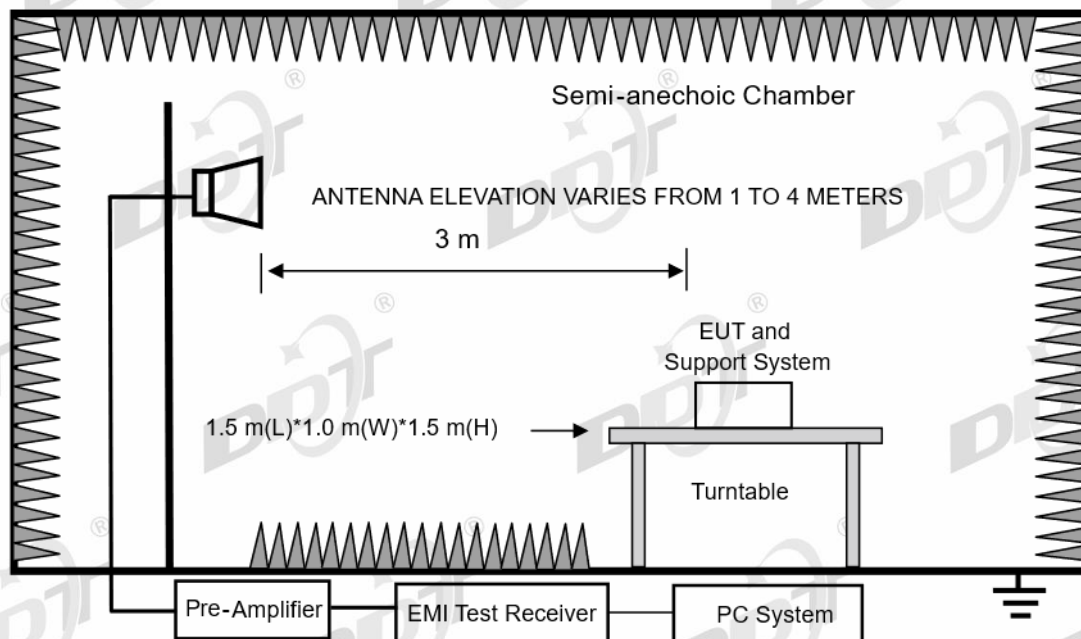

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result


Pass. (See below detailed test result)

Note: Two alternative Crystal oscillator products have been tested, only recorded the worse model: CXA-032000-ADCD41' test data on this report.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\13
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

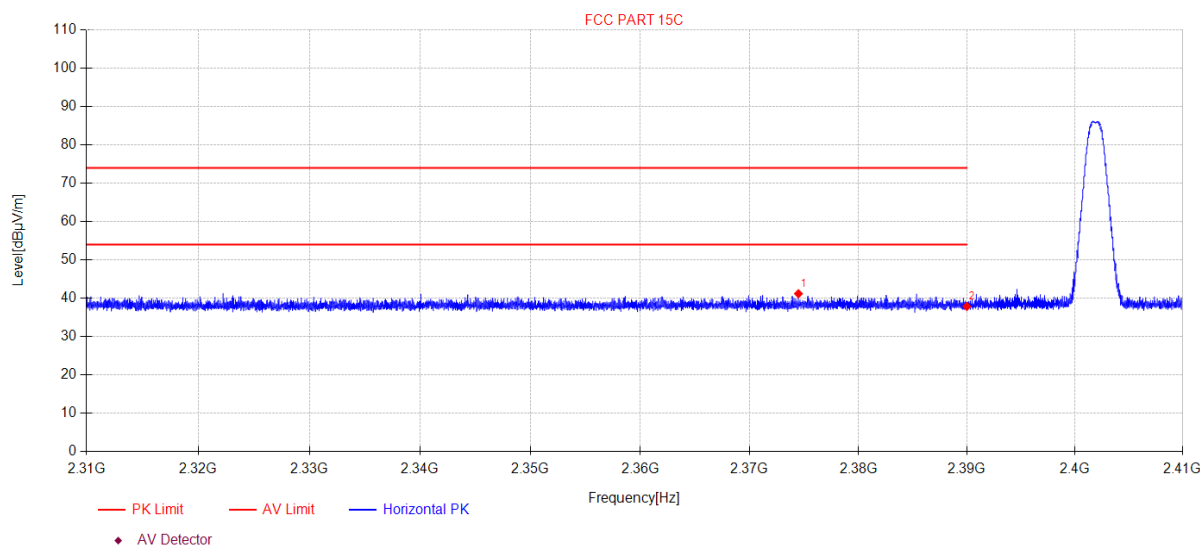

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2374.49	47.96	3.85	27.45	-38.07	41.19	74.00	32.81	PK	Horizontal
2	2390.00	44.63	3.87	27.48	-38.11	37.87	74.00	36.13	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\14
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

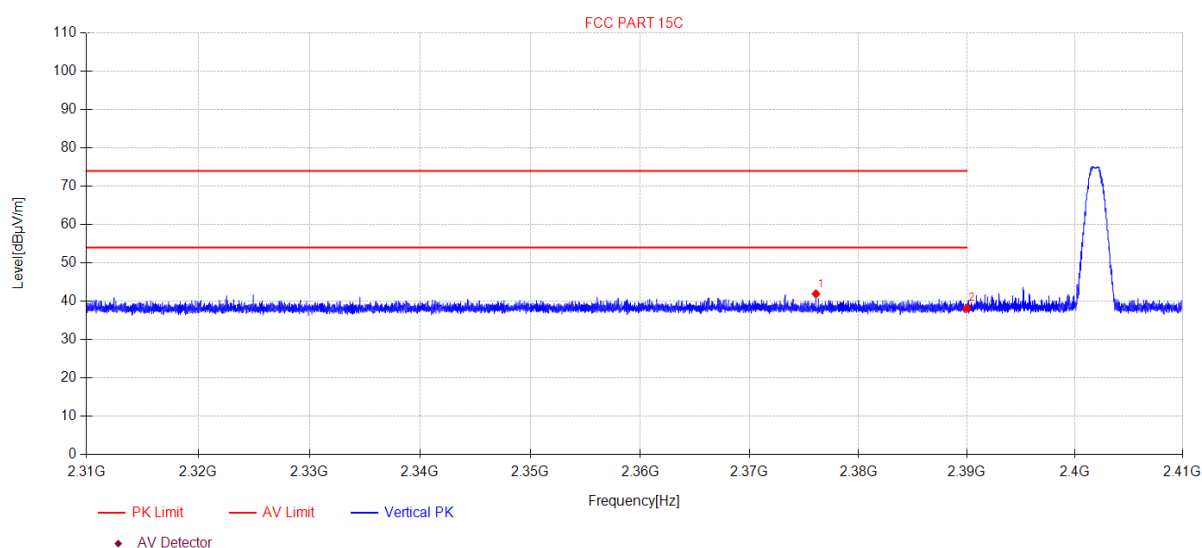

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2376.10	48.69	3.86	27.45	-38.07	41.93	74.00	32.07	PK	Vertical
2	2390.00	44.99	3.87	27.48	-38.11	38.23	74.00	35.77	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\15
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

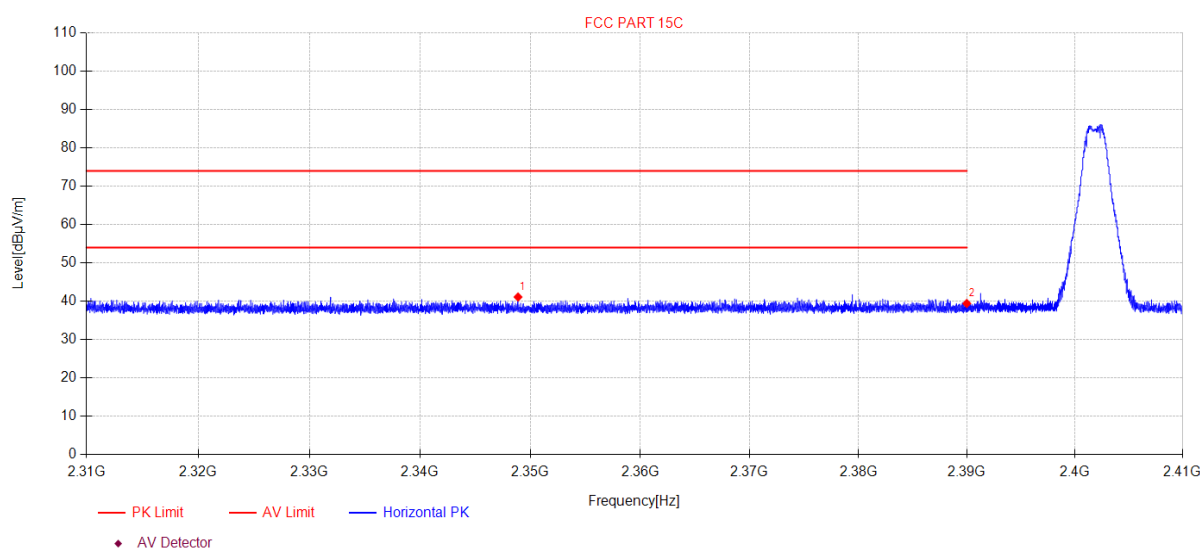

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2348.88	47.88	3.84	27.40	-38.00	41.12	74.00	32.88	PK	Horizontal
2	2390.00	46.19	3.87	27.48	-38.11	39.43	74.00	34.57	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2402MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\16
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

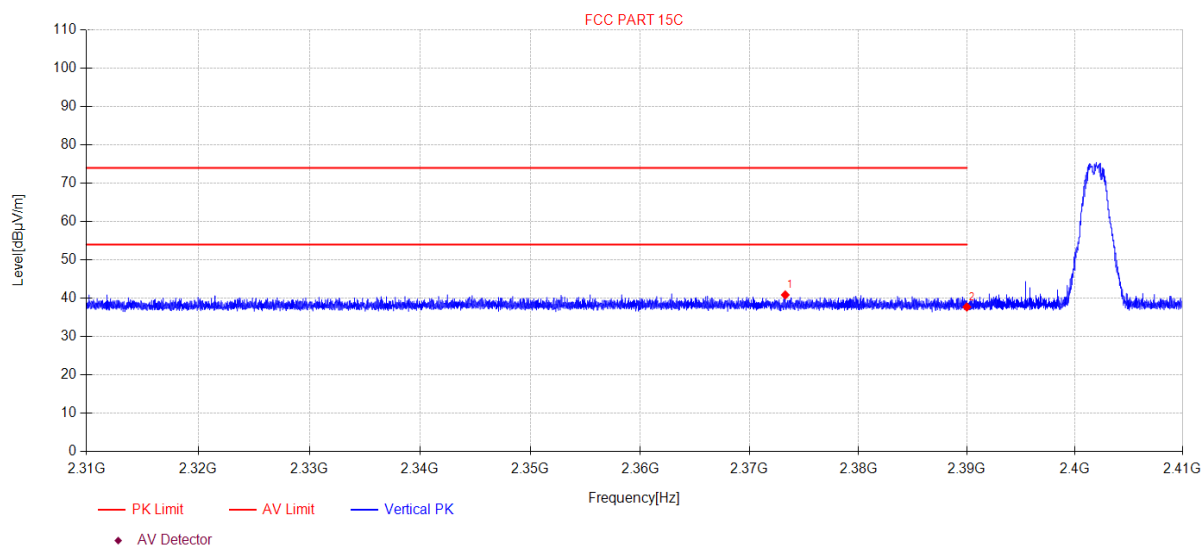

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2373.28	47.65	3.85	27.45	-38.07	40.88	74.00	33.12	PK	Vertical
2	2390.00	44.48	3.87	27.48	-38.11	37.72	74.00	36.28	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\19
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

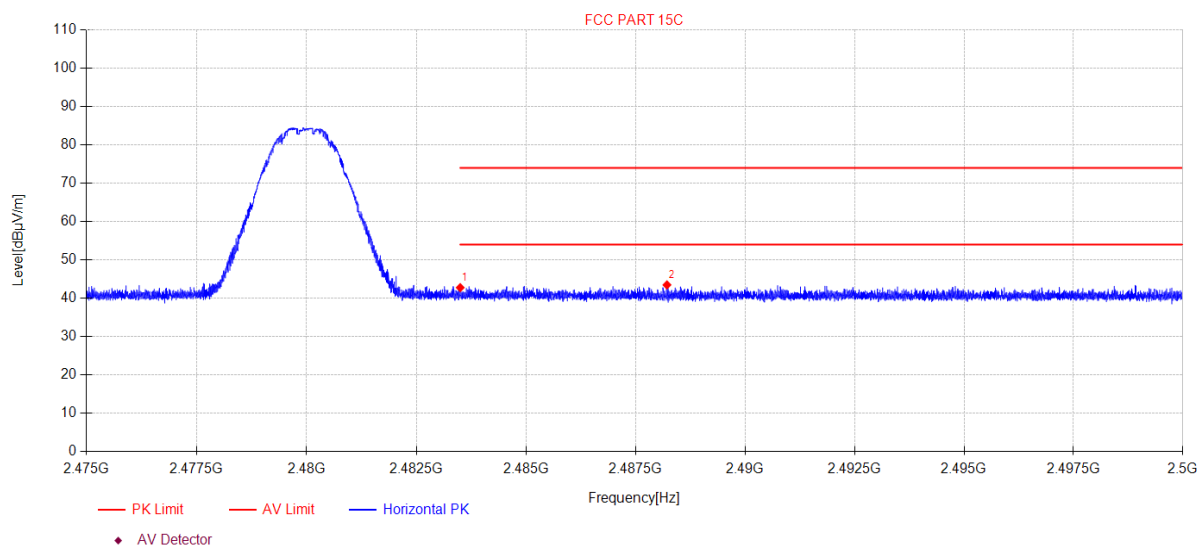

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	49.49	3.94	27.73	-38.38	42.78	74.00	31.22	PK	Horizontal
2	2488.21	50.19	3.94	27.75	-38.39	43.49	74.00	30.51	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 1M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\20
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

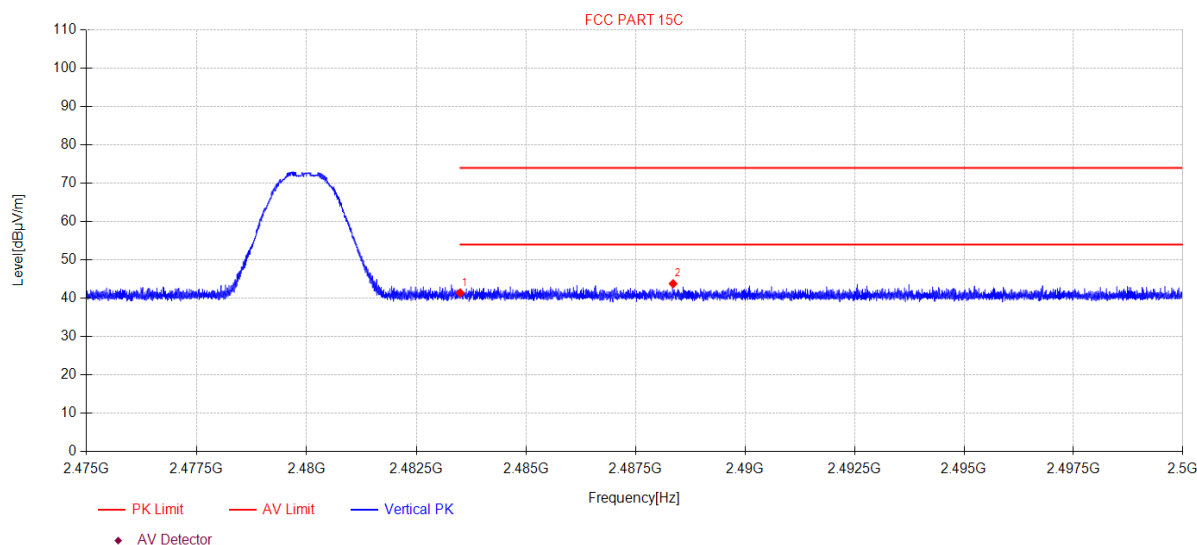

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	48.13	3.94	27.73	-38.38	41.42	74.00	32.58	PK	Vertical
2	2488.35	50.51	3.94	27.75	-38.39	43.81	74.00	30.19	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\17
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

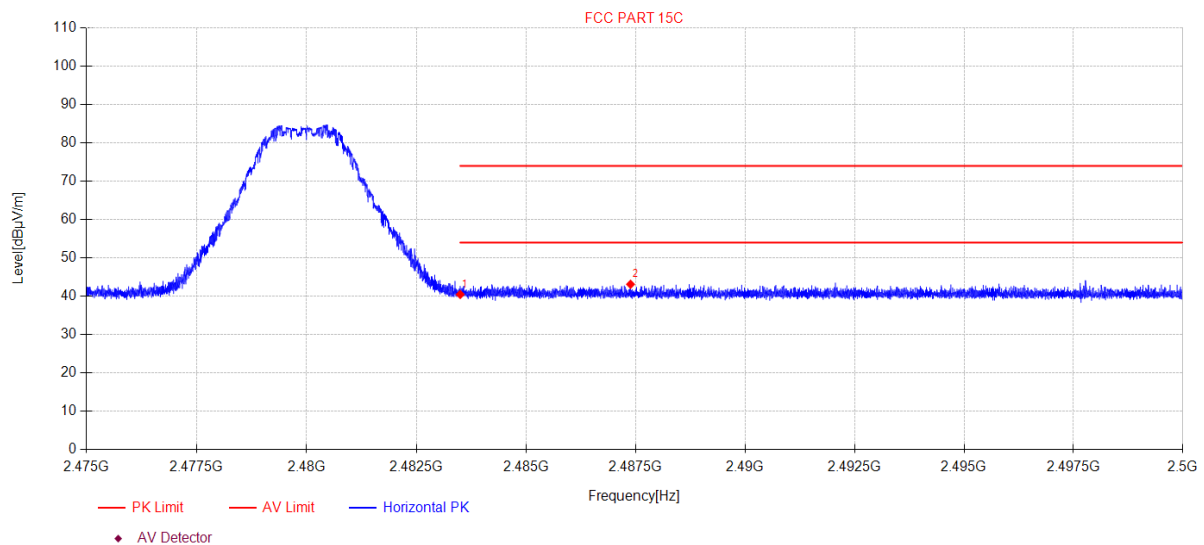

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.19	3.94	27.73	-38.38	40.48	74.00	33.52	PK	Horizontal
2	2487.38	49.83	3.94	27.75	-38.39	43.13	74.00	30.87	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-09-26 **Tested By:** Johnson Huang
EUT: Guitar Headphone Amplifier **Model Number:** Mustang Micro Plus
Test Mode: BLE 2M TX 2480MHz **Power Supply:** DC 5V
Condition: Temp:22.3°C;Humi:61.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23090520-2E Mustang Micro Plus\FCC ABOVE 1G\18
Memo: Sample Number:S23090520-06 Power Setting:NA

Test Graph

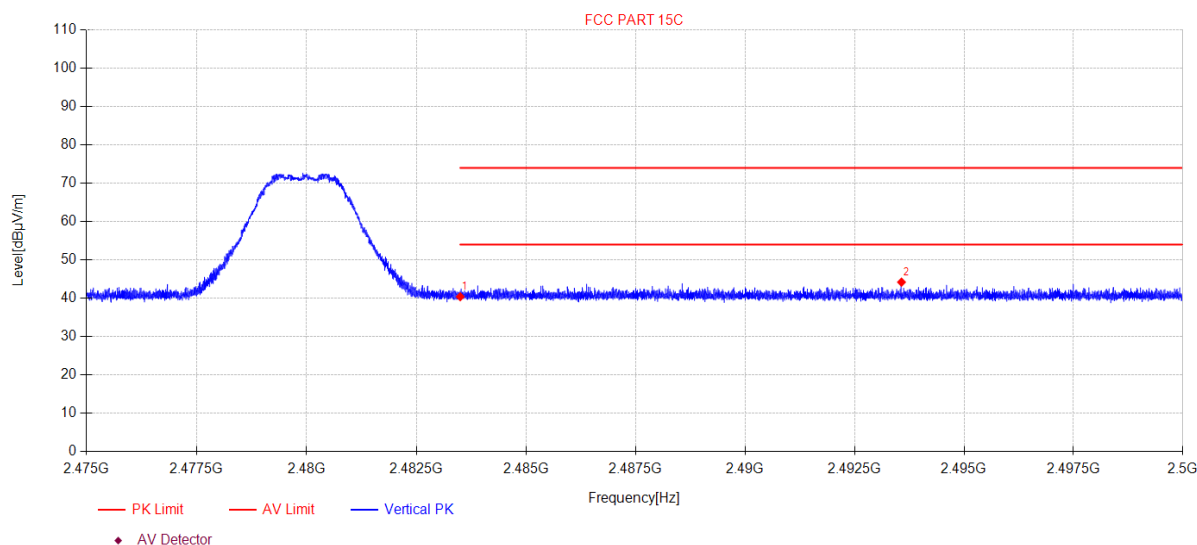


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.11	3.94	27.73	-38.38	40.40	74.00	33.60	PK	Vertical
2	2493.57	50.90	3.95	27.77	-38.41	44.21	74.00	29.79	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

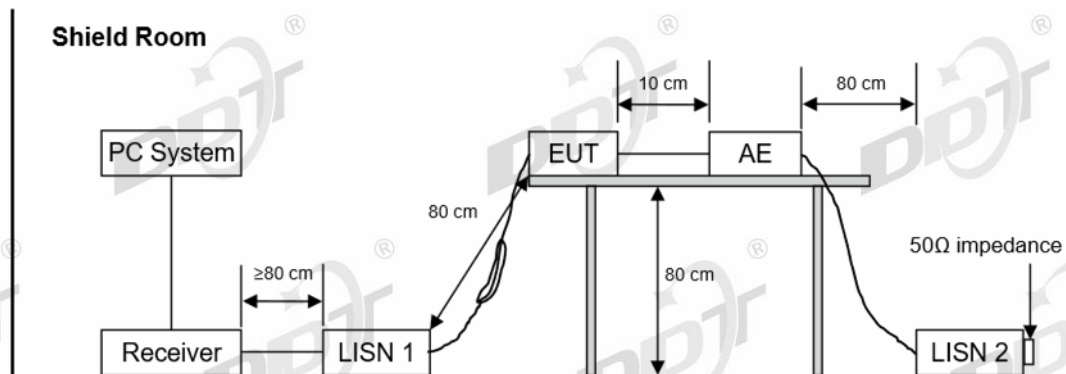

11.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test setup as described in clause 11.1 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

Note 4: Two alternative Crystal oscillator products have been tested, only recorded the worse model: CXA-032000-ADCD41' test data on this report.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2023 CE report data\Q23090520-2E\FCC.EM6

Test Date : 2023-09-26

Tested By : Johnson Huang

EUT : Guitar Headphone Amplifier

Model Number : Mustang Micro Plus

Power Supply : AC 120V/60Hz


Test Mode : TX

Condition : TEMP:23.4°C, RH:52.6%

LISN : 2023 1# ENV216/LINE

Memo : BLE

Data: 6

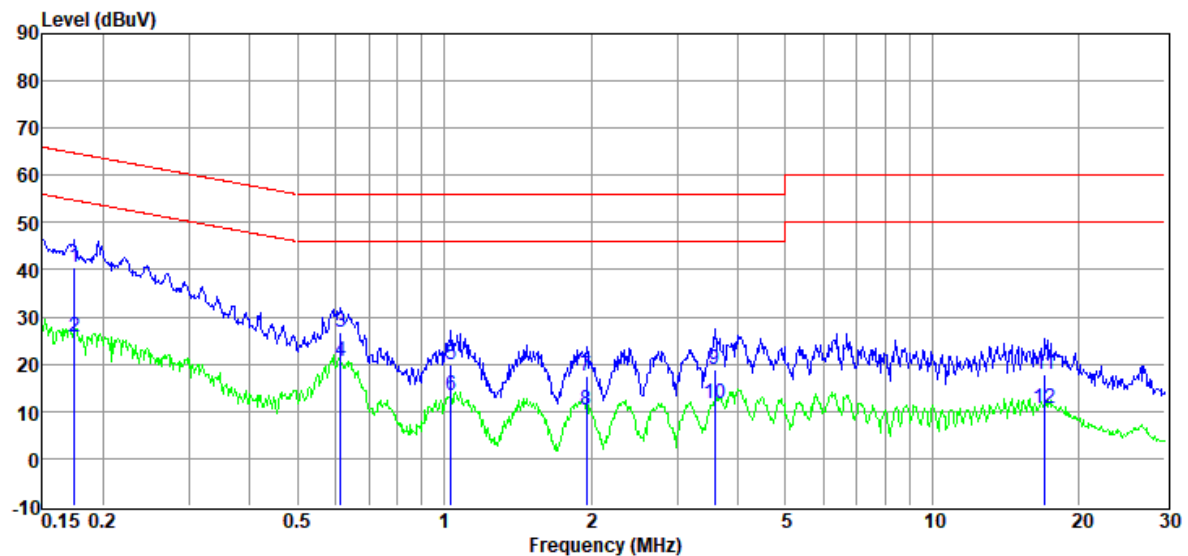

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	20.23	9.74	0.92	9.68	40.57	64.72	-24.15	QP	LINE
2	0.17	5.34	9.74	0.92	9.68	25.68	54.72	-29.04	Average	LINE
3	0.61	6.33	9.78	0.81	9.72	26.64	56.00	-29.36	QP	LINE
4	0.61	0.30	9.78	0.81	9.72	20.61	46.00	-25.39	Average	LINE
5	1.03	-0.17	9.64	0.67	9.73	19.87	56.00	-36.13	QP	LINE
6	1.03	-6.79	9.64	0.67	9.73	13.25	46.00	-32.75	Average	LINE
7	1.96	-2.84	9.83	0.64	9.76	17.39	56.00	-38.61	QP	LINE
8	1.96	-9.81	9.83	0.64	9.76	10.42	46.00	-35.58	Average	LINE
9	3.58	-1.25	9.64	0.57	9.78	18.74	56.00	-37.26	QP	LINE
10	3.58	-8.36	9.64	0.57	9.78	11.63	46.00	-34.37	Average	LINE
11	17.02	-2.15	9.84	0.34	9.90	17.93	60.00	-42.07	QP	LINE
12	17.02	-9.46	9.84	0.34	9.90	10.62	50.00	-39.38	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2023 CE report data\Q23090520-2E\FCC.EM6

Test Date : 2023-09-26

Tested By : Johnson Huang

EUT : Guitar Headphone Amplifier

Model Number : Mustang Micro Plus

Power Supply : AC 120V/60Hz


Test Mode : TX

Condition : TEMP:23.4°C, RH:52.6%

LISN : 2023 1# ENV216/NEUTRAL

Memo : BLE

Data: 8

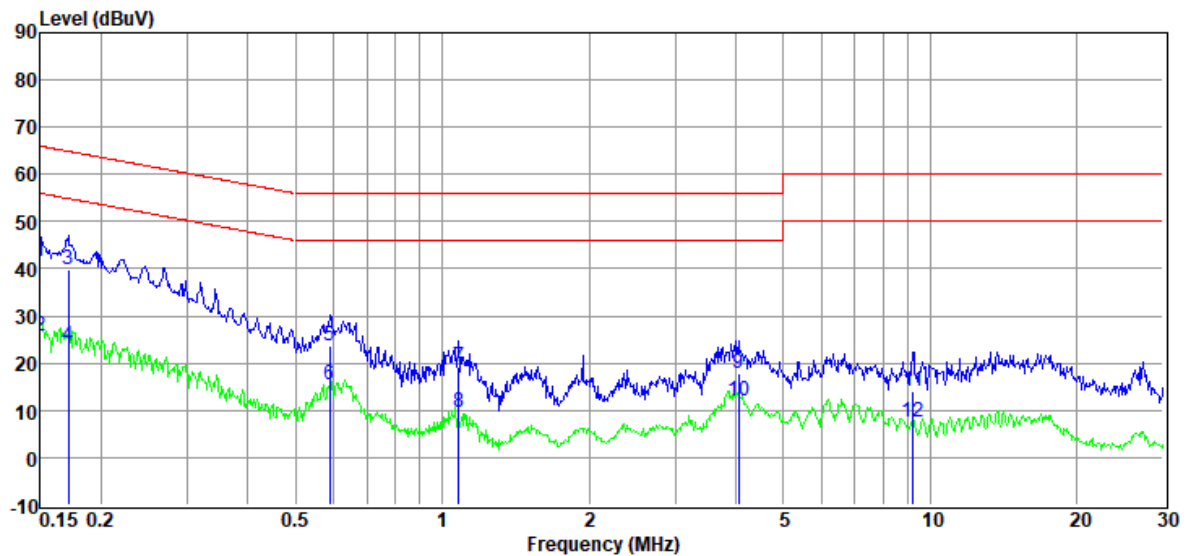

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	21.22	9.83	0.92	9.68	41.65	66.00	-24.35	QP	NEUTRAL
2	0.15	5.22	9.83	0.92	9.68	25.65	56.00	-30.35	Average	NEUTRAL
3	0.17	19.30	9.88	0.92	9.68	39.78	64.90	-25.12	QP	NEUTRAL
4	0.17	3.19	9.88	0.92	9.68	23.67	54.90	-31.23	Average	NEUTRAL
5	0.59	3.29	9.82	0.82	9.72	23.65	56.00	-32.35	QP	NEUTRAL
6	0.59	-4.78	9.82	0.82	9.72	15.58	46.00	-30.42	Average	NEUTRAL
7	1.08	-0.94	9.74	0.67	9.73	19.20	56.00	-36.80	QP	NEUTRAL
8	1.08	-10.62	9.74	0.67	9.73	9.52	46.00	-36.48	Average	NEUTRAL
9	4.05	-2.27	9.75	0.56	9.78	17.82	56.00	-38.18	QP	NEUTRAL
10	4.05	-8.20	9.75	0.56	9.78	11.89	46.00	-34.11	Average	NEUTRAL
11	9.20	-5.92	9.79	0.25	9.82	13.94	60.00	-46.06	QP	NEUTRAL
12	9.20	-12.46	9.79	0.25	9.82	7.40	50.00	-42.60	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

12.2. Result

The antenna used for this product is ceramic antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.64 dBi.

14. Photos of the EUT

Please refer to Appendix I: Photos of the EUT.

END OF REPORT