



TEST REPORT

Report No. SST2503E0260

Applicant: Onyx International Inc.

Address of Applicant: Room 101, Building 4, No. 202 Shiyu Road, Nansha District, Guangzhou City, Guangdong Province, China

Product Name: E Ink Tablet, ePaper Tablet, Digital Paper, E reader , Paper tablet, eBook reader

Trade Mark: BOOX

Standard(s): FCC CFR Title 47 Part 15 Subpart E Section 15.247

FCC ID: XR3- GO7

Test Report Form No: SST-RD-7.5-02-E01(A/0)

Date of sample receipt: 2025/2/24

Date of Test: 2025/2/24 - 2025/3/20

Date of report issued: 2025/3/21

*The equipment complies with the requirements according to the standard(s) or Specification above, it is applicable only to the tested sample identified in the report.

Prepared by:




Reviewed by:

Approved by:

*The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Version | Description | Date of Issue |
|---------|-------------|---------------|
| V1.0 | Original | 2025/3/21 |
| | | |
| | | |

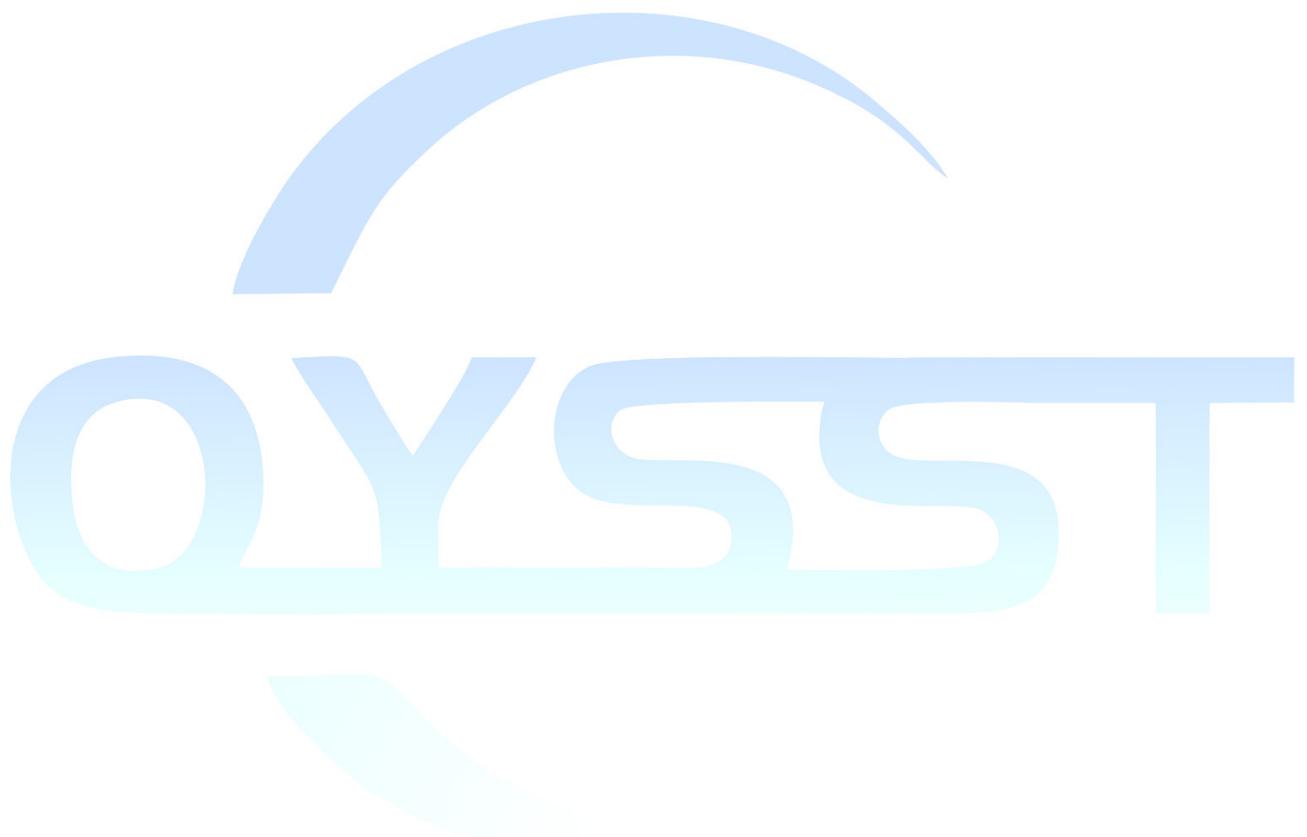

2 Contents

| | Page |
|--|------|
| 1 COVER PAGE | 1 |
| 2 CONTENTS | 3 |
| 3 TEST SUMMARY | 4 |
| 4 MEASUREMENT UNCERTAINTY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF EUT | 5 |
| 5.3 TEST MODE(S) | 6 |
| 5.4 TEST FACILITY | 6 |
| 5.5 DESCRIPTION OF SUPPORT UNITS | 7 |
| 5.6 ADDITIONAL INSTRUCTIONS | 7 |
| 5.7 ANTENNA INFORMATION | 7 |
| 5.8 OTHERS | 7 |
| 6 TECHNICAL REQUIREMENT AND MEASUREMENT DATA | 8 |
| 6.1 GENERALLY REQUIREMENT | 8 |
| 6.2 DUTY CYCLE | 9 |
| 6.3 CONDUCTED PEAK OUTPUT POWER | 10 |
| 6.4 CHANNEL BANDWIDTH | 11 |
| 6.5 POWER SPECTRAL DENSITY | 12 |
| 6.6 CONDUCTED EMISSION | 13 |
| 6.7 RADIATED SPURIOUS EMISSION | 14 |
| 6.8 CONDUCTED EMISSIONS | 18 |
| 7 TEST SETUP PHOTO | 21 |
| 8 EUT CONSTRUCTIONAL DETAILS | 21 |
| ANNEX A --TEST INSTRUMENTS LIST | 22 |

3 Test Summary

| Test items | Basics standards | Result |
|----------------------------------|----------------------------|--------|
| Antenna requirement | FCC part 15.203/15.247 (c) | Pass |
| AC Power Line Conducted Emission | FCC part 15.207 | Pass |
| Conducted Peak Output Power | FCC part 15.247 (b)(3) | Pass |
| Channel Bandwidth & 99% OCB | FCC part 15.247 (a)(2) | Pass |
| Power Spectral Density | FCC part 15.247 (e) | Pass |
| Band Edge | FCC part 15.247(d) | Pass |
| Spurious Emission | FCC part 15.205/15.209 | Pass |

Notes:

1: NA =Not Applicable

2: Determining compliance based on the results of the compliance measurement, not taking into account measurement uncertainty. If necessary, the applicant shall inform the test lab in advance

3: Additions, Deviations and Exclusions from Standards: None.

4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Item | Uncertainty (\pm) ($k=2$, 95%) | |
|-----------------------------------|--------------------------------------|------|
| Output Power, Conducted | 0.54 | |
| Power Spectral Density, Conducted | 1.28 | |
| Spurious Emissions, Conducted | 1.28 | |
| Radiated Emissions(<1GHz) | 9KHz~30MHz | 2.6 |
| | 30MHz~1GHz | 5.08 |
| Radiated Emissions(>1GHz) | 1GHz~6GHz | 4.02 |
| | 6GHz~18GHz | 4.62 |
| | 18GHz~40GHz | 4.7 |
| Occupied Bandwidth | 1.14 | |
| Conducted Emissions—AC mains | 9kHz~150KHz | 1.76 |
| | 150kHz~30MHz | 2.52 |
| Conducted Emissions—Telecom | 2.64 | |

5 General Information

5.1 Client Information

Applicant: Onyx International Inc.
Address of applicant: Room 101, Building 4, No. 202 Shiyu Road, Nansha District, Guangzhou City, Guangdong Province, China
Manufacturer: Same as applicant
Address of Manufacturer: Same as applicant
Factory: Same as applicant
Address of Factory: Same as applicant

5.2 General Description of EUT

| | |
|--|---|
| Product Name: | E Ink Tablet, ePaper Tablet, Digital Paper, E reader, Paper tablet, eBook reader |
| Listed Models: | Go 7, Go 7 Plus, Go 7 Pro, Go 7 Lite, Go Color 7 (Gen II), Go Color 7 Plus, Go Color 7 Pro, Go Color 7 Lite, Go 7 C, Go 7 C Plus, Go 7 C Pro, Go 7 C Lite |
| All models were in same PCB layout and internal structure, no Electromagnetic Compatibility and radio function changed, Only the product name and appearance color difference for commercial purpose | |
| Test Model: | Go 7 |
| Test sample(s) ID: | 2502240301 |
| Sample(s) Status: | Continuously transmitter |
| S/N: | / |
| Hardware Version: | / |
| Software Version: | / |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel Numbers: | 40 |
| Channel Separation: | 2MHz |
| Modulation Type: | GFSK |
| Antenna Gain: | Refer to section 5.7 for details |
| Power supply: | DC 5V from AC adapter or DC 3.85V 2300mAh Li-ion battery |

5.3 Test mode(s)

| | |
|---------|---------------------------|
| Mode 1: | continuously transmitting |
| Mode 2: | |
| Mode 3: | |
| | |
| | |
| | |
| | |

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402 MHz | 11 | 2422 MHz | 21 | 2442 MHz | 31 | 2462 MHz |
| 2 | 2404 MHz | 12 | 2424 MHz | 22 | 2444 MHz | 32 | 2464 MHz |
| 3 | 2406 MHz | 13 | 2426 MHz | 23 | 2446 MHz | 33 | 2466 MHz |
| 4 | 2408 MHz | 14 | 2428 MHz | 24 | 2448 MHz | 34 | 2468 MHz |
| 5 | 2410 MHz | 15 | 2430 MHz | 25 | 2450 MHz | 35 | 2470 MHz |
| 6 | 2412 MHz | 16 | 2432 MHz | 26 | 2452 MHz | 36 | 2472 MHz |
| 7 | 2414 MHz | 17 | 2434 MHz | 27 | 2454 MHz | 37 | 2474 MHz |
| 8 | 2416 MHz | 18 | 2436 MHz | 28 | 2456 MHz | 38 | 2476 MHz |
| 9 | 2418 MHz | 19 | 2438 MHz | 29 | 2458 MHz | 39 | 2478 MHz |
| 10 | 2420 MHz | 20 | 2440 MHz | 30 | 2460 MHz | 40 | 2480 MHz |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see above marked

5.4 Test Facility

| | |
|---|--|
| The test facility is recognized, certified, or accredited by these organizations: | FCC Accredited Lab Test Firm Registration Number: 638130 Designation Number: CN1359 |
| | IC Registration Lab CAB Identifier No. CN0154 |
| | A2LA Accreditation Lab Certificate No.:7057.01 |

| | |
|--------------------|---|
| Test Performed at: | Name GuangDong Set Sail Testing Co., Ltd. |
| | Address 101, No.19, Tianxin Hudie 1st Road, Huangjiang Town, Dongguan, Guangdong, China |

5.5 Description of Support Units

| Device Type | Brand | Model | Series No. | Note |
|-------------|-------|----------|------------|------|
| PC | HP | ZHAN 66P | --- | --- |

5.6 Additional Instructions

| | |
|-------------------|------------------|
| Test Software | QRCT V4.0.0134.0 |
| Power level setup | Default |

5.7 Antenna Information

| Ant | Manufacturer | Model | Antenna Type | Antenna Gain (dBi) | Note |
|-----|--------------|-------|--------------|--------------------|----------|
| 1 | Myantenna | GO7 | PIFA | 2.5 | WiFi, BT |

All above information provided by the applicant which is fully responsible for those information.

5.8 Others

The laboratory responsible for all the information provided in the report, except those information provided by the applicant.
The applicant shall fully responsible for the information they provided.
The report would be invalid without a stamp of test laboratory and the signatures of compiler and approver.
The laboratory has not been responsible for the sampling stage; the test report merely corresponds to the test sample received.
Any objection to the test report shall submitted to the test laboratory within 15 days from the date of receipt of the report.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

6 Technical Requirement and Measurement Data

6.1 Generally requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

Reference to the appendix II for details

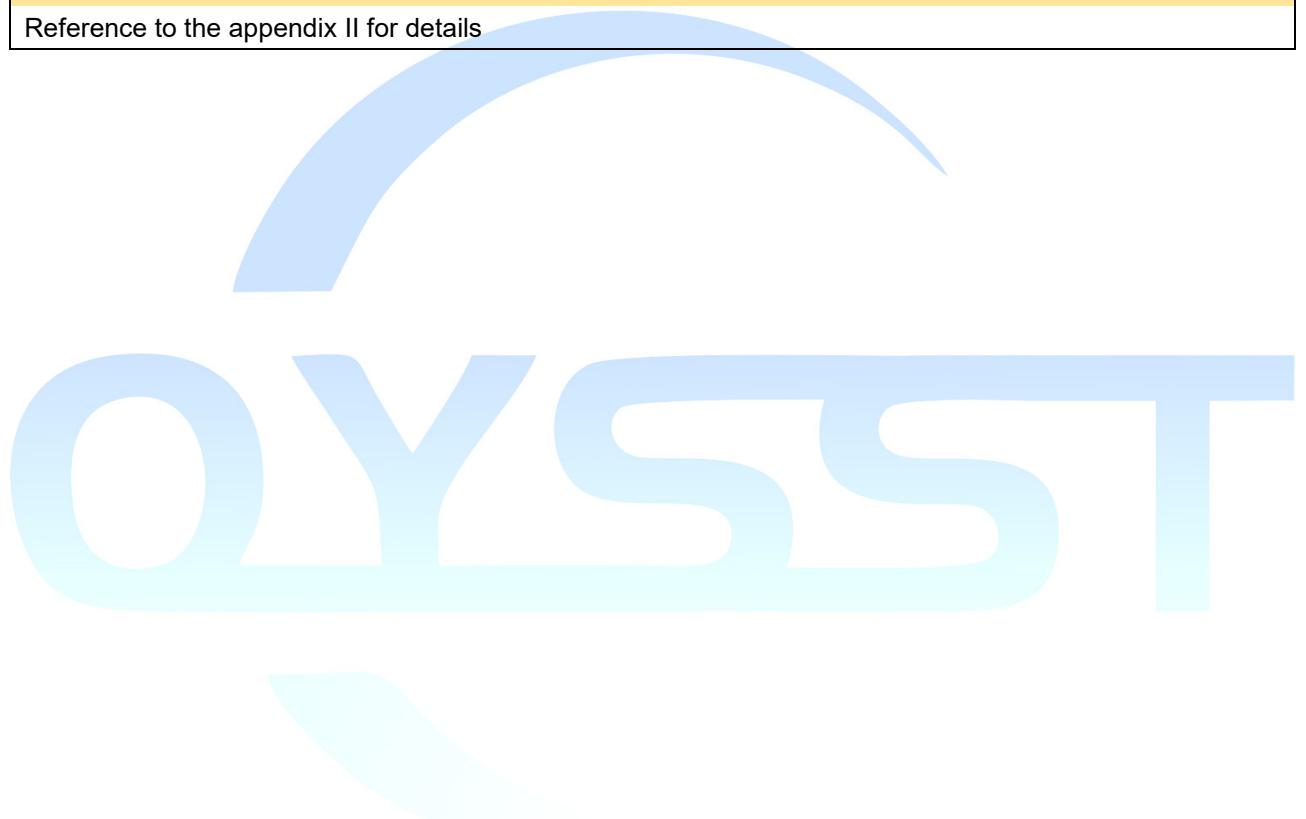


6.2 Duty Cycle
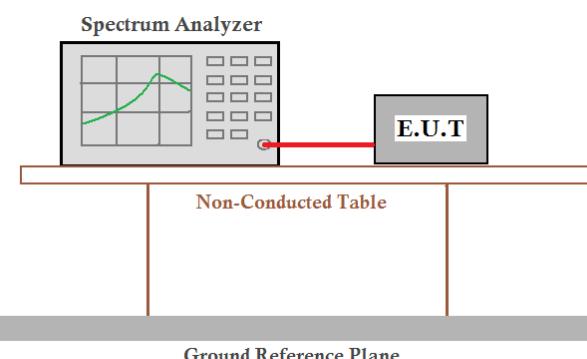
| |
|--|
| Limit |
| Report for use |
| Block diagram of Test Setup |
|  |
| Test Instrument |
| Refer to Annex A for details |
| Test Procedures |
| <p>The transmitter output connected to the Spectrum Analyzer. Test according to Procedure 6.0)b in KDB 558074 v05r02.</p> <p>1.RBW=8 MHz(the largest available value) 2.VBW=8 MHz(>RBW) 3.SPAN = 0 Hz 4.Detector = Peak 5.Number of points in sweep: 30001 6.Trace mode: Clear write 7.Measure T_{total} and T_{on} 8.Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$</p> |
| Verdict |
| Pass |

Measurement Data: The detailed test data see Appendix


6.3 Conducted Peak Output Power
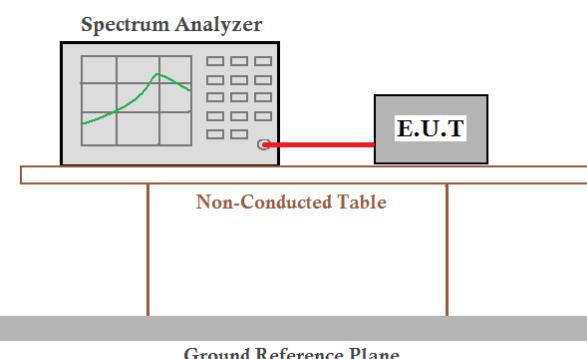
| |
|---|
| Limit 1W(30dBm) |
| Block diagram of Test Setup |
|  |
| Test Instrument Refer to Annex A for details |
| Test Procedures Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 |
| Verdict Pass |

Measurement Data: The detailed test data see Appendix




6.4 Channel Bandwidth
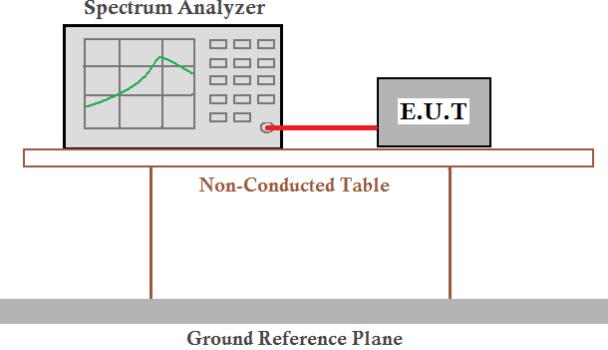
| |
|---|
| Limit >500KHz |
| Block diagram of Test Setup |
|  |
| Test Instrument Refer to Annex A for details |
| Test Procedures Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 |
| Verdict Pass |

Measurement Data: The detailed test data see Appendix



6.5 Power Spectral Density
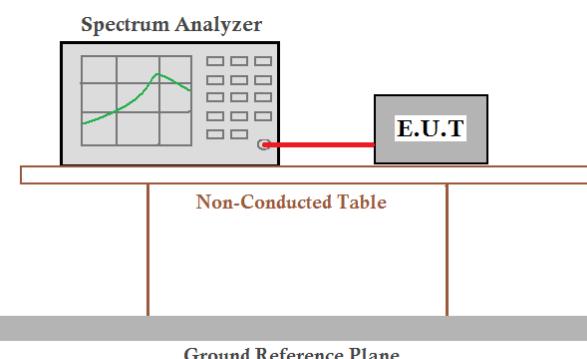
| |
|---|
| Limit 8dBm/3kHz |
| Block diagram of Test Setup |
|  |
| Test Instrument Refer to Annex A for details |
| Test Procedures Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 |
| Verdict Pass |

Measurement Data: The detailed test data see Appendix




6.6 Conducted Emission

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Block diagram of Test Setup

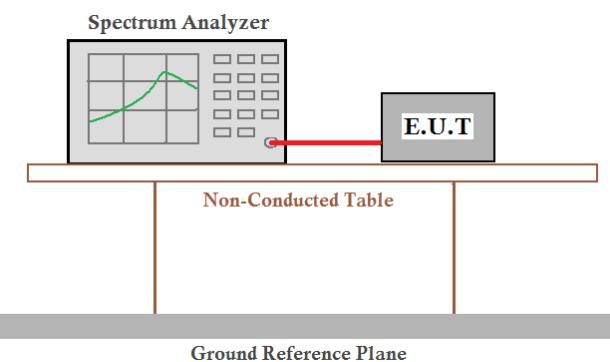

Test Instrument

Refer to Annex A for details

Test Procedures

Test applies to KDB558074 D01 15.247 Meas Guidance v05r02

Verdict

Pass

Measurement Data: The detailed test data see Appendix

6.7 Radiated Spurious Emission

Limit



| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100 ** | 3 |
| 88–216 | 150 ** | 3 |
| 216–960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.



Block diagram of Test Setup

For table-top equipment For floor standing equipment



For radiated emissions from 9kHz to 30MHz

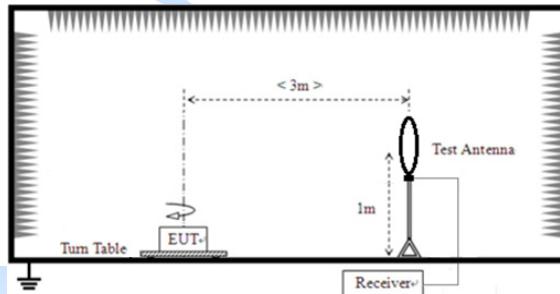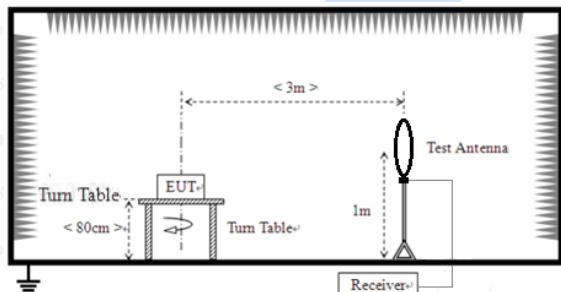

For radiated emissions from 30MHz to 1GHz

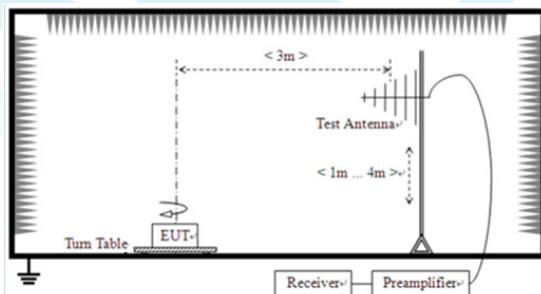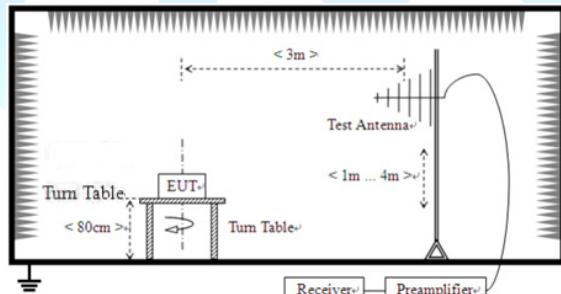

For radiated emissions above 1GHz

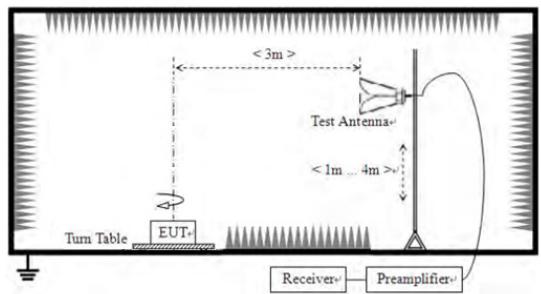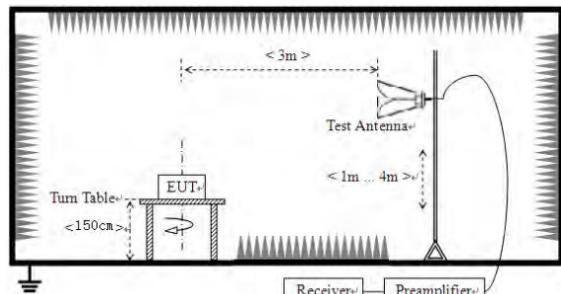

Test Instrument

GuangDong Set Sail Testing Co., Ltd.
101, No.19, Tianxin Hudie 1st Road, Huangjiang Town, Dongguan, Guangdong, China



Report No.: SST2503E0260

Refer to Annex A for details

Test Procedures

Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 & C63.10


Verdict

Pass

Note1: The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


Note2: For those undesirable emission (in the Restricted Bands and out-of-band spurious) above 1GHz, According to KDB 558074 and ANSI C63.10 subclause 11, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance.

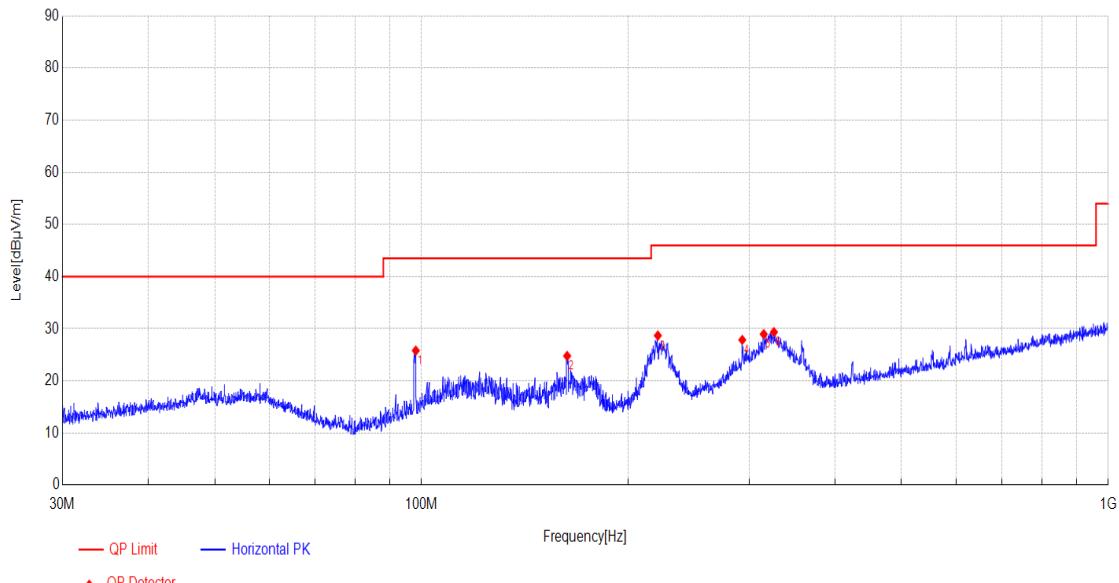

| Test Result(30M~1GHz) | | | | | | | |
|---|--------------|-------------|-------------------|-------------------|----------------|------------|---------|
| Test mode | Mode 1 | | Polarity | Horizontal | | | |
| Test voltage | AC 120V/60Hz | | Temp. /Hum. | 25 °C/60% | | | |
|  | | | | | | | |
| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Polarity | Verdict |
| 1 | 98.1128 | 11.86 | 25.82 | 43.50 | 17.68 | Horizontal | PASS |
| 2 | 162.9698 | 9.72 | 24.79 | 43.50 | 18.71 | Horizontal | PASS |
| 3 | 220.894 | 12.77 | 28.70 | 46.00 | 17.30 | Horizontal | PASS |
| 4 | 293.1741 | 15.08 | 27.87 | 46.00 | 18.13 | Horizontal | PASS |
| 5 | 315.0191 | 15.58 | 28.97 | 46.00 | 17.03 | Horizontal | PASS |
| 6 | 325.9727 | 15.79 | 29.37 | 46.00 | 16.63 | Horizontal | PASS |

Note: Final Level = Receiver Read level + Factor
Factor= Antenna Factor + Cable Loss – Preamplifier Factor
Only the worst case report(BLE 2480MHz)

| Test Result(30M~1GHz) | | | |
|-----------------------|--------------|-------------|-----------|
| Test mode | Mode 1 | Polarity | Vertical |
| Test voltage | AC 120V/60Hz | Temp. /Hum. | 25 °C/60% |

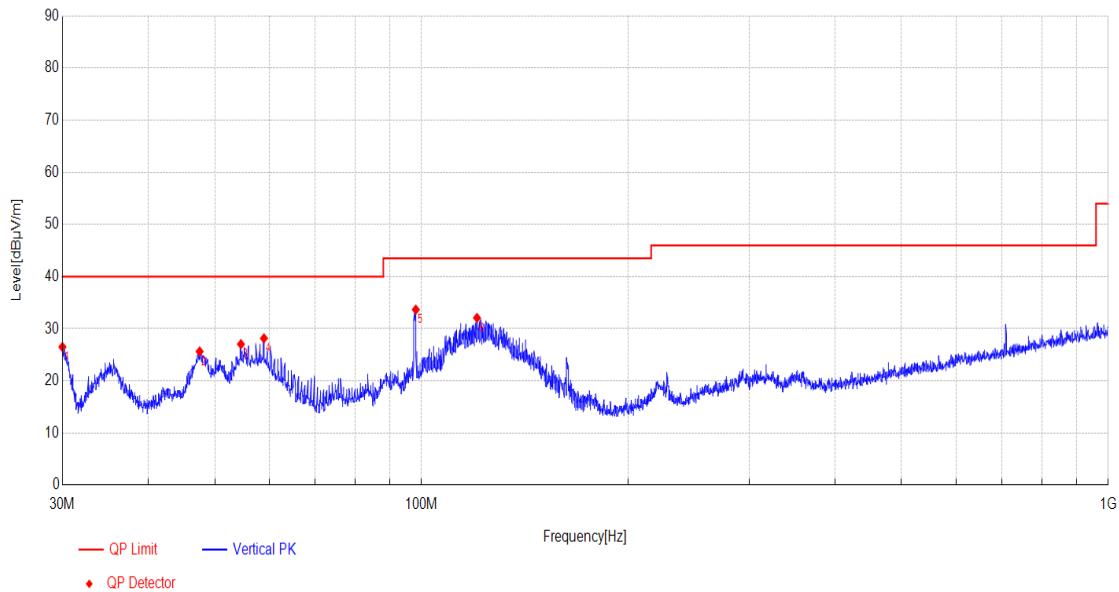

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Polarity | Verdict |
|-----|-------------|-------------|-------------------------|-------------------------|----------------|----------|---------|
| 1 | 30 | 10.76 | 26.51 | 40.00 | 13.49 | Vertical | PASS |
| 2 | 47.528 | 13.94 | 25.64 | 40.00 | 14.36 | Vertical | PASS |
| 3 | 54.5868 | 13.93 | 27.05 | 40.00 | 12.95 | Vertical | PASS |
| 4 | 58.9634 | 13.61 | 28.17 | 40.00 | 11.83 | Vertical | PASS |
| 5 | 98.1128 | 11.86 | 33.68 | 43.50 | 9.82 | Vertical | PASS |
| 6 | 120.4458 | 10.89 | 32.09 | 43.50 | 11.41 | Vertical | PASS |

Note: Final Level = Receiver Read level + Factor
Factor= Antenna Factor + Cable Loss – Preamplifier Factor
Only the worst case report(BLE 2480MHz)


6.8 Conducted Emissions

| Limit | Frequency (MHz) | Quasi-peak | Average |
|-------|-----------------|------------|-----------|
| | 0.15~0.50 | 66 to 56* | 56 to 46* |
| | 0.50~5.0 | 56 | 46 |
| | 5.0~30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out

Block diagram of Test Setup

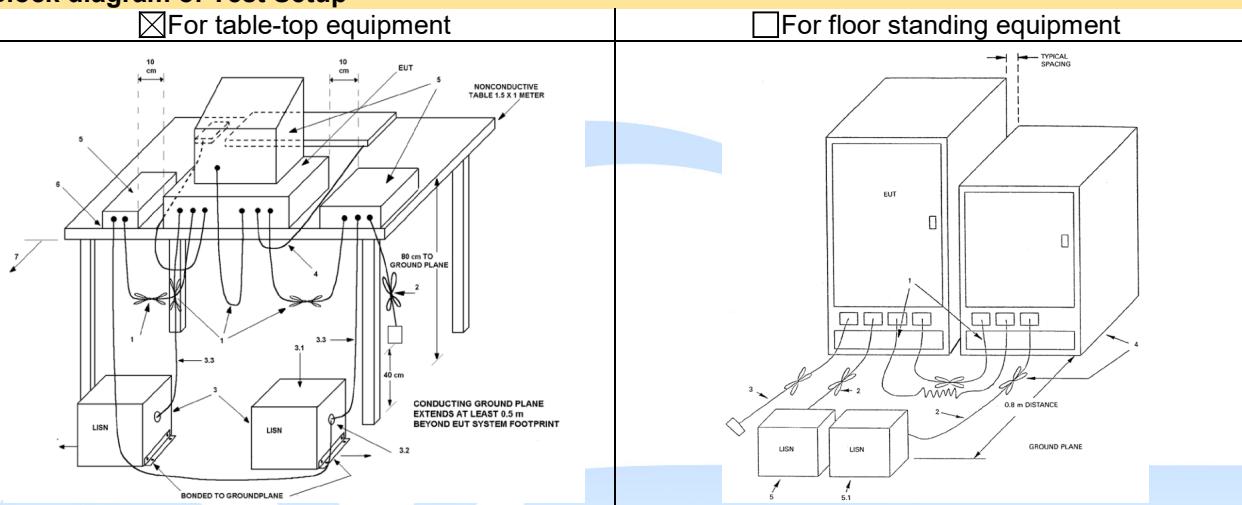

Test Instrument

Refer to Annex A for details

Test Procedures

The measurement was performed in a shield room.

Measured levels of ac power-line conducted emission shall be the radio-noise voltage from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), as terminated into a 50 Ω EMI receiver or spectrum analyzer. All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN, if used. The manufacturer shall test equipment with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended. For measurements using a LISN, the 50 Ω measuring port is terminated into a 50 Ω EMI receiver or spectrum analyzer. All other ports are terminated into 50 Ω loads.


Table top devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

Verdict

Pass

| Test Result | | | |
|--------------|--------------|-------------|-----------|
| Test mode | Mode 1 | Polarity | Line |
| Test voltage | AC 120V/60Hz | Temp. /Hum. | 25 °C/60% |

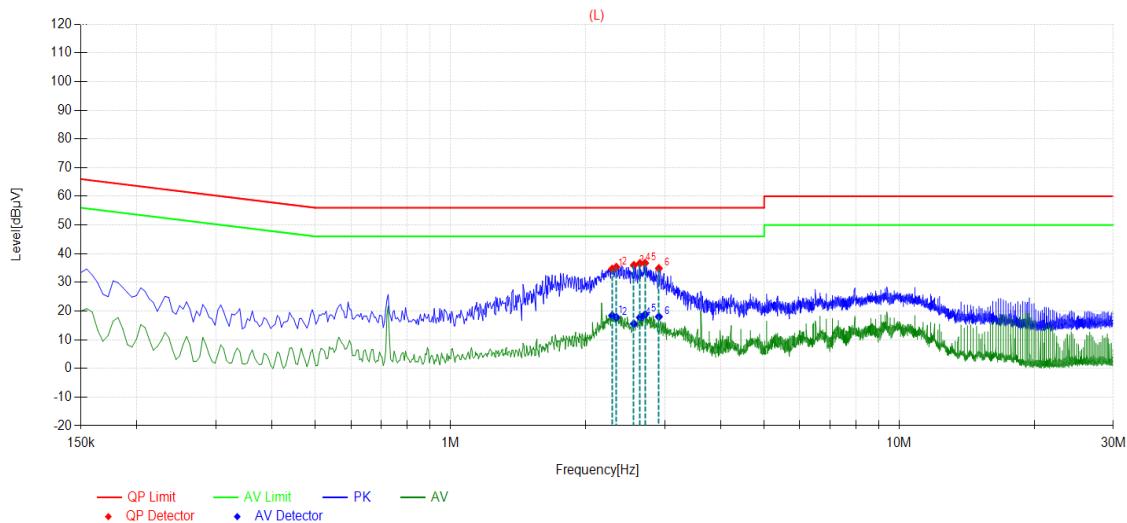

Final Data List


| NO. | Freq. [MHz] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict | Type |
|-----|-------------|-----------------|-----------------|----------------|-----------------|-----------------|----------------|---------|------|
| 1 | 2.292 | 34.66 | 56.00 | 21.34 | 18.43 | 46.00 | 27.57 | PASS | L |
| 2 | 2.3415 | 35.33 | 56.00 | 20.67 | 17.82 | 46.00 | 28.18 | PASS | L |
| 3 | 2.562 | 35.96 | 56.00 | 20.04 | 15.55 | 46.00 | 30.45 | PASS | L |
| 4 | 2.643 | 36.62 | 56.00 | 19.38 | 17.75 | 46.00 | 28.25 | PASS | L |
| 5 | 2.715 | 36.72 | 56.00 | 19.28 | 18.80 | 46.00 | 27.20 | PASS | L |
| 6 | 2.913 | 34.88 | 56.00 | 21.12 | 18.02 | 46.00 | 27.98 | PASS | L |

Note: Final Level = Receiver Read level + Factor

Factor= LISN Factor + Cable Loss

Only the worst case report(BLE 2480MHz)

| Test Result | | | |
|--------------|--------------|-------------|-----------|
| Test mode | Mode 1 | Polarity | Neutral |
| Test voltage | AC 120V/60Hz | Temp. /Hum. | 25 °C/60% |

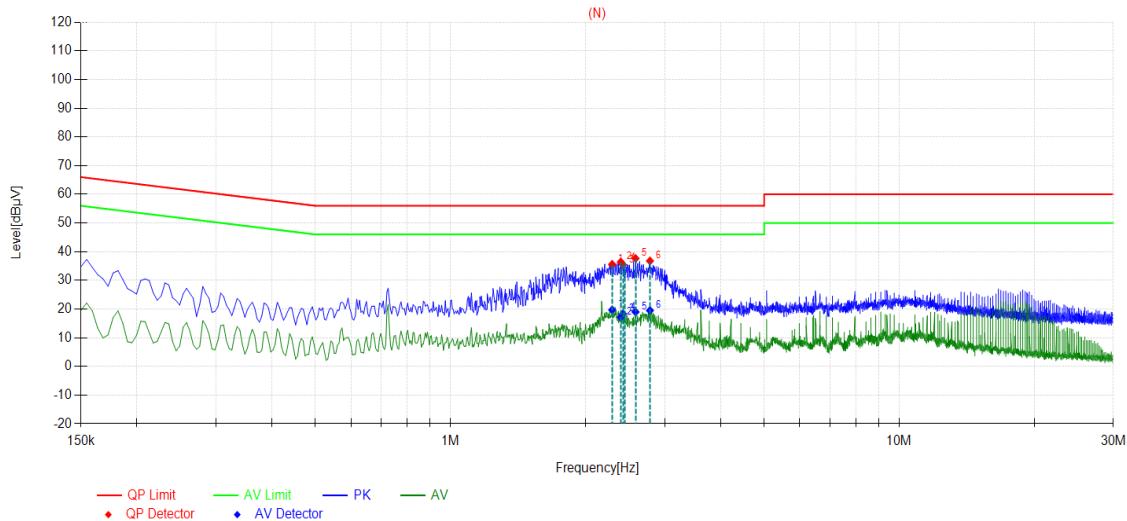

Final Data List

| NO. | Freq. [MHz] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict | Type |
|-----|-------------|-----------------|-----------------|----------------|-----------------|-----------------|----------------|---------|------|
| 1 | 2.292 | 35.58 | 56.00 | 20.42 | 19.70 | 46.00 | 26.30 | PASS | N |
| 2 | 2.3955 | 36.41 | 56.00 | 19.59 | 17.14 | 46.00 | 28.86 | PASS | N |
| 3 | 2.4225 | 35.41 | 56.00 | 20.59 | 18.29 | 46.00 | 27.71 | PASS | N |
| 4 | 2.445 | 36.12 | 56.00 | 19.88 | 19.05 | 46.00 | 26.95 | PASS | N |
| 5 | 2.5845 | 37.63 | 56.00 | 18.37 | 18.97 | 46.00 | 27.03 | PASS | N |
| 6 | 2.7825 | 36.77 | 56.00 | 19.23 | 19.49 | 46.00 | 26.51 | PASS | N |

Note: Final Level = Receiver Read level + Factor

Factor= LISN Factor + Cable Loss


Only the worst case report(BLE 2480MHz)

7 Test Setup Photo

Reference to the **appendix I** for details.

8 EUT Constructional Details

Reference to the **appendix II** for details.

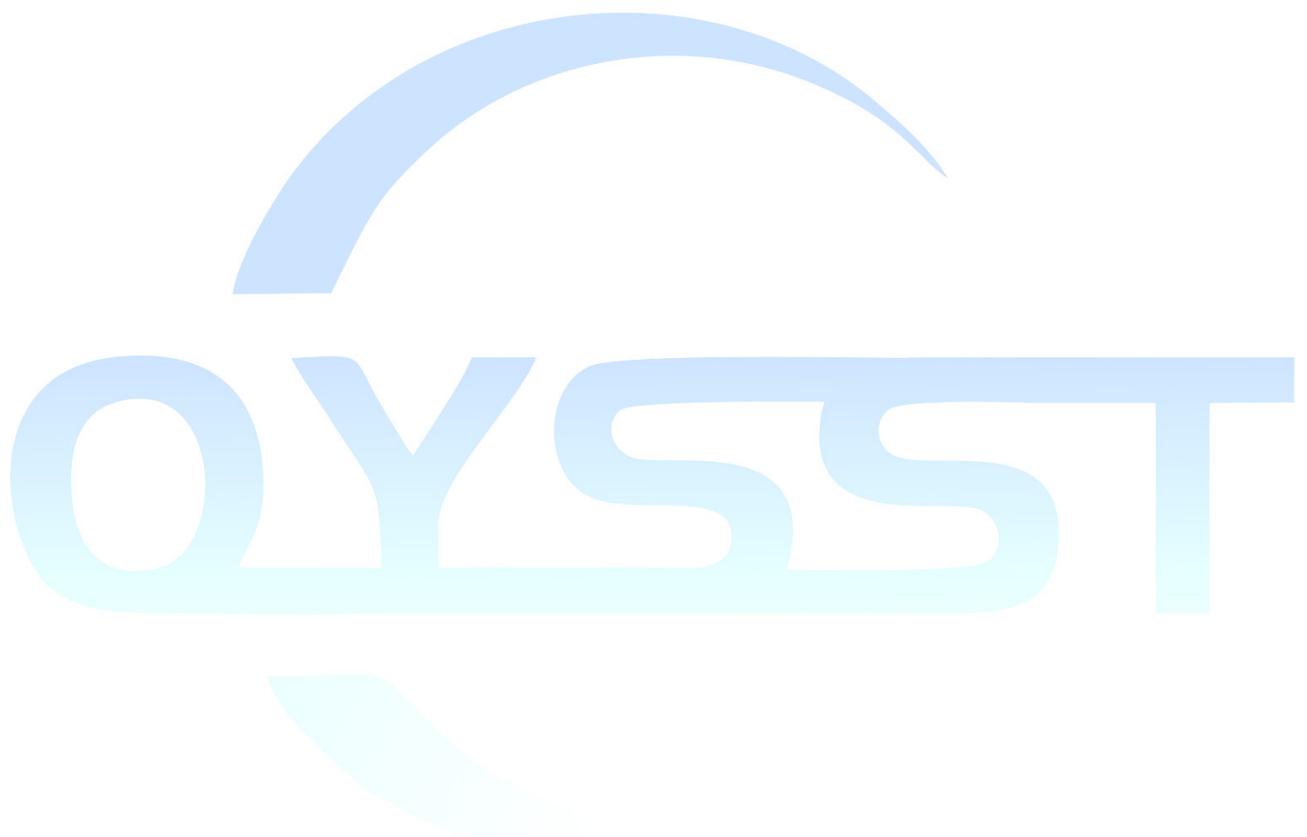

Annex A --Test Instruments list

| Radiated Emission: | | | | | | |
|--------------------|------------------------------|--------------|-----------------|--------------|----------------------|------------|
| Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. cycle | Cal.Date |
| SST-E-SAC001 | 3m Semi- Anechoic Chamber | BOST | 966 | / | 3 years | 2023.01.07 |
| SST-E-SCC001 | Control Room | BOST | 333 | / | 3 years | 2023.01.07 |
| SST-E-SAC002 | Breiband TRILOG Messantenne | Schwarzbeck | VULB 9162 | 00556 | 1 year | 2024.04.20 |
| SST-E-SAC004 | Broad-band Horn Antenna | Schwarzbeck | BBHA 9120 D | 02783 | 1 year | 2024.04.16 |
| SST-E-SCC003 | EMI Test Receiver | R&S | ESU 8 | 100372 | 1 year | 2024.04.16 |
| SST-E-SCC004 | Amplifier | Schwarzbeck | BBV 9744 | 00327 | 1 year | 2024.04.16 |
| SST-E-SCC015 | Amplifie (1-18GHz) | TSTPASS | LNA10180G45 | TSAM2303003 | 1 year | 2024.04.16 |
| SST-E-SCC016 | Amplifier (40G) | RFsystem | TRLA-180400G45B | 23060801 | 1 year | 2024.04.16 |
| SST-E-SAC006 | Broadband Horn Antenna (40G) | Schwarzbeck | BBHA9170 | 01306 | 1 year | 2024.04.17 |
| SST-E-RSC010 | Spectrum analyzer | R&S | FSV40-N | / | 1 year | 2024.04.16 |
| SST-E-SAC007 | Loop Antenna | Schwarzbeck | FMZB 1513-60B | 1513-60B 044 | 1 year | 2024.04.17 |
| SST-E-SAC005 | 5W 6dB attenuator | / | DC-6GHz | / | Internal calibration | / |
| SST-E-EMC006 | Thermohygrometer | KTJ | TA218A | 879030 | 1 year | 2024.04.18 |
| / | EMI Test Software | Tonscend | TS+ | / | / | / |

| Conducted Emission | | | | | | |
|--------------------|----------------------------|--------------|-----------|------------|----------------------|------------|
| Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. cycle | Cal.Date |
| SST-E-CSC001 | Shielding Room | BOST | 854 | / | 3 year | 2023.01.07 |
| SST-E-CSC002 | EMI Test Receiver | R&S | ESR3 | 103057 | 1 year | 2024.04.16 |
| SST-E-CSC003 | LISN | R&S | ENV 216 | 102832 | 1 year | 2024.04.16 |
| SST-E-CSC004 | ISN | R&S | NTFM 8158 | 00347 | 1 year | 2024.04.16 |
| SST-E-CSC007 | Antenna port test assembly | / | DC-3GHz | / | Internal calibration | / |
| SST-E-EMC011 | Thermohygrometer | KTJ | TA218A | 879036 | 1 year | 2024.04.18 |
| / | EMI Test Software | Tonscend | TS+ | V4.0 | / | / |

| RF conducted | | | | | | |
|----------------|----------------------------------|------------------|------------|------------|------------|------------|
| Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. cycle | Cal.Date |
| SST-E-RSC001 | Shielding Room | BOST | 543 | / | 3 year | 2023.01.07 |
| SST-E-RSC007 | Spectrum analyzer | keysight | N9020A | MY51280659 | 1 year | 2024.04.16 |
| SST-E-RSC008 | Analog signal source | Agilent | N5181A | MY48180054 | 1 year | 2024.04.16 |
| SST-E-RSC009 | Vector signal source | keysight | N5172B | MY57281610 | 1 year | 2024.04.16 |
| SST-E-EMC007 | Thermohygrometer | KTJ | TA218A | 879032 | 1 year | 2024.04.18 |
| SST-E-RSC010 | Spectrum analyzer | R&S | FSV40-N | / | 1 year | 2024.04.16 |
| SST-E-RSC015-1 | Power meter 1 | TST | TST V2 | / | 1 year | 2024.04.16 |
| / | Test Software | TST PASS | TST PASS | V2.0 | / | / |
| SST-S-CTH002 | Temperature and humidity chamber | Guangdong fenghe | FH-TH-1000 | FH24032017 | 1 year | 2024.04.26 |

▶▶▶ END OF REPORT ◀◀◀

