

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

**FCC PART 15 SUBPART C TEST REPORT****FCC PART 15.247****Report Reference No.....: GTS20200720015-1-7-1****FCC ID.....: XR3-MAXLUMI**

Compiled by

( position+printed name+signature)...: File administrators Jimmy Wang

Supervised by

( position+printed name+signature)...: Test Engineer Aaron Tan



Approved by

( position+printed name+signature)...: Manager Jason Hu

Date of issue.....: July 30, 2020

**Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

**Applicant's name.....: ONYX INTERNATIONAL INC.**

Address .....: ROOM C301, BUILDING 2, #21 HEJING SOUTH ROAD, LIWAN DISTRICT, GUANGZHOU, China

**Test specification .....**Standard .....: **FCC Part 15.247**

TRF Originator .....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....** Smart E Ink Tablet, ePaper Tablet, E-bag Tablet, E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet, E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet

Trade Mark .....: BOOX

**Manufacturer.....: ONYX INTERNATIONAL INC.**

Model/Type reference.....: Max Lumi

Listed Models .....: See next page

Ratings .....: 5V---3A

Modulation .....: CCK/DSSS, OFDM

Hardware version .....: BOOX\_M2\_MAX4\_V03

Software version .....: V1.0

Frequency.....: From 2412MHz-2462MHz

Result.....: **PASS**

**TEST REPORT**

|                          |                             |               |
|--------------------------|-----------------------------|---------------|
| <b>Test Report No. :</b> | <b>GTS20200720015-1-7-1</b> | July 30, 2020 |
|                          |                             | Date of issue |

Equipment under Test : Smart E Ink Tablet, ePaper Tablet, E-bag Tablet, E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet, E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet

Model /Type : Max Lumi

Listed Models : Max Lumi Lite,Max Lumi Pro, Max Lumi Plus ,Max Lumi Color, Max New, New Max,Max4

**Applicant** : **ONYX INTERNATIONAL INC.**

Address : Room 301, No.215,Qiaozhongzhong Road, Liwan District, Guangzhou, Guangdong Province, China

**Manufacturer** : **ONYX INTERNATIONAL INC.**

Address : Room 301, No.215,Qiaozhongzhong Road, Liwan District, Guangzhou, Guangdong Province, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                 |                                                     |                  |
|-----------------|-----------------------------------------------------|------------------|
| <b><u>1</u></b> | <b><u>TEST STANDARDS .....</u></b>                  | <b><u>4</u></b>  |
| <b><u>2</u></b> | <b><u>SUMMARY .....</u></b>                         | <b><u>5</u></b>  |
| 2.1             | General Remarks                                     | 5                |
| 2.2             | Product Description                                 | 5                |
| 2.3             | Test Sample                                         | 5                |
| 2.4             | Equipment Under Test                                | 5                |
| 2.5             | Short description of the Equipment under Test (EUT) | 5                |
| 2.6             | EUT operation mode                                  | 6                |
| 2.7             | Block Diagram of Test Setup                         | 6                |
| 2.8             | Special Accessories                                 | 6                |
| 2.9             | Related Submittal(s) / Grant (s)                    | 6                |
| 2.10            | Modifications                                       | 6                |
| <b><u>3</u></b> | <b><u>TEST ENVIRONMENT .....</u></b>                | <b><u>7</u></b>  |
| 3.1             | Address of the test laboratory                      | 7                |
| 3.2             | Test Facility                                       | 7                |
| 3.3             | Environmental conditions                            | 7                |
| 3.4             | Test Description                                    | 8                |
| 3.5             | Statement of the measurement uncertainty            | 9                |
| 3.6             | Equipments Used during the Test                     | 9                |
| <b><u>4</u></b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>      | <b><u>11</u></b> |
| 4.1             | AC Power Conducted Emission                         | 11               |
| 4.2             | Radiated Emission                                   | 14               |
| 4.3             | Maximum Conducted Output Power                      | 21               |
| 4.4             | Power Spectral Density                              | 22               |
| 4.5             | 6dB Bandwidth                                       | 25               |
| 4.6             | Out-of-band Emissions                               | 28               |
| 4.7             | Antenna Requirement                                 | 37               |
| <b><u>5</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>    | <b><u>38</u></b> |
| <b><u>6</u></b> | <b><u>PHOTOS OF THE EUT .....</u></b>               | <b><u>39</u></b> |

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | July 16, 2020 |
|                                |   |               |
| Testing commenced on           | : | July 17, 2020 |
|                                |   |               |
| Testing concluded on           | : | July 29, 2020 |

### 2.2 Product Description

|                       |                                                                                                                                                                        |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description:  | Smart E Ink Tablet, ePaper Tablet, E-bag Tablet, E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet, E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet |
| Model/Type reference: | Max Lumi                                                                                                                                                               |
| Power supply:         | DC 3.8V from battery                                                                                                                                                   |
| Sample ID:            | GTS20200720015-1-7-1#/ GTS20200720015-1-7-2#                                                                                                                           |
| <b>WIFI</b>           |                                                                                                                                                                        |
| Supported type:       | 802.11b/802.11g/802.11n(H20)/802.11n(H40)                                                                                                                              |
| Modulation:           | 802.11b: DSSS<br>802.11g/802.11n(H20)/ 802.11n(H40): OFDM                                                                                                              |
| Operation frequency:  | 802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz<br>802.11n(H40): 2422MHz~2452MHz                                                                                         |
| Channel number:       | 802.11b/802.11g/802.11n(H20): 11<br>802.11n(H40): 7                                                                                                                    |
| Channel separation:   | 5MHz                                                                                                                                                                   |
| Antenna type:         | FPC antenna                                                                                                                                                            |
| Antenna gain:         | 2.0 dBi                                                                                                                                                                |

### 2.3 Test Sample

The application provides 2 samples to meet requirement.

| Sample Number         | Description                           |
|-----------------------|---------------------------------------|
| GTS20200720015-1-7-1# | Engineer sample – continuous transmit |
| GTS20200720015-1-7-2# | Normal sample – Intermittent transmit |

### 2.4 Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 3.8V from battery

### 2.5 Short description of the Equipment under Test (EUT)

This is a Smart E Ink Tablet.

For more details, refer to the user's manual of the EUT.


## 2.6 EUT operation mode

The application provider specific test software(QRCT) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

## 2.7 Block Diagram of Test Setup

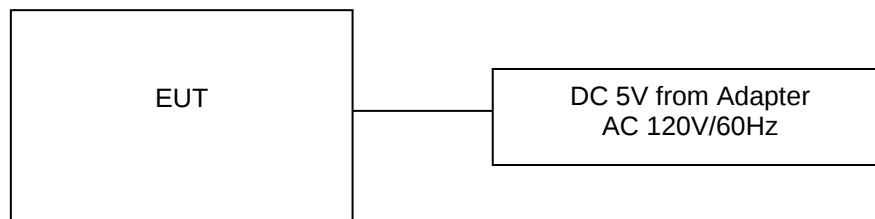

## 2.8 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description   | Manufacturer | Model      | Technical Parameters                              | Certificate | Provided by |
|---------------|--------------|------------|---------------------------------------------------|-------------|-------------|
| AC-DC Adapter | MOSO         | EP-TA20CBC | Input:AC100-240V-50/60Hz, 0.5A<br>Output:DC 5V,3A | FCC         | Laboratory  |
| /             | /            | /          | /                                                 | /           | /           |
| /             | /            | /          | /                                                 | /           | /           |
| /             | /            | /          | /                                                 | /           | /           |

## 2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the EUT filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.10 Modifications

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 165725**

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**A2LA-Lab Cert. No.: 4758.01**

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**CNAS-Lab Code: L8169**

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

### 3.4 Test Description

| Test Specification clause | Test case                                 | Test Sample            | Test Mode                                            | Test Channel                | Recorded In Report                                   |                             | Test result |
|---------------------------|-------------------------------------------|------------------------|------------------------------------------------------|-----------------------------|------------------------------------------------------|-----------------------------|-------------|
| §15.247(e)                | Power spectral density                    | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | complies    |
| §15.247(a)(2)             | Spectrum bandwidth – 6 dB bandwidth       | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | complies    |
| §15.247(b)(1)             | Maximum output power                      | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | complies    |
| §15.247(d)                | Band edge compliance conducted            | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Highest           | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Highest           | complies    |
| §15.205                   | Band edge compliance radiated             | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Highest           | 802.11b                                              | Lowest<br>Highest           | complies    |
| §15.247(d)                | TX spurious emissions conducted           | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | complies    |
| §15.247(d)                | TX spurious emissions radiated            | GTS2020072 0015-1-7-1# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b                                              | Lowest<br>Middle<br>Highest | complies    |
| §15.209(a)                | TX spurious Emissions radiated Below 1GHz | GTS2020072 0015-1-7-2# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b                                              | Lowest                      | complies    |
| §15.107(a)<br>§15.207     | Conducted Emissions < 30 MHz              | GTS2020072 0015-1-7-2# | 802.11b<br>802.11g<br>802.11n(HT)20<br>802.11n(HT)40 | Lowest<br>Middle<br>Highest | 802.11b                                              | Highest                     | complies    |

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                                                                                                                                                                           | Mode            | Data Rate | Channel |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|---------|
| Maximum Peak Conducted Output Power<br>Power Spectral Density<br>6dB Bandwidth<br>Spurious RF conducted emission<br>Radiated Emission 9KHz~1GHz&<br>Radiated Emission 1GHz~10 <sup>th</sup> Harmonic | 11b/DSSS        | 1 Mbps    | 1/6/11  |
|                                                                                                                                                                                                      | 11g/OFDM        | 6 Mbps    | 1/6/11  |
|                                                                                                                                                                                                      | 11n(20MHz)/OFDM | 6.5Mbps   | 1/6/11  |
|                                                                                                                                                                                                      | 11n(40MHz)/OFDM | 13.5Mbps  | 3/6/9   |
| Band Edge                                                                                                                                                                                            | 11b/DSSS        | 1 Mbps    | 1/11    |
|                                                                                                                                                                                                      | 11g/OFDM        | 6 Mbps    | 1/11    |
|                                                                                                                                                                                                      | 11n(20MHz)/OFDM | 6.5Mbps   | 1/11    |
|                                                                                                                                                                                                      | 11n(40MHz)/OFDM | 13.5Mbps  | 3/9     |

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10 dB                 | (1)   |
| Radiated Emission     | 1~18GHz    | 4.32 dB                 | (1)   |
| Radiated Emission     | 18-40GHz   | 5.54 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB                 | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6 Equipments Used during the Test

| Test Equipment             | Manufacturer                      | Model No.             | Serial No.   | Calibration Date | Calibration Due Date |
|----------------------------|-----------------------------------|-----------------------|--------------|------------------|----------------------|
| LISN                       | R&S                               | ENV216                | 3560.6550.08 | 2019/09/20       | 2020/09/19           |
| LISN                       | R&S                               | ESH2-Z5               | 893606/008   | 2019/09/20       | 2020/09/19           |
| EMI Test Receiver          | R&S                               | ESPI3                 | 101841-cd    | 2019/09/20       | 2020/09/19           |
| EMI Test Receiver          | R&S                               | ESCI7                 | 101102       | 2019/09/20       | 2020/09/19           |
| Spectrum Analyzer          | Agilent                           | N9020A                | MY48010425   | 2019/09/20       | 2020/09/19           |
| Spectrum Analyzer          | Agilent                           | E4407B                | MY45132751   | 2019/09/20       | 2020/09/19           |
| Spectrum Analyzer          | R&S                               | FSV40                 | 100019       | 2019/09/20       | 2020/09/19           |
| Vector Signal generator    | Agilent                           | N5181A                | MY49060502   | 2019/09/20       | 2020/09/19           |
| Signal generator           | Agilent                           | E4421B                | 3610AO1069   | 2019/09/20       | 2020/09/19           |
| Climate Chamber            | ESPEC                             | EL-10KA               | A20120523    | 2019/09/20       | 2020/09/19           |
| Controller                 | EM Electronics                    | Controller EM 1000    | N/A          | N/A              | N/A                  |
| Horn Antenna               | Schwarzbeck                       | BBHA 9120D            | 01622        | 2019/09/23       | 2020/09/22           |
| Active Loop Antenna        | Beijing Da Ze Technology Co.,Ltd. | ZN30900C              | 15006        | 2019/10/12       | 2020/10/11           |
| Bilog Antenna              | Schwarzbeck                       | VULB9163              | 000976       | 2020/05/24       | 2021/05/23           |
| Broadband Horn Antenna     | SCHWARZBECK                       | BBHA 9170             | 791          | 2019/09/20       | 2020/09/19           |
| Amplifier                  | Schwarzbeck                       | BBV 9743              | #202         | 2019/09/20       | 2020/09/19           |
| Amplifier                  | Schwarzbeck                       | BBV9179               | 9719-025     | 2019/09/20       | 2020/09/19           |
| Amplifier                  | EMCI                              | EMC051845B            | 980355       | 2019/09/20       | 2020/09/19           |
| Temperature/Humidity Meter | Gangxing                          | CTH-608               | 02           | 2019/09/20       | 2020/09/19           |
| High-Pass Filter           | K&L                               | 9SH10-2700/X12750-O/O | KL142031     | 2019/09/20       | 2020/09/19           |
| High-Pass Filter           | K&L                               | 41H10-1375/U12750-O/O | KL142032     | 2019/09/20       | 2020/09/19           |
| RF Cable(below 1GHz)       | HUBER+SUHNER                      | RG214                 | RE01         | 2019/09/20       | 2020/09/19           |
| RF Cable(above             | HUBER+SUHNER                      | RG214                 | RE02         | 2019/09/20       | 2020/09/19           |


|                       |          |          |                 |            |            |
|-----------------------|----------|----------|-----------------|------------|------------|
| 1GHz)                 |          |          |                 |            |            |
| Data acquisition card | Agilent  | U2531A   | TW53323507      | 2019/09/20 | 2020/09/19 |
| Power Sensor          | Agilent  | U2021XA  | MY5365004       | 2019/09/20 | 2020/09/19 |
| Test Control Unit     | Tonscend | JS0806-1 | 178060067       | 2020/06/18 | 2021/06/17 |
| Automated filter bank | Tonscend | JS0806-F | 19F8060177      | 2020/06/18 | 2021/06/17 |
| EMI Test Software     | Tonscend | JS1120-1 | Ver 2.6.8.0518  | /          | /          |
| EMI Test Software     | Tonscend | JS1120-3 | Ver 2.5.77.0418 | /          | /          |
| EMI Test Software     | Tonscend | JS32-CE  | Ver 2.5         | /          | /          |
| EMI Test Software     | Tonscend | JS32-RE  | Ver 2.5.1.8     | /          | /          |

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

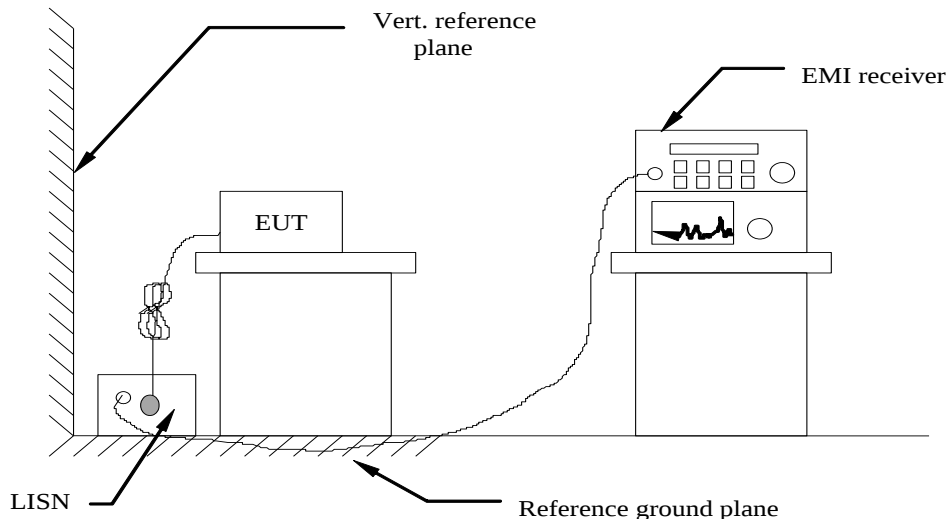

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.


**TEST RESULTS**

|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |

Remark:

- All modes of 802.11b/g/n were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:
- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:.

|               |                       |              |   |
|---------------|-----------------------|--------------|---|
| Power supply: | AC 120V/60Hz(adapter) | Polarization | L |
|---------------|-----------------------|--------------|---|

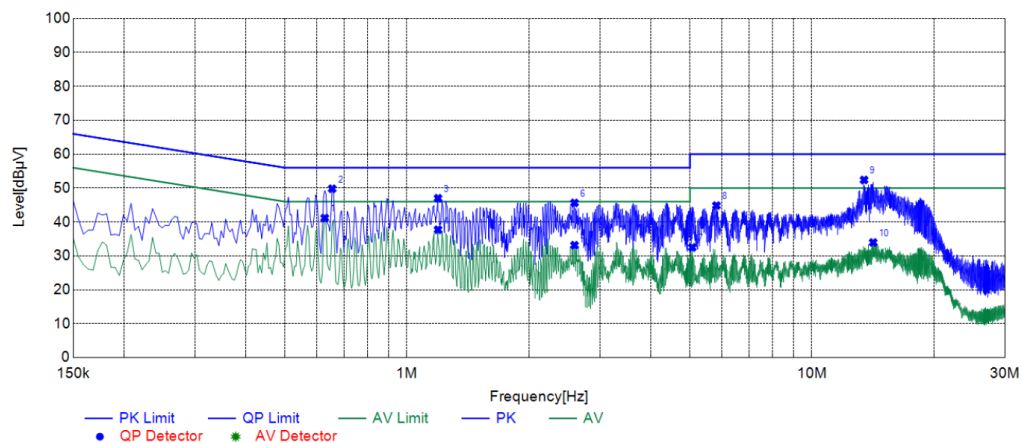**Test Graph****Suspected List**

| NO. | Frequency [MHz] | Reading [dBμV] | Factor [dB] | Result [dBμV] | Limit [dBμV] | Margin [dB] | Detector | Line | Remark |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|------|--------|
| 1   | 0.6270          | 31.12          | 10.06       | 41.18         | 46.00        | 4.82        | AV       | L1   | PASS   |
| 2   | 0.6540          | 39.75          | 10.05       | 49.80         | 56.00        | 6.20        | PK       | L1   | PASS   |
| 3   | 1.1940          | 36.91          | 10.09       | 47.00         | 56.00        | 9.00        | PK       | L1   | PASS   |
| 4   | 1.1940          | 27.62          | 10.09       | 37.71         | 46.00        | 8.29        | AV       | L1   | PASS   |
| 5   | 2.5935          | 22.90          | 10.24       | 33.14         | 46.00        | 12.86       | AV       | L1   | PASS   |
| 6   | 2.5935          | 35.39          | 10.24       | 45.63         | 56.00        | 10.37       | PK       | L1   | PASS   |
| 7   | 5.0640          | 22.00          | 10.49       | 32.49         | 50.00        | 17.51       | AV       | L1   | PASS   |
| 8   | 5.8110          | 34.31          | 10.53       | 44.84         | 60.00        | 15.16       | PK       | L1   | PASS   |
| 9   | 13.4520         | 41.46          | 10.94       | 52.40         | 60.00        | 7.60        | PK       | L1   | PASS   |
| 10  | 14.1675         | 22.96          | 10.99       | 33.95         | 50.00        | 16.05       | AV       | L1   | PASS   |

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz(adapter)

Polarization

N

Test Graph

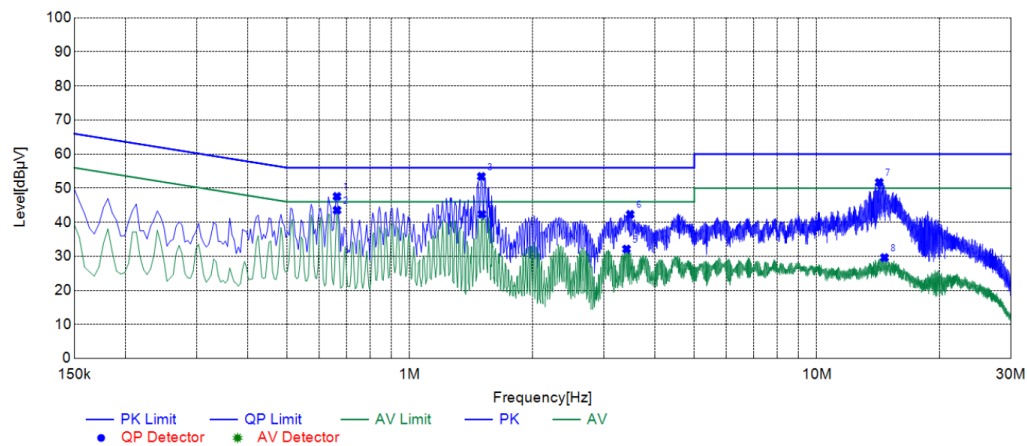

Suspected List

| NO. | Frequency [MHz] | Reading [dBμV] | Factor [dB] | Result [dBμV] | Limit [dBμV] | Margin [dB] | Detector | Line | Remark |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|------|--------|
| 1   | 0.6630          | 37.54          | 10.05       | 47.59         | 56.00        | 8.41        | PK       | N    | PASS   |
| 2   | 0.6630          | 33.48          | 10.05       | 43.53         | 46.00        | 2.47        | AV       | N    | PASS   |
| 3   | 1.5000          | 43.33          | 10.11       | 53.44         | 56.00        | 2.56        | PK       | N    | PASS   |
| 4   | 1.5045          | 32.26          | 10.11       | 42.37         | 46.00        | 3.63        | AV       | N    | PASS   |
| 5   | 3.4080          | 21.80          | 10.33       | 32.13         | 46.00        | 13.87       | AV       | N    | PASS   |
| 6   | 3.4800          | 31.97          | 10.34       | 42.31         | 56.00        | 13.69       | PK       | N    | PASS   |
| 7   | 14.2350         | 40.72          | 11.00       | 51.72         | 60.00        | 8.28        | PK       | N    | PASS   |
| 8   | 14.6580         | 18.57          | 11.04       | 29.61         | 50.00        | 20.39       | AV       | N    | PASS   |


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


## 4.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

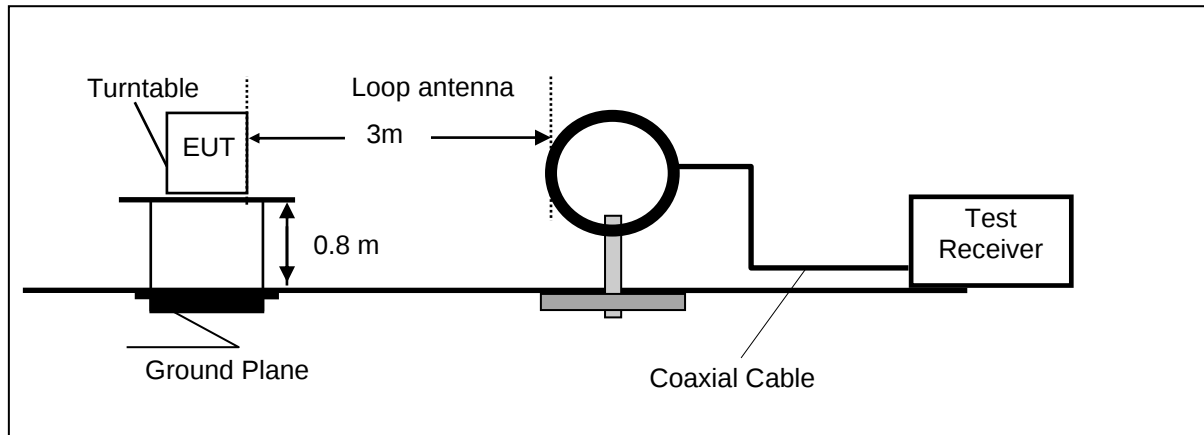

Frequency range 30MHz – 1000MHz

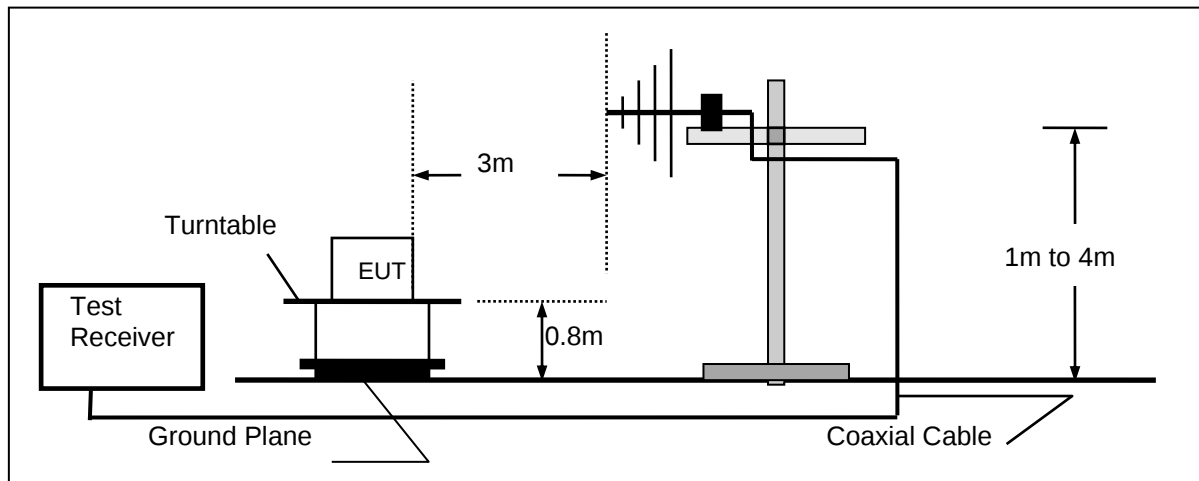

Frequency range above 1GHz-25GHz

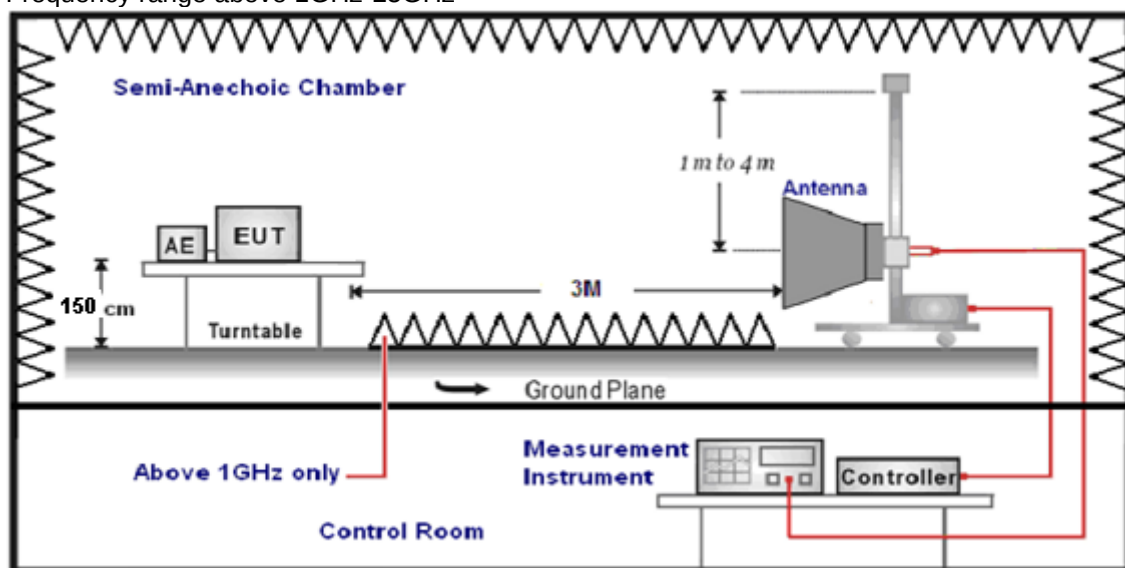

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto                                                                       | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto                                                                      | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto                                                                   | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m)                            | Radiated (µV/m)       |
|-----------------|-------------------|----------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz})) + 40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz})) + 40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30) + 40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                         | 100                   |
| 88-216          | 3                 | 43.5                                         | 150                   |
| 216-960         | 3                 | 46.0                                         | 200                   |
| Above 960       | 3                 | 54.0                                         | 500                   |


**TEST RESULTS**


|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. All three channels (lowest/middle/highest) of each mode were measured above 1GHz and recorded worst case at 802.11b mode.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

#### For 30MHz-1GHz

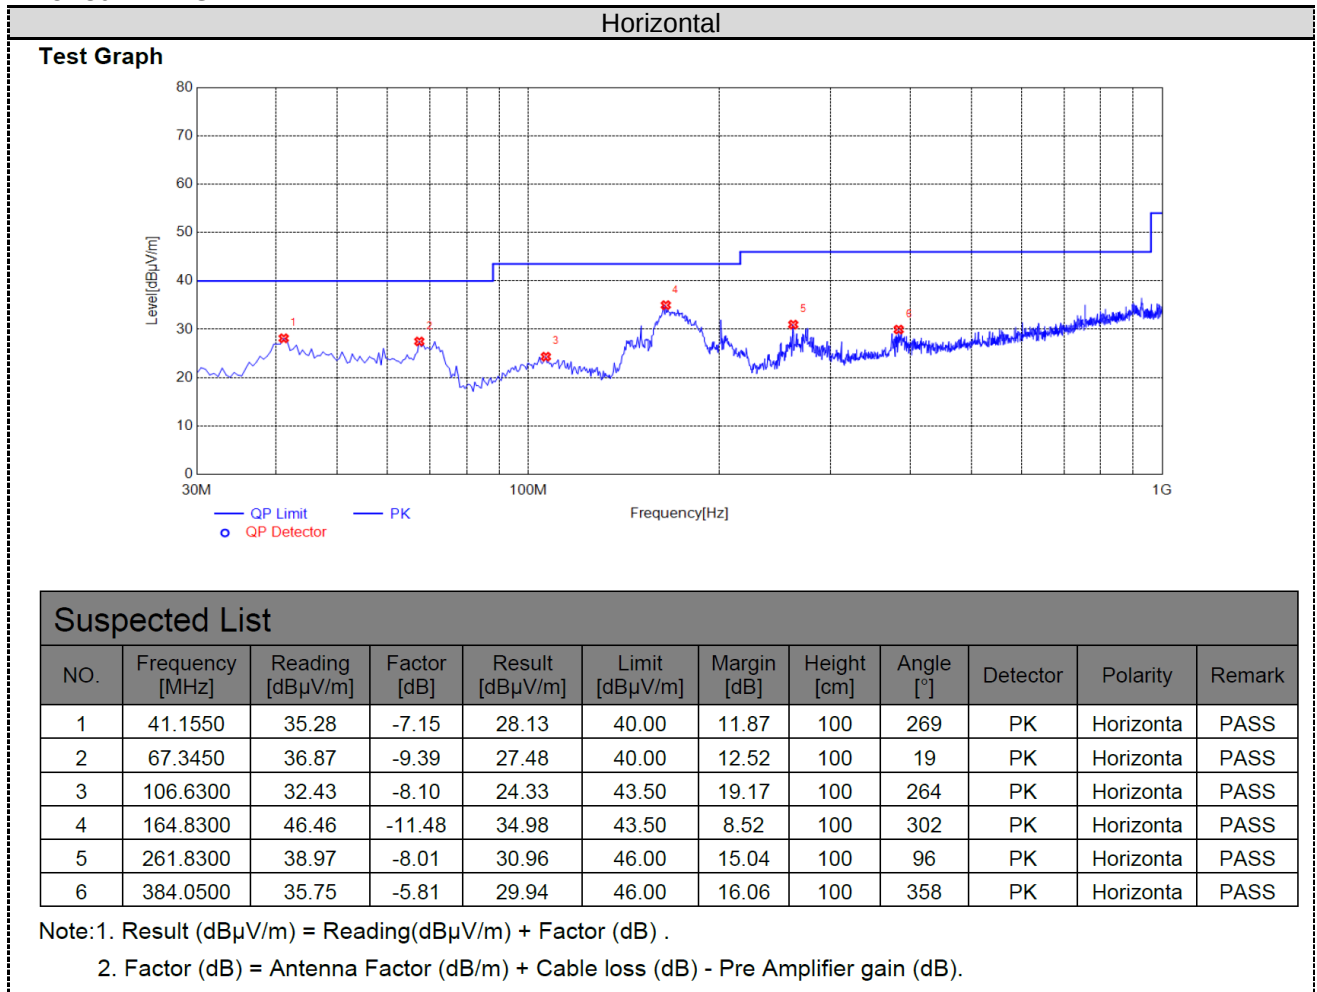

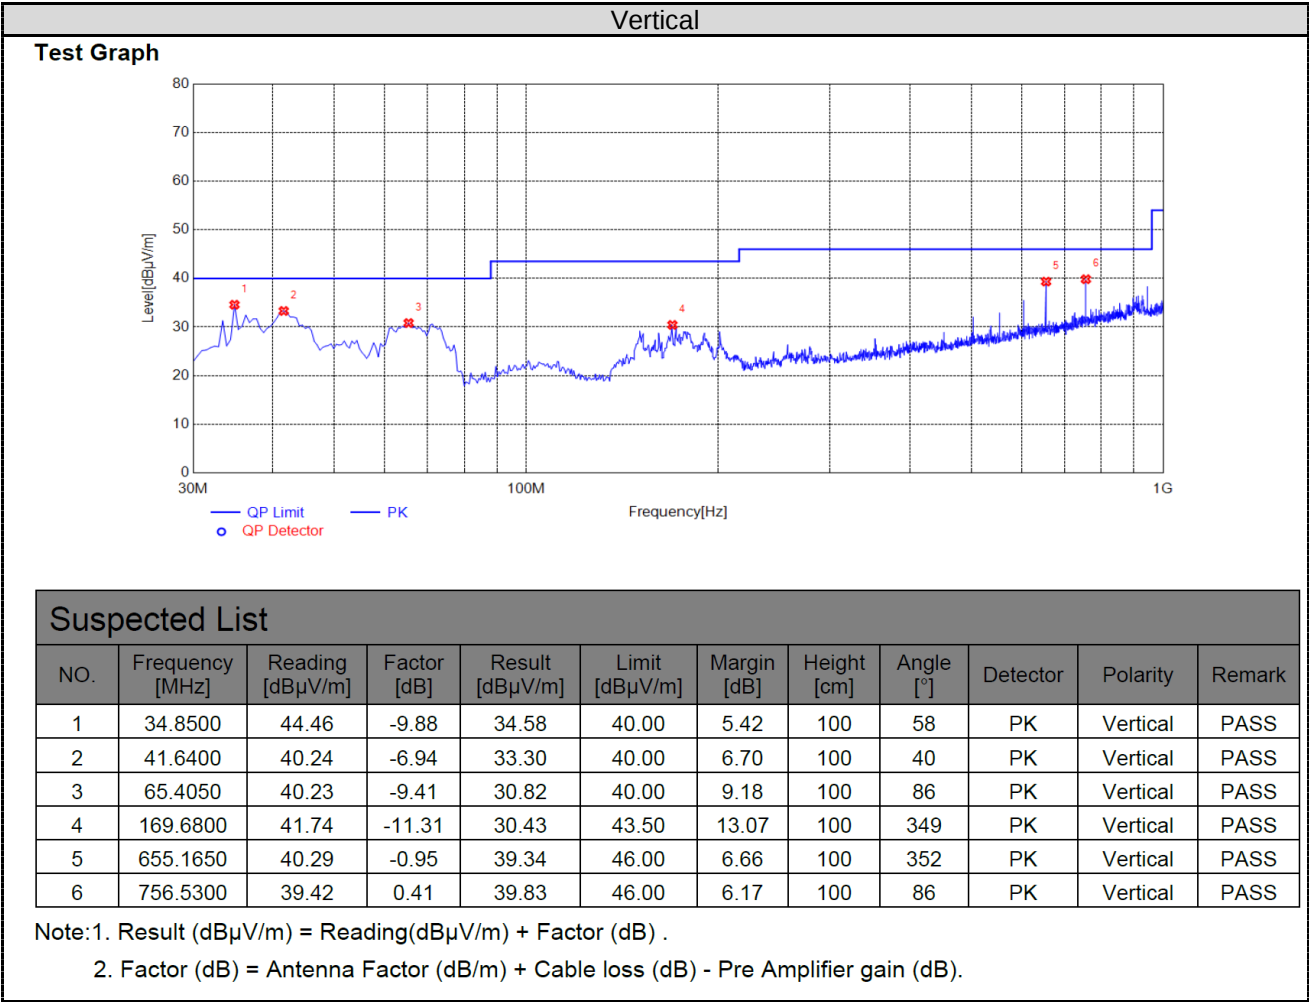

**For 1GHz to 25GHz**

Note: 802.11b/802.11g/802.11n (H20)/802.11n (H40) all have been tested, only worse case 802.11b mode 1Mbps is reported

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 50.35                   | PK | 74             | 23.65       | 49.56            | 30.28                 | 7.01              | 36.50              | 0.79                     |
| 4824.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7236.00         | 47.69                   | PK | 74             | 26.31       | 37.49            | 36.59                 | 8.91              | 35.30              | 10.20                    |
| 7236.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 51.05                   | PK | 74             | 22.95       | 50.26            | 30.28                 | 7.01              | 36.50              | 0.79                     |
| 4824.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7236.00         | 48.79                   | PK | 74             | 25.21       | 38.59            | 36.59                 | 8.91              | 35.30              | 10.20                    |
| 7236.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 50.45                   | PK | 74             | 23.55       | 48.97            | 30.36                 | 7.62              | 36.50              | 1.48                     |
| 4874.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7311.00         | 47.65                   | PK | 74             | 26.35       | 37.50            | 36.61                 | 8.84              | 35.30              | 10.15                    |
| 7311.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 51.45                   | PK | 74             | 22.55       | 49.97            | 30.36                 | 7.62              | 36.50              | 1.48                     |
| 4874.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7311.00         | 48.25                   | PK | 74             | 25.75       | 38.10            | 36.61                 | 8.84              | 35.30              | 10.15                    |
| 7311.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 50.98                   | PK | 74             | 23.02       | 48.81            | 30.43                 | 7.94              | 36.20              | 2.17                     |
| 4924.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7386.00         | 48.45                   | PK | 74             | 25.55       | 38.52            | 36.78                 | 8.45              | 35.30              | 9.93                     |
| 7386.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 51.58                   | PK | 74             | 22.42       | 49.41            | 30.43                 | 7.94              | 36.20              | 2.17                     |
| 4924.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7386.00         | 49.65                   | PK | 74             | 24.35       | 39.72            | 36.78                 | 8.45              | 35.30              | 9.93                     |
| 7386.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Results of Band Edges Test (Radiated)**

Note: 802.11b/802.11g/802.11n (H20) /802.11n (H40) all have been tested, only worse case 802.11b is reported.

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 47.54                   | PK | 74             | 26.46       | 52.95            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2400.00         | 50.11                   | PK | 74             | 23.89       | 55.37            | 27.55                 | 3.41              | 36.22              | -5.26                    |
| 2400.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 49.34                   | PK | 74             | 24.66       | 54.75            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2400.00         | 51.11                   | PK | 74             | 22.89       | 56.37            | 27.55                 | 3.41              | 36.22              | -5.26                    |
| 2400.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 49.58                   | PK | 74             | 24.42       | 55.09            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.50         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2500.00         | 46.08                   | PK | 74             | 27.92       | 51.55            | 27.41                 | 3.47              | 36.35              | -5.47                    |
| 2500.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 51.88                   | PK | 74             | 22.12       | 57.39            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.50         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2500.00         | 48.18                   | PK | 74             | 25.82       | 53.65            | 27.41                 | 3.47              | 36.35              | -5.47                    |
| 2500.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 4.3 Maximum Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |

#### WIFI

| Type          | Channel | Output power PK (dBm) | Limit (dBm) | Result |
|---------------|---------|-----------------------|-------------|--------|
| 802.11b       | 01      | 9.07                  | 30.00       | Pass   |
|               | 06      | 9.19                  |             |        |
|               | 11      | 9.13                  |             |        |
| 802.11g       | 01      | 8.75                  | 30.00       | Pass   |
|               | 06      | 8.86                  |             |        |
|               | 11      | 8.69                  |             |        |
| 802.11n(HT20) | 01      | 8.33                  | 30.00       | Pass   |
|               | 06      | 8.91                  |             |        |
|               | 11      | 8.95                  |             |        |
| 802.11n(HT40) | 03      | 7.95                  | 30.00       | Pass   |
|               | 06      | 8.11                  |             |        |
|               | 09      | 8.18                  |             |        |

Note: 1.The test results including the cable lose.

## 4.4 Power Spectral Density


### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

### Test Configuration




### Test Results


|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |

#### WIFI

| Type          | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|---------------|---------|-----------------------------------|------------------|--------|
| 802.11b       | 01      | -15.06                            | 8.00             | Pass   |
|               | 06      | -15.64                            |                  |        |
|               | 11      | -13.72                            |                  |        |
| 802.11g       | 01      | -17.98                            | 8.00             | Pass   |
|               | 06      | -17.09                            |                  |        |
|               | 11      | -16.75                            |                  |        |
| 802.11n(HT20) | 01      | -18.11                            | 8.00             | Pass   |
|               | 06      | -18.40                            |                  |        |
|               | 11      | -17.09                            |                  |        |
| 802.11n(HT40) | 03      | -18.78                            | 8.00             | Pass   |
|               | 06      | -17.48                            |                  |        |
|               | 09      | -19.77                            |                  |        |

Test plot as follows:

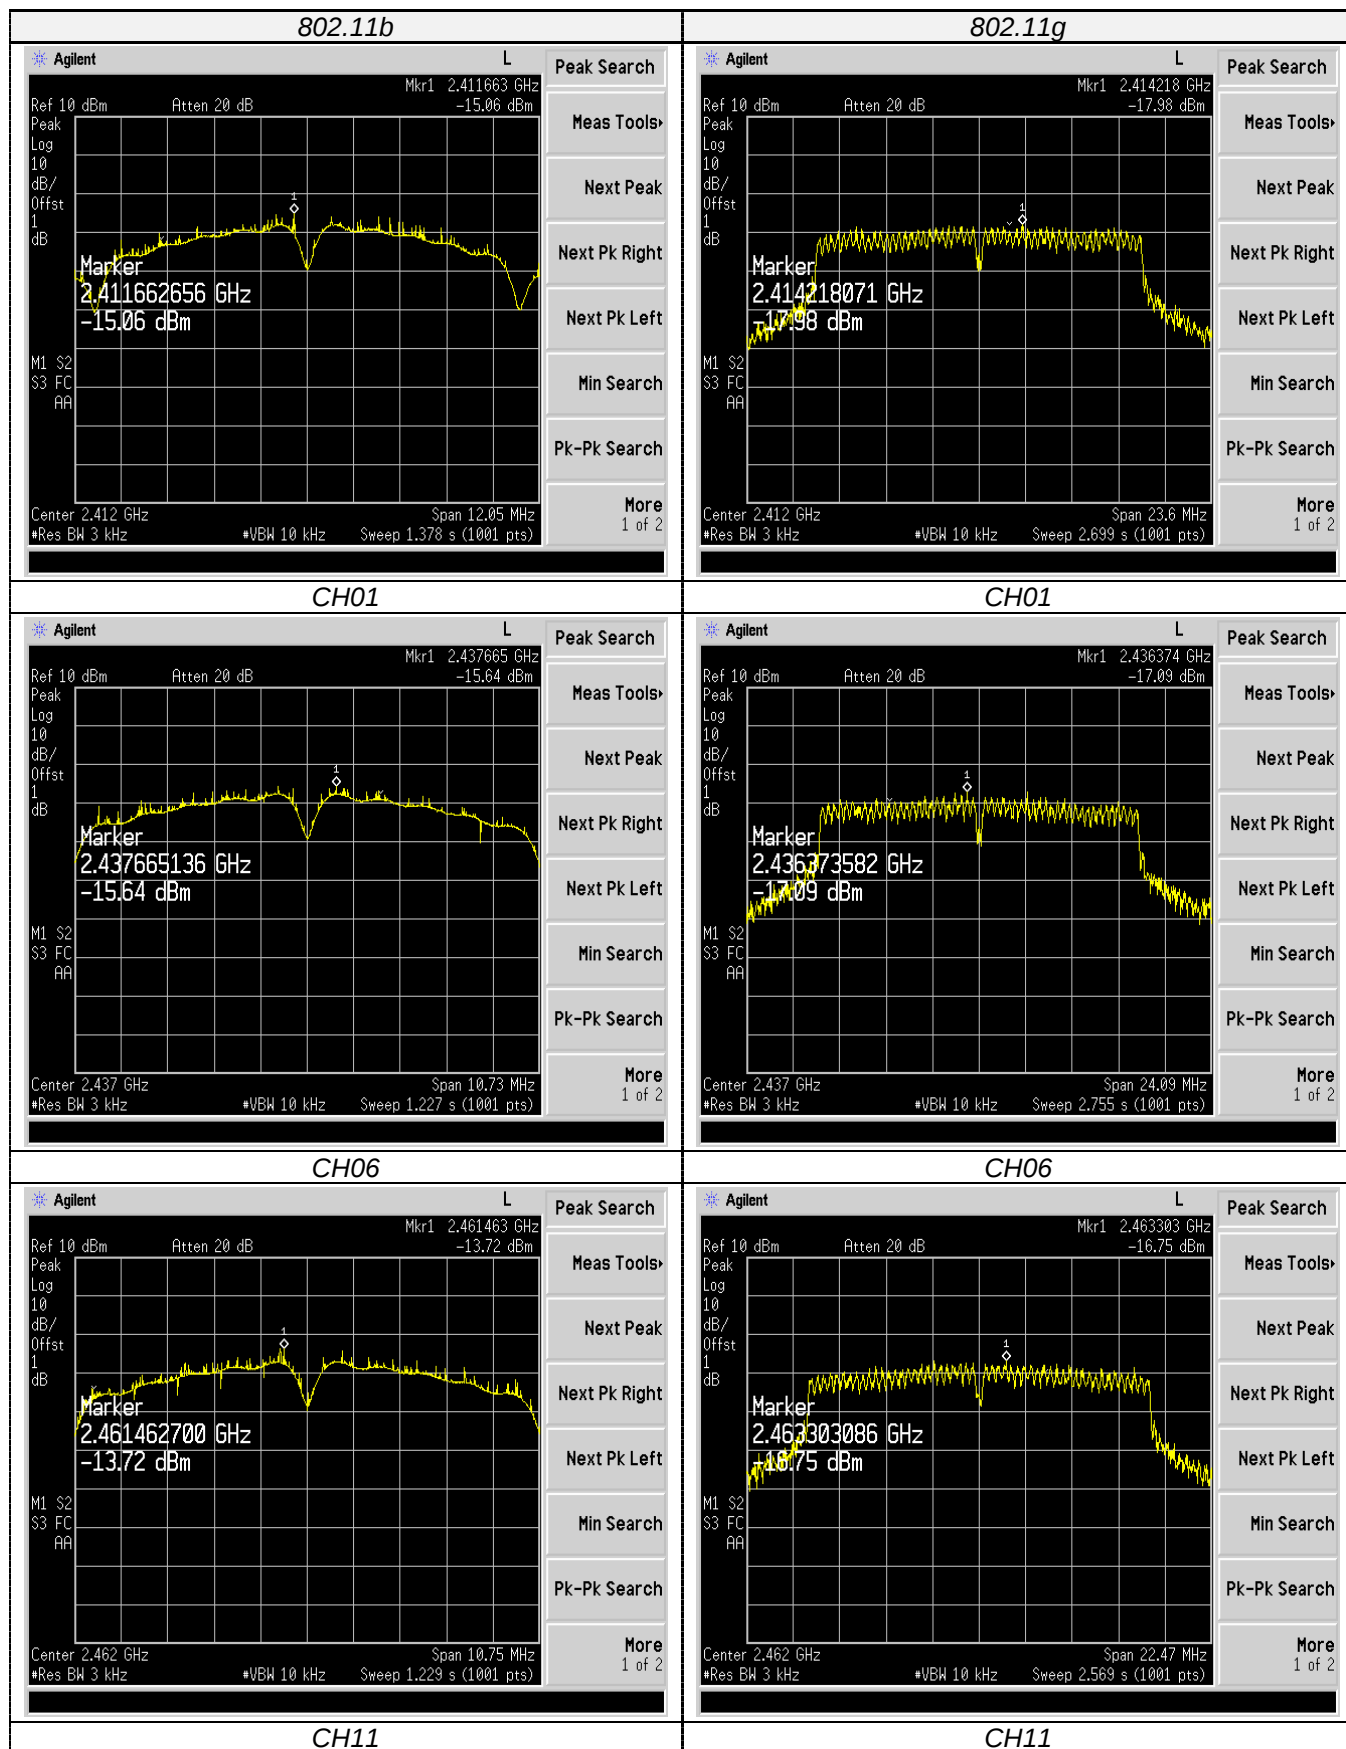

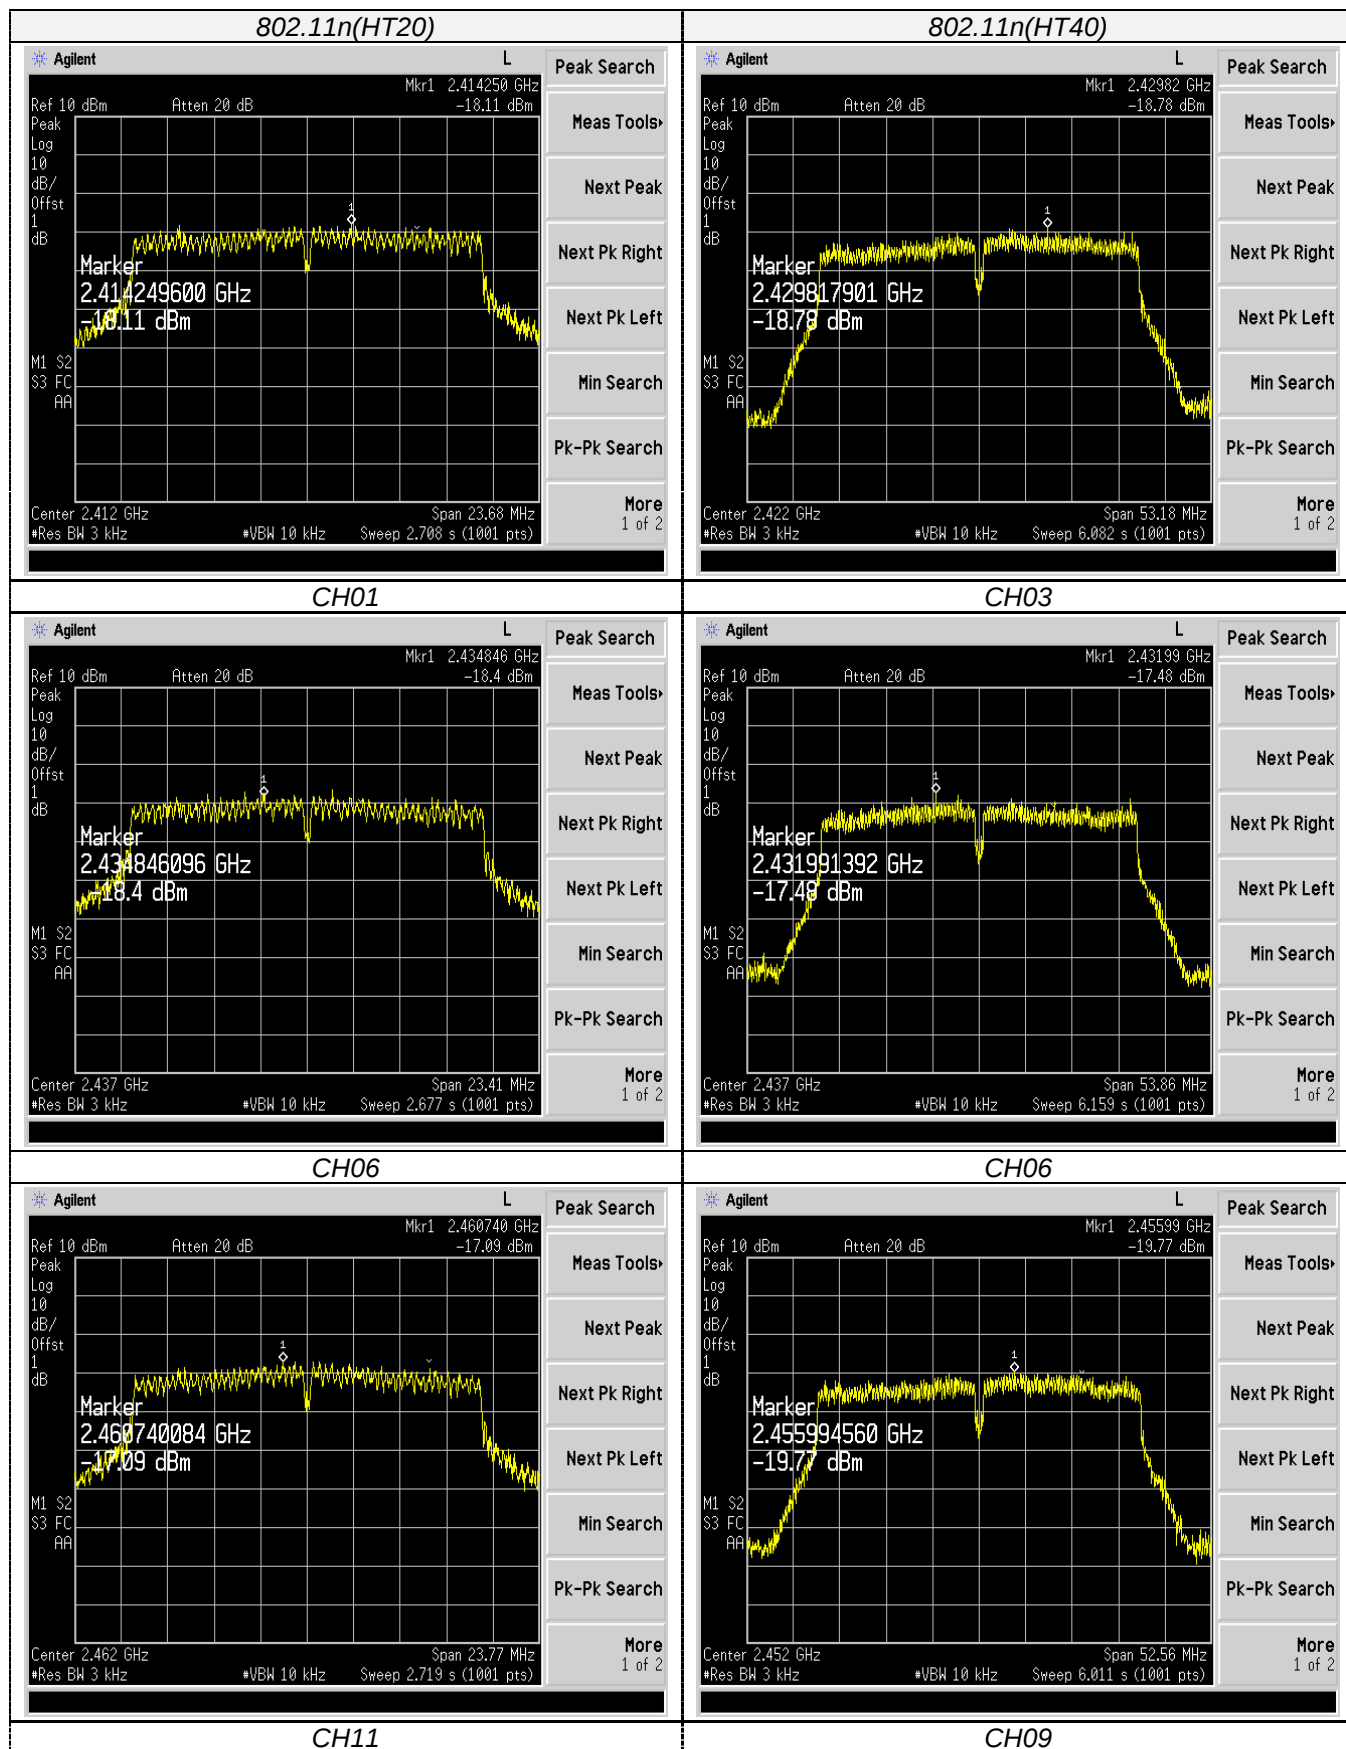

## 4.5 6dB Bandwidth


### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### Test Configuration



### Test Results


|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |

#### *WIFI*


| Type          | Channel | 6dB Bandwidth (MHz) | 99% OBW (MHz) | Limit (KHz) | Result |
|---------------|---------|---------------------|---------------|-------------|--------|
| 802.11b       | 01      | 8.032               | 12.8166       | ≥500        | Pass   |
|               | 06      | 7.152               | 12.7165       |             |        |
|               | 11      | 7.164               | 12.5076       |             |        |
| 802.11g       | 01      | 15.731              | 16.4855       | ≥500        | Pass   |
|               | 06      | 16.062              | 16.4703       |             |        |
|               | 11      | 14.978              | 16.4194       |             |        |
| 802.11n(HT20) | 01      | 15.787              | 17.7181       | ≥500        | Pass   |
|               | 06      | 15.608              | 17.6709       |             |        |
|               | 11      | 15.848              | 17.6394       |             |        |
| 802.11n(HT40) | 03      | 35.455              | 35.9624       | ≥500        | Pass   |
|               | 06      | 35.904              | 36.0729       |             |        |
|               | 09      | 35.040              | 36.0313       |             |        |

Test plot as follows:


802.11b

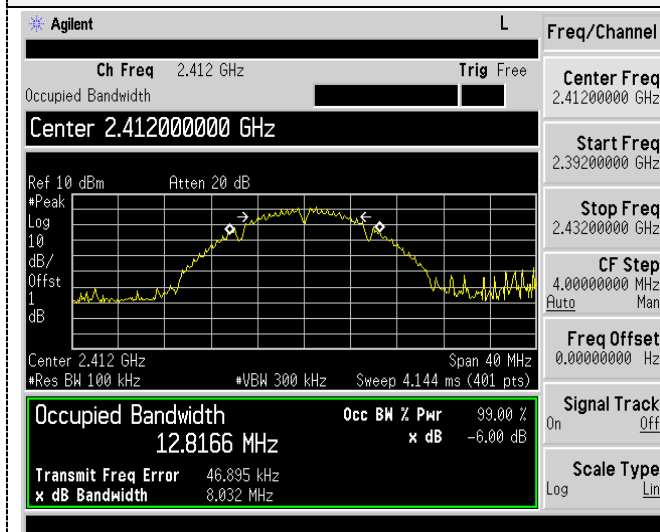


802.11g

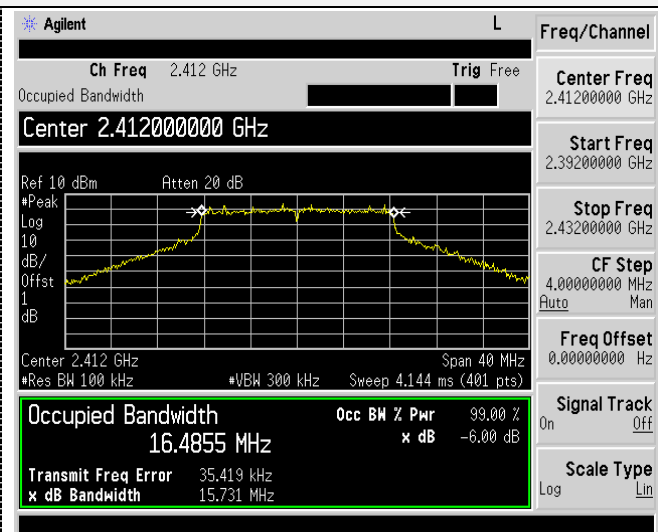


CH01

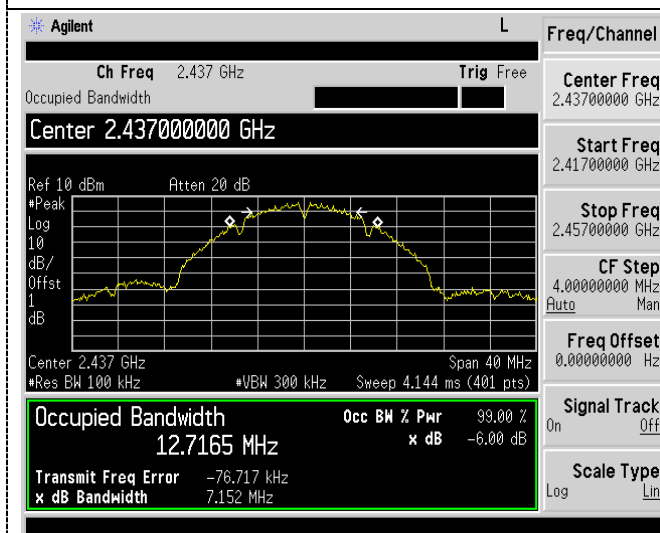


CH01

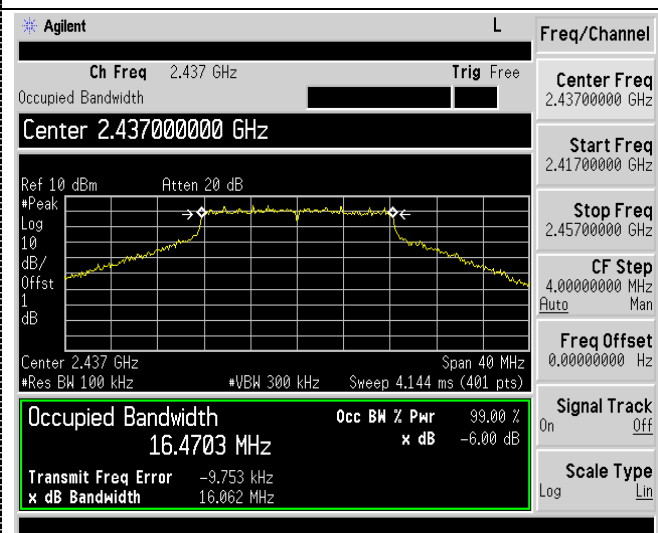

CH06

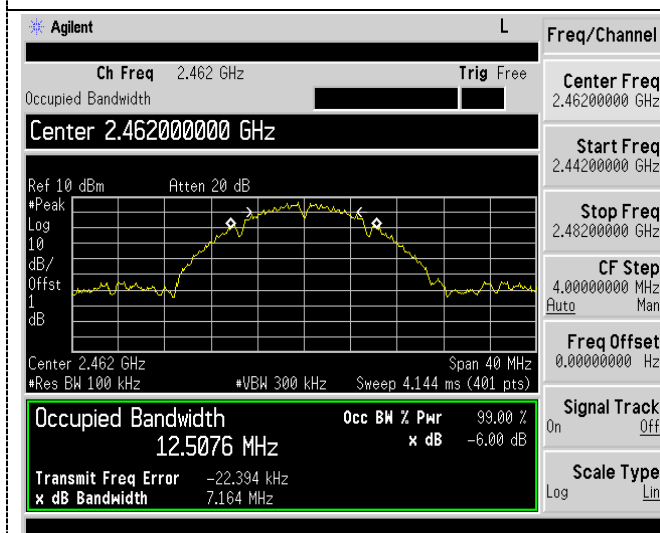

CH06

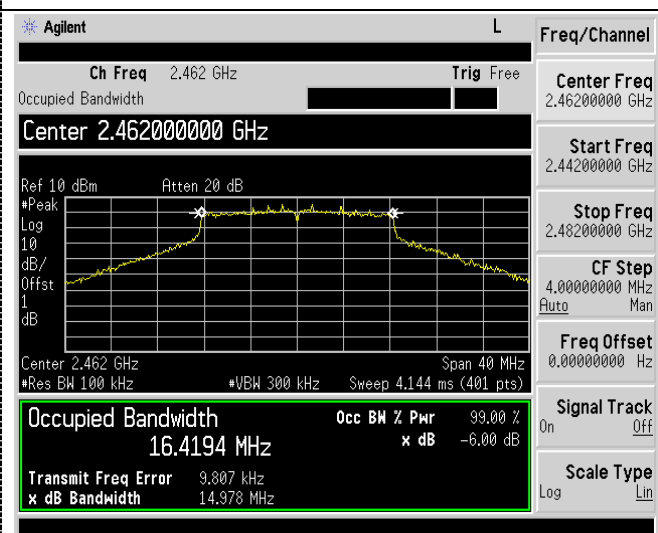


CH11



CH11



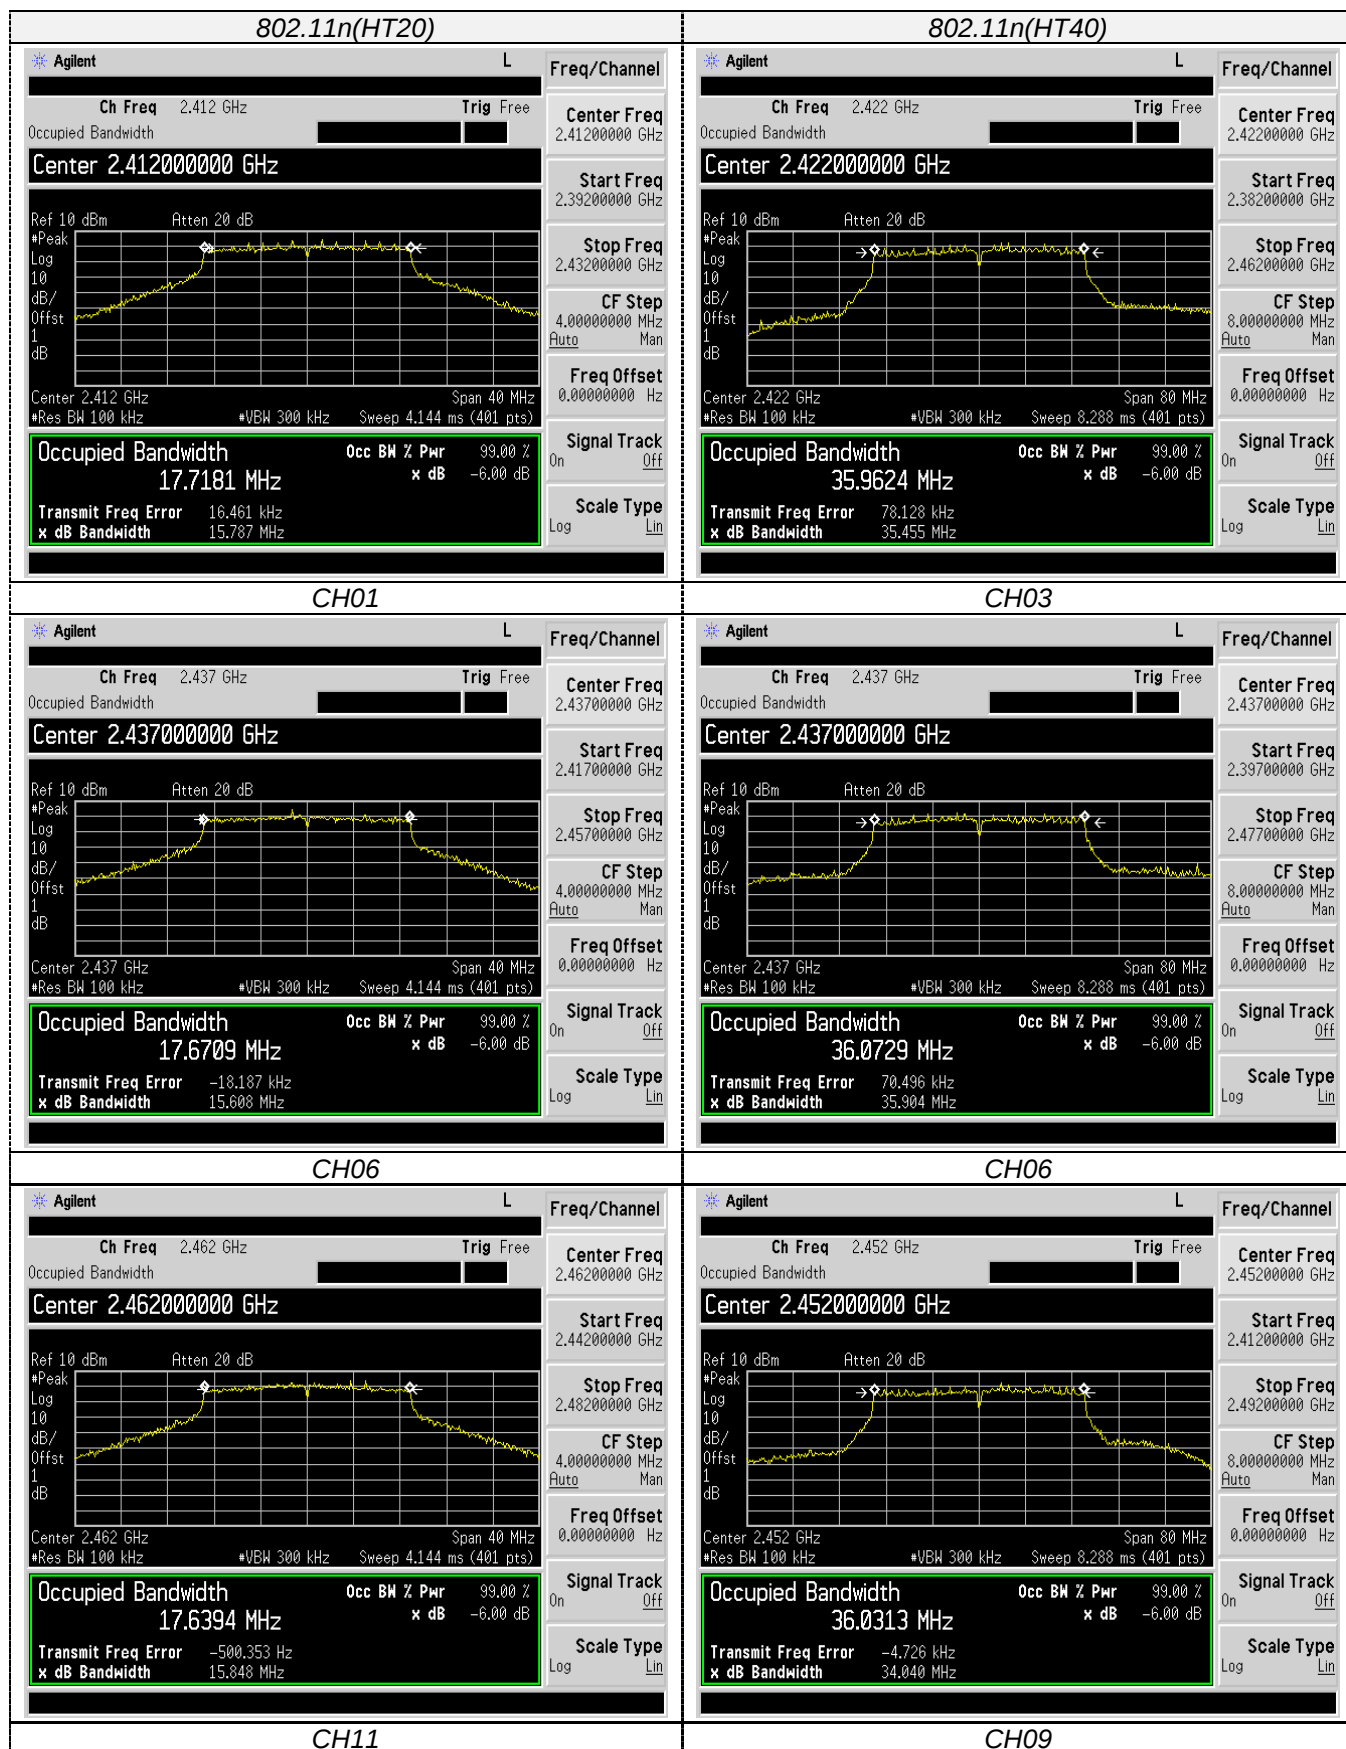

## 4.6 Out-of-band Emissions


### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### Test Configuration











### Test Results





|               |          |                |          |
|---------------|----------|----------------|----------|
| Temperature   | 22.8°C   | Humidity       | 56%      |
| Test Engineer | Moon Tan | Configurations | WLAN2.4G |





Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.





Test plot as follows:

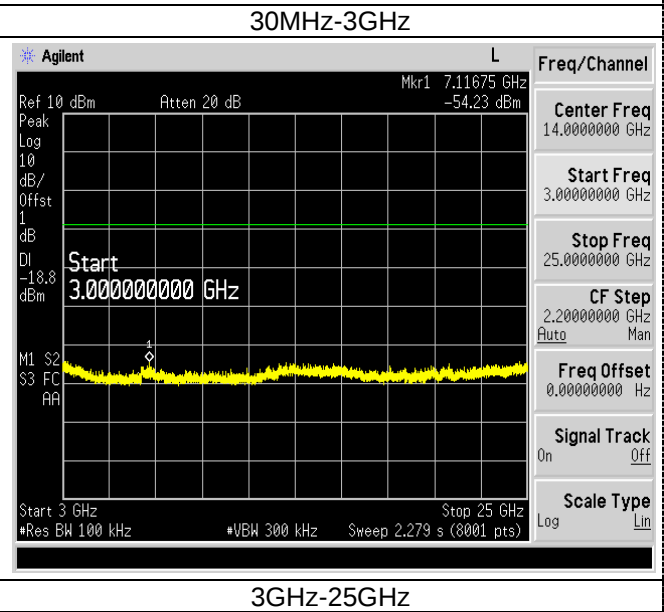
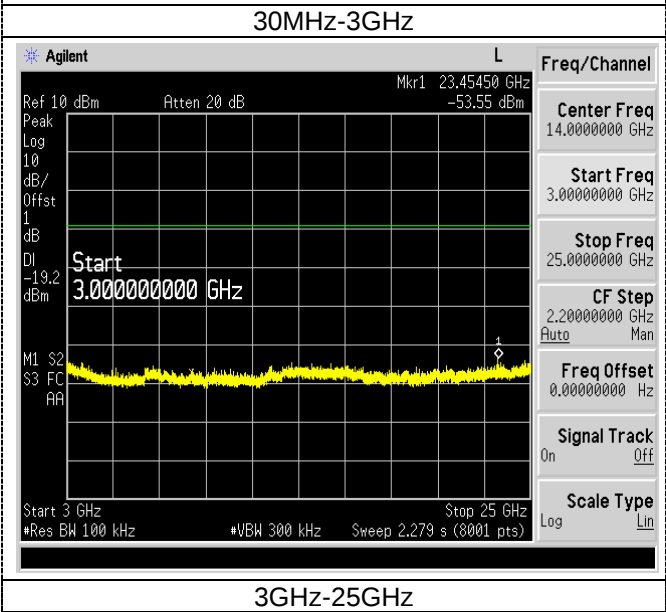
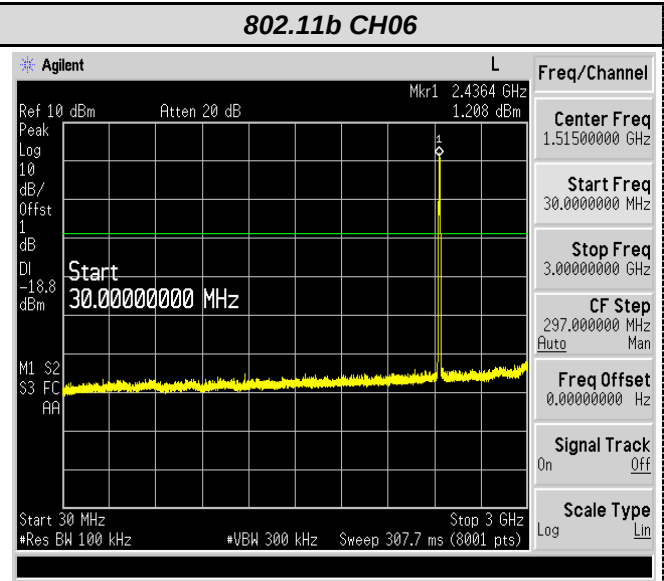
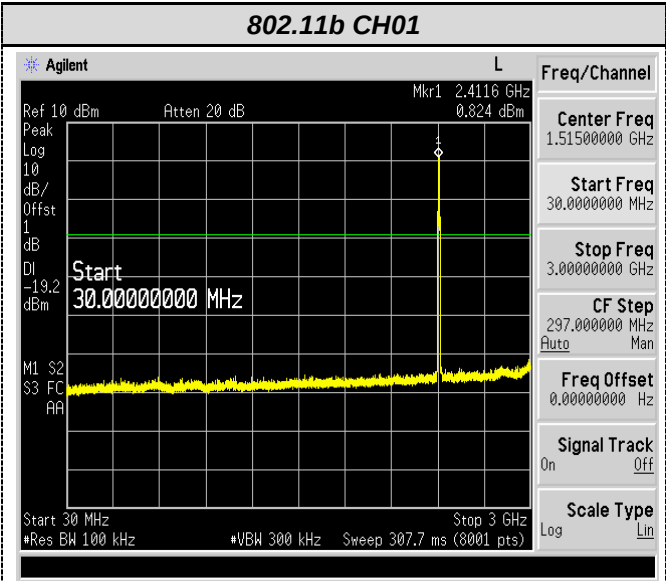


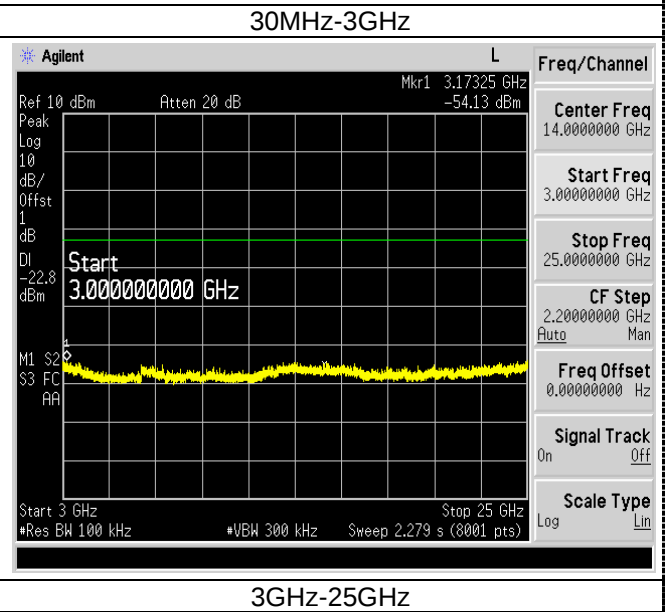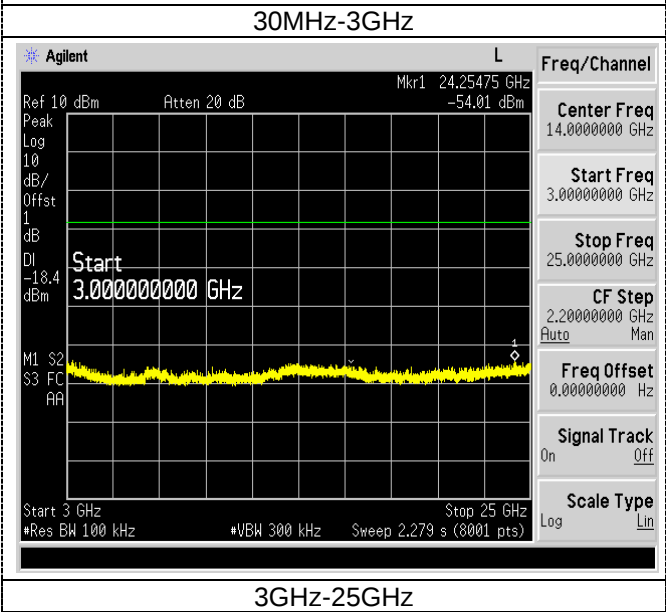
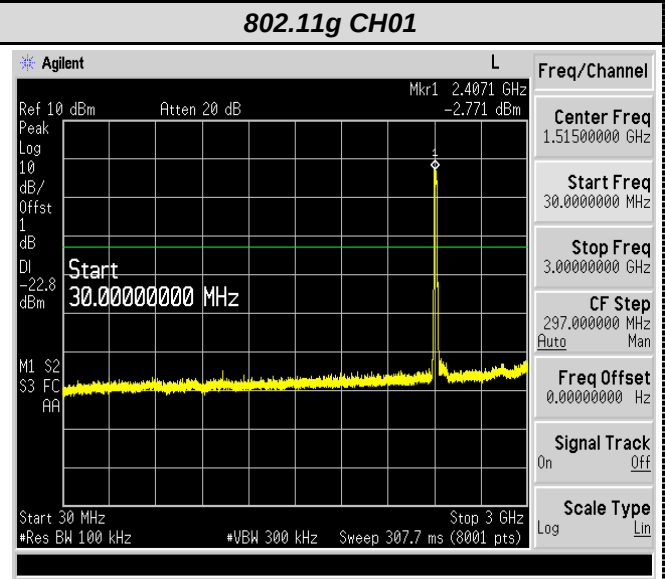
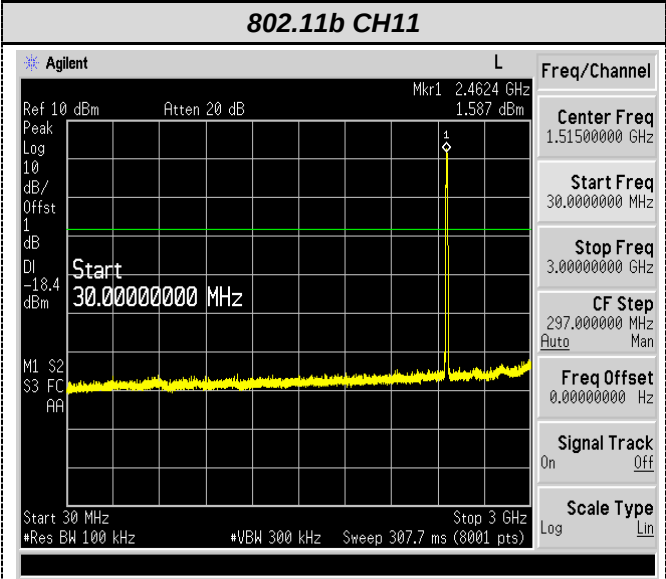


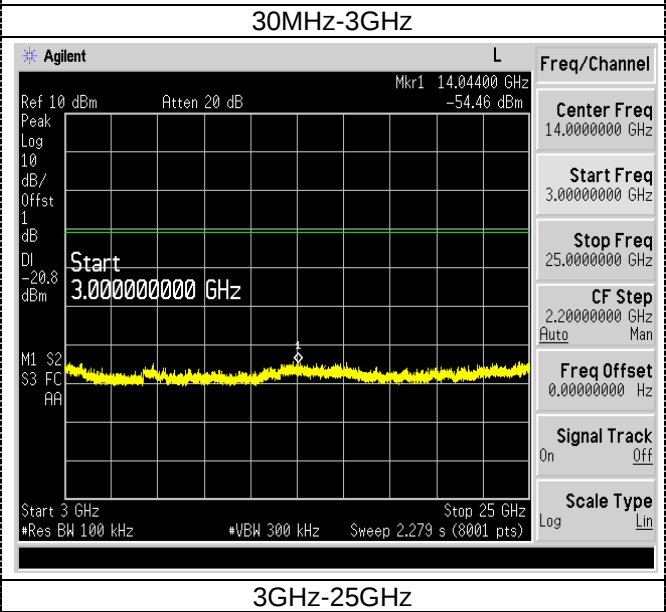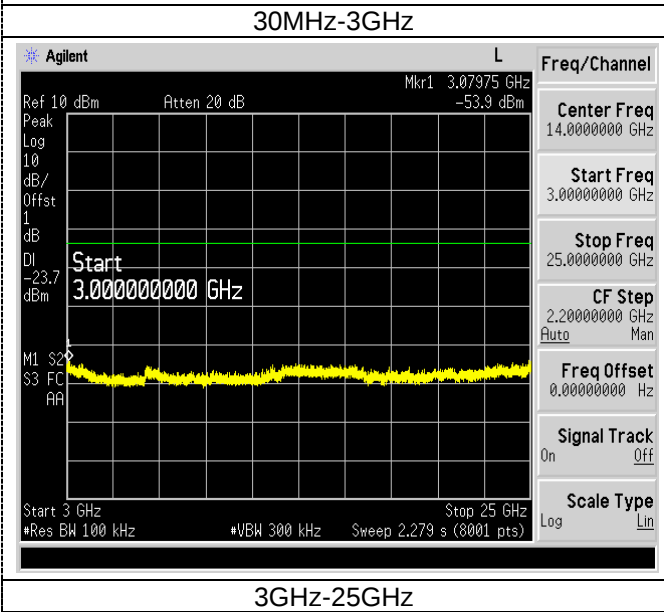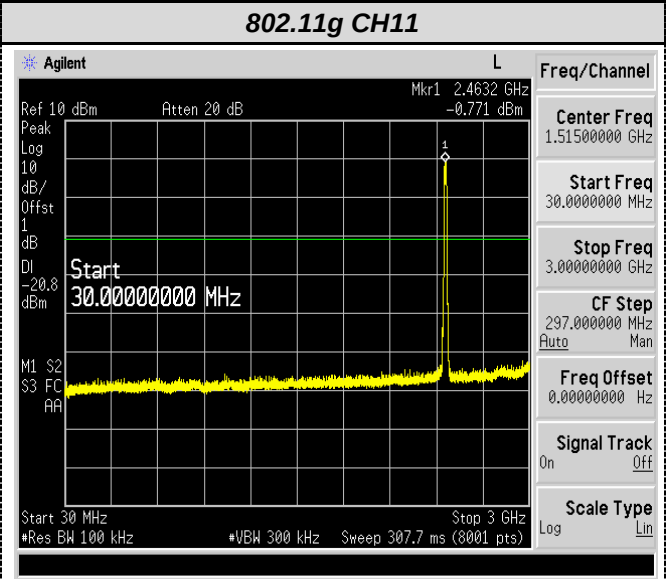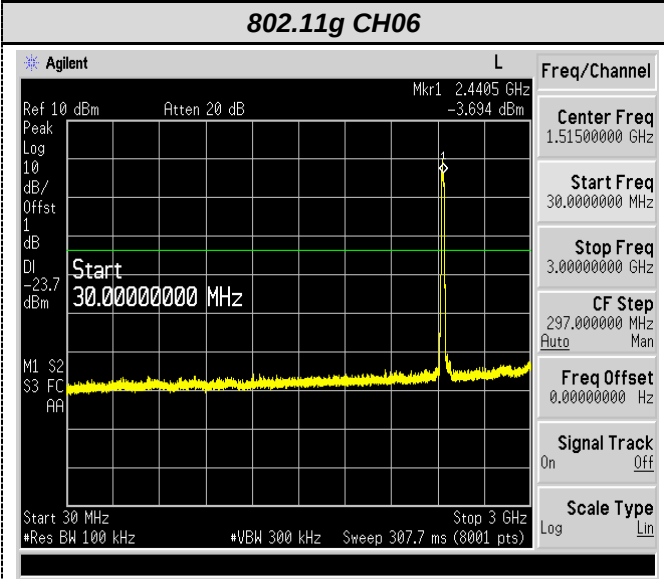


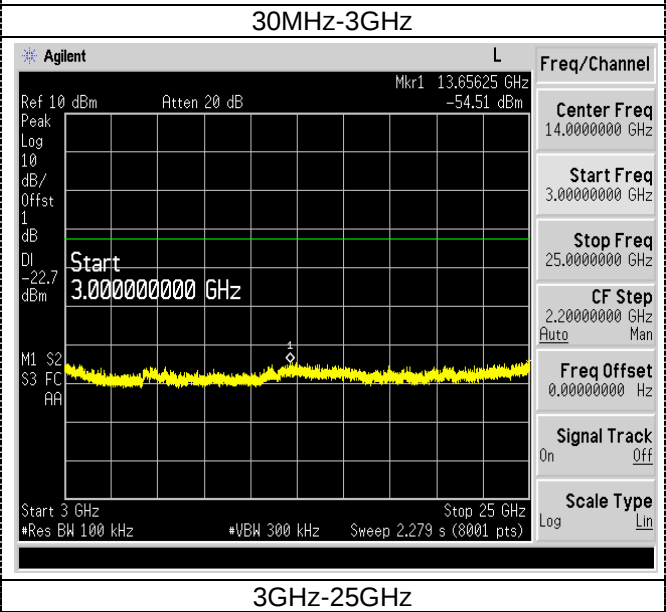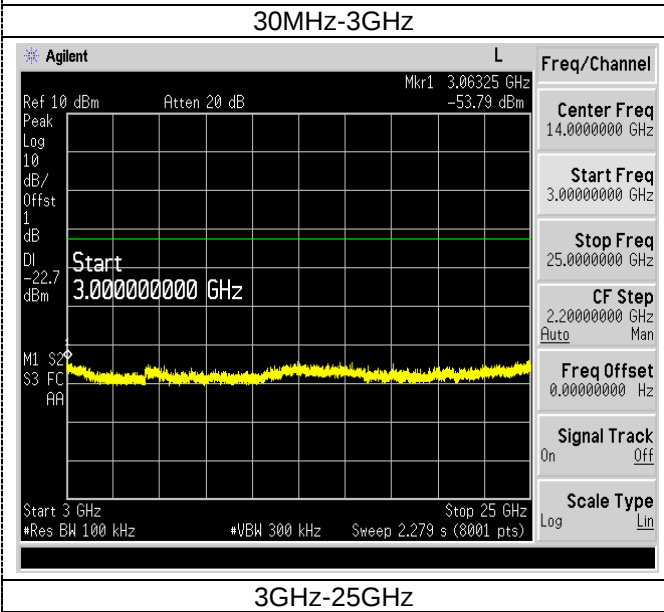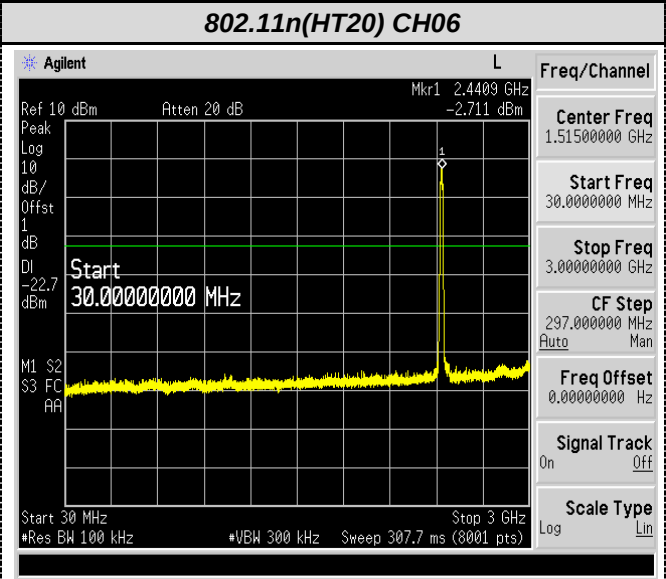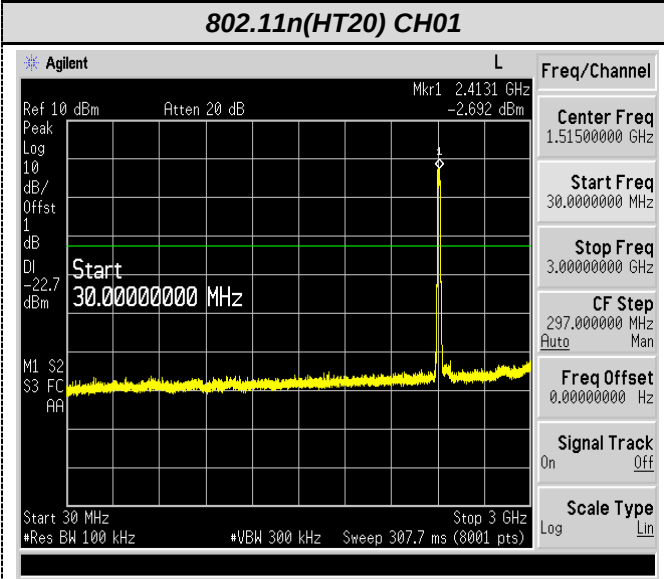

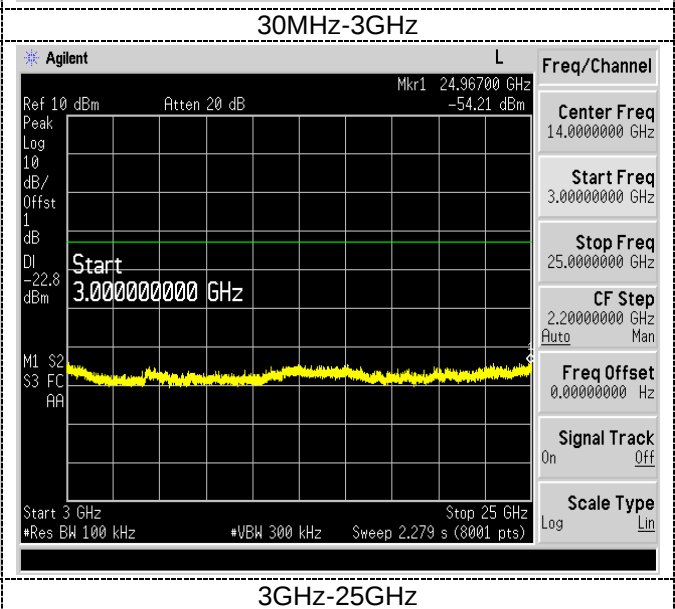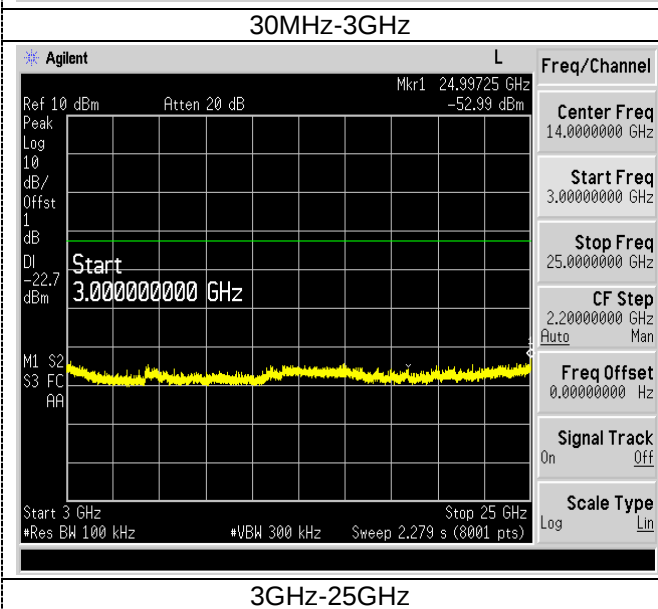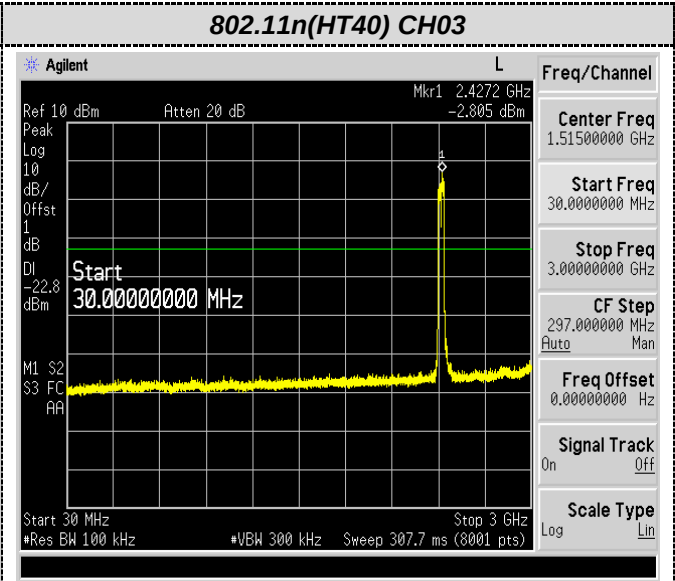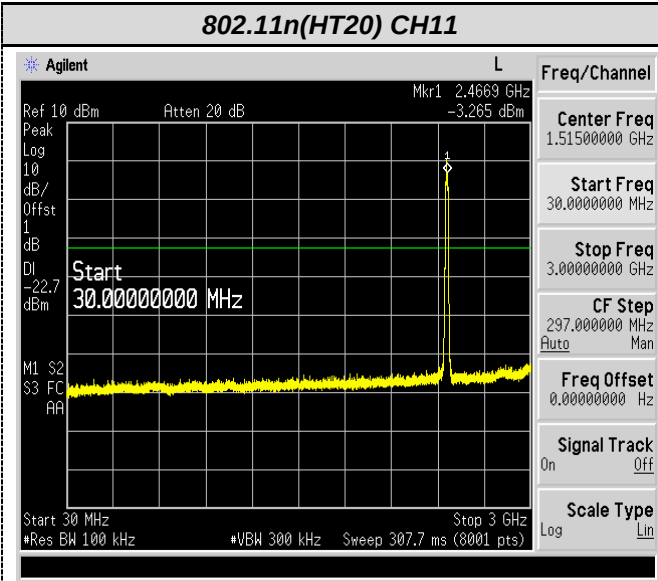

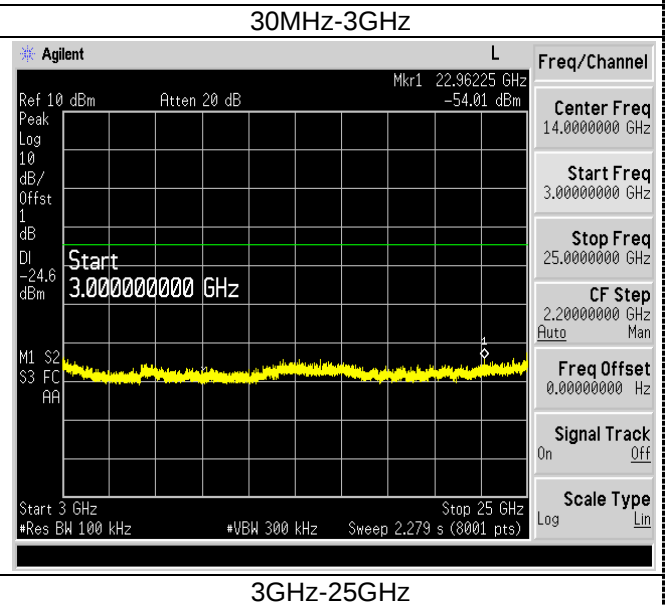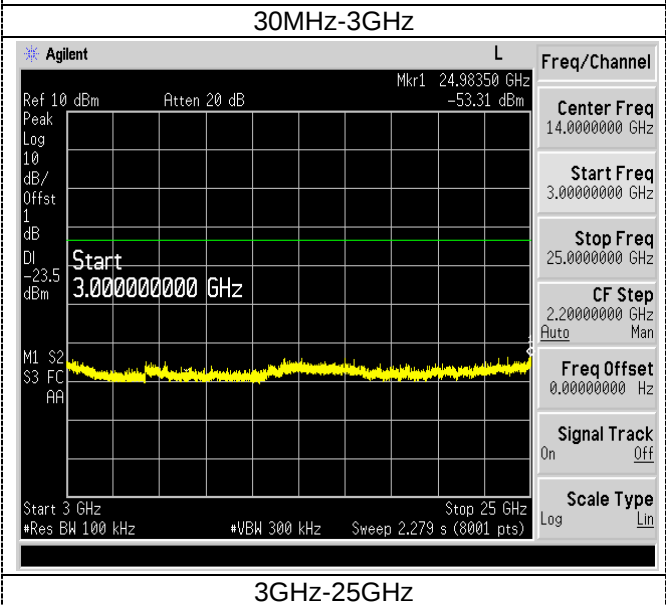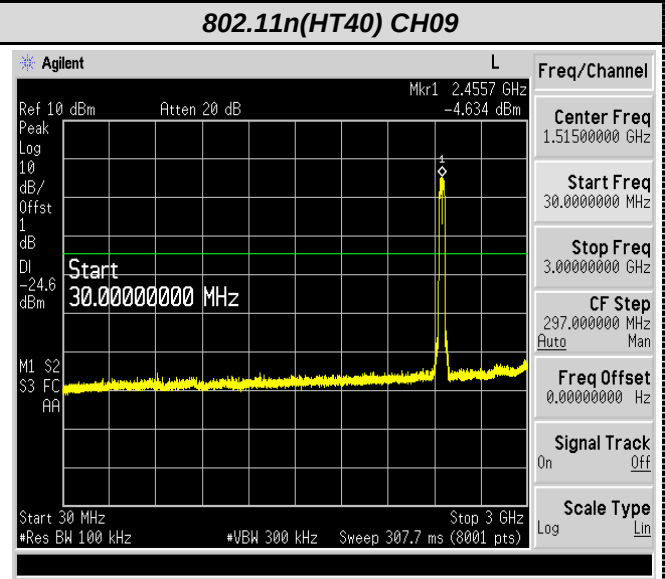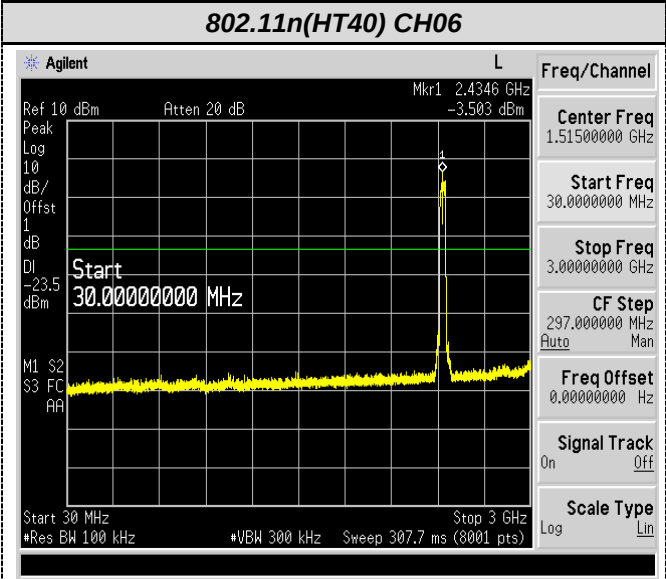

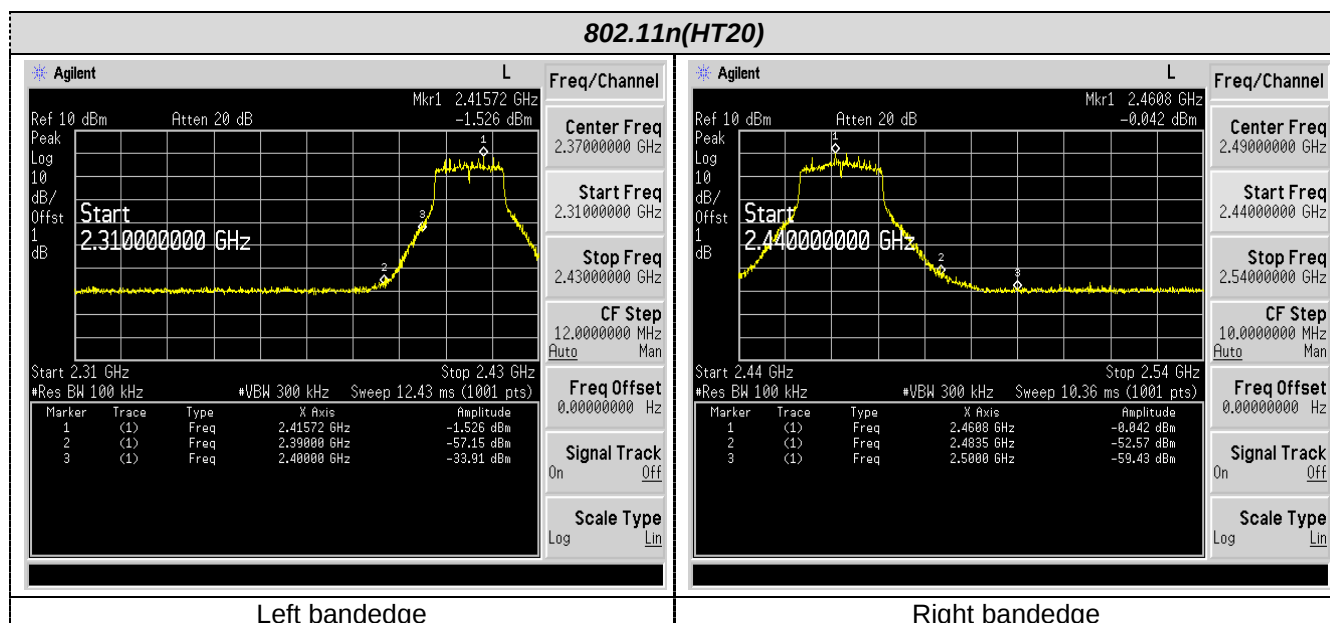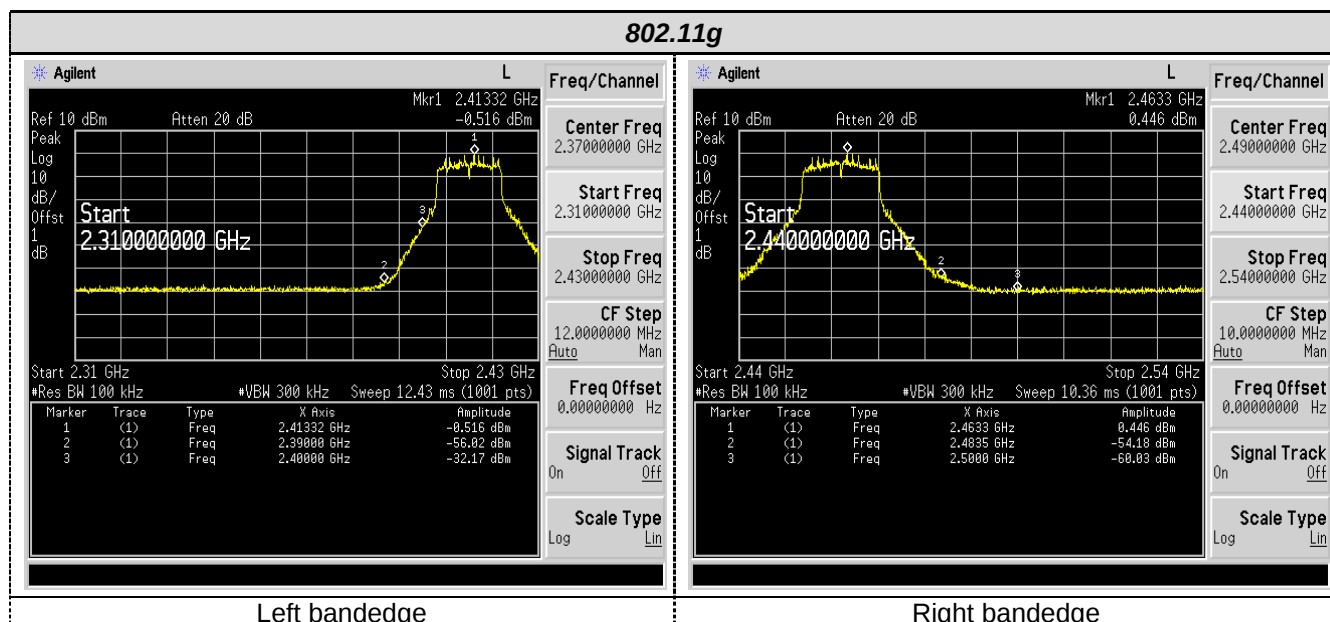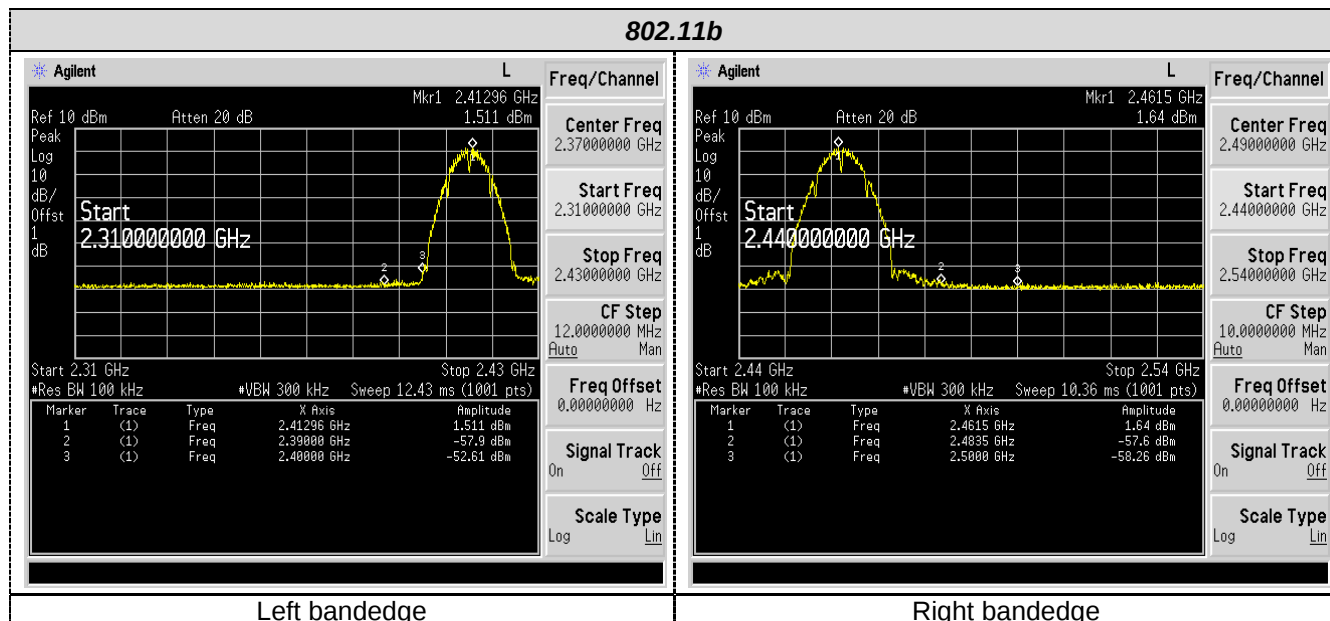**Band-edge Measurements for RF Conducted Emissions:**

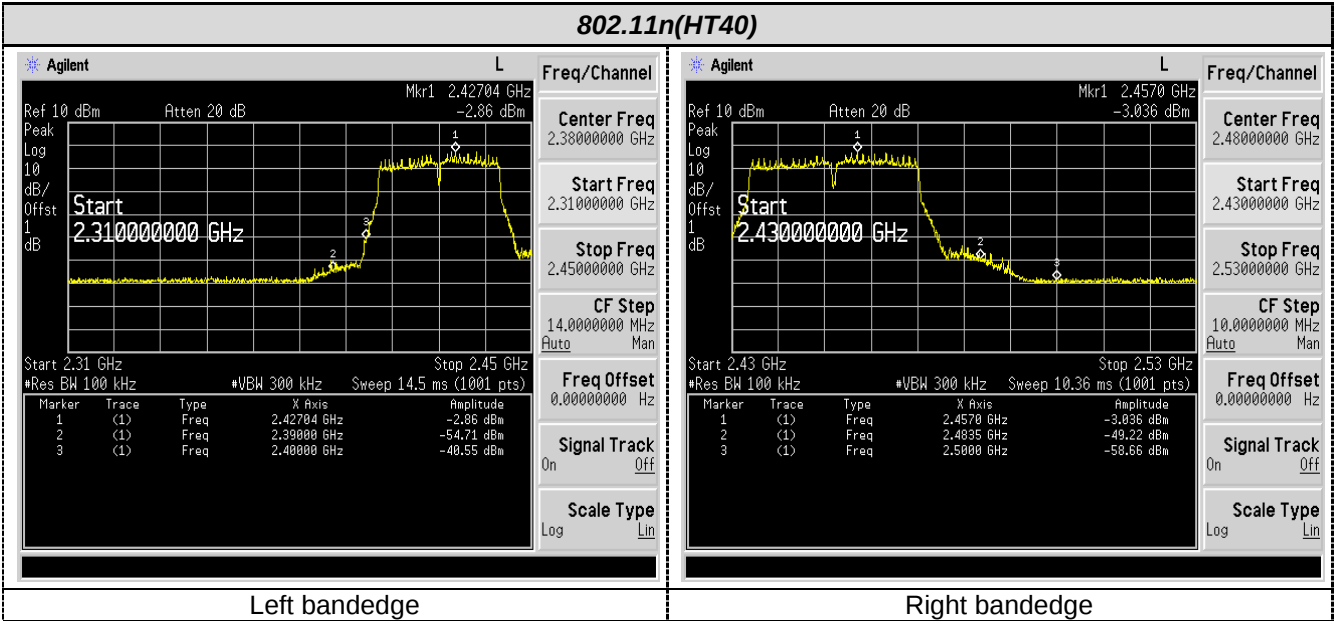

## 4.7 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited


**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The maximum gain of antenna was 2.0dBi for 2.4GHz WIFI.




## 5 Test Setup Photos of the EUT

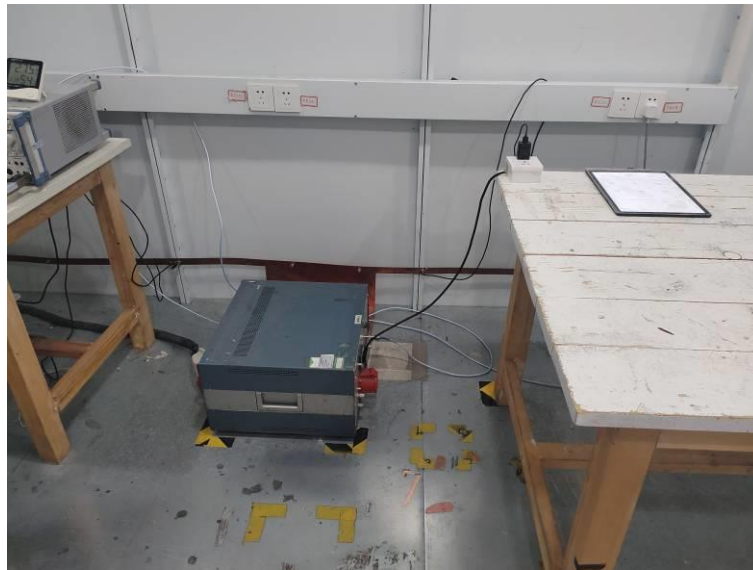


## 6 Photos of the EUT

### External Photos of EUT



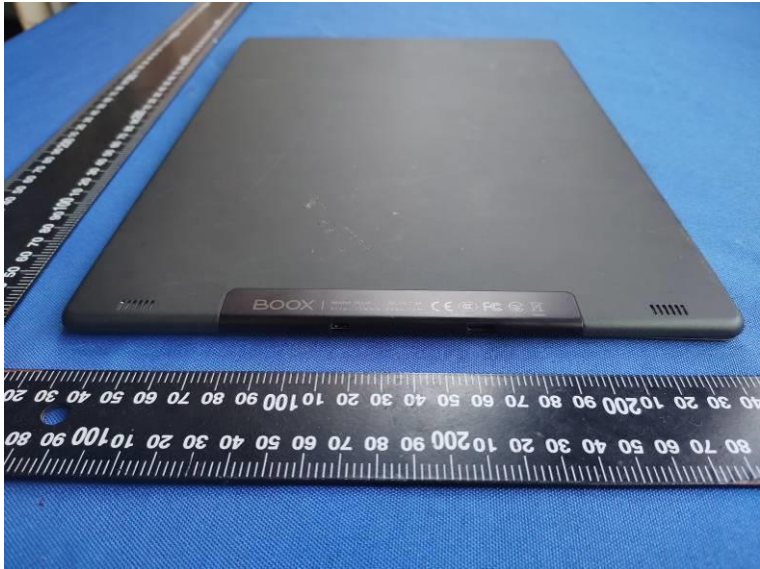
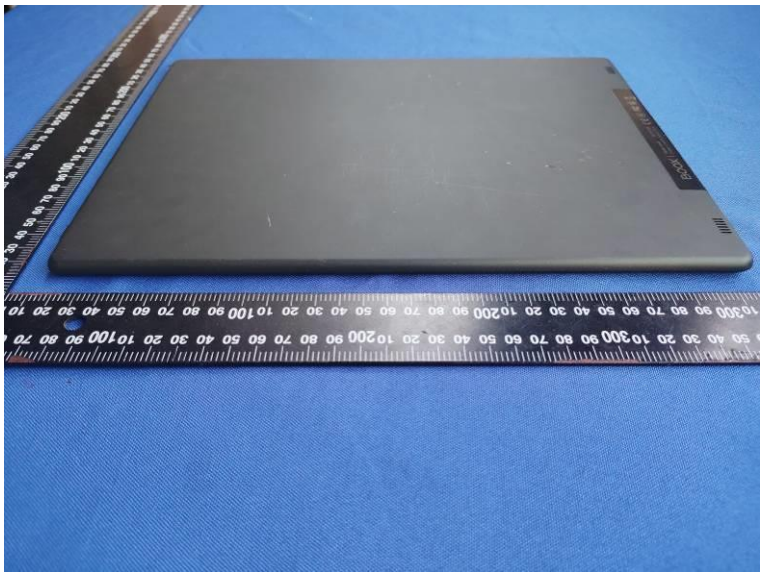
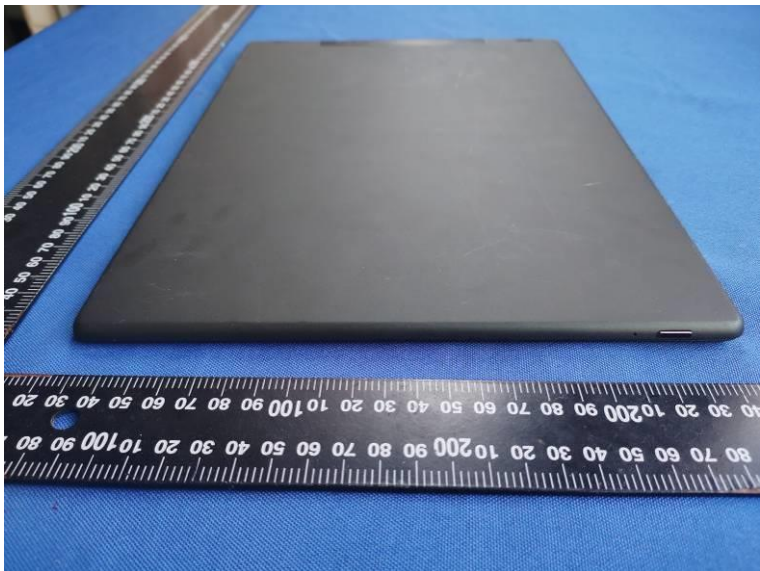


Internal Photos

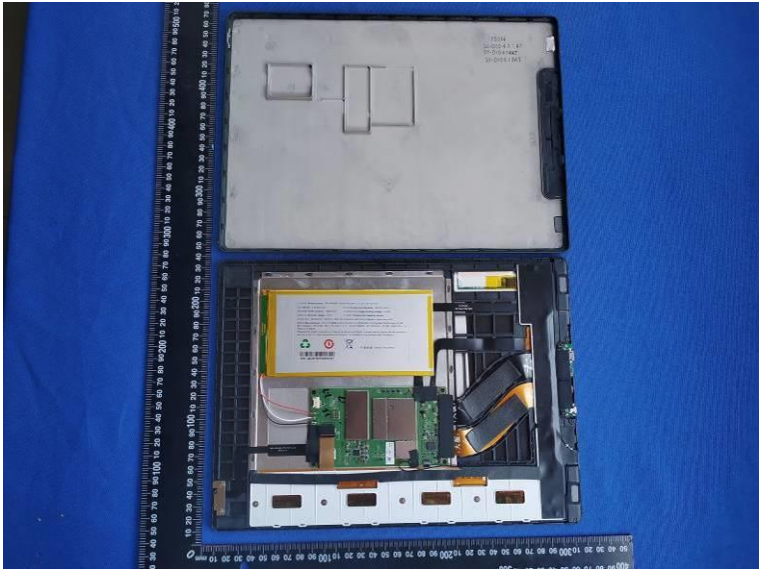

WIFI/BT Antenna



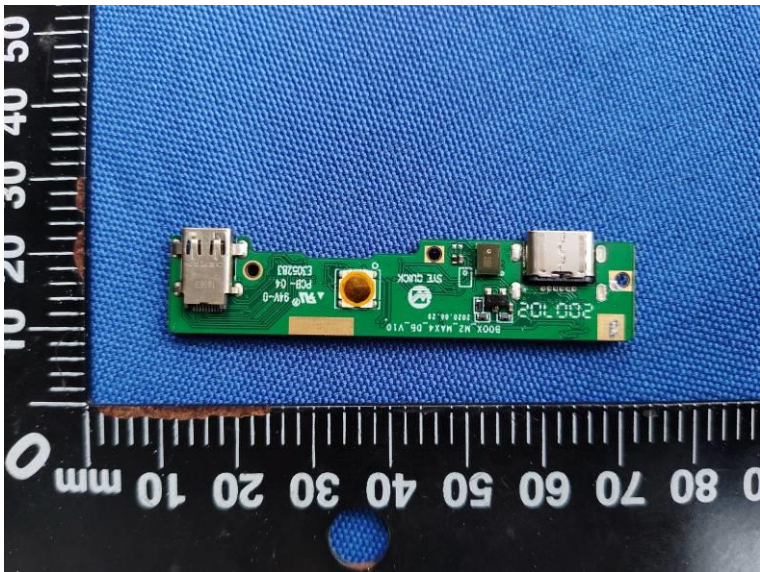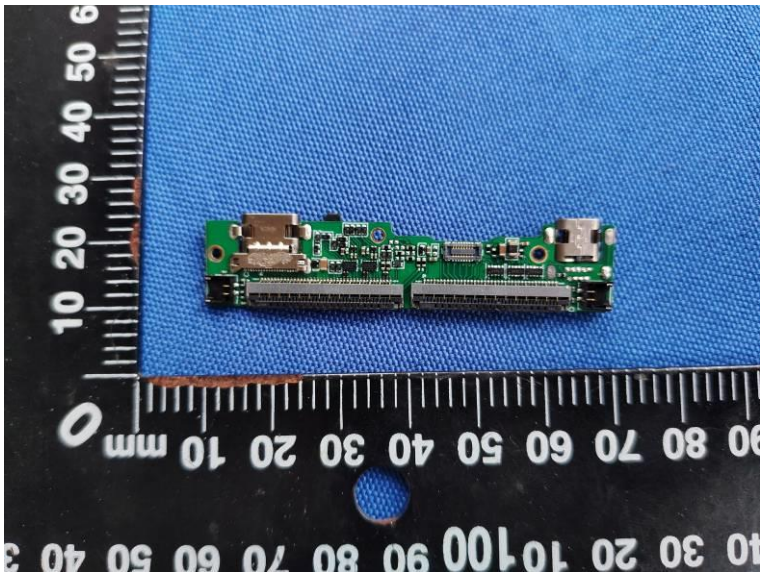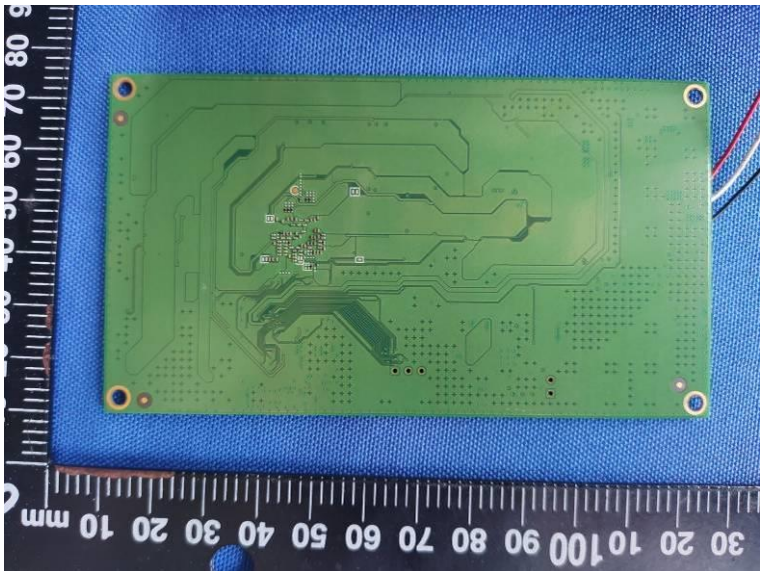



\*\*\*\*\* End of Report \*\*\*\*\*