

# TEST REPORT

Applicant Name : ONYX INTERNATIONAL INC.  
 Address : Room 301-6, 10 Honglou Street, Liwan District, Guangzhou  
 City, Guangdong Province, China  
 Report Number : SZNS220330-11570E-RF-00A-M3  
 FCC ID: XR3-POKE4

## Test Standard (s)

FCC PART 15.247


## Sample Description

Product Type: E Ink Tablet, Smart E Ink Tablet, ePaper Tablet, E-bag Tablet,  
 E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet,  
 E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet  
 Model No.: Poke4 Plus  
 Multiple Model(s) No.: Poke4 Lite, Poke4 Pro, Poke4 Color, Poke4, Poke4S (Please  
 refer to DOS for Model difference)  
 Trade Mark: BOOX  
 Date Received: 2022/03/30 (SZNS220330-11570E-RF-S1)  
 2024/02/02 (SZNS220330-11570E-RF-S2)  
 Date of Test: 2022/04/21-2022/05/12 for CE&RE Test  
 2024/12/19 for RF Conducted Test  
 Report Date: 2024/12/20


Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

  
 \_\_\_\_\_  
 Roger Ling  
 EMC Engineer

## Approved By:

  
 \_\_\_\_\_  
 Bob.Liao  
 EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk ★.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk \*\*. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.  
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: [www.atc-lab.com](http://www.atc-lab.com)

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES .....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC §15.247 (I), §1.1307 (B) (1) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
EUT SETUP .....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
TRANSD FACTOR & MARGIN CALCULATION .....	15
TEST DATA .....	15
<b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP .....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	19
TEST PROCEDURE .....	19
FACTOR & MARGIN CALCULATION .....	19
TEST DATA .....	19
<b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	27

<b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(D) - BAND EDGES TESTING.....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>APPENDIX .....</b>	<b>32</b>
APPENDIX A: 20DB EMISSION BANDWIDTH.....	32
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	38
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	44
APPENDIX D: CARRIER FREQUENCY SEPARATION.....	50
APPENDIX E: TIME OF OCCUPANCY .....	53
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	63
APPENDIX G: BAND EDGE MEASUREMENTS .....	66

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	SZNS220330-11570E-RF-00A	Original Report	2022/05/30
Rev.01	SZNS220330-11570E-RF-00A-M3	Retest and Update RF Conducted Test Data	2024/12/20

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 1.66dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	2.5 dBi (provided by the applicant)
Voltage Range	DC 3.8V from battery or DC 5.0V from USB port
Sample serial number	SZNS220330-11570E-RF-S1 for CE&RE Test (Assigned by ATC) SZNS220330-11570E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.3dB	
Unwanted Emission, conducted	1.2dB	
AC Line Conducted emission	2.72dB	
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature	1 °C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## **Test Facility**

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 809509, the FCC Designation No.: CN1403.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“QRCT4”\*exercise software was used and the power level is 7\*, which provided by manufacturer.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Tecno	Adapter	U100TSA	U100TSA

### External I/O Cable


Cable Description	Length (m)	From Port	To
USB cable	1.2	Adapter	EUT

## Block Diagram of Test Setup

For conducted emission:

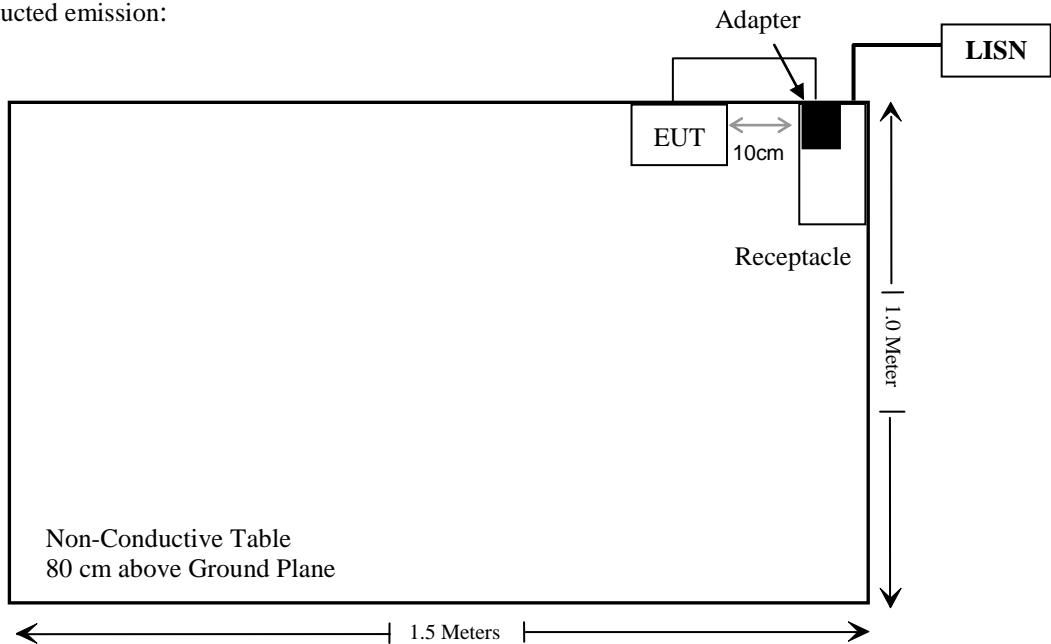

For radiated emission:

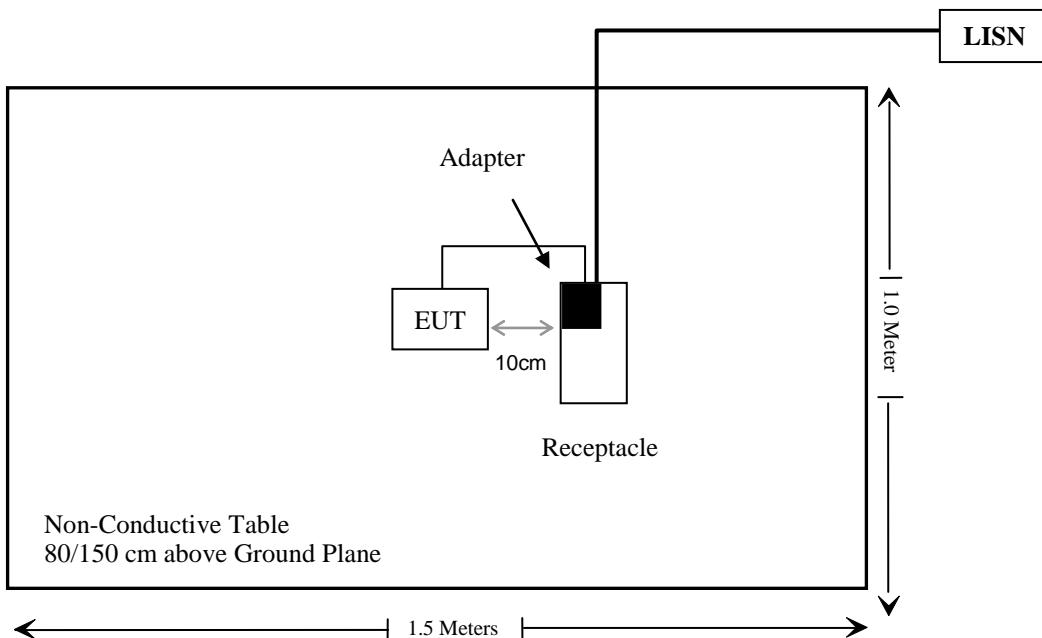

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Note
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant	From Original
§15.203	Antenna Requirement	Compliant	From Original
§15.207(a)	AC Line Conducted Emissions	Compliant	From Original
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant	From Original
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant*	Retested
§15.247(a)(1)	Channel Separation Test	Compliant*	Retested
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant*	Retested
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant*	Retested
§15.247(b)(1)	Peak Output Power Measurement	Compliant*	Retested
§15.247(d)	Band edges	Compliant*	Retested

Compliant\* – Annotations as below:

Note 1: The test item was retested and updated the data.

Note 2: The test software and power setting level were same as the original testing which on page 7 of the report.

Note 3: The retested RF power is almost the same as the original report.

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	Band Reject Filter	WRCG2400/2485-2375/2510-60/11SS	10	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2024/10/08	2025/10/07
Rohde & Schwarz	Open Switch and ControlUnit	OSP120+ OSP-B157	101244+ 100866	2024/10/08	2025/10/07
Agilent	10dB Attenuator	8491B	A5825	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.31	RF-01	2024/10/08	2025/10/07

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE****Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})]^{1/2}$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**Measurement Result****For worst case:**

Mode	Frequency (MHz)	Max tune-up conducted power (dBm)	Max tune-up conducted power (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BT	2402-2480	2.5	1.78	5	0.6	3.0	Yes

**Result:** Compliant.

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 2.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

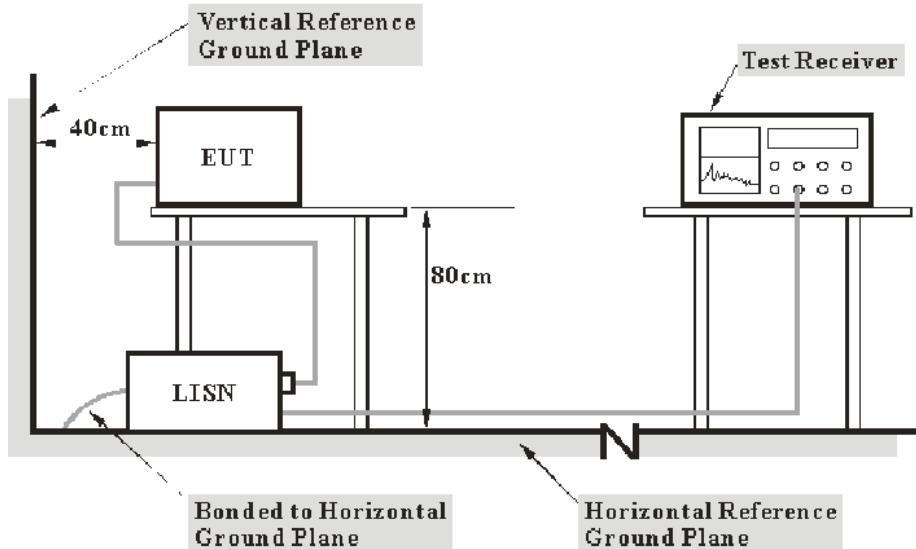

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	40 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Caro on 2022-04-29.*


*EUT operation mode: Transmitting (the worst case is 8DPSK Mode, Middle channel)*

## AC 120V/60 Hz, Line

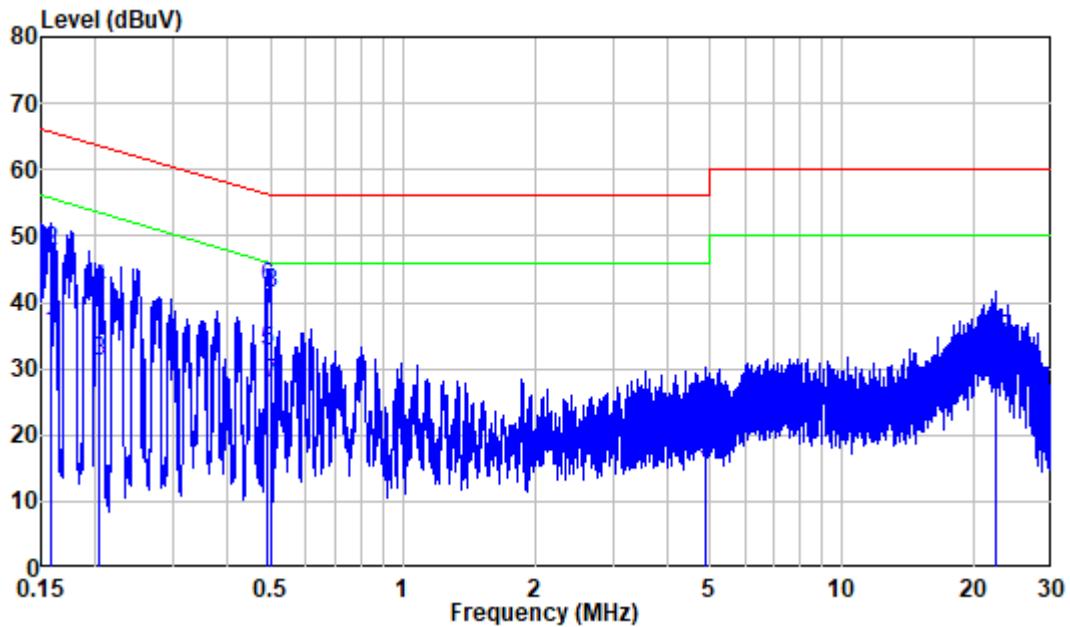

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.158	9.80	25.57	35.37	55.59	-20.22	Average
2	0.158	9.80	37.89	47.69	65.59	-17.90	QP
3	0.203	9.80	21.28	31.08	53.49	-22.41	Average
4	0.203	9.80	32.30	42.10	63.49	-21.39	QP
5	0.492	9.80	22.89	32.69	46.13	-13.44	Average
6	0.492	9.80	32.41	42.21	56.13	-13.92	QP
7	0.500	9.80	18.12	27.92	46.00	-18.08	Average
8	0.500	9.80	31.50	41.30	56.00	-14.70	QP
9	4.893	9.85	6.23	16.08	46.00	-29.92	Average
10	4.893	9.85	13.92	23.77	56.00	-32.23	QP
11	22.372	10.02	16.05	26.07	50.00	-23.93	Average
12	22.372	10.02	24.33	34.35	60.00	-25.65	QP



## AC 120V/60 Hz, Neutral

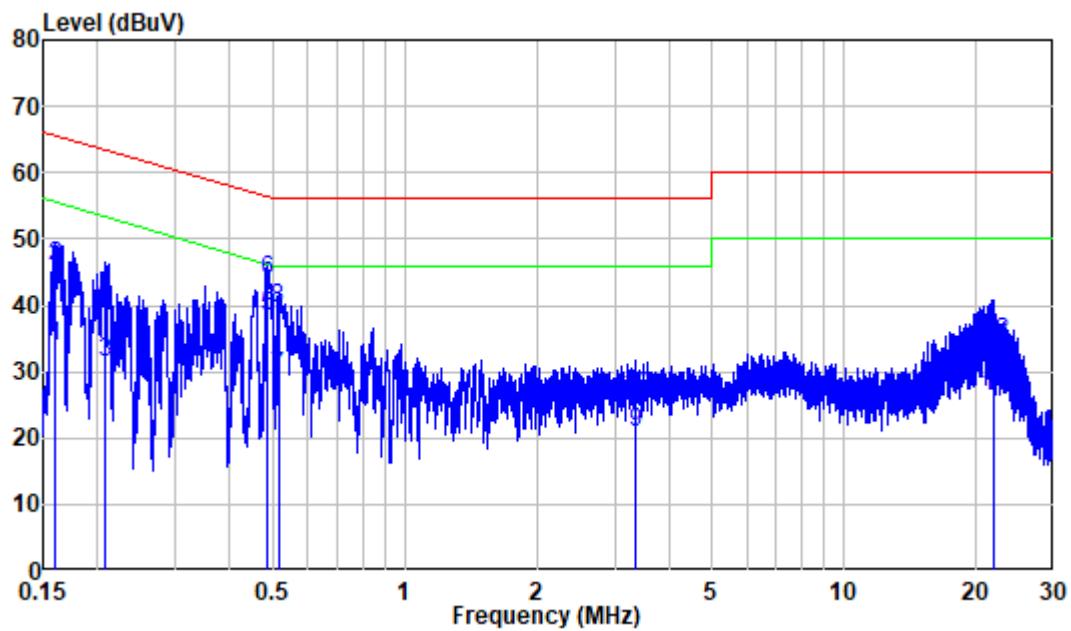

Freq	Factor	Read		Limit		Over Line	Over Limit	Remark
		MHz	dB	Level	dBuV			
1	0.160	9.80	24.06	33.86	55.49	-21.63	Average	
2	0.160	9.80	35.94	45.74	65.49	-19.75	QP	
3	0.209	9.80	21.60	31.40	53.26	-21.86	Average	
4	0.209	9.80	31.01	40.81	63.26	-22.45	QP	
5	0.484	9.80	28.62	38.42	46.27	-7.85	Average	
6	0.484	9.80	34.01	43.81	56.27	-12.46	QP	
7	0.515	9.81	19.36	29.17	46.00	-16.83	Average	
8	0.515	9.81	29.62	39.43	56.00	-16.57	QP	
9	3.344	9.83	11.09	20.92	46.00	-25.08	Average	
10	3.344	9.83	16.36	26.19	56.00	-29.81	QP	
11	21.816	10.12	16.21	26.33	50.00	-23.67	Average	
12	21.816	10.12	24.16	34.28	60.00	-25.72	QP	

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

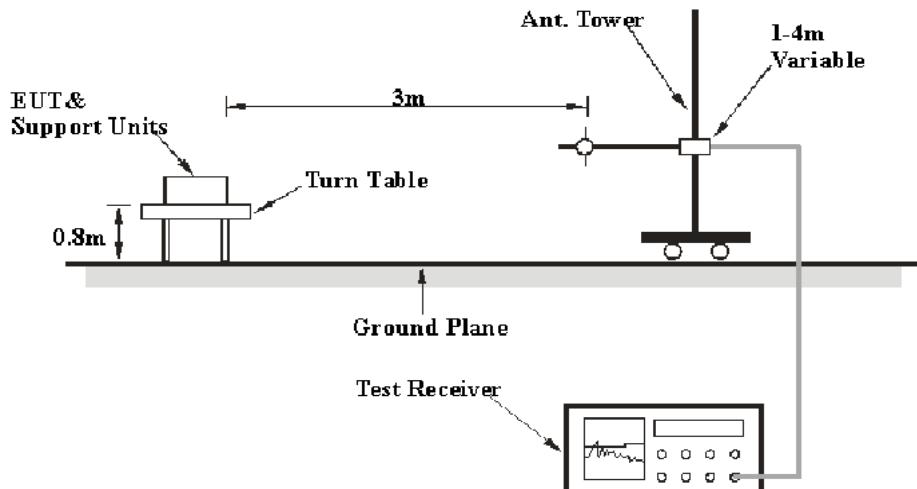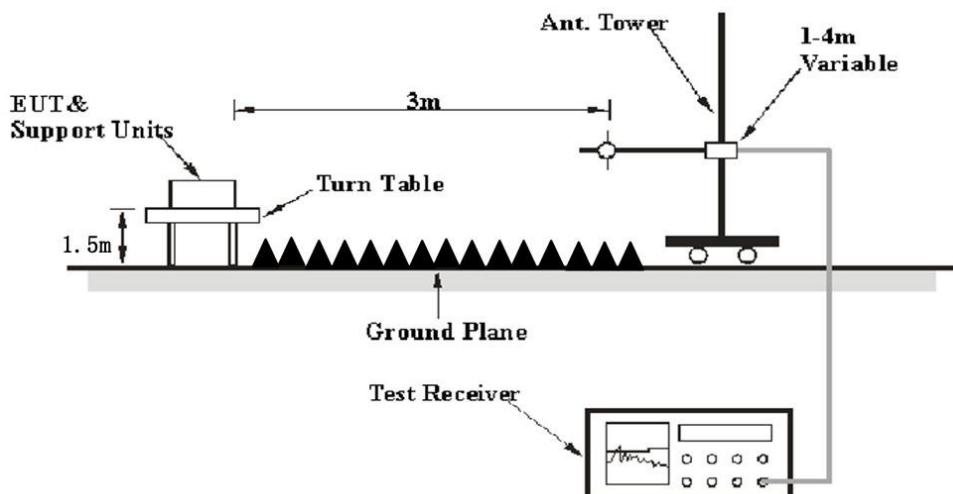**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions


Temperature:	28~28.1 °C
Relative Humidity:	54~56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Nick Fang on 2022-04-28 for below 1GHz, Amy Cao and Leo from 2022-04-21 to 2022-05-12 for above 1GHz.*

*EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case of Z-axes orientation was recorded)*

**30MHz-1GHz:** (worst case is 8DPSK Mode, Middle channel)


**Horizontal:**

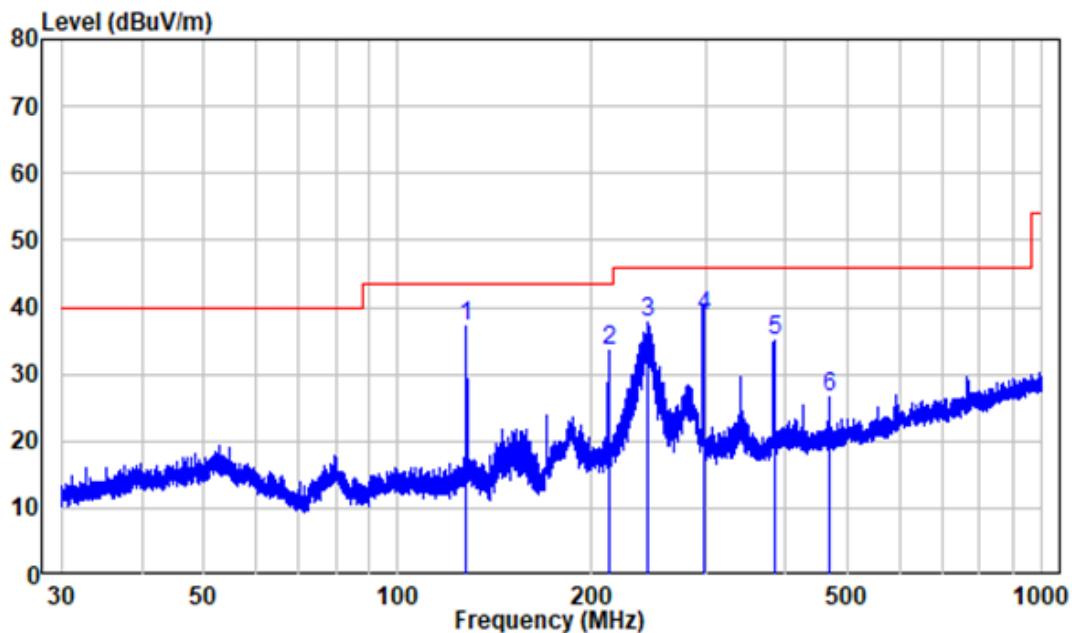

Site : chamber

- Condition: 3m HORIZONTAL
- Job No. : SZNS220330-11570E-RF
- Test Mode: BT

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	127.833	-14.67	51.65	36.98	43.50	-6.52 Peak
2	213.109	-11.75	45.17	33.42	43.50	-10.08 Peak
3	244.875	-10.59	48.39	37.80	46.00	-8.20 Peak
4	298.137	-9.25	47.84	38.59	46.00	-7.41 QP
5	383.595	-7.09	42.01	34.92	46.00	-11.08 Peak
6	467.030	-5.51	32.08	26.57	46.00	-19.43 Peak

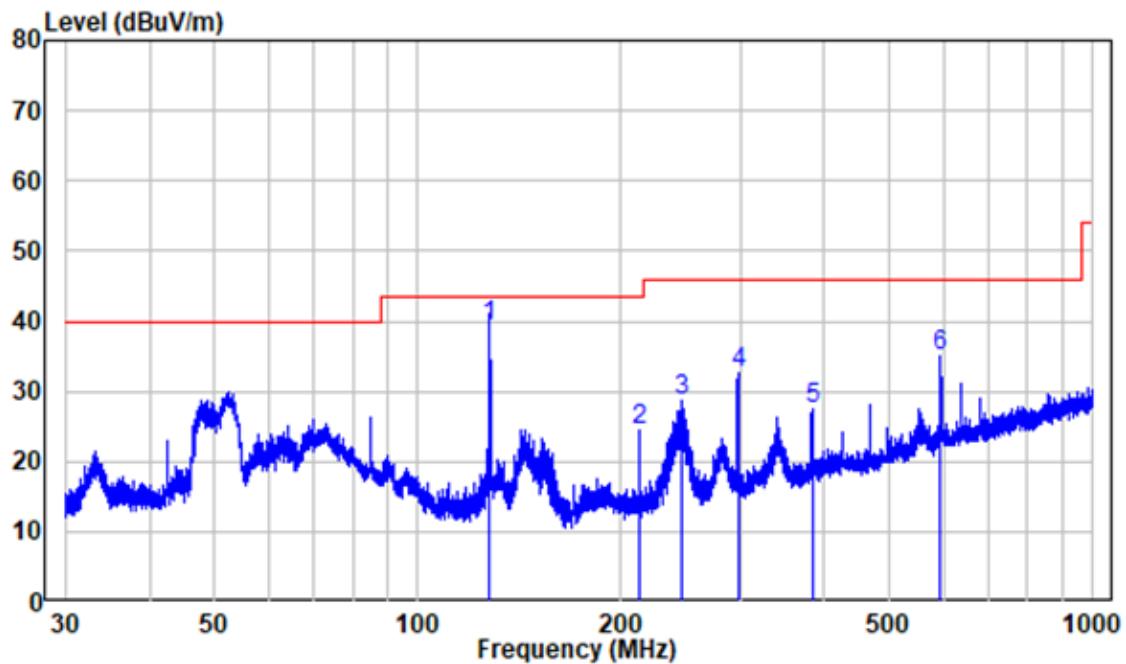**Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS220330-11570E-RF

Test Mode: BT

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	127.833	-14.67	53.78	39.11	43.50	-4.39	QP
2	213.015	-11.75	36.33	24.58	43.50	-18.92	Peak
3	245.090	-10.57	39.11	28.54	46.00	-17.46	Peak
4	298.268	-9.25	41.74	32.49	46.00	-13.51	Peak
5	383.764	-7.08	34.48	27.40	46.00	-18.60	Peak
6	594.090	-2.70	37.81	35.11	46.00	-10.89	Peak

**Above 1GHz:** (worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	68.64	PK	209	2	H	-7.24	61.4	74	-12.6
2310	53.78	AV	209	2	H	-7.24	46.54	54	-7.46
2390	69.91	PK	84	1.1	H	-7.22	62.69	74	-11.31
2390	54.34	AV	84	1.1	H	-7.22	47.12	54	-6.88
2310	68.18	PK	59	2	H	-7.24	60.94	74	-13.06
2310	53.66	AV	59	2	H	-7.24	46.42	54	-7.58
2390	69.93	PK	312	1.4	H	-7.22	62.71	74	-11.29
2390	54.11	AV	312	1.4	H	-7.22	46.89	54	-7.11
4804	54.47	PK	103	2	H	-3.51	50.96	74	-23.04
4804	54.77	PK	280	2.3	V	-3.51	51.26	74	-22.74
Middle Channel(2441MHz)									
4882	55.07	PK	312	2.4	H	-3.37	51.7	74	-22.3
4882	55.12	PK	129	1	V	-3.37	51.75	74	-22.25
High Channel(2480 MHz)									
2483.5	69.97	PK	265	2.1	H	-7.2	62.77	74	-11.23
2483.5	54.78	AV	265	2.1	H	-7.2	47.58	54	-6.42
2500	69.16	PK	169	2.2	H	-7.18	61.98	74	-12.02
2500	54.95	AV	169	2.2	H	-7.18	47.77	54	-6.23
2483.5	69.85	PK	23	2.5	V	-7.2	62.65	74	-11.35
2483.5	54.75	AV	23	2.5	V	-7.2	47.55	54	-6.45
2500	69.04	PK	251	2.2	V	-7.18	61.86	74	-12.14
2500	55.09	AV	251	2.2	V	-7.18	47.91	54	-6.09
4960	54.37	PK	236	1.2	H	-3.01	51.36	74	-22.64
4960	54.72	PK	294	2.2	V	-3.01	51.71	74	-22.29

**Note:**



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.

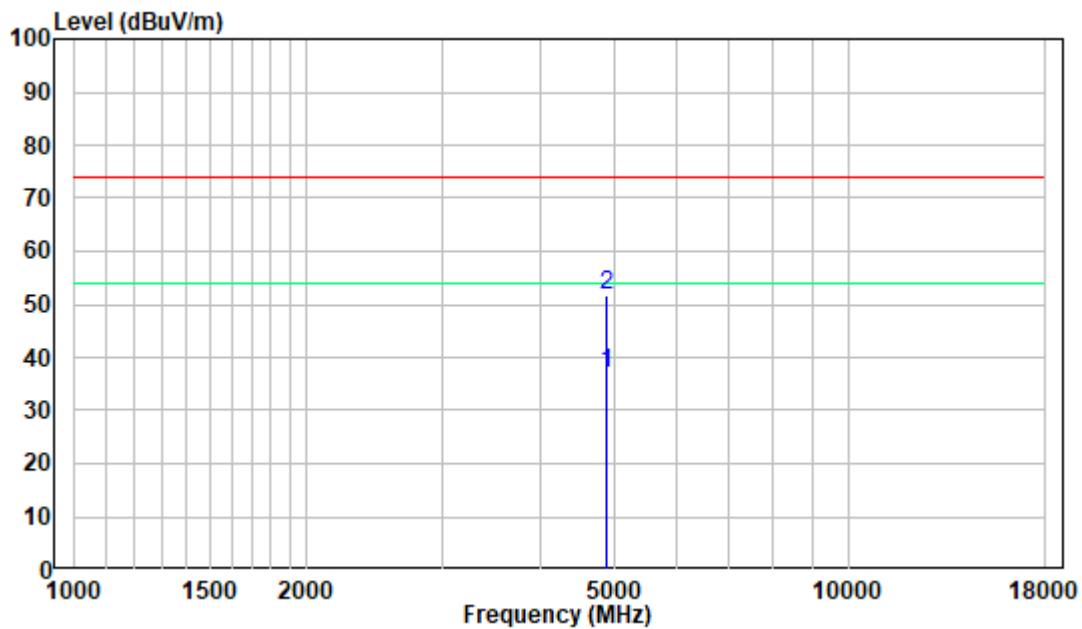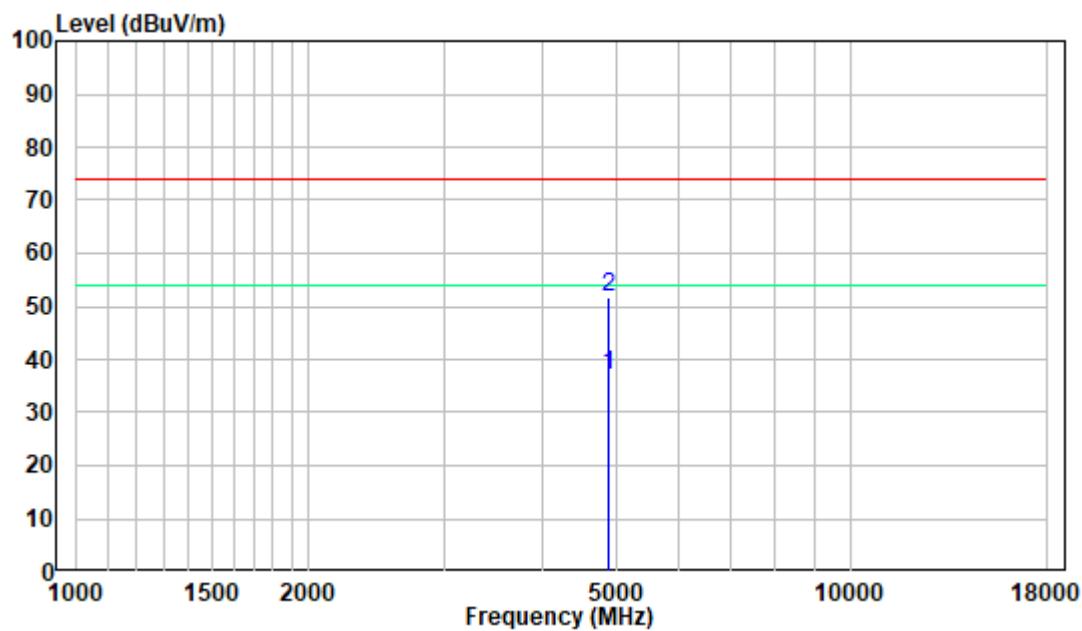**1-18GHz****Pre-scan for Middle channel****Horizontal:****Vertical:**

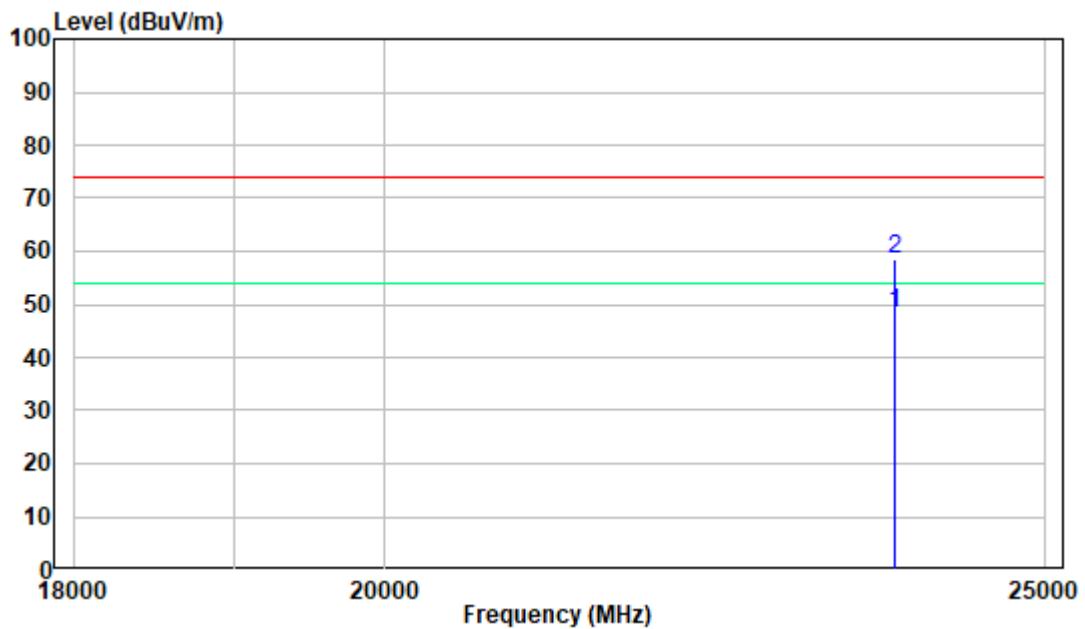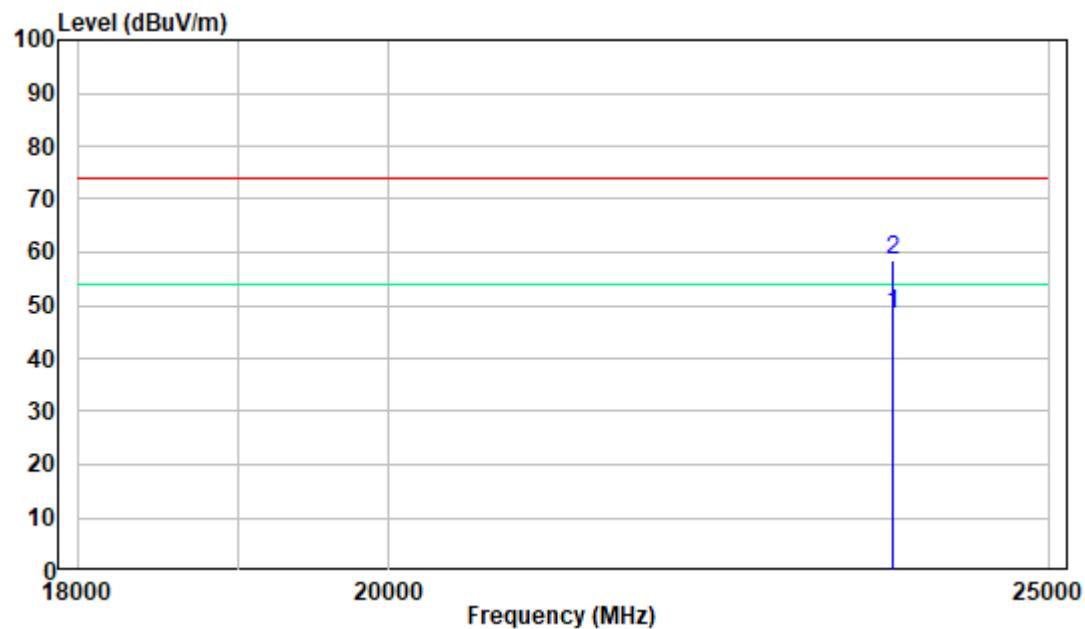**18-25GHz****Pre-scan for Middle channel****Horizontal:****Vertical:**


## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

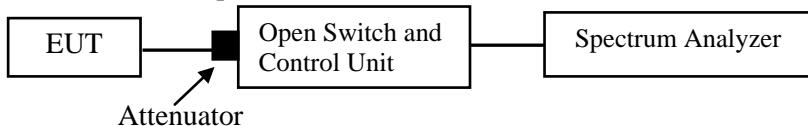

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-19.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

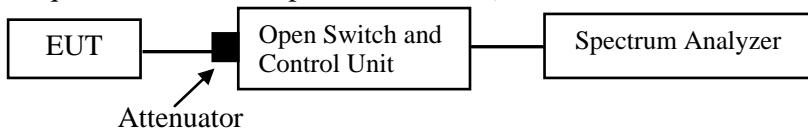

**Test Data****Environmental Conditions**

<b>Temperature:</b>	20 °C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-19.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

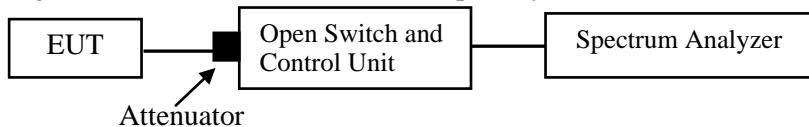

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-19.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

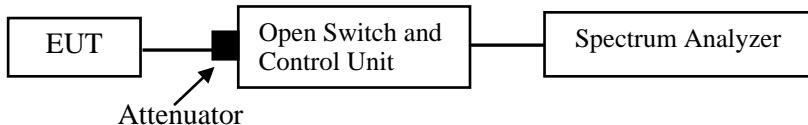**Test Data****Environmental Conditions**

<b>Temperature:</b>	20 °C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	100.9 kPa

The testing was performed by Matt Liang on 2024-12-19.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

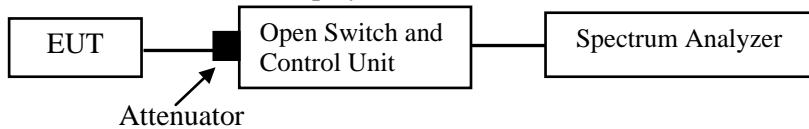

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-19.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

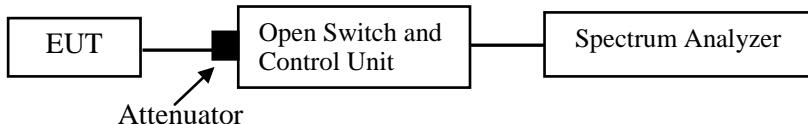

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-19.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


## APPENDIX


### Appendix A: 20dB Emission Bandwidth


#### Test Result


Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.55	2402.50	---	---
		2441	0.94	2440.55	2441.49	---	---
		2480	0.94	2479.55	2480.50	---	---
2DH5	Ant1	2402	1.25	2401.39	2402.64	---	---
		2441	1.26	2440.39	2441.65	---	---
		2480	1.27	2479.39	2480.66	---	---
3DH5	Ant1	2402	1.20	2401.42	2402.62	---	---
		2441	1.20	2440.42	2441.62	---	---
		2480	1.21	2479.42	2480.63	---	---


## Test Graphs

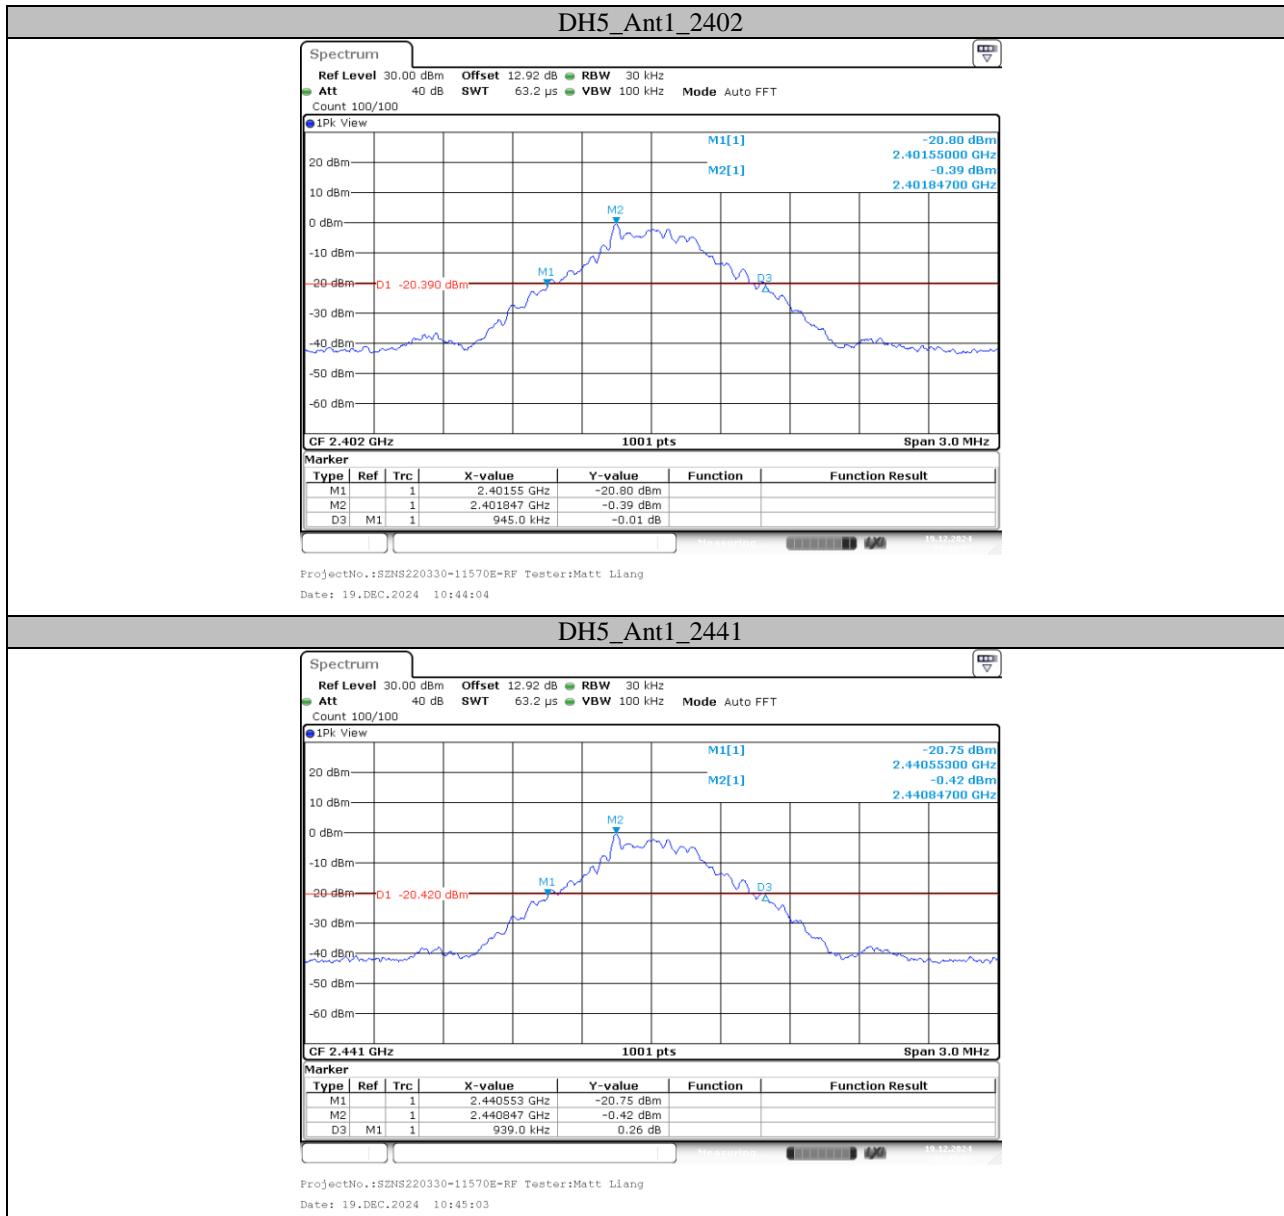

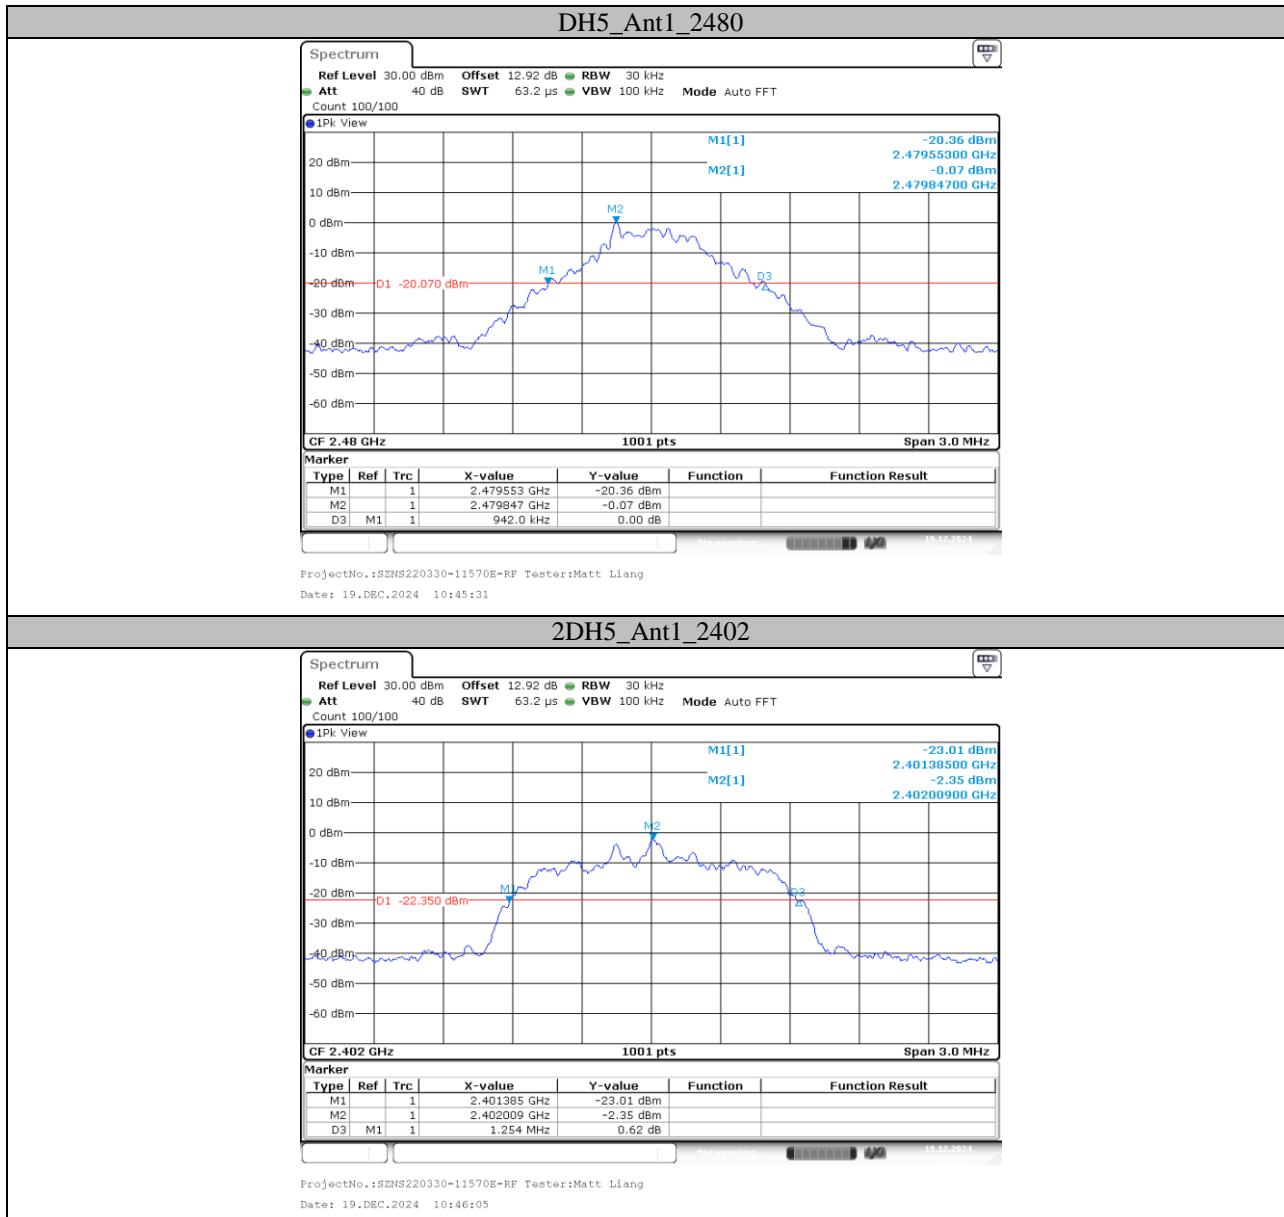

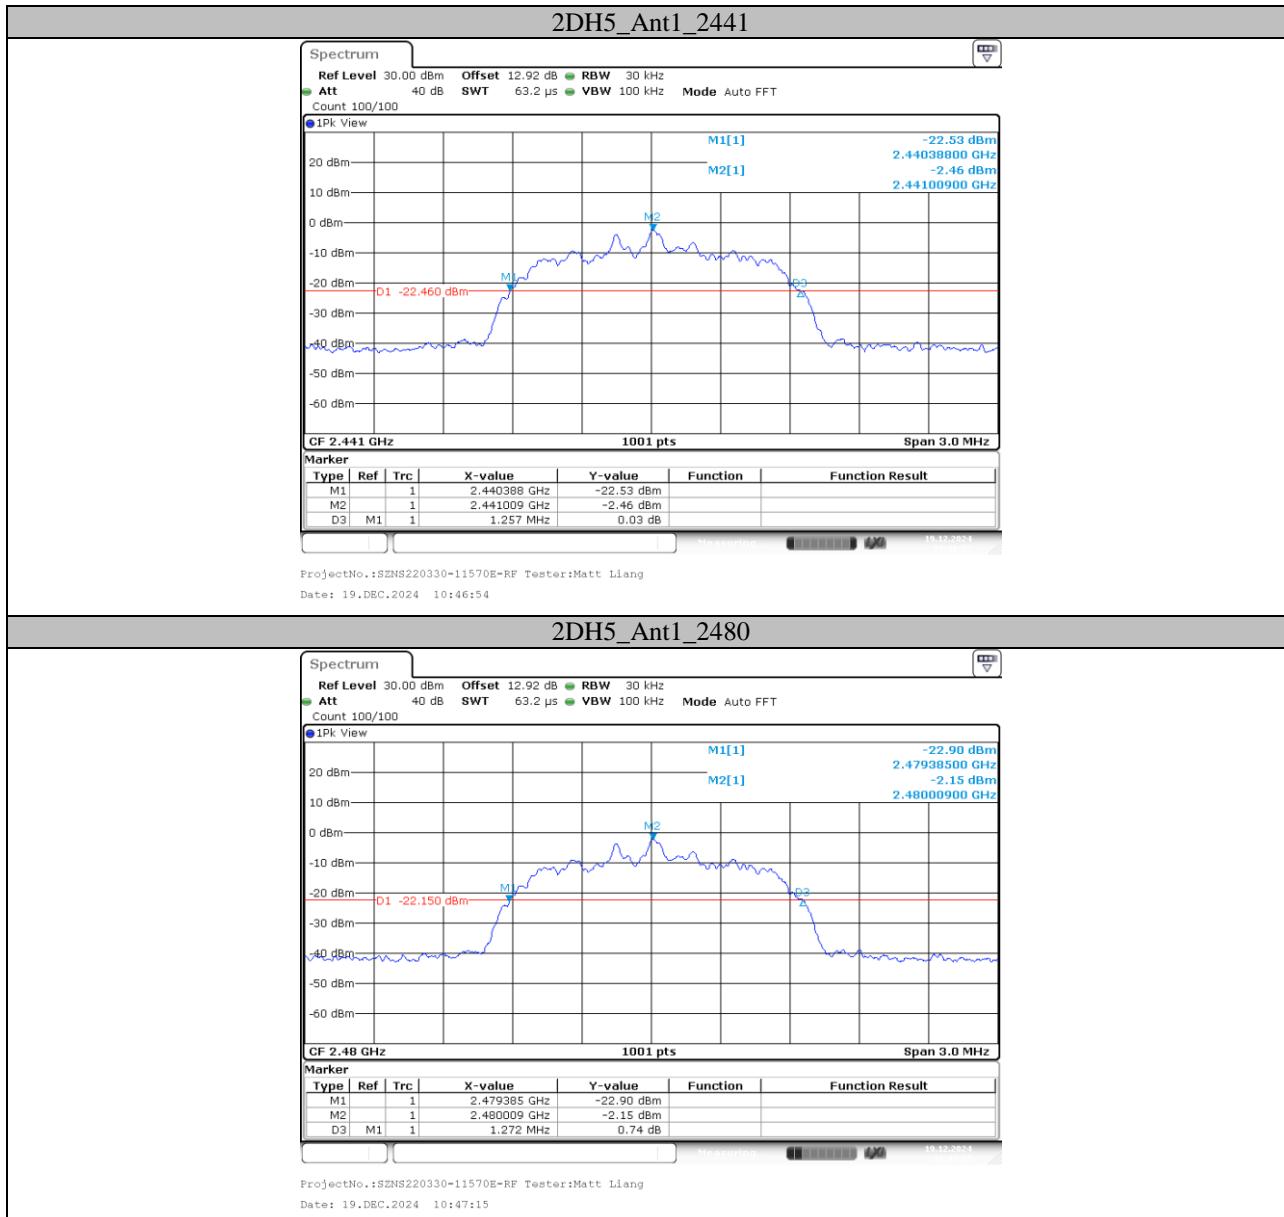

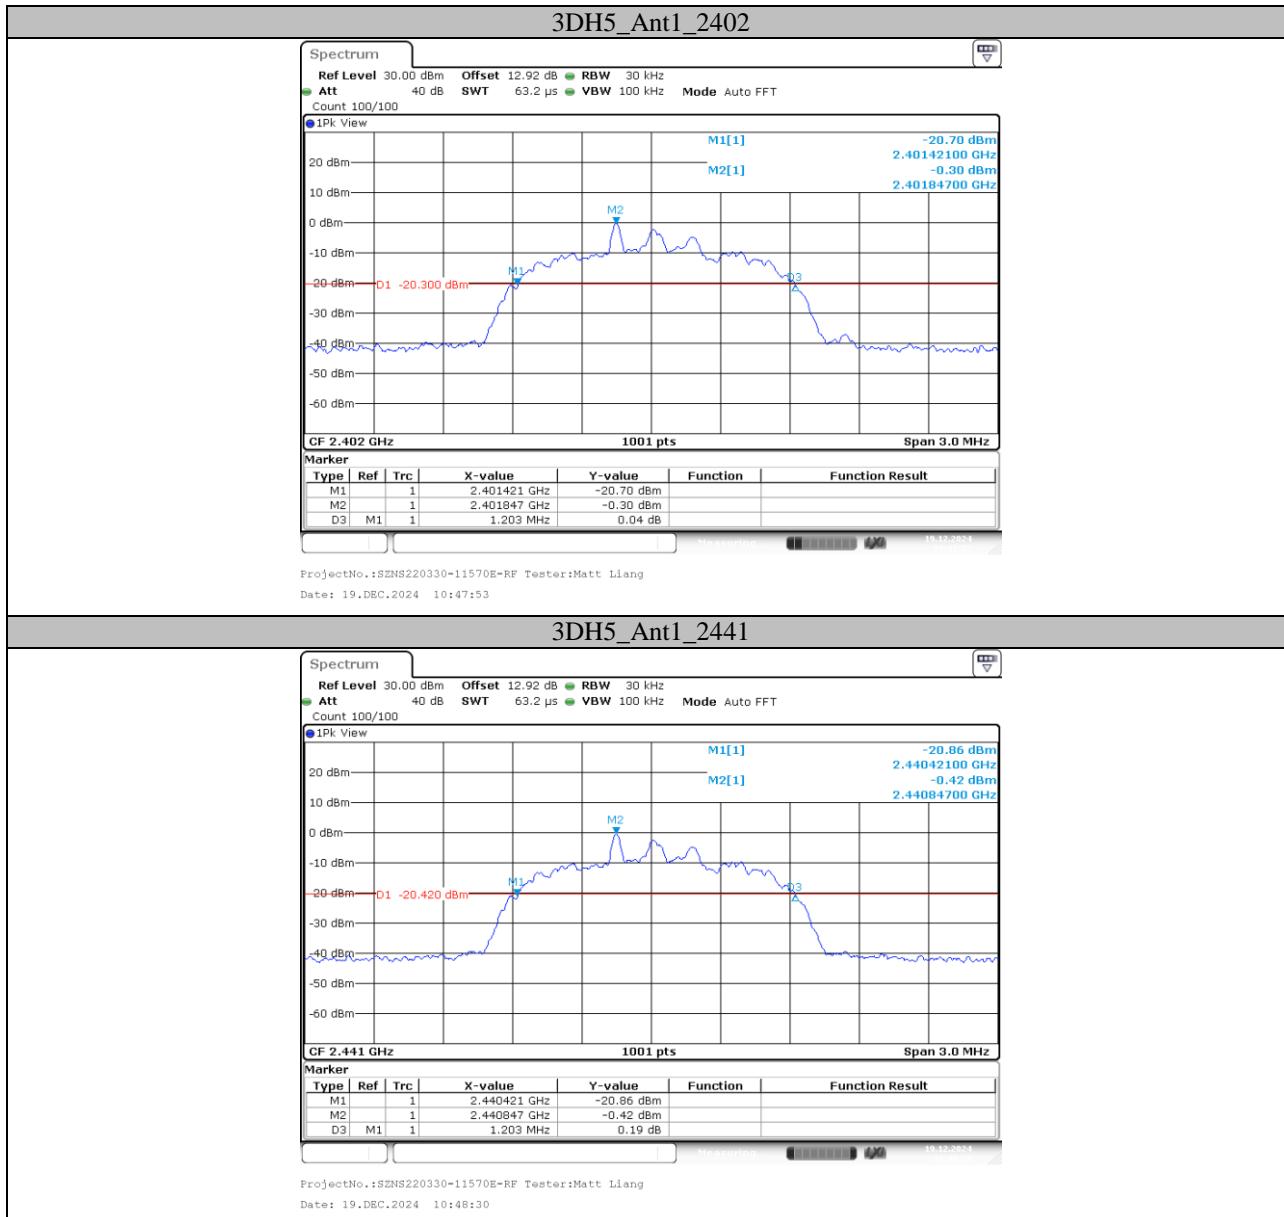


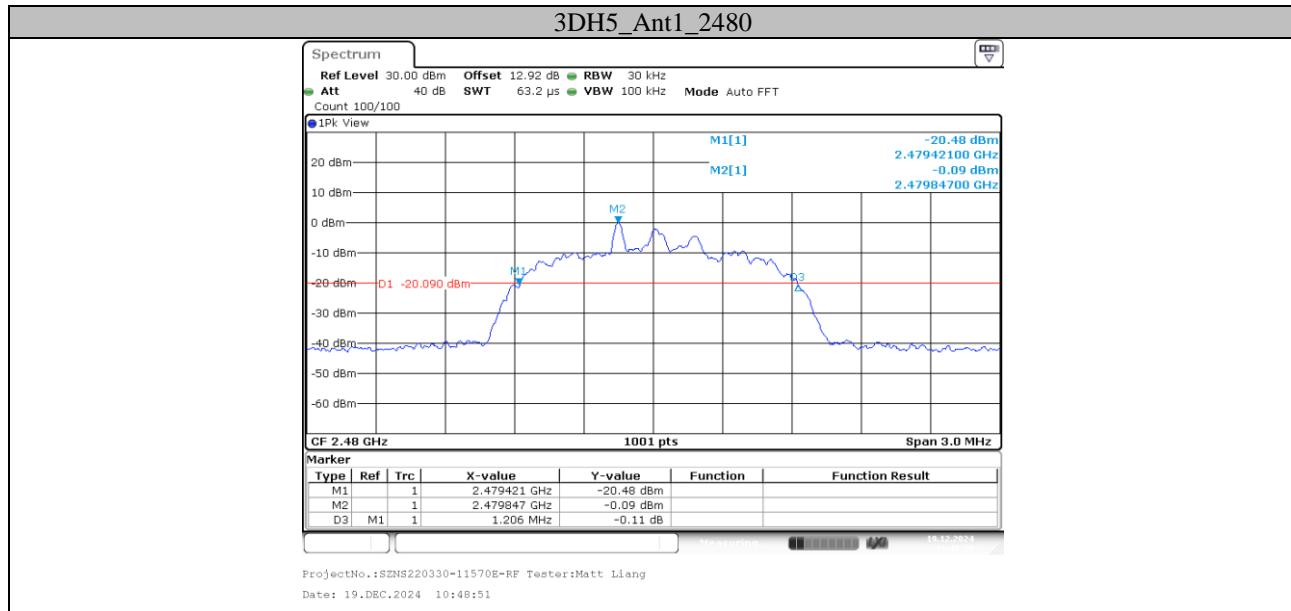



**Appendix B: Occupied Channel Bandwidth****Test Result**


Test Mode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.881	2401.5744	2402.4555	---	---
		2441	0.878	2440.5744	2441.4525	---	---
		2480	0.878	2479.5744	2480.4525	---	---
2DH5	Ant1	2402	1.163	2401.4276	2402.5904	---	---
		2441	1.163	2440.4306	2441.5934	---	---
		2480	1.163	2479.4306	2480.5934	---	---
3DH5	Ant1	2402	1.145	2401.4426	2402.5874	---	---
		2441	1.148	2440.4426	2441.5904	---	---
		2480	1.148	2479.4426	2480.5904	---	---


## Test Graphs

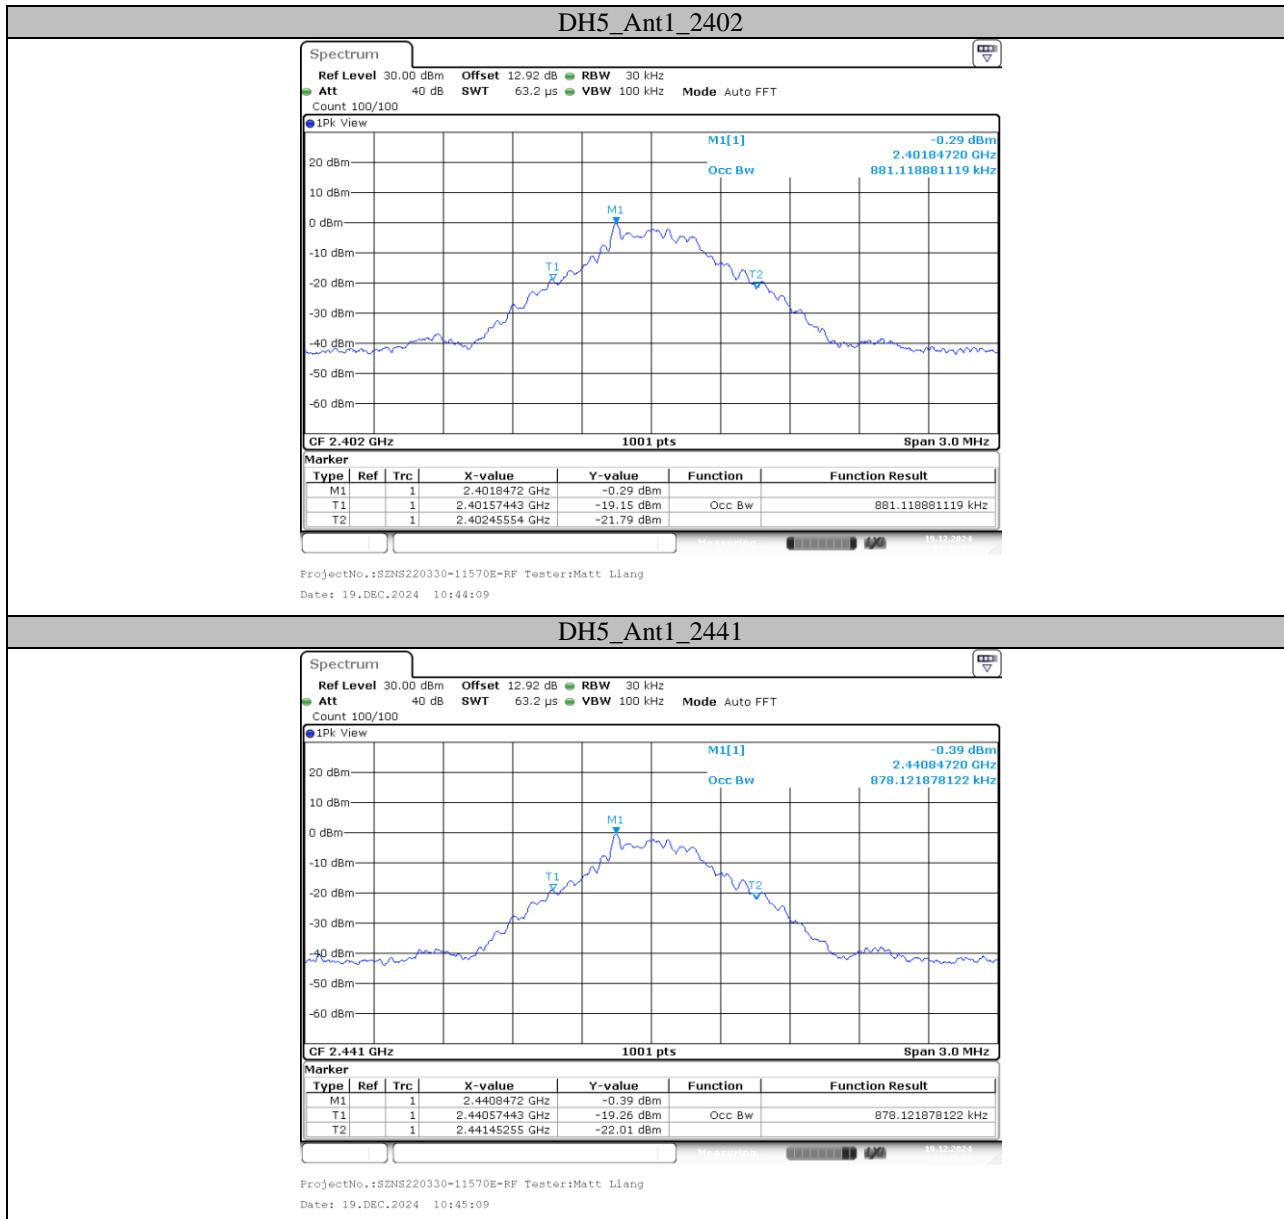

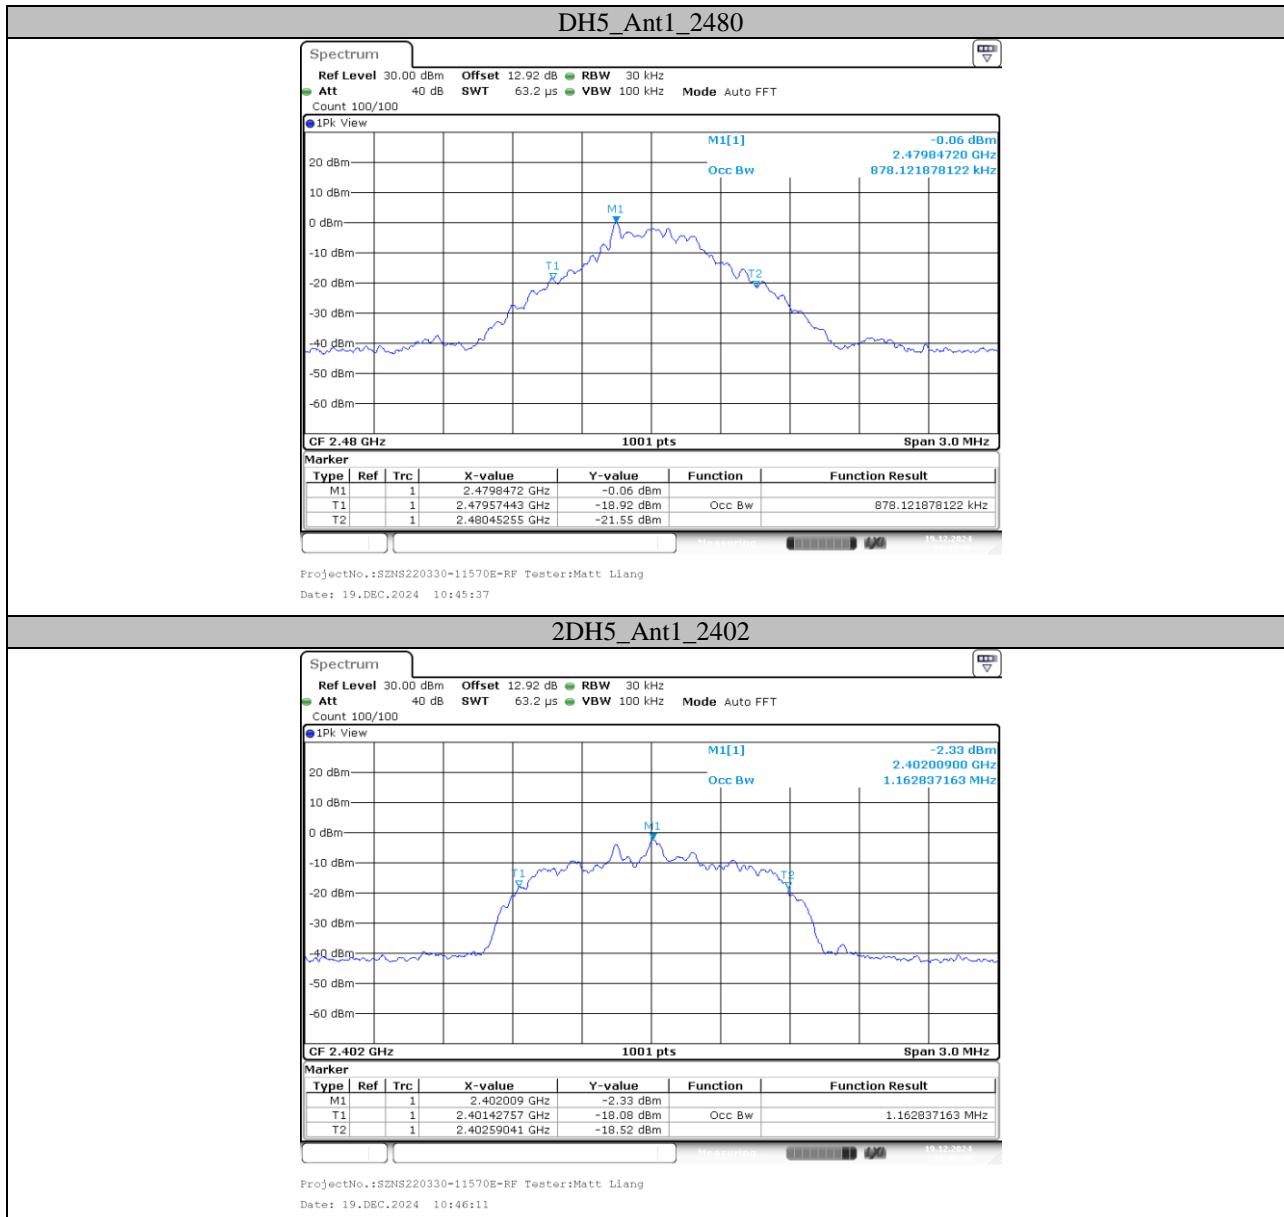

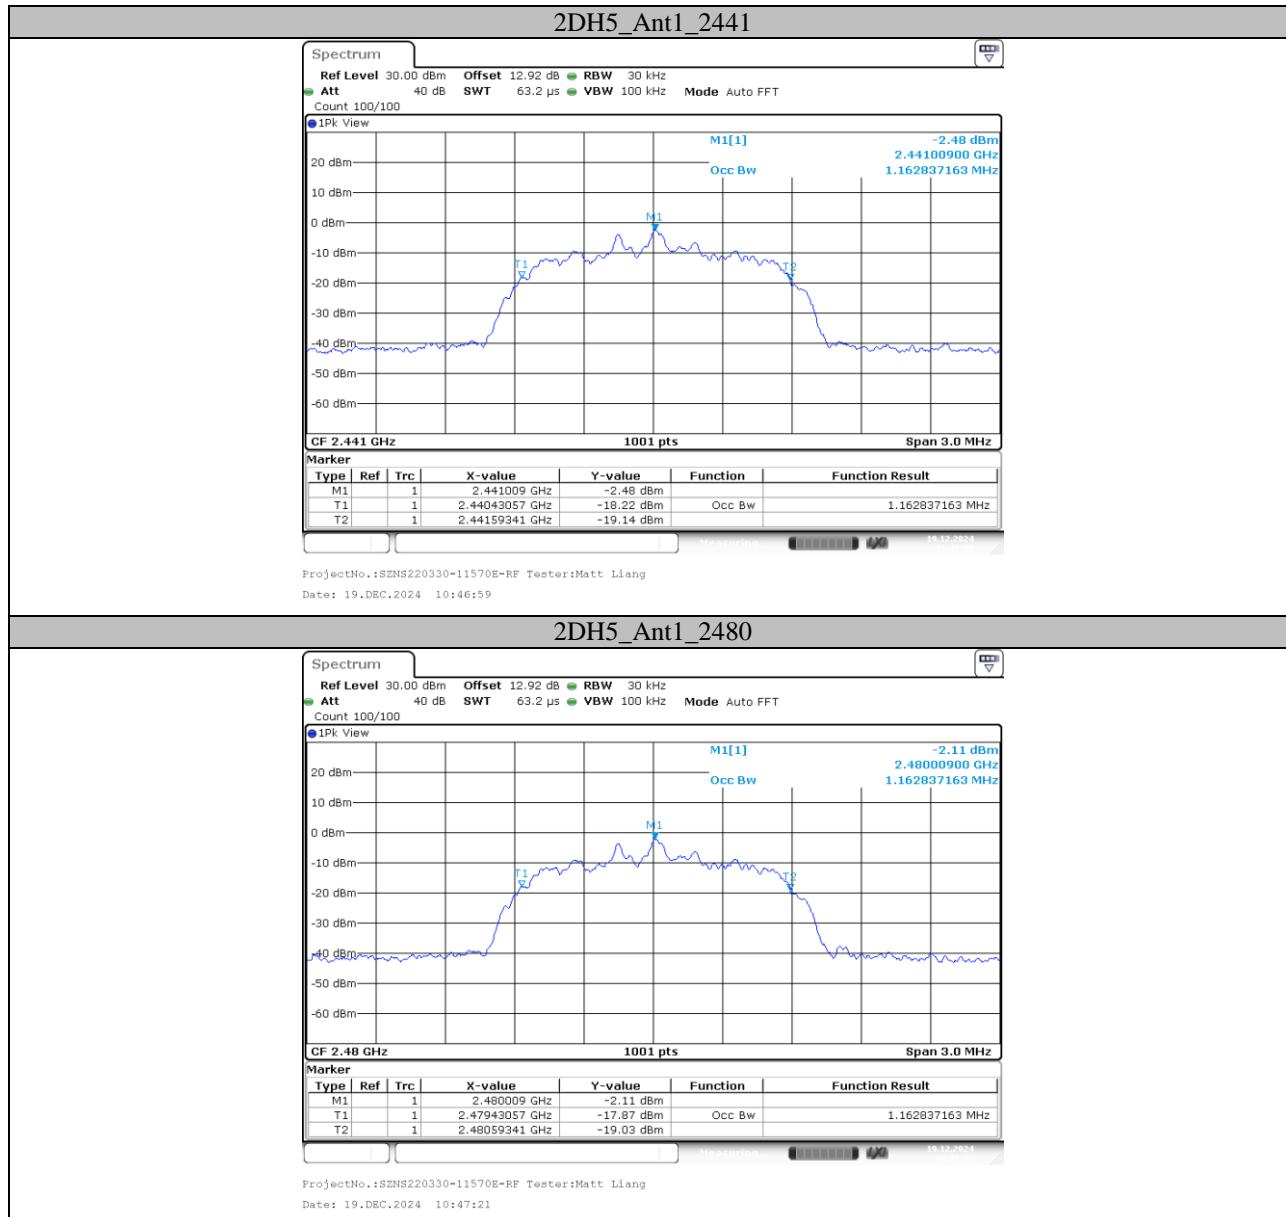

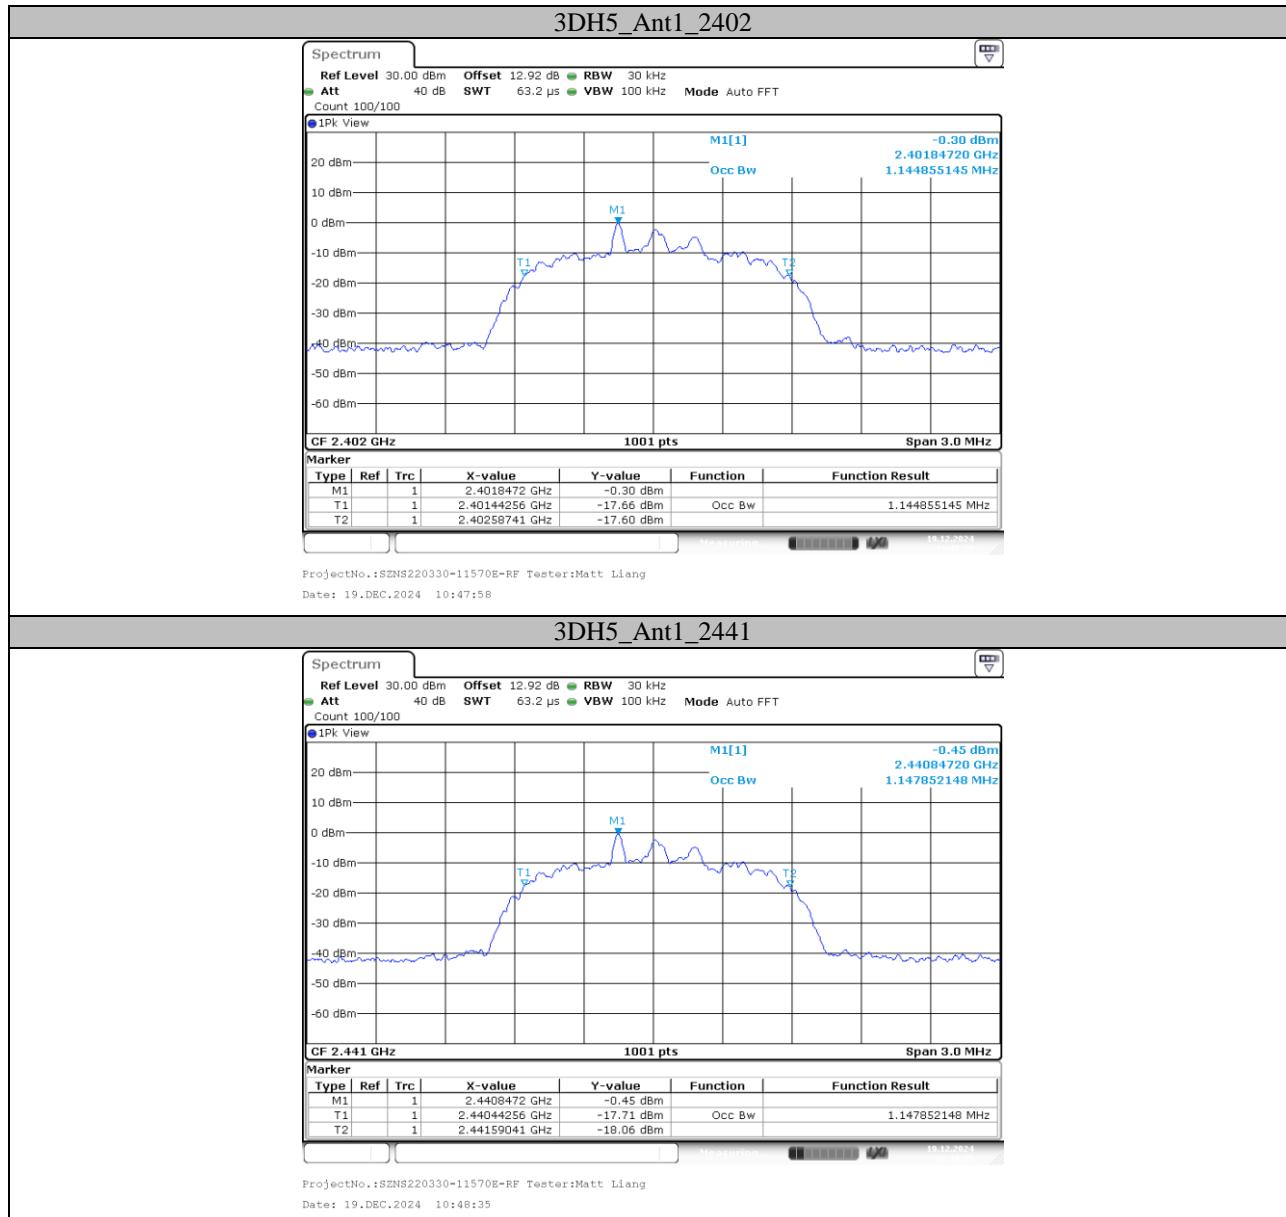


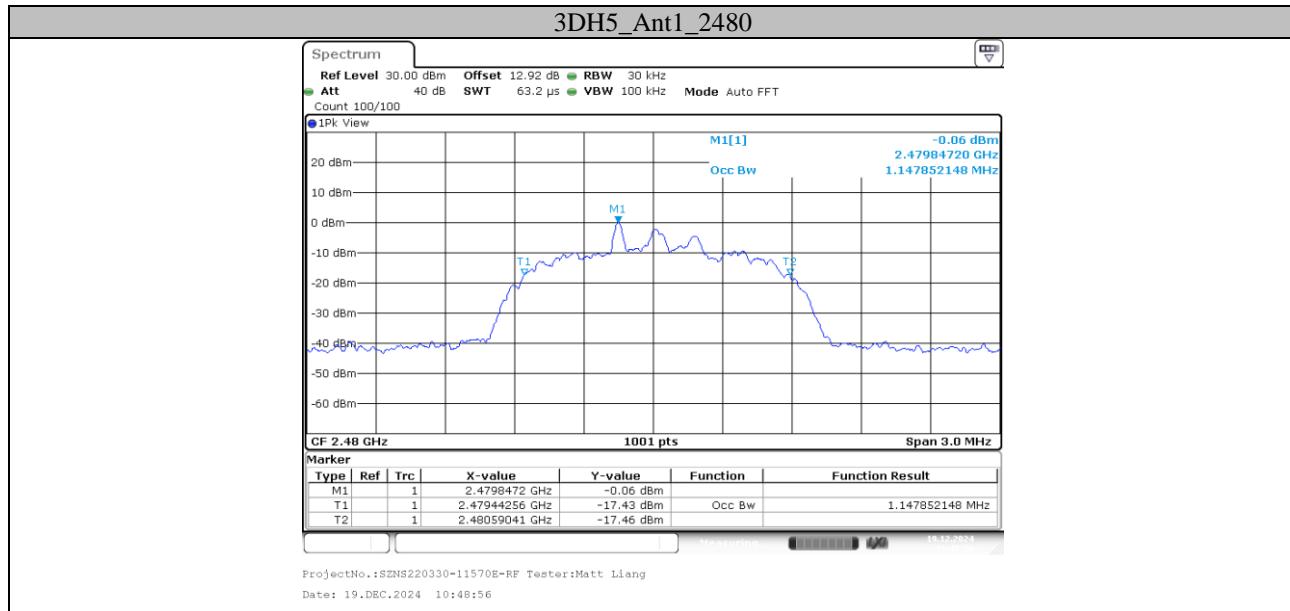



## Appendix C: Maximum Conducted Output Power


### Test Result Peak


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	0.81	≤20.97	PASS
		2441	0.72	≤20.97	PASS
		2480	1.25	≤20.97	PASS
2DH5	Ant1	2402	1.08	≤20.97	PASS
		2441	1.11	≤20.97	PASS
		2480	1.32	≤20.97	PASS
3DH5	Ant1	2402	1.35	≤20.97	PASS
		2441	1.5	≤20.97	PASS
		2480	1.66	≤20.97	PASS

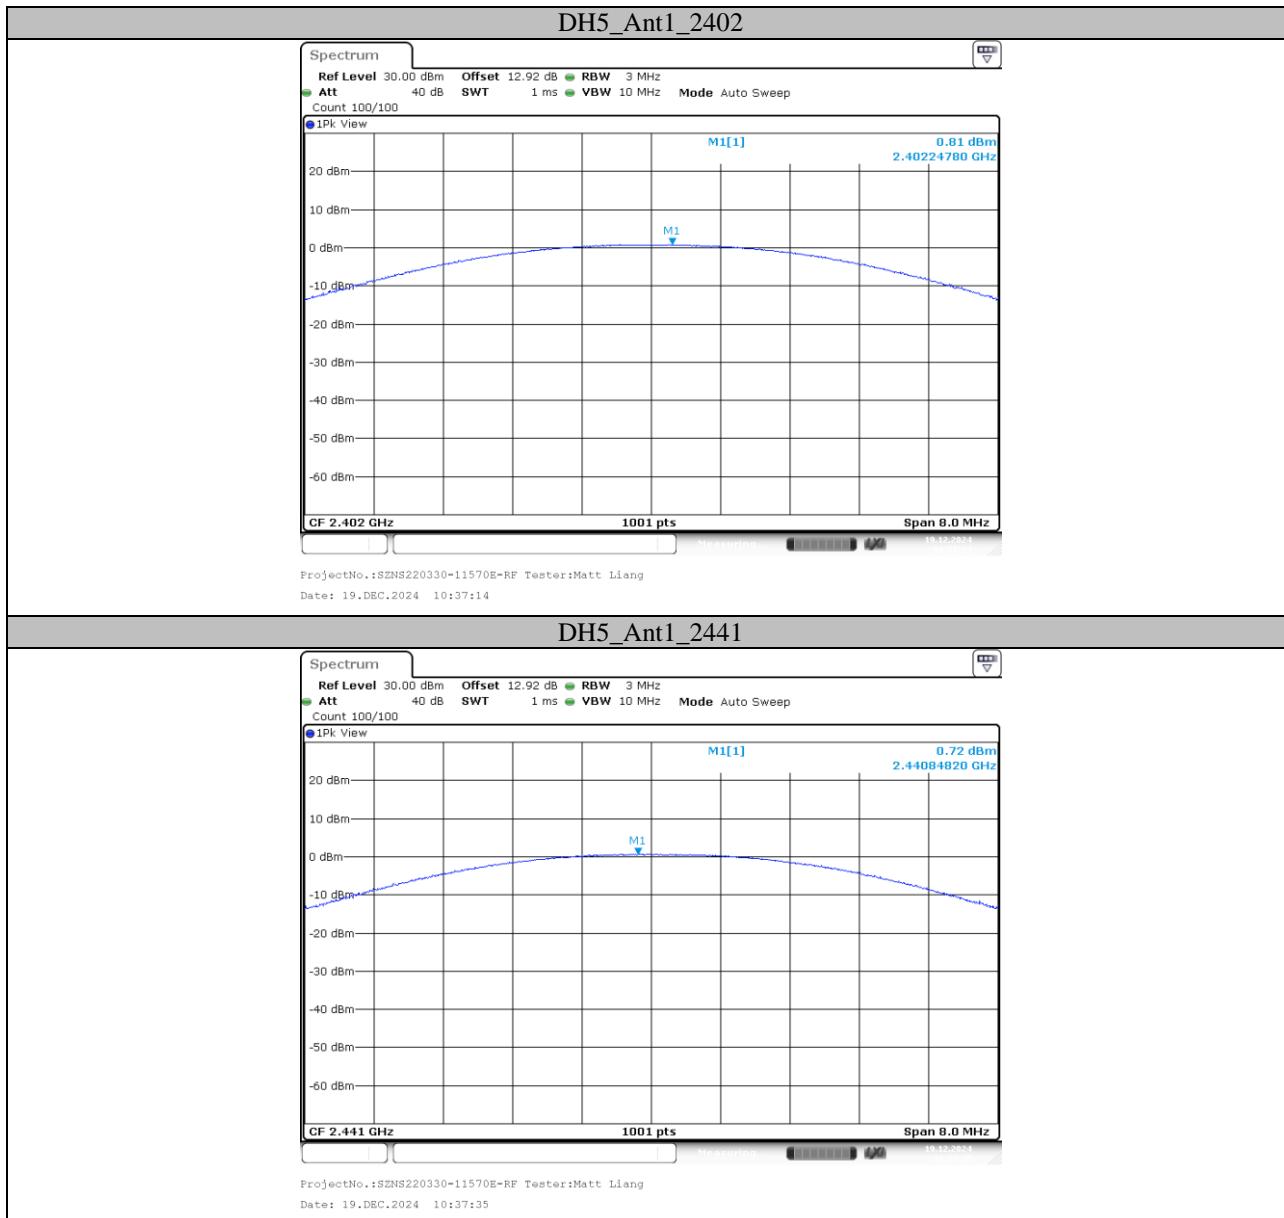**Test Graphs**

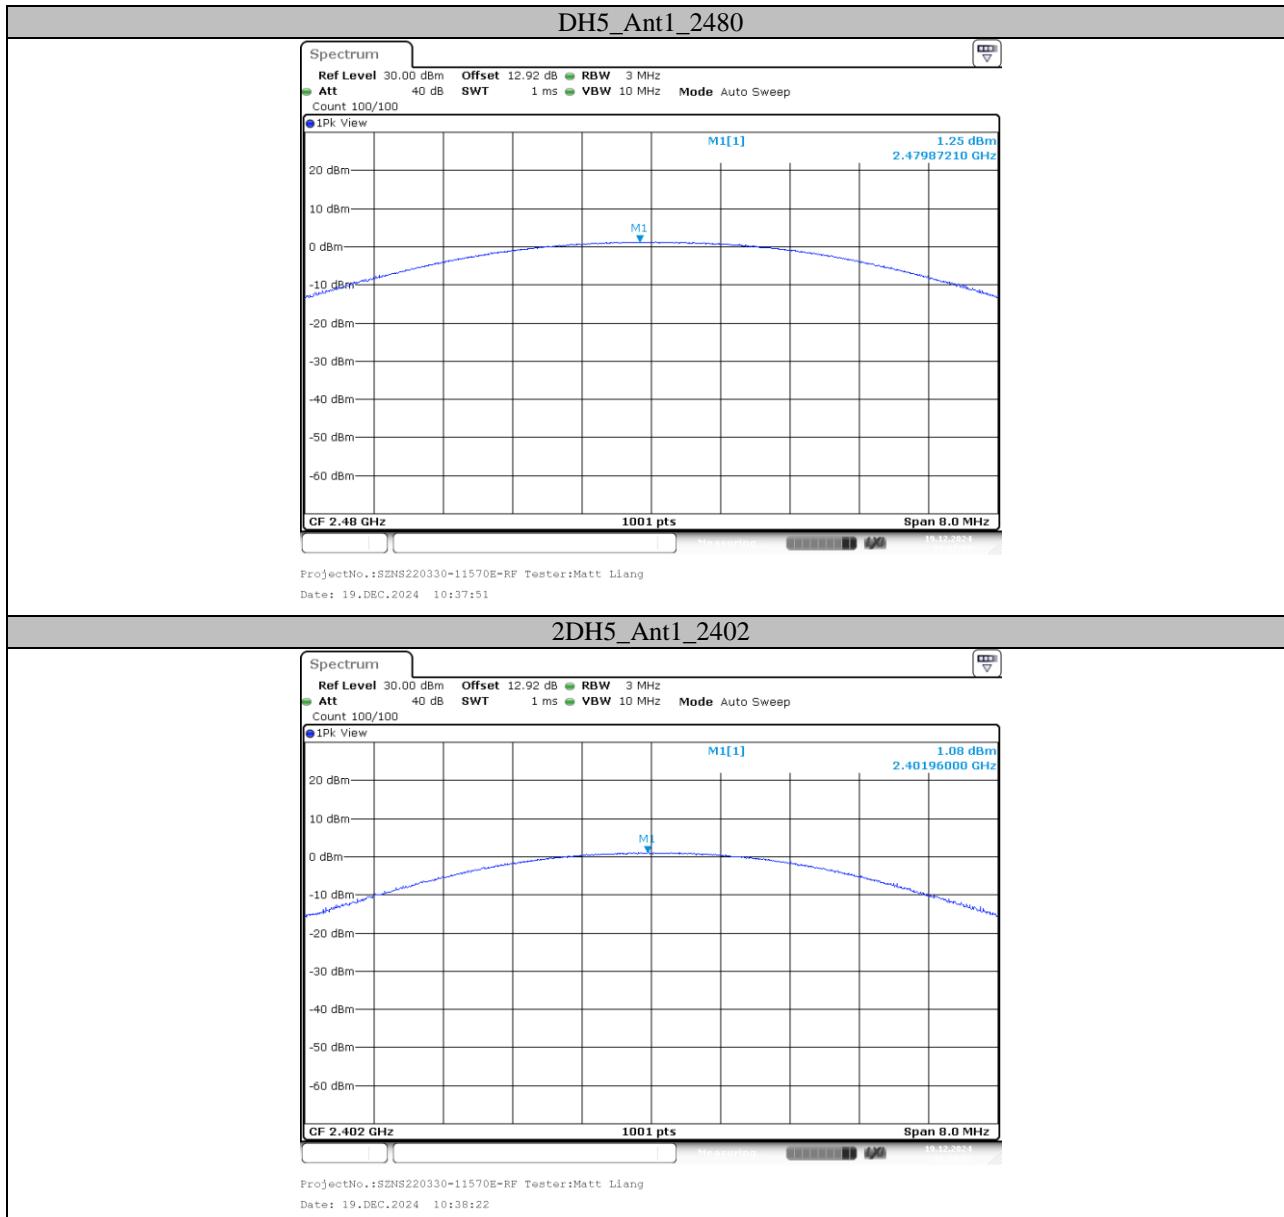

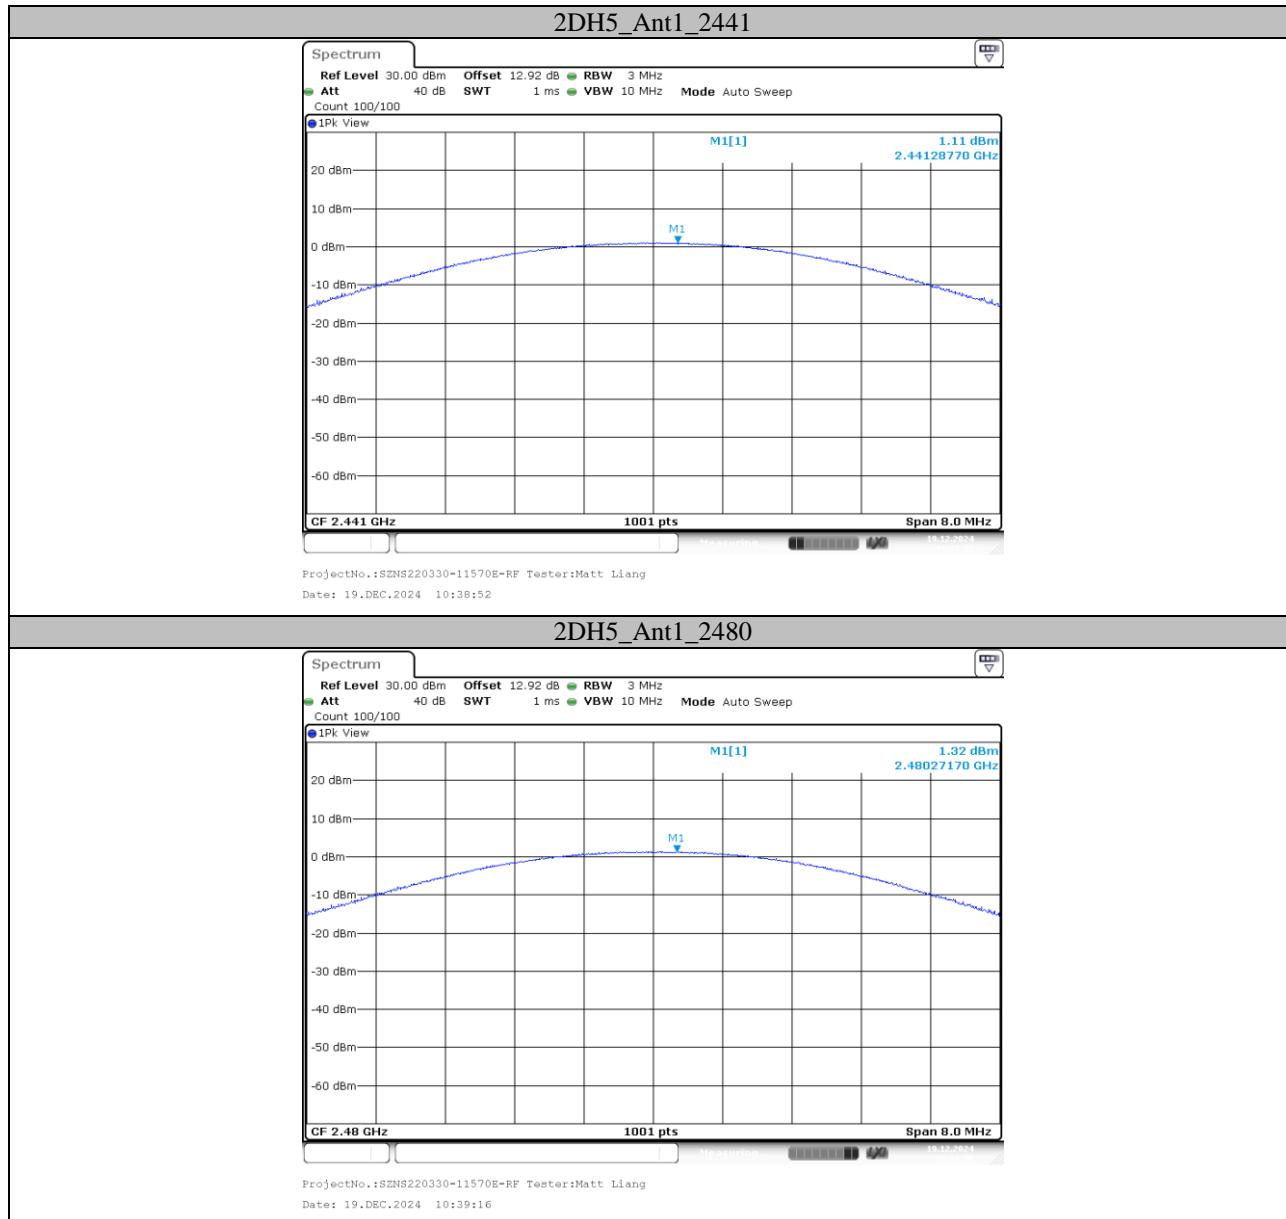

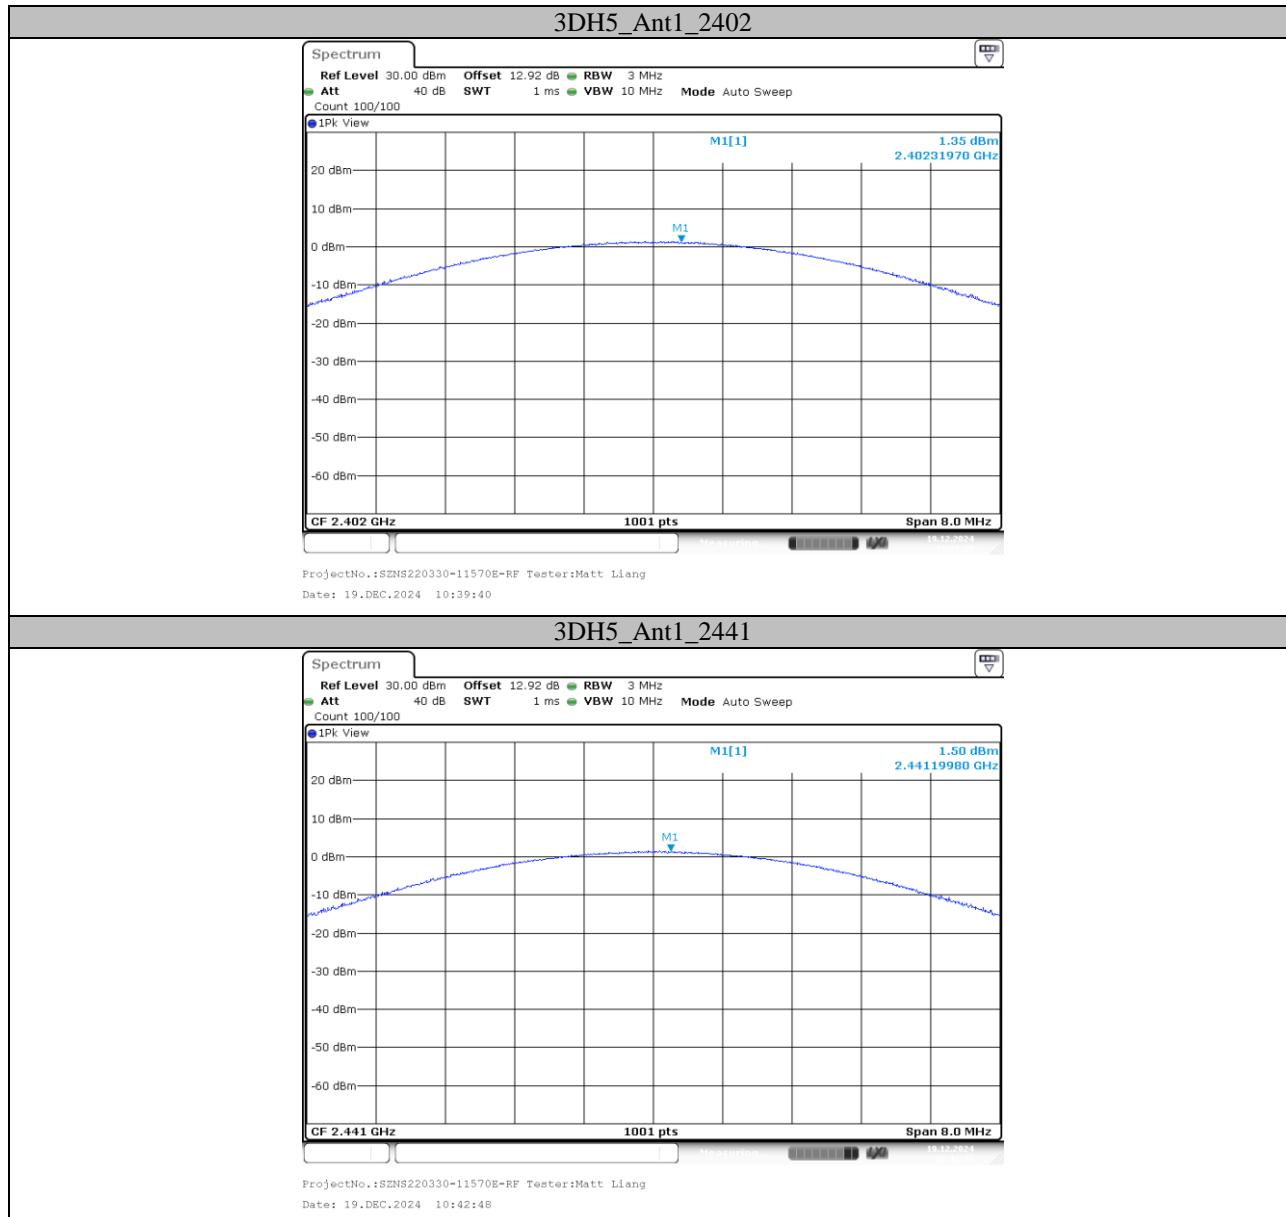


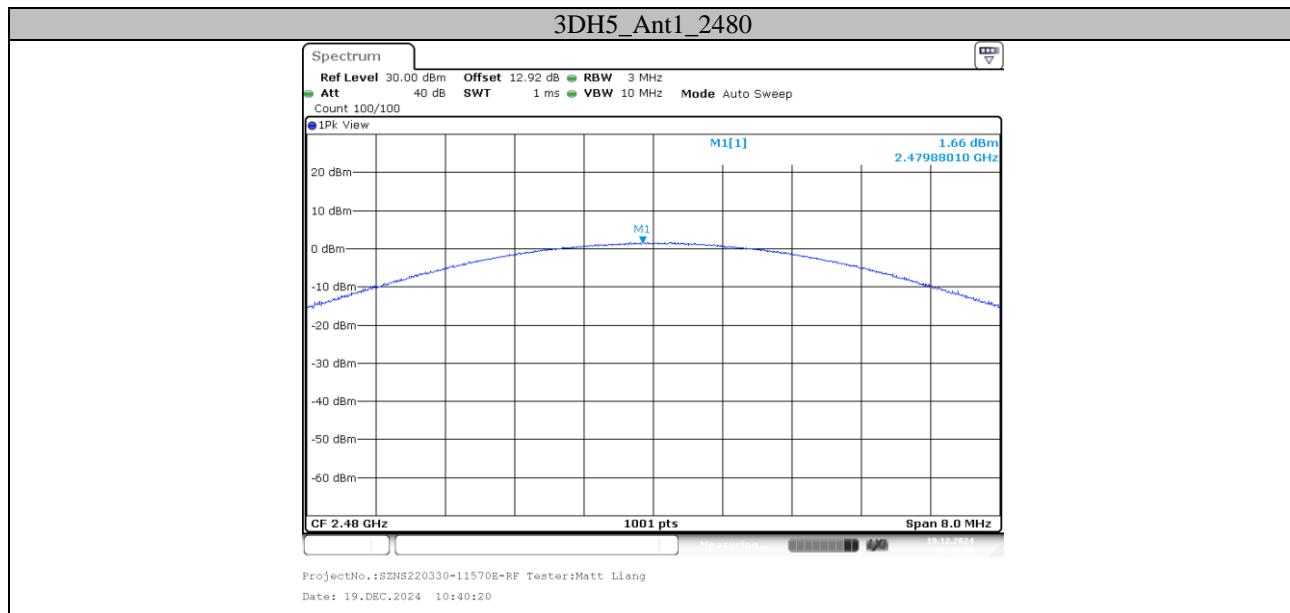


**Appendix D: Carrier frequency separation****Test Result**

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	$\geq 0.633$	PASS
2DH5	Ant1	Hop	1	$\geq 0.847$	PASS
3DH5	Ant1	Hop	1.003	$\geq 0.807$	PASS

## Test Graphs

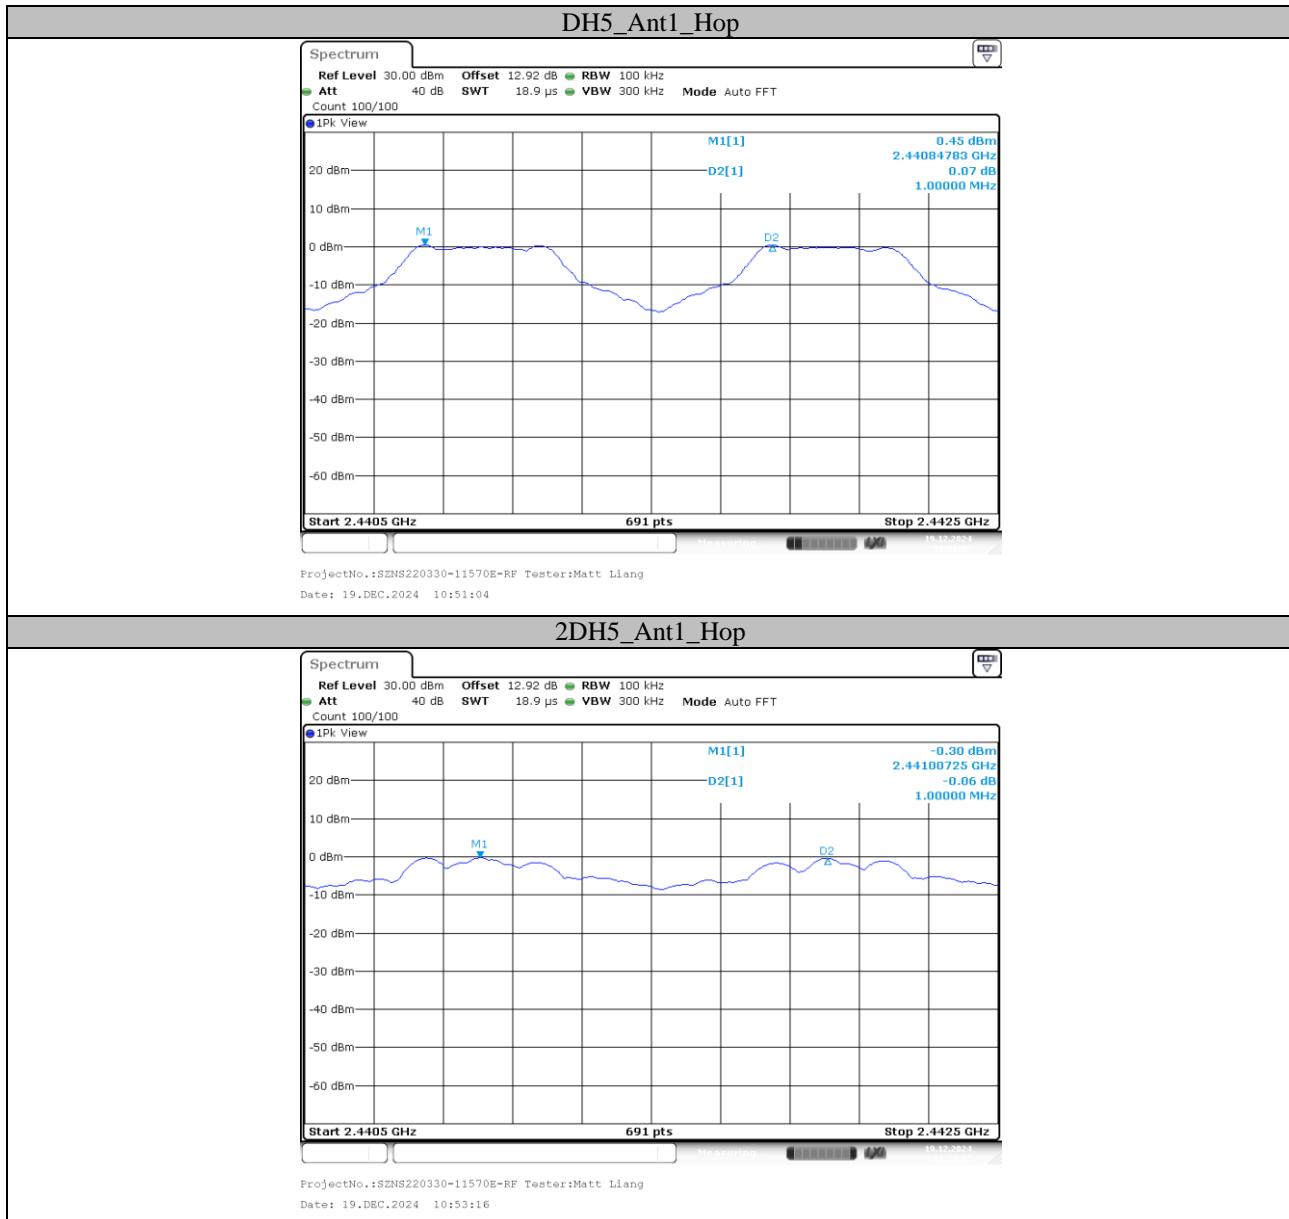

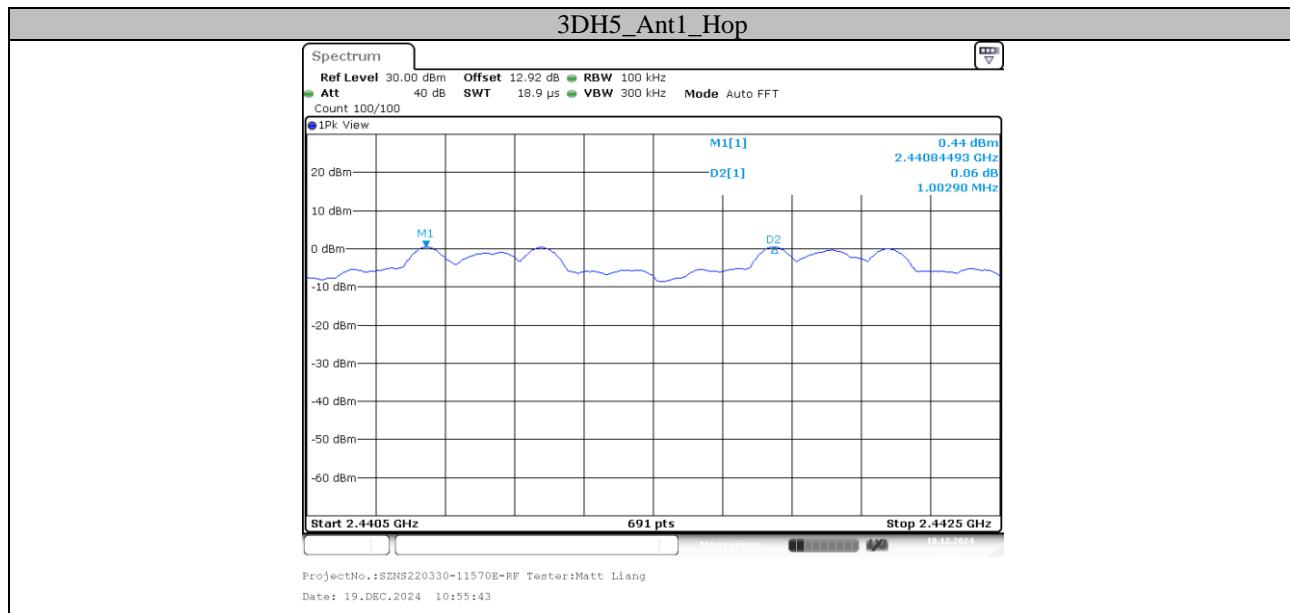



## Appendix E: Time of Occupancy


### Test Result


Test Mode	Antenna	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.401	330	0.132	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.649	170	0.28	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.890	110	0.318	$\leq 0.4$	PASS
2DH1	Ant1	Hop	0.395	330	0.13	$\leq 0.4$	PASS
2DH3	Ant1	Hop	1.639	130	0.213	$\leq 0.4$	PASS
2DH5	Ant1	Hop	2.879	100	0.288	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.391	320	0.125	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.634	130	0.212	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.878	130	0.374	$\leq 0.4$	PASS


## Test Graphs

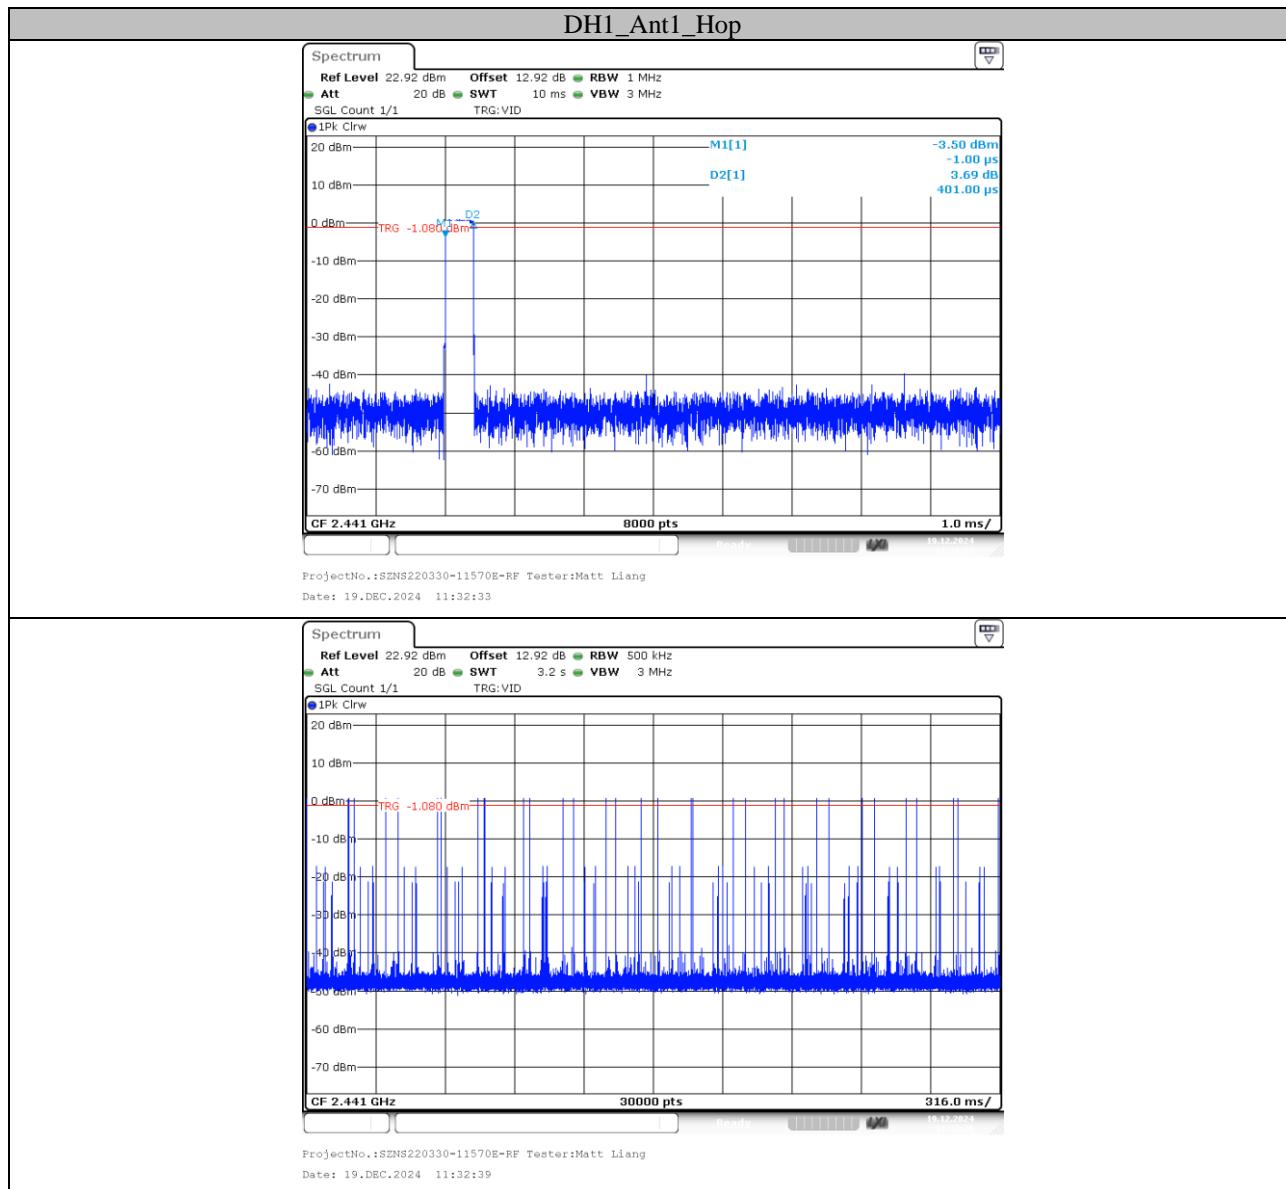


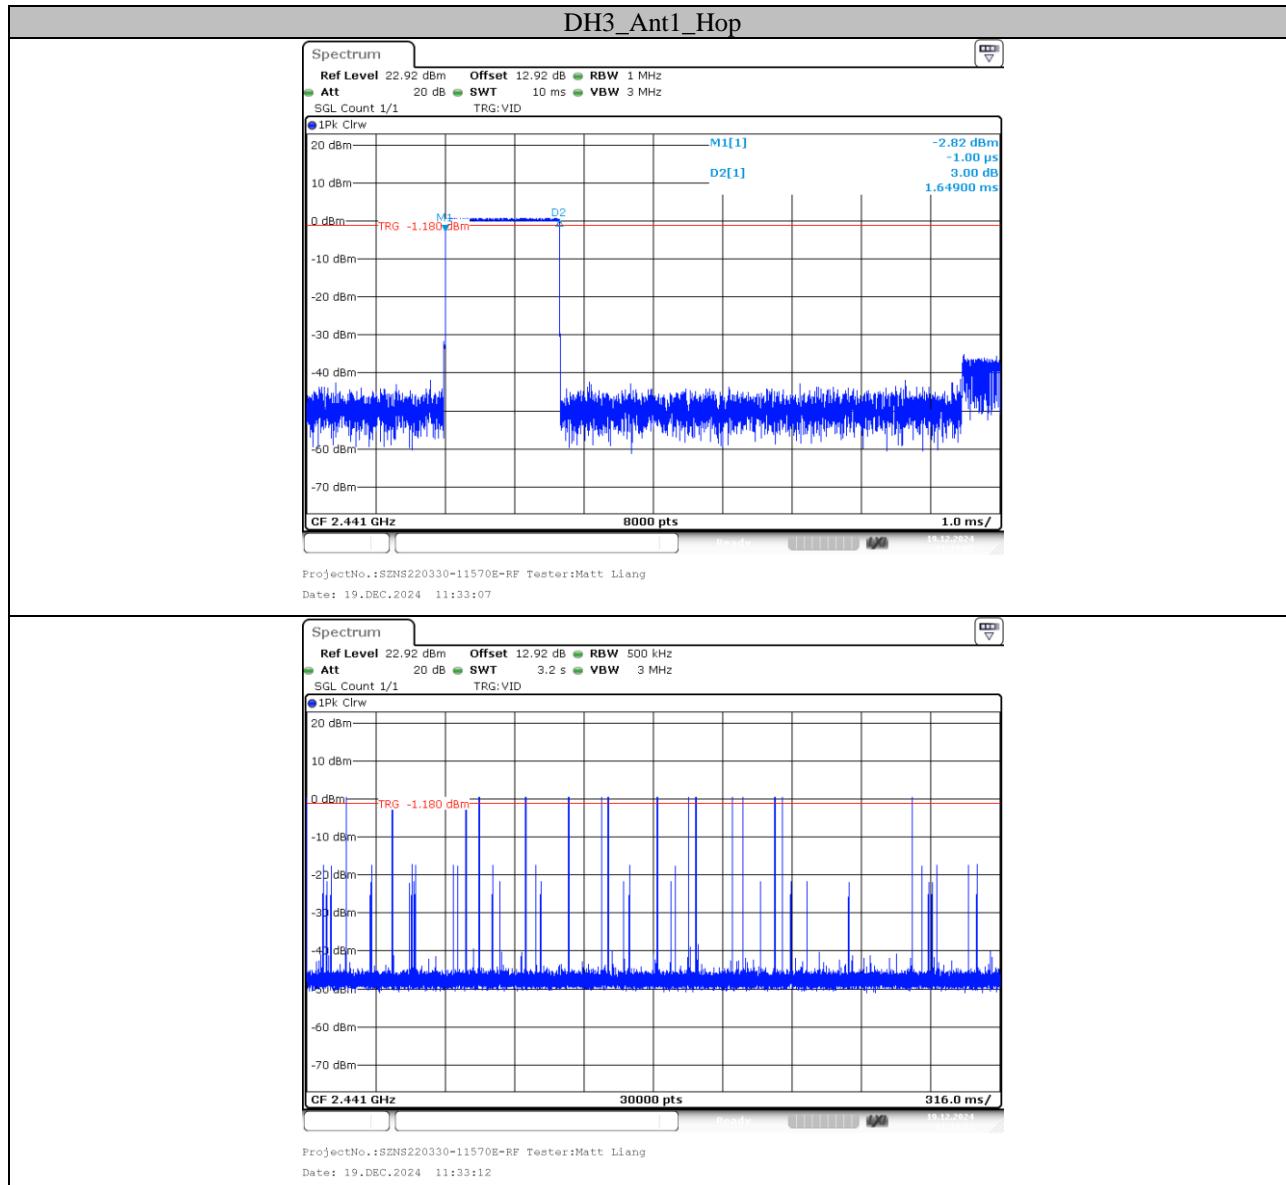


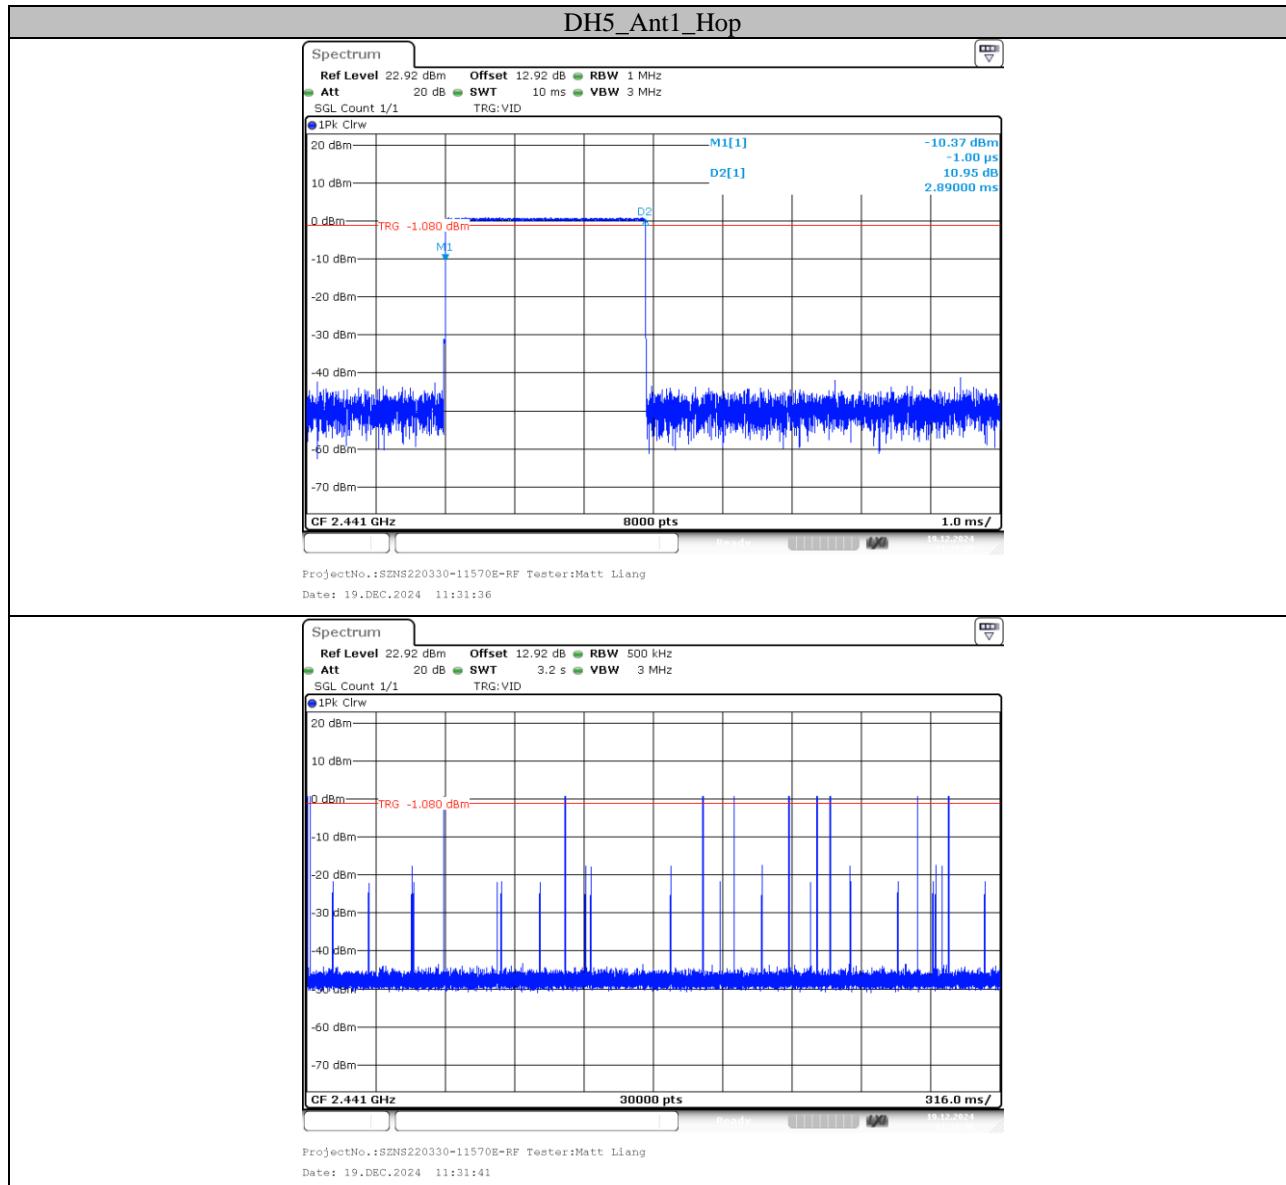


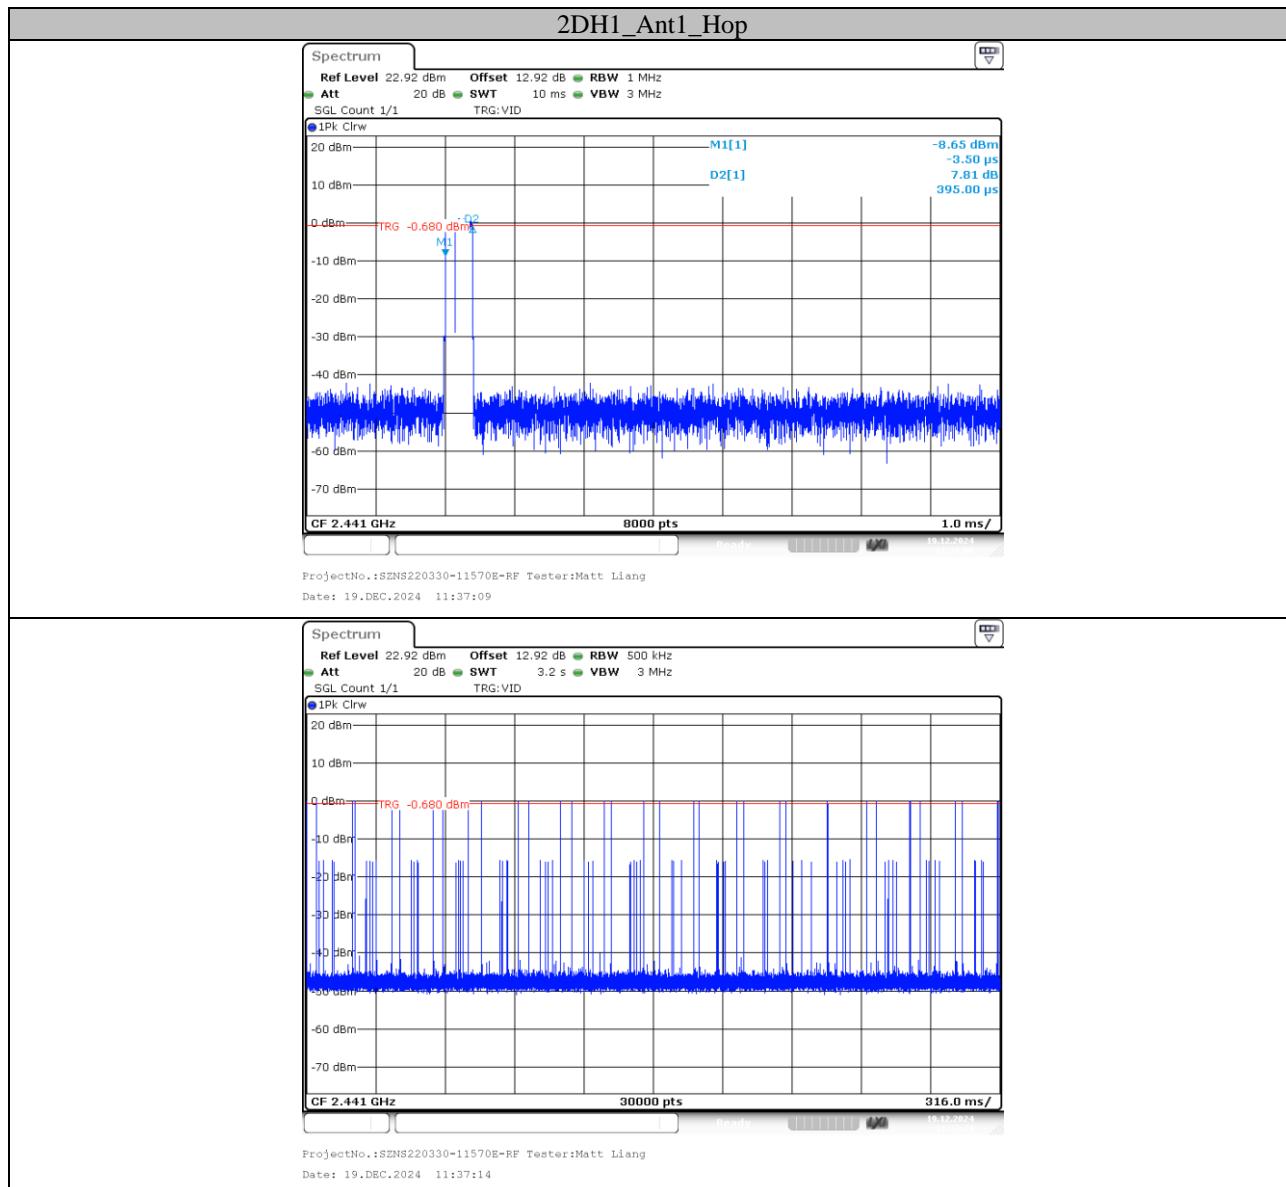


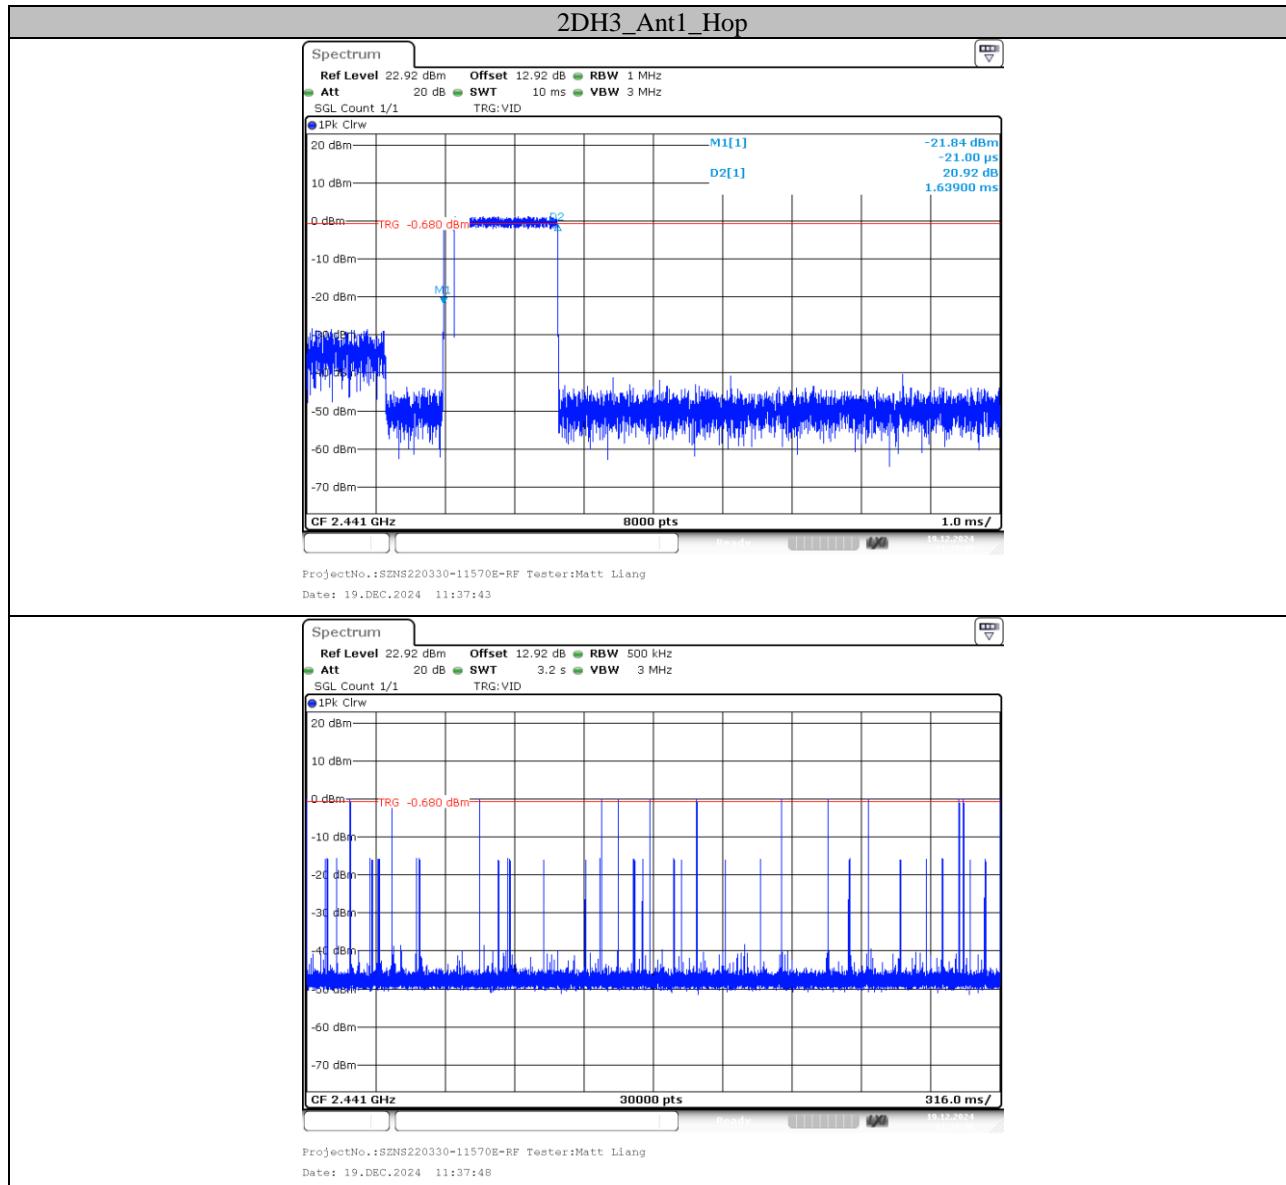

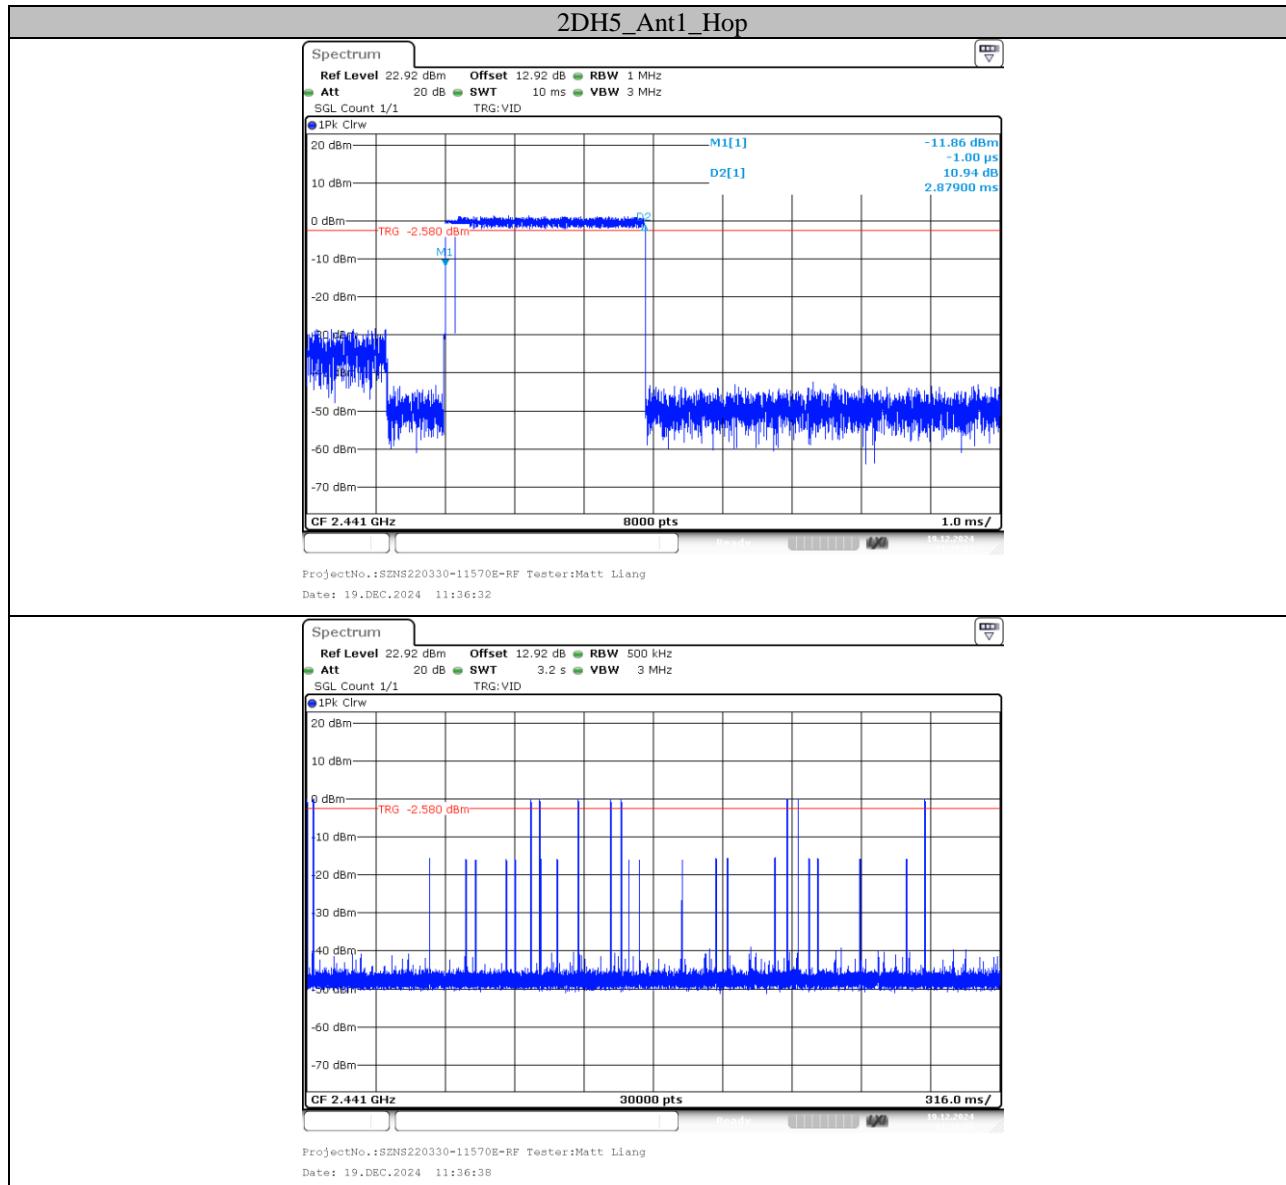

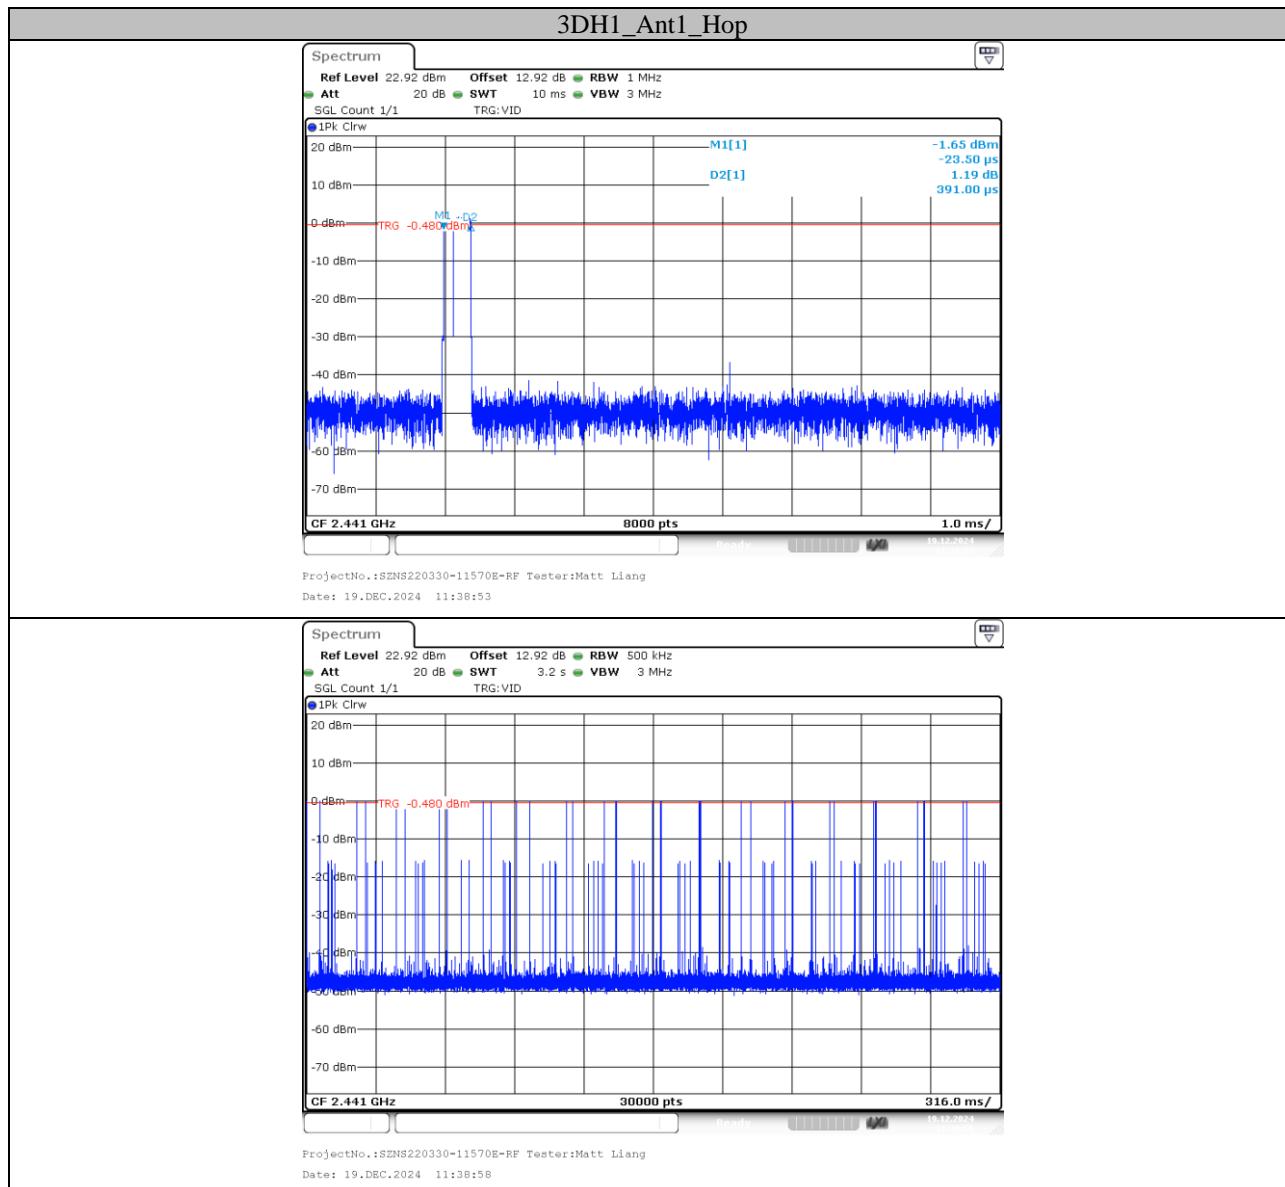

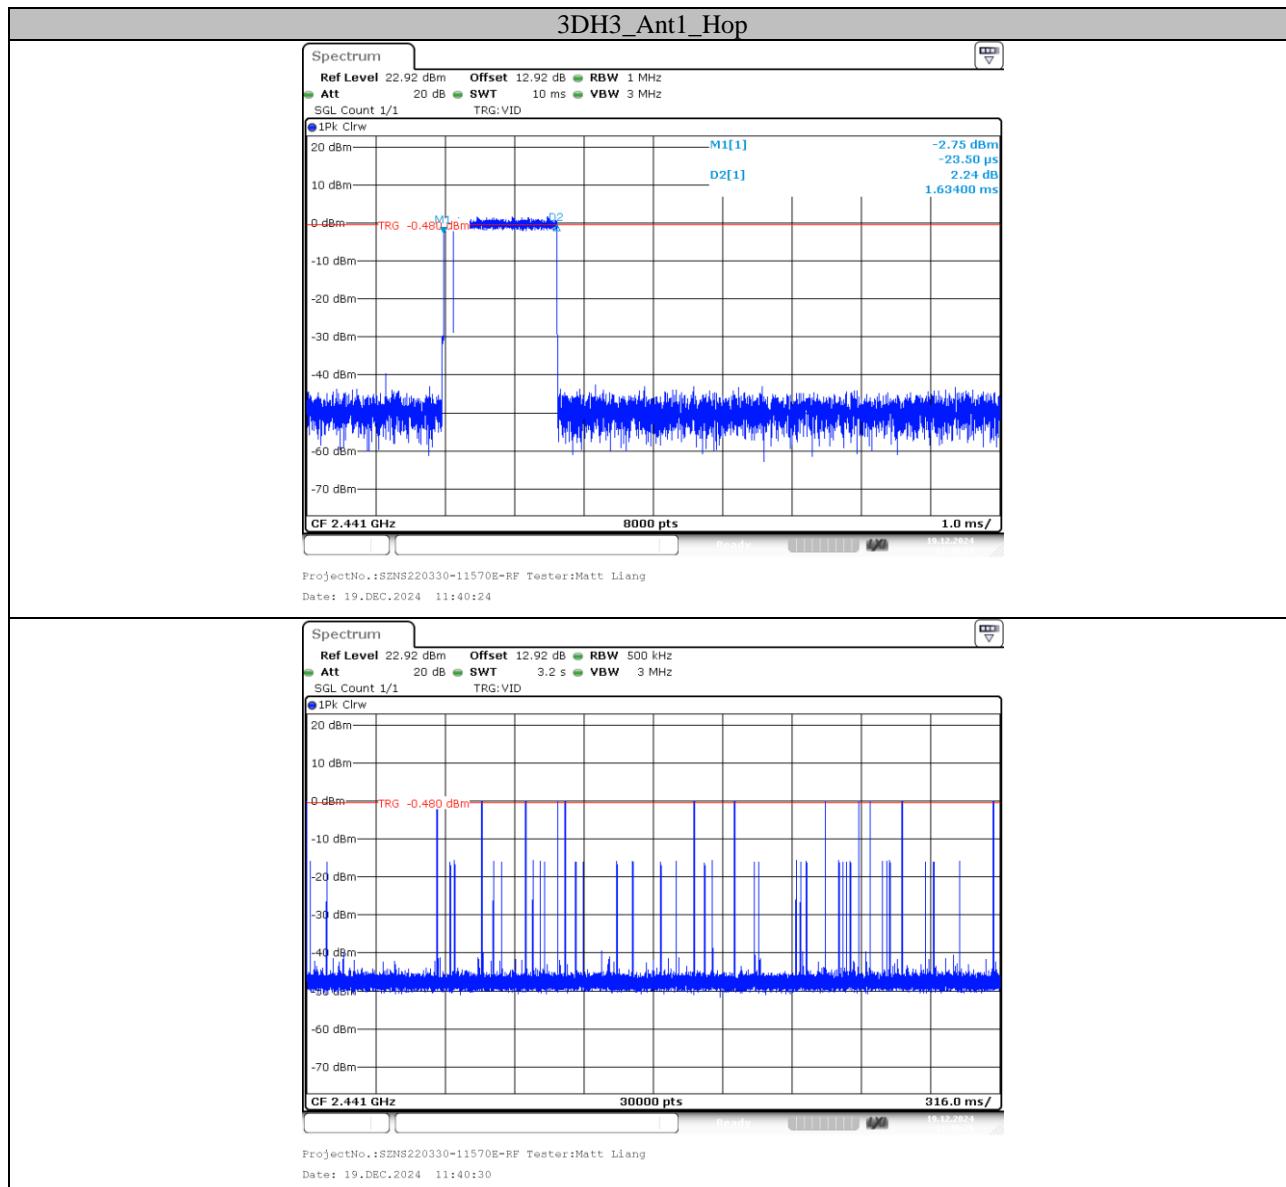


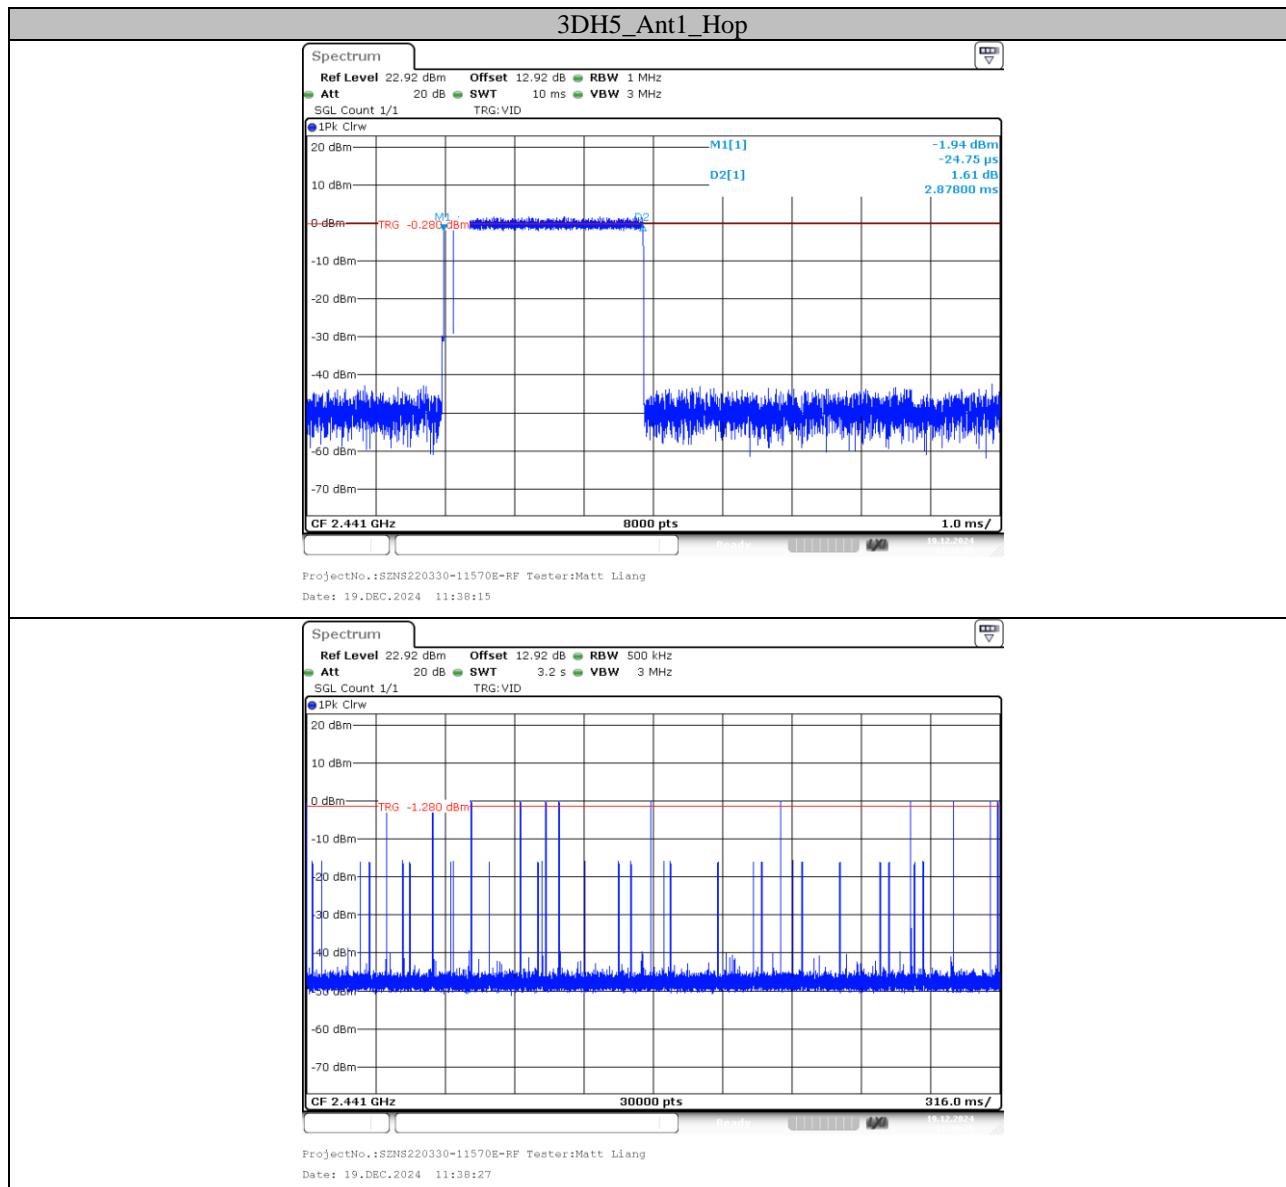


**Appendix F: Number of Hopping Channels****Test Result**

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

## Test Graphs

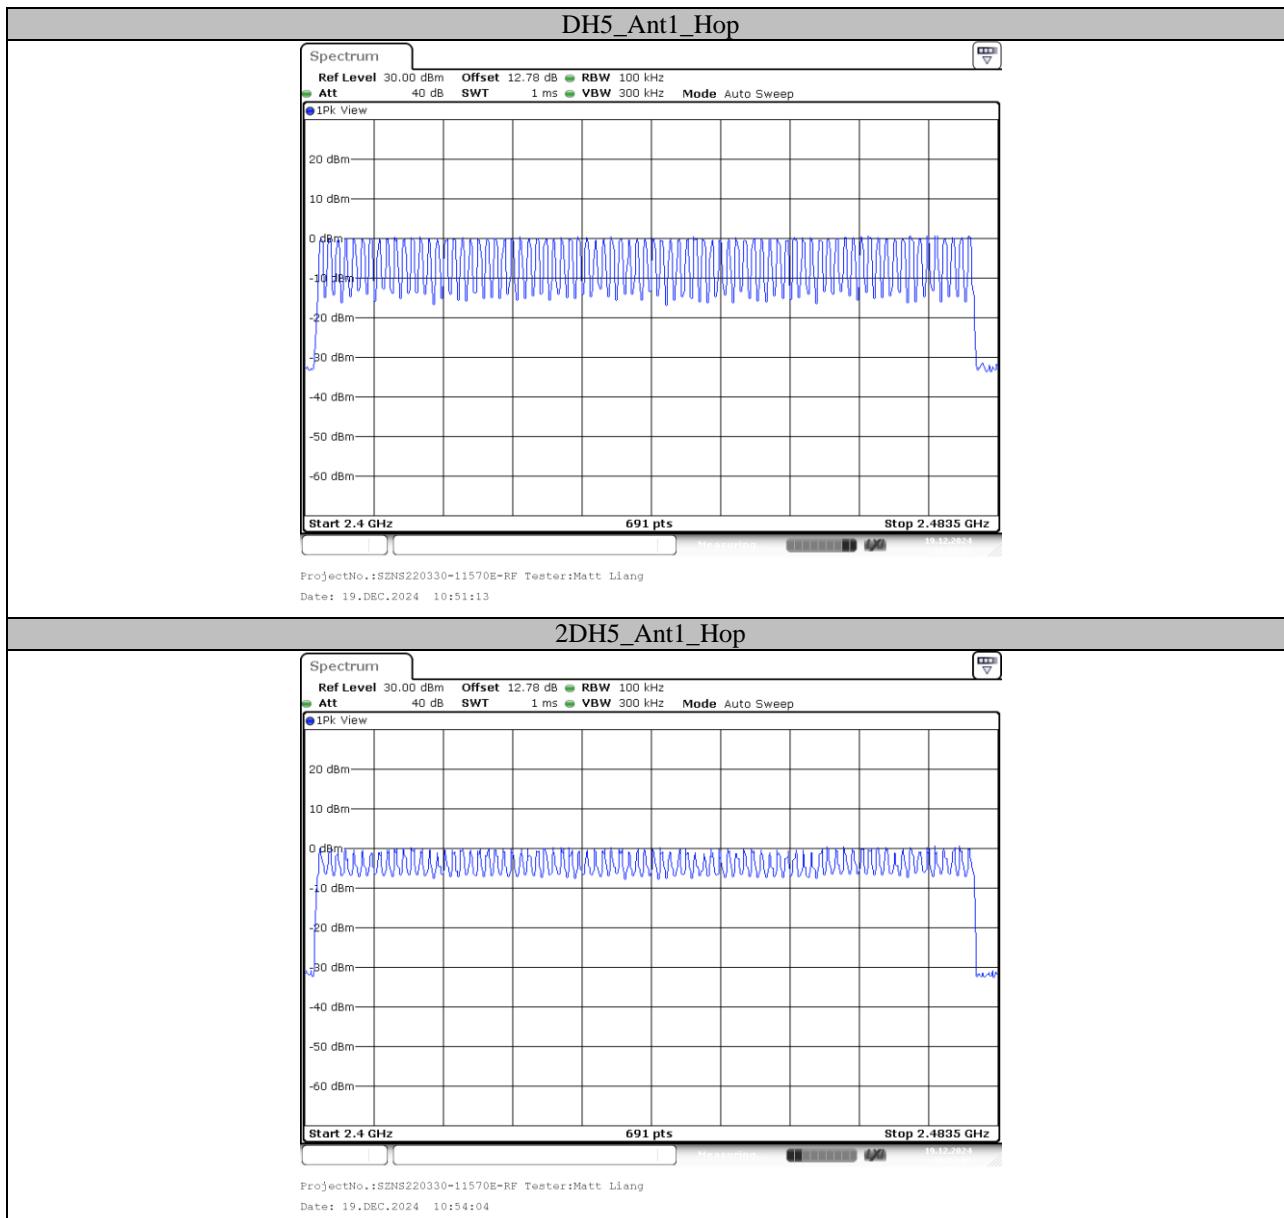

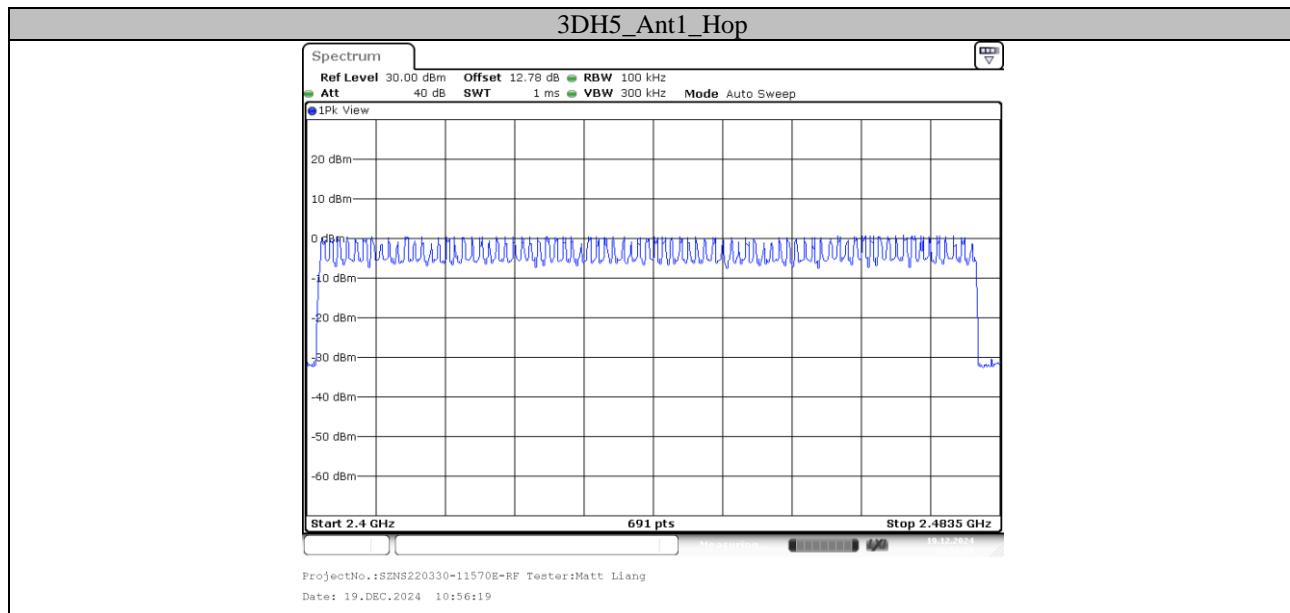



## Appendix G: Band Edge Measurements


### Test Result

Test Mode	Antenna	ChName	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.57	-45.6	≤-19.43	PASS
		High	2480	0.69	-40.32	≤-19.31	PASS
		Low	Hop_2402	0.48	-45.67	≤-19.52	PASS
		High	Hop_2480	0.80	-39.99	≤-19.2	PASS
2DH5	Ant1	Low	2402	-0.34	-45.01	≤-20.34	PASS
		High	2480	0.61	-39.96	≤-19.39	PASS
		Low	Hop_2402	-0.51	-45.74	≤-20.51	PASS
		High	Hop_2480	0.59	-40.24	≤-19.41	PASS
3DH5	Ant1	Low	2402	0.61	-44.4	≤-19.39	PASS
		High	2480	0.75	-40.27	≤-19.25	PASS
		Low	Hop_2402	-1.59	-45.46	≤-21.59	PASS
		High	Hop_2480	0.84	-40.08	≤-19.16	PASS

## Test Graphs

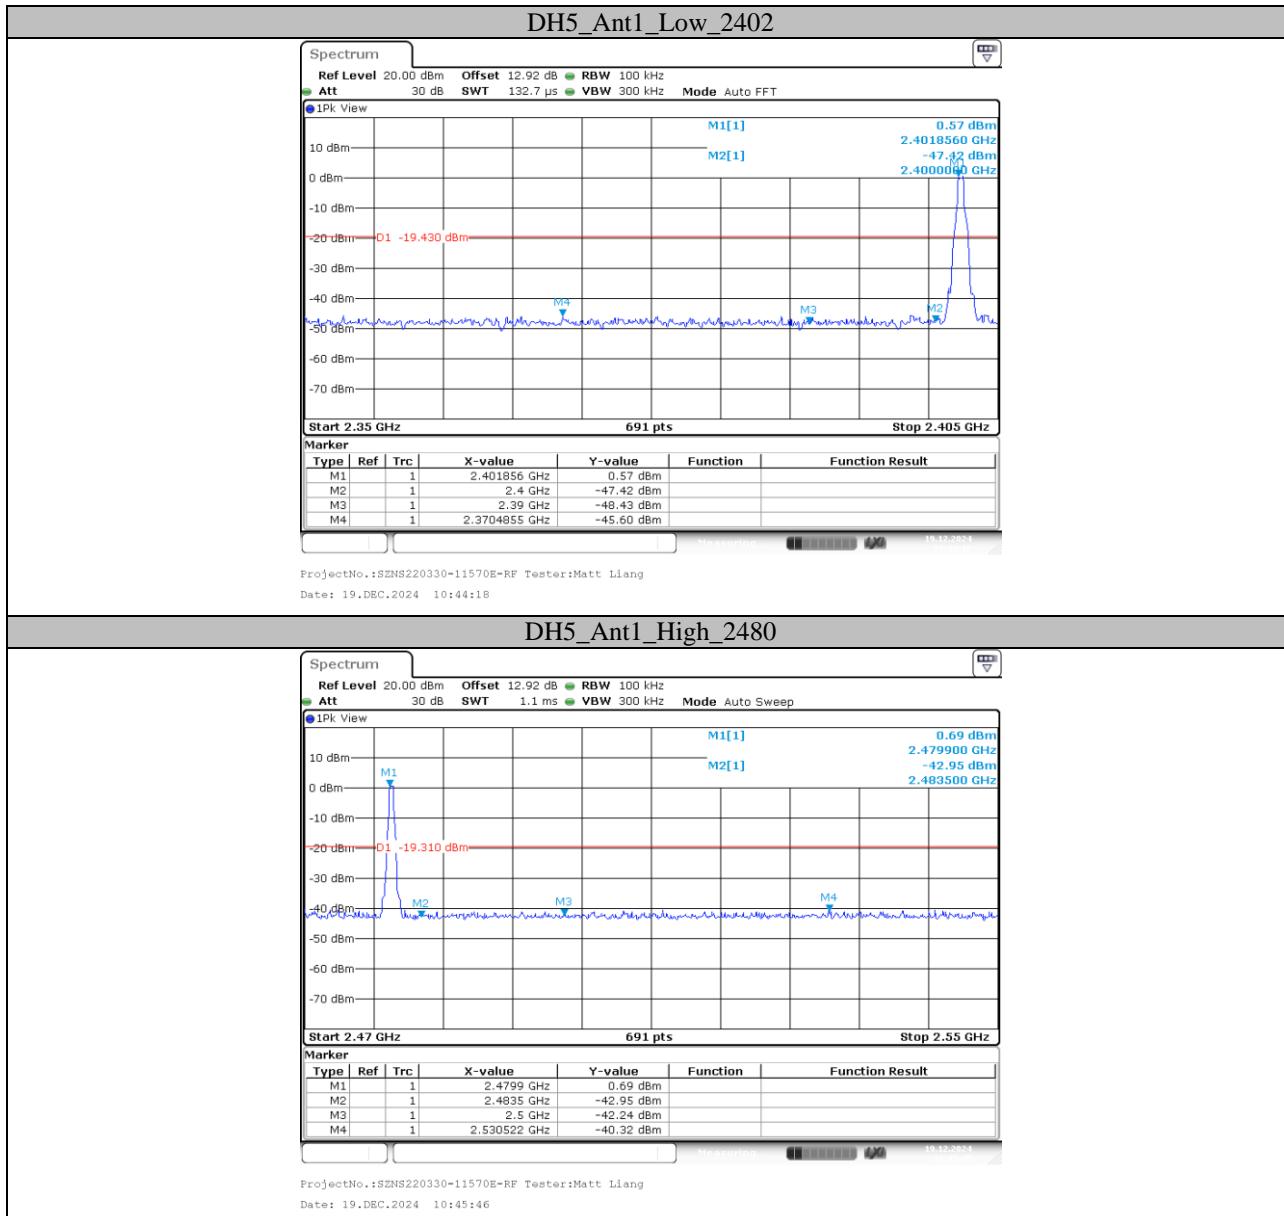


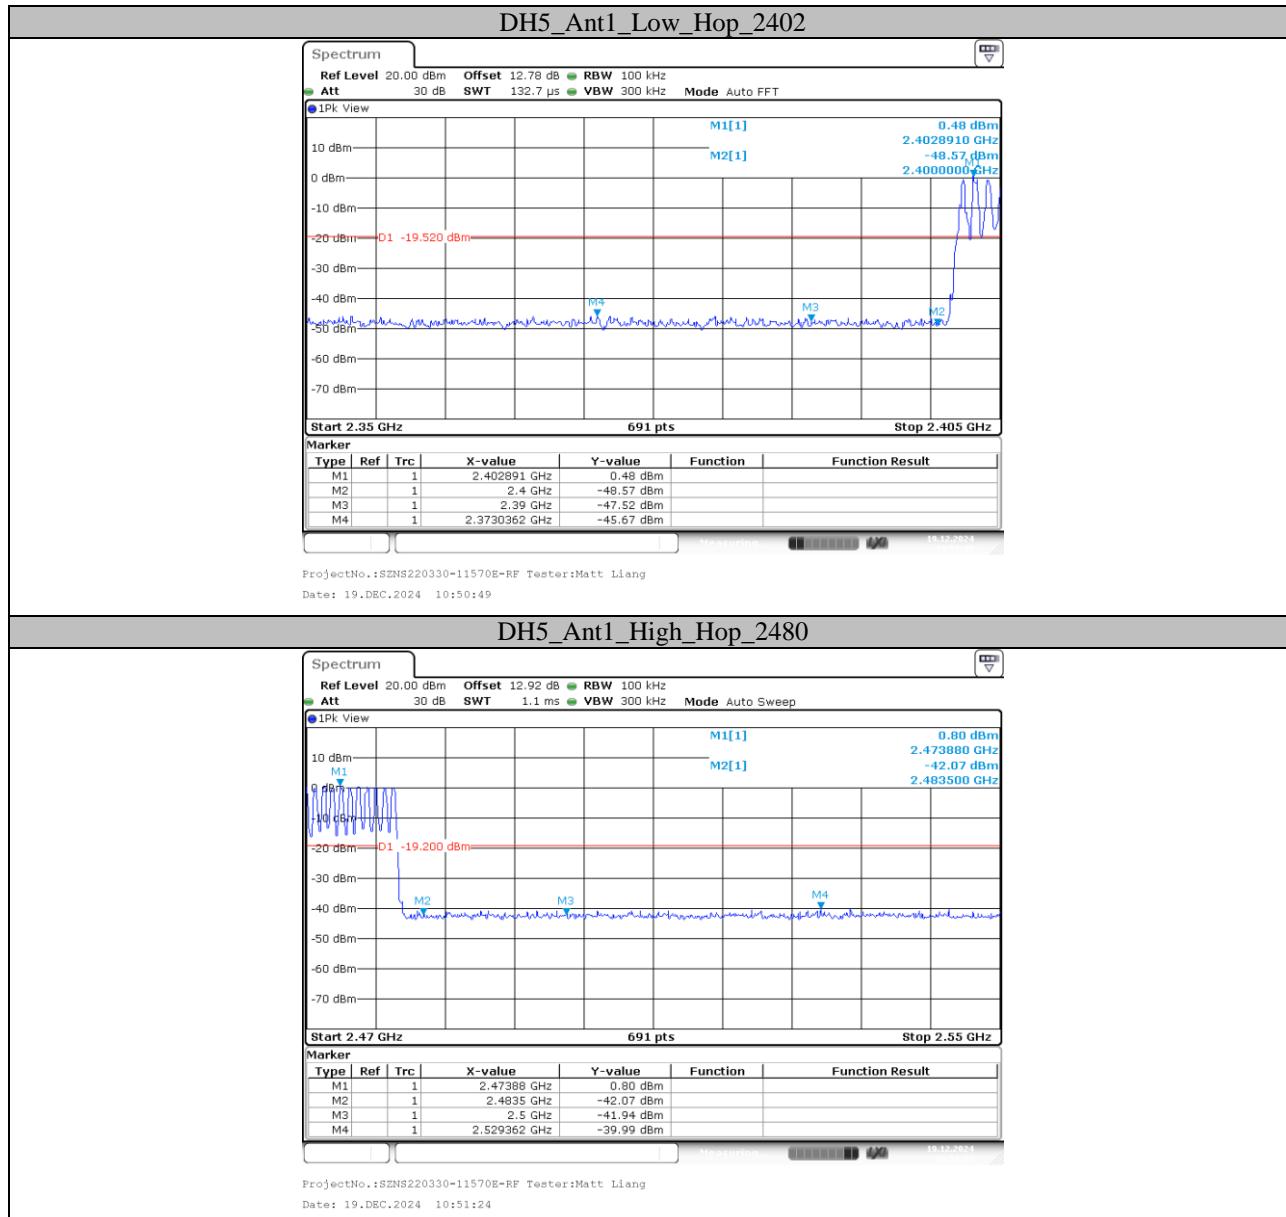

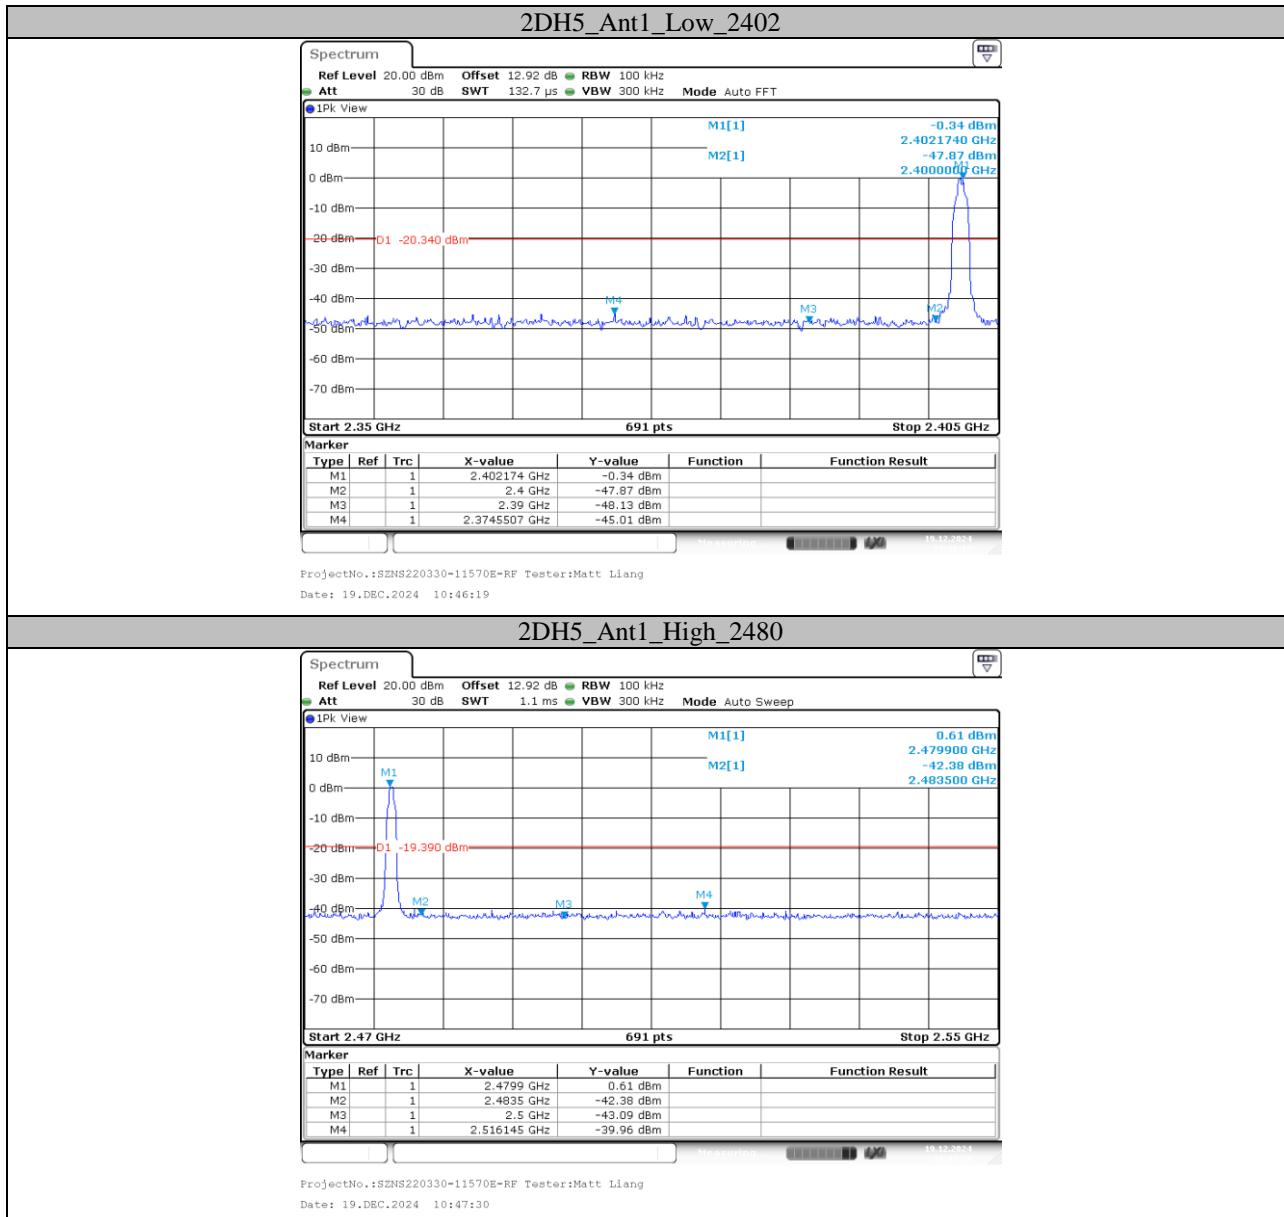





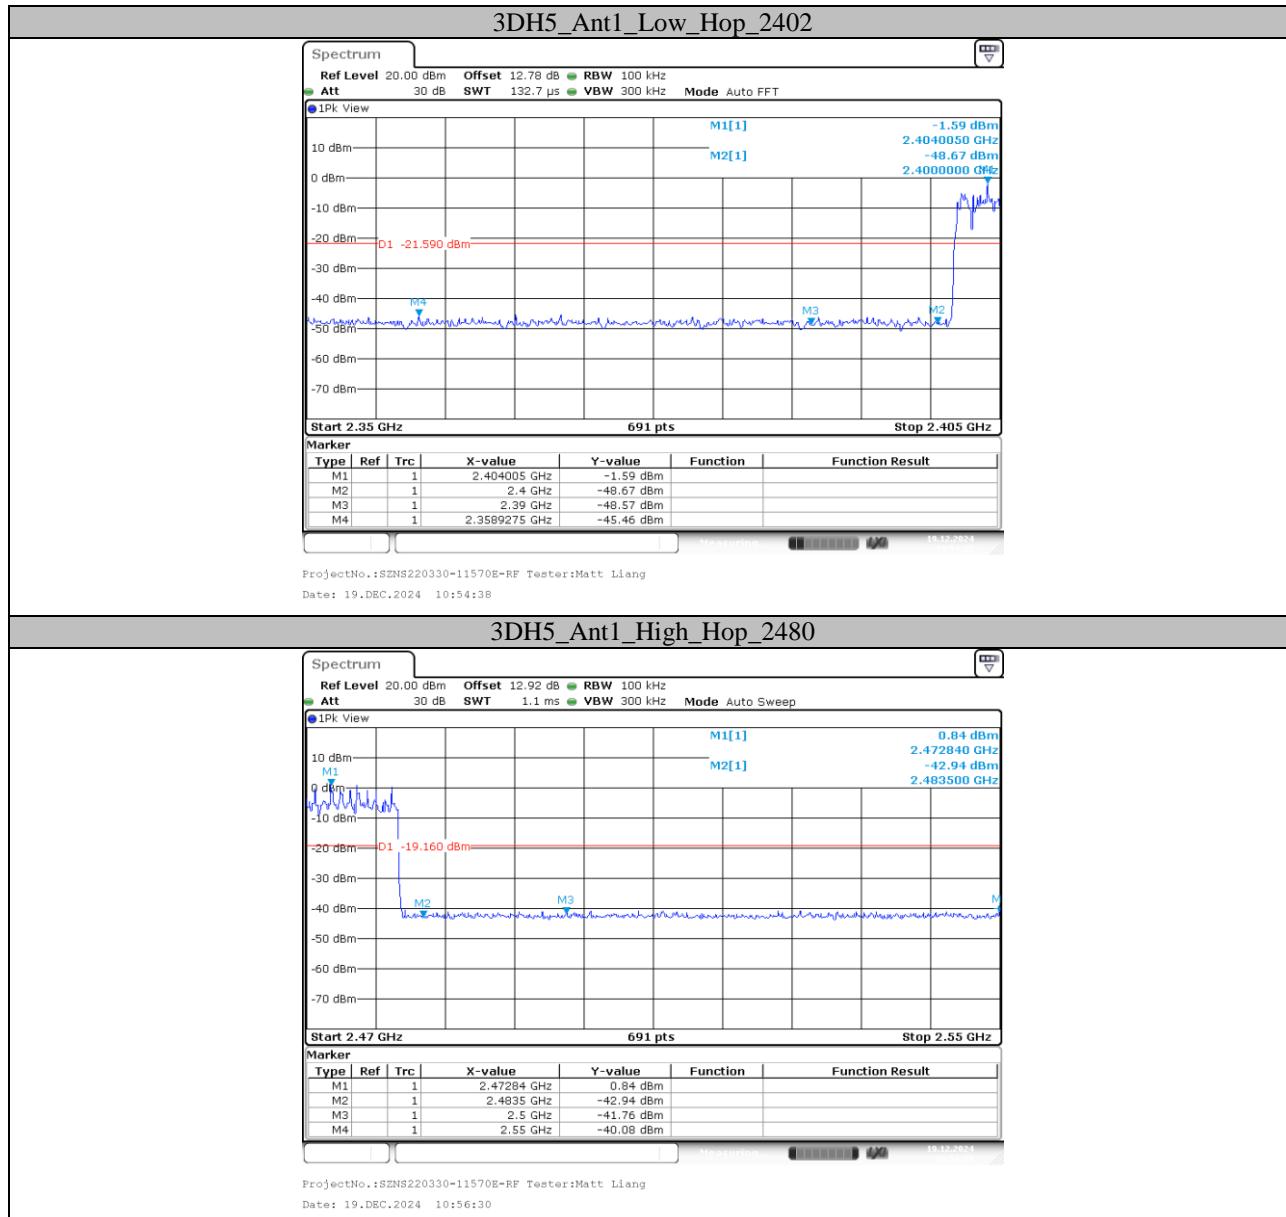

\*\*\*\*\* END OF REPORT \*\*\*\*\*