


PCD rear label location:

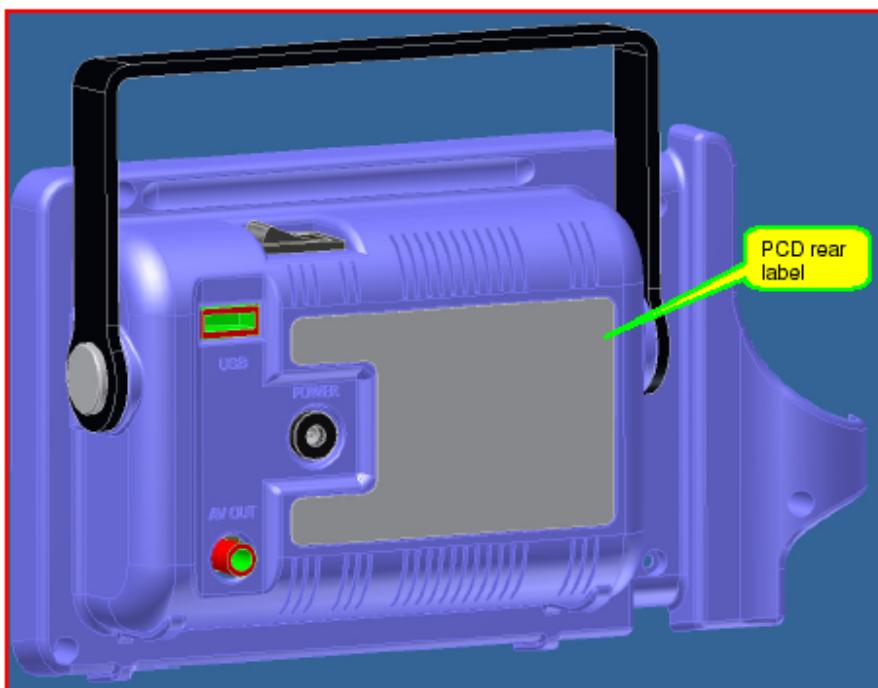

TRUVIEW PCD™

With Rechargeable Lithium-Ion battery Pack
Protection Circuit Module, Max Output 16.8V
Capacity Retention: 1400mAh

Model: PCD4150 Serial No.

- Do not disassemble
- Do not heat or expose the battery to water or fire
- Store at temperatures between 0°C - 35°C
- Charge the battery ONLY when the POWER button is off
- Charger Voltage: DC 12V-16.8V
- Power Consumption: 7W

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.



Truphatek International Ltd. Email: helpdsk@truphatek.com



TRUPHATEK®



FCC ID: XRU-4150

PCD4150 Rev 09 4150003