



BUREAU
VERITAS

EMC Test Report

2024-0450-EMC-TR-25-0094-V01

Designation:	UAP-R [PCS 1900]
Manufacturer:	CommScope
Serial No(s):	SZBEBE2508A0005
ID No.	7862370-00 Rev: 00
FCC ID	XS5-IONEUAPR
ISED ID	2237E-IONEUAPR
Test Specifications:	ANSI 63-26:2015 Spot check according the following rules: FCC Rules and Regulations as listed in 47 CFR, Part 20 and Part 24 RSS-133 Issue 7 with RSS-GEN Issue 5, RSS-131 Issue 4 and SRSP-510 Issue 6
Test Plan:	"BU-PC-2336-58" from customer
Test Result:	Passed

Date of issue:	13.06.2025		Signature:
Version:	01	Technical Reviewer:	
Date of receipt EUT:	26.02.2025		
Performance date:	15.05.2025 - 16.05.2025	Report Reviewer:	



Bundesnetzagentur

BNetzA-CAB-19/21-20



Deutsche
Akkreditierungsstelle
D-PL-12024-06-00

The test results relates only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Bureau Veritas
Consumer Products Services Germany GmbH
www.bureauveritas.de/cps
Tel.: +49 (0)40 - 740 41 - 0

Schwerin
Mettenheimer Straße 12-14, 19061 Schwerin
cps-schwerin@bureauveritas.com

Tuerkheim
Businesspark A96, 86842 Tuerkheim
cps-tuerkheim@bureauveritas.com

Managing Director: Jörg-Timm Kilisch
VAT-No.: DE164793120
Reg.No.: Schwerin HRB 3564

Hamburg
Oehleckerring 40, 22419 Hamburg
cps-hamburg@bureauveritas.com

Nuremberg
Thurn-und-Taxis-Str. 18, 90411 Nuremberg
cps-nuernberg@bureauveritas.com



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Client: CommScope

Andrew Wireless System GmbH
Industriering 10
86675 Buchdorf
Germany

Test laboratory: Bureau Veritas Consumer Products Services Germany GmbH

Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 40 74041 0

Test location: Bureau Veritas Consumer Products Services Germany GmbH

Thurn-und-Taxis-Straße 18
D-90411 Nürnberg

DAkkS D-PL-12024-06-04

Laboratory accreditation no:

BNETZA-CAB-19/21-20

FCC Designation Number: DE0023

FCC Test Firm Registration: 366481

ISED CAB Identifier DE0016

ISED Company Number 3475A

Versions management:

V 01.00 Initial release

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Table of Contents

1	APPLIED STANDARDS AND TEST SUMMARY	4
1.1	CFR APPLIED STANDARDS.....	4
1.2	DECLARATION TO THE TESTS IN THIS REPORT	6
1.3	FCC-ISED CORRELATION TABLE.....	7
1.4	MEASUREMENT SUMMARY/SIGNATURES	8
2	ADMINISTRATIVE DATA.....	12
2.1	TESTING LABORATORY.....	12
2.2	APPLICANT DATA.....	12
2.3	MANUFACTURER DATAZ.....	12
3	TEST OBJECT DATA	13
3.1	GENERAL EUT DESCRIPTION	13
3.2	EUT MAIN COMPONENTS	14
3.3	ANCILLARY EQUIPMENT	14
3.4	AUXILIARY EQUIPMENT	15
3.5	EUT SETUPS	15
3.6	OPERATING MODES.....	16
3.7	PRODUCT LABELLING.....	18
4	DESCRIPTION OF EMC TEST CENTRE	19
4.1	CLIMATIC CONDITIONS DURING MEASUREMENTS	19
4.2	CONFORMITY STATEMENT/DECISION RULE	19
4.3	MEASUREMENT UNCERTAINTIES.....	20
5	TEST RESULTS	21
5.1	EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN.....	21
5.2	PEAK TO AVERAGE RATIO	41
5.3	OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM.....	48
5.4	CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	58
5.5	OUT-OF-BAND EMISSION LIMITS	71
5.6	OUT-OF-BAND REJECTION	86
6	TEST EQUIPMENT	89
6.1	CONDUCTED EMISSIONS	89
6.2	ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATION.....	89
7	PHOTO REPORT.....	90
	Annex A: Accreditation certificate (for information)	91
	Annex B: Additional information provided by client.....	92

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 CFR APPLIED STANDARDS

Type of Authorization

Certification for an Industrial Signal Booster.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Chapter 1 Parts 2 and 20 and 24. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 20, Commercial Mobile Services

§ 20.21 Signal Boosters

Part 24, Subpart E – Broadband PCS

§ 24.232 – Power and antenna height limits

§ 24.235 – Frequency stability

§ 24.238 – Emission limitations for broadband PCS equipment

The tests were selected and performed with reference to:

- FCC Public Notice 935210 applying “Signal Boosters Basic Certification Requirements” 935210 D02, 2024-11-20.
- FCC Public Notice 935210 applying “Measurement guidance for industrial and non-consumer signal booster, repeater and amplifier devices” 935210 D05, 2020-04-03.
- FCC Public Notice 971168 applying “Measurement guidance for certification of licensed digital transmitters” 971168 D01, 2018-04-09.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

- ANSI C63.26: 2015 "American National Standard for Compliance Testing of Transmitters Used in Licensec Radio Services"
- RSS-133 Issue 7 "Personal Communications Service Equipment Operating in the Bands 1850-1915 MHz and 1930-1995 MHz"
- SRSP-510 Issue 6 "Technical Requirements for Personal Communications Services (PCS) in the Bands 1850-1915 MHz and 1930-1995 MHz"
- RSS-GEN Issue 5 "General Requirements for Compliance of Radio Apparatus"
- RSS-131 Issue 4 "Zone Enhancers"

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

1.2 DECLARATION TO THE TESTS IN THIS REPORT

A similar type of signal booster with the AWS band, UAP-XR was tested in all required tests, see test report "2024-0451-EMC-TR-25-0071-V01".

The difference between UAP-XR and UAP-R is, that UAP-XR has one connector for an external antenna and UAP-R has two internal antennas connected via a BALUN to the internal RF output.

Therefore the power of each antenna output connector of the UAP-R is less than the output power of the UAP-XR at its one antenna connector.

In this report the values of the antenna port with the most output power are shown.

Because of the similarity of the two types only the most important tests regarding the conducted tests were performed.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

1.3 FCC-ISED CORRELATION TABLE

**Correlation of measurement requirements for
Industrial signal booster from FCC and ISED Canada**

Measurement	FCC reference	ISED reference
Effective radiated power, mean output power and zone enhancer gain	§ 24.232 KDB 935210 D05 v01r04: 3.5	RSS-GEN Issue 5, 6.12 RSS-133 Issue 7, 5.5 SRSP-510, Issue 6, 6.1.3
Peak to Average Ratio	§ 24.232	RSS-133 Issue 7, 5.5
Occupied bandwidth Input-versus-output spectrum	§ 2.1049 KDB 935210 D05 v01r04: 3.4	RSS-GEN Issue 5, 6.7 RSS-131 Issue 4: 9.2
Conducted spurious Emission at Antenna Terminal	§ 2.1051 § 24.238 KDB 935210 D05 v01r04: 3.6	RSS-GEN Issue 5, 6.13 RSS-133 Issue 7, 5.6
Out-of-band emissions limits	§ 2.1051 § 24.238 KDB 935210 D05 v01r04: 3.6	RSS-GEN Issue 5, 6.13 RSS-133 Issue 7, 5.6
Out-of-band rejection	KDB 935210 D05 v01r04: 3.3	RSS-131 Issue 4: 9.1
All measurements	ANSI 63.26	ANSI 63.26

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****1.4 MEASUREMENT SUMMARY/SIGNATURES****47 CFR CHAPTER I FCC PART 24 Subpart E § 24.232**
[Broadband PCS]

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r04: 3.5

Final Result

OP-Mode	FCC	ISED
Frequency Band, Direction, Input Power, Signal Type		
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband 5G	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 24.232
[Broadband PCS]

Peak to Average Ratio
The measurement was performed according to ANSI C63.26

Final Result

	FCC	ISED
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband 5G	Passed	Passed

47 CFR CHAPTER I FCC PART 2 § 2.1049

Occupied Bandwidth/Input-versus-output Spectrum
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r04: 3.4

Final Result

OP-Mode	FCC	ISED
Frequency Band, Direction, Input Power, Signal Type		
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
PCS 1900, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed	Passed
PCS 1900, RF downlink, 3 dB > AGC, Wideband 5G	Passed	Passed

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

**47 CFR CHAPTER I FCC PART 24 Subpart E
[Broadband PCS]**

§ 2.1051, § 24.238

Conducted spurious emissions at antenna terminals

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

	FCC	ISED
PCS 1900, low, RF downlink, Wideband	Passed	Passed
PCS 1900, mid, RF downlink, Wideband	Passed	Passed
PCS 1900, high, RF downlink, Wideband	Passed	Passed
PCS 1900low, RF downlink, Narrowband	Passed	Passed
PCS 1900, mid, RF downlink, Narrowband	Passed	Passed
PCS 1900, high, RF downlink, Narrowband	Passed	Passed
PCS 1900, low, RF downlink, Wideband 5G	Passed	Passed
PCS 1900, mid, RF downlink, Wideband 5G	Passed	Passed
PCS 1900, high, RF downlink, Wideband 5G	Passed	Passed

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****47 CFR CHAPTER I FCC PART 24 Subpart E [Broadband
PCS]****§2.1051, § 24.238**

Out-of-band emission limits

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04:
3.6**OP-Mode**

Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type

	FCC	ISED
Upper, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
Upper, PCS 1900, 1, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
Upper, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed	Passed
Upper, PCS 1900, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed	Passed
Upper, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
Upper, PCS 1900, 1, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
Lower, PCS 1900, 1, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
Upper, PCS 1900, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
Upper, PCS 1900, 2, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
Upper, PCS 1900, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
Upper, PCS 1900, 2, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed
Lower, PCS 1900, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed	Passed
Lower, PCS 1900, 2, RF downlink, 3 dB > AGC, Wideband	Passed	Passed
Lower, PCS 1900, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed	Passed
Lower, PCS 1900, 2, RF downlink, 3 dB > AGC, Narrowband	Passed	Passed

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

**47 CFR CHAPTER I FCC PART 24 Subpart E
[Broadband PCS]**

KDB 935210 D05 v01r04: 3.3

Out-of-band rejection

The measurement was performed according to ANSI C63.26; KDB
935210 D05 v01r04: 3.3

Final Result

OP-Mode

Frequency Band, Direction

PCS 1900, RF downlink

Setup

FCC

ISED

Passed

Passed

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Bureau Veritas Consumer Products Services

Germany GmbH

Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

2.2 APPLICANT DATA

Company Name:	CommScope
	Andrew Wireless Systems GmbH
Address:	Industriering 10
	86675 Buchdorf
	Germany
Contact Person:	Mr. Jiri Čečka

2.3 MANUFACTURER DATAZ

Company Name: Please see applicant data.

Address:

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

BUREAU
VERITAS

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Cellular repeater
Product name	Cellular repeater
Type	UAP-R
Declared EUT data by the supplier	
General Product Description	<p>The EUT is an industrial signal booster supporting the following:</p> <p>Band 30/WCS 2300: 2350 – 2360 MHz</p> <p>Band 41 (BRS 2500), Broadband Radio Service:</p> <ul style="list-style-type: none">• Lower Band Segment (LBS): 2496- 2568 MHz (Range for FCC)• Lower Band Segment (LBS): 2500- 2568 MHz (Range for ISED)• Middle Band Segment (MBS): 2572- 2614 MHz• Upper Band Segment (UBS): 2618 – 2690 MHz <p>Band 25/PCS 1900</p> <p>Band 66/AWS 1700</p> <p>A RF operation is only supported for the downlink.</p>
Booster Type	Industrial signal booster
Voltage Type	DC, supply about PoE
Voltage Level	-60 V - -36 V, -57 V nominal
Maximum Output Donor Port [Uplink]	-
Maximum Output Server Port [Downlink]	18 dBm in all bands at amplifier output. before the BALUN, after the BALUN about 13 dBm per antenna connection port.
Maximum Gain [Uplink]	-
Maximum Gain [Downlink]	20 dB in all bands at amplifier output before the BALUN, after the BALUN about 15 dB per antenna connection port.

After the amplifier output the signal is routed to a BALUN with two antenna port connectors. Two built in dipole antennas are connected to the antenna port connectors of the BALUN.

The measurements were taken at the antenna port with the higher output level, here Antenna port 1.

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

3.2 EUT MAIN COMPONENTS

Sample Parameter	Value
Serial Number	SZBEBE2508A0005
HW Version	7862370-00 Rev: 00
SW Version	01.03.0012
Comment	-----

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (manufacturer, type model, OUT code)	Description
-	-	-

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (manufacturer, type, S/N)	Description
AUX1	CommScope; ION-E PSU Shelf AC; HD20882	Power supply rack
AUX1	CommScope; ION-E WCS-2; SZAEAJ1952A0032	Power supply rack
AUX3	GE Power Electronics Inc.; CAR1212FPBC-Z; FK69111	Power module
AUX4	GE Energy; CP2000AC54TEP-CM; LBLNPW13KZ07004506	Power module
AUX5	CommScope; ION E SUI; (e1)MA34	Ethernet module
AUX6	CommScope; ION E CAT; SZBEAE1810A0009	PoE module
AUX8	CommScope, ION E RFD, SZBEAG1825A0004	RF card plug-in module
AUX8	CommScope, ION E RFD, SZBEA G1849A0043	RF card plug-in module

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and rationale
,		Setup for all tests

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

3.6 OPERATING MODES

This chapter describes the operating modes of the EUT used for testing.

3.6.1 TEST CHANNELS

Band	Direction	Lower Frequency Band Edge [MHz]	Upper Frequency Band Edge [MHz]	Center Frequency [MHz]	Port
25 (PCS 1900)	Downlink	1930.00	1995.00	1962.50	Donor

3.6.2 DEFINITION OF USED FREQUENCY BANDS

Narrowband: representation by a GSM signal

Wideband : representation by an AWGN signal with 4.1 MHz

Wideband 5G: representation by an AWGN signal with 43.6 MHz

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

3.6.3 AUTOMATIC GAIN CONTROL LEVELS

AGC Levels							
Band	Direction	Signal type	AGC start pin [dBm]	AGC start pin -0.3 dB [dBm]	AGC start pin +3 dB [dBm]	Frequency [MHz]	Frequency
25	Downlink	Narrowband	0.0	-0.3	2.9	1962.5	Mid
25	Downlink	Wideband	-0.5	-0.8	2.6	1962.5	
25	Downlink	Wideband 5G	0,0	-0.3	3.0	1962.5	
25	Downlink	Narrowband	0.4	0.1	3.4	1930.2	Low
25	Downlink	Wideband	0.6	0.3	3.6	1932.5	
25	Downlink	Wideband 5G	0.2	0.0	3.0	1952.5	
25	Downlink	Narrowband	-0.4	-0.7	2.6	1992.5	High
25	Downlink	Wideband	-0.6	-0.9	2.4	1992.5	
25	Downlink	Wideband 5G	-0.9	-1.2	1.8	1972.5	
25	Downlink	Narrowband	-0.6	-0.9	2.5	1964.0	Max.Power
25	Downlink	Wideband	-0.4	-0.7	2.6	1964.0	
25	Downlink	Wideband 5G	0.0	-0.3	3.0	1962.5	

Remark:

If the measured frequency f_0 for the max power has a too low distance to the band edges, because in the tests modulated signals must be used: The next possible frequency to the according band edge was used.

For example for minimum distances to the band edges:

GSM-Signal (narrowband): 0.2 MHz

AWGN-signal (wideband): 2.5 MHz

AWGN-signal (wideband 5G): 22.5 MHz

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

4 DESCRIPTION OF EMC TEST CENTRE

4.1 CLIMATIC CONDITIONS DURING MEASUREMENTS

The climatic conditions were within the following ranges.

For ESD testing, the conditions during the test were denoted in the corresponding chapter.

Ambient temperature: 25 ± 10 °C

Relative humidity: 20 – 60 %

Air pressure: 860 - 1060 hPa

4.2 CONFORMITY STATEMENT/DECISION RULE

4.2.1 EMISSION

If the standard or the customer defines no decision rule, the laboratory applies a decision rule following the "Binary Statement for Simple Acceptance Rule ($w=0$)" (chapter 4.2.1) of ILAC Guidelines on Decision Rules and Statements of Conformity (ILAC-G8:09/2019). If the measured value is at the limit value, it is evaluated as PASS. The client has agreed with application of the decision rule prior testing and demanded a statement of conformity by the test laboratory.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

4.3 MEASUREMENT UNCERTAINTIES

KDB 935210 D05	Test laboratory
Power measurement	0,68 dB
Measuring AGC threshold level	0,90 dB
Out of band rejection	0,90 dB
Input-versus-output signal comparison	0,91 dB
Mean power output	0,90 dB
Measuring out-of-band/out-of-block (including intermodulation) emissions and spurious emissions	0,90 dB
Out-of-band/out-of-block emissions conducted measurements	0,90 dB
Spurious emissions conducted	2,18 dB
Spurious emissions radiated measurements	5,38 dB
Total frequency uncertainty	2×10^{-7}

Reference : ECL-MU5.4.6.3-EMC-14-001-V03.00 MU Wireless.xlsx

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

5 TEST RESULTS

5.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN

Standard FCC Part 27, §27.50

The test was performed according to:

ANSI C63.26, KDB 935210 D05 v01r04: 3.5

Test date: 2025-05-15 – 2025-05-16


Environmental conditions: 24.0 °C; 26 % r. H./26.3 °C; 36 % r. H.

Test engineer: Thomas Hufnagel

5.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

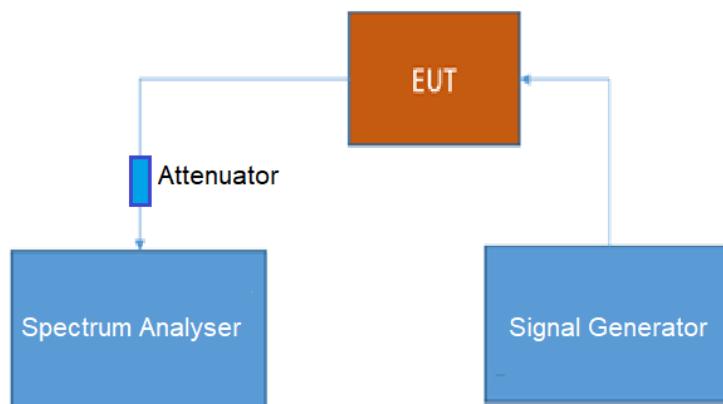

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****5.1.2 TEST REQUIREMENTS/LIMITS****Part 24; Personal Communication Services****Subpart E – Broadband PCS****§ 24.232**Abstract § 24.232 from FCC:**§ 24.232 Power and antenna height limits.**

(a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 1 and 2 of this section.

(4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

TABLE 1—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH OF 1 MHz OR LESS

HAAT in meters	Maximum EIRP watts
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

TABLE 2—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH GREATER THAN 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

(b)(1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

(2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

(3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 3 and 4 of this section.

(4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

TABLE 3—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH OF 1 MHz OR LESS

HAAT in meters	Maximum EIRP watts
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

TABLE 4—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH GREATER THAN 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Abstract RSS-133 from ISED:

RSS-133; 5.5 Transmitter output power

The maximum power spectral density of the equipment, measured in terms of average values, shall comply with the limits specified in table 2. These limits are either specified in terms of equivalent isotropically radiated power (e.i.r.p.) or TRP for the purpose of certification and may not apply to all deployment scenarios. Consult SRSP-510 for more deployment details in the bands 1850-1915 MHz and 1930-1995 MHz.

AAS equipment with eight antenna elements or less can demonstrate compliance with the e.i.r.p limit specified for non-AAS equipment in table 2, instead of the TRP limit.

Table 2: Maximum power spectral density of equipment

Equipment type	Maximum power spectral density
Non-AAS fixed station and base station	3280 W/MHz e.i.r.p
AAS fixed station and base station	46 dBm/MHz TRP
Subscriber equipment	2 W /channel bandwidth e.i.r.p

Abstract SRSP-510 from ISED:

6.1.3 SRSP-510; 6.1.3 e.i.r.p. limits and antenna height limits for non-AAS systems

22. For fixed and base stations operating in the band 1930-1995 MHz with a channel bandwidth equal to or less than 1 MHz, the maximum permissible e.i.r.p. is 1640 W, with an antenna height above average terrain (HAAT) of up to 300 m.

23. For fixed and base stations operating in the band 1930-1995 MHz with a channel bandwidth greater than 1 MHz, the maximum permissible e.i.r.p. is 1640 W/MHz (i.e. no more than 1640 W e.i.r.p. in any 1 MHz band segment), with an antenna HAAT up to 300 m.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

24. Fixed and base stations operating in the band 1930-1995 MHz and located in geographic areas at a distance greater than 26 km from large or medium population centres may increase their e.i.r.p. to a maximum of 3280 W/MHz (i.e. no more than 3280 W e.i.r.p. in any 1 MHz band segment), with an antenna HAAT of up to 300 m. According to Statistics Canada's [Census Dictionary](#), a large urban population centre has a population of 100,000 or more and a population density of 400 persons or more per km², and a medium population centre has a population of between 30,000 and 99,999 and a population density of 400 persons or more per km². Relevant files describing the [boundaries of these centres](#) are available online.

25. Within 26 km of any large or medium population centre, fixed and base stations may operate with an increased e.i.r.p. if more than 50% of the population within a particular sector's coverage is located outside a large or medium population centre. The population within the sector's coverage may be determined using the MapInfo spectrum grid-cell data available online at ISED's [Service areas for competitive licensing](#) web page.

26. Fixed and base stations operating with an increased e.i.r.p., as specified above, must not be used to provide coverage to large and medium population centres. However, some incidental coverage of these population centres by stations operating with an increased e.i.r.p. is permitted.

27. Base stations deployed prior to July 24, 2024 and located in areas outside of urban areas (as defined in SRSP-510, issue 5, according to Statistics Canada's Census Dictionary and in *A National Overview – Population and Dwelling Counts* (Data Products: 1996 Census of Population), Catalogue number 93-357-XPB) and operating with e.i.r.p. above 1640 watts (up to 3280 watts) may continue to operate with such e.i.r.p.

28. The above provisions to allow increased e.i.r.p. limits also apply to fixed and base stations with a channel bandwidth equal to or less than 1 MHz. The e.i.r.p. may be increased up to a maximum of 3280 W.

29. Fixed and base stations with an antenna HAAT exceeding 300 m shall apply a reduction in e.i.r.p. such that they are limited to the maximum permissible e.i.r.p. specified in table 1.

Table 1: Maximum permissible e.i.r.p for non-AAS with HAAT > 300 m

HAAT (m)	Maximum e.i.r.p. (W for a channel bandwidth ≤ 1 MHz or W/MHz for a channel bandwidth > 1 MHz)
300 < HAAT ≤ 500	1070
500 < HAAT ≤ 1000	490
1000 < HAAT ≤ 1500	270
1500 < HAAT ≤ 2000	160

30. The HAAT of a fixed or base station with multiple antennas shall be calculated based on the measurements of the highest antenna.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.1.3 TEST PROTOCOL

FCC Table

Band 25, 1930 MHz – 1995 MHz, downlink							
Signal type	Input power	Frequency [MHz]	Input power [dBm]	Maximum average output power [dBm]	Limit average output power [dBm] EIRP	Margin to limit [dB]	Gain [dB]
Wideband	0.3 dB < AGC	1964.0	-0.7	14.9	59.2	44.3	15.7
Wideband	3 dB > AGC	1964.0	2.6	14.2	59.2	45.0	11.6
Narrowband	0.3 dB < AGC	1964.0	-0.9	15.0	59.2	44.2	15.9
Narrowband	3 dB > AGC	1964.0	2.5	14.2	59.2	45.0	11.7
Wideband 5G	0.3 dB < AGC	1962.5	-0.3	15.1	59.2	44.1	15.4
Wideband 5G	3 dB > AGC	1962.5	3.0	14.4	59.2	44.9	11.4

For the output power limit the value of the FCC table from § 24.232 for a HAAT up to 300 meters is taken. This is 1640 watts which equates 59.2 dBm according the given formula:

$$p_{\text{dBm}} = 10 \log_{10} \frac{1640 \text{ W}}{0.001 \text{ W}} = 59.2 \text{ dBm}$$

Remarks: Please see next sub-clause for the measurement plot.

ISED Table

Band 25, 1930 MHz – 1995 MHz, downlink							
Signal type	Input power	Frequency [MHz]	Input power [μW; dBm]	Maximum average output power [mW; dBm]	Limit average output power [W/MHz; dBm] EIRP	Margin to limit [dB]	Gain [dB]
Wideband	0.3 dB < AGC	1964.0	854.7; -0.7	31.0; 14.9	820; 59.2	44.3	15.6
Wideband	3 dB > AGC	1964.0	1820; 2.6	25.9; 14.1	820; 59.2	45.1	11.5
Narrowband	0.3 dB < AGC	1964.0	818.8; -0.9	30.6; 14.9	820; 59.2	44.3	15.7
Narrowband	3 dB > AGC	1964.0	1800; 2.6	26.3; 14.2	820; 59.2	45.0	11.6
Wideband 5G	0.3 dB < AGC	1962.5	928.6; -0.3	32.3; 15.1	820; 59.2	44.1	15.4
Wideband 5G	3 dB > AGC	1962.5	1990; 3.0	32.3; 15.1	820; 59.2	44.3	15.6

For the output power limit the value of the ISED table at a height up to 300 m from SRSP-510 is taken.

For the input power, output power and the limit of output power the values in watts are also calculated in dBm values by the given formula:

$$p_{\text{dBm}} = 10 \log_{10} \frac{\text{Table Value [W]}}{0.001 \text{ [W]}}$$

Remark:

Please see next sub-clause for the measurement plot

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.1.4 SAMPLE CALCULATION OF OUTPUT POWER

FCC and ISED together:

Maximum output power (EIRP) in consideration together with the send antennas

Calculation for the highest power level of the test protocol table:

The highest power level in the table above is:

$p_{\text{highest}} = 14.9 \text{ dBm}$ at the channel which has the most output power of all channels.

Hereby at an antenna gain of $G_{\text{dBi}} = 9.0 \text{ dB}$ the highest effecitve radiated output power EIRP $p_{\text{EIRP 1CH}}$ of one channel is:

$$p_{\text{EIRP 1CH}} = p_{\text{highest}} + G_{\text{dBi}}$$

This results in:

$$p_{\text{EIRP 1CH}} = 14.9 \text{ dBm} + 9.0 \text{ dB} = 23.9 \text{ dBm}$$

MIMO level:

There are two antennas built in the device therefore at MIMO the maximum power is:

$$p_{\text{MIMO}} = p_{\text{EIRP 1CH}} + 3 \text{ dB} = 23.9 \text{ dBm} + 3 \text{ dB} = 26.9 \text{ dBm}$$

Final result of this consideration:

$$p_{\text{EIRP all channels}} = 26.9 \text{ dBm} < 59.2 \text{ dBm} \text{ (FCC limit and ISED limit)}$$

The DUT doesn't exceed wheather the FCC limit nor the ISED limit.


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]


5.1.5 MEASUREMENT PLOT

FCC Plots

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Input power 0.3 dB < AGC

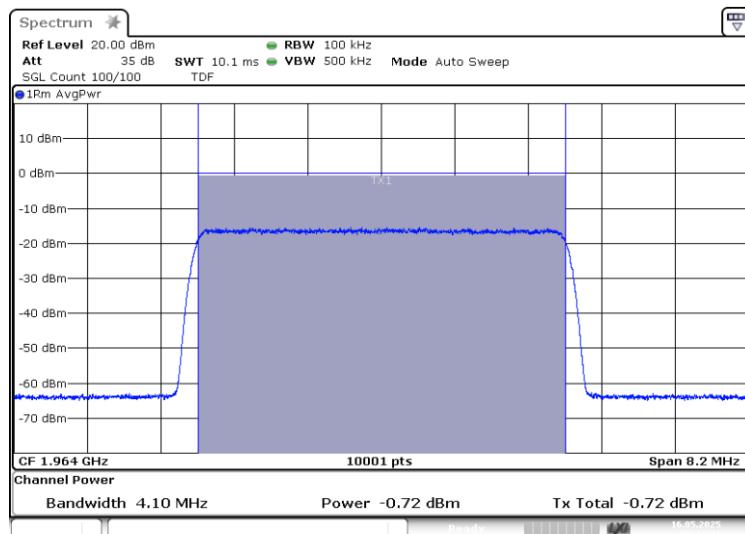

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Output power 0.3 dB < AGC

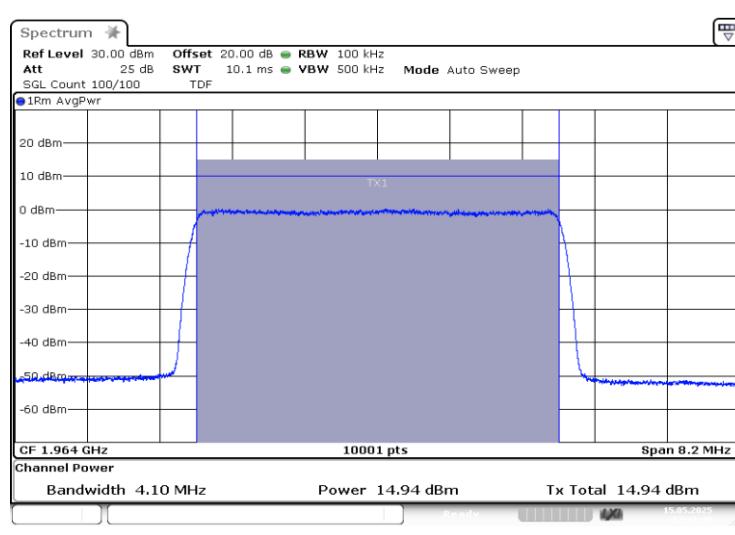

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Input power 3 dB > AGC

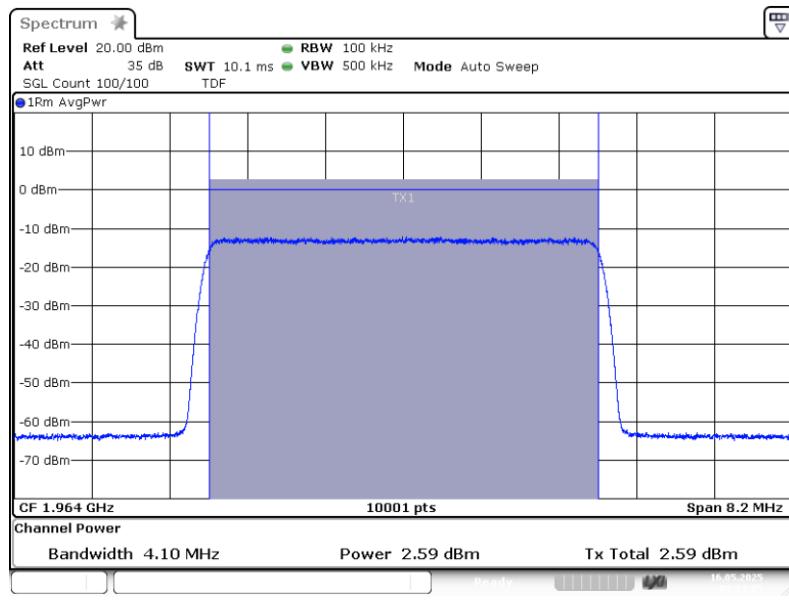

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Output power 3 dB > AGC

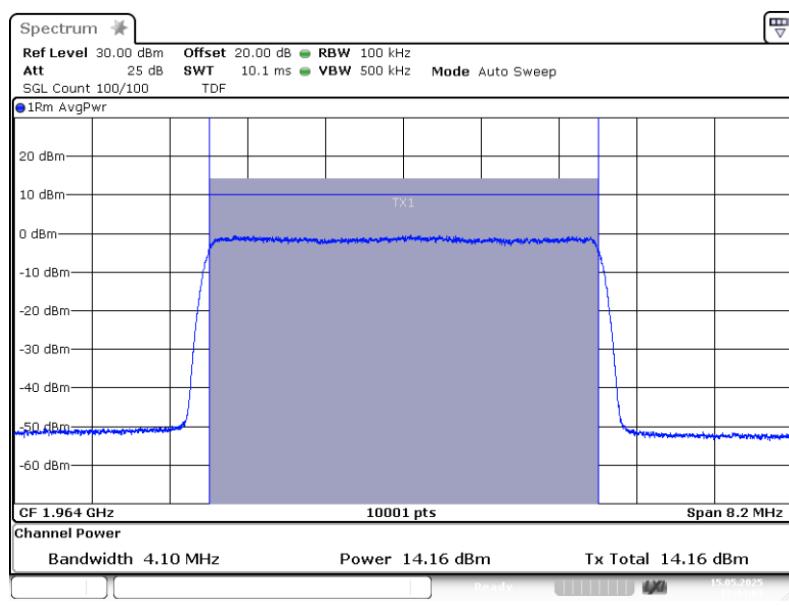

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Input power 0.3 dB < AGC

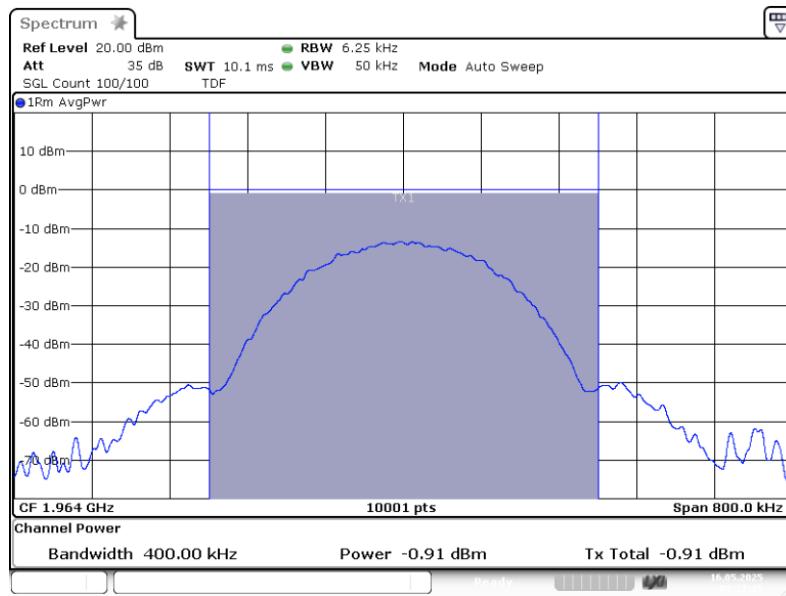

3.5.3 Power GSM In=0.3 1.96400G

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Output power 0.3 dB < AGC

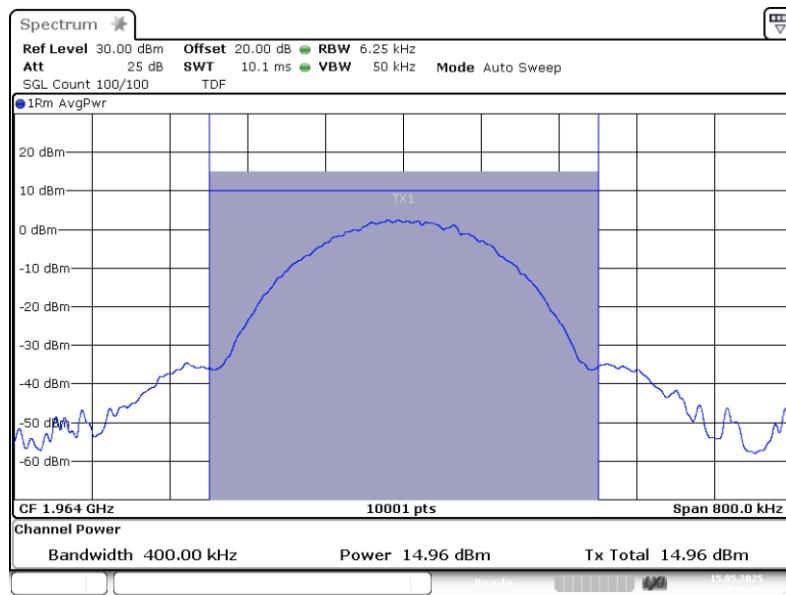

3.5.3 Power GSM Out -0.3 1.96400G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Input power 3 dB > AGC

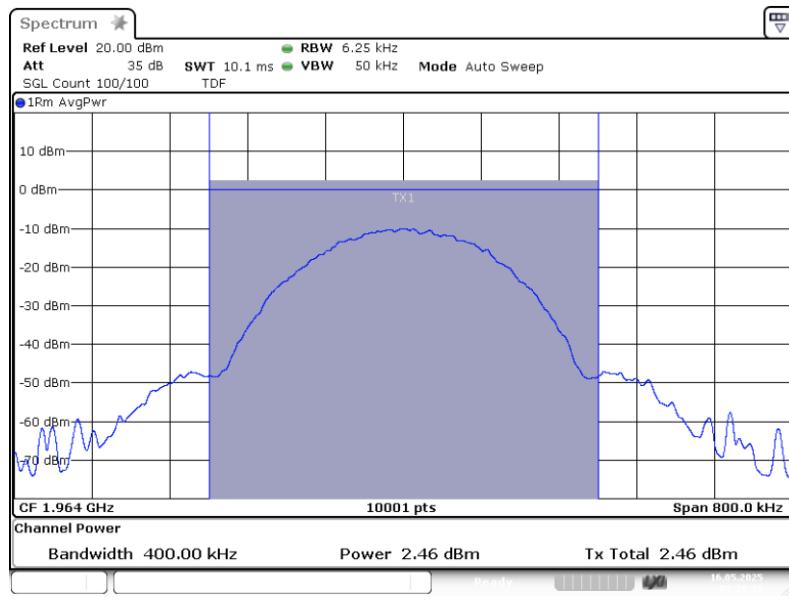

3.5.3 Power GSM In+3 1.96400G

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Output power 3 dB > AGC

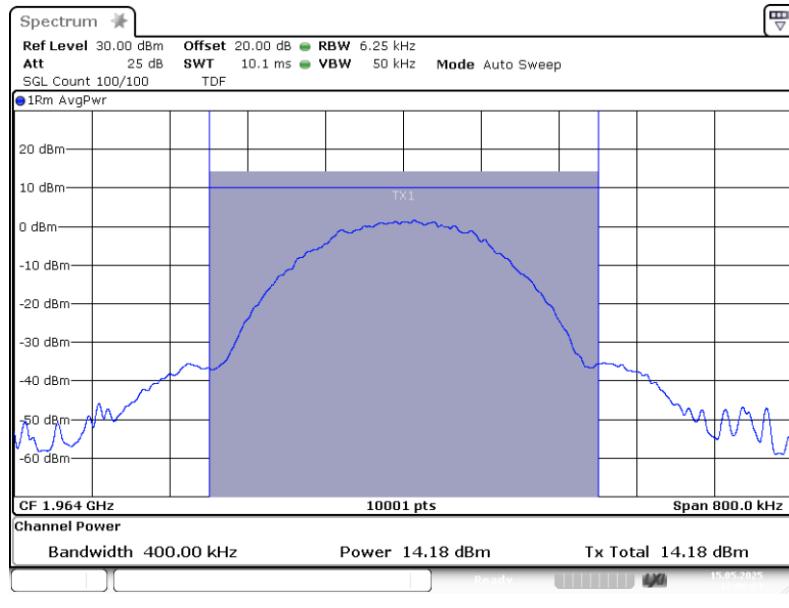

3.5.3 Power GSM Out +3 1.96400G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Input power 0.3 dB < AGC

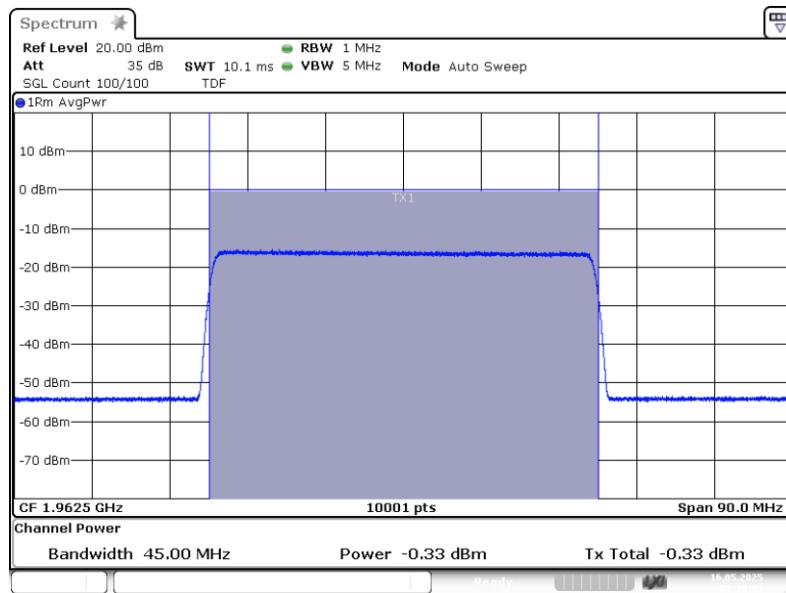

3.5.3 Power AWGN 45M In=0.3 1.96250G

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Output power 0.3 dB < AGC

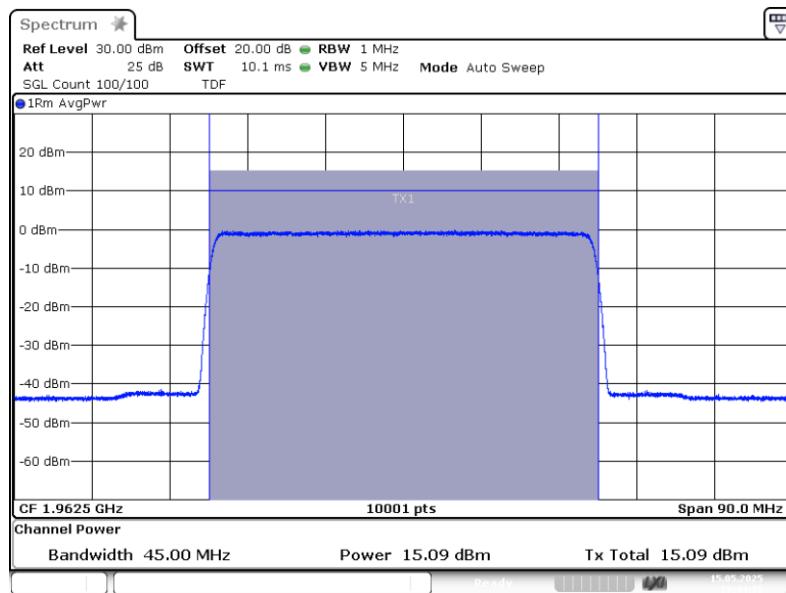

3.5.3 Power AWGN 45M Out =0.3 1.96250G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Input power 3 dB > AGC

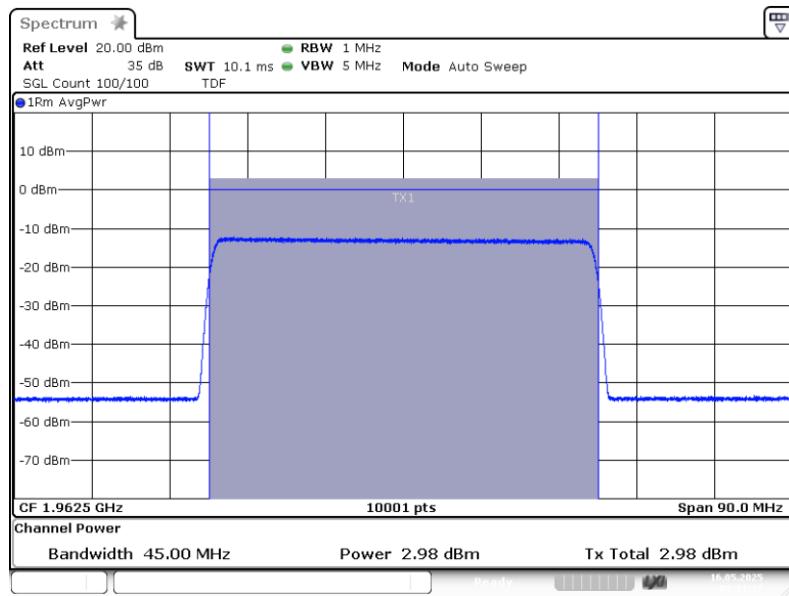

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Output power 3 dB > AGC

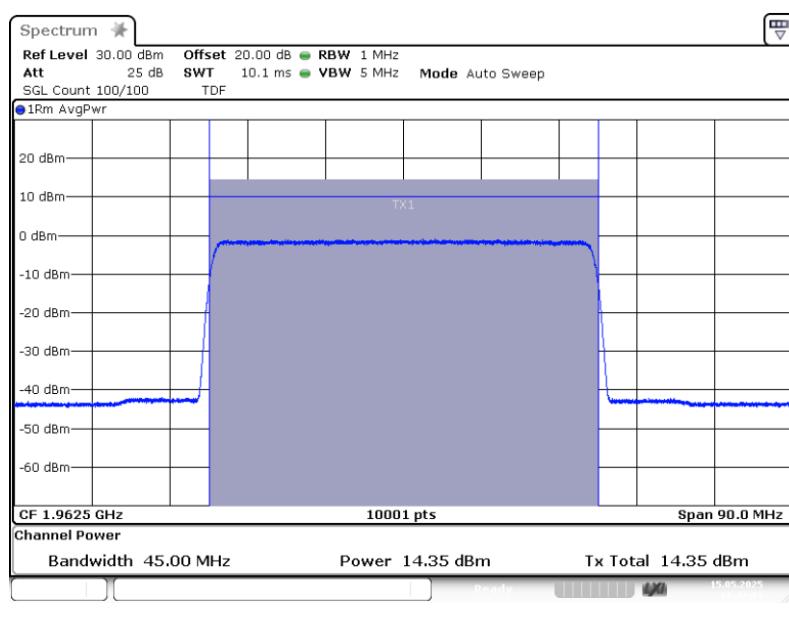

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

ISED Plots

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Input power 0.3 dB < AGC

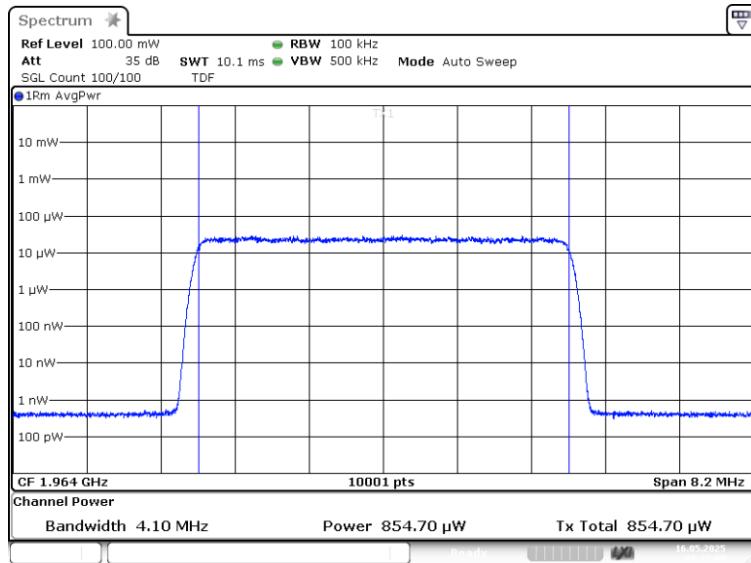

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Output power 0.3 dB < AGC

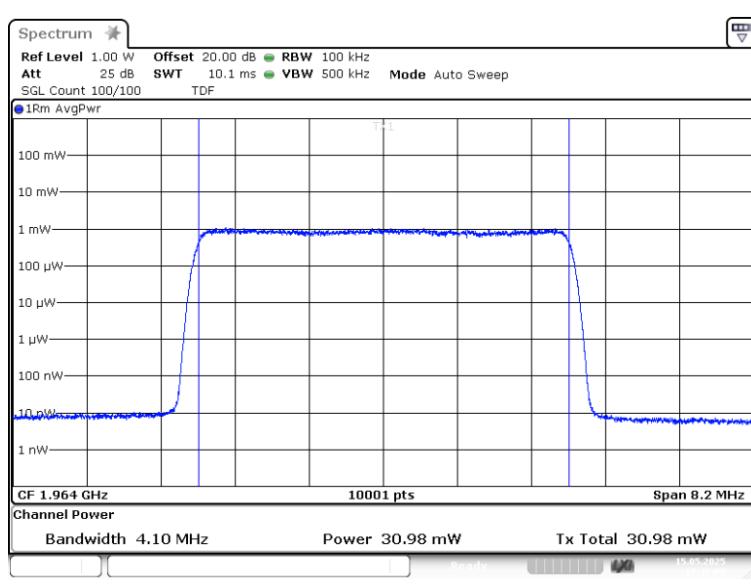

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Input power 3 dB > AGC

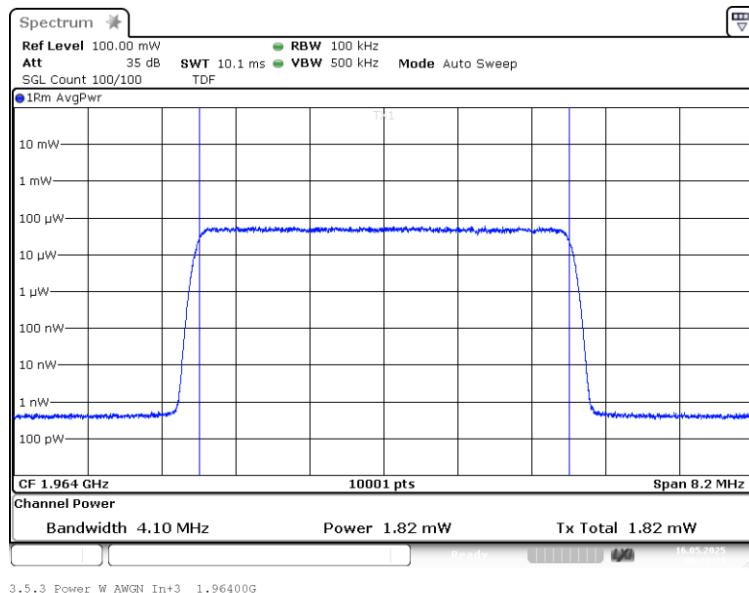

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
Output power 3 dB > AGC

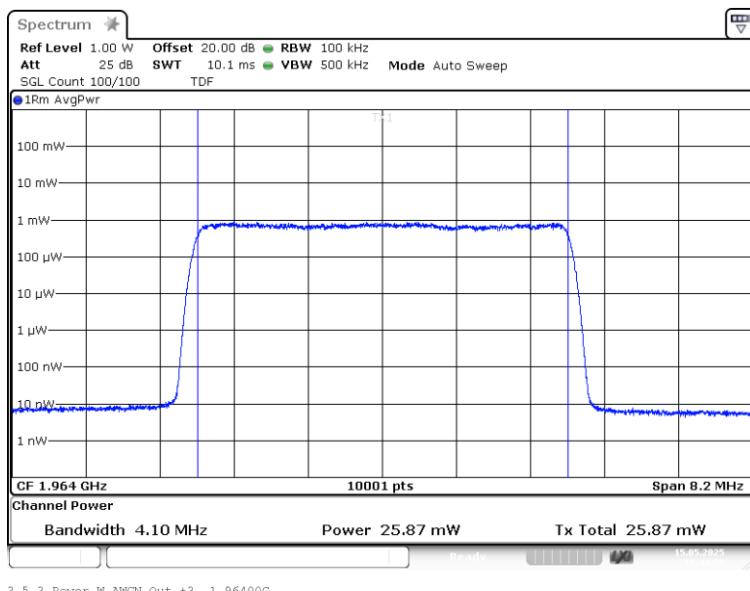

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Input power 0.3 dB < AGC

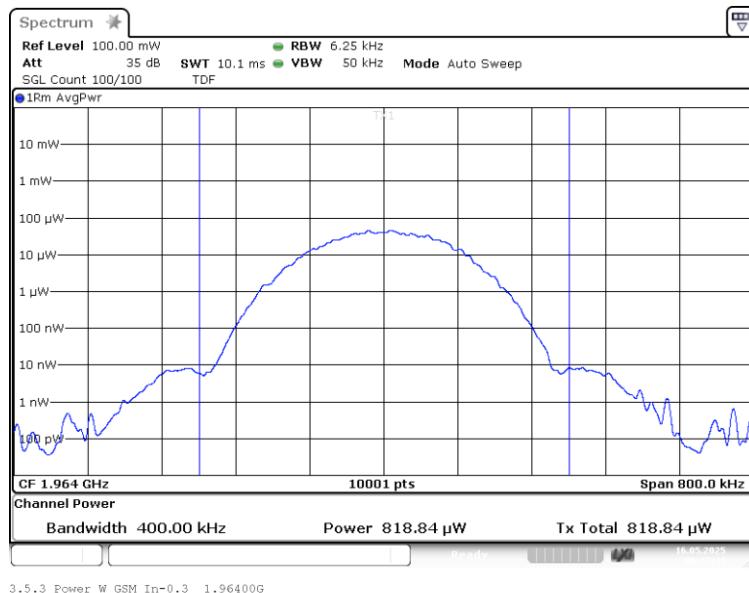

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Output power 0.3 dB < AGC

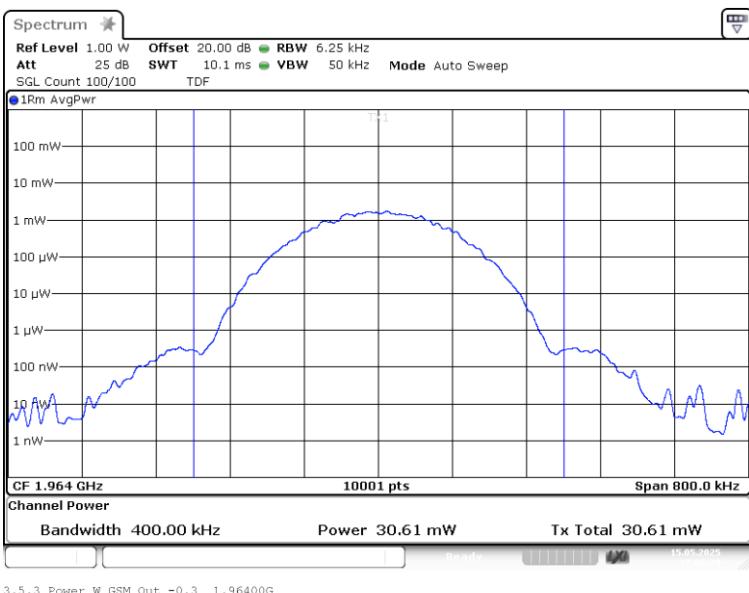

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Input power 3 dB > AGC

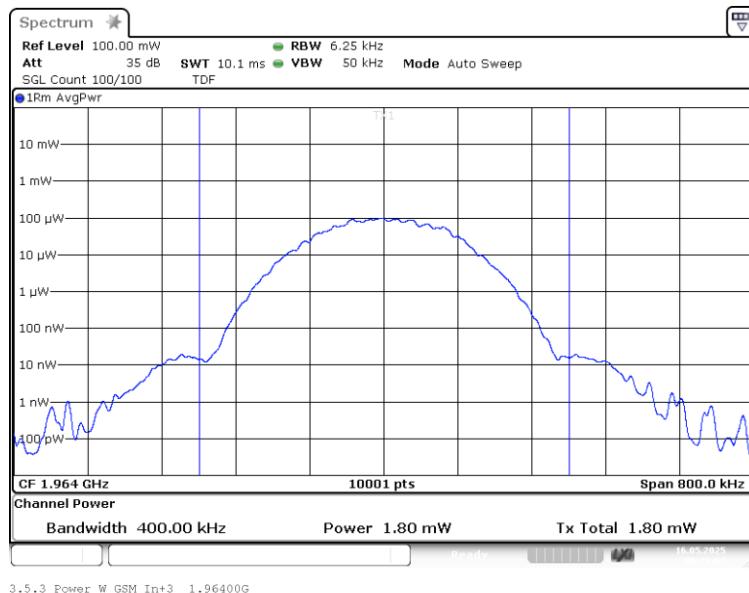

3.5.3 Power_W GSM In+3 1.96400G

Band: PCS 1900, ANTENNA 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
Output power 3 dB > AGC

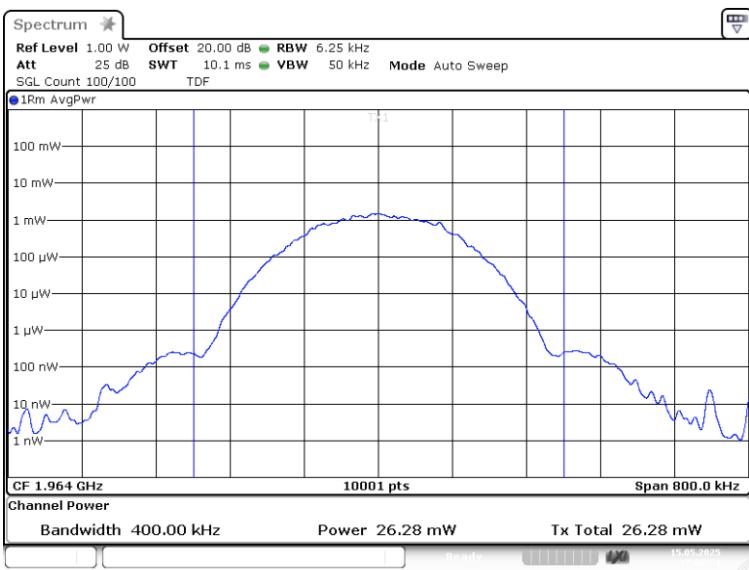

3.5.3 Power_W GSM Out +3 1.96400G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Input power 0.3 dB < AGC

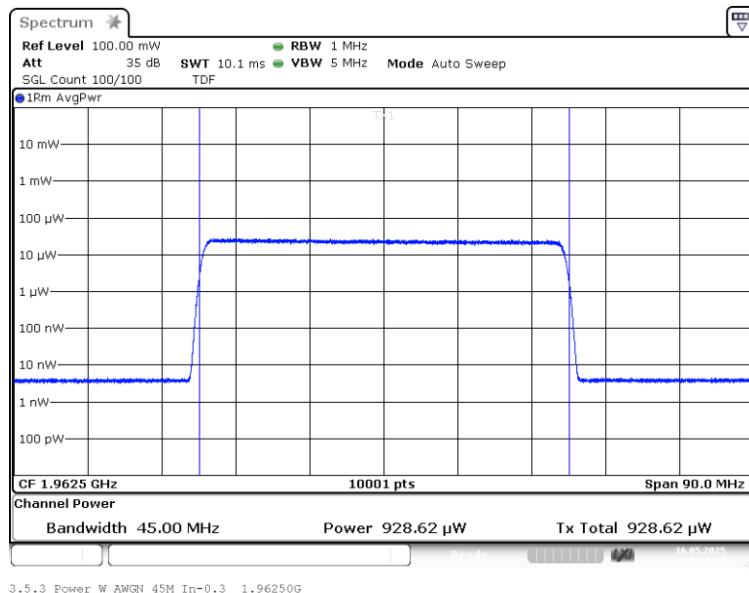

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Output power 0.3 dB < AGC

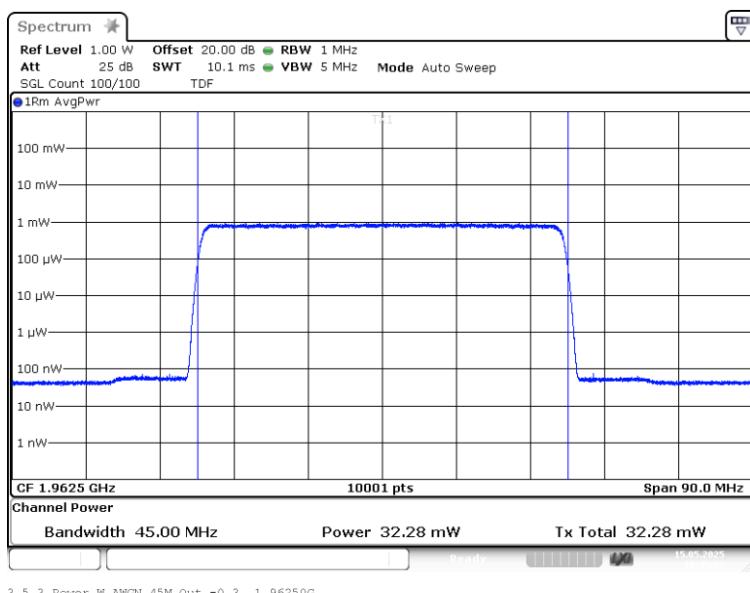

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Input power 3 dB > AGC

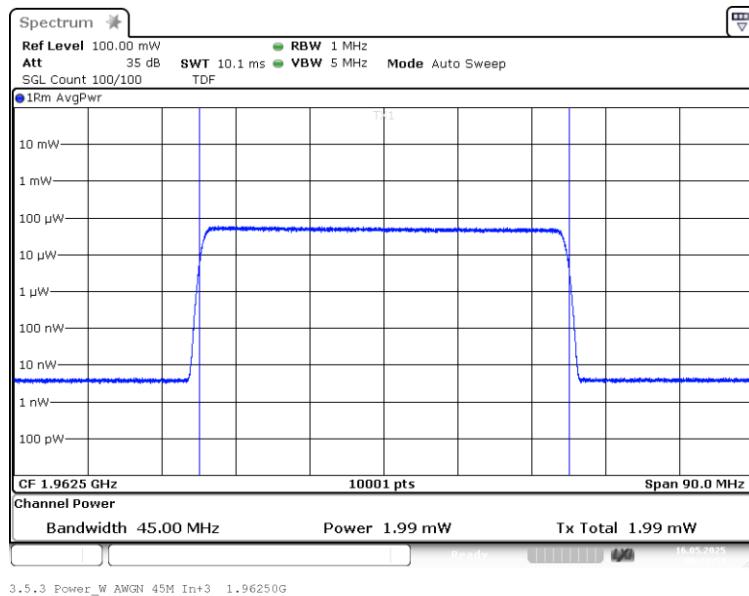

Band: PCS 1900, ANTENNA 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Output power 3 dB > AGC

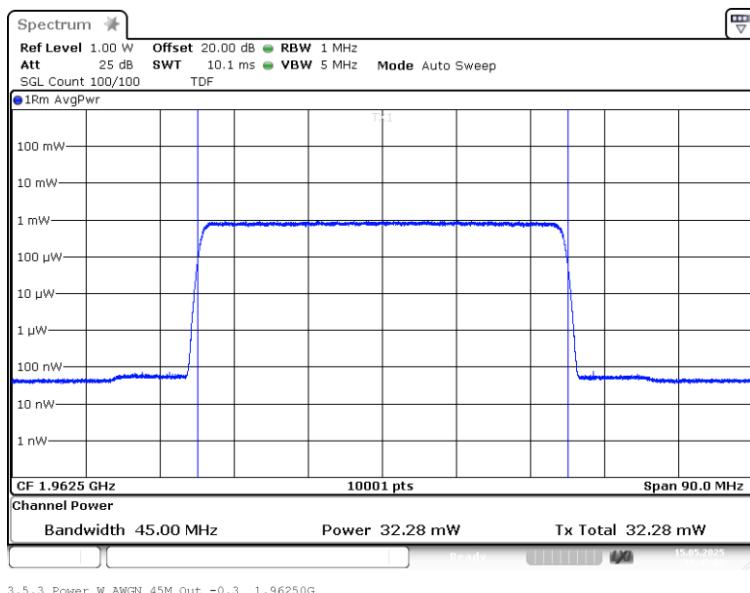

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

BUREAU
VERITAS

5.1.6 TEST EQUIPMENT USED

- Conducted

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.2 PEAK TO AVERAGE RATIO

Standard FCC Part 27, §27.50

The test was performed according to:

ANSI C63.26

Test date: 2025-05-15 – 2025-05-16


Environmental conditions: 24.0 °C; 26 % r. H./26.3 °C; 36 % r. H.

Test engineer: Thomas Hufnagel

5.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

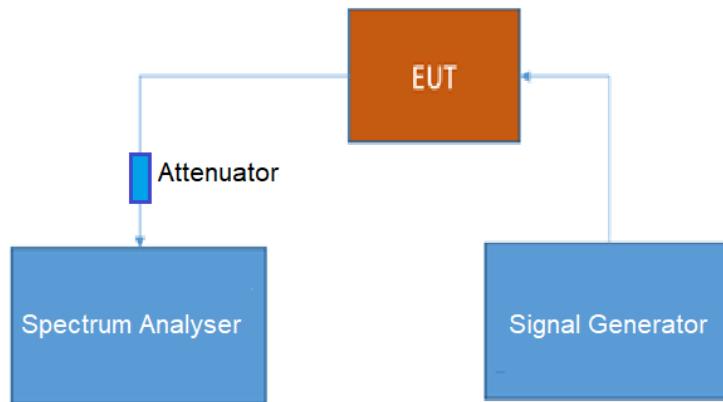

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.2.2 TEST REQUIREMENTS/LIMITS

Subpart E – Broadband PCS

§ 24.232

Abstract § 24.232 from FCC:

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Abstract RSS-133 from ISED:

RSS-133; 5.4 Transmitter Output Power

In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.2.3 TEST PROTOCOL

Band 25, 1930 MHz – 1995 MHz, downlink						
Signal type	Input power	Frequency [MHz]	Input power [dBm]	PAPR [dB]	Limit PAPR [dB]	Margin to limit [dB]
Wideband	0.3 dB < AGC	1964.0	-0.7	8.4	13.0	4.6
Wideband	3 dB > AGC	1964.0	2.6	8.4	13.0	4.6
Narrowband	0.3 dB < AGC	1964.0	-0.9	0.2	13.0	12.8
Narrowband	3 dB > AGC	1964.0	2.5	0.1	13.0	12.9
Wideband 5G	0.3 dB < AGC	1962.5	-0.3	8.4	13.0	4.6
Wideband 5G	3 dB > AGC	1962.5	3.0	8.4	13.0	4.6

Remark: Please see next sub-clause for the measurement plot.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

5.2.4 MEASUREMENT PLOT

Band: PCS 1900, Antenna 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
PAPR 0.3 dB < AGC

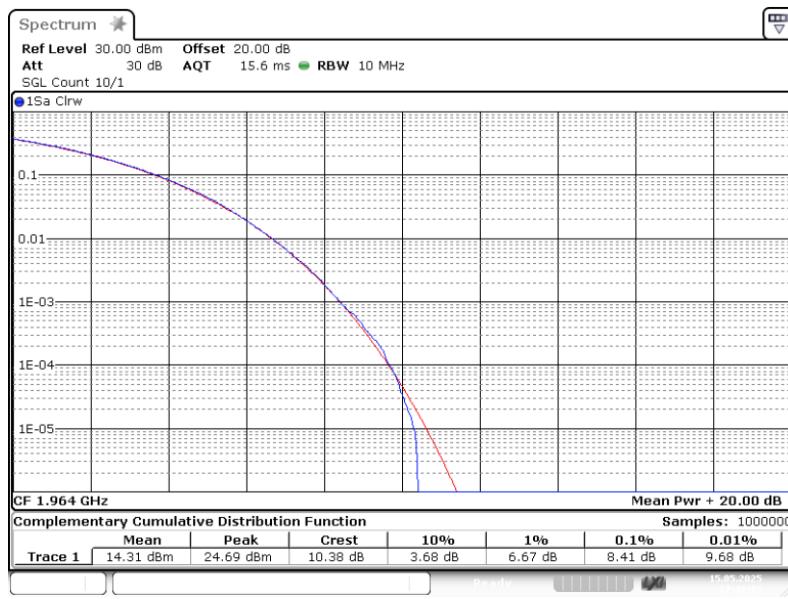

Band: PCS 1900, Antenna 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: AWGN;
PAPR 3 dB > AGC

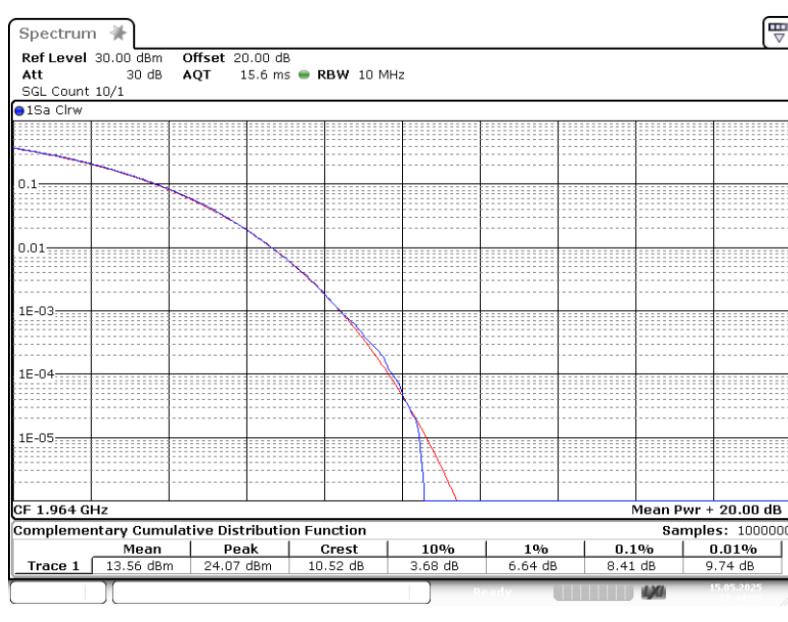

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
PAPR 0.3 dB < AGC

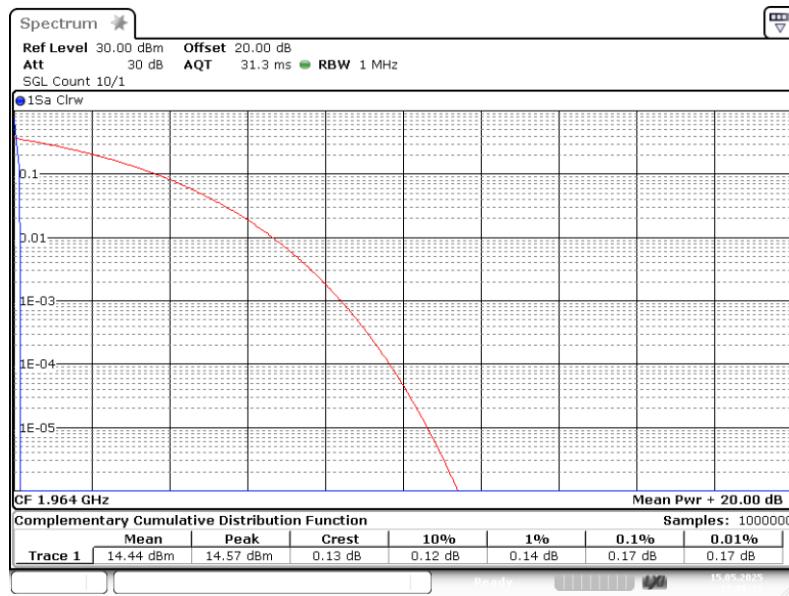

4.0 PAPR GSM Out -0.3 1.964G

Band: PCS 1900, Antenna 1; Frequency: 1.9640 GHz; Band edge: f0; Mod: GSM;
PAPR 3 dB > AGC

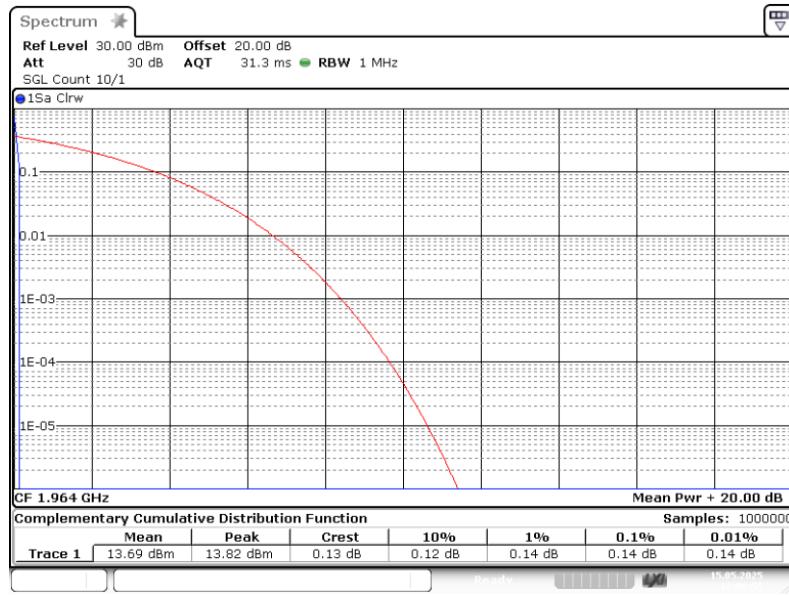

4.0 PAPR GSM Out +3 1.964G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
PAPR 0.3 dB < AGC

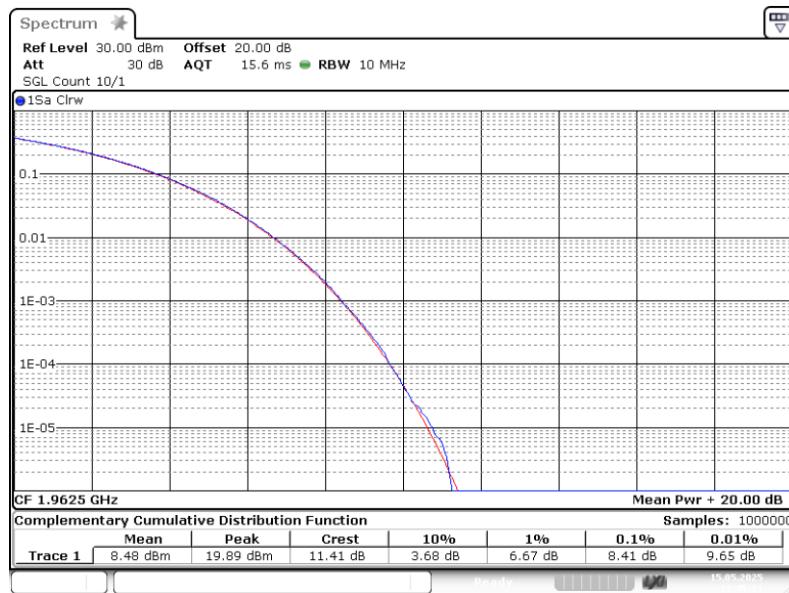

Band: PCS 1900, Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
PAPR 3 dB > AGC

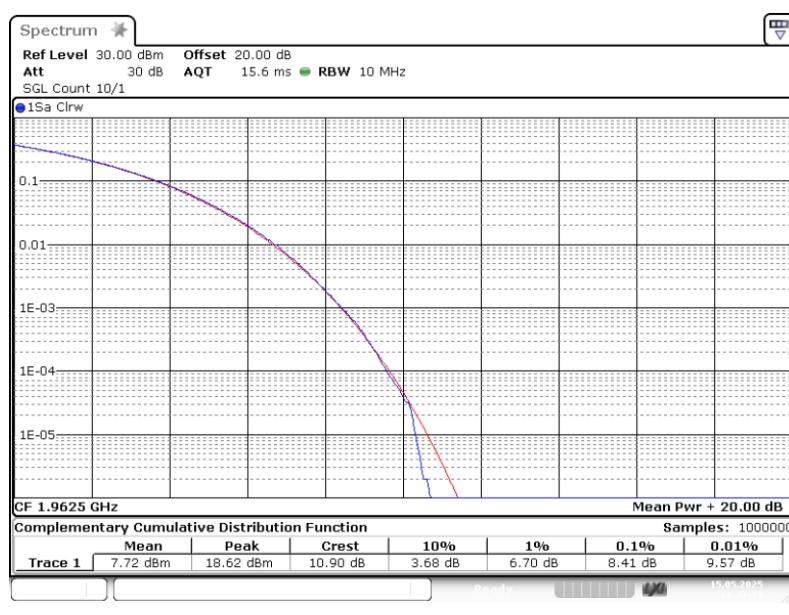

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.2.5 TEST EQUIPMENT USED

- Conducted

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.3 OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM

Standard FCC Part 2.1049; Occupied bandwidth

The test was performed according to:

ANSI C63.26, KDB 935210 D05 v01r04: 3.4

Test date: 2025-05-15 – 2025-05-16

Environmental conditions: 24.0 °C; 26 % r. H./26.3 °C; 36 % r. H.

Test engineer: Thomas Hufnagel


5.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the occupied bandwidth in comparison between the input and output signal of a booster.

The EUT was connected to the test setups according to the following diagram:



Test Setup step 1: Measuring characteristics of test signals

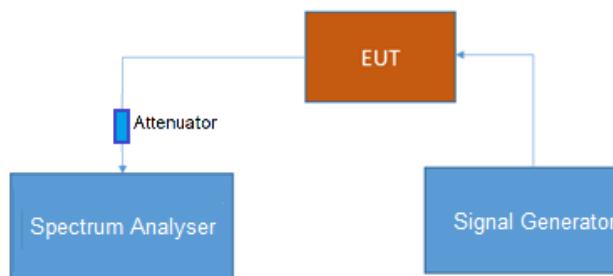

Test Setup step 2; Occupied Bandwidth/Input-versus-output spectrum

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.3.2 TEST REQUIREMENTS/LIMITS

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.3 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

Abstract RSS-GEN from ISED:

RSS-GEN; 6.7 Occupied Bandwidth

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the "x dB bandwidth" is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

RSS-131; 9.2 Input-versus-output spectrum

The spectral growth of the 26 dB bandwidth of the output signal shall be less than 5% of the input signal spectrum.

5.3.3 TEST PROTOCOL

Band 25, 1930 MHz – 1995 MHz, downlink							
Signal type	Input power	Signal frequency [MHz]	Occupied bandwidth SG [kHz]	Occupied bandwidth booster [kHz]	Delta occupied bandwidth [kHz]	Limit delta occupied bandwidth [kHz]	Margin to limit [kHz]
Wideband	0.3 dB < AGC	1962.5	4386.6	4386.6	0.0	205.0	205.0
Wideband	3 dB > AGC	1962.5	4387.8	4388.4	0.6	205.0	204.4
Narrowband	0.3 dB < AGC	1962.5	314.7	316.4	1.7	10.0	8.3
Narrowband	3 dB > AGC	1962.5	317.6	314.2	3.4	10.0	6.6
Wideband 5G	0.3 dB < AGC	1962.5	46106.9	46012.4	94.5	1195.0	1100.5
Wideband 5G	3 dB > AGC	1962.5	46052.9	46046.2	6.7	1195.0	1188.3


Remark: Please see next sub-clause for the measurement plot.

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]


5.3.4 MEASUREMENT PLOT

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN;
Input OCBw 0.3 dB < AGC

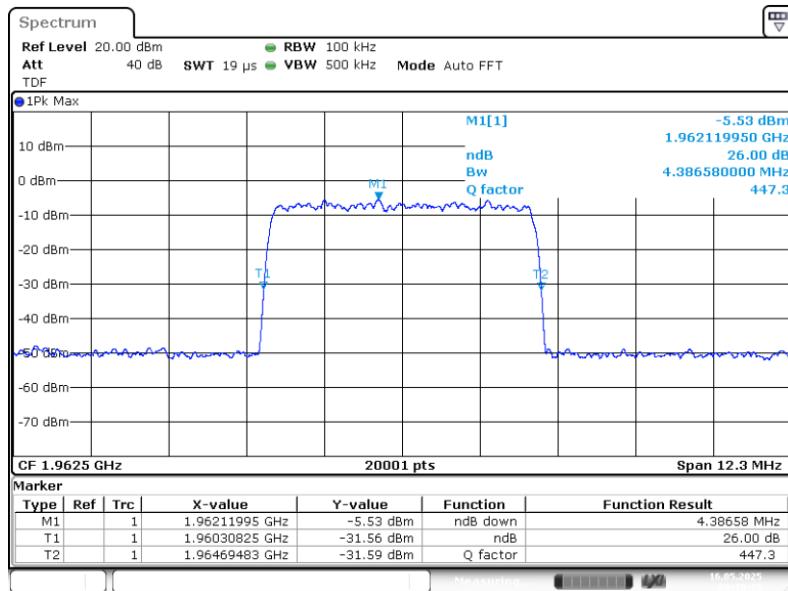

3.4 OCBw AWGN In-0.3 1.9625G _26dB

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN;
Output OCBw 0.3 dB < AGC

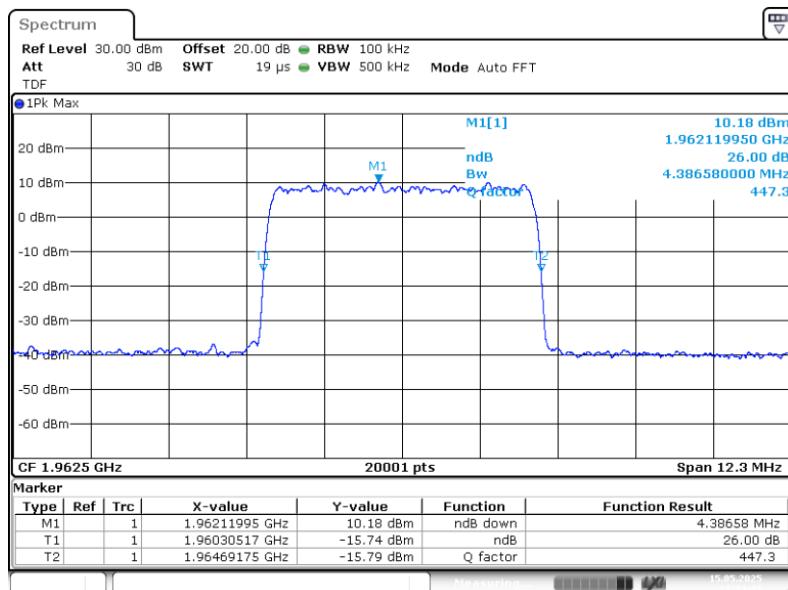

3.4 OCBw AWGN Out -0.3 1.9625G _26dB

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN;
Input OCBw 3 dB > AGC

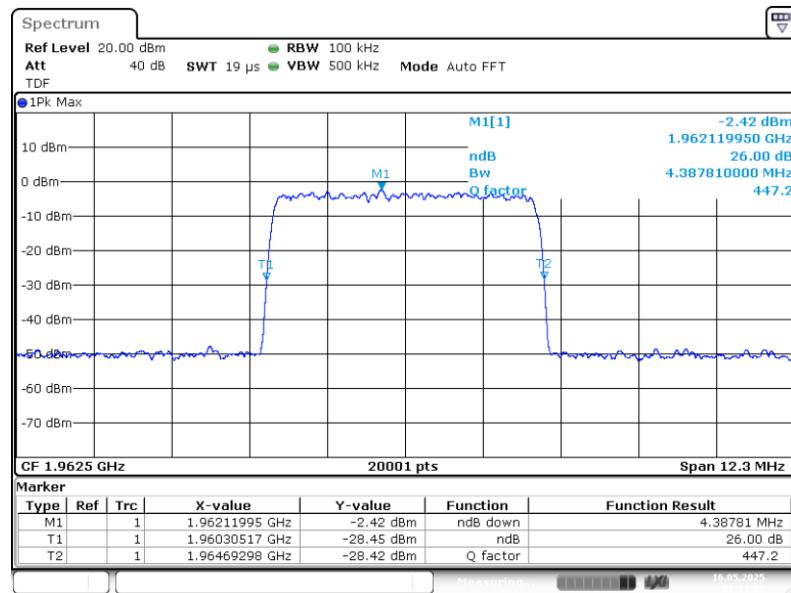

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN;
Output OCBw 3 dB > AGC

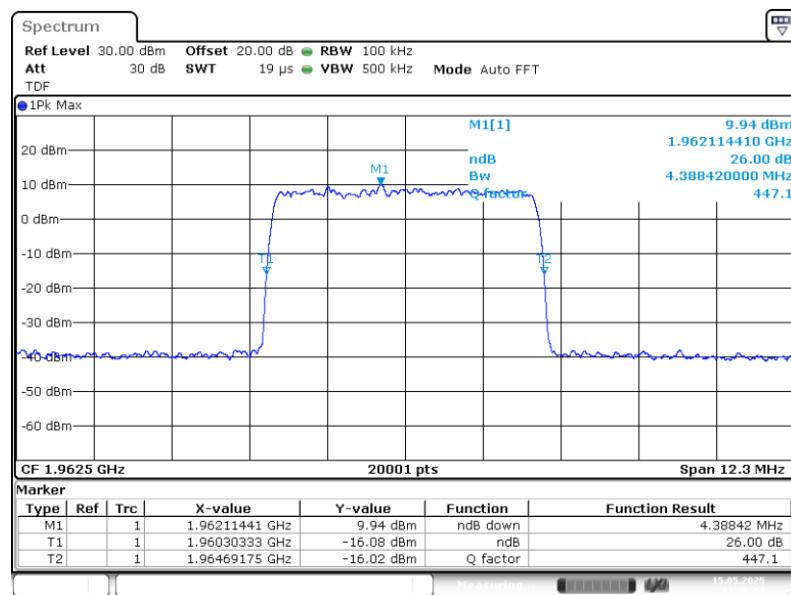

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: GSM;
Input OCBw 0.3 dB < AGC

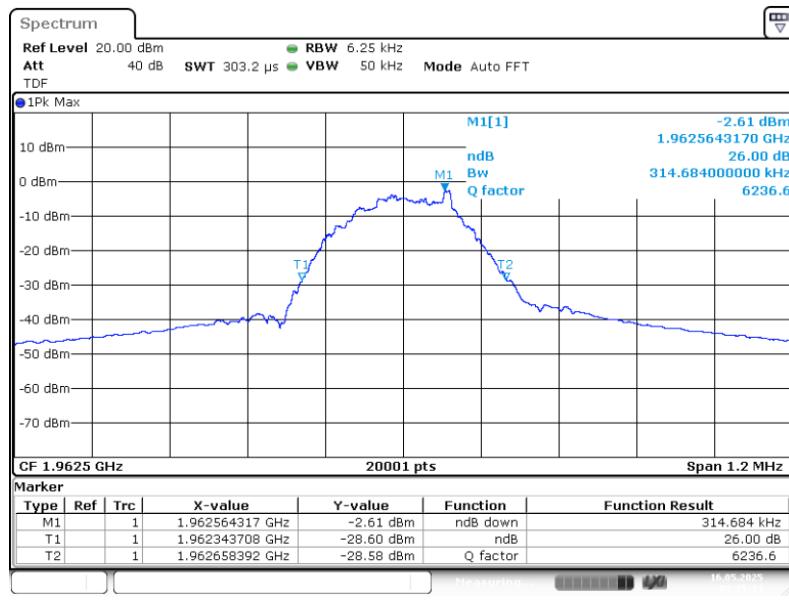

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: GSM;
Output OCBw 0.3 dB < AGC

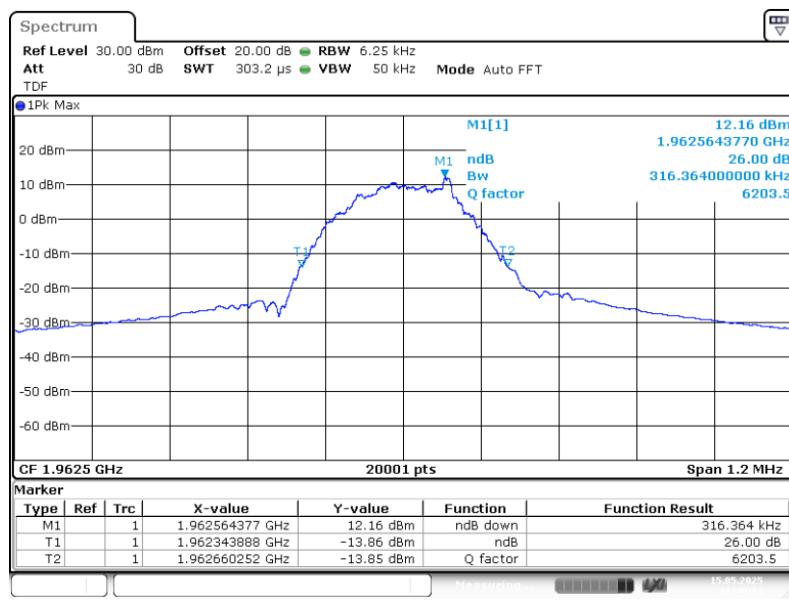

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: GSM;
Input OCBw 3 dB > AGC

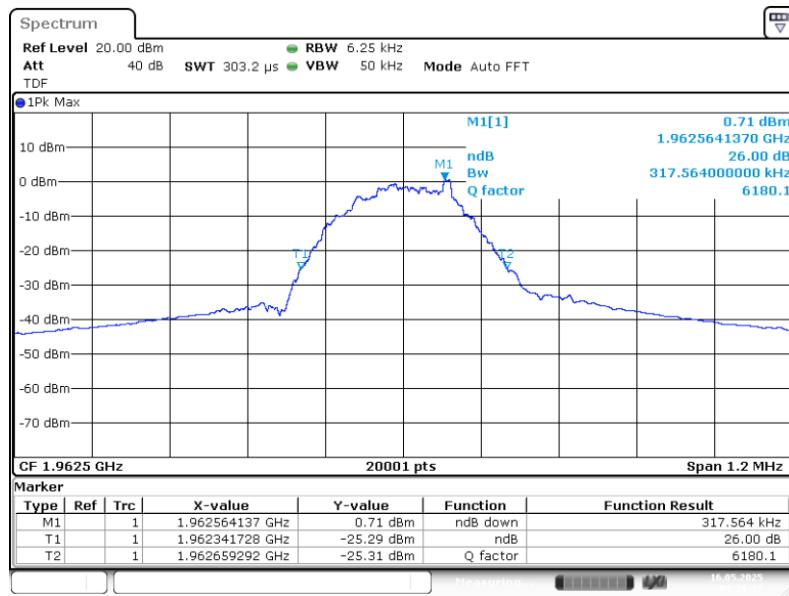

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: GSM;
Output OCBw 3 dB > AGC

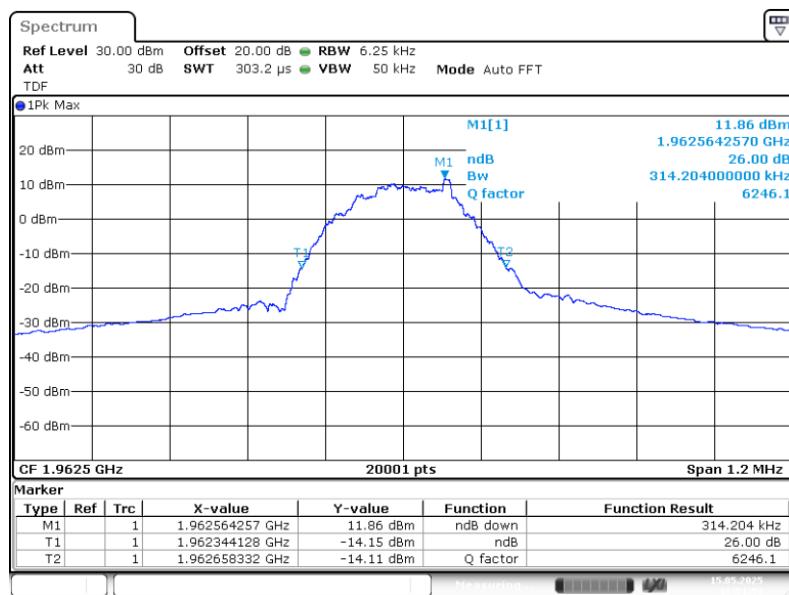

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Input OCBw 0.3 dB < AGC

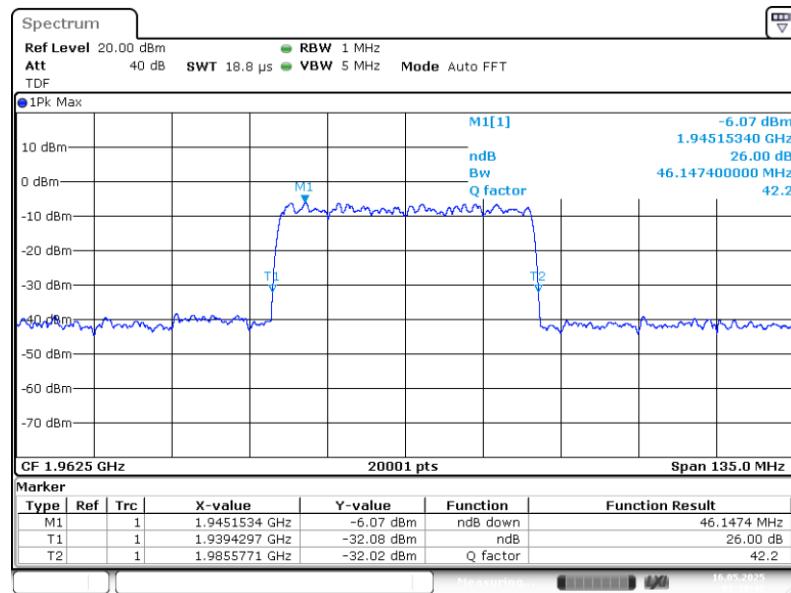

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M;
Output OCBw 0.3 dB < AGC

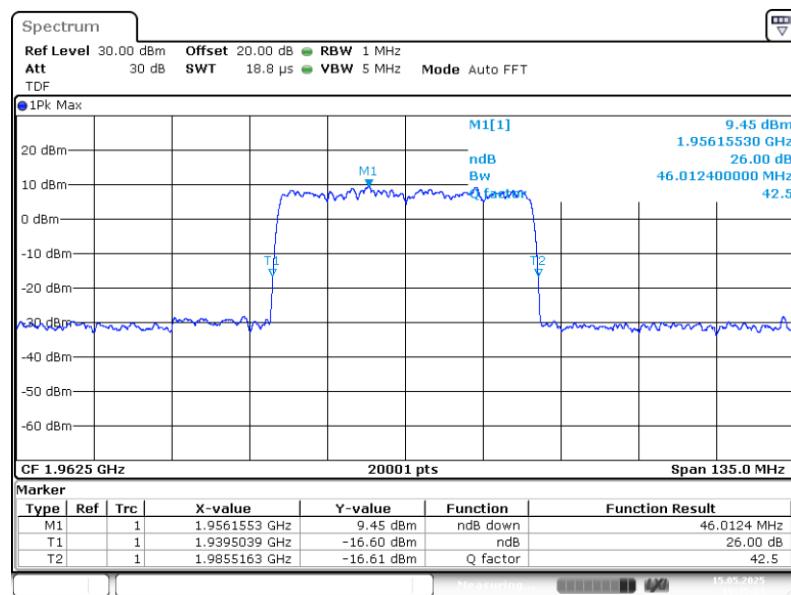

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M; Input OCBw 3 dB > AGC

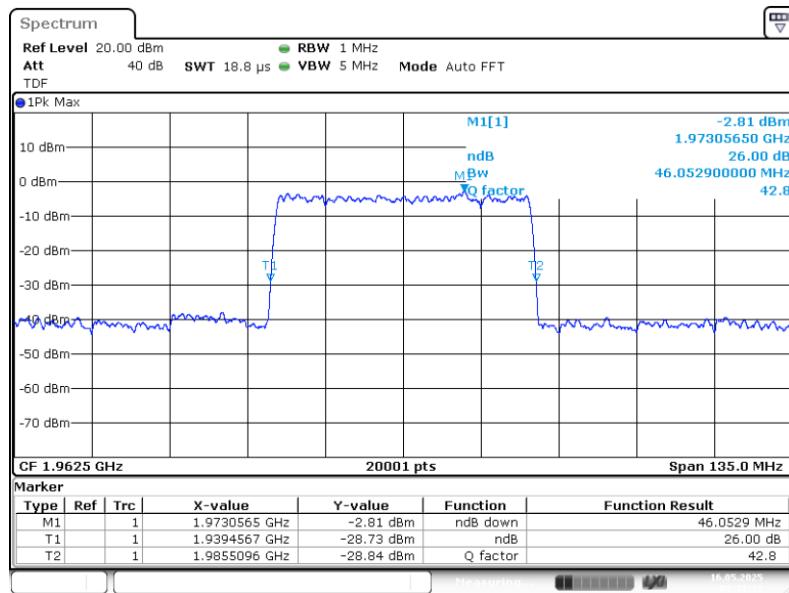

Band: PCS 1900 Antenna 1; Frequency: 1.9625 GHz; Band edge: mid; Mod: AWGN 45M; Output OCBw 3 dB > AGC

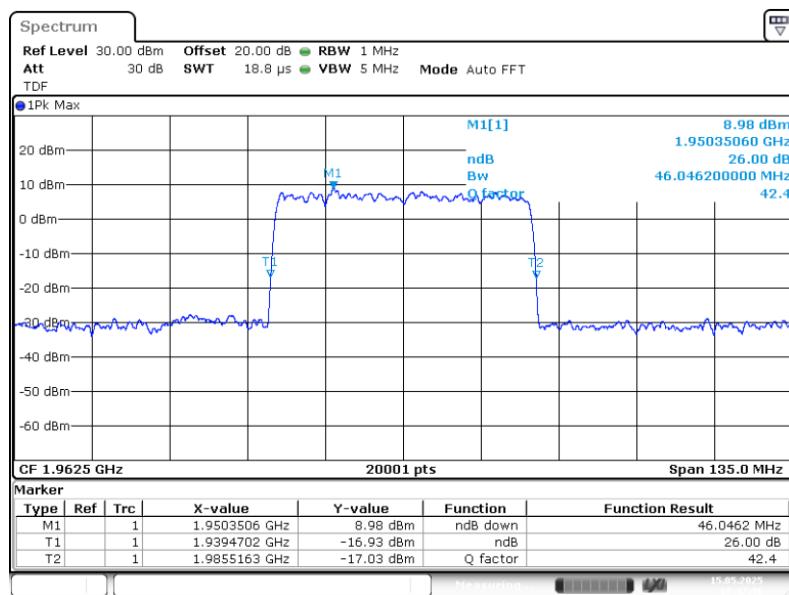

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.3.5 TEST EQUIPMENT USED

- Conducted

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

BUREAU
VERITAS

5.4 CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Standard FCC Part §2.1051, §27.53

The test was performed according to:

ANSI C63.26

Test date: 2025-05-15 – 2025-05-16


Environmental conditions: 24.0 °C; 26 % r. H./26.3 °C; 36 % r. H.

Test engineer: Thomas Hufnagel

5.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

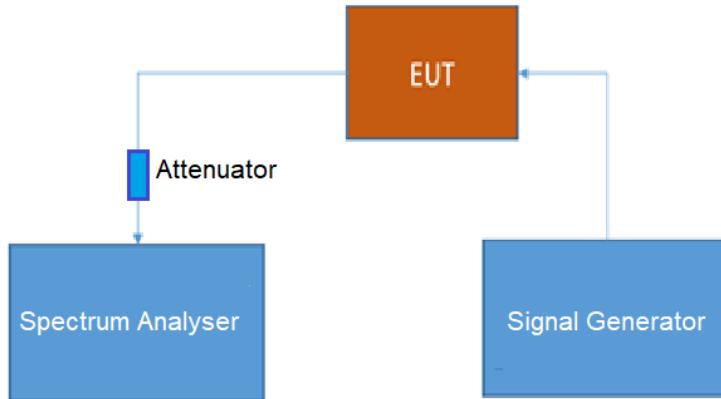

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.4.2 TEST REQUIREMENTS/LIMITS

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 24, Subpart E – Cellular Radiotelephone Service

Abstract § 24.238 FCC:

§ 24.238 Emission limitations for cellular equipment.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Abstract RSS-133 from ISED

RSS-133; 5.6 Unwanted Emission Limits

Unwanted emissions shall be measured in terms of average values while the transmitter is operating at the manufacturer's rated power and modulated as specified in RSS-Gen.

Equipment shall meet the unwanted emission limits, specified in table 3, outside each frequency block group. For each channel bandwidth supported by the equipment under test, the unwanted emissions shall be measured and reported for two channel frequencies: one located as close as possible to the low end and one located as close as possible to the high end of the equipment's operating frequency range.

For the unwanted emission limits, in the 1 MHz bands immediately outside and adjacent to the frequency block group, the power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth (OBW). Beyond these 1 MHz bands, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth may be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% of the OBW, as applicable.

For all equipment, the TRP or total conducted power (sum of conducted power across all antenna connectors), where applicable, of the unwanted emissions outside the frequency block or frequency block group shall not exceed the limits shown in the table 3.

Table 3: Unwanted emission limits for all equipment

Offset frequency from the edge of the frequency block group (MHz)	Unwanted emission limit
≤ 1	-13 dBm/(1% of OBW)
> 1	-13 dBm/MHz

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.4.3 TEST PROTOCOL

General considerations concerning the limits:

The measuring bandwidth of 1 MHz is chosen for the wideband 1 and the narrowband. The limit here is at $p = -13 \text{ dBm}$

For the wideband 5G a bandwidth of 100 kHz is necessary. Therefore the limit here is -23 dBm , according to the given formula:

$$p_{RBW\text{reduced}} [\text{dBm}] = 10 * \log \left(\frac{RBW\text{reduced} [\text{kHz}]}{1000 \text{ kHz}} \right) + p_{RBW\text{ 1000 kHz}} [\text{dBm}]$$

Hereby "p" are the limit lines' values.

Remark: Please see next sub-clause for the measurement plot.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****Band 25, 1930 MHz – 1995 MHz, PCS 1900, downlink**

Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Wideband	0.00959	-75.5	RMS	1	-43.0	32.5
low	Wideband	0.21247	-67.4	RMS	10	-33.0	34.4
low	Wideband	953.8	-63.1	RMS	100	-23.0	40.1
low	Wideband	1599.9	-56.8	RMS	1000	-13.0	43.8
low	Wideband	1928.9	-60.7	RMS	100	-23.0	37.7
low	Wideband	2000.5	-66.7	RMS	100	-23.0	43.7
low	Wideband	3055.1	-52.5	RMS	1000	-13.0	39.5
low	Wideband	6925.6	-50.9	RMS	1000	-13.0	37.9
low	Wideband	19584.3	-51.1	RMS	1000	-13.0	38.1
low	Wideband	20267.7	-50.8	RMS	1000	-13.0	37.8
low	Wideband	30332.0	-51.3	RMS	1000	-13.0	38.3
low	Wideband	39988.8	-52.9	RMS	1000	-13.0	39.9
mid	Wideband	0.00943	-77.0	RMS	1	-43.0	34.0
mid	Wideband	0.07250	-68.1	RMS	10	-33.0	35.1
mid	Wideband	950.1	-63.8	RMS	100	-23.0	40.8
mid	Wideband	1789.8	-55.4	RMS	1000	-13.0	42.4
mid	Wideband	1928.8	-66.2	RMS	100	-23.0	43.2
mid	Wideband	1999.4	-66.5	RMS	100	-23.0	43.5
mid	Wideband	3055.6	-53.0	RMS	1000	-13.0	40.0
mid	Wideband	6955.6	-50.5	RMS	1000	-13.0	37.5
mid	Wideband	19520.8	-51.3	RMS	1000	-13.0	38.3
mid	Wideband	20293.2	-50.6	RMS	1000	-13.0	37.6
mid	Wideband	30020.5	-51.8	RMS	1000	-13.0	38.8
mid	Wideband	39974.8	-52.5	RMS	1000	-13.0	39.5
high	Wideband	0.00943	-76.1	RMS	1	-43.0	33.1
high	Wideband	0.27746	-69.2	RMS	10	-33.0	36.2
high	Wideband	953.2	-64.2	RMS	100	-23.0	41.2
high	Wideband	1813.3	-56.6	RMS	1000	-13.0	43.6
high	Wideband	1922.1	-67.0	RMS	100	-23.0	44.0
high	Wideband	1996.3	-65.3	RMS	100	-23.0	42.3
high	Wideband	3055.1	-53.0	RMS	1000	-13.0	40.0
high	Wideband	6856.6	-50.8	RMS	1000	-13.0	37.8
high	Wideband	19575.8	-51.2	RMS	1000	-13.0	38.2
high	Wideband	20294.7	-51.1	RMS	1000	-13.0	38.1
high	Wideband	30300.0	-51.3	RMS	1000	-13.0	38.3
high	Wideband	39994.7	-52.4	RMS	1000	-13.0	39.4

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****Band 25, 1930 MHz – 1995 MHz, PCS 1900, downlink**

Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Narrowband	0.01303	-81.0	RMS	1	-43.0	38.0
low	Narrowband	0.09249	-73.7	RMS	10	-33.0	40.7
low	Narrowband	950.5	-63.6	RMS	100	-23.0	40.6
low	Narrowband	1769.3	-55.4	RMS	1000	-13.0	42.4
low	Narrowband	1928.4	-64.0	RMS	100	-23.0	41.0
low	Narrowband	2003.4	-66.0	RMS	100	-23.0	43.0
low	Narrowband	3055.1	-53.1	RMS	1000	-13.0	40.1
low	Narrowband	6853.1	-50.9	RMS	1000	-13.0	37.9
low	Narrowband	19575.3	-51.2	RMS	1000	-13.0	38.2
low	Narrowband	20305.7	-50.4	RMS	1000	-13.0	37.4
low	Narrowband	30288.0	-51.2	RMS	1000	-13.0	38.2
low	Narrowband	39962.8	-52.7	RMS	1000	-13.0	39.7
mid	Narrowband	0.01123	-80.6	RMS	1	-43.0	37.6
mid	Narrowband	0.05250	-72.8	RMS	10	-33.0	39.8
mid	Narrowband	792.8	-64.2	RMS	100	-23.0	41.2
mid	Narrowband	1862.8	-55.3	RMS	1000	-13.0	42.3
mid	Narrowband	1928.5	-67.2	RMS	100	-23.0	44.2
mid	Narrowband	2000.4	-67.2	RMS	100	-23.0	44.2
mid	Narrowband	3055.6	-54.1	RMS	1000	-13.0	41.1
mid	Narrowband	6839.6	-50.8	RMS	1000	-13.0	37.8
mid	Narrowband	19979.3	-51.2	RMS	1000	-13.0	38.2
mid	Narrowband	20287.7	-50.6	RMS	1000	-13.0	37.6
mid	Narrowband	30305.5	-51.5	RMS	1000	-13.0	38.5
mid	Narrowband	39962.8	-53.0	RMS	1000	-13.0	40.0
high	Narrowband	0.01287	-80.0	RMS	1	-43.0	37.0
high	Narrowband	0.15248	-73.8	RMS	10	-33.0	40.8
high	Narrowband	949.4	-63.7	RMS	100	-23.0	40.7
high	Narrowband	1753.3	-56.5	RMS	1000	-13.0	43.5
high	Narrowband	1927.1	-66.7	RMS	100	-23.0	43.7
high	Narrowband	1996.1	-64.6	RMS	100	-23.0	41.6
high	Narrowband	3055.6	-52.4	RMS	1000	-13.0	39.4
high	Narrowband	6964.1	-50.5	RMS	1000	-13.0	37.5
high	Narrowband	19991.3	-51.0	RMS	1000	-13.0	38.0
high	Narrowband	20274.7	-50.8	RMS	1000	-13.0	37.8
high	Narrowband	30298.5	-51.2	RMS	1000	-13.0	38.2
high	Narrowband	39969.8	-52.4	RMS	1000	-13.0	39.4

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

**Test Report No.: 25-0094**

Tests performed on UAP-R [PCS 1900]

**BUREAU
VERITAS****Band 25, 1930 MHz – 1995 MHz, PCS 1900, downlink**

Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Wideband 5G	0.01029	-79.7	RMS	1	-43.0	36.7
low	Wideband 5G	0.05250	-73.8	RMS	10	-33.0	40.8
low	Wideband 5G	812.8	-63.7	RMS	100	-23.0	40.7
low	Wideband 5G	1600.4	-55.8	RMS	1000	-13.0	42.8
low	Wideband 5G	1922.2	-65.3	RMS	100	-23.0	42.3
low	Wideband 5G	2003.0	-66.5	RMS	100	-23.0	43.5
low	Wideband 5G	3055.6	-53.1	RMS	1000	-13.0	40.1
low	Wideband 5G	6866.6	-51.1	RMS	1000	-13.0	38.1
low	Wideband 5G	19997.7	-51.0	RMS	1000	-13.0	38.0
low	Wideband 5G	20289.7	-50.5	RMS	1000	-13.0	37.5
low	Wideband 5G	30282.5	-51.1	RMS	1000	-13.0	38.1
low	Wideband 5G	39933.3	-52.7	RMS	1000	-13.0	39.7
mid	Wideband 5G	0.01267	-80.4	RMS	1	-43.0	37.4
mid	Wideband 5G	0.14748	-73.7	RMS	10	-33.0	40.7
mid	Wideband 5G	706.3	-64.2	RMS	100	-23.0	41.2
mid	Wideband 5G	1788.8	-56.4	RMS	1000	-13.0	43.4
mid	Wideband 5G	1927.3	-66.0	RMS	100	-23.0	43.0
mid	Wideband 5G	1997.1	-66.2	RMS	100	-23.0	43.2
mid	Wideband 5G	3055.1	-52.0	RMS	1000	-13.0	39.0
mid	Wideband 5G	6907.1	-50.8	RMS	1000	-13.0	37.8
mid	Wideband 5G	19586.3	-51.2	RMS	1000	-13.0	38.2
mid	Wideband 5G	20329.2	-50.6	RMS	1000	-13.0	37.6
mid	Wideband 5G	30028.5	-51.4	RMS	1000	-13.0	38.4
mid	Wideband 5G	39996.3	-52.1	RMS	1000	-13.0	39.1
high	Wideband 5G	0.02975	-79.5	RMS	1	-43.0	36.5
high	Wideband 5G	0.06250	-72.7	RMS	10	-33.0	39.7
high	Wideband 5G	952.8	-62.9	RMS	100	-23.0	39.9
high	Wideband 5G	1600.4	-56.5	RMS	1000	-13.0	43.5
high	Wideband 5G	1924.7	-66.5	RMS	100	-23.0	43.5
high	Wideband 5G	2003.2	-66.5	RMS	100	-23.0	43.5
high	Wideband 5G	3055.1	-53.4	RMS	1000	-13.0	40.4
high	Wideband 5G	6859.6	-51.0	RMS	1000	-13.0	38.0
high	Wideband 5G	19969.3	-51.2	RMS	1000	-13.0	38.2
high	Wideband 5G	20026.2	-50.6	RMS	1000	-13.0	37.6
high	Wideband 5G	30302.0	-50.8	RMS	1000	-13.0	37.8
high	Wideband 5G	39978.7	-52.7	RMS	1000	-13.0	39.7


Remark: Please see next sub-clause for the measurement plot.

The test results relate only to the tested item. The sample has been provided by the client.


Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

5.4.4 MEASUREMENT PLOT

Frequency Band = PCS 1900, Antenna 1; Test frequency = low; Direction = RF downlink;
Signal type = Wideband

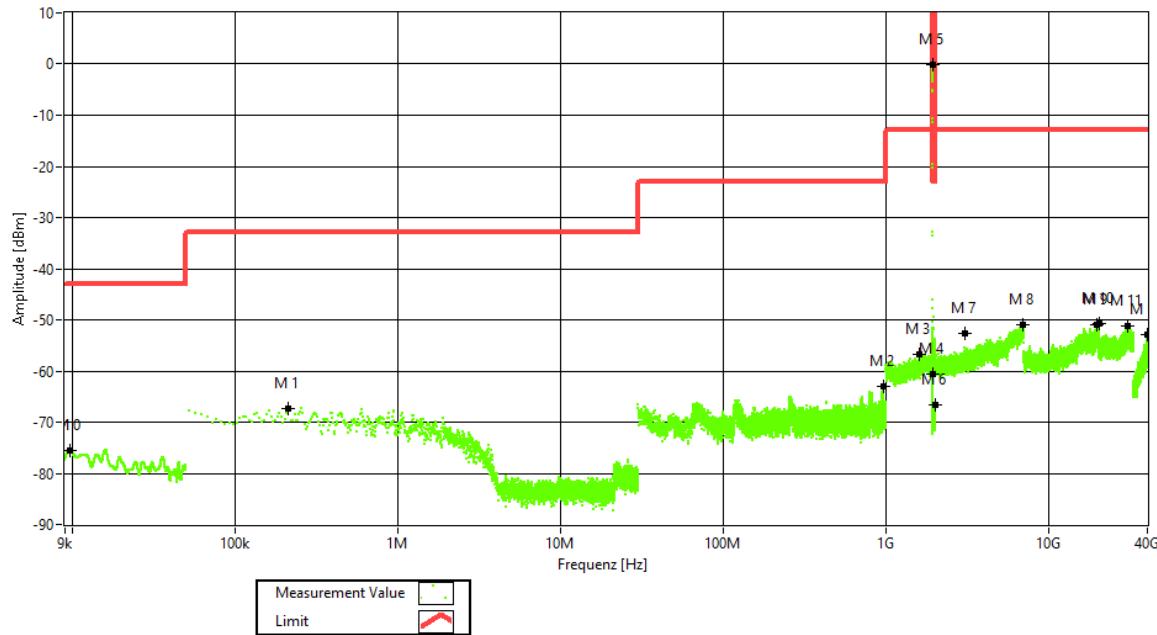


Frequency Band = PCS 1900, Antenna 1; Test frequency = mid; Direction = RF downlink;
Signal type = Wideband

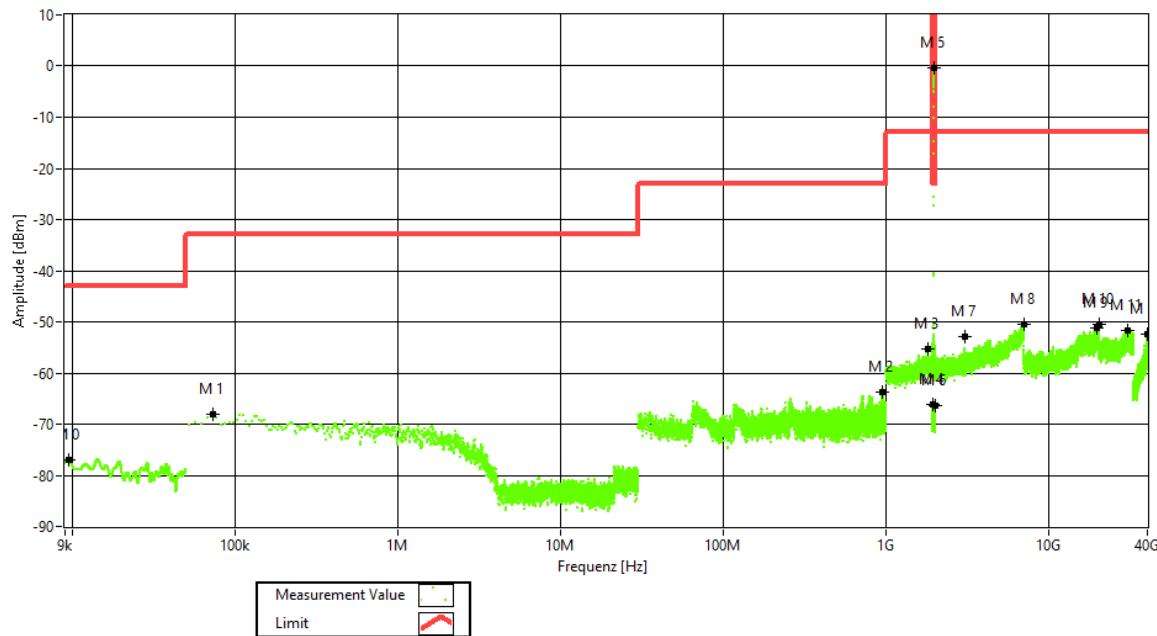

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Frequency Band = PCS 1900, Antenna 1; Test frequency = high; Direction = RF downlink;
Signal type = Wideband


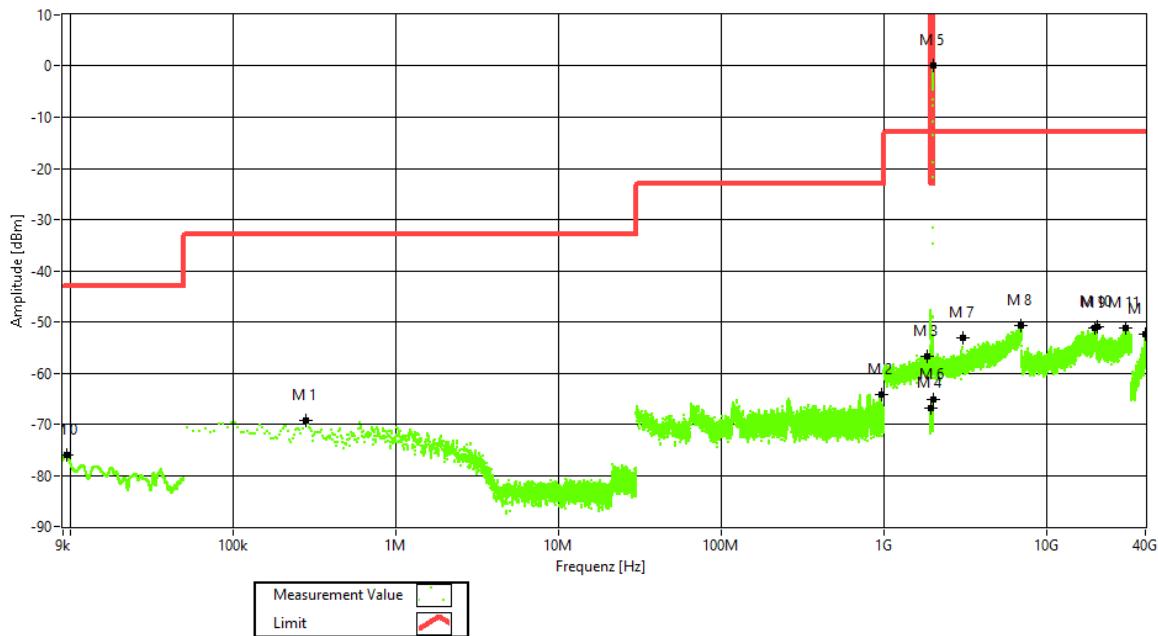


The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]


 BUREAU
VERITAS

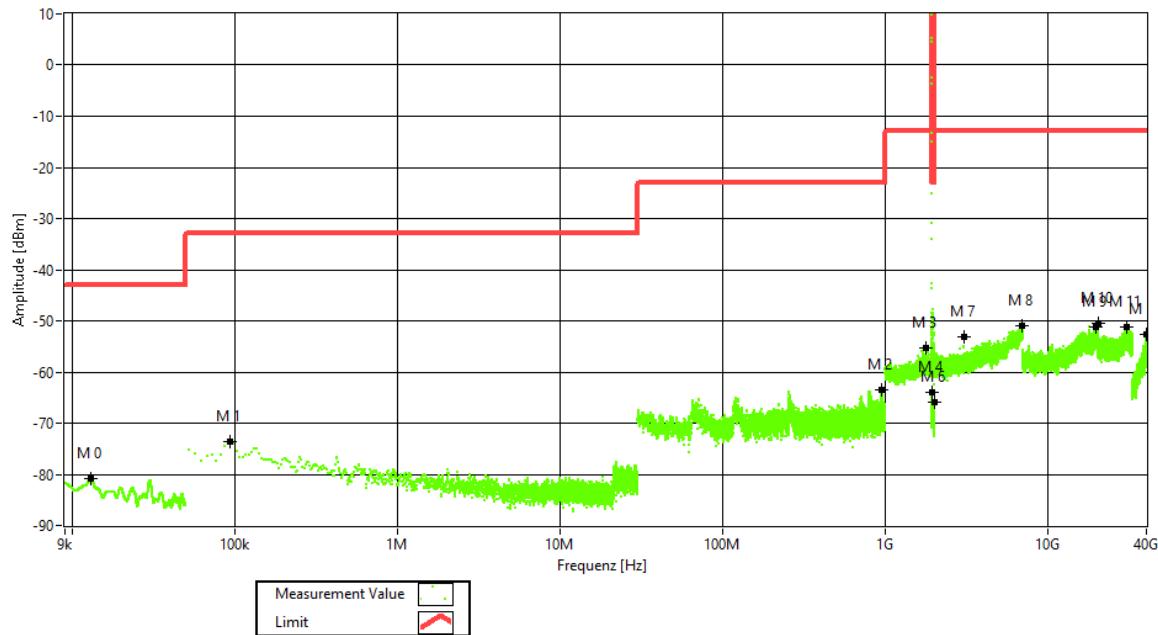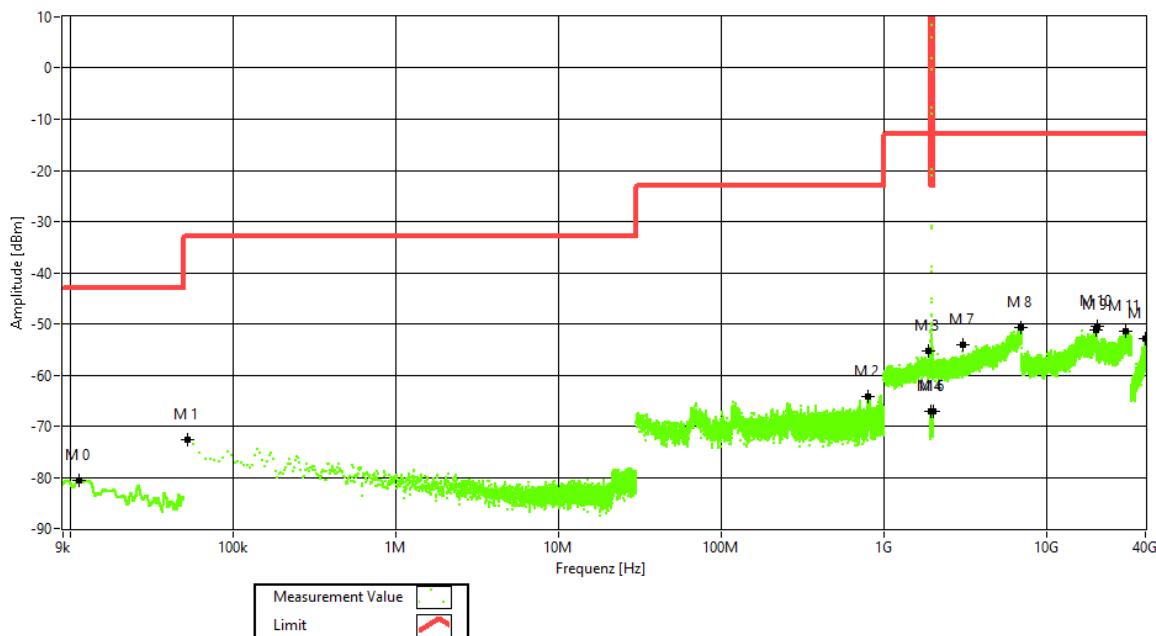 Frequency Band = PCS 1900, Antenna 1; Test frequency = low; Direction = RF downlink;
 Signal type = Narrowband

 Frequency Band = PCS 1900, Antenna 1; Test frequency = mid; Direction = RF downlink;
 Signal type = Narrowband


The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

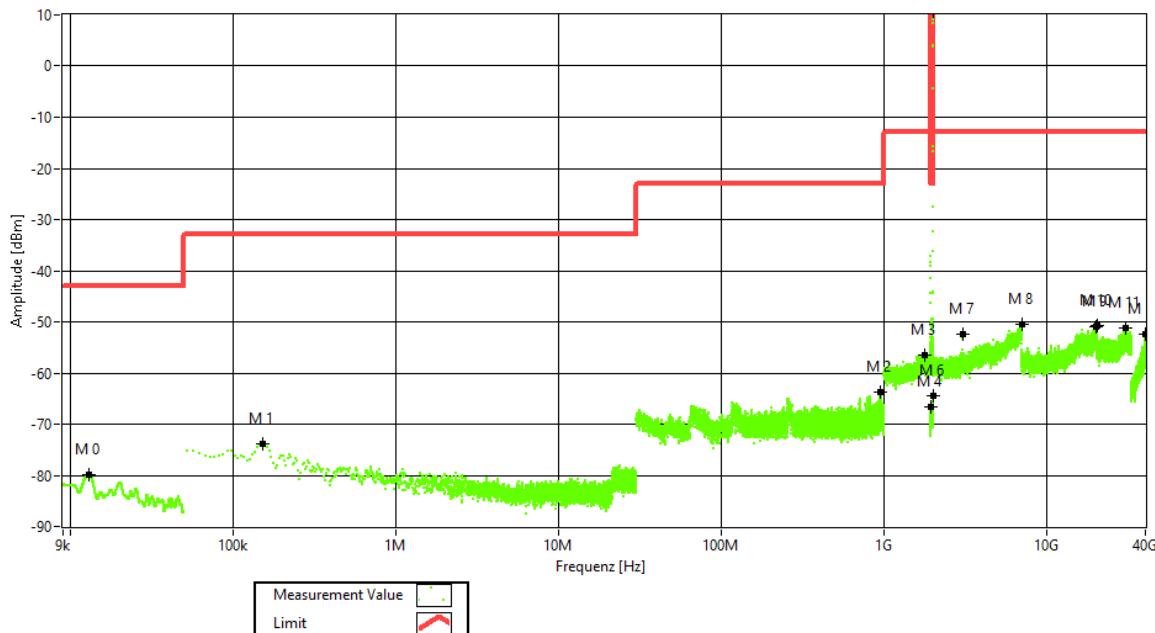Frequency Band = PCS 1900, Antenna 1; Test frequency = high; Direction = RF downlink;
Signal type = Narrowband




The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Frequency Band = PCS 1900, Antenna 1; Test frequency = low; Direction = RF downlink;
Signal type = Wideband 5G

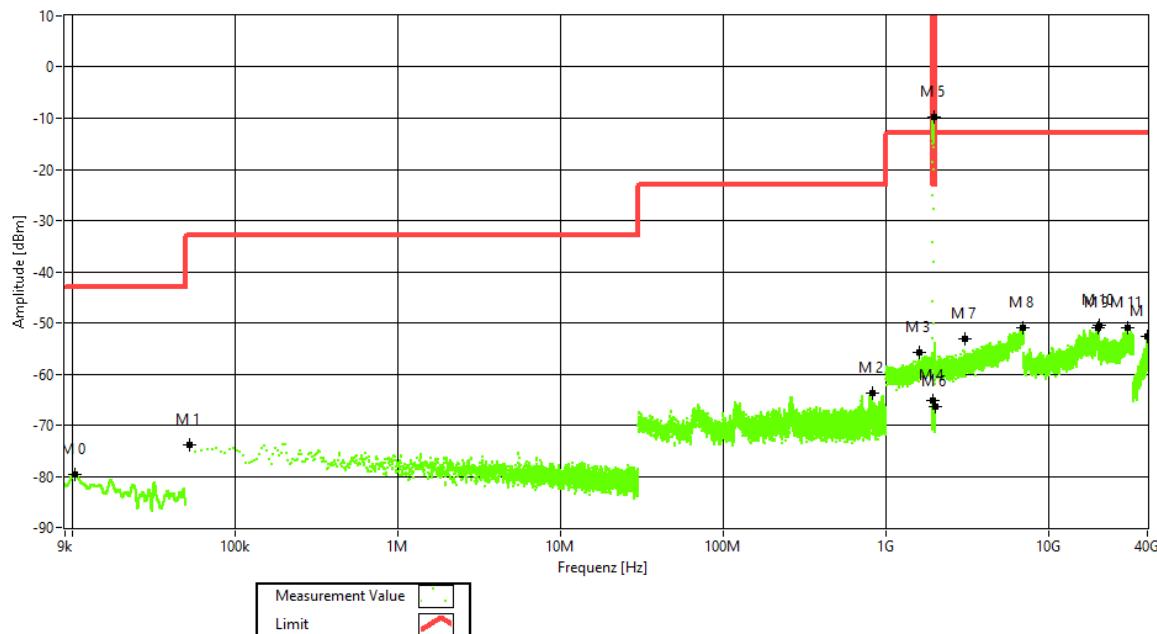

Frequency Band = PCS 1900, Antenna 1; Test frequency = mid; Direction = RF downlink;
Signal type = Wideband 5G

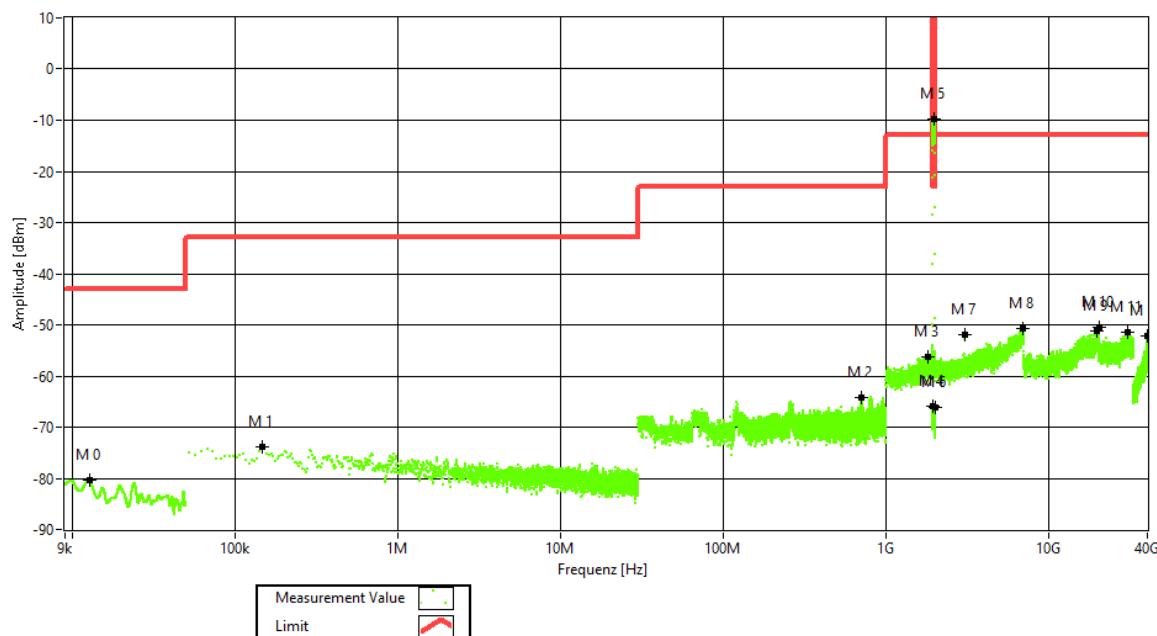


The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Frequency Band = PCS 1900, Antenna 1; Test frequency = high; Direction = RF downlink;
Signal type = Wideband 5G

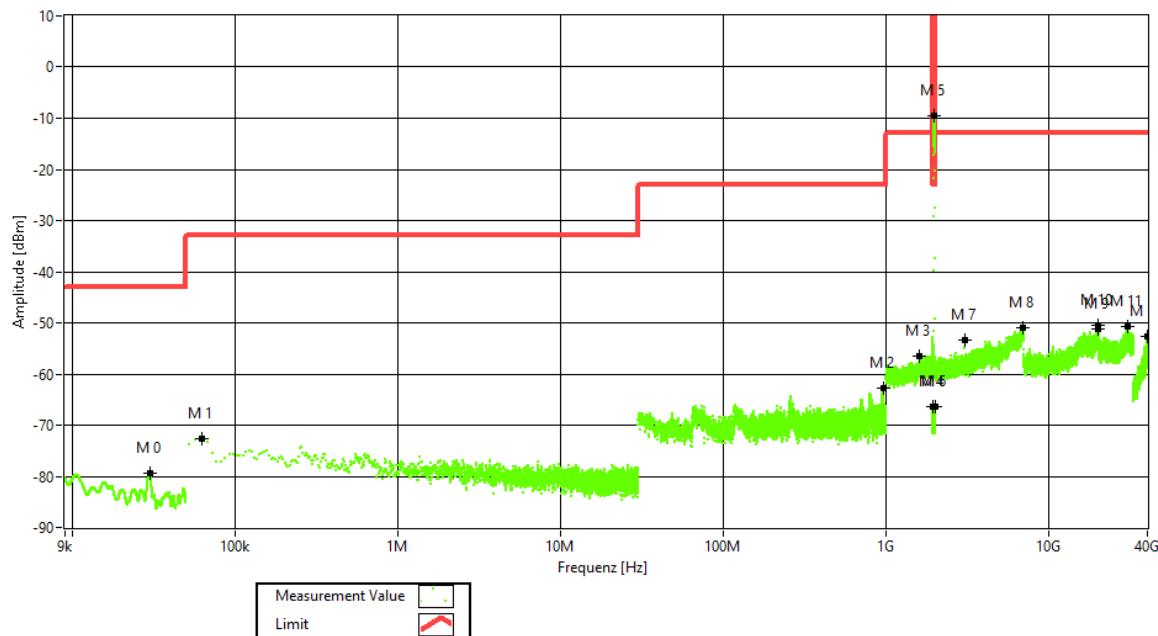

5.4.5 TEST EQUIPMENT USED

- Conducted



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.5 OUT-OF-BAND EMISSION LIMITS

Standard FCC Part §2.1051, §27.53

The test was performed according to:

ANSI C63.26, KDB 935210 D05 v01r04: 3.6

Test date: 2025-05-15 – 2025-05-16


Environmental conditions: 24.0 °C; 26 % r. H./26.3 °C; 36 % r. H.

Test engineer: Thomas Hufnagel

5.5.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band emission limit for industrial signal boosters. The limits itself come from the applicable rule part for each operating band.

The EUT was connected to the test setup according to the following diagram:

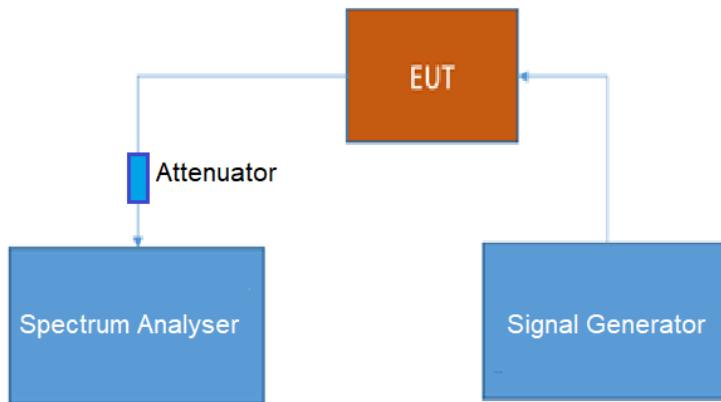

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.5.2 TEST REQUIREMENTS/LIMITS

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 24, Subpart E – Cellular Radiotelephone Service

Abstract § 24.238 FCC:

§ 24.238 Emission limitations for cellular equipment.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Abstract RSS-133 from ISED

RSS-133; 5.6 Unwanted Emission Limits

Unwanted emissions shall be measured in terms of average values while the transmitter is operating at the manufacturer's rated power and modulated as specified in RSS-Gen.

Equipment shall meet the unwanted emission limits, specified in table 3, outside each frequency block group. For each channel bandwidth supported by the equipment under test, the unwanted emissions shall be measured and reported for two channel frequencies: one located as close as possible to the low end and one located as close as possible to the high end of the equipment's operating frequency range.

For the unwanted emission limits, in the 1 MHz bands immediately outside and adjacent to the frequency block group, the power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth (OBW). Beyond these 1 MHz bands, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth may be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% of the OBW, as applicable.

For all equipment, the TRP or total conducted power (sum of conducted power across all antenna connectors), where applicable, of the unwanted emissions outside the frequency block or frequency block group shall not exceed the limits shown in the table 3.

Table 3: Unwanted emission limits for all equipment

Offset frequency from the edge of the frequency block group (MHz)	Unwanted emission limit
≤ 1	-13 dBm/(1% of OBW)
> 1	-13 dBm/MHz

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.5.3 TEST PROTOCOL

5.5.4 TEST PROTOCOL

Band 25, downlink, Number of input signals = 1							
Signal type	Input power	Band edge	Signal frequency [MHz]	Input power [dBm]	Maximum out-of-band power [dBm]	Limit out-of-band power [dBm]	Margin to limit [dB]
Wideband	0.3 dB < AGC	upper	1992.5	-0.9	-59.1	-13.0	46.1
Wideband	3 dB > AGC	upper	1992.5	2.4	-60.1	-13.0	47.1
Wideband 5G	0.3 dB < AGC	upper	1972.5	-1.2	-54.3	-13.0	41.3
Wideband 5G	3 dB > AGC	upper	1972.5	1.8	-55.4	-13.0	42.4
Narrowband	0.3 dB < AGC	upper	1994.8	-0.7	-46.4	-13.0	33.4
Narrowband	3 dB > AGC	upper	1994.8	2.6	-46.8	-13.0	33.8
Wideband	0.3 dB < AGC	lower	1932.5	0.3	-56.0	-13.0	43.0
Wideband	3 dB > AGC	lower	1932.5	3.6	-57.0	-13.0	44.0
Wideband 5G	0.3 dB < AGC	lower	1952.5	0.0	-54.5	-13.0	41.5
Wideband 5G	3 dB > AGC	lower	1952.5	3.0	-54.6	-13.0	41.6
Narrowband	0.3 dB < AGC	lower	1930.2	0.1	-44.7	-13.0	31.7
Narrowband	3 dB > AGC	lower	1930.2	3.4	-45.0	-13.0	32.0

Band 25, downlink, Number of input signals = 2								
Signal type	Input power	Band edge	Signal frequency f1 [MHz]	Signal frequency f2 [MHz]	Input power [dBm]	Maximum out-of-band power [dBm]	Limit out-of-band power [dBm]	Margin to limit [dB]
WB	-0.3 dB < AGC	upper	1992.5	1990.0	-1.1	-60.4	-13.0	47.4
WB	3 dB > AGC	upper	1992.5	1990.0	2.2	-60.7	-13.0	47.7
NB	-0.3 dB < AGC	upper	1994.8	1994.6	-0.9	-49.2	-13.0	36.2
NB	3 dB > AGC	upper	1994.8	1994.6	2.4	-50.3	-13.0	37.3
WB	-0.3 dB < AGC	lower	1932.5	1935.0	0.3	-58.5	-13.0	45.5
WB	3 dB > AGC	lower	1932.5	1935.0	3.6	-58.4	-13.0	45.4
NB	-0.3 dB < AGC	lower	1930.2	1930.4	0.1	-47.9	-13.0	34.9
NB	3 dB > AGC	lower	1930.2	1930.4	3.4	-49.0	-13.0	36.0

"WB" means Wideband.

"NB" means Narrowband.

Remark: Please see next sub-clause for the measurement plot.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

5.5.5 MEASUREMENT PLOT

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN; Input power = 0.3 dB < AGC; Number of signals 1

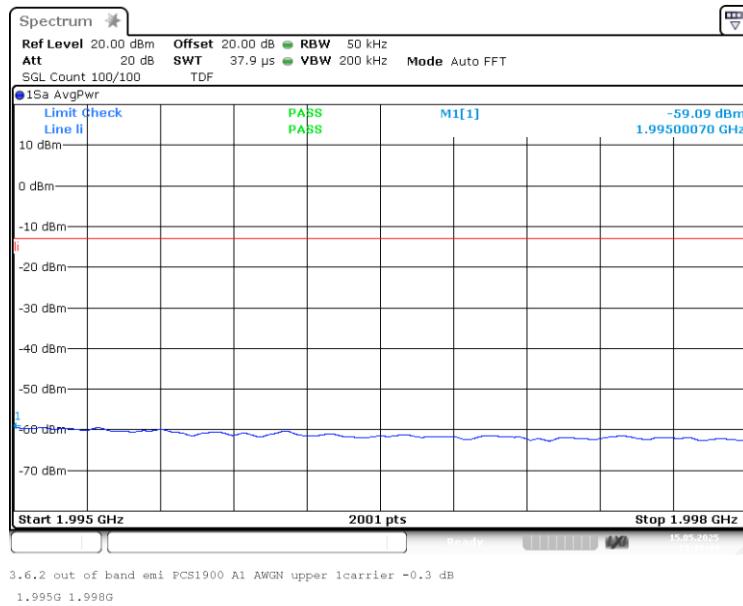

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN; Input power = 3 dB > AGC; Number of signals 1

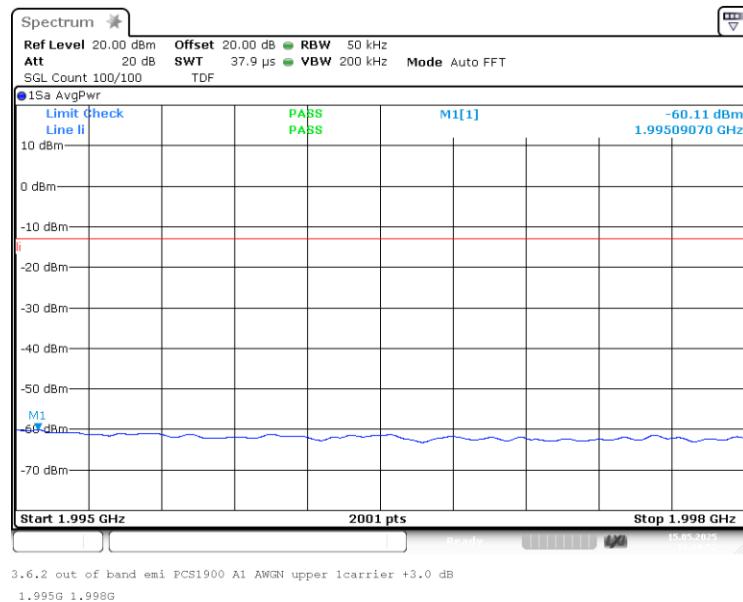

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN 45M; Input power = 0.3 dB < AGC; Number of signals 1

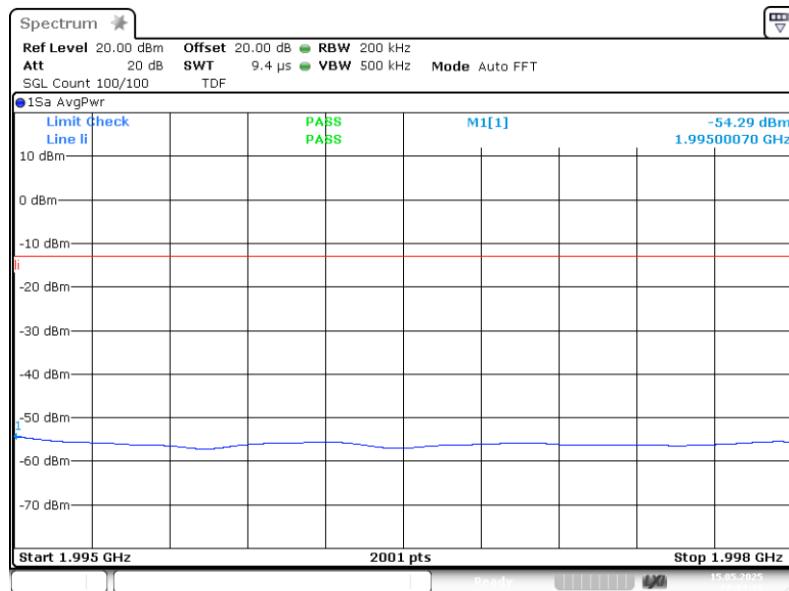

3.6.2 out of band emi PCS1900 A1 AWGN 45M upper 1carrier -0.
3 dB 1.995G 1.998G

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN 45M; Input power = 3 dB > AGC; Number of signals 1

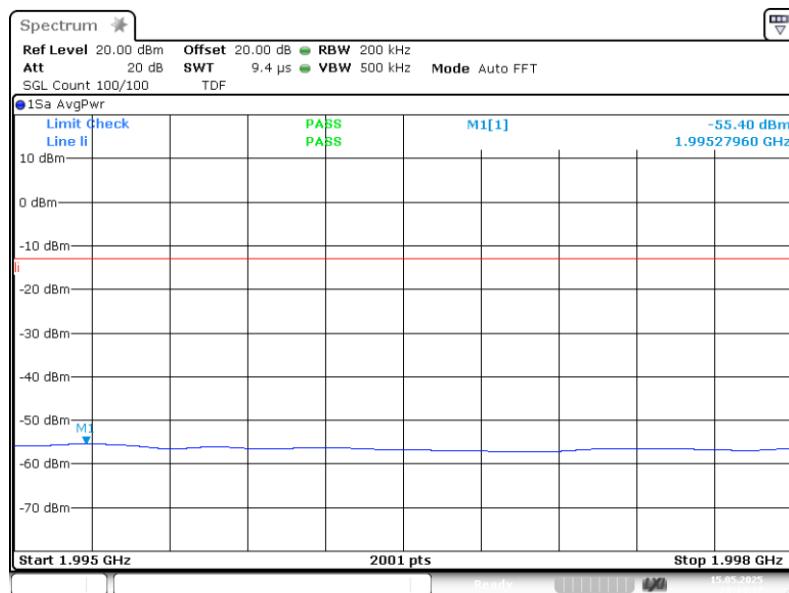

3.6.2 out of band emi PCS1900 A1 AWGN 45M upper 1carrier +3.
0 dB 1.995G 1.998G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: GSM; Input power = 0.3 dB < AGC; Number of signals 1

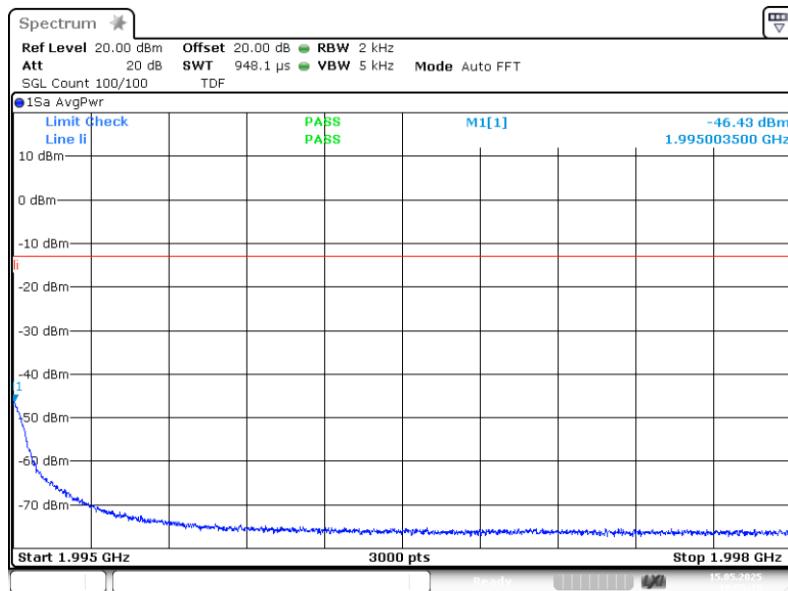

3.6.2 out of band emi PCS1900 A1 GSM upper 1carrier -0.3 dB
1.995G 1.998G

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: GSM; Input power = 3 dB > AGC; Number of signals 1

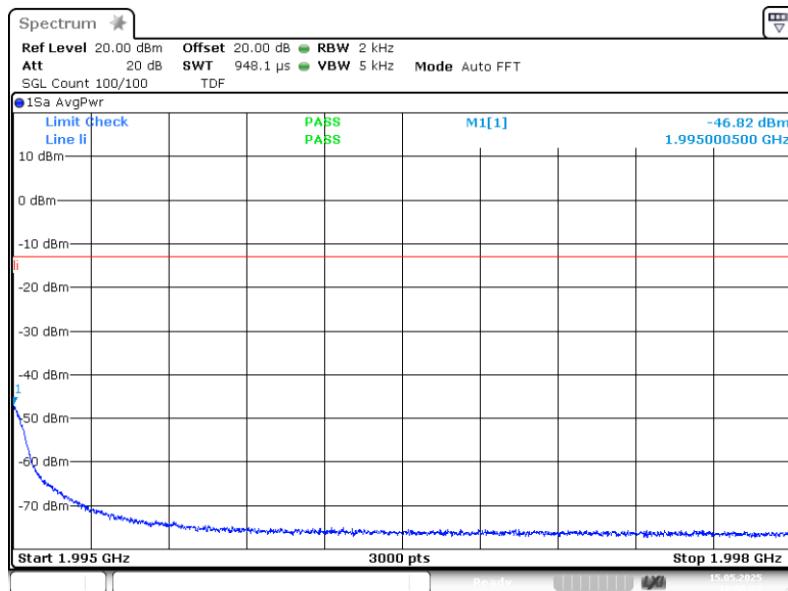

3.6.2 out of band emi PCS1900 A1 GSM upper 1carrier +3.0 dB
1.995G 1.998G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN; Input power = 0.3 dB < AGC; Number of signals 1

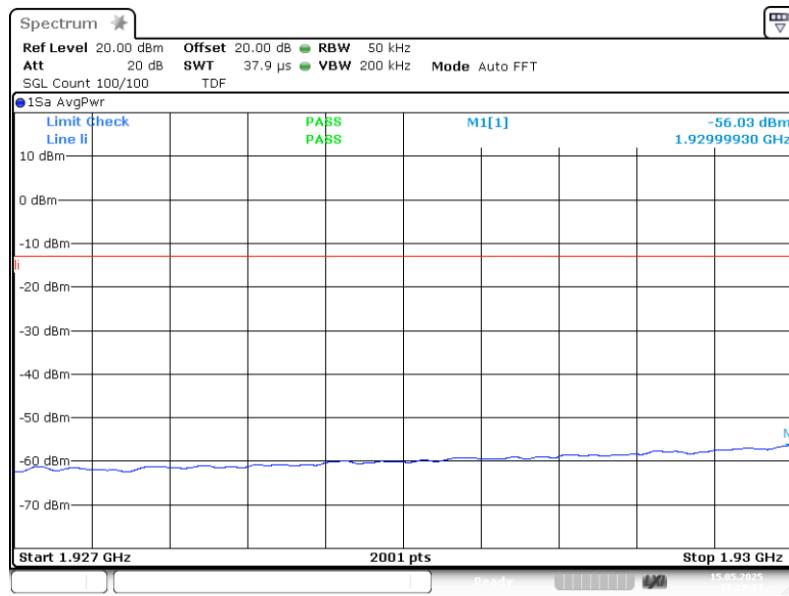

3.6.2 out of band emi PCS1900 A1 AWGN lower 1carrier -0.3 dB
1.927G 1.930G

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN; Input power = 3 dB > AGC; Number of signals 1

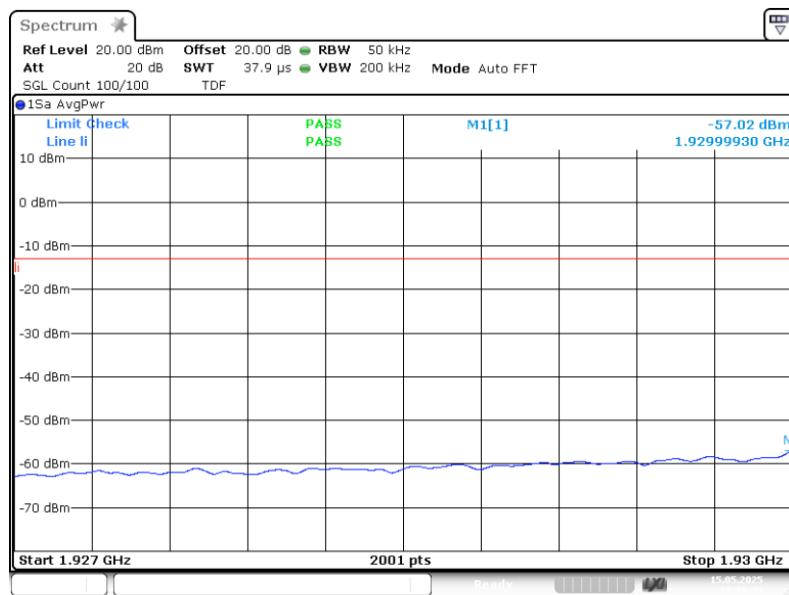

3.6.2 out of band emi PCS1900 A1 AWGN lower 1carrier +3.0 dB
1.927G 1.930G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS

Test Report No.: 25-0094


Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN 45M; Input power = 0.3 dB < AGC; Number of signals 1

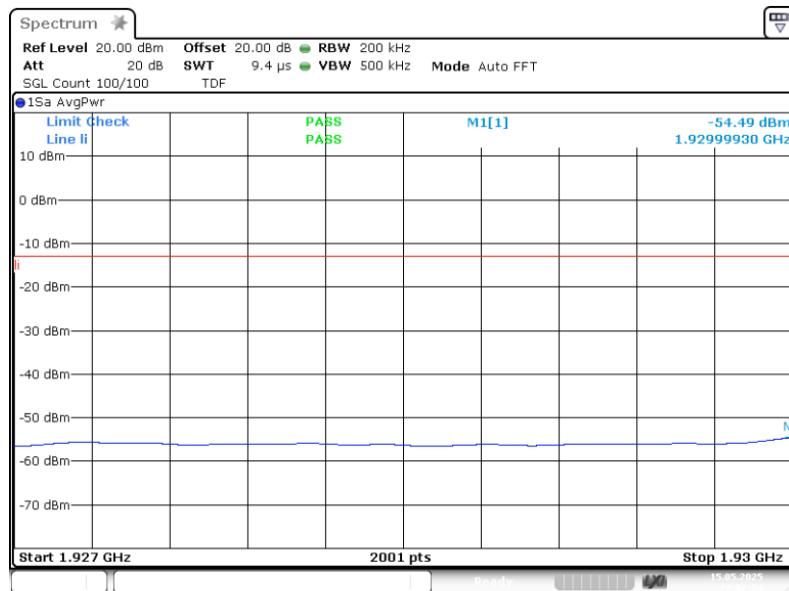

3.6.2 out of band emi PCS1900 A1 AWGN 45M lower 1carrier -0.
3 dB 1.927G 1.930G

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN 45M; Input power = 3 dB > AGC; Number of signals 1

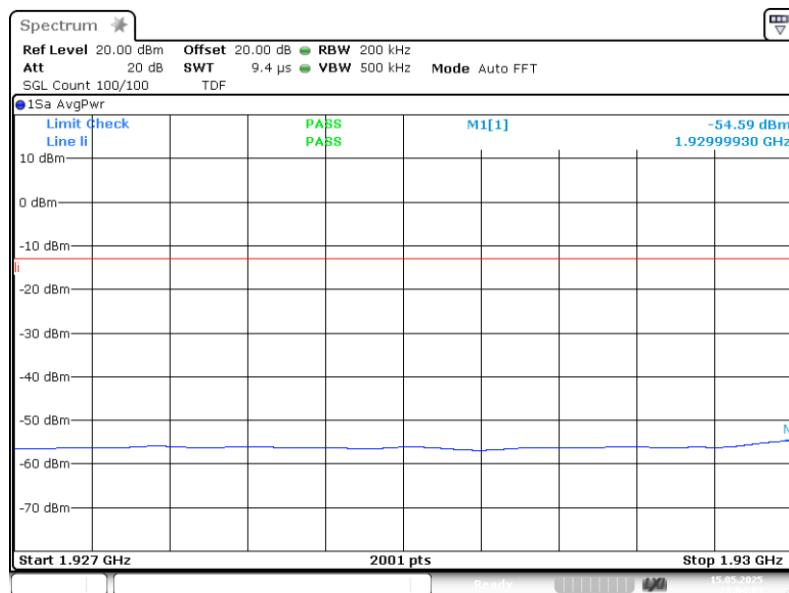

3.6.2 out of band emi PCS1900 A1 AWGN 45M lower 1carrier +3.
0 dB 1.927G 1.930G

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: GSM; Input power = 0.3 dB < AGC; Number of signals 1

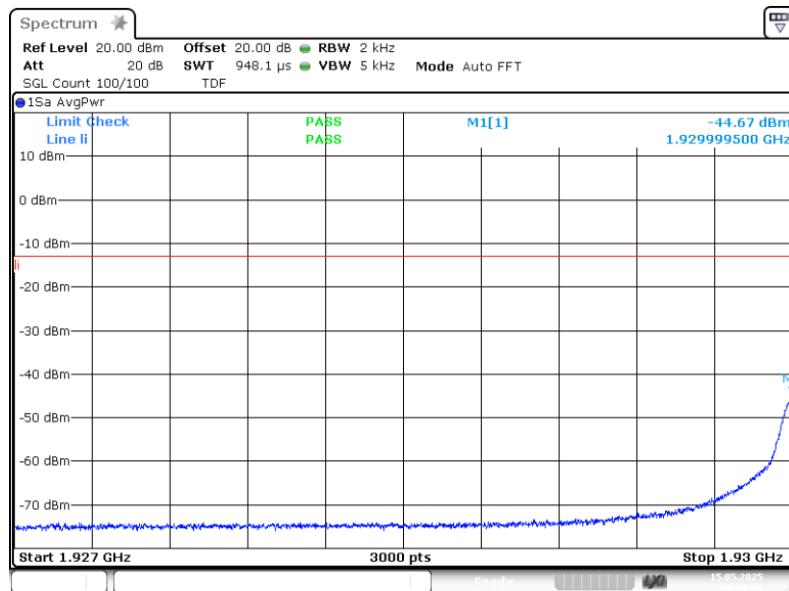

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: GSM; Input power = 3 dB > AGC; Number of signals 1

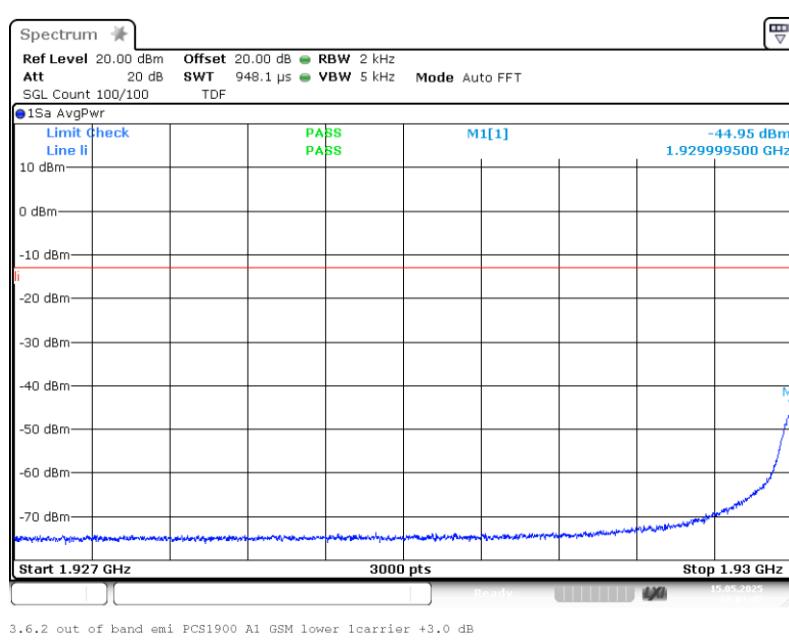

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN; Input power = 0.3 dB < AGC; Number of signals 2

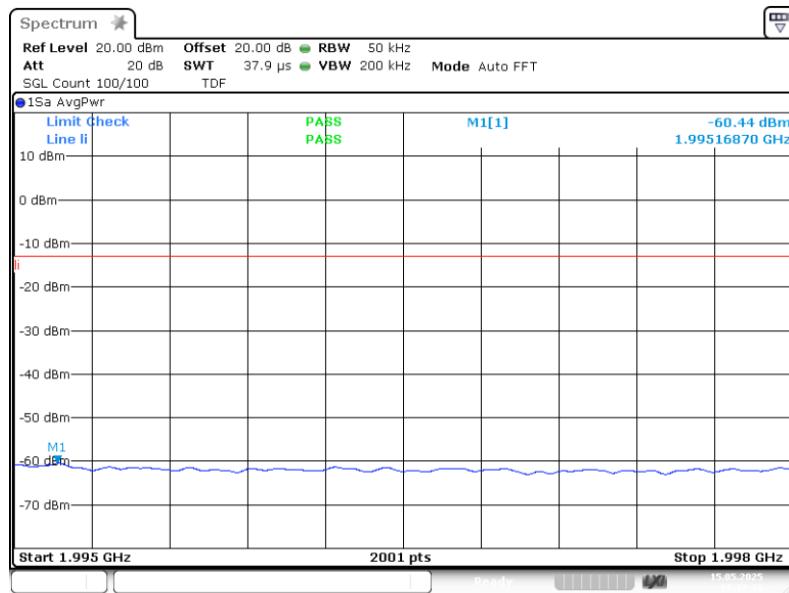

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: AWGN; Input power = 3 dB > AGC; Number of signals 2

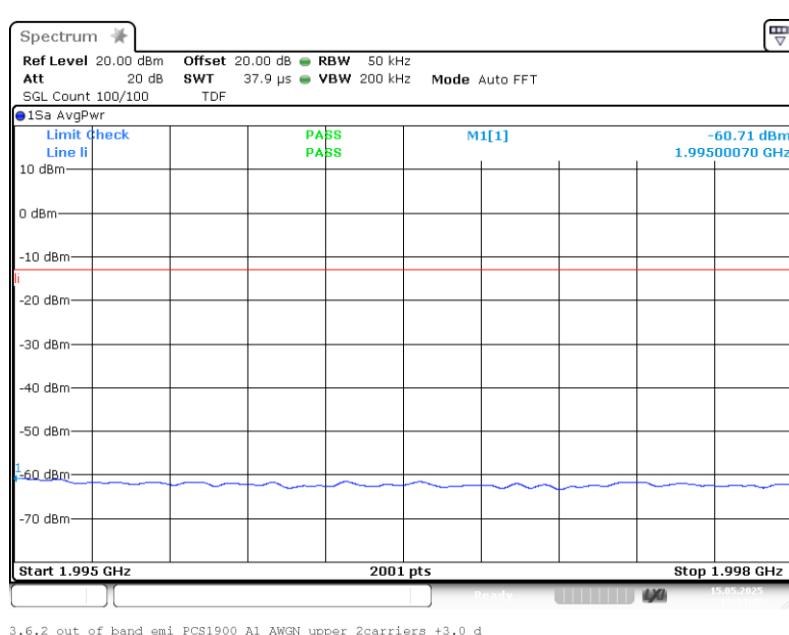

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: GSM; Input power = 0.3 dB < AGC; Number of signals 2

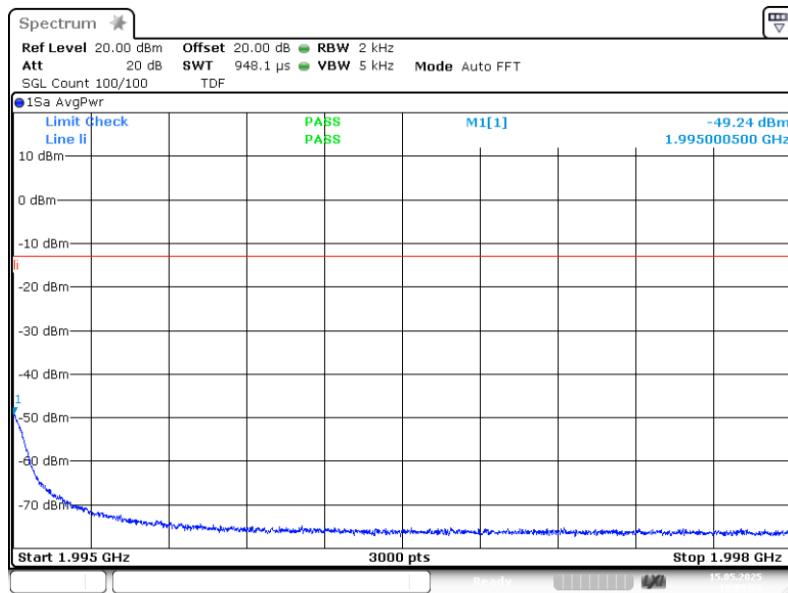

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: upper; Mod: GSM; Input power = 3 dB > AGC; Number of signals 2

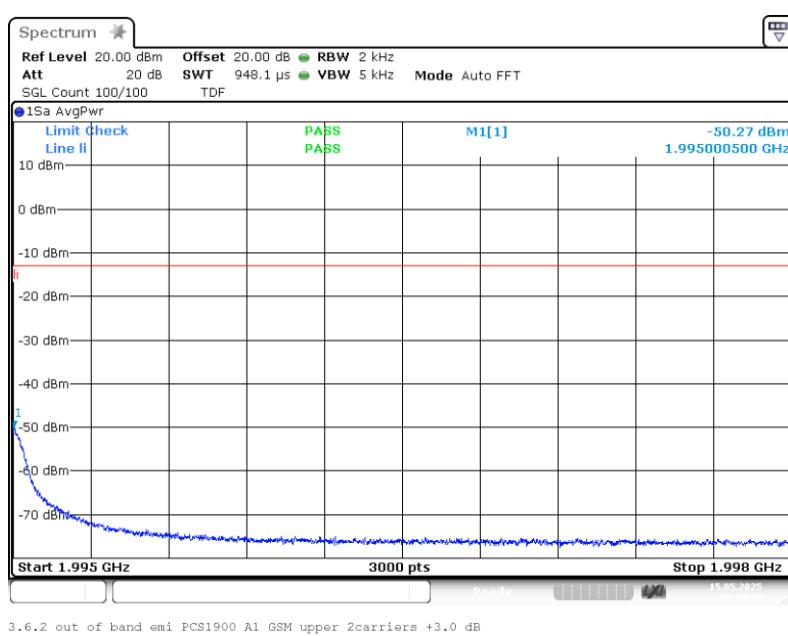

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN; Input power = 0.3 dB < AGC; Number of signals 2

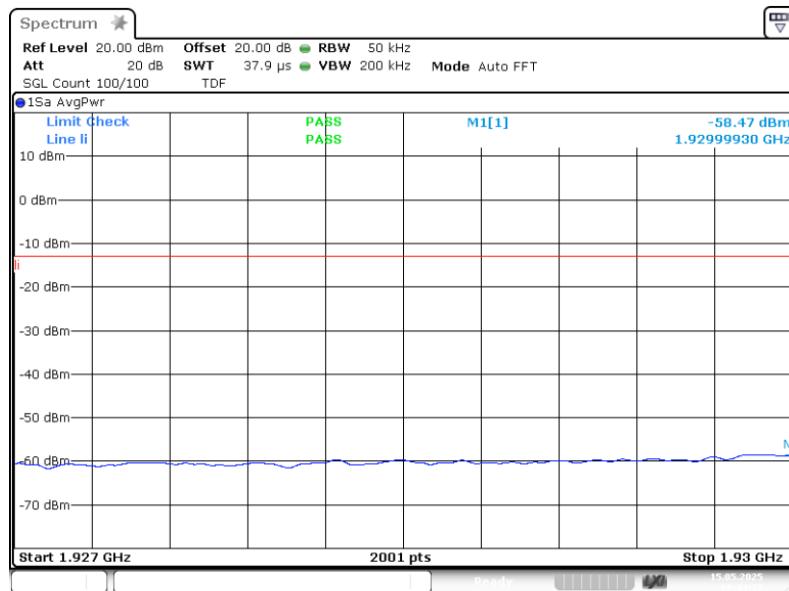

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: AWGN; Input power = 3 dB > AGC; Number of signals 2

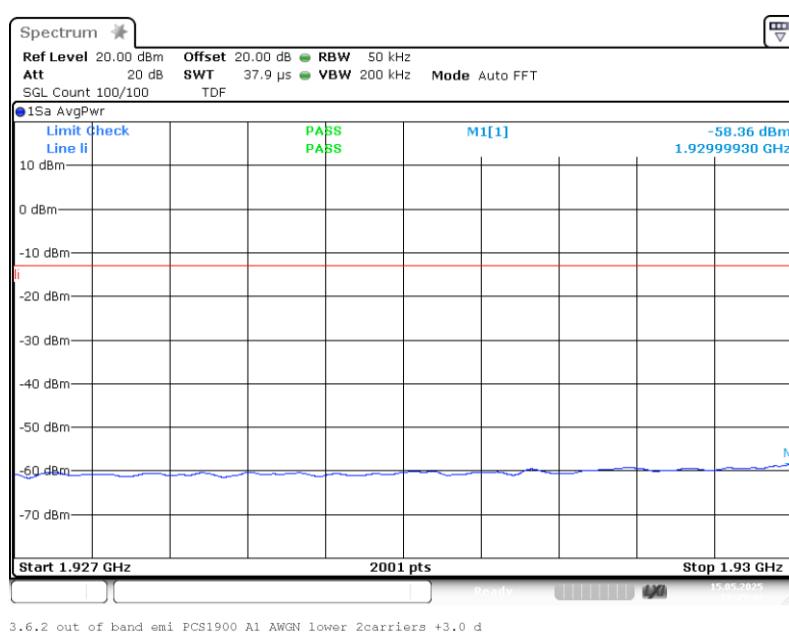

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.




BUREAU
VERITAS


Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: GSM; Input power = 0.3 dB < AGC; Number of signals 2

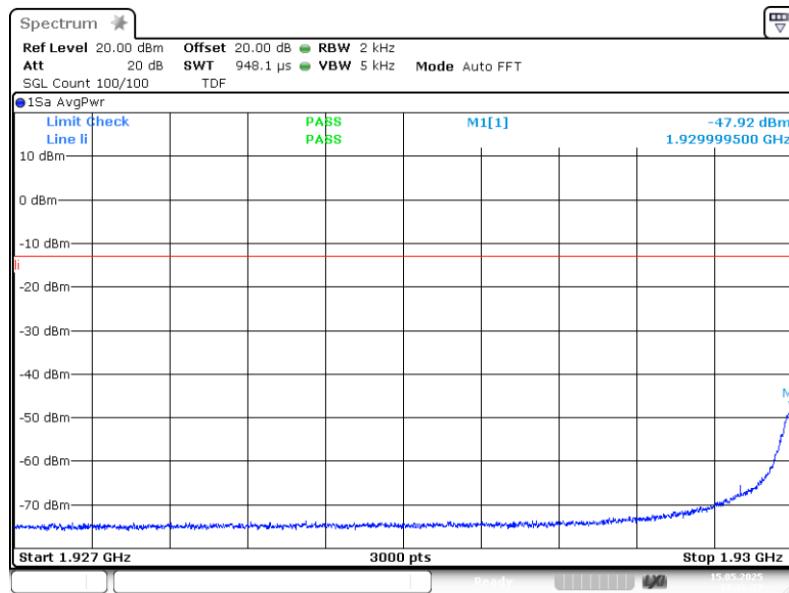

Band: PCS 1900, Antenna 1; Frequency: 1.9300 GHz to 1.9950 GHz; Band edge: lower; Mod: GSM; Input power = 3 dB > AGC; Number of signals 2

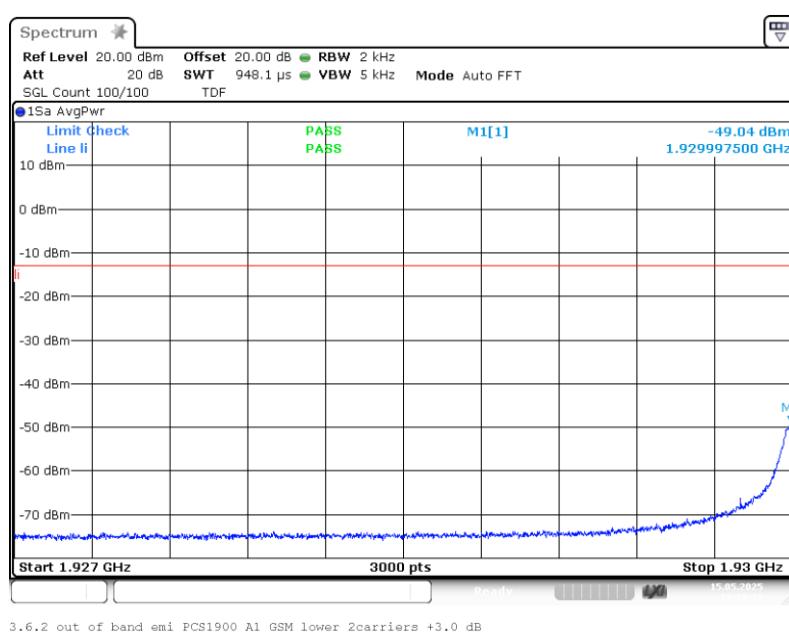

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.5.6 TEST EQUIPMENT USED

- Conducted

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.6 OUT-OF-BAND REJECTION

Standard FCC Part 27

The test was performed according to:

ANSI C63.26

Test date: 2025-05-15


Environmental conditions: 24.0 °C; 26 % r. H.

Test engineer: Thomas Hufnagel

5.6.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band rejection test case for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

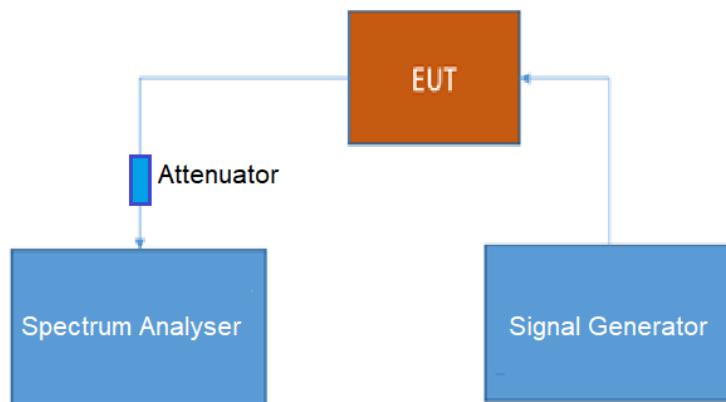

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

5.6.2 TEST REQUIREMENTS/LIMITS

Abstract RSS-131 from ISED:

RSS-131; 9.1 Out-of-band rejection

The gain-versus-frequency response and the 20 dB passband bandwidth of the zone enhancer shall be reported. The zone enhancer shall reject amplification of other signals outside the passband of the zone enhancer.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]


5.6.3 TEST PROTOCOL

Band 25, 1930 MHz – 1995 MHz, PCS 1900, downlink				
Highest Power Frequency [MHz]	Output Power [dBm]	Lower Highest Power -20 dB Frequency [MHz]	Upper Highest Power -20 dB Frequency [MHz]	20 dB Bandwidth [MHz]
1964.0	0.20	1927.741	1997.194	69.452

Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT

Frequency Band: PCS 1900, Antenna 1, Direction = RF downlink

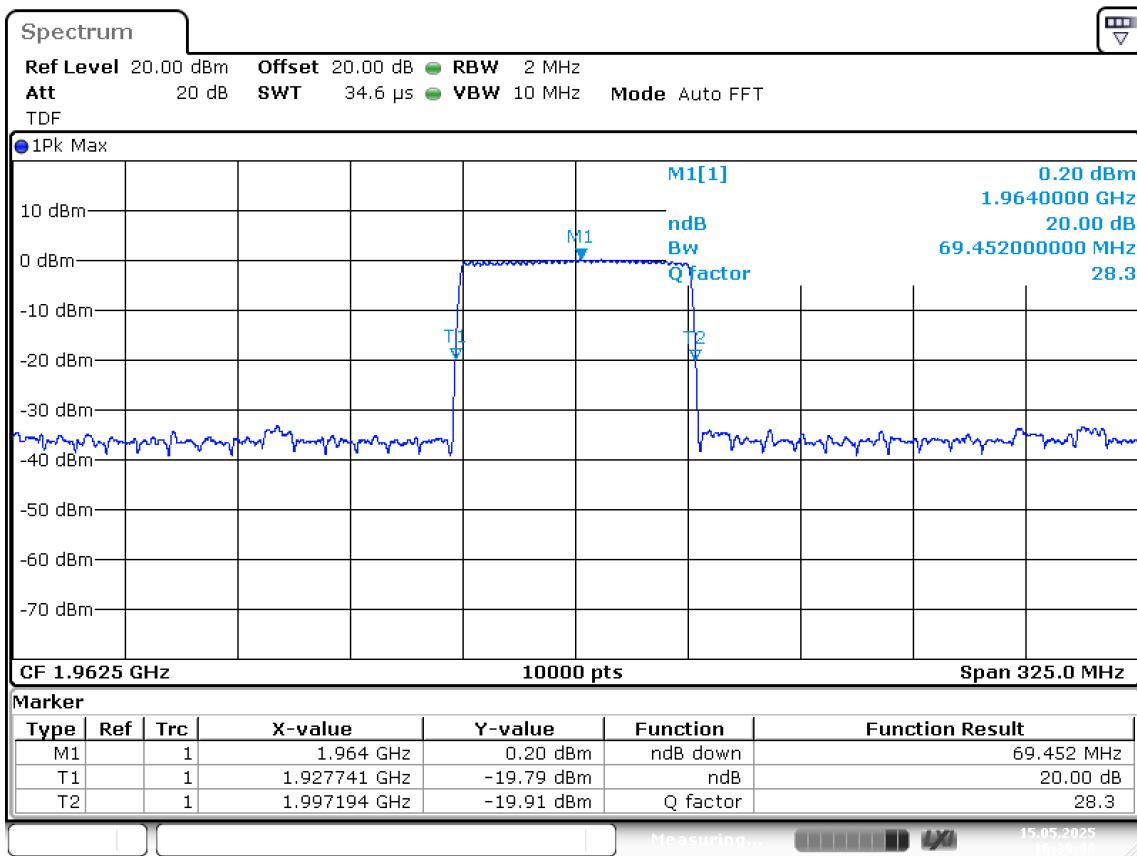

5.6.5 TEST EQUIPMENT USED

- Conducted

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

6 TEST EQUIPMENT

6.1 CONDUCTED EMISSIONS

Ref.No.	Type	Description	Manufacturer	Inventory no.	Last calibration	Calibration due
1.1	FSV40	Signal Analyzer 10 Hz - 40 GHz	Rohde & Schwarz	E-003138	2023-10	2025-10
1.2	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	E-003206	2023-01	2026-01
1.3	CA-2.9MF-20-40-10W-RDC	Attenuator 20 dB	Tactron	E-004057	2024-10	2026-10
1.4	testo 175 H1	Thermo-Hygrometer	Testo	E-003922	2024-12	2025-12
1.5	Auto Messung 1 Channel V8.1	Software	Bureau Veritas	Software V8.1	---	---

The calibration interval is the time interval between "Last Calibration" and "Calibration Due".

6.2 ANTENNA FACTORS. CABLE LOSS AND SAMPLE CALCULATION

The used factors for antennas, cables etc. are deposited in the used test systems (LabView program and BAT EMC programm). They are actualised by the returing calibration control.

Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading
AF = Antenna factor
Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
Linear interpolation will be used for frequencies in between the values in the table.
distance correction = $-20 * \text{LOG} (d_{\text{Limit}}/ d_{\text{used}})$
Linear interpolation will be used for frequencies in between the values in the table.
Table shows an extract of values.

The test results relate only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

7 PHOTO REPORT

Please see separate photo report.

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Annex A: Accreditation certificate (for information)

The accreditation relates to competences stated on the accreditation certificate. The current certificate is available on the homepage of the DAkkS and can be downloaded under accredited bodies with the processing number:

<https://www.dakks.de/en>

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.



BUREAU
VERITAS

Test Report No.: 25-0094

Tests performed on UAP-R [PCS 1900]

Annex B: Additional information provided by client

None.

***** End of test report *****

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.