

Test Site:
FCC Test Site No.:
IC OATS No.:

96997
IC3475A-1



ECL-EMC Test Report No.: 11-037

Equipment under test: **ION-M7P/7P/85P 700MHz Path 2**
FCC ID: **XS5-IONM7785P**
IC ID: **2237E-IONM7785P**
Type of test: **FCC 47 CFR Part 27 Subpart H, F, :2009**
Miscellaneous Wireless Communication Services
IC RSS-131:2003
Zone Enhancers for the Land Mobile Service

Measurement Procedures: 47 CFR Parts 2:2009 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*), Part 27:2009 (Miscellaneous Wireless Communication Services), ANSI/TIA-603-C:2004, *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*
IC-GEN:2007 General Requirements and Information for the Certification of Radiocommunication Equipment

Test result:

Passed

Date of issue:	10.02.11			Signature:
Issue-No.:	01	Author:	T. Zahlmann Test engineer	
Date of delivery:	10.02.11	Checked:	M. Lehmann EMV-Leiter Head of EMC	
Test dates:	09.02.11			
Pages:	31			

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0
Fax: +49 (0)9099 69 140

Test Location: TEMPTON Service Plus GmbH
European Compliance Laboratory (ECL)

Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 (0) 911 59835 0
Fax: +49 (0) 911 59835 90

General:

The purpose of this report is to show compliance to the FCC regulations for devices operating under Part 27 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	6
2.1.4	SYSTEM DIAGRAM OF EUT	7
2.1.5	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	8
3	TEST SITE (ANDREW BUCHDORF)	9
3.1	TEST ENVIRONMENT	9
3.2	TEST EQUIPMENT	9
3.3	INPUT AND OUTPUT LOSSES	9
3.4	MEASUREMENT UNCERTAINTY	9
4	TEST SITE (TEMPTON)	10
5	RF POWER OUT: §27.50, §2.1046; RSS-131, RSS-GEN	11
5.1	LIMIT	11
5.2	TEST METHOD	11
5.3	TEST RESULTS	12
5.3.1	DLINK	12
5.3.1.1	LTE 728 – 746MHz, MAIN	13
5.3.1.2	LTE 746 – 757MHz, MAIN	13
5.3.2	UPLINK	14
5.4	SUMMARY TEST RESULT	14
6	OCCUPIED BANDWIDTH: §90.210, §2.1049; RSS-GEN	15
6.1	LIMIT	15
6.2	TEST METHOD	15
6.3	TEST RESULTS	15
6.3.1	DLINK	15
6.3.1.1	LTE 728 – 746MHz MAIN	16
6.3.1.2	LTE 746 – 757MHz MAIN	17
	UPLINK	18
6.4	SUMMARY TEST RESULT	18
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §27.53, §2.1051; RSS-131, RSS-GEN	19
7.1	LIMIT	19
7.1.1	MINIMUM STANDARD	19
7.1.2	CALCULATION OF THE LIMIT	19
7.2	TEST METHOD	20
7.3	TEST RESULTS	20
7.3.1	DLINK	20



7.3.1.1	LTE < 1MHz to band edge 728 – 746MHz, MAIN	21
7.3.1.2	LTE < 1MHz to band edge 746 – 757MHz, MAIN	22
7.3.1.3	LTE > 1MHz to band edge 728 – 746MHz, MAIN	23
7.3.1.4	LTE > 1MHz to band edge 746 – 757MHz, MAIN	23
7.3.2	UPLINK	24
7.4	SUMMARY TEST RESULT	24
8	RADIATED SPURIOUS EMISSIONS AT THE ECL (TEMPTON): §27.53, §2.1053, RSS-GEN, RSS-131 25	
8.1	METHOD OF MEASUREMENT	27
8.2	LIMIT	28
8.3	RECEIVER SETTINGS	28
8.4	CLIMATIC VALUES IN THE LAB	28
8.5	TEST RESULTS	29
8.5.1	30 MHz TO 1 GHz DOWNLINK (<u>BOTTOM</u> – <u>MIDDLE</u> – <u>TOP</u>) SUBPART H	29
8.5.2	30 MHz TO 1 GHz DOWNLINK (<u>BOTTOM</u> – <u>MIDDLE</u> – <u>TOP</u>) SUBPART F	29
8.5.2.1	1 GHz to 10 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>) Subpart H	30
8.5.2.2	1 GHz to 8 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>) Subpart F	30
9	HISTORY	31

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	27.50(b)(c)	2.1046	1000 Watts ERP	Complies
Occupied Bandwidth	2.1049	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	27.53(c)(g)	2.1051	-13dBm	Complies
Radiated Spurious emission	27.53(m)	2.1053 TIA/EA-603	-13dBm E.I.R.P	Complies
Frequency Stability	27.54	2.1055	Must stay in band	NA

Name of Test	IC Para. No.	IC Method	Result
RF Power Output	RSS-131 6.2	RSS-GEN 4.8	Complies
Occupied Bandwidth	RSS-Gen 6.3	RSS-GEN 4.6.1	Complies
Spurious Emissions at Antenna Terminals	RSS-131 6.4	RSS-GEN 4.9	Complies
Field Strength of Spurious Emissions	RSS-131 6.4	RSS-GEN 4.9 SRSP-513	Complies
Frequency Stability	RSS-131 6.5	RSS-GEN 4.7	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.

Test Report No.:

FCC ID: XS5-IONM7785P



IC ID: 2237E-IONM7785P

2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	ION-M7P/7P/85P	
Andrew Ident. Number	Id.No. 7626561-0001	
Serial no.(SN)	11	
Revision	00	
Software version and ID	n. a.	
Type of modulation and Designator	LTE (G7D)	<input checked="" type="checkbox"/>
Frequency Translation	F1-F1	<input checked="" type="checkbox"/>
	F1-F2	<input type="checkbox"/>
	N/A	<input type="checkbox"/>
Band Selection	Software	<input type="checkbox"/>
	Duplexer	<input checked="" type="checkbox"/>
	Full band	<input type="checkbox"/>

2.1.1 Downlink

Pass band	Path 728 MHz – 757 MHz
Max. composite output power based on one carrier per path (rated)	43,17 dBm = 20,75 W
Gain	10 dB @ Pout BTS of 33 dBm

2.1.2 Uplink

Pass band	n. a.
Gain	n. a.


Note: The EUT does not transmit over the air in the uplink direction.

2.1.3 Description of EUT


ION-M7P/7P/85P is a LTE MIMO 850 MHz CDMA/WCDMA multi-operator Remote Unit with various Extension Units. It is used in conjunction with a Master Unit in the ION optical distribution system. This system transports multiple LTE channels and a 850 MHz wideband signal simultaneously, providing a cost-effective solution for distributing capacity from one or more base stations

This Test Report describes only the approval of the Cellular 700 MHz range 728 MHz – 757 MHz. The ION-M7P/7P/85P Repeater consists of one 850 MHz path and two identical 700MHz paths with one antenna port of 850 MHz Path with 700 MHz MAIN and one antenna port of 700 MHz path MIMO, with the intended use of simultaneous transmission

2.1.4 System diagram of EUT

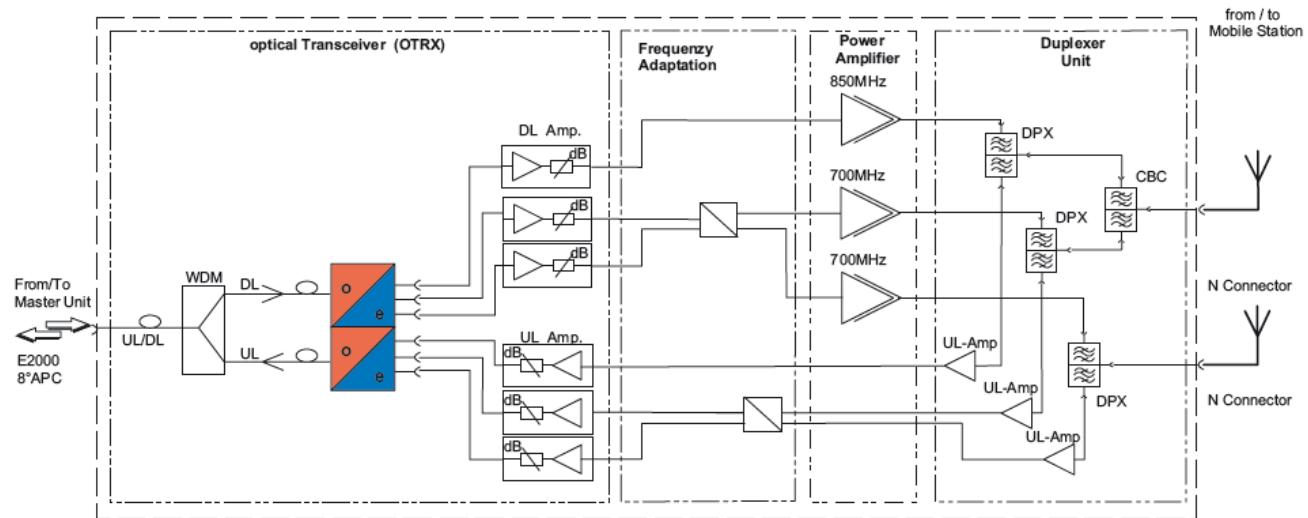

ION-M7P/7P/85P Remote Unit Design Principle

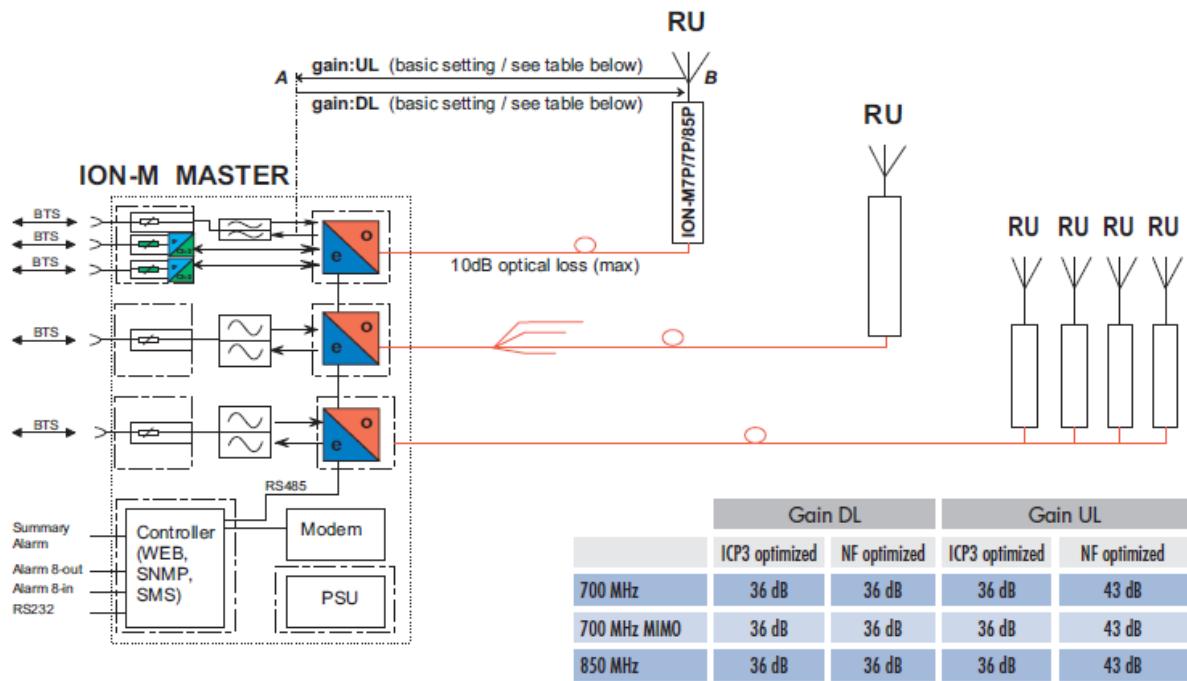

Design Principle ION System (One Subrack)

figure 2.1.4-#1 System diagram of EUT: ION-M7P/7P/85P

Since a signal generator does not supply a good output signal with +33 or +43 dBm, for the downlink measurement the MU Attenuation is not used.

That means for downlink measurements the signal generator is connected to measurement point A at the master optical / electrical converter and the analyzer to the measurement point B at the RU.



2.1.5 Block diagram of measurement reference points

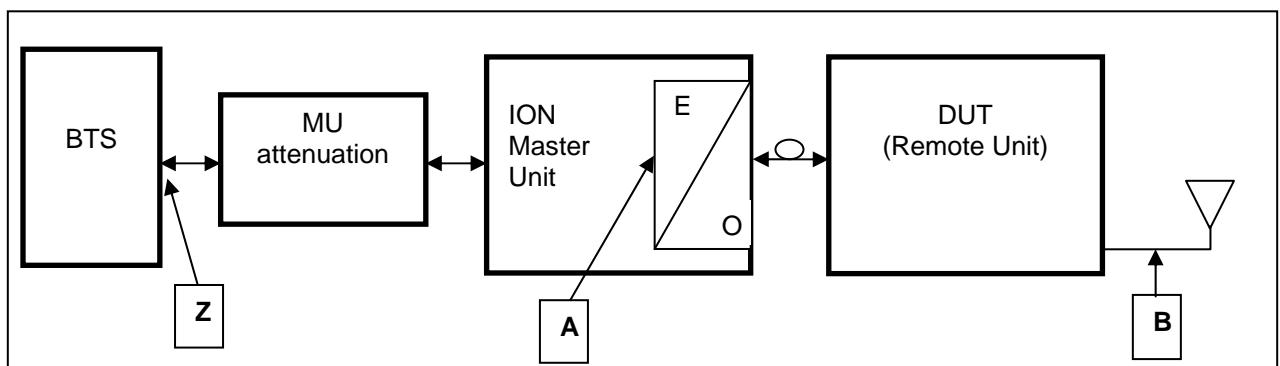


figure 2.1.5-#1 Block diagram of measurement reference points

Remote Unit is the DUT

O/E Optcal/Electrical converter

SRMU SubRack Master Unit

Reference point A, SRMU UL output, DL input

Reference point B, Remote Unit DL output, UL input

Reference point Z, BTS DL output, BTS UL input

Uplink measure from reference point B to Z

Downlink measure from reference point A to B



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8372	Network Analyzer	8753D	HP	3410A08675	02/11
8961	Spectrum Analyzer	FSP-13	R&S	100147/013	10/11
8849	Signal Generator	SMU200A	R&S	101732	04/11
8956	Signal Generator	SMIQ 03B	R&S	100435	12/11
7192	Power Attenuator	769-30	Narda	07448	CIU
7338	Power Attenuator	769-10	Narda	05773	CIU
7191	Power Attenuator	765-20	Narda	0012	CIU
7119	Divider	2way	Mikom	3512	CIU
7287	RF-Cable	2,0m; N-N	Huber & Suhner	28441/4PEA	CIU
7288	RF-Cable	2,0m; N-N	Huber & Suhner	28442/4PEA	CIU
7391	RF-Cable	1,0m; SMA	Huber & Suhner	40447/4P	CIU
7391	RF-Cable	0,5m; SMA	Huber & Suhner	40225/4P	CIU

CIU = Calibrate in use

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked. All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k=2$. The true value is located in the corresponding interval with a probability of 95 %.

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



4 Test site (TEMPTON)

FCC Test site: 96997

IC OATS: IC3475A-1

See relevant dates under section 8 of this test report.



5 RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN

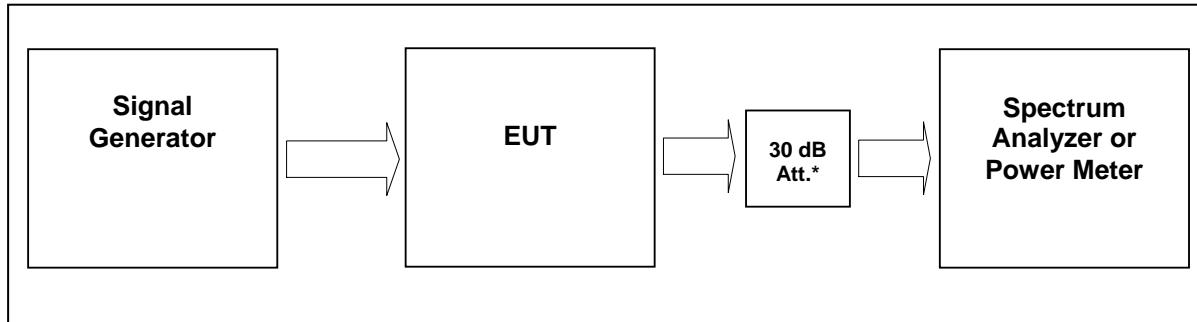


figure 5-#1 Test setup: RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN

Measurement uncertainty	± 0,38 dB
Test equipment used	8849, 8961, 8849, 7338, 7191, 7287, 7288, 7391

5.1 Limit

Minimum standard:

Para. No.27.50(b)(2), (c)(1)(3)

(b) The following power and antenna height limits apply to transmitters operating in the 746–763 MHz, 775–793 MHz and 805–806 MHz bands:

(2) Fixed and base stations transmitting a signal in the 746–757 MHz, 758–763 MHz, 776–787 MHz, and 788–793 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section. Para. No.27.50(c)(1 and 3)

(c) The following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band:

(1) Fixed and base stations transmitting a signal with an emission bandwidth of 1 MHz or less must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section;

(3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;

5.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

Test Report No.:

FCC ID: XS5-IONM7785P



IC ID: 2237E-IONM7785P

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations

5.3 Test Results

Detector RMS.

Test signal LTE:

Signal waveform according to Test Model 1.1, E-TM1.1, clause 6.1.1.1-1, table 6.1.1.1-1 of standard specification 3GPP TS 36.141 V9.3.0 (2010-03).

5.3.1 Downlink

Modulation	Measured at	Path	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot #
LTE	Middle	737 MHz, MAIN Band 12	3MHz 10MHz 50MHz	43,17	20,75	5.3.1.1 #1
LTE	Middle	751,5 MHz, MAIN Band 13	3MHz 10MHz 50MHz	43,10	20,42	5.3.1.1 #1
Maximum output power = 43,17 dBm = 20,75 W						
Limit Maximum output power = 1000 W						

table 5.3.1-#1 RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN Test Results Downlink

Modulation	Pin / dBm (Ref. point A)
LTE	6,8
LTE	7,3

table 5.3.1-#2 RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN Test Results Downlink Input power


Test Report No.:

FCC ID: XS5-IONM7785P




IC ID: 2237E-IONM7785P

5.3.1.1 LTE 728 – 746MHz, MAIN

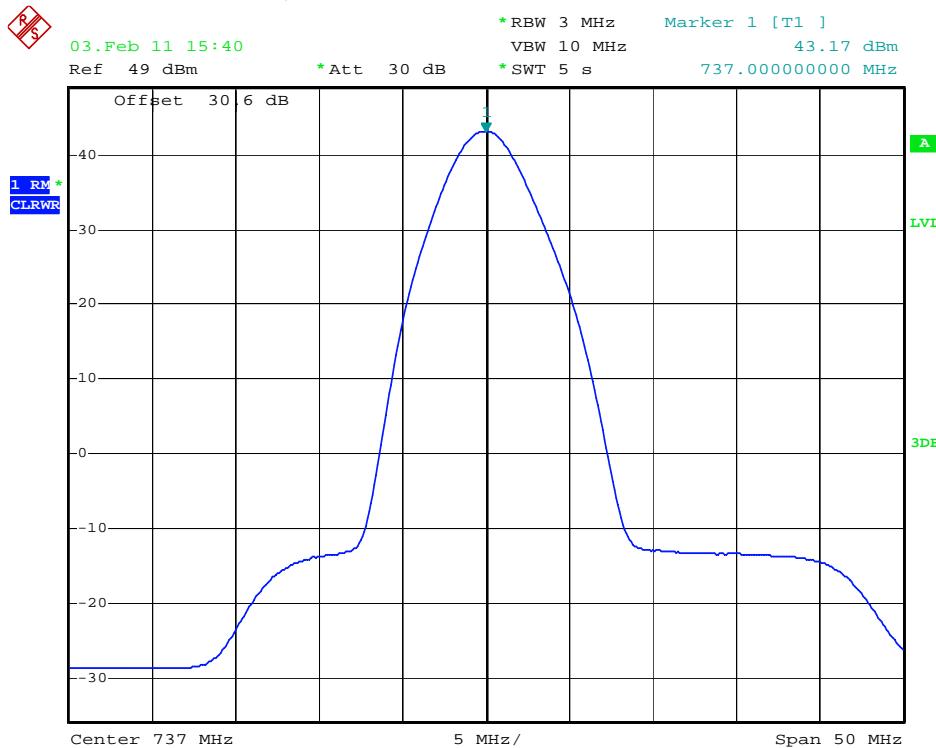

plot 5.3.1.1-#1 RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN; Test Results; Downlink; LTE 728 – 746MHz, MAIN Middle

5.3.1.2 LTE 746 – 757MHz, MAIN

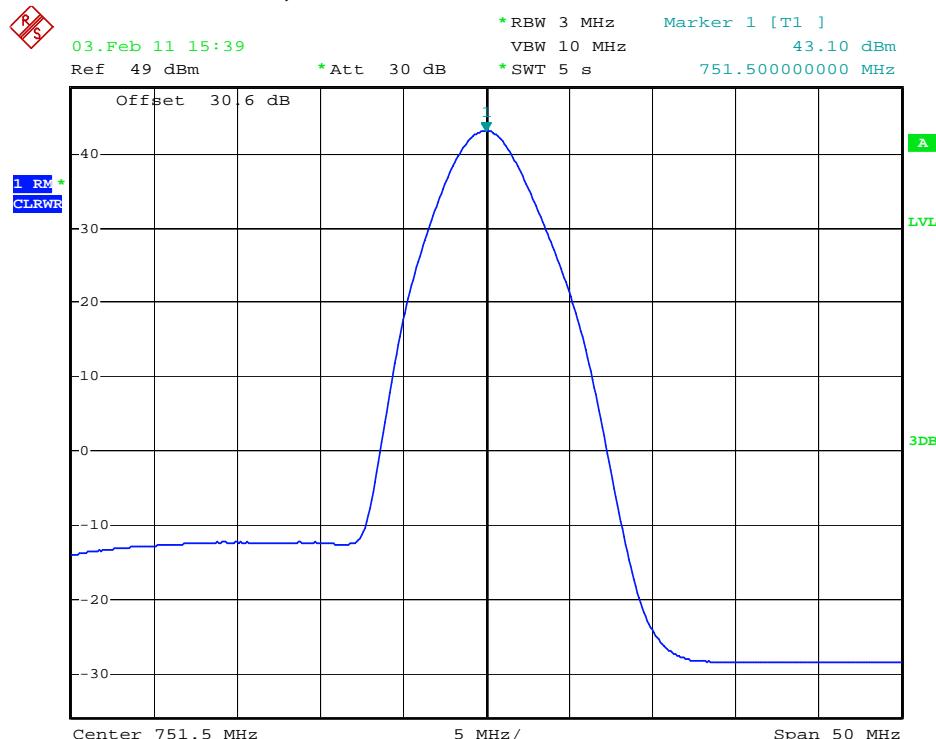

plot 5.3.1.2-#1 RF Power Out: §27.50, §2.1046; RSS-131, RSS-GEN; Test Results; Downlink; LTE 746 – 757MHz, MAIN Middle

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



5.3.2 Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.

5.4 Summary test result

Test result	complies, according the plots above
Tested by:	L.Oskerko
Date:	13.12.2010



6 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN

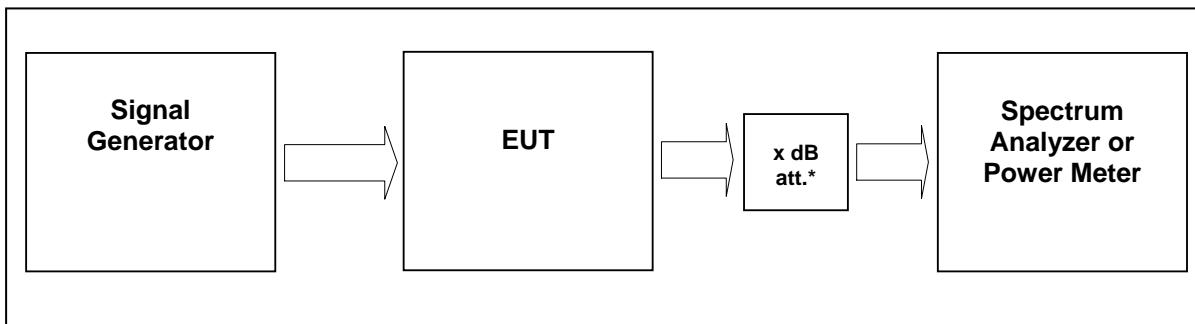
External Attenuator DL $x \text{ dB} = 30,6 \text{ dB}$

figure 6-#1 Test setup: Occupied Bandwidth: §90.210, §2.1049; RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8372, 8961, 8849, 7192, 7287, 7288, 7391

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

6.3 Test results

6.3.1 Downlink

Detector RMS.

Modulation	Measured at	Path	RBW VBW Span	Occupied Bandwidth / kHz	Plot #
LTE	Middle	737 MHz, MAIN	30 kHz 300 kHz 5 MHz	1100	5.3.1.2 #1,#2
LTE	Middle	751,5 MHz, MAIN	30 kHz 300 kHz 5 MHz	1105	5.3.1.2 #1,#2

table 6.3-#1 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN Test results


Test Report No.:

FCC ID: XS5-IONM7785P




IC ID: 2237E-IONM7785P

6.3.1.1 LTE 728 – 746MHz MAIN

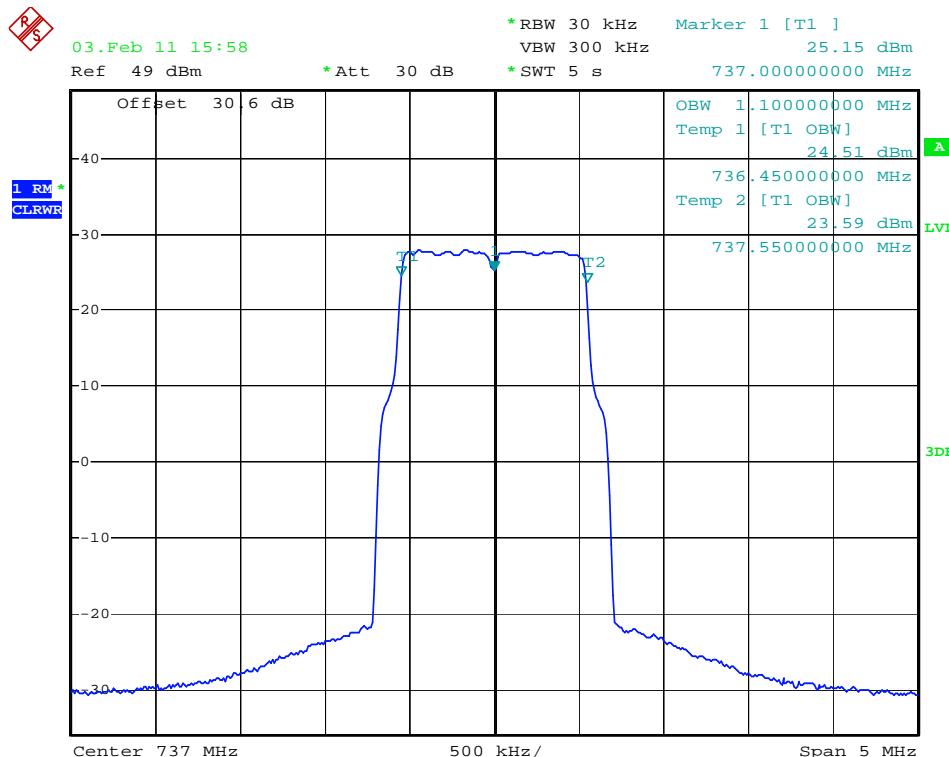

plot 6.3.1.1-#1 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN; Test results; Downlink; LTE 728 – 746MHz MAIN Output

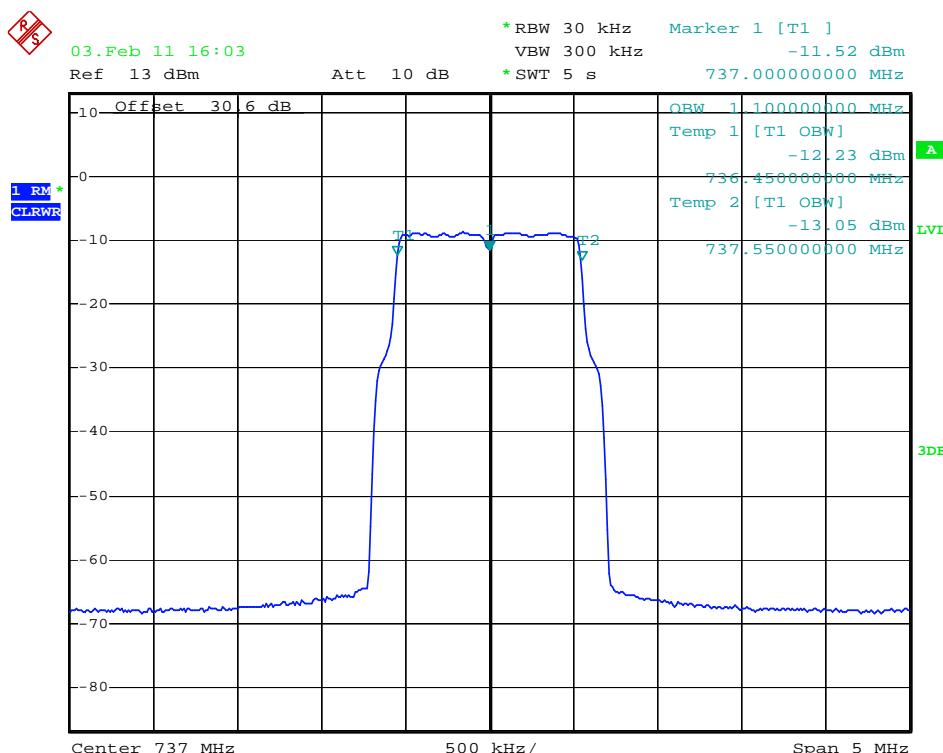

plot 6.3.1.1-#2 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN; Test results; Downlink; LTE 728 – 746MHz MAIN Input


Test Report No.:

FCC ID: XS5-IONM7785P




IC ID: 2237E-IONM7785P

6.3.1.2 LTE 746 – 757MHz MAIN

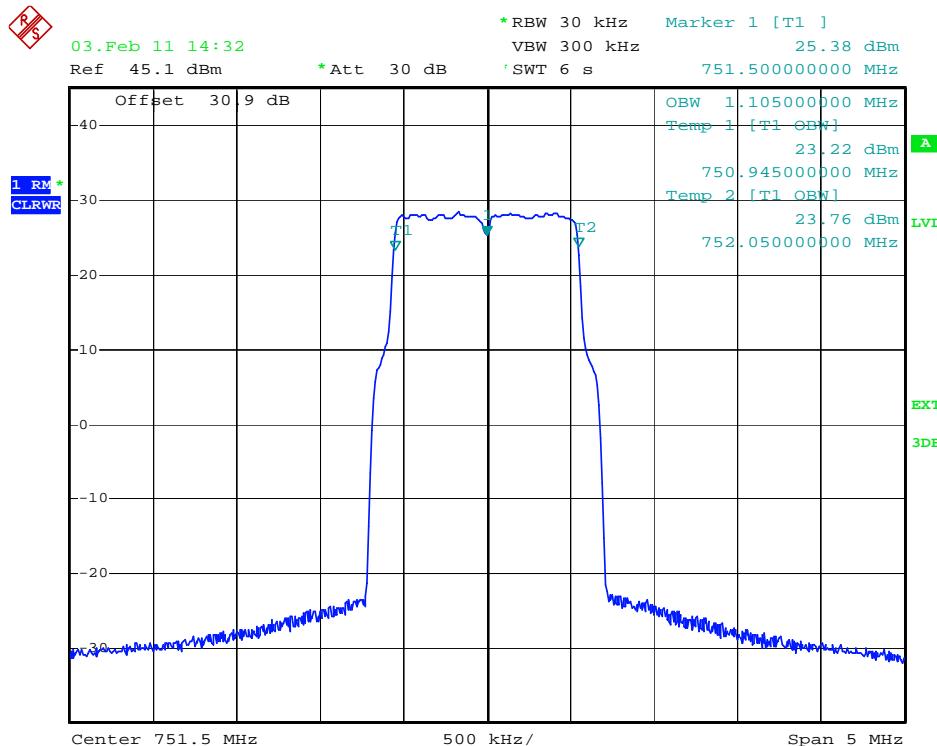

plot 6.3.1.2-#1 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN; Test results; Downlink; LTE 746 – 757MHz MAIN Output

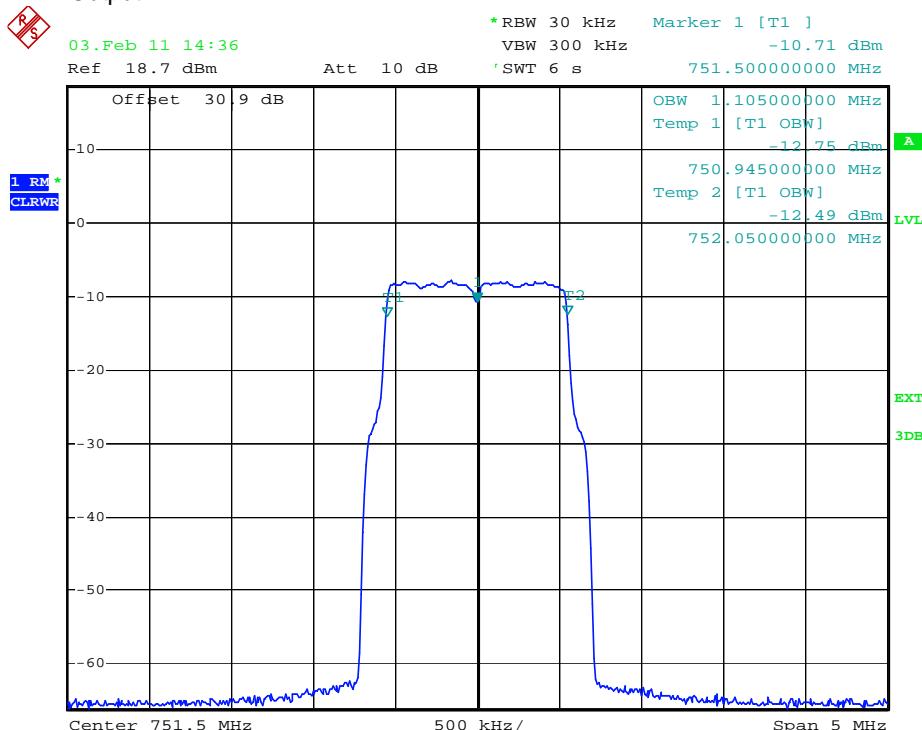

plot 6.3.1.2-#2 Occupied Bandwidth: §90.210, §2.1049; RSS-GEN; Test results; Downlink; LTE 746 – 757MHz MAIN Input

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	L.Oskerko
Date:	13.12.2010



7 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN

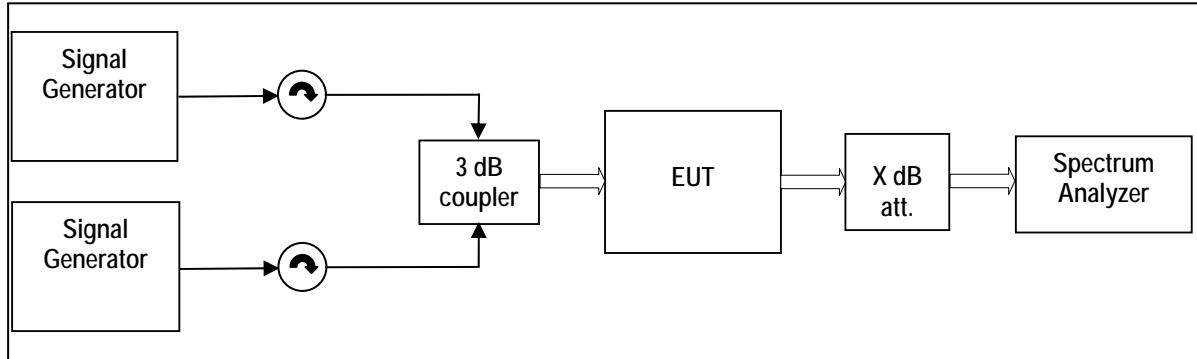


figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN

Measurement uncertainty	$\pm 0,54$ dB $\pm 1,2$ dB $\pm 1,5$ dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	8372, 8961, 8849, 7192, 7287, 7288, 7391	

7.1 Limit

7.1.1 Minimum standard

Para. No.27.53 (c) and (g)

(c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

7.1.2 Calculation of the limit

According to §27.53 (c)(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment:

$P_{out} = 43\text{dBm} = 20\text{W}$.

$76 + 10 \log(20\text{W}/1\text{W}) \text{ dB} = 89 \text{ dB}$ Attenuation $\Rightarrow 43\text{dBm} - 89\text{dB} = -46 \text{ dBm}$ in a 6.25 kHz band segment
Spurious measured in the plot with a RBW of 1MHz so the limit is calculated:

$\Rightarrow -46\text{dBm} / 6,25\text{kHz} + 10 \log(1\text{MHz}/6,25\text{kHz}) = -23,96\text{dBm} / 1\text{MHz}$
maximum measured emission level is $-25 \text{ dBm} / 1\text{MHz}$: passed.



7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals. The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]

7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot #
LTE Band 12	Lower Edge	728,7 MHz 730,1 MHz	30kHz 300kHz 6MHz	-21,07	6.3.1.2-#1
	Upper Edge	743,9 MHz 745,3 MHz			6.3.1.2-#2
LTE Band13	Lower Edge	746,7 MHz 748,1 MHz	30kHz 300kHz 6MHz	-21,38	6.3.1.2-#1
	Upper Edge	754,9 MHz 756,3 MHz			6.3.1.2-#2

table 7.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN Test results <1MHz from Band

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier	RBW VBW Span	Max. level (dBm)	Plot -
LTE	737 MHz	MAIN	1MHz 3MHz 30MHz – 8GHz	-46,75
LTE			1MHz 3MHz 30MHz – 8GHz	-47,01


table 7.3-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN Test results >1MHz from Band Edge



7.3.1.1 LTE < 1MHz to band edge 728 – 746MHz, MAIN

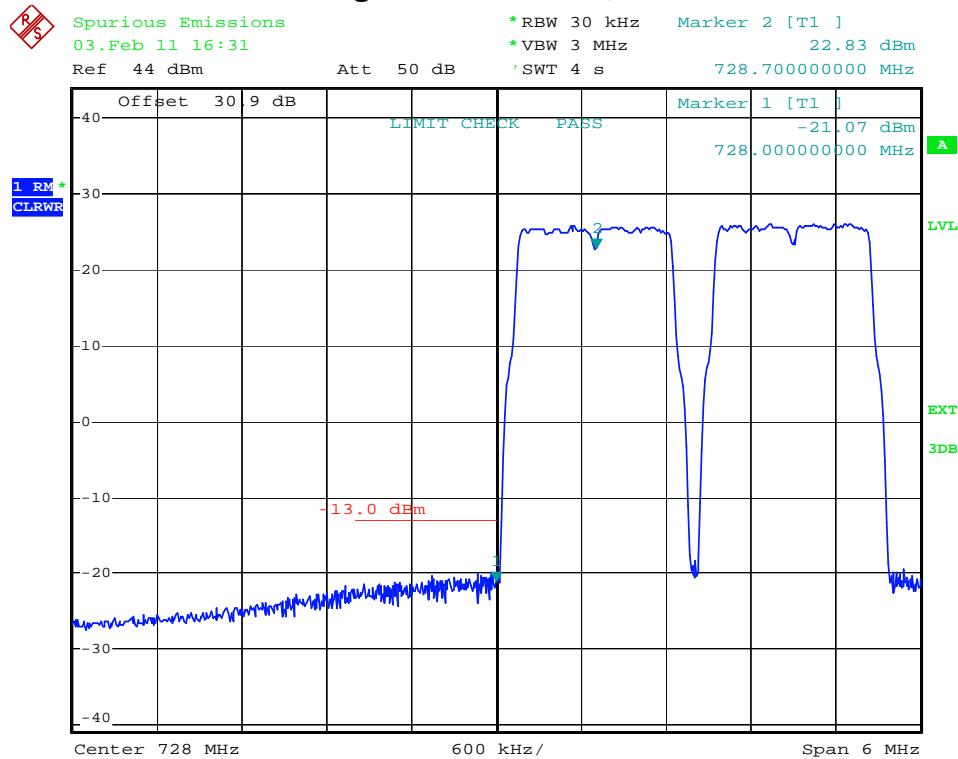


plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE < 1MHz to band edge 728 – 746MHz, MAIN Lower Band Edge

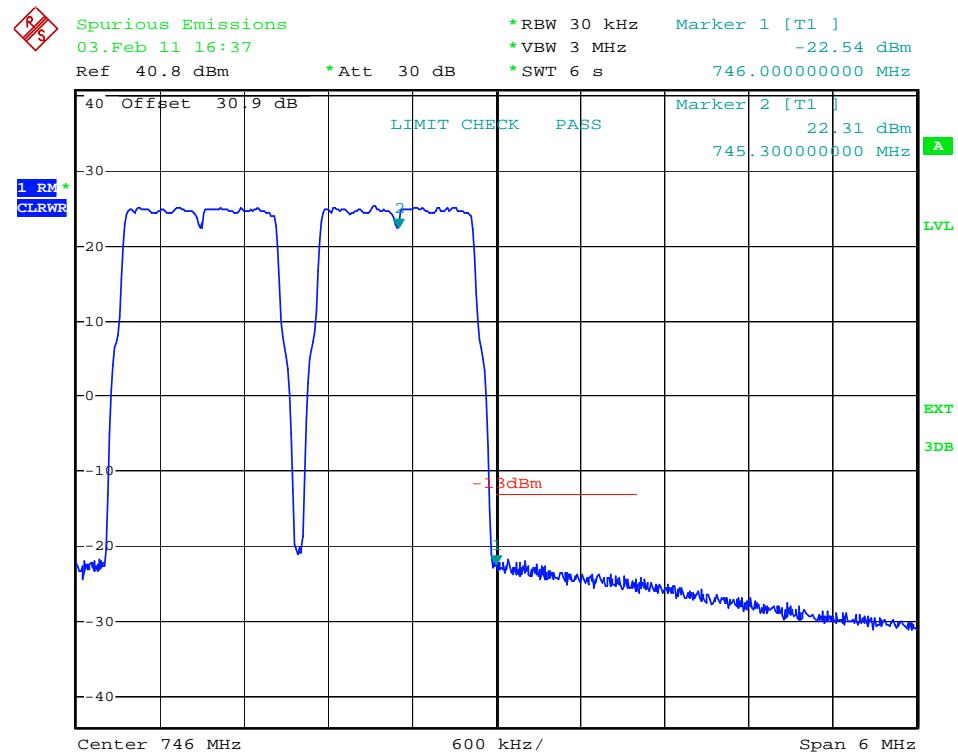


plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE < 1MHz to band edge 728 – 746MHz, MAIN Upper Band Edge

7.3.1.2 LTE < 1MHz to band edge 746 – 757MHz, MAIN

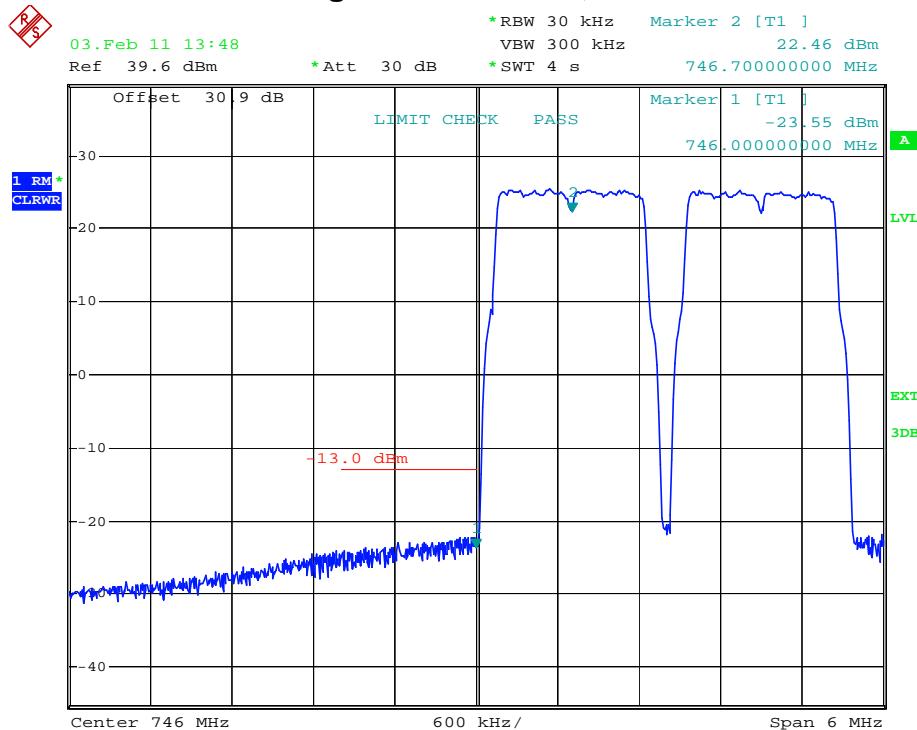


plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE < 1MHz to band edge 746 – 757MHz, MAIN Lower Band Edge

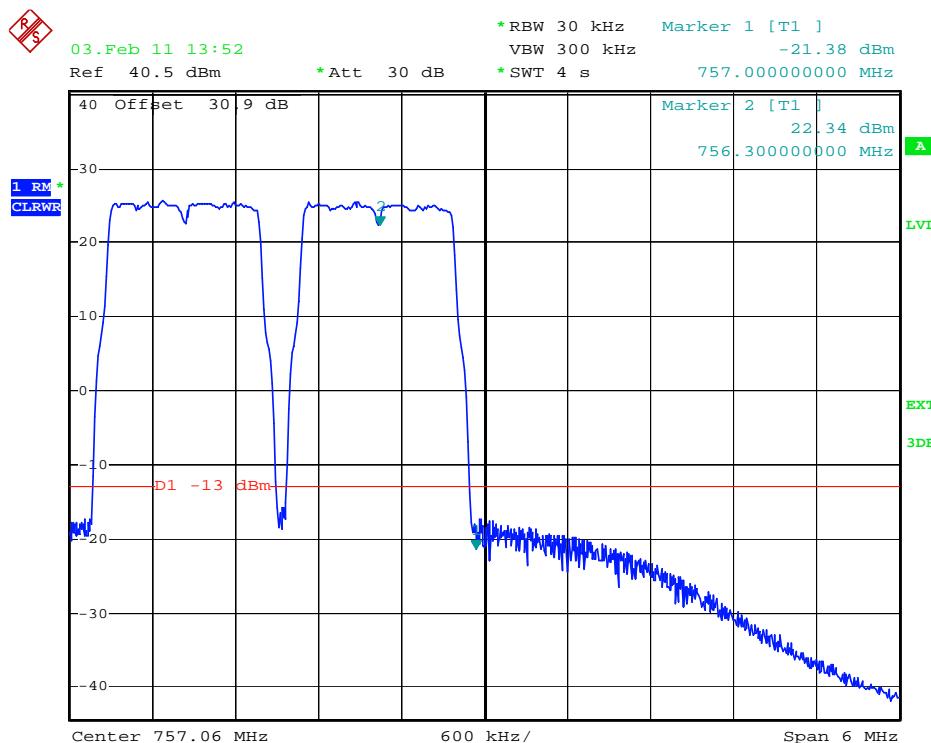

plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE < 1MHz to band edge 746 – 757MHz, MAIN Upper Band Edge




7.3.1.3 LTE > 1MHz to band edge 728 – 746MHz, MAIN

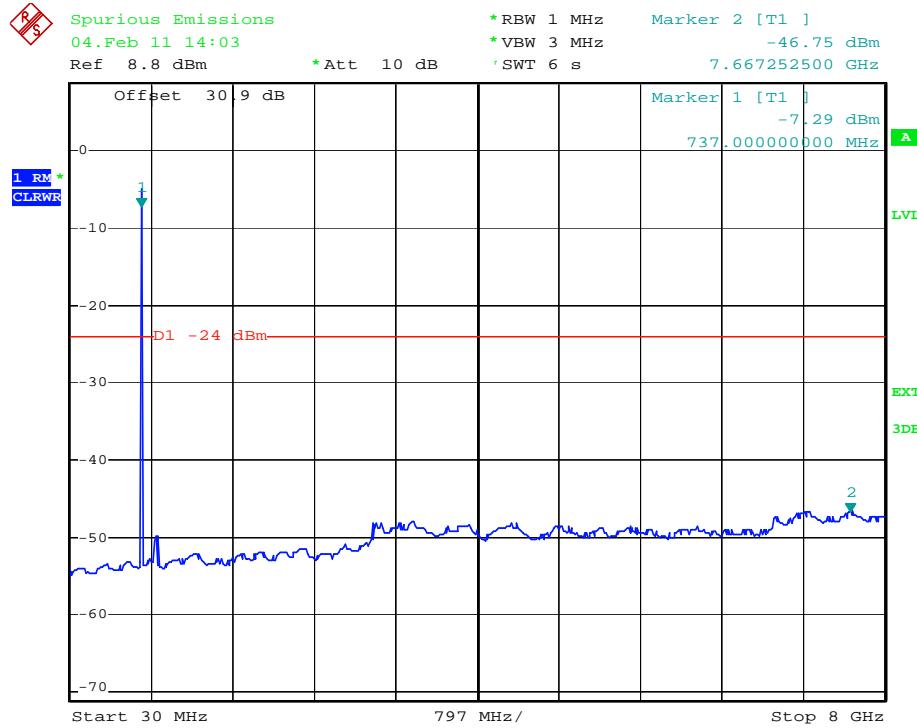

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE > 1MHz to band edge 728 – 746MHz, MAIN; carrier notched

7.3.1.4 LTE > 1MHz to band edge 746 – 757MHz, MAIN

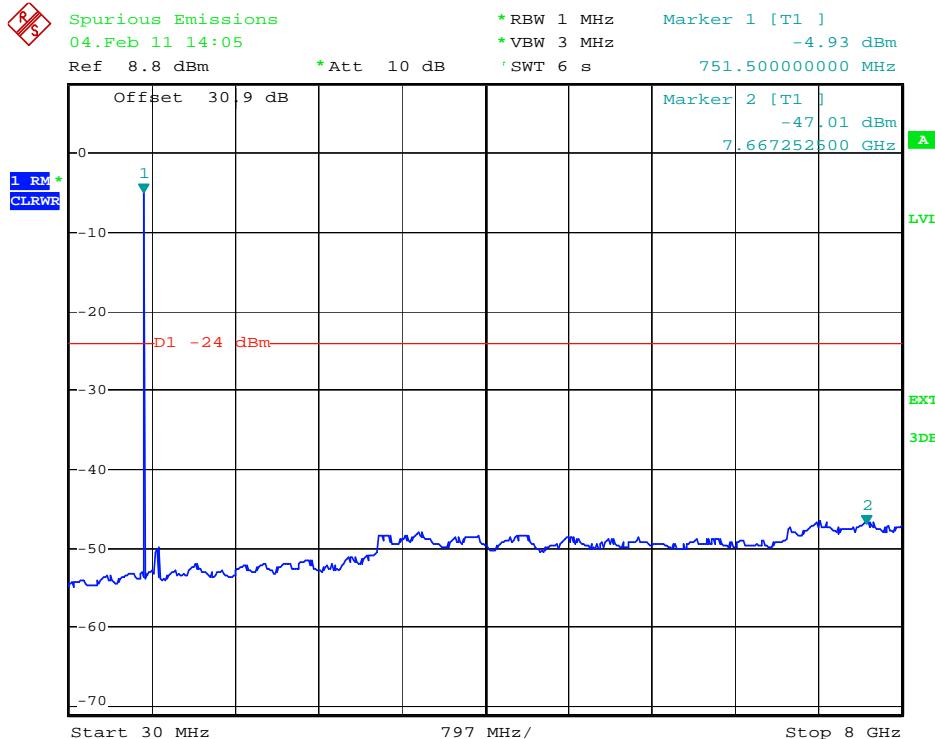

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; LTE > 1MHz to band edge 746 – 757MHz, MAIN; carrier notched

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



7.3.2 Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.

7.4 Summary test result

Test result	complies, according the plots above
Tested by:	L.Oskerko
Date:	13.12.2010


Test Report No.:

FCC ID: XS5-IONM7785P


IC ID: 2237E-IONM7785P



8 Radiated Spurious Emissions at the ECL (TEMPTON): §27.53, §2.1053, RSS-Gen, RSS-131

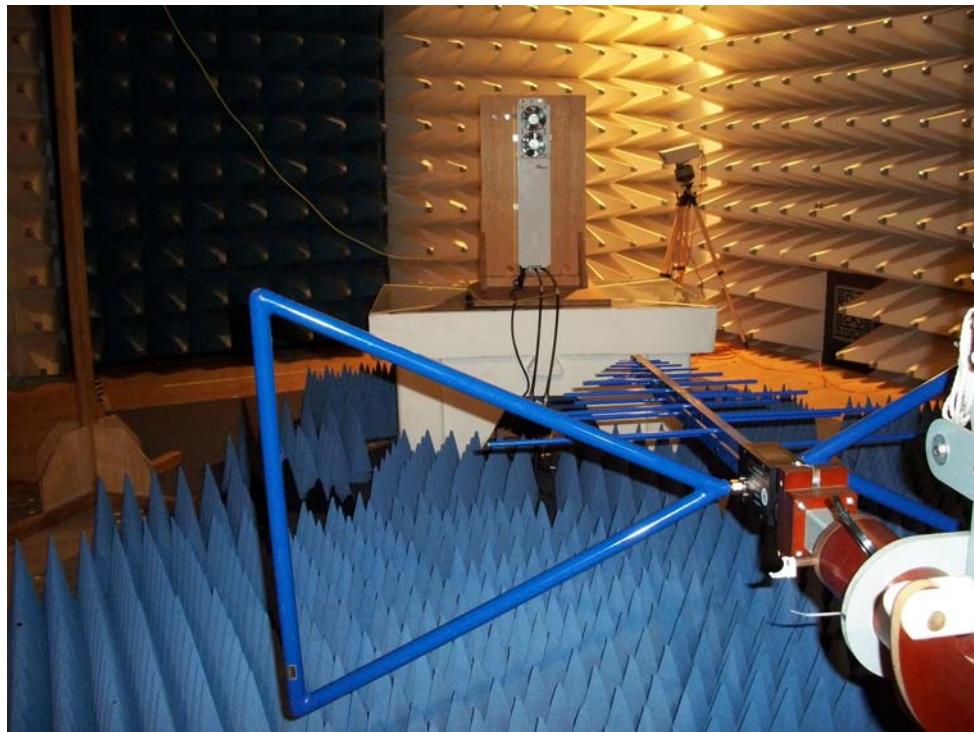

picture 8.1: Test setup: Field Strength Emission <1 GHz @3m in the FAC

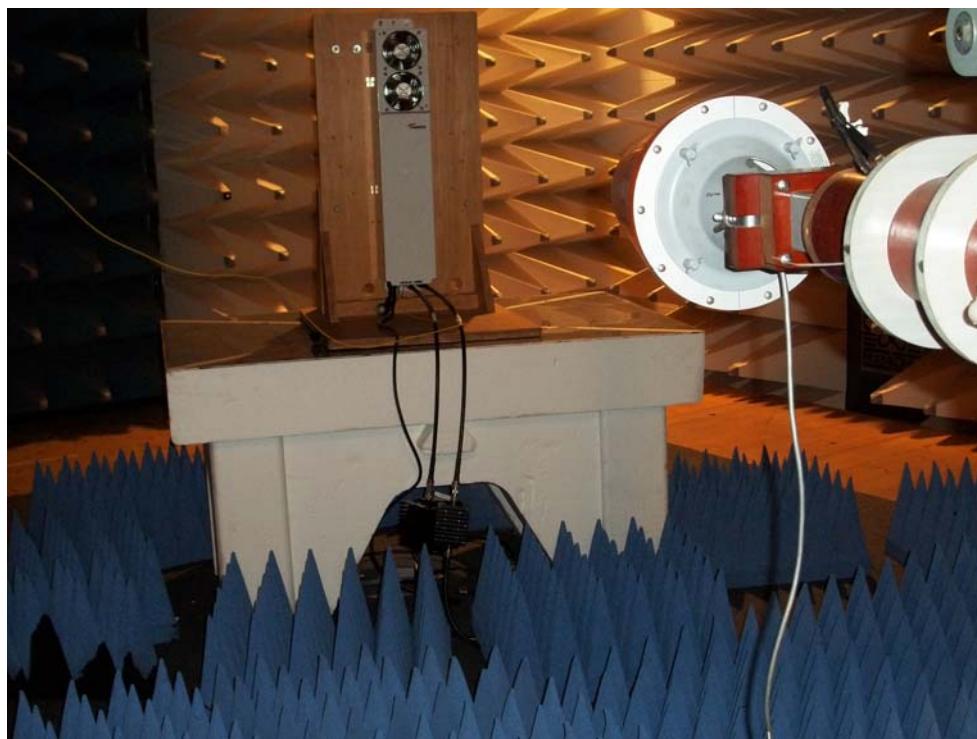

picture 8.2: Test setup: Field Strength Emission >1 GHz @3m in the FAC

Test Report No.:

FCC ID: XS5-IONM7785P



IC ID: 2237E-IONM7785P

This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <> antenna / location	Limit	Test method
30 MHz – 10 GHz	3 metres / FAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-131 sec. 4.4	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.-date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	20.10.2009	20.10.2010	X
EMI test receiver	ESI40	Rohde & Schwarz	E1607	04.03.2009	04.03.2010	
Antenna	CBL 6111	Chase	K1149	14.09.2009	14.09.2010	X
Antenna	CBL 6111	Chase	K1026	14.09.2009	14.09.2010	
RF Cable		Frankonia	K1121 SET	28.12.2009	28.12.2010	X
Pre amplifier	AM1431	Miteq	K1721	27.04.2009	27.04.2010	
Antenna	HL 025	R&S	K809	06.05.2009	06.05.2010	X
Antenna	MWH-1826 / B	ARA Inc.	K1042	06.04.2009	06.04.2010	
Antenna	MWH-2640 / B	ARA Inc.	K1043	06.04.2009	06.04.2010	
Preamplifier	AFS4-00102000	Miteq	K817	11.11.2009	11.11.2010	
Preamplifier	AFS4-00102000	Miteq	K838	06.10.2009	06.10.2010	X
Preamplifier	JS43-1800-4000	Miteq	K1104	26.08.2009	26.08.2010	
RF Cable	Sucoflex 100	Suhner	K1742	09.04.2009	21.07.2010	X

The REMI version 2.135 has been used to maximize radiated emission from the EUT with regards to ANSI C63.4:2009.

Test set-up:

Test location: FAC
Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz
Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---



8.1 Method of Measurement

Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations. The Bottom/Middle/Top frequencies for Part 27 F/H are as follows:

- 728/737/746 MHz (§27 Subpart H)
- 746/755/763 MHz (§27 Subpart F)

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps width during the measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

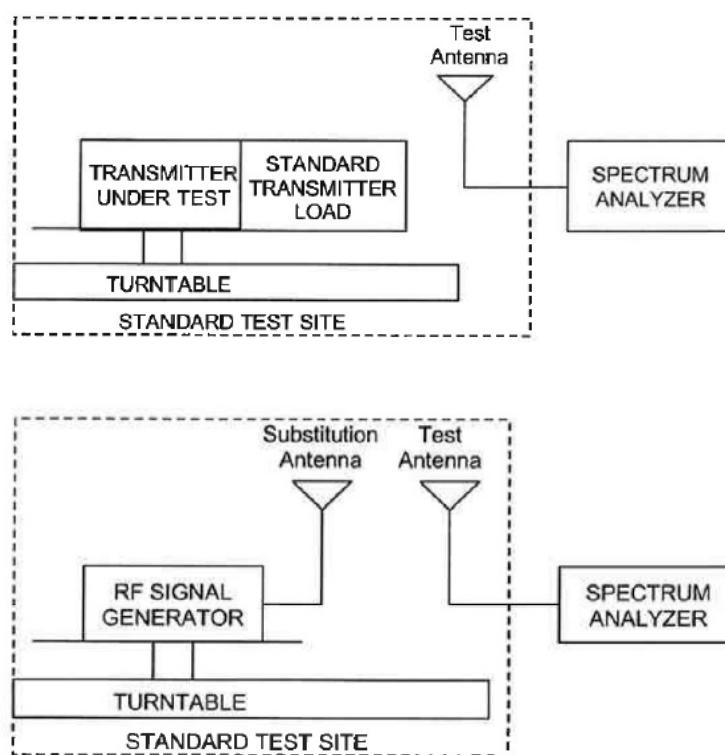


Figure #8.3 Substitution methods TIA/EIA-603-C

The maximum of the emission are searched by moving the turn table about 360 degrees and the height of the antenna from 1m to 2m. Due to this fact the polarisation has switched from vertical to horizontal to find the maximum of the unwanted emissions.



8.2 Limit

§27.53 Emission limitations / RSS-GEN sec. 4.9; RSS-131 sec. 4.4

Minimum standard:

Para. No.27.53 (c/d/g)

(c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

(g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

The Emission limit is **-13dBm**.

(d) For operations in the 758–763 MHz and 788–793 MHz bands, the power of any emission outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

The Emission limit is:

- **-33dBm** for measurements up to 1GHz
- **-24dBm** for measurements above 1 GHz

These Values have been calculated by a formula, which was a result of an inquiry (No. 141765) of the KDB:

$$\text{Limit} = P_{OUT} - (76 + 10 \log(P_{OUT}) - 10 \log(Bwdth / 6.25\text{kHz}))$$

8.3 Receiver Settings

	up to 1 GHz	above 1 GHz
Measurement bandwidth	120 kHz	1 MHz
Step width	60 kHz	500 kHz
Dwell time	20ms	
Detector	Peak	Average

8.4 Climatic values in the lab

Temperature	19°C
Relative Humidity	44%
Air-pressure	1014 hPa




8.5 Test results

8.5.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top) Subpart H

Bottom: 728MHz; Middle: 737MHz; Top: 746MHz


The following picture shows the maximum of the emission with horizontal and vertical polarisation.

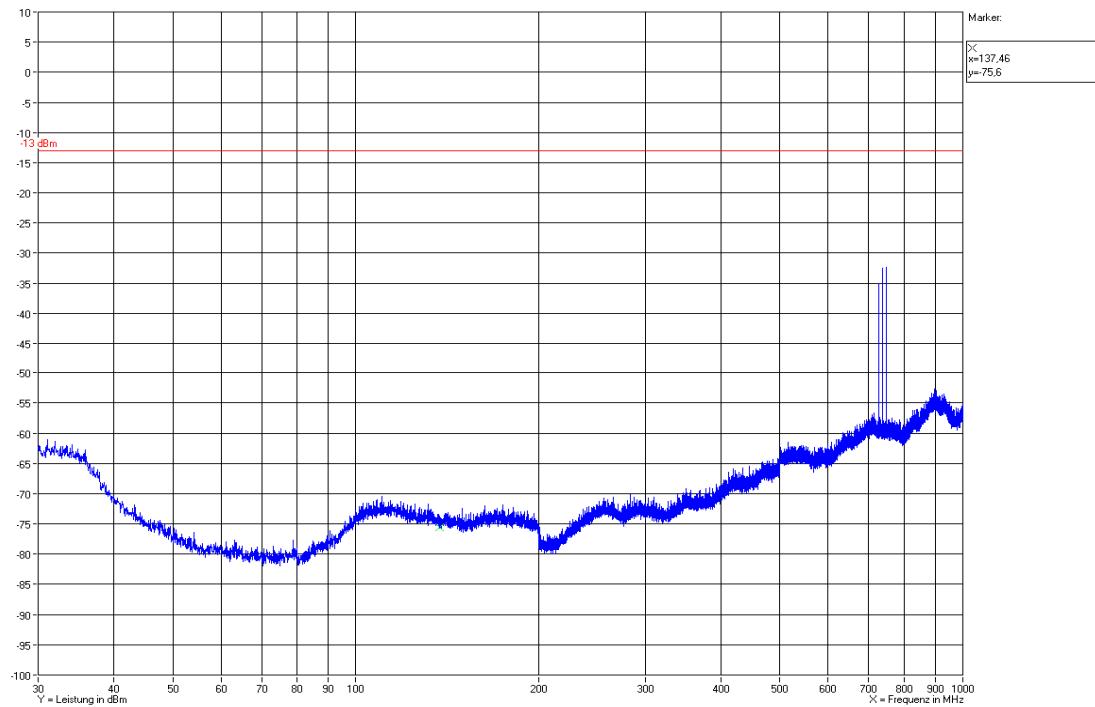

8.5.2 30 MHz to 1 GHz Downlink (Bottom – Middle – Top) Subpart F

Bottom: 746MHz; Middle: 751,5MHz; Top: 757MHz

The following picture shows the maximum of the emission with horizontal and vertical polarisation.

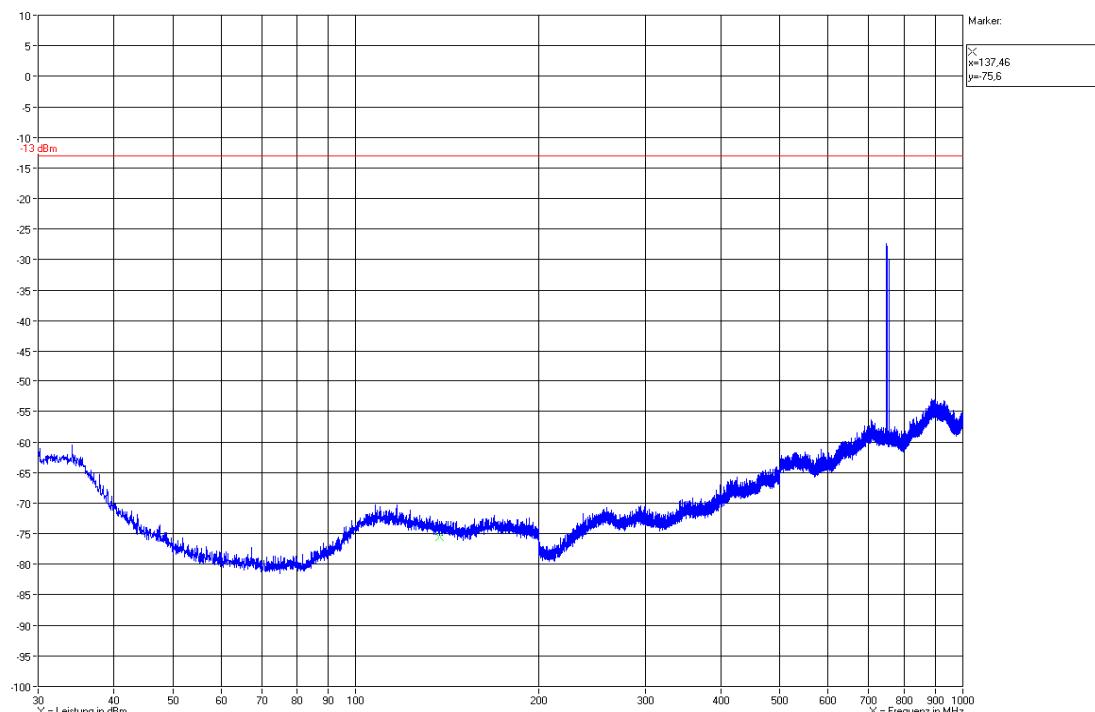

Test Report No.:

FCC ID: XS5-IONM7785P




IC ID: 2237E-IONM7785P

8.5.2.1 1 GHz to 10 GHz Downlink (Bottom – Middle – Top) Subpart H

Bottom: 728MHz; Middle: 737MHz; Top: 746MHz


The following picture shows the maximum of the emission at antenna height of 145cm, -4 degree (turn table) and vertical polarisation. This can be seen at picture 8.2.

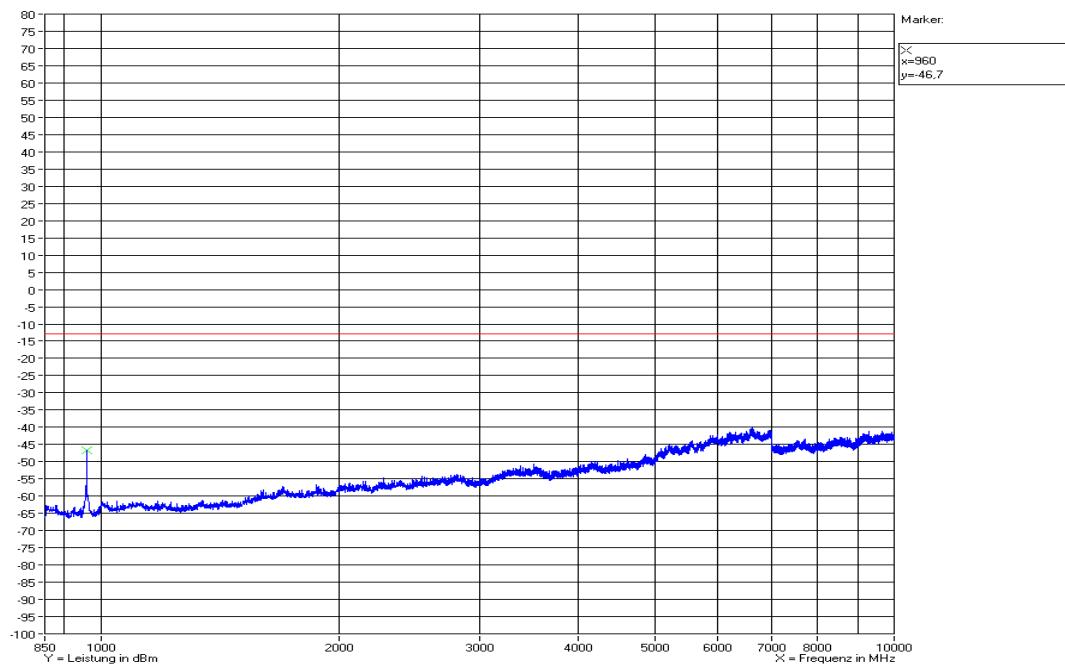

8.5.2.2 1 GHz to 8 GHz Downlink (Bottom – Middle – Top) Subpart F

Bottom: 746MHz; Middle: 751,5MHz; Top: 757MHz

The following picture shows the maximum of the emission at antenna height of 145cm, -4 degree (turn table) and vertical polarisation. This can be seen at picture 8.2.

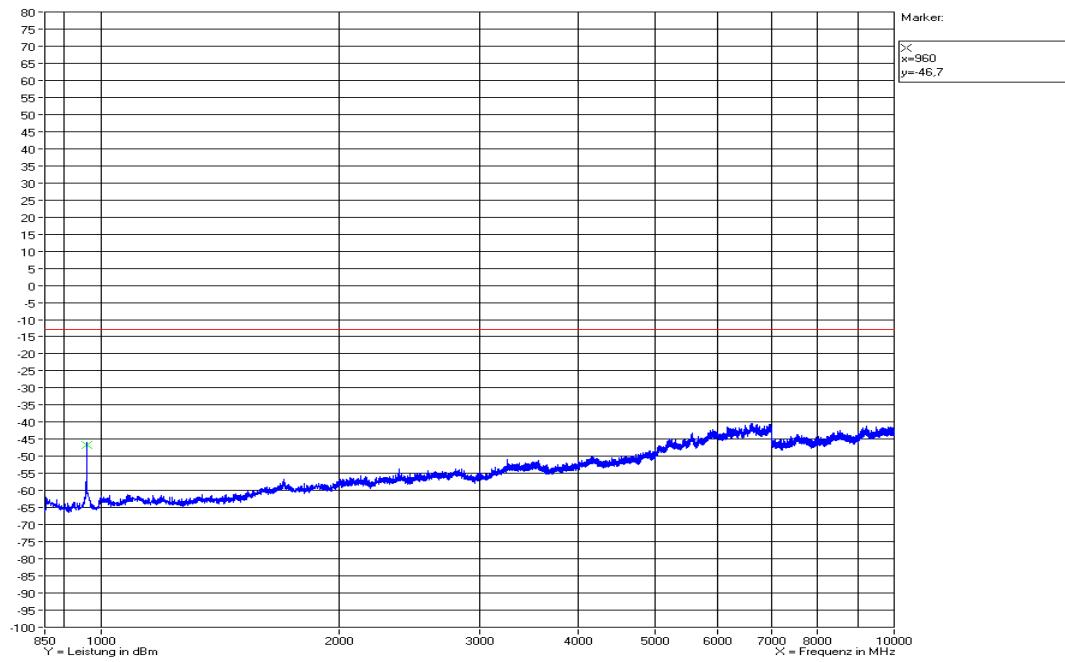

Zahlmann / 09.02.2011

The radiated spurious emission measurements have been passed!

Test Report No.:

FCC ID: XS5-IONM7785P

IC ID: 2237E-IONM7785P



9 History

Revision	Modification	Date	Name
01.00	Initial report	10.02.2011	Zahlmann

***** End of test report *****