

849 NW State Road 45 Newberry, FL 32669 USA

Ph: 888.472.2424 or 352.472.5500

Fax: 352.472.2030

Email: <u>info@timcoengr.com</u>
Website: <u>www.timcoengr.com</u>

# FCC PART 15.249 TEST REPORT UNLICENSED INTENTIONAL RADIATOR

Applicant	GOLF IMPACT LLC		
Address	3111 N.E. 51ST STREET SUITE 202		
	FT. LAUDERDALE FL 33308 USA		
FCC ID	XSCDYNPRO		
Product Description	CLUB HEAD MODULE		
Date Sample Received	10/27/2009		
Date Tested	11/3/2009		
Tested By	Richard Block		
Approved By	Mario de Aranzeta		
Report Number	2586UT9TestReport.doc		
Test Results			

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





## TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
EMC EQUIPMENT LIST	5
TEST PROCEDURES	6
RADIATION INTERFERENCE	7
OCCUPIED BANDWIDTH	9
BAND EDGE COMPLIANCE	11
POWER LINE CONDUCTED INTERFERENCE	16
RADIATED EMISSIONS TEST SETUP PHOTO	17

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### **GENERAL REMARKS**

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

#### **Summary**

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

#### **Attestations**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.

Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



### **Authorized Signatory Name:**

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

**Date:** 11/3/2009

APPLICANT: GOLF IMPACT LLC

FCC ID: XSCDYNPRO



#### **GENERAL INFORMATION**

# **DUT Specification**

The test results relate only to the items tested.						
Applicable Standard	Part 15.249					
DUT Description	CLUB HEAD MODULE					
FCC ID	XSCDYNPRO					
Operating Frequency	TX: 2.405-2.480 GHz		RX: Same	9		
DUT Power Source	☐ 110-120Vac/50-60H	[z				
	DC Power					
	☐ Battery Operated Exc	lusively				
Test Item	☑ Prototype	☐ Pre-Pr	oduction	Production		
Type of Equipment	Fixed	☐ Mobile	(6)	□ Portable		
Antenna Connector	FCC Rules require that t	he antenn	a connecto	or be unique.		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.					
Test Conditions	Temperature: 26°C					
105t Conditions	Relative humidity: 50%					
Test Exercise	The DUT was placed in c	ontinuous	transmit	mode of operation.		

# **Test Supporting Equipment**

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



# **EMC EQUIPMENT LIST**

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Analyzer Silver Tower Quasi-Peak Adapter	НР	85650A	3303A01844	CAL 9/24/08	9/24/10
Analyzer Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 9/24/08	9/24/10
Analyzer Silver Tower Spectrum Analyzer	НР	8566B Opt 462	3552A22064 3638A08608	CAL 9/24/08	9/24/10
Antenna: Biconnical	Eaton	94455-1	1057	CAL 1/15/08	1/15/10
Antenna: Log- Periodic	Eaton	96005	1243	CAL 12/13/07	12/13/09

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### **TEST PROCEDURES**

**Radiation Interference:** ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasipeak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz) Meter Reading + ACF + CL = FS

33 20 dBuV + 10.36 dB + 0.5 = 30.86 dBuV/m @ 3m

**Power Line Conducted Interference:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

**Occupied Bandwidth**: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

**ANSI C63.4-2003 10.1 Measurement Procedures:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: GOLF IMPACT LLC

FCC ID: XSCDYNPRO



#### **RADIATION INTERFERENCE**

**Rules Part No.:** 15.249, 15.209

## Requirements:

Frequency	Limits
Pa	rt 15.209
9 to 490 kHz	2400/F (kHz) μV/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μV/m @ 30 meters
1705 kHz to 30 MHz	29.54 dBμV/m @ 30 meters
30 – 88	40.0 dBμV/m @ 3 meters
80 – 216	43.5 dBµV/m @ 3 meters
216 – 960	46.0 dBµV/m @ 3 meters
Above 960	54.0 dBµV/m @ 3 meters
Pa	rt 15.249
Fundamental 902 – 928 MHz	94.0 dBµV/m @ 3 meters
Fundamental 2.4 – 2.4835 MHz	94.0 dBµV/m @ 3 meters
Harmonics	54.0 dBµV/m @ 3 meters

#### **Test Data:**

Tuned	Emission	Meter	Ant.	Coax	Correction	Field	Margin	Peak
Frequency	Frequency	Reading	Polarity	Loss	Factor	Strength	dB	Average
MHz	MHz	dBuV		dB	dB/m	dBuV/m		
2,405.0	2,405.00	48.8	V	3.18	32.25	84.23	9.77	
2,405.0	2,405.00	50.4	H	3.18	32.25	85.83	8.17	
2,405.0	4,810.00	2.7	H	4.91	34.10	41.71	12.30	Average
2,405.0	4,810.00	3.4	V	4.91	34.10	42.41	11.60	Average
2,405.0	4,810.00	20.0	H	4.91	34.10	59.01	15.00	Peak
2,405.0	4,810.00	20.3	V	4.91	34.10	59.31	14.70	Peak
2,405.0	7,215.00	12.2	H	5.73	36.04	53.97	0.03	
2,405.0	7,215.00	12.2	V	5.73	36.04	53.97	0.03	
2,405.0	9,620.00	5.4	H	6.79	36.72	48.91	5.09	
2,405.0	9,620.00	6.5	V	6.79	36.72	50.01	3.99	
2,405.0	12,025.00	2.7	Н	7.82	38.72	49.24	4.76	
2,405.0	12,025.00	3.4	V	7.82	38.72	49.94	4.06	
2,440.0	2,440.00	50.0	H	3.21	32.34	85.55	8.45	
2,440.0	2,440.00	50.8	V	3.21	32.34	86.35	7.65	
2,440.0	4,880.00	-0.3	H	4.94	34.10	38.74	15.26	Average
2,440.0	4,880.00	3.3	V	4.94	34.10	42.34	11.66	Average
2,440.0	4,880.00	20.2	H	4.94	34.10	59.24	14.76	Peak
2,440.0	4,880.00	20.6	V	4.94	34.10	59.64	14.36	Peak
2,440.0	7,320.00	-1.7	V	5.79	36.06	40.15	13.85	Average
2,440.0	7,320.00	13.1	V	5.79	36.06	54.95	19.05	Peak

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### TEST DATA CONTD.


Tuned	ed Emission Meter Ant.			Coax	Correction	Field		Peak			
Frequency	Frequency	Reading	Polarity	Loss	Factor	Strength	Margin	Average			
MHz	MHz	dΒμV		dB	dB/m	dBμV/m	dB	Average			
2,440.0	7,320.00	11.6	H	5.79	36.06	53.45	0.55				
2,440.0	9,760.00	6.7	H	6.83	36.86	50.39	3.61				
2,440.0	9,760.00	6.8	V	6.83	36.86	50.49	3.51				
2,440.0	12,200.00	4.6	V	7.94	38.86	51.40	2.60				
2,440.0	12,200.00	6.1	H	7.94	38.86	52.90	1.10				
2,480.0	2,480.00	44.7	H	3.24	32.45	80.39	13.61				
2,480.0	2,480.00	46.9	V	3.24	32.45	82.59	11.41				
2,480.0	4,960.00	0.1	H	4.98	34.10	39.18	14.82	Average			
2,480.0	4,960.00	2.7	V	4.98	34.10	41.78	12.22	Average			
2,480.0	4,960.00	16.2	H	4.98	34.10	55.28	18.72	Peak			
2,480.0	4,960.00	20.8	V	4.98	34.10	59.88	14.12	Peak			
2,480.0	7,440.00	-1.9	V	5.86	36.09	40.05	13.95	Average			
2,480.0	7,440.00	11.8	H	5.86	36.09	53.75	0.25				
2,480.0	7,440.00	14.3	V	5.86	36.09	56.25	17.75	Peak			
2,480.0	9,920.00	5.3	H	6.88	37.02	49.20	4.80				
2,480.0	9,920.00	6.6	V	6.88	37.02	50.50	3.50				
2,480.0	12,400.00	4.4	Н	8.08	39.02	51.50	2.50				
2,480.0	12,400.00	5.0	V	8.08	39.02	52.10	1.90				

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



## **DUTY CYCLE**

3 pulses 0f 0.6 msec for a total of 1.8 msec in a 100 msec time frame 20 dB duty cycle

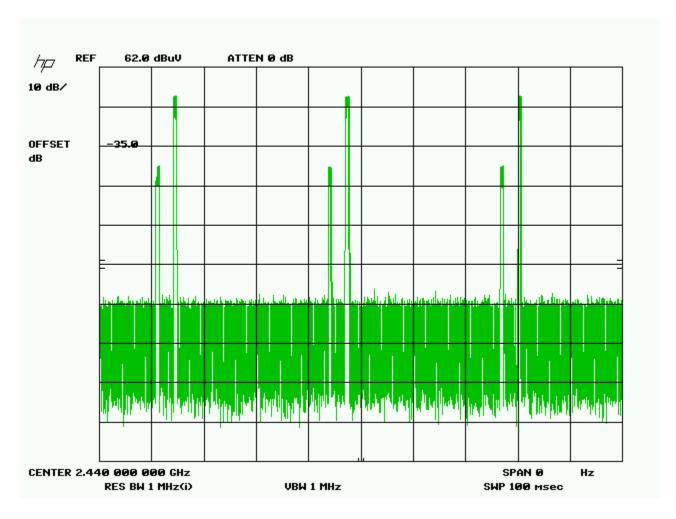

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO




#### OCCUPIED BANDWIDTH

**Rules Part No.:** 15.249 (d)

**Requirements**: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

#### **Test Data:**

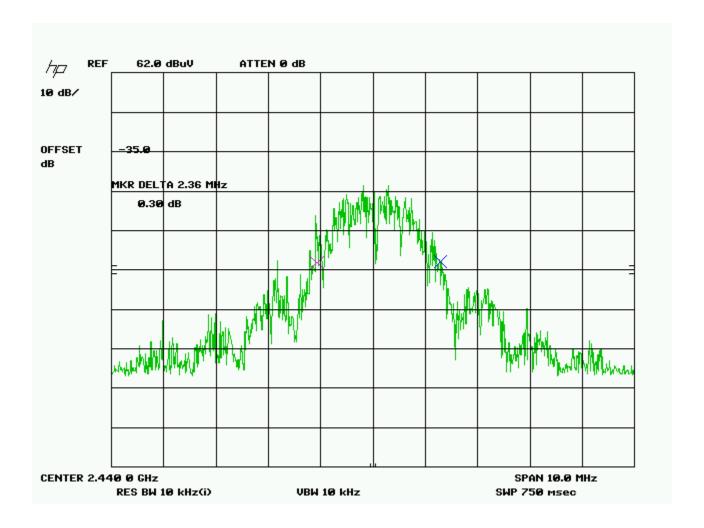

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### **BAND EDGE COMPLIANCE**

**Rules Part No.:** 15.249 (d)

**Requirements**: 40 dBc or in the case of restricted bands 54 dBuV/m.

**Test Data:** 

Lower bandedge




Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,405.0	2,399.66	19.6	V	3.18	32.24	55.02	18.98

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### Average Plot

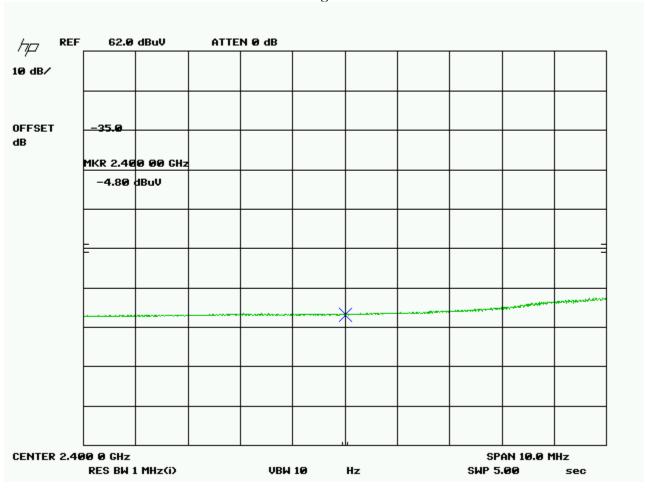


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
	212.2.2	<b>424</b> .	• /	~~	42/111	4241/111	
2,405.0	2,400.00	-4.8	$\mathbf{V}$	3.18	32.24	30.62	23.38

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



# Lower non-adjacent restricted band

#### Peak Plot

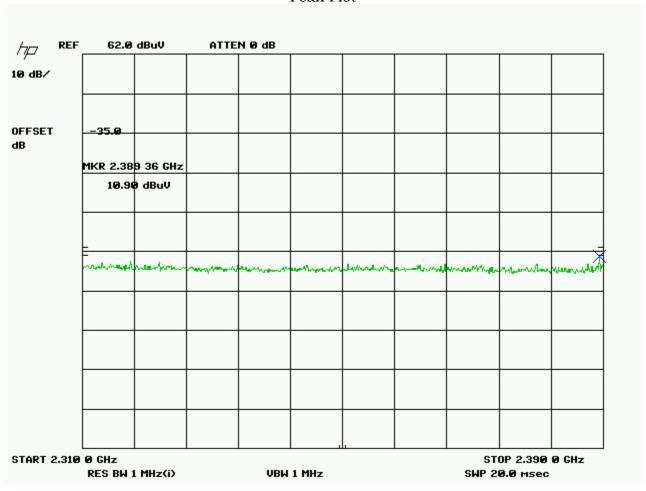


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,405.0	2,389.36	10.9	V	3.17	32.21	46.28	7.72

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



# Upper bandedge



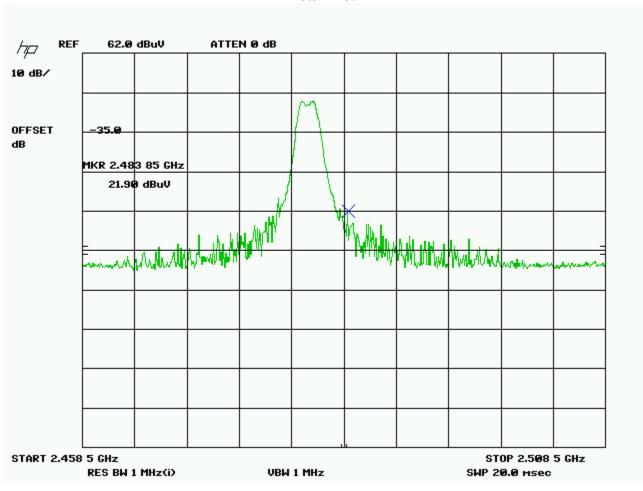


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,480.0	2,483.85	21.9	V	3.24	32.46	57.60	16.4

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



## Average Plot

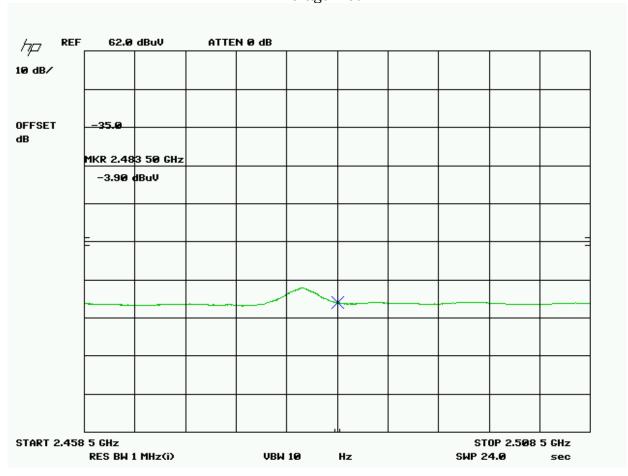

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,480.0	2,483.50	-3.9	V	3.24	32.46	31.80	22.20

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



#### POWER LINE CONDUCTED INTERFERENCE

**Rules Part No.:** 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBμV)	Average Limits (dBµV)
0.15 - 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 - 30	60	50


**Test Data:** The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

N/A Battery powered DUT.

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO



## RADIATED EMISSIONS TEST SETUP PHOTO

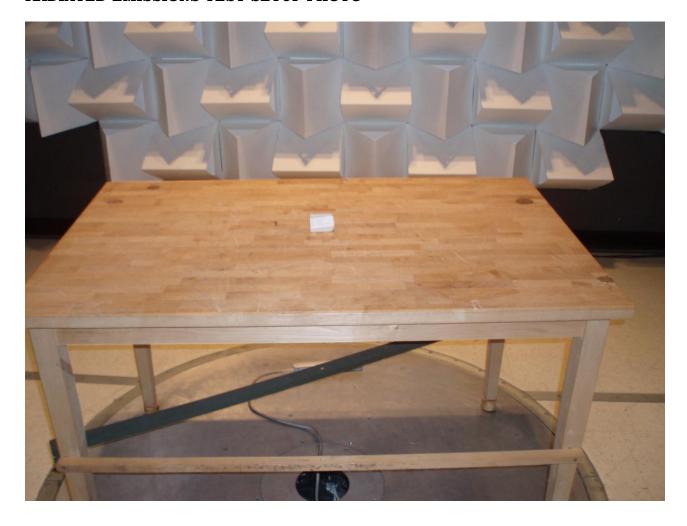

APPLICANT: GOLF IMPACT LLC FCC ID: XSCDYNPRO