
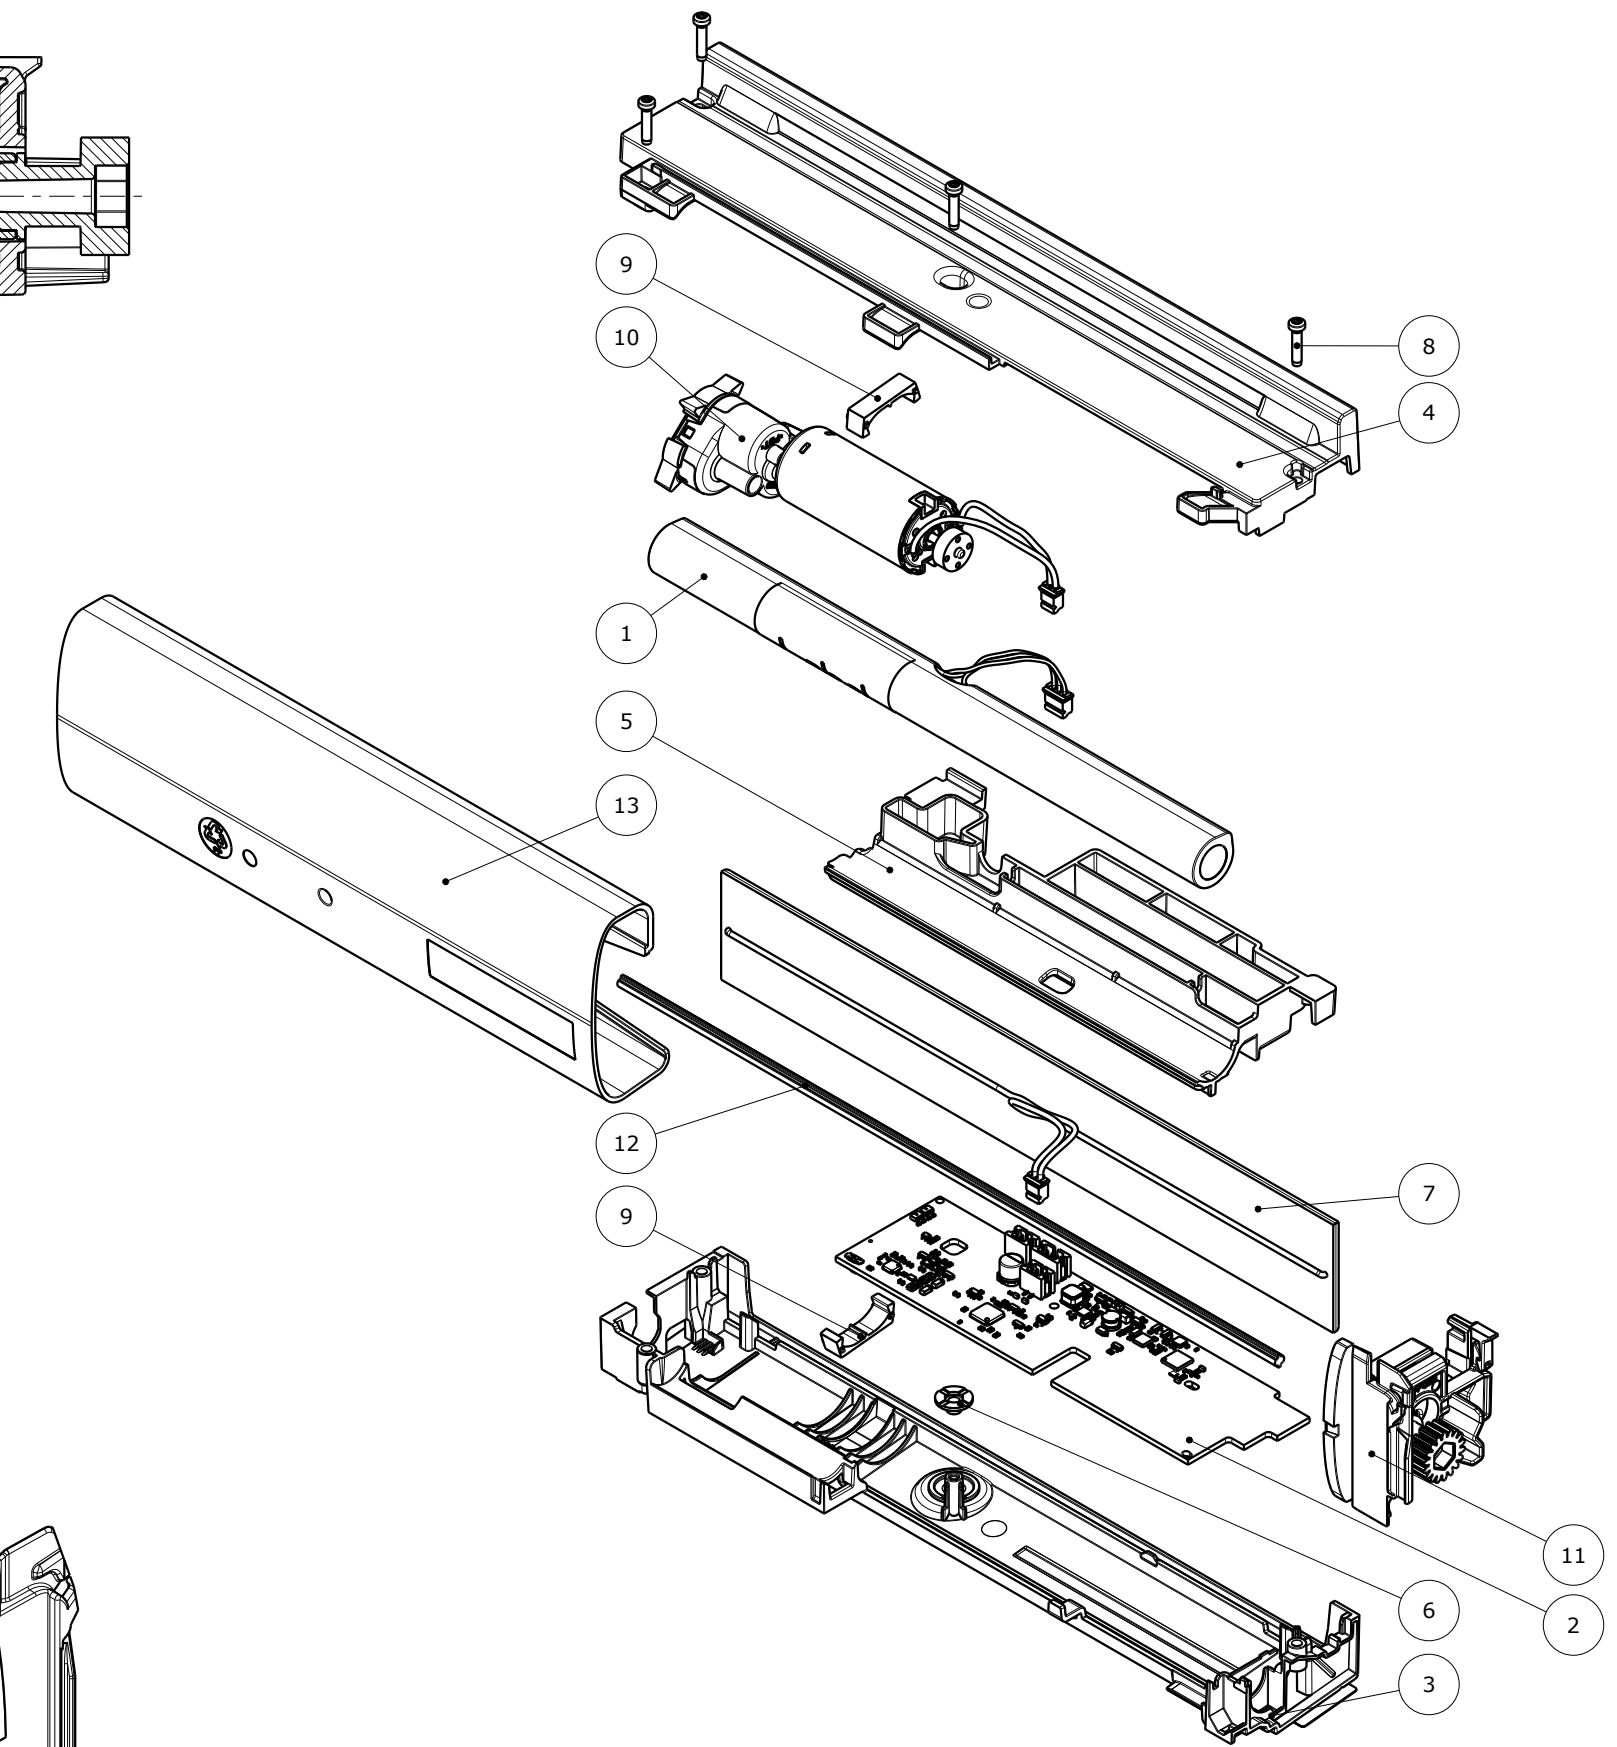
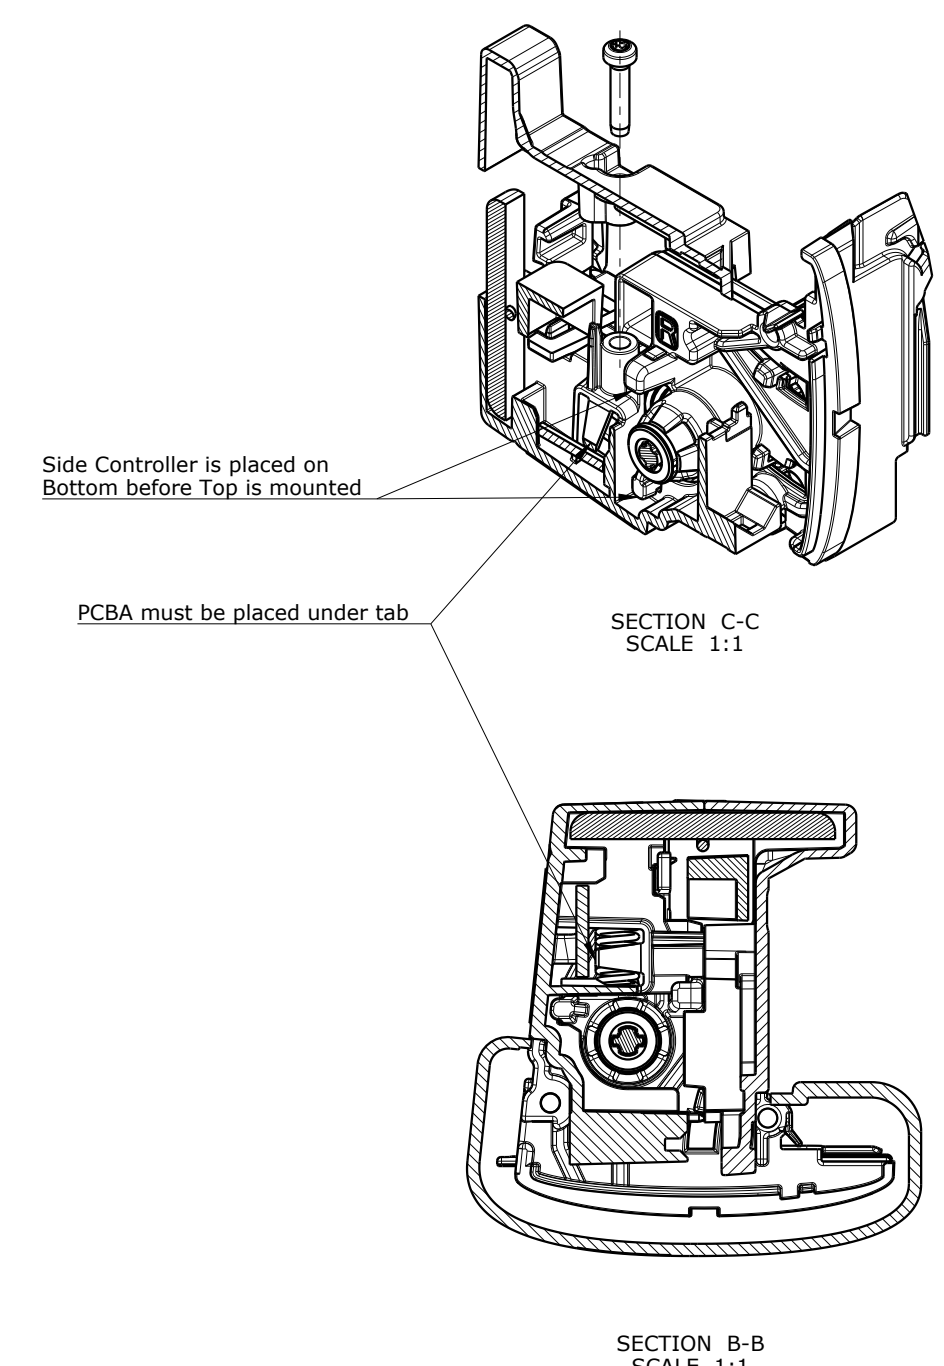
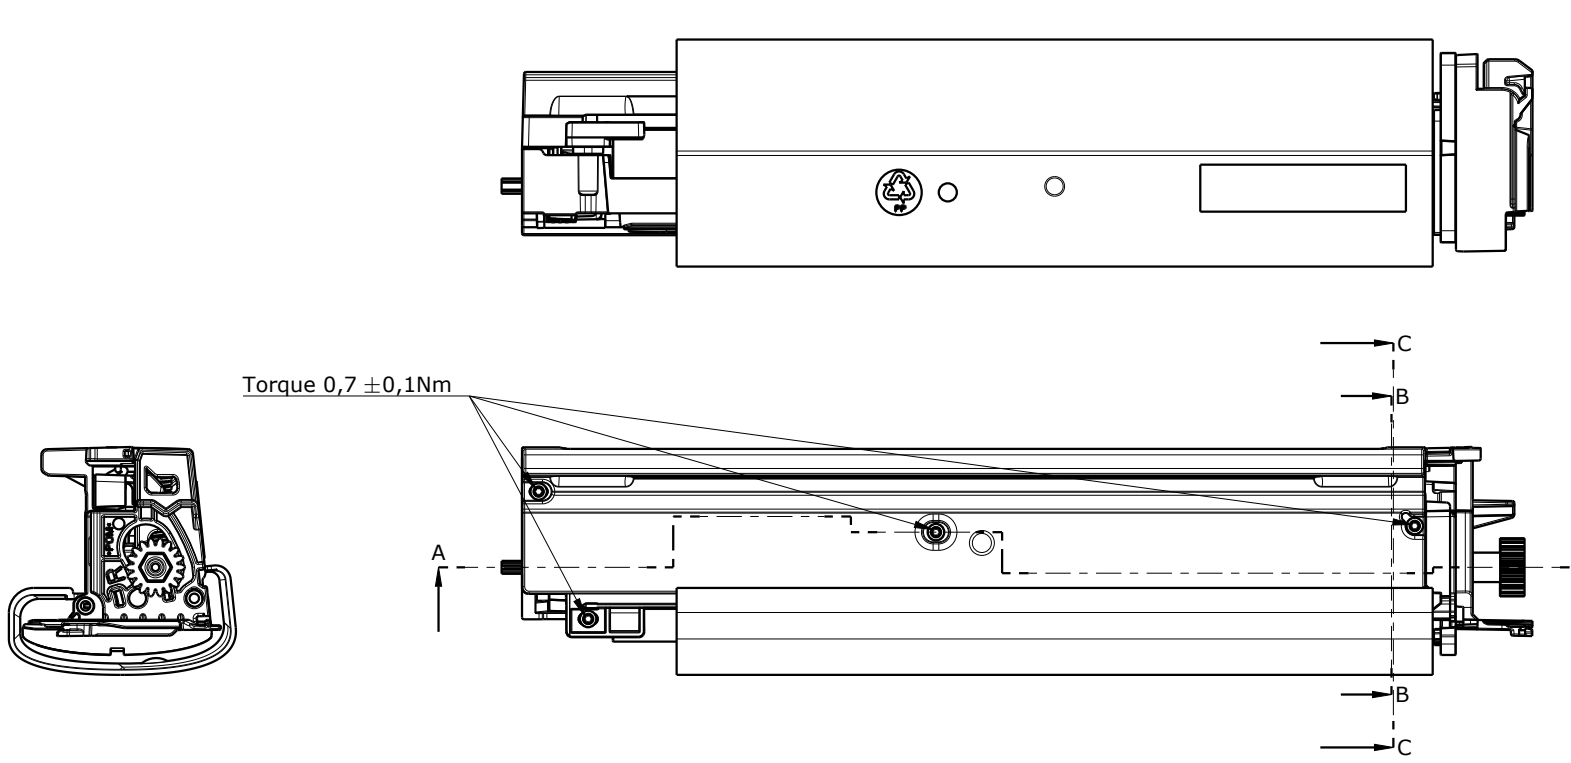
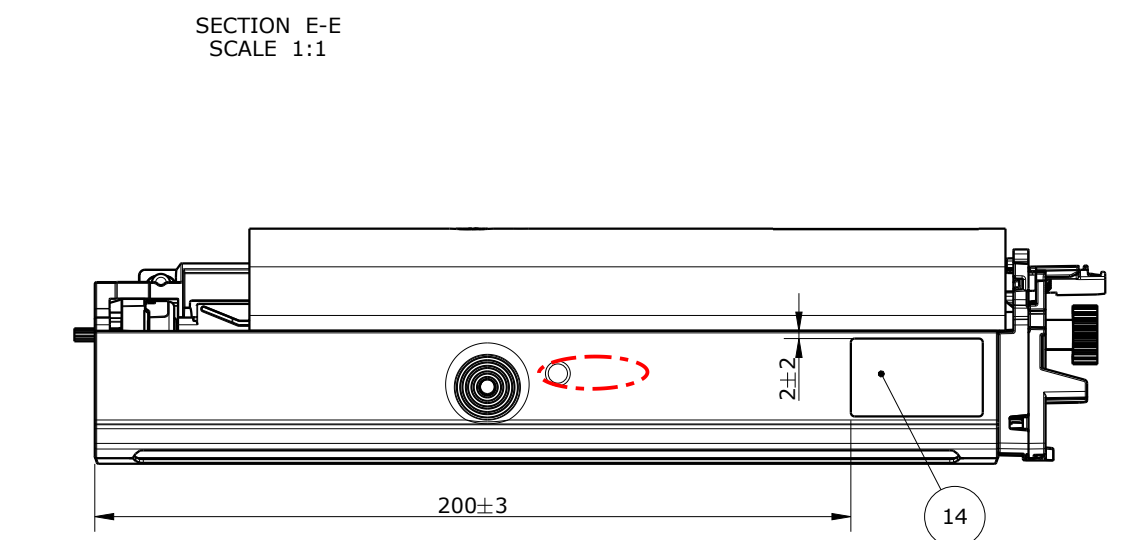


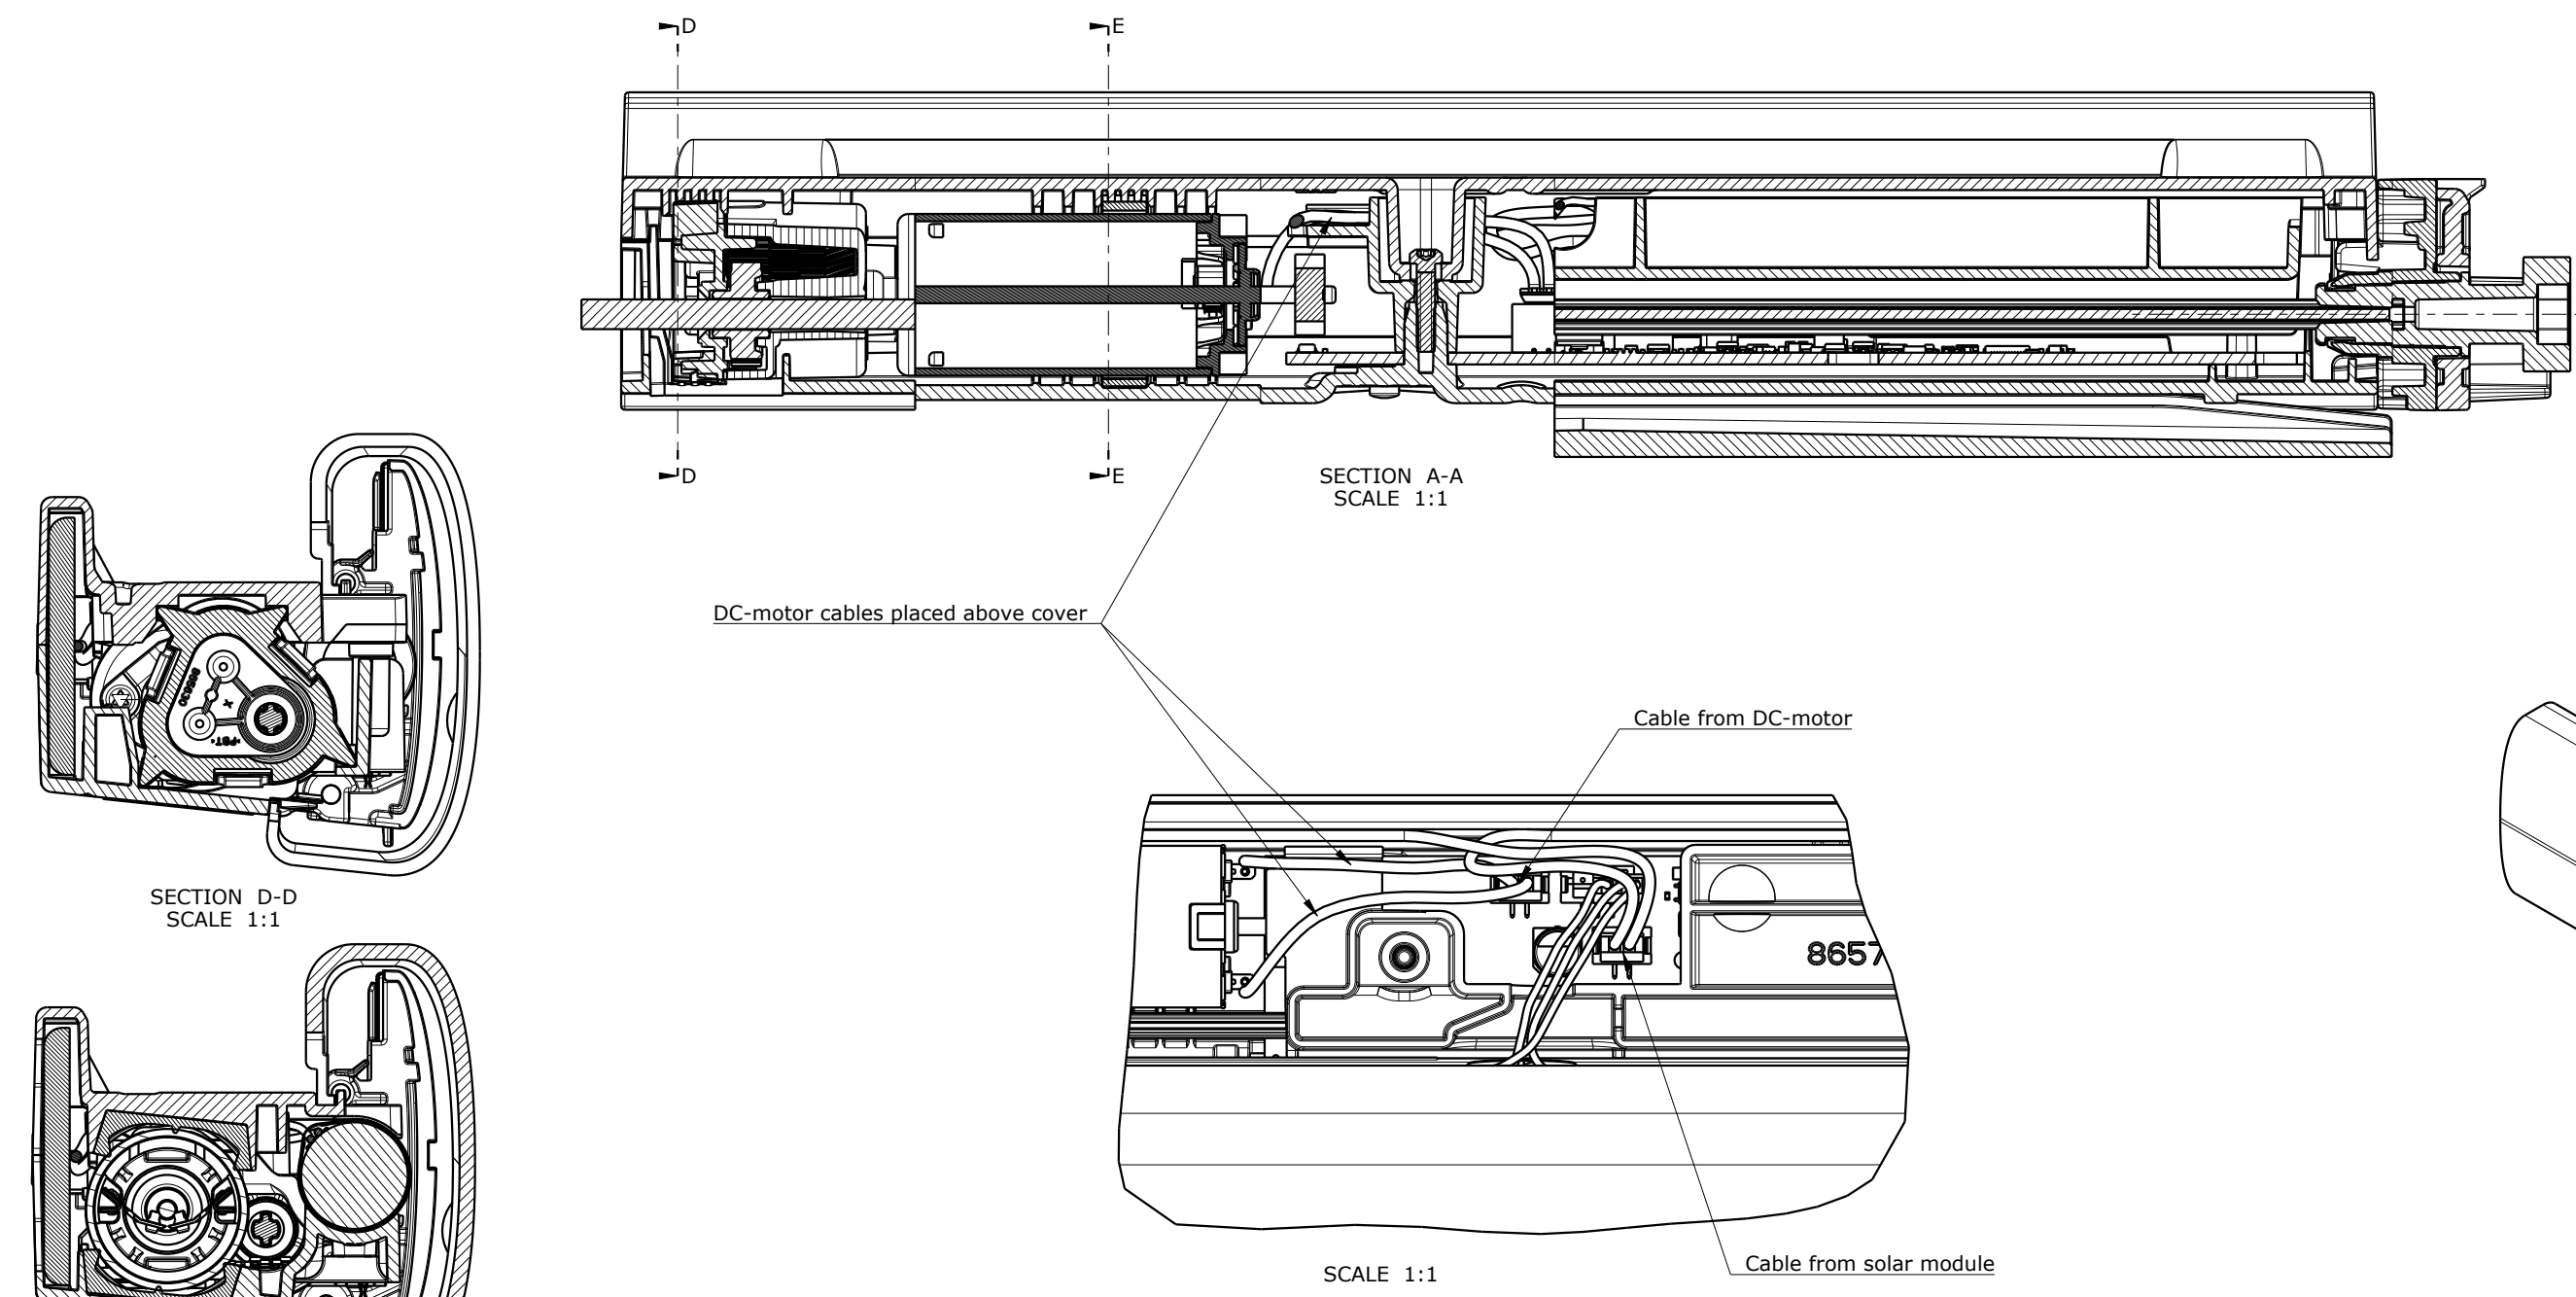

BOM						
Pos	Component	Drawing	Description	Qty.	Unit	
1	833874	833874.500	Battery Pack, 4.8V NiMH	1	PC	
2	865744	865744.320	Solar Blind PCBA,US,prog+test+lacq	1	PC	
3	865758	865758.000	Bottom, f/box for electronics	1	PC	
4	865759	865759.000	Top, f/box for electronics	1	PC	
5	865760	865760.000	Solar Support, f/box for electronics	1	PC	
6	865762	865762.000	Button, On/Off	1	PC	
7	865769	865769.000	Solar Module, C-Si, PUR, indoor, 35mm	1	PC	
8	865776	865776.000	Screw,(25)2.5x12,TX+8IP,PH PT@,BN20173	4	PC	
9	865897	865897.000	Vibration Damper, silicone	2	PC	
10	866054	866054.500	DC-motor, w/gearbox	1	PC	
11	866090	866090.500	Side Controller, R, complete	1	PC	
12	866111	866111.000	Drive Shaft, internal	1	PC	
13	866278	866278.000	ESD Protection Shield,f/blind motor unit	1	PC	
14	45100142		Label 34.9x20.6,printed with QR-code	1	PC	
15	830230		Ink foil 48 mm for PET labels	0.015	m	
Material			Colour			
Drawing			Specifications	866057.87		
Standards			Q-instructions			
VELUX		VELUX A/S	Scale	Approved date	Approved by	
		Ådalsvej 99, DK-2970 Hørsholm	1:2			
Sub-assembly			Size	General tolerance	Modified by	
			A2		Søren Jespersen-Skree	
Motor Unit, US solar blind, small			Lifecycle			Rev.
			In Work	21	866061.500	2