

Installation Guide

Operation Instruction

1. Pair: Press Pair/CH key of RX for 5 sec to enter pair mode, then press Pair key of TX to complete the pair.

2. Channel Select: 4 CH Available, Press CH key to select display mode: CH1 / CH2 / CH3 / CH4 / Auto Switch/Quad.

3. Time Set for Channel Auto Switching: Simultaneously press Pair key and QVGA/VGA key of RX, then screen will start to count from 1-20 sec, release buttons when it counts to the number needed.

4. Resolution: Press QVGA/VGA key of RX to select QVGA(320x240) or VGA(640x480).

5. Privacy: Select any CH, then press QVGA/VGA key for 5 sec, the CH will be hidden under auto switch and quad mode. Press QVGA/VGA key for 5 sec again, it will resume as normal!

Accessories

Cigarette Charger	Extension cable with Power DC Jack	Velcro	Option: AC Adaptor
-------------------	------------------------------------	--------	--------------------

<1>


Product Specification Sheet

Specification

ITEM	DESCRIPTION
Model	TR-2473A/TR-2473
TV System	NTSC / PAL
Digital wireless Distance	150m (open side)
Data Transfer Rate	160K bytes/s
Transfer Resolution	640x480 up to 7~10 FPS / 320x240 up to 20~25 FPS
Compression	MJPEG
Audio	Option
RF Frequency	2.4GHz
Video Input / Output	1Vp-p Composite
Operating Temperature	-10°C ~ + 60°C
Storage Temperature	-40°C ~ + 100°C
Operating Humidity	30%~90%Rh
TX BOX	
Input Voltage	DC 6V ~ 24V
Operating Current	120mA (without Audio function)
Connectors	RCA input with DC Jack output for Camera and DC jack for power in
Transmitting Power	16 dBm
Dimensions	W: 50mm, H: 18mm, L: 60mm (without cable SR)
RX BOX	
Power input	DC 6V ~ 24V
Operating Current	100mA (without Audio function)
Resolution select	High 640x480 / Low 320x240
Camera Channel select	CH1 / CH2 / CH3 / CH4 / Quad / Auto
Connectors	RCA x2 for Video1 and Video2 output, DC jack for power in
Sensitivity	-81 dBm
Dimensions	W: 50mm, H: 18mm, L: 60mm (without cable SR)

<2>

105mm

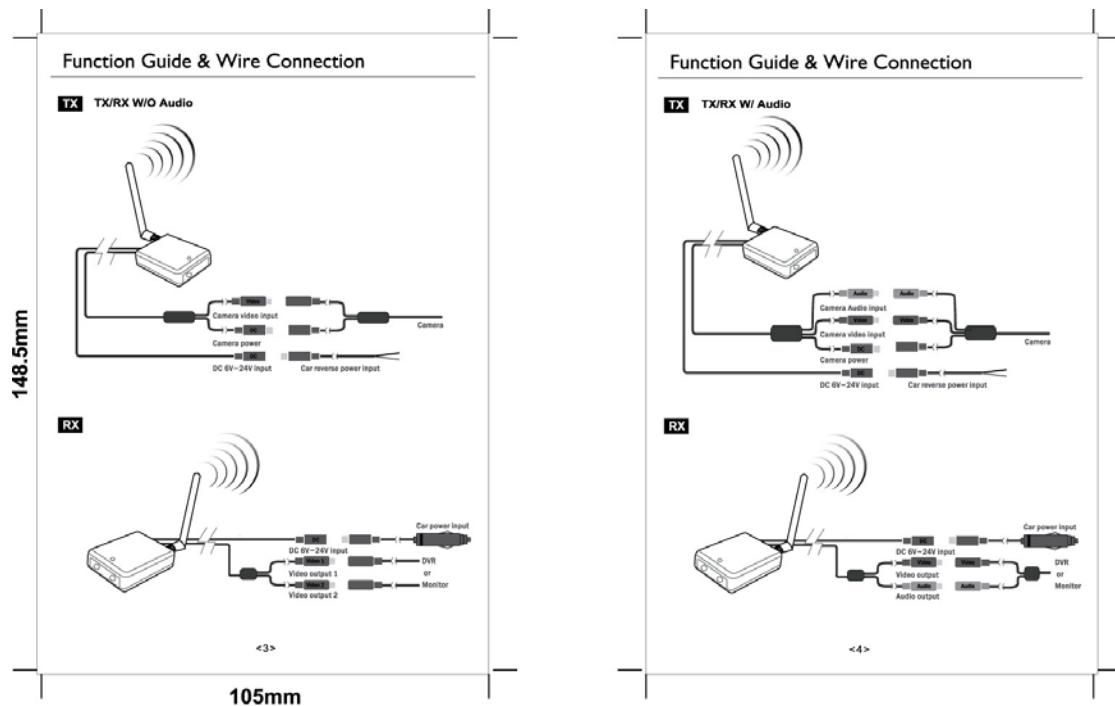

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference,

and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IEEE 802.11b or 802.11g operation of this product in the U.S.A. is firmware-limited to channels 1 through 11.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.