



# Emissions Test Report

**EUT Name:** TransAir PTC-3006

**Model No.:** PTC-3006

CFR 47 Part 95

*Prepared for:*

Lilee Systems, Ltd.  
2905 Stender Way, Suite 78  
Santa Clara, CA 95054 U.S.A.  
Tel: (408) 988-8672

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane, Ste. A  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

**Report/Issue Date:** November 26, 2012  
**Report Number:** 31260509.004B

# Statement of Compliance

*Manufacturer:* Lilee Systems, Ltd.  
2905 Stender Way, Suite 78  
Santa Clara, CA 95054 U.S.A.

*Requester / Applicant:* Lilee Systems, LTD

*Name of Equipment:* TransAir PTC-3006

*Model No.* PTC-3006

*Type of Equipment:* Intentional Radiator

*Application of Regulations:* CFR 47 Part 95

*Test Dates:* 28 February 2012 to 18 May 2012 and July 10, 2012

*Guidance Documents:*

Emissions: ANSI/TIA-603-C:2004

*Test Methods:*

Emissions: ANSI/TIA-603-C:2004

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.




Suresh Kondapalli

November 26, 2012

Test Engineer

Date



Conan Boyle

November 26, 2012

NVLAP Signatory

Date



INDUSTRY  
CANADA



US5254 Testing Cert #3331.02

2932M-1

1097 (A-0031)

<b>1</b>	<b><i>Executive Summary</i></b>	<b>6</b>
1.1	Scope	6
1.2	Purpose	6
1.3	Summary of Test Results	6
1.4	Special Accessories	8
1.5	Equipment Modifications	8
<b>2</b>	<b><i>Laboratory Information</i></b>	<b>9</b>
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST/A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	11
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	12
<b>3</b>	<b><i>Product Information</i></b>	<b>13</b>
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Duty Cycle:	13
3.5	Unique Antenna Connector	14
3.5.1	Results	14
<b>4</b>	<b><i>Emission Requirements – 218 to 219 MHz Band</i></b>	<b>15</b>
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	16
4.2	Occupied Bandwidth	30
4.2.1	Test Method	30
4.2.2	Results	31
4.3	Spectral Mask requirements	35
4.4	Conducted Spurious Emissions	43

## Index of Tables

4.4.1	Test Method	43
4.4.2	Results	44
<b>4.5</b>	<b>Transmitter Spurious Emissions</b>	<b>48</b>
4.5.1	Test Methodology	48
4.5.2	Transmitter Spurious Emission Limit	49
4.5.3	Test Results	49
4.5.4	Sample Calculation	54
<b>4.6</b>	<b>Receiver Spurious Emissions</b>	<b>55</b>
4.6.1	Test Methodology	55
4.6.2	Receiver Spurious Emission Limit	56
4.6.3	Test Results	56
4.6.4	Conducted spurious emissions in Receive mode	57
4.6.5	Sample Calculation	60
<b>4.7</b>	<b>Test Setup Photos</b>	<b>61</b>
<b>5</b>	<b>Test Equipment Use List</b>	<b>63</b>
<b>5.1</b>	<b>Equipment List</b>	<b>63</b>
<b>6</b>	<b>EMC Test Plan</b>	<b>64</b>
6.1.1	Introduction	64
6.1.2	Customer	64
6.1.3	Equipment Under Test (EUT)	65
6.1.4	Test Specifications	67

<b>Table 1:</b> Summary of Test Results .....	6
<b>Table 2:</b> RF Output Power at the Antenna Port – Test Results.....	16
<b>Table 3:</b> Occupied Bandwidth – Test Results .....	31
<b>Table 4:</b> Spectral Mask Requirements – Test Results.....	36
<b>Table 5:</b> Out of band Conducted Emission – Test Results.....	44
<b>Table 6:</b> Customer Information.....	64
<b>Table 7:</b> Technical Contact Information .....	64
<b>Table 8:</b> EUT Specifications .....	65
<b>Table 9:</b> EUT Channel Power Specifications.....	66
<b>Table 10:</b> Interface Specifications:.....	66
<b>Table 11:</b> Supported Equipment : .....	66
<b>Table 12:</b> Description of Sample used for Testing.....	66
<b>Table 13:</b> Description of Test Configuration used for Radiated Measurement. ....	67
<b>Table 14:</b> Test Specifications .....	67

## 1 Executive Summary

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 95 based on the results of testing performed from February 28 to May 18, 2012 and July 10, 2012, on the TransAir PTC-3006 Model PTC-3006 manufactured by *Lilee Systems, LTD*. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

Transmitter Modulation, output power and other parameters

Test	FCC Rule Part	Measured value/ Comments	Limit/Requirement	Result
Frequency ranges	2.1033( C ) (5) 95.853	218 to 219MHz	218-219 MHz	Complied
Power	2.1033( C ) (6) 2.1033( C ) (7) 2.1046 95.855	Conducted at ant port 1.0Watt (mobile ) Conducted at ant port 4.56Watts (Fixed station)	ERP 4 Watts mobile <sup>1</sup> ERP 20watts Fixed	Complied
Emission Mask	2.1033( C ) (4) 2.1047 95.857	Device Complies with spectral mask – see test data	Mask 95.857	Complied
Occupied (99%) Bandwidth	2.1049	8.94 kHz 10.13 kHz 23.29 kHz	For information only	

<sup>1</sup> Transmitter output power for fixed stations is factory set max limit at 36.59 dBm (4.56 watts). The EIRP calculation is based on max gain antenna of 3dBi. The equipment design prevents higher power by lockout/error message. Transmitter output power for mobile stations is factory set max limit at 30.0dBm (1Watt). Licencee ensures Fixed and mobile units are limited to 20Watts and 4watts ERP respectively.

## Transmitter spurious emissions

Test	FCC Rule Part	Measured value/ Comments	Limit/Requirement	Result
<b>Transmitter spurious</b>				
At Antenna Terminal	2.1051 2.1057	-26.61 dBm	-13 dBm	Complied
Radiated (erp)	80.211(f), 95.857			
<b>Receiver spurious</b>				
At Antenna terminal	15.111	-70.74 dBm	-57 dBm	Complied
Field strength	15.109	36.64 dBuV/m at 65 MHz	Refer Section CFR 15.109	Complied

§Calculated from measured field strength using free space propagation equation.

€ EUT is Class A device, at 10 meters

## Other parameters

Test	FCC Rule Part	RSS Rule Part	Measured value/ Comments	Limit/Requirement	Result
RF Exposure	1.1307 (b) 2.1093 80.227	RSS-102	<b>RF Exposure is addressed at time of licensing. MPE calculation is provided here.</b>		
DC voltage and current for final amplifier stage	15.107	RSS-GEN	12 VDC, 6 Amps	Information only	-

#### **1.4 *Special Accessories***

No special accessories were necessary in order to achieve compliance.

#### **1.5 *Equipment Modifications***

None

## 2 Laboratory Information

### 2.1 *Accreditations & Endorsements*

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the (FCC US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST/A2LA



TUV Rheinland of North America is accredited by the A2LA, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada




TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M-1). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration Nos. A-0031& A-0032).

## 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

## 2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton Annex.

### 2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

	$U_{\text{lab}}$	$U_{\text{cisp}}$
<b>Radiated Disturbance</b>		
30 MHz – 40,000 MHz	3.2 dB	5.2 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	2.4 dB	3.6 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.92 dB	4.5 dB

### Measurement Uncertainty – Immunity Testing

The estimated combined standard uncertainty for ESD immunity measurements is  $\pm 4.1\%$ .

The estimated combined standard uncertainty for radiated immunity measurements is  $\pm 2.7$  dB.

The estimated combined standard uncertainty for conducted immunity measurements is  $\pm 1.4$  dB.

The estimated combined standard uncertainty for damped oscillatory wave immunity measurements is  $\pm 8.8\%$ .

The estimated combined standard uncertainty for harmonic current and flicker measurements is  $\pm 0.45\%$ .

### Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is  $\pm 3.88$  Hz

The estimated combined standard uncertainty for carrier power measurements is  $\pm 1.59$  dB.

The estimated combined standard uncertainty for adjacent channel power measurements is  $\pm 1.47$  dB.

The estimated combined standard uncertainty for modulation frequency response measurements is  $\pm 0.46$  dB.

The estimated combined standard uncertainty for transmitter conducted emission measurements is  $\pm 4.01$  dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

## 3 Product Information

### 3.1 Product Description

PTC-3006 radio is Tranceiver intended for locomotive communications and is part of Lilee systems TransAir PTC-3000 product family products.

The Lilee Systems TransAir PTC-3006 product family includes three components: TransAir Wayside, TransAir Base Station and TransAir Locomotive radios. The TransAir PTC product family's design is based on both ACSES and an interoperable train control (ITC) architecture that in conjunction with the Lilee Mobility Controller (LMC-5x00 series) enables seamless roaming and constant communication between central traffic control, wayside signals, and onboard locomotive networks. This combined solution can help freight railroads and transit operators maintain compliance with the Federal Rail Safety Improvement Act of 2008.

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. For EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.4 Duty Cycle:

EUT was operated at 100% duty cycle. No duty cycle correction was added to the results.

### **3.5 Unique Antenna Connector**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

#### **3.5.1 Results**

EUT is professionally installed. This requirement is not applicable.

## 4 Emission Requirements – 218 to 219 MHz Band

Testing was performed in accordance with CFR 47 Part 95. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Output Power Requirements


*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 95F*

#### 4.1.1 Test Method

The conducted method was used to measure the power output according to ANSI/TIA-603-C: 2004. The measurement was performed with modulation per ANSI/TIA-603-C: 2004 was conducted on 1 channel in each operating range. The worst mode result indicated below.

Test Setup:

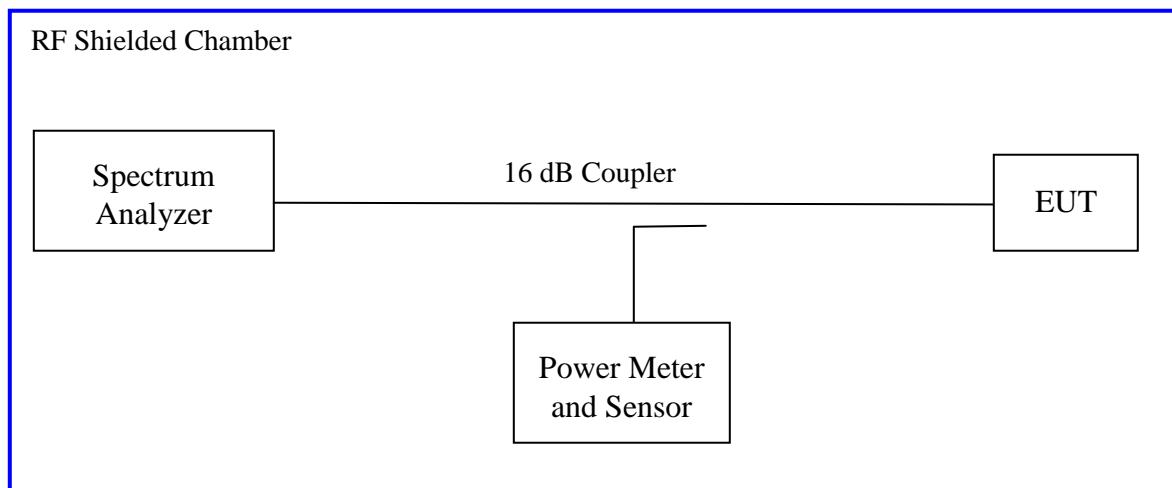

#### 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2:** RF Output Power at the Antenna Port – Test Results


Test Conditions: Conducted Measurement, Normal Temperature					
Antenna Type: Max Fixed station gain 3.0 dBi Yagi Antenna					
Signal State: Modulated see below					
Ambient Temp.: 21 °C			Relative Humidity: 39%		
Freq.	Modulation	Power Setting	Measured power at Antenna Port		ERP Limit Base Station Mode
MHz			dBm	Watts	Result
218.250	GMSK 9600	ATT 11	36.52	4.48	20Watts Complied
	QPSK 16K	ATT 11	36.02	3.99	
	QPSK 32K	ATT 16	36.59	4.56	
218.750	GMSK 9600	ATT 11	36.55	4.51	
	QPSK 16K	ATT 11	35.69	3.70	
	QPSK 32K	ATT 16	36.32	4.28	

Note1: <sup>1</sup> Transmitter output power for fixed stations is factory set max limit at 36.59dBm (4.56 watts). The EIRP calculation is based on max gain antenna of 3dBi. The equipment design prevents higher power by lockout/error message. Licencee ensures Fixed units are limited to 20Watts ERP.

## Mobile Mode


<b>Test Conditions:</b> Conducted Measurement, Normal Temperature					
<b>Antenna Type:</b> Highest gain 3 dBi Yagi Antenna					
<b>Signal State:</b> Modulated					
<b>Ambient Temp.:</b> 21 °C			<b>Relative Humidity:</b> 39%		
Frequency	Modulation	Power setting	<b>Measured Power at Antenna Port</b>		ERP Limit Mobile Mode
MHz			dBm	Watts	Part 95F
218.250	GMSK 9600	ATT 19	28.65	0.73	4Watts Complied
	QPSK 16K	ATT 17	29.47	0.88	
	QPSK 32K	ATT 22	29.13	0.82	
218.750	GMSK 9600	ATT 17	29.21	0.83	
	QPSK 16K	ATT 18	30.00	1.00	
	QPSK 32K	ATT 22	29.60	0.91	

Note1: Transmitter output power for mobile stations is factory set max limit at 30.0 dBm(1Watt).  
Licencee ensures mobile units are limited to 4watts ERP. Power measurements were performed as indicated in the above table. Only worst case/ limited number of plots are placed in the report.

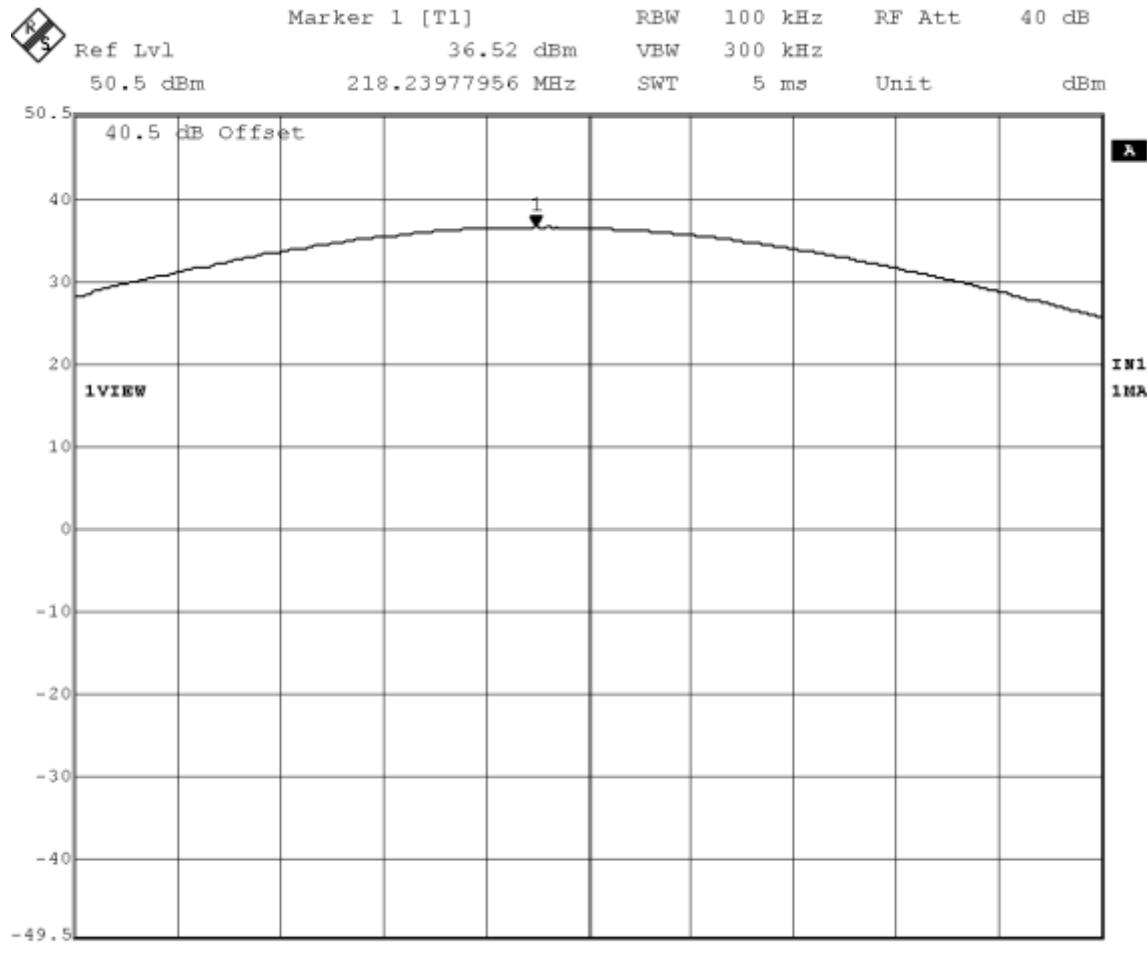


Date: 10.JUL.2012 22:36:54


**Figure 1:** Maximum Transmitted Power, 218.250 MHz GMSK 9600

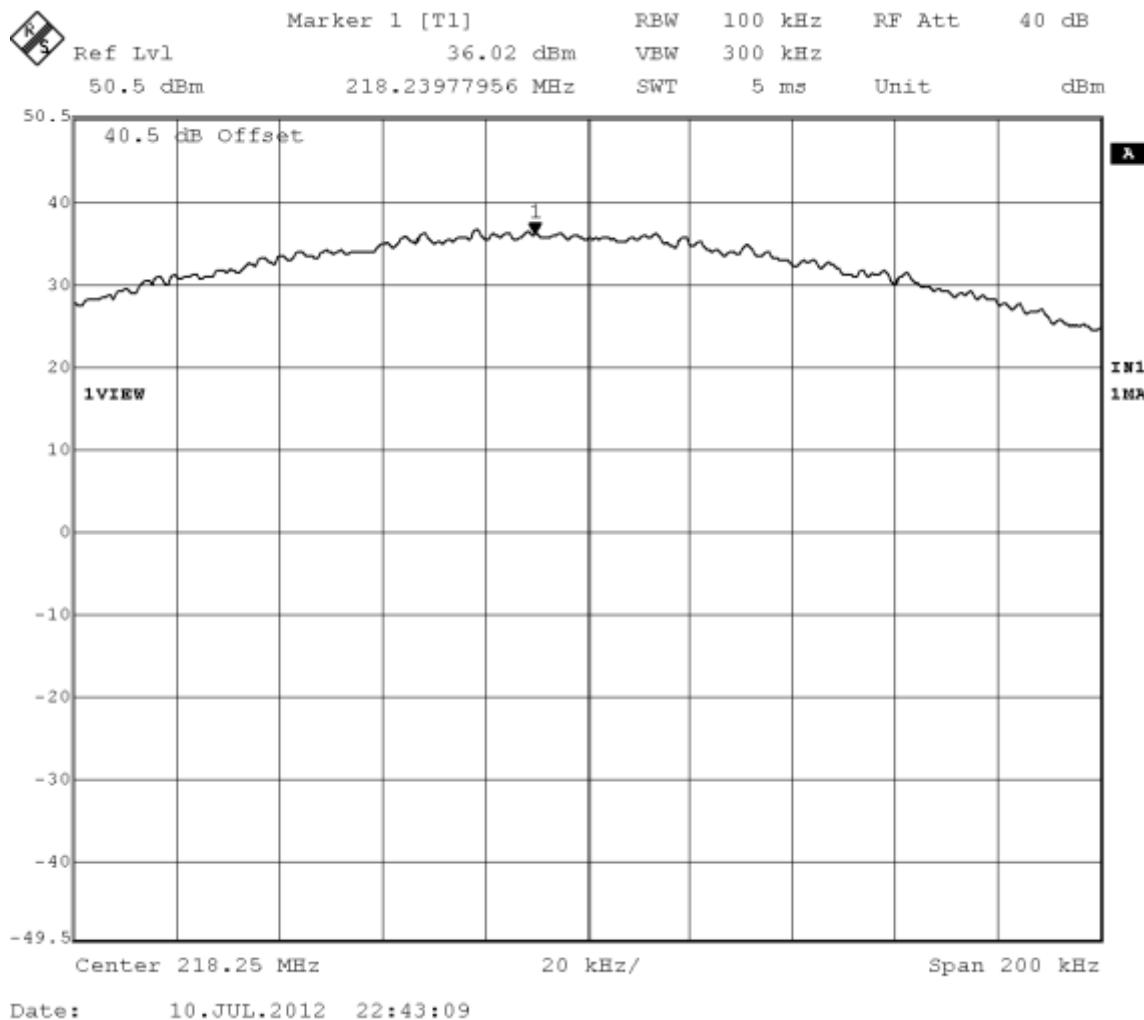


**Figure 2:** Maximum Transmitted Power, 218.250 MHz 16QPSK

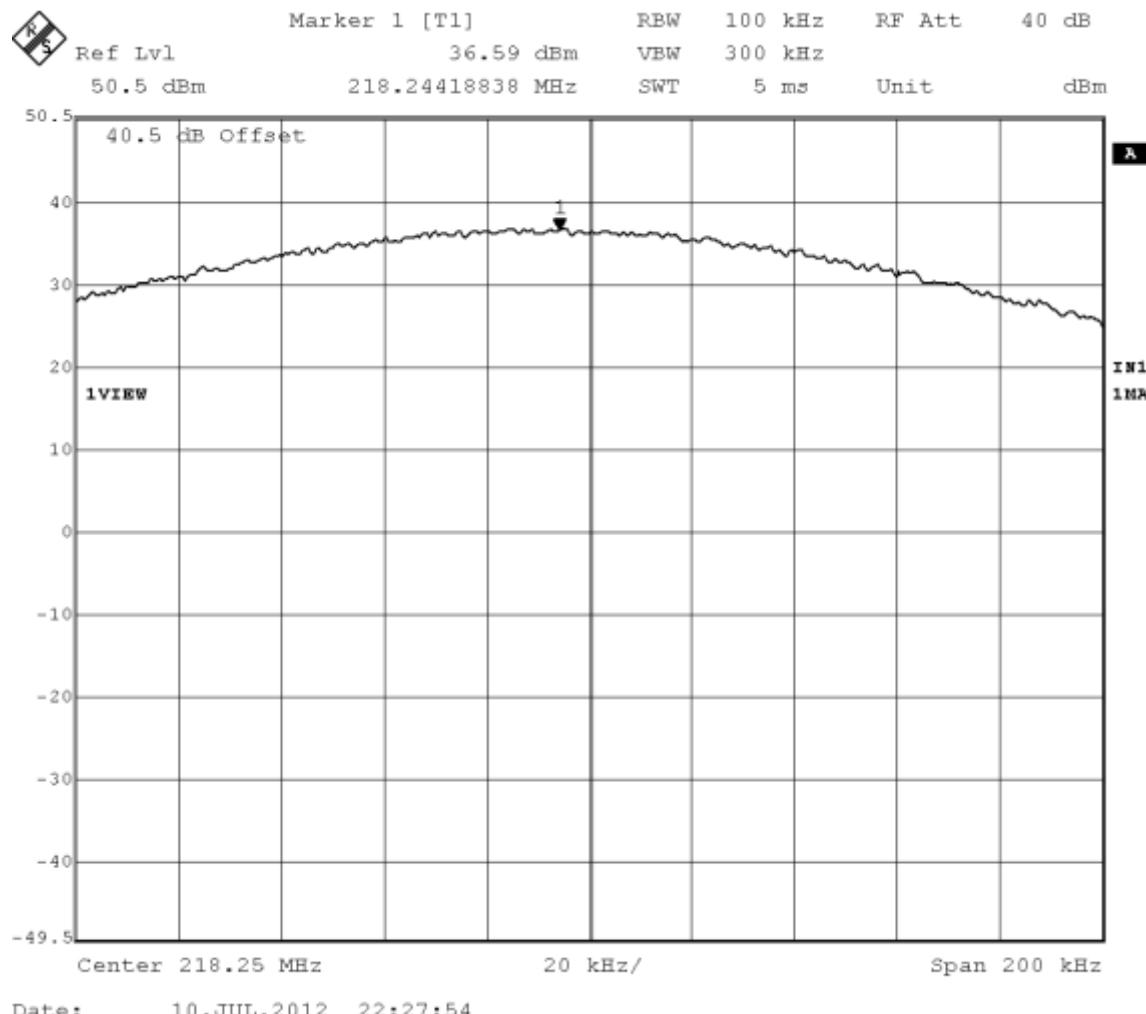


**Figure 3:** Maximum Transmitted Power, 218.250 MHz 32QPSK

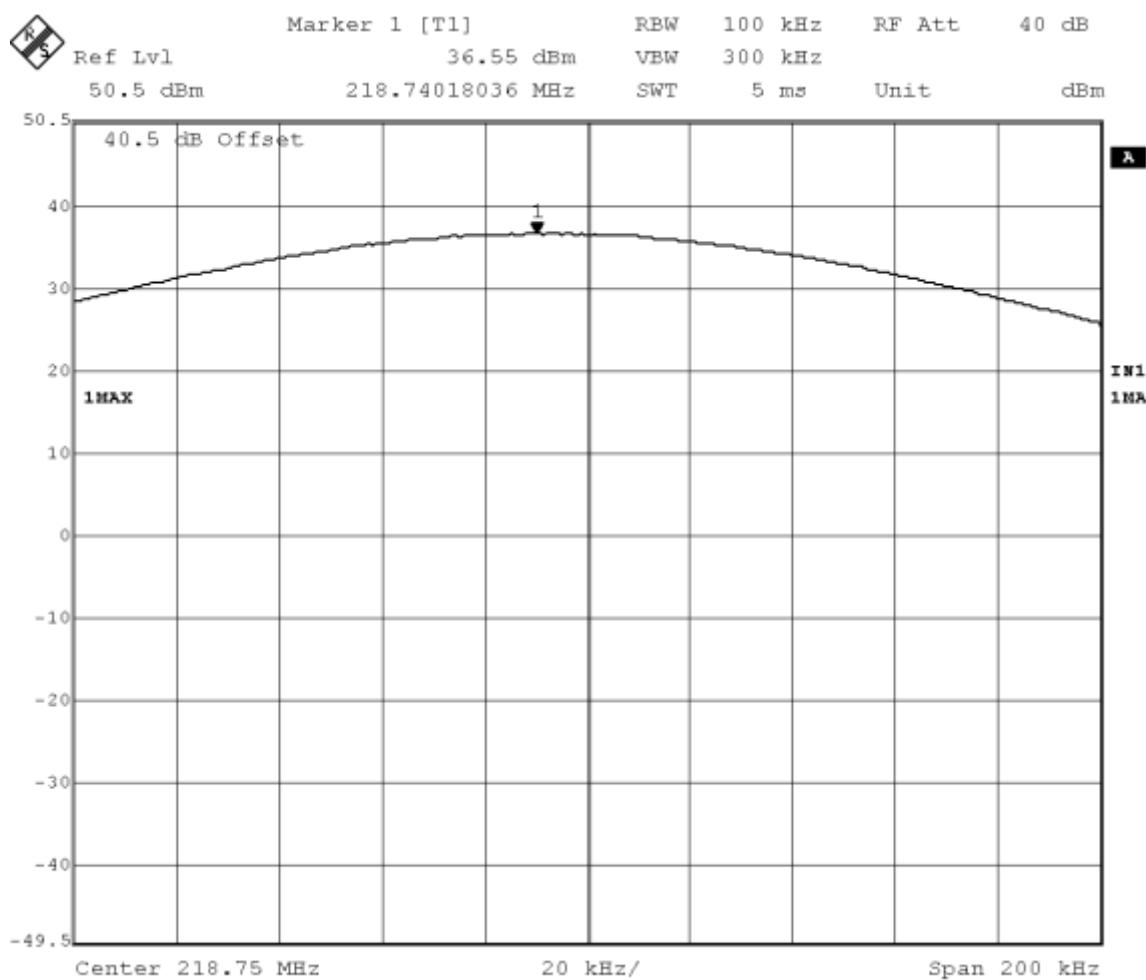


**Figure 4:** Maximum Transmitted Power, 218.750 MHz GMSK 9600,

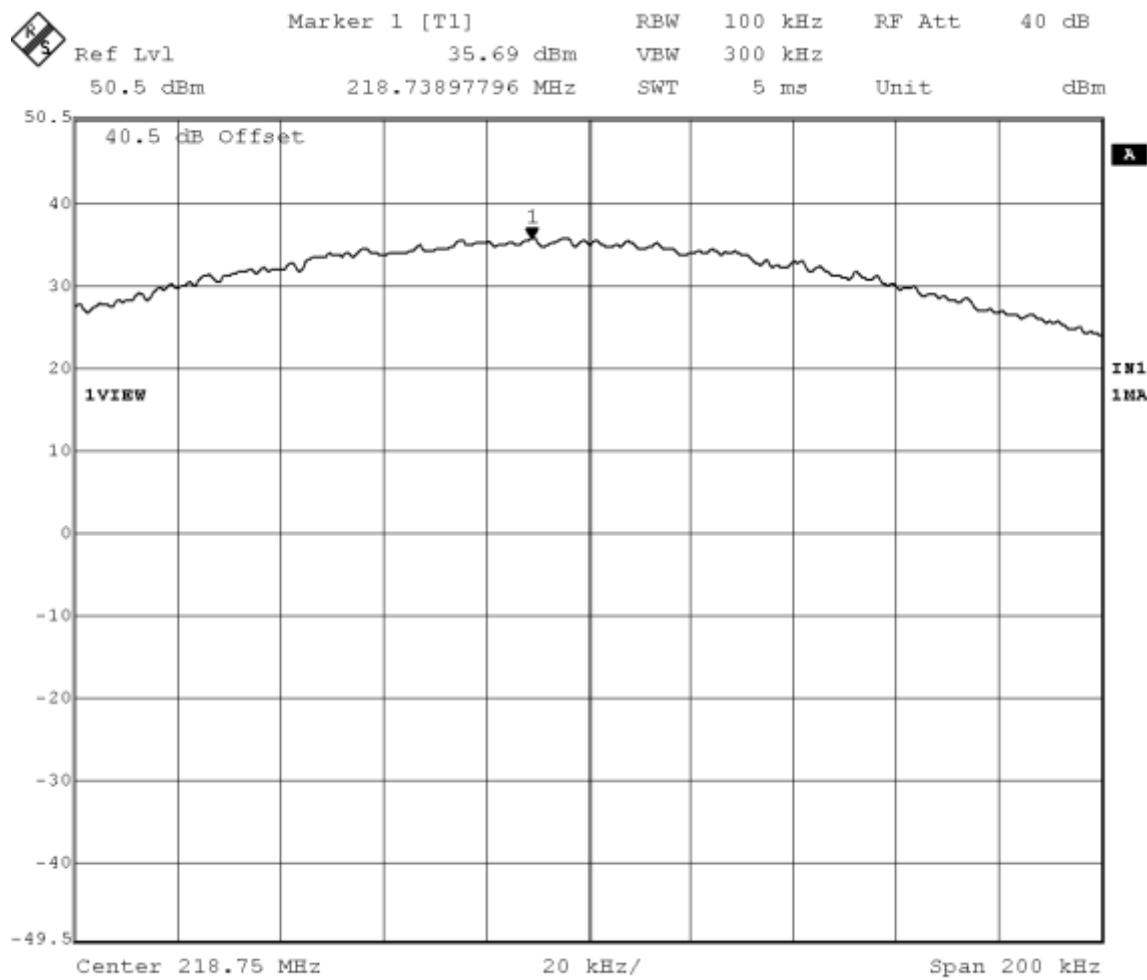

**Figure 5:** Maximum Transmitted Power, 218.5 MHz, 16 QPSK

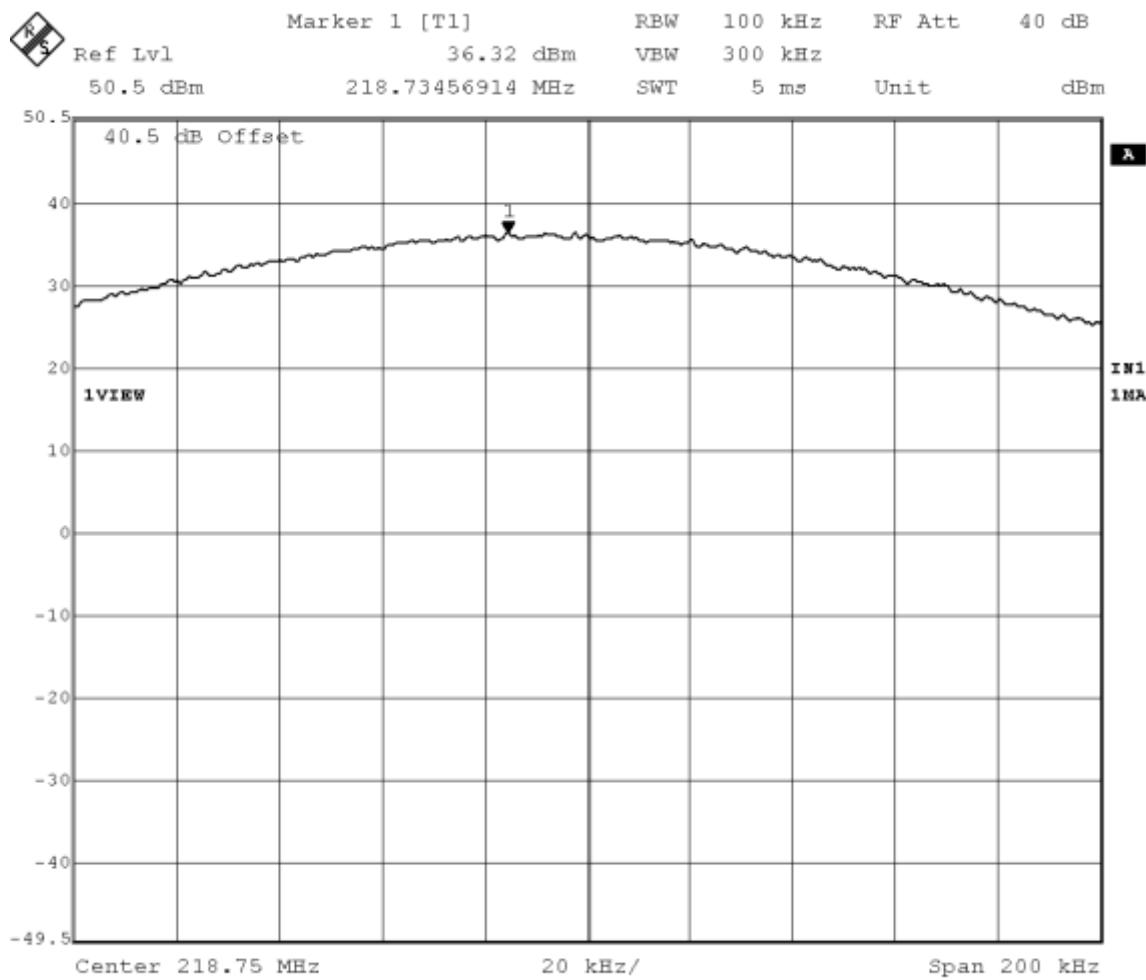


**Figure 6:** Maximum Transmitted Power, 218.75 MHz at 32 QPSK

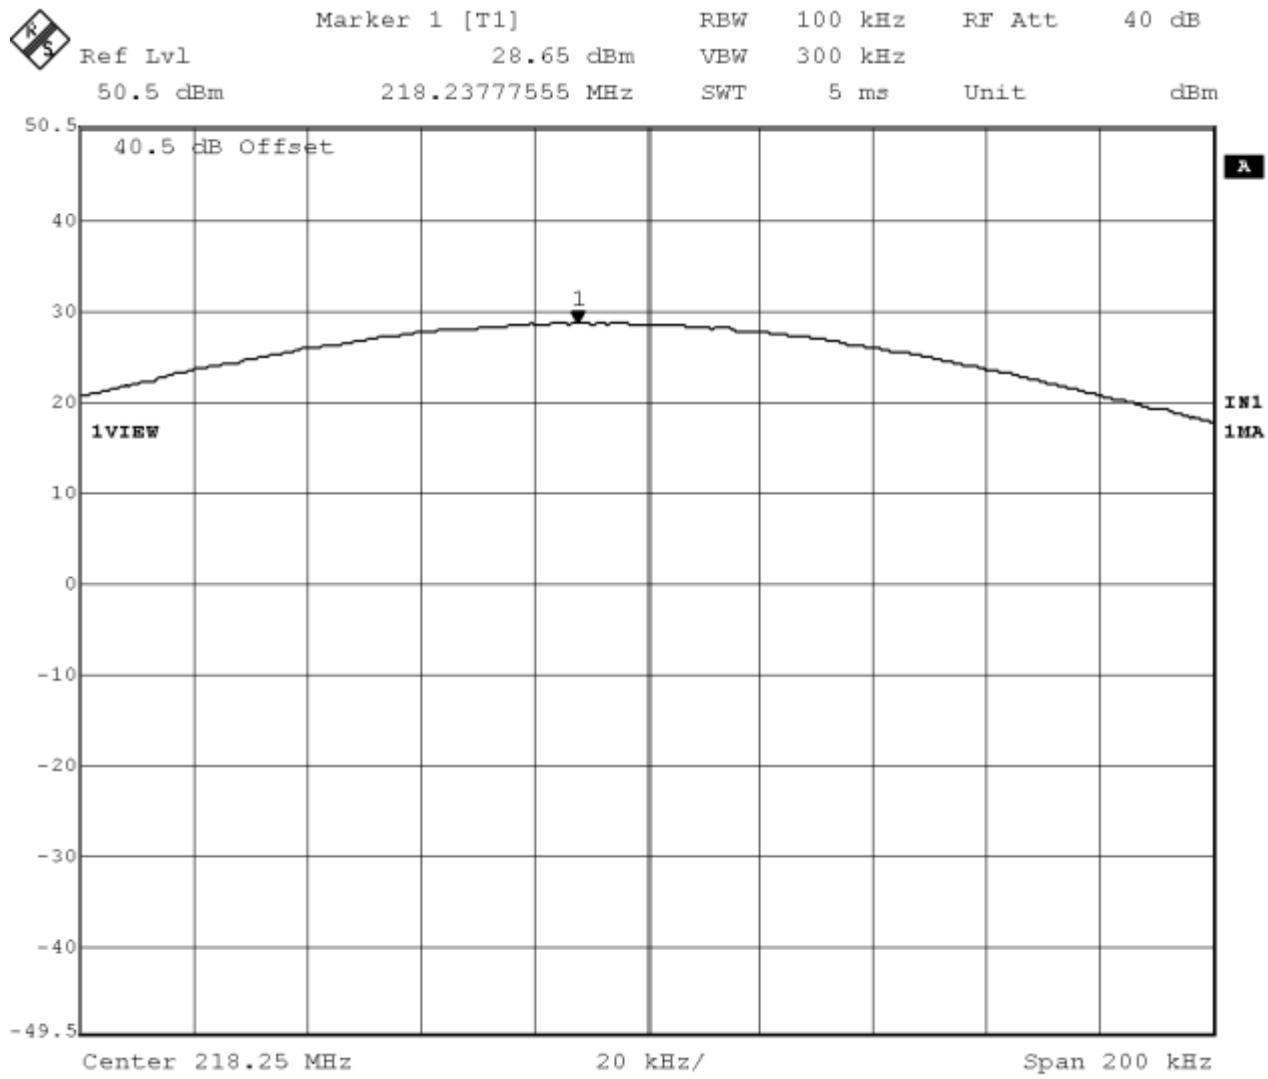


Date: 10.JUL.2012 22:58:04


**Figure 7:** Maximum Transmitted Power, 218.25 MHz at GMSK

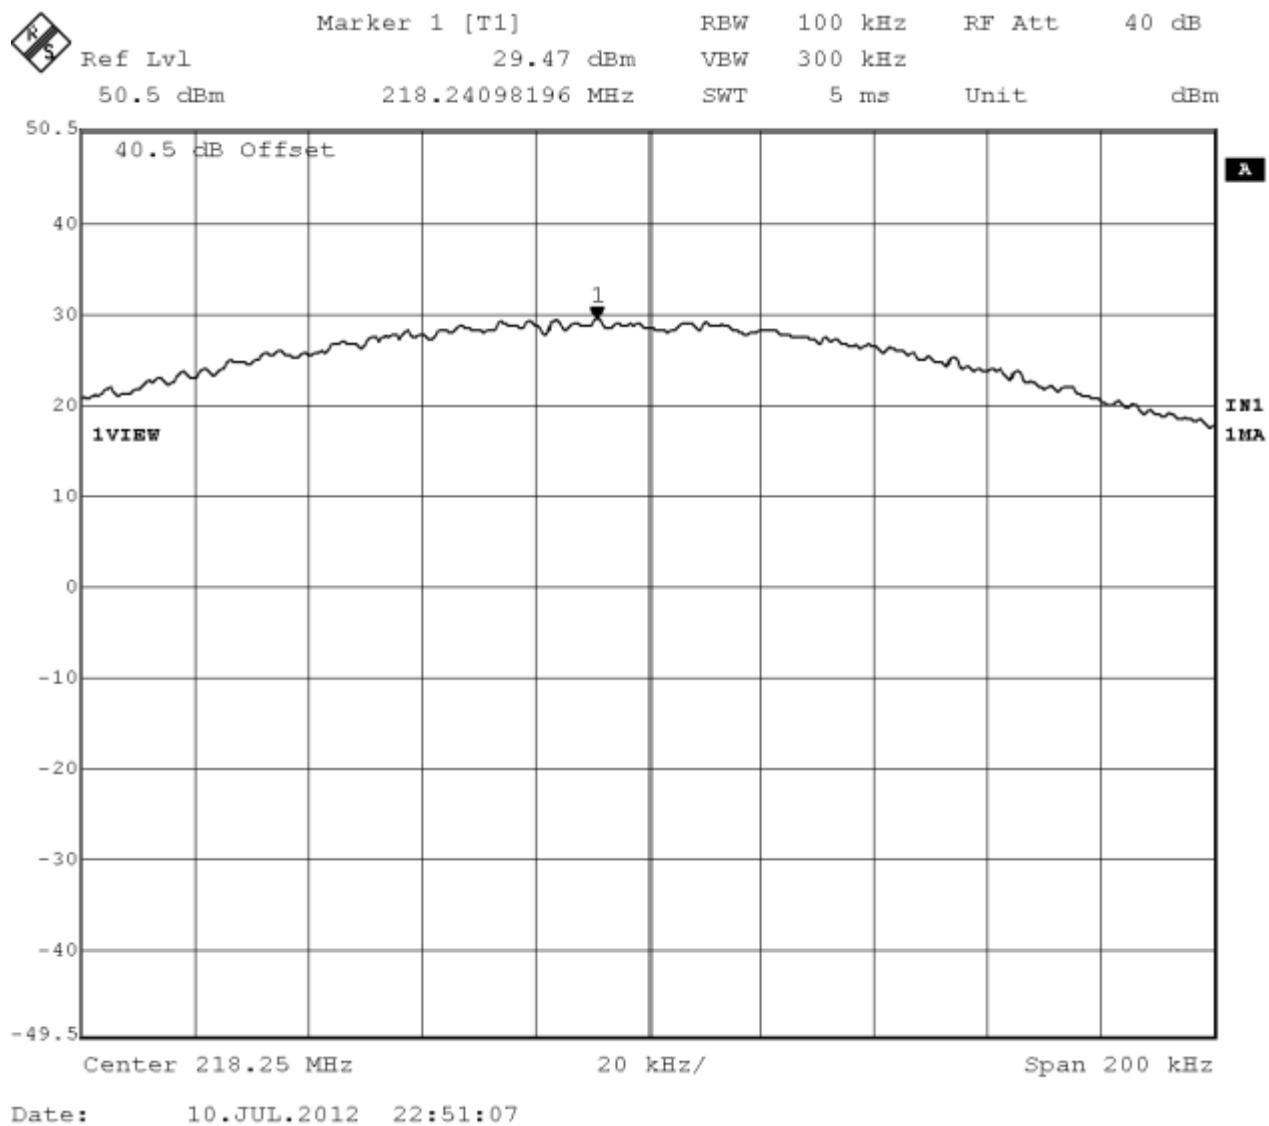


**Figure 8:** Maximum Transmitted Power, 218.25 MHz at 16 QPSK

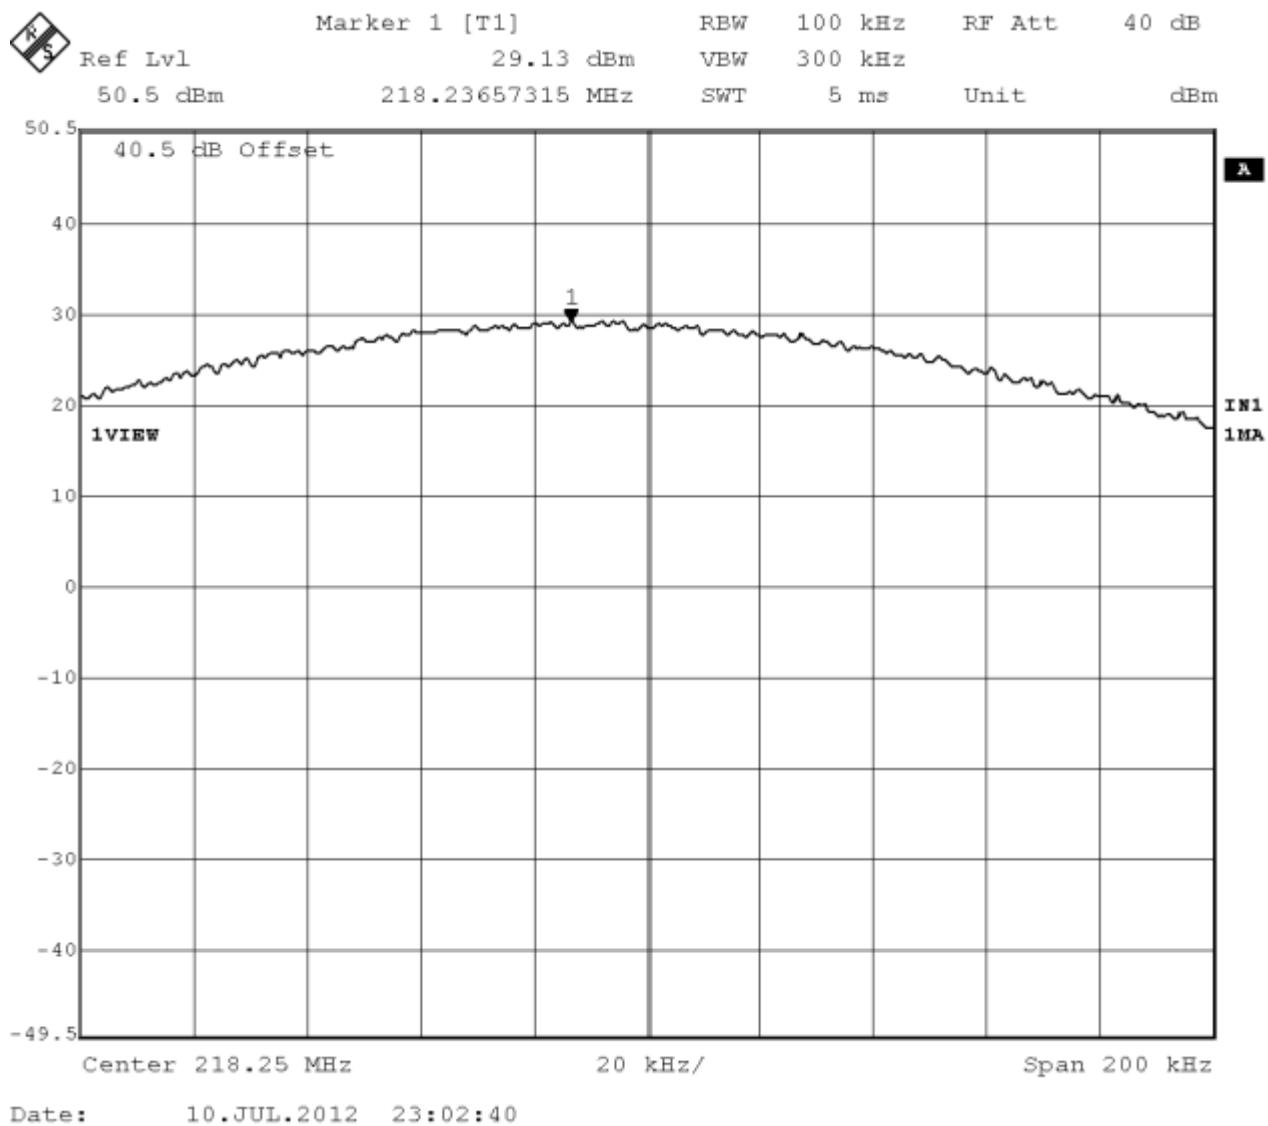


**Figure 9:** Maximum Transmitted Power, 218.250 MHz at 32 QPSK

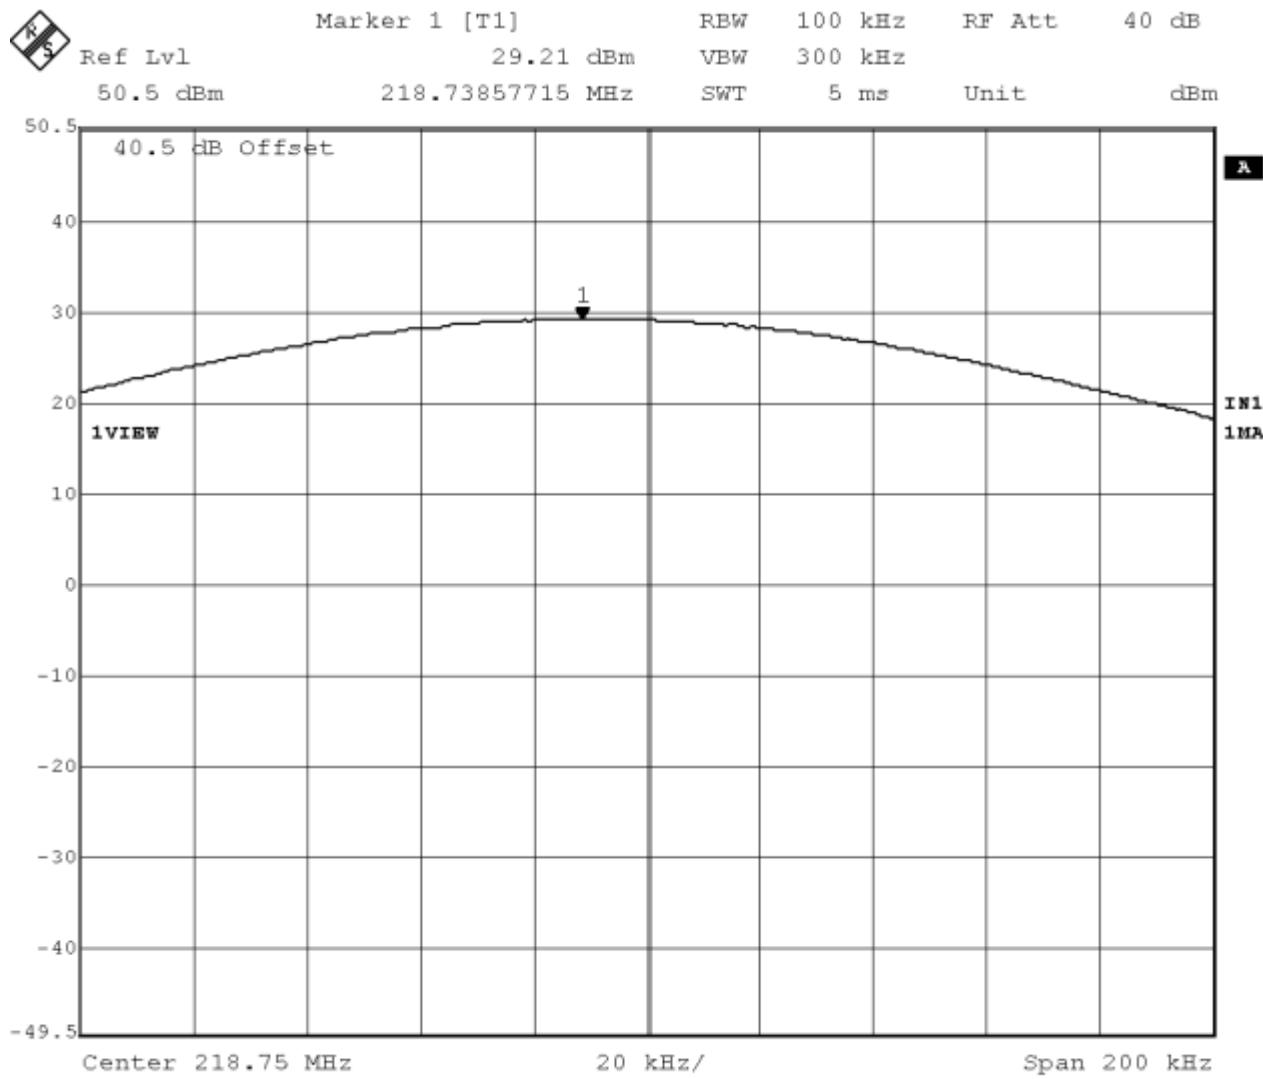

**Figure 10:** Maximum Transmitted Power, 218.75MHz GMSK

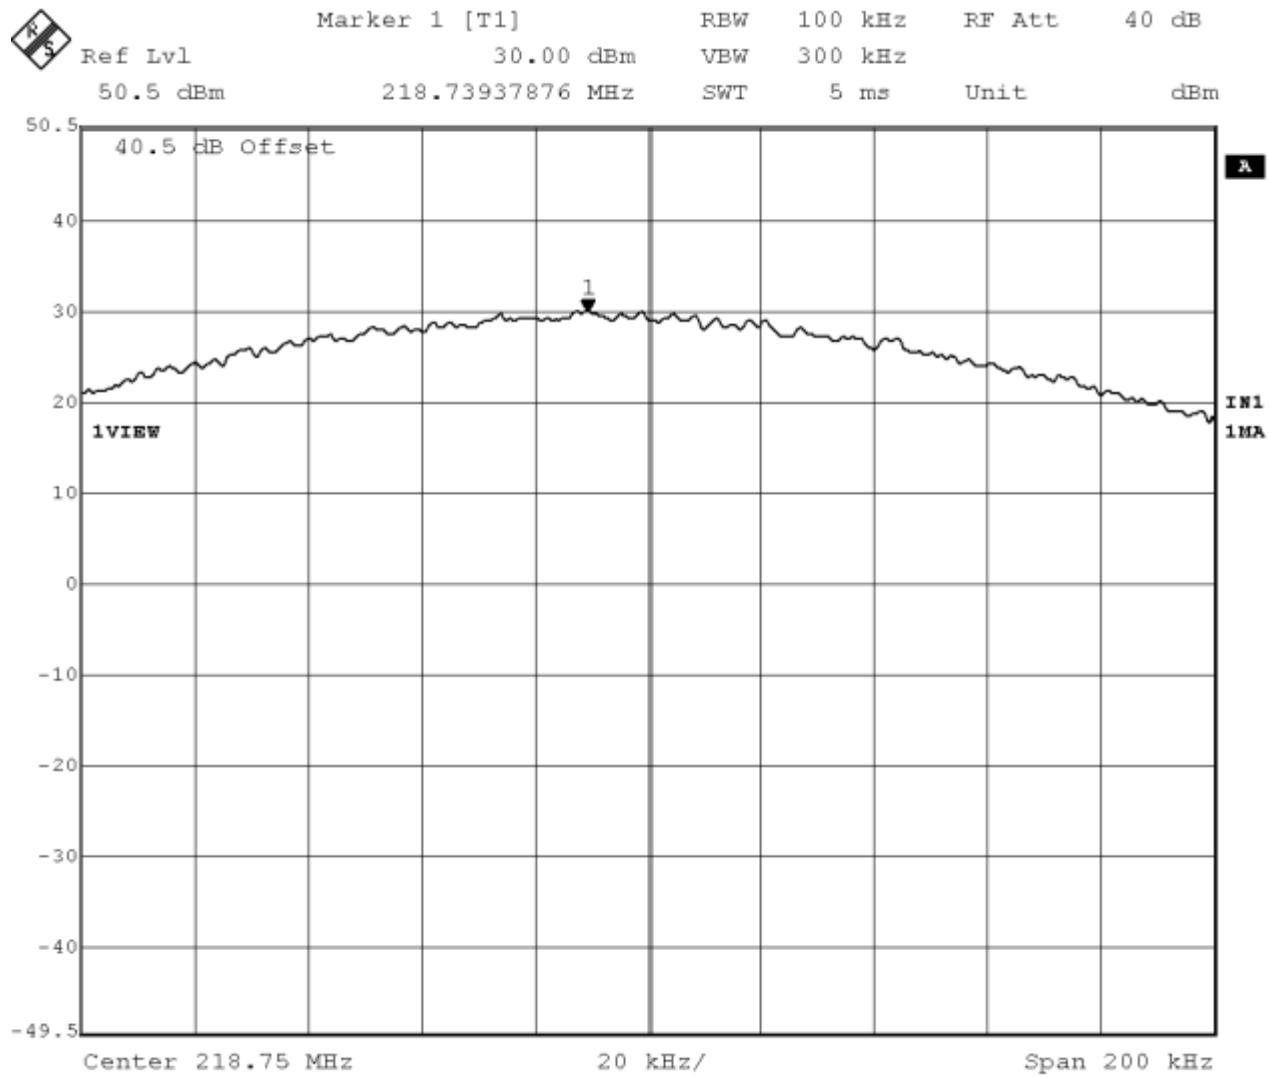

**Figure 11:** Maximum Transmitted Power, 218.750MHz 16QPSK

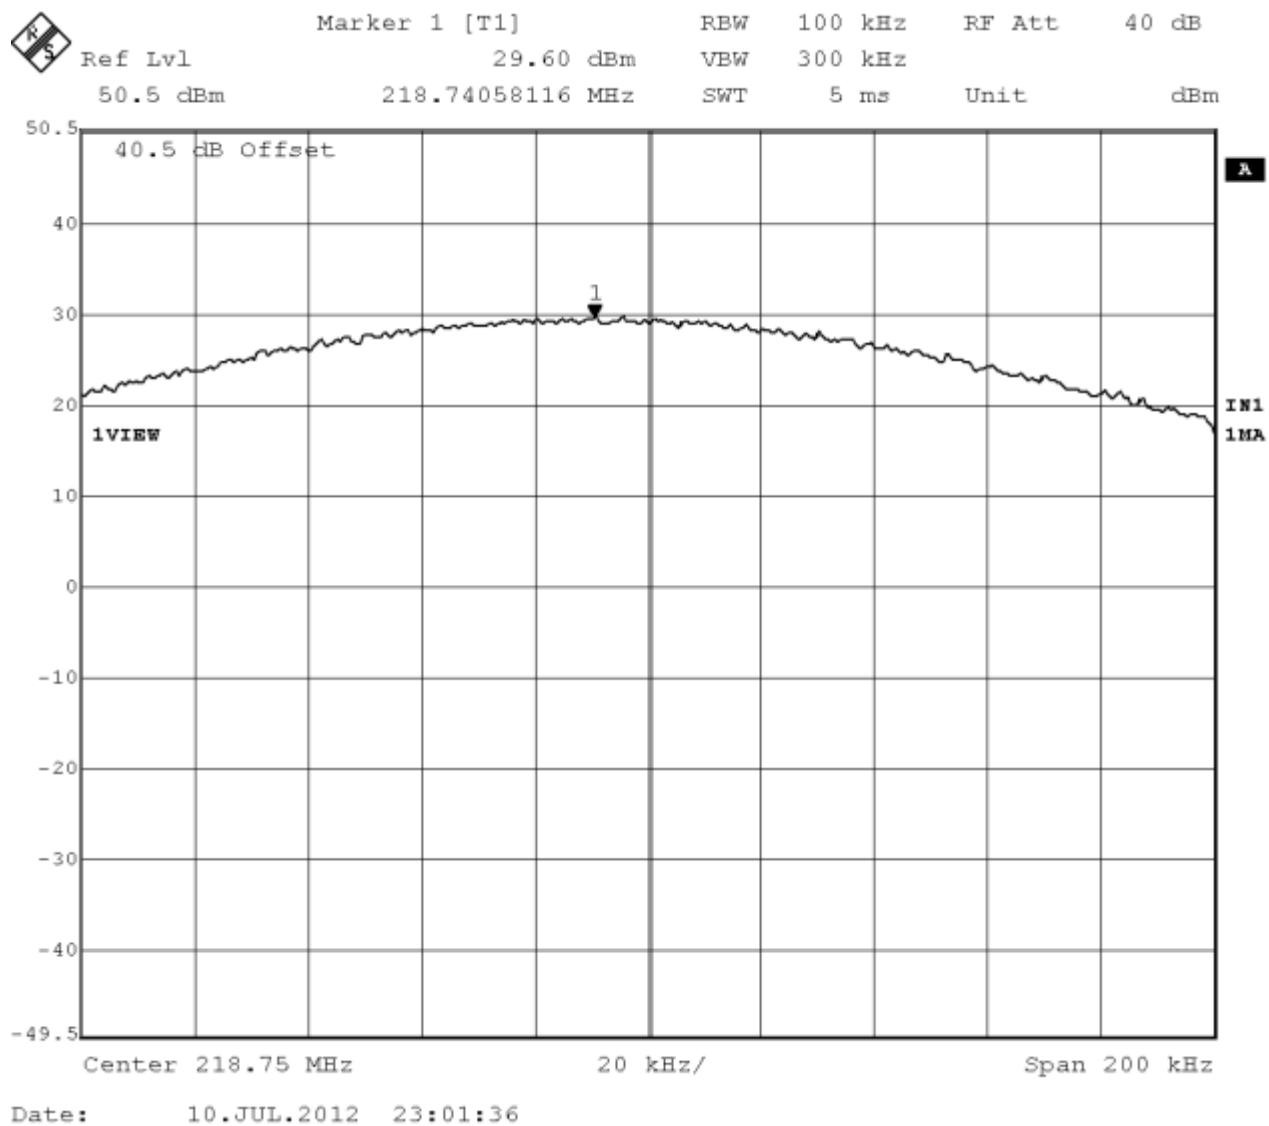

**Figure 12:** Maximum Transmitted Power, 218.75MHz 32QPSK

## 4.2 Occupied Bandwidth

*The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.*


*The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.*

*The 26 dB bandwidth is defined the bandwidth of 26 dBr from highest transmitted level of the fundamental frequency.*

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 Part 95. Initial investigation was performed at different data rates and TX chains. The narrowest bandwidths at each operational mode were measured on 3 operating channels. The worst sample result indicated below.

Test Setup:

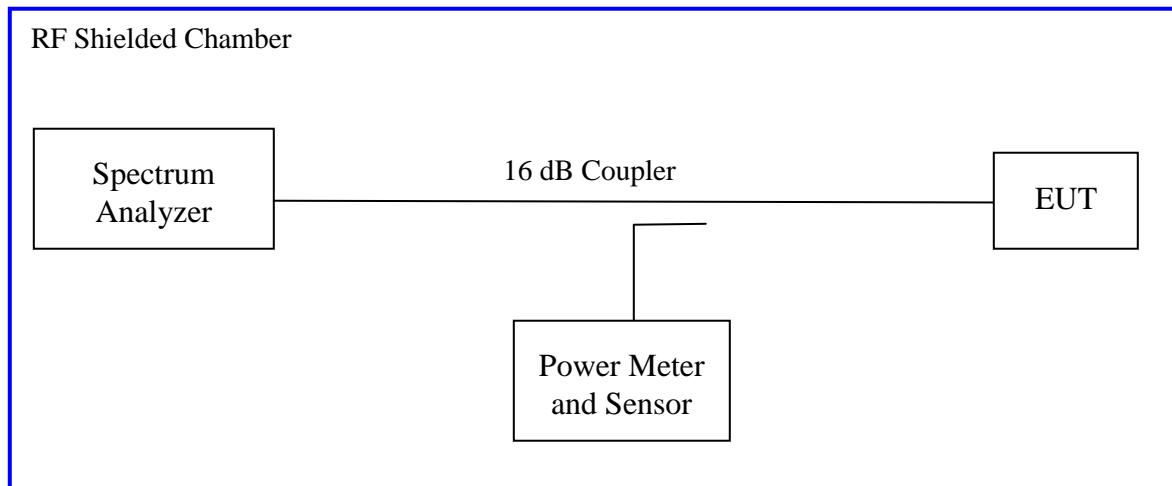

#### 4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


**Table 3:** Occupied Bandwidth – Test Results

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only				
<b>Antenna Type:</b> External		<b>Power Setting:</b> See test plan		
<b>Max. Antenna Gain:</b> 3 dBi		<b>Signal State:</b> Modulated		
<b>Ambient Temp.:</b> 21 °C		<b>Relative Humidity:</b> 33%		
<b>Bandwidth (KHz)</b>				
<b>Freq. (MHz)</b>	<b>Modulation/ Data rate</b>	<b>26 dB BW</b>	<b>99% Occupied BW</b>	<b>Results</b>
218.5	GMSK 9600	11.97	8.92	Pass
	16QPSK	19.78	10.34	Pass
	32QPSK	36.56	23.93	Pass

Note: These measurements performed at higher power for part 80 /90 are applicable see test report 31260509.004

Agilent 14:45:56 Apr 20, 2012

R T

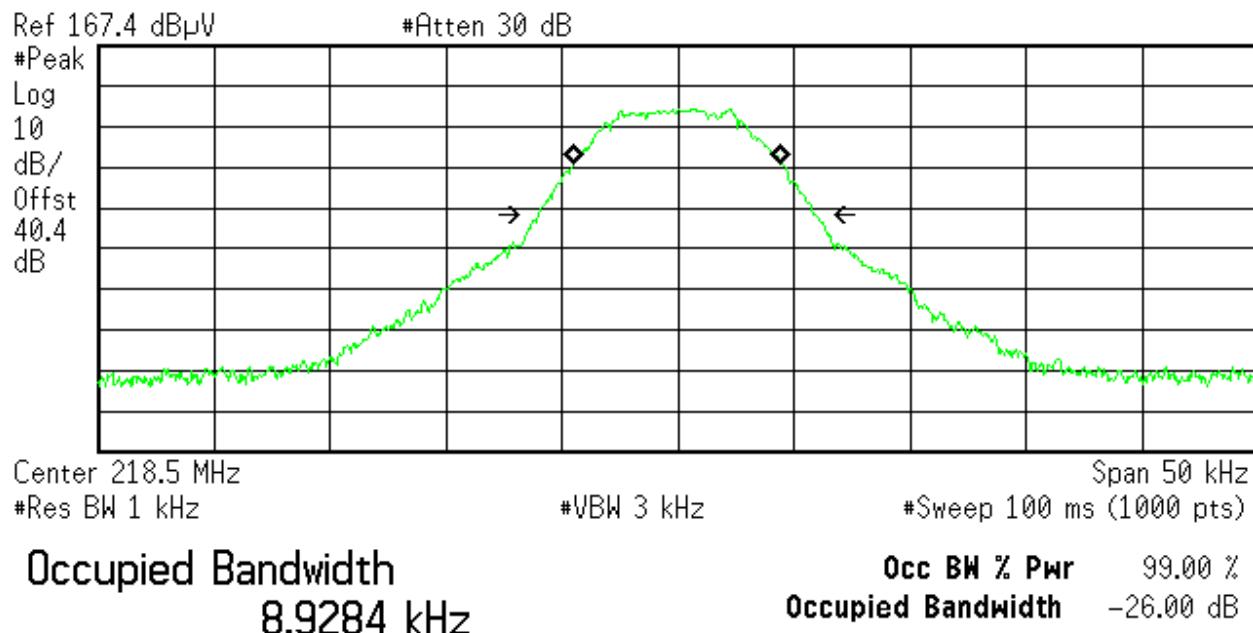


**Transmit Freq Error**      -31.695 Hz  
**x dB Bandwidth**      11.970 kHz

**Figure 13:** Occupied Bandwidth at- Operating Channel 218.5 MHz GMSK

Agilent 15:17:55 Apr 20, 2012


R T

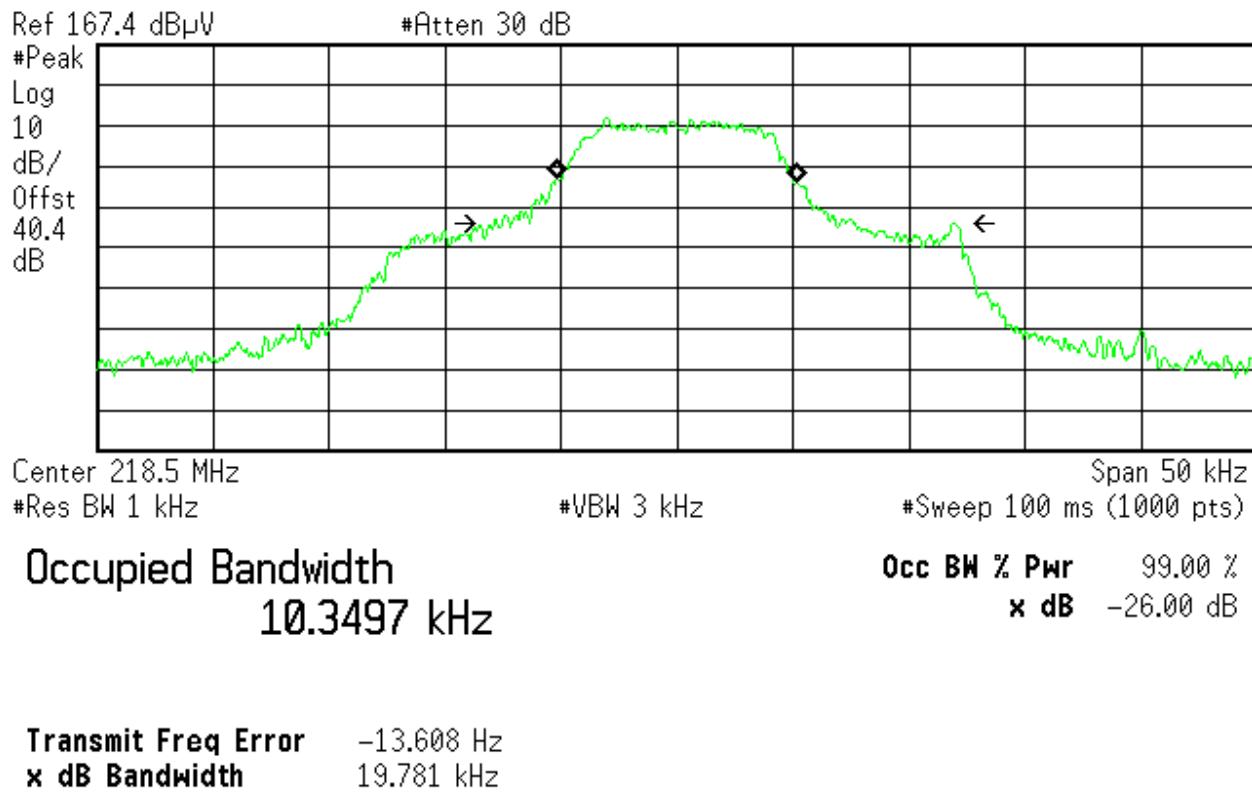

**Figure 14:** Occupied Bandwidth at- Operating Channel 218.5 MHz 16QPSK

Agilent 14:50:17 Apr 20, 2012

R T

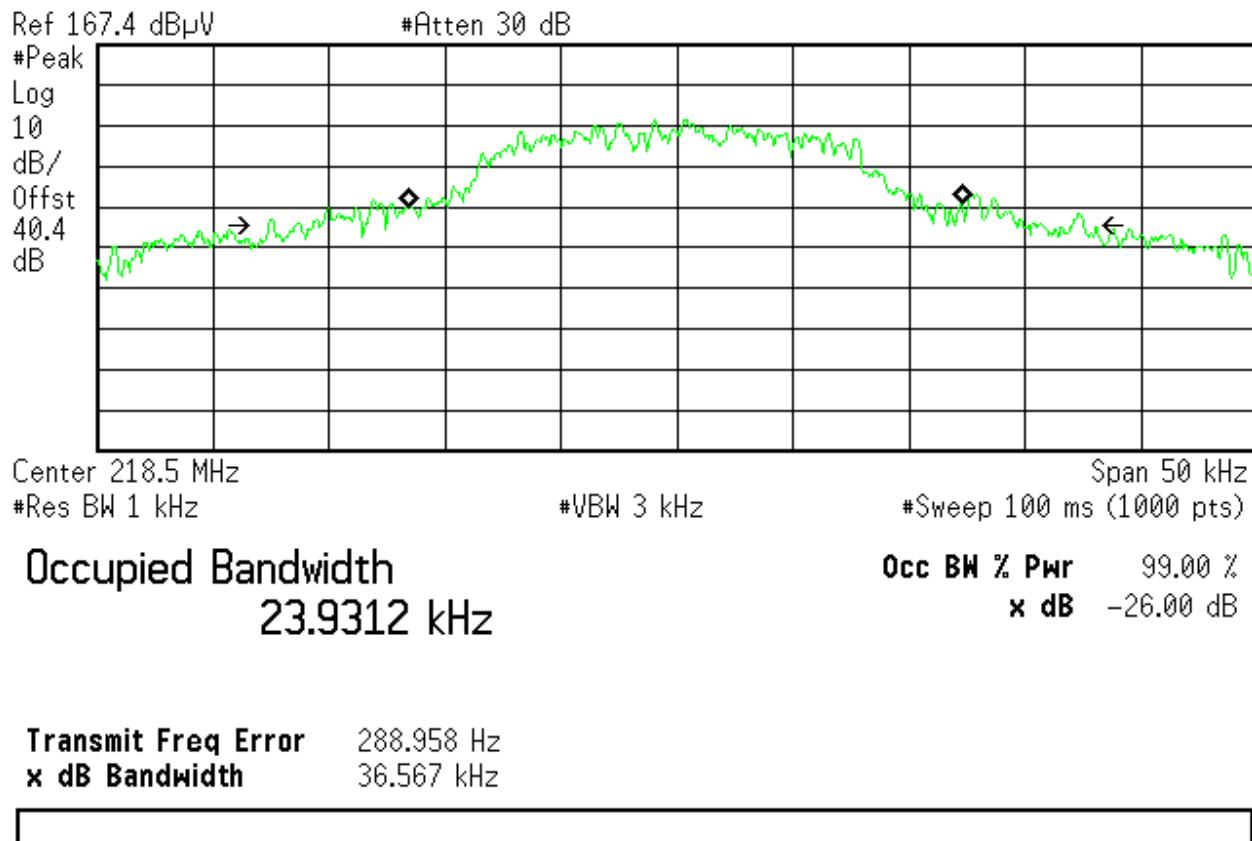

**Figure 15:** Occupied Bandwidth at- Operating Channel 218.5 MHz 32QPSK

Note: These measurements were performed at higher power for part 80 /90 are applicable

## 4.3 Spectral Mask requirements

### 4.3.1.1.1 95.857 Emission masks.

*The transmitters used in the radio service governed by this part of radio service must comply*

*Applicable mask Emission requirements of 95.857*

- (1) Zero dB on any frequency within the authorized frequency segment.
- (2) At least 28 dB on any frequency removed from the midpoint of the assigned frequency segment by more than 250 kHz up to and including 750 kHz;
- (3) At least 35 dB on any frequency removed from the midpoint of the assigned frequency segment by more than 750 kHz up to and including 1250 kHz;
- (4) At least 43 plus  $10 \log_{10}$  (mean power in watts) dB on any frequency removed from the midpoint of the assigned frequency segment by more than 1250 kHz.

(c) When testing for certification, all measurements of unnecessary radiation are performed using a carrier frequency as close to the edge of the authorized frequency segment as the transmitter is designed to be capable of operating.

### Results


The Out of band emission was performed on the conducted test sample.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 4:** Spectral Mask Requirements – Test Results


<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only				
<b>Antenna Type:</b> External		<b>Power Setting:</b> See test plan		
<b>Max. Antenna Gain:</b> 3dBi		<b>Signal State:</b> Modulated		
<b>Ambient Temp.:</b> 21 °C		<b>Relative Humidity:</b> 39%		
<b>Emission Mask</b>				
<b>Operating Freq. MHz</b>	<b>Mode</b>	<b>Limit (dBm)</b>	<b>Measured Value (dBm)</b>	<b>Result</b>
218.250	GMSK 9600	Mask 95.858	See plot #16	Pass
218.250	16 QPSK	Mask 95.858	See plots #17,18, 19 & 20	Pass
218.250	32 QPSK	Mask 95.858	See plot #21	Pass

Note1: All mask measurements were performed as indicated in the above table. Only worst case/ limited number of plots are placed in the report. The mask is applicable for entire range of 218 to 219MHz

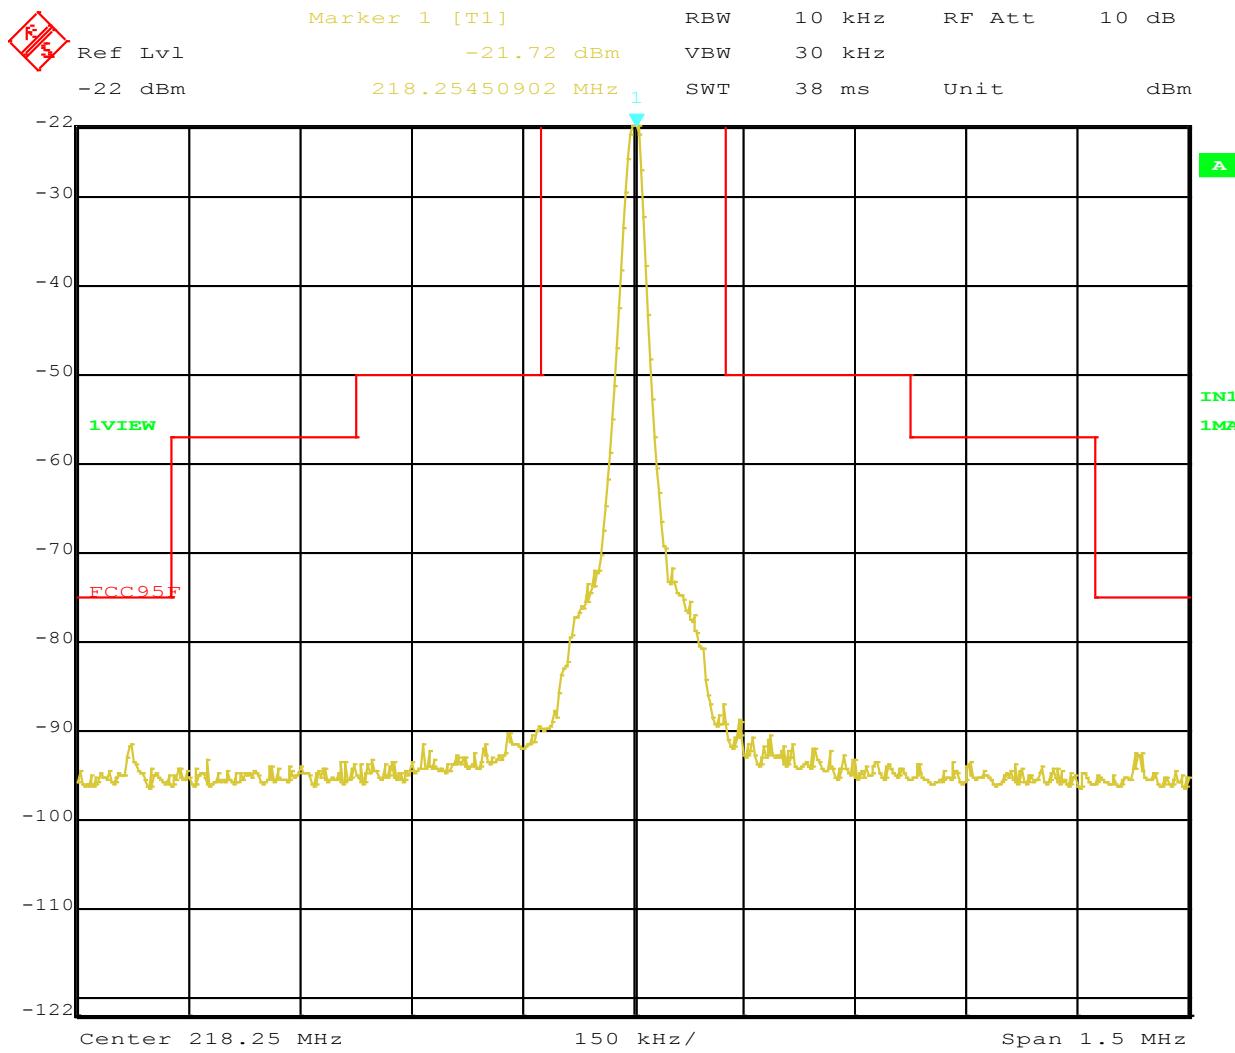


**Figure 16:** Emission mask requirement at Operating Channel 218.25 MHz, GMSK

*Note: Reference level of spectrum analyzer concides with highest power level of the EUT.*

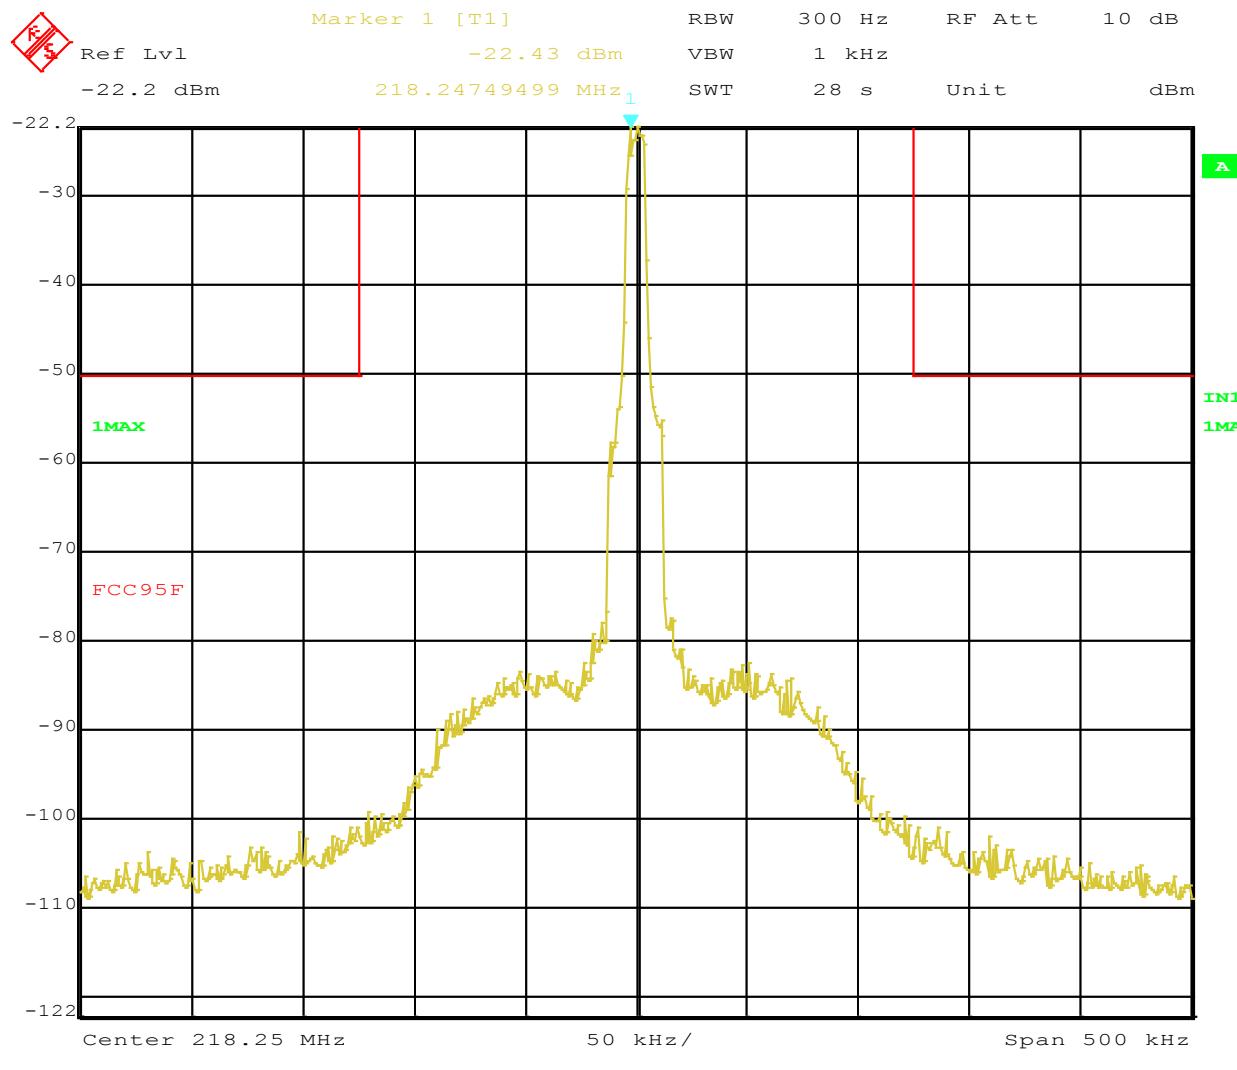


**Figure 17:** Emission mask Requirement at Operating Channel 218.250 MHz, 16QPSK


Note: Reference level adjusted measured power level

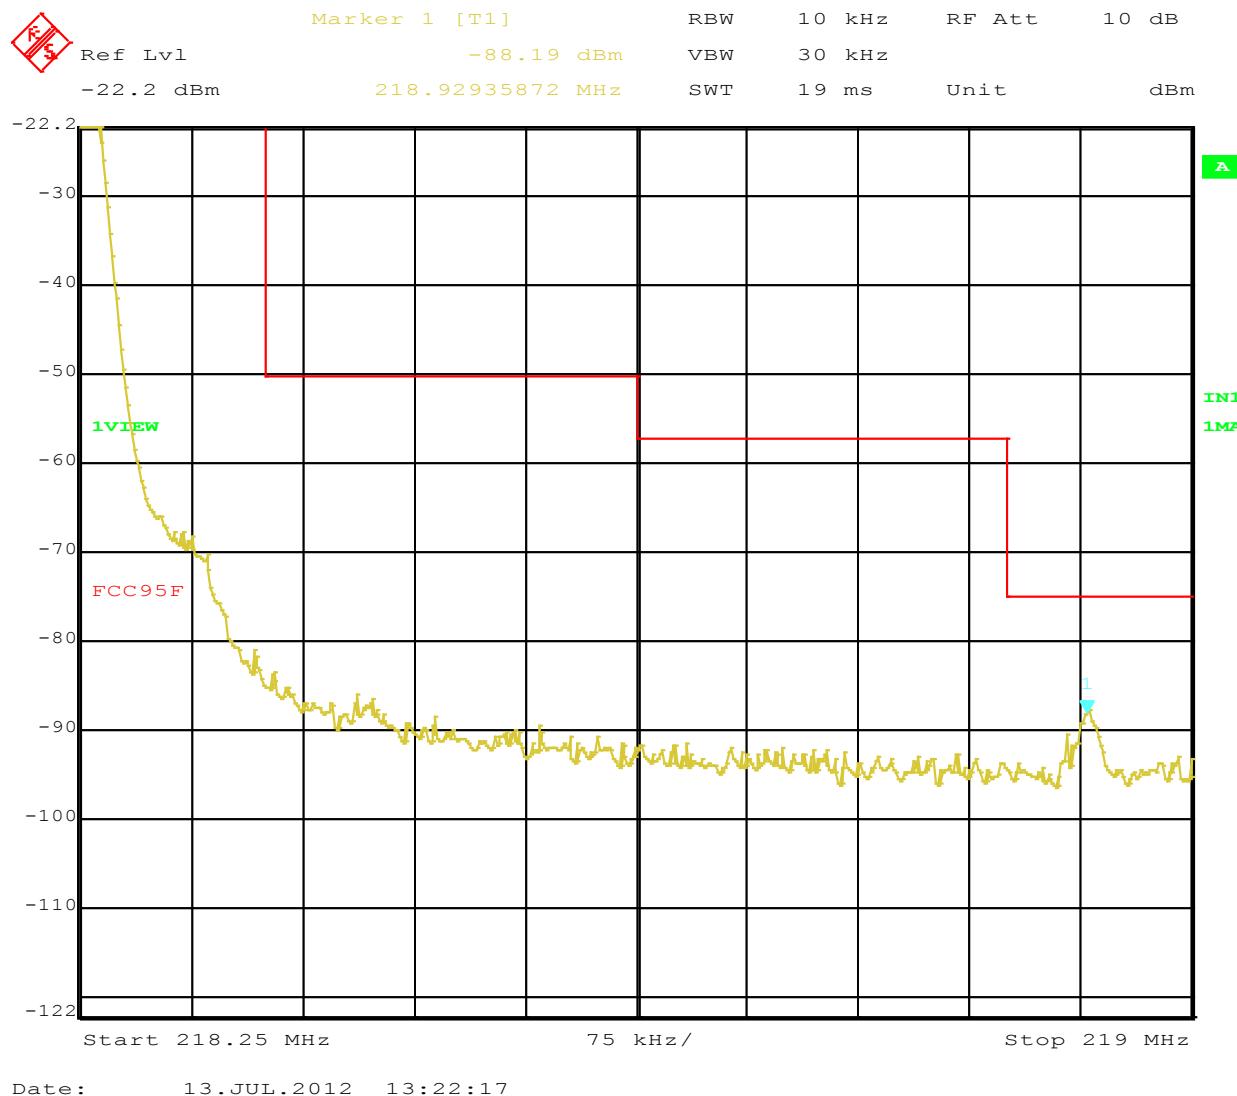


**Figure 18:** Emission mask Requirement at Operating Channel 218.25 MHz, 16 QPSK

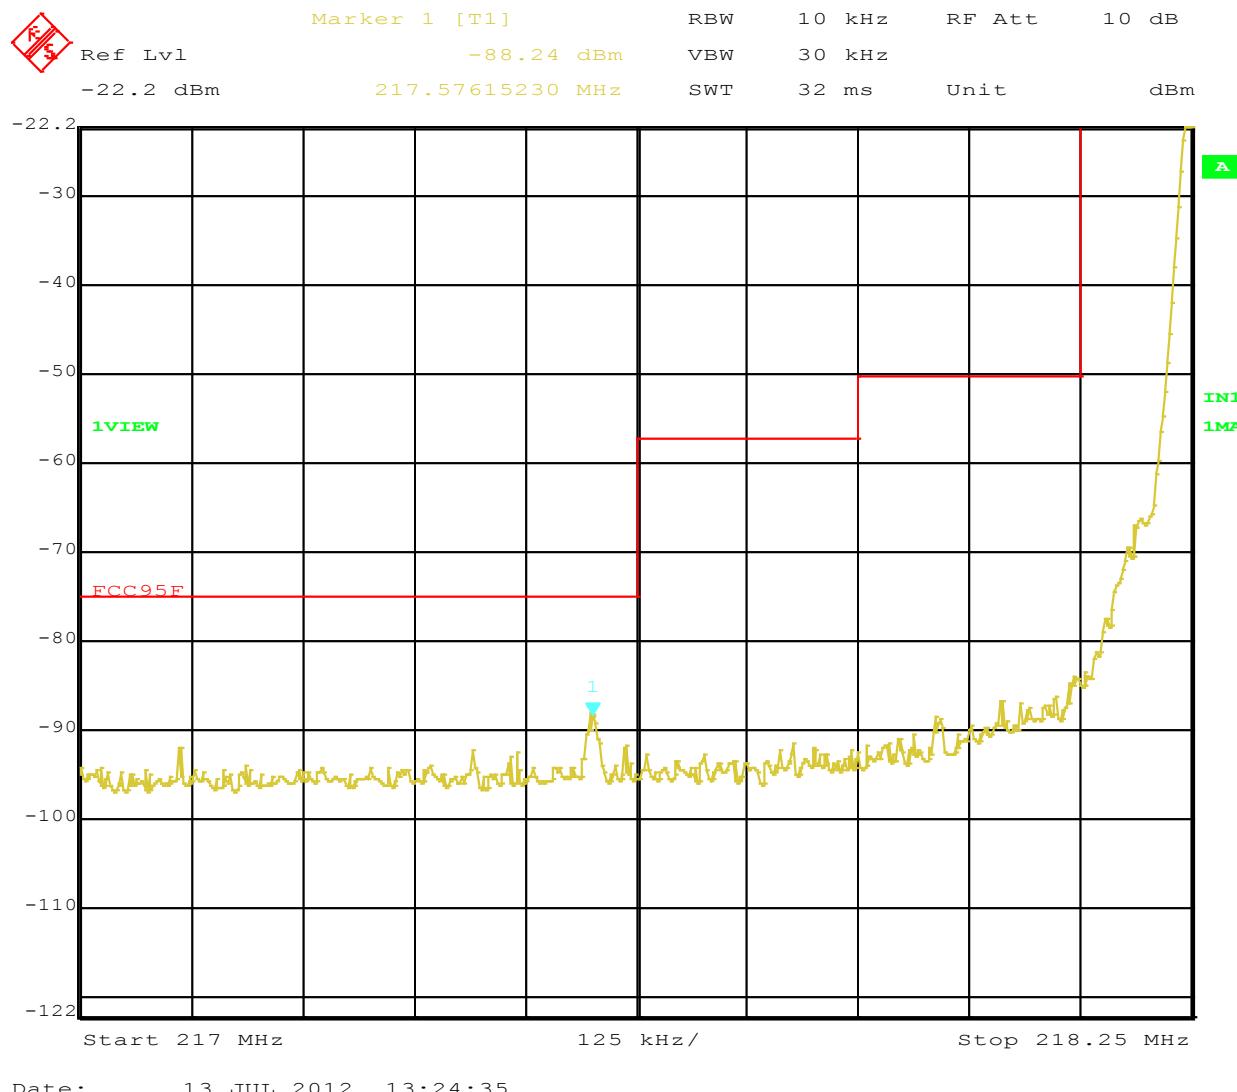

**Figure 19:** Emission mask Requirement at Operating Channel 218.25 MHz, 16 QPSK

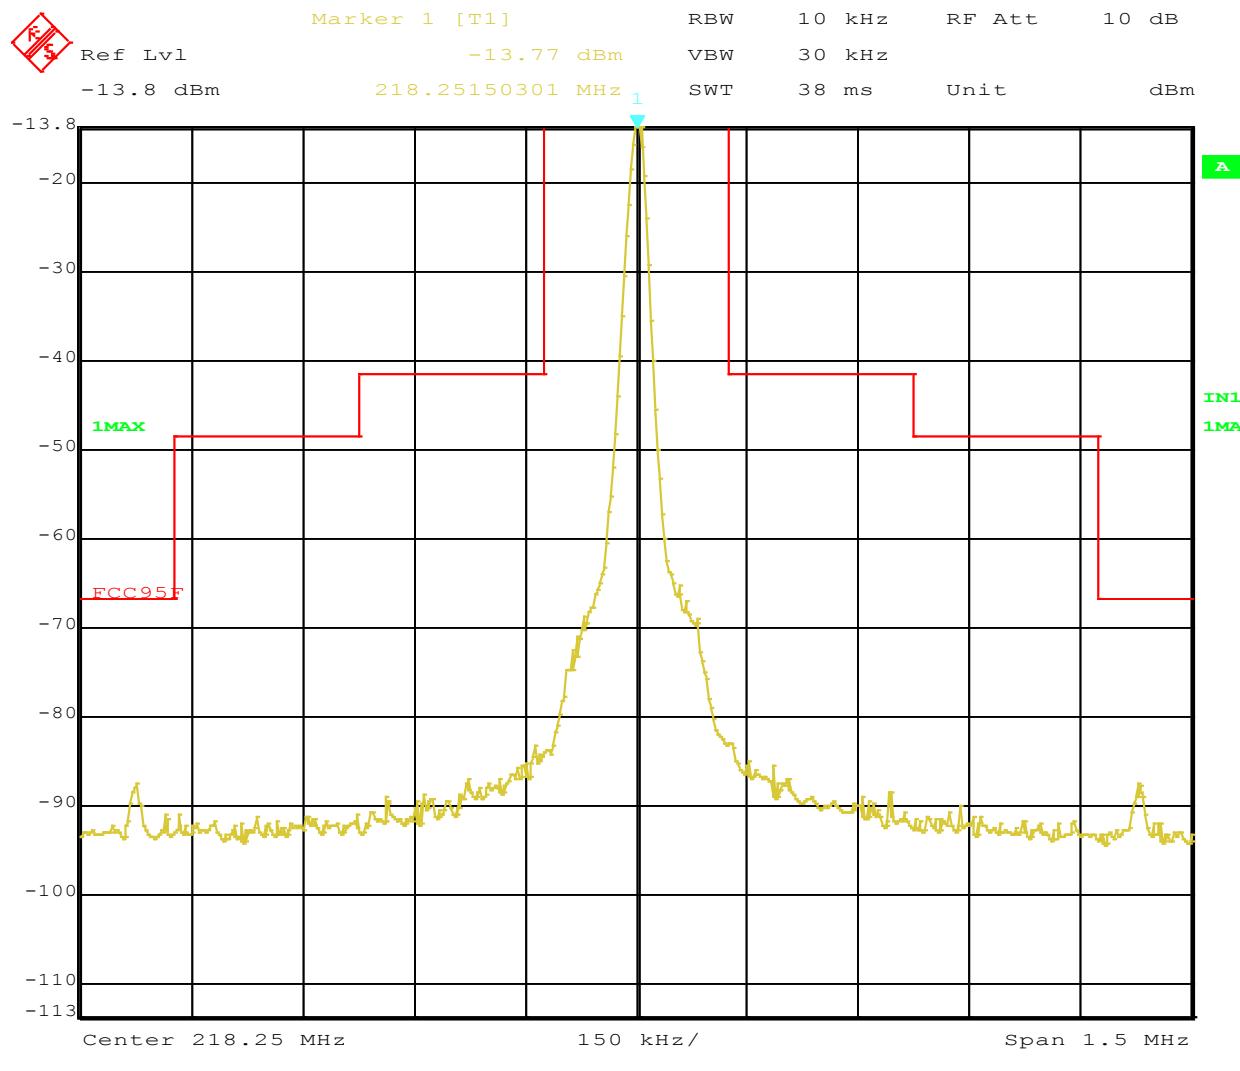

**Figure 20:** Emission mask Requirement at Operating Channel 218.25 MHz, 16 QPSK

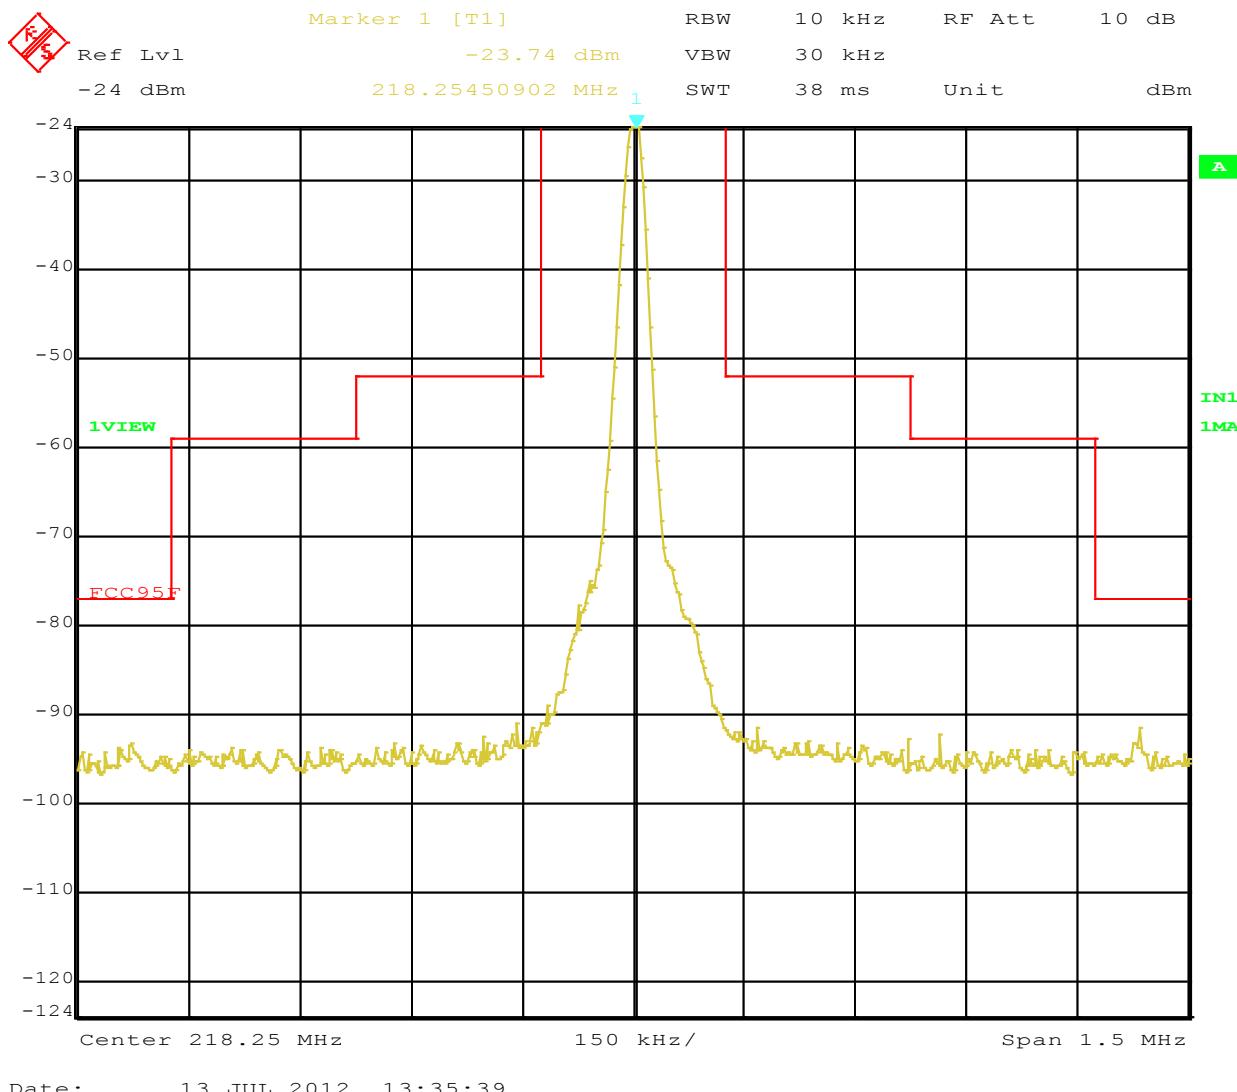

**Figure 21:** Emission mask Requirement at Operating Channel 218.25 MHz, 32 QPSK

Note: Emask was performed at 218.25MHz. As same circuitry is employed Emask at 218.75MHz is identical to the mask at 218.25MHz

## 4.4 Conducted Spurious Emissions

Requirements is same as Emission Mask 95.857. Any frequency outside the band of 218 MHz to 219 MHz, the power output level must be below -13 dBm


### 4.4.1 Test Method

The conducted method was used to measure the channel power output per ANSI/TIA-603-C:2004

The measurements were performed 30 MHz to 2.3GHz. Preliminary measurements indicated worst case emissions

The worst-case sample result is recorded below.

Test Setup:

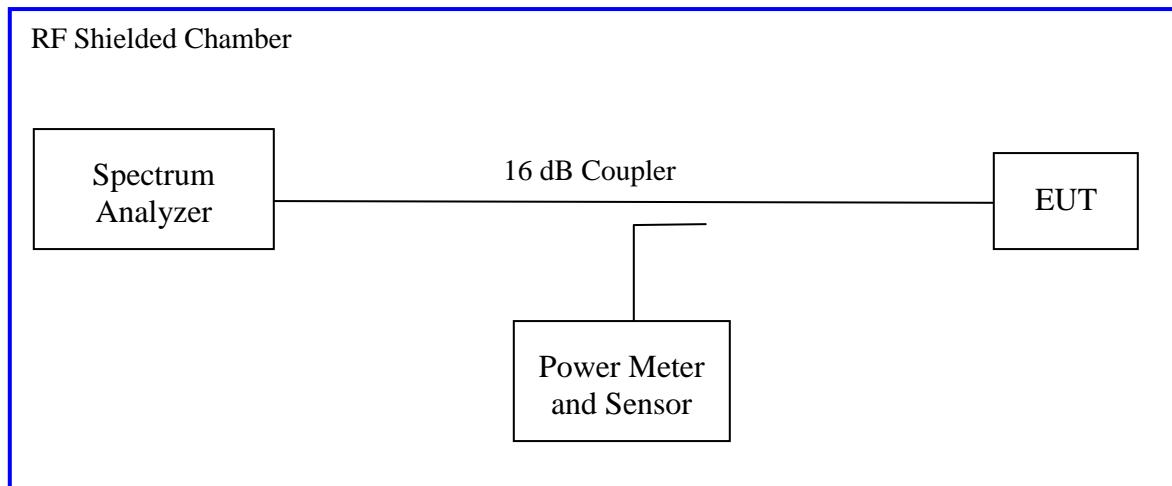


#### 4.4.2 Results

**Table 5:** Out of band Conducted Emission – Test Results

<b>Operating Freq.</b>	<b>Mode</b>	<b>Result</b>
218.5	GMSK	Pass
	16QPSK	Pass
	32 QPSK	Pass


Note2: Emission mask 95.857 a (4) is applicable for frequency band 218to 2219MHz which gives -13dBm as limit for out of band emissions but the worst case limit of Mask -13dBm is applied for all plots.

Note3: No emissions were observed in 1 to 2.3GHz band in preliminary scan, no final plots were taken with required RBW of 1MHz.

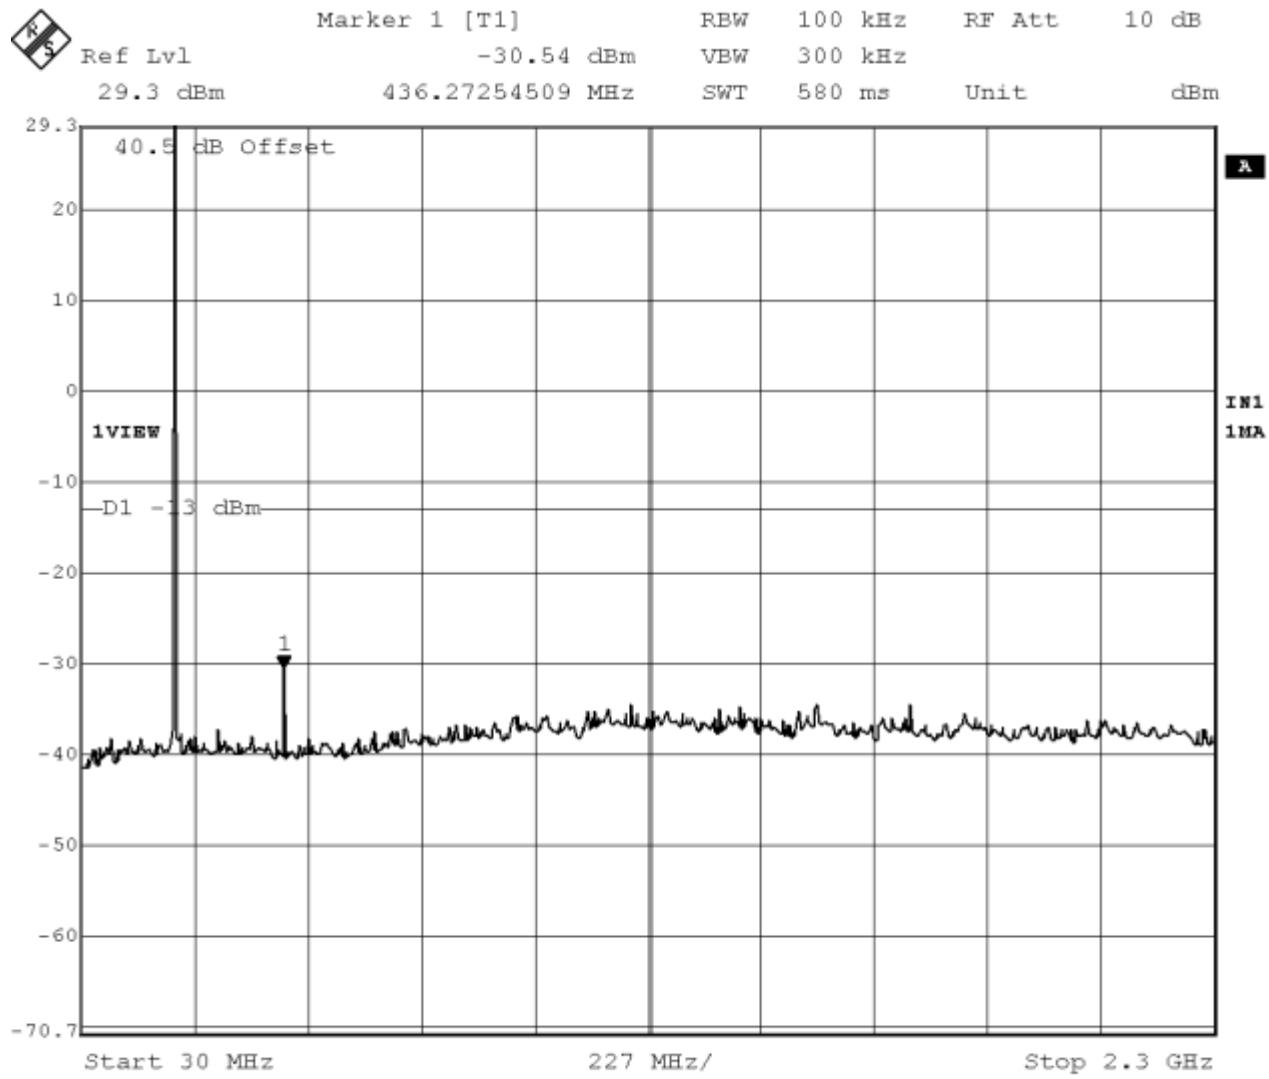


Date: 10.JUL.2012 23:54:19

**Figure 22:** Out of Band Emissions Operating Channel 218.5 MHz, GMSK

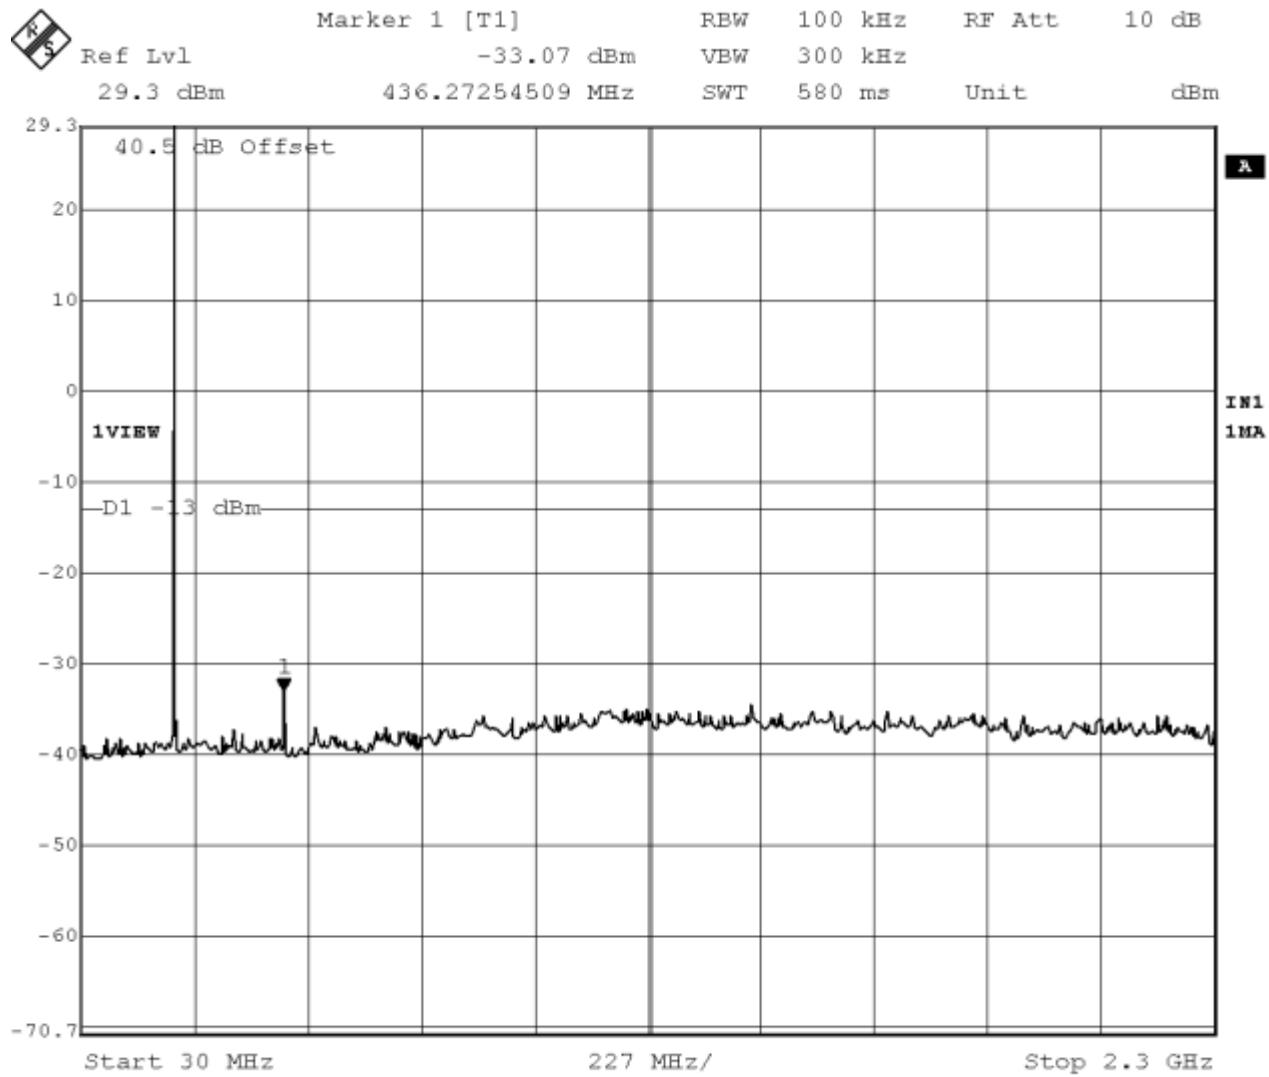

Date: 11.JUL.2012 00:01:13

**Figure 23:** Out of Band Emissions Operating Channel 218.5 MHz, 16QPSK

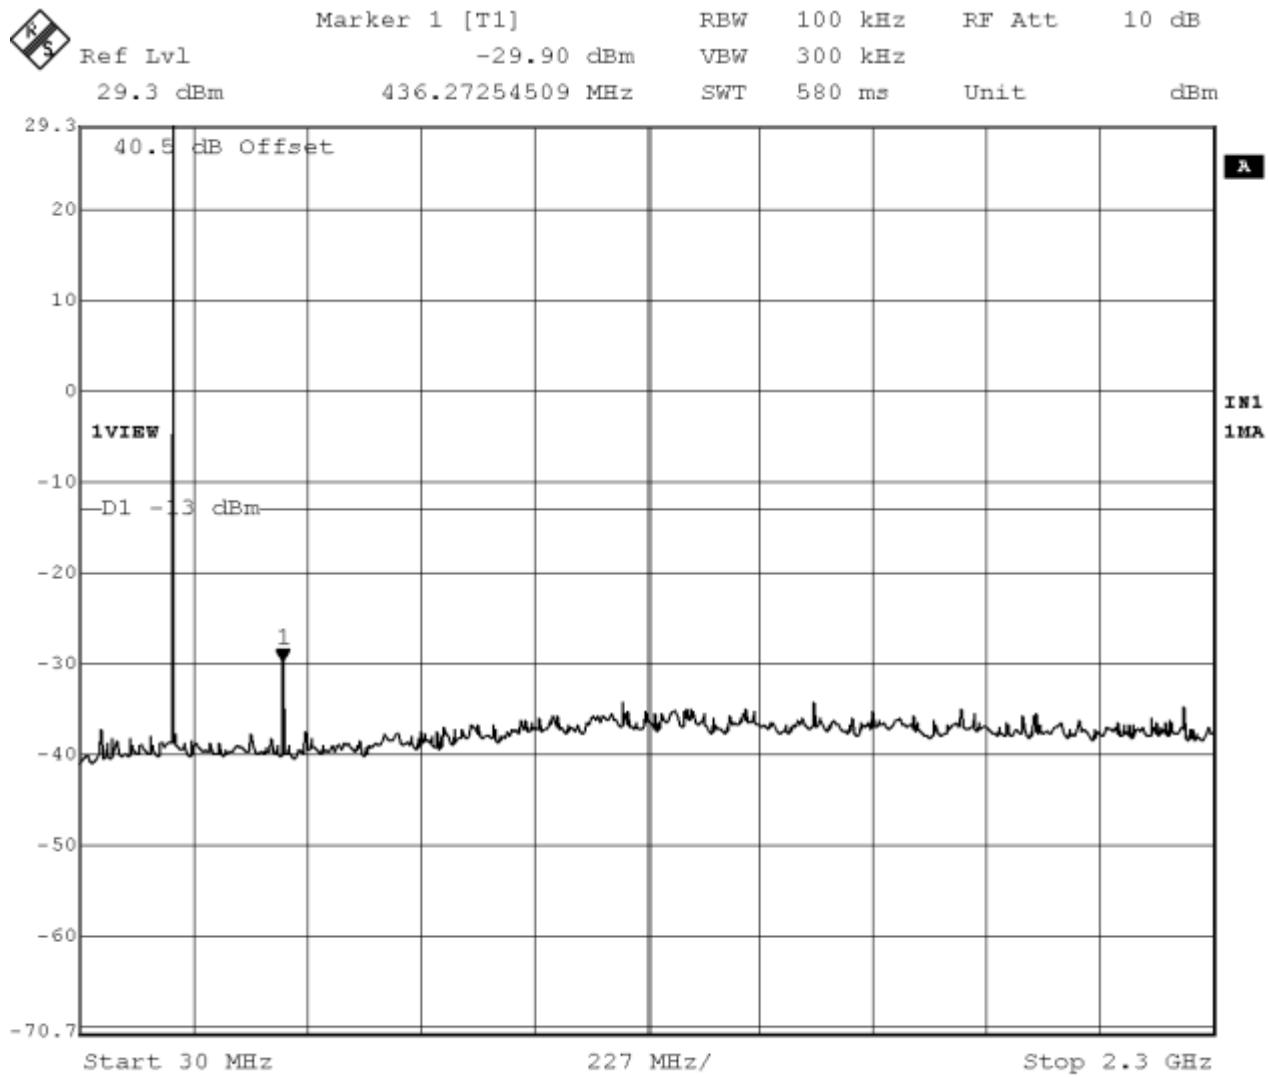

Date: 10.JUL.2012 23:55:30

**Figure 24:** Out of Band Emissions Operating Channel 218.5 MHz, 32QPSK

## 4.5 Transmitter Spurious Emissions

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 part 95*

### 4.5.1 Test Methodology

#### 4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

#### 4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

Final

The final scans were performed on the worst axis, for three operating channels. Substitution method was used to obtain final results. Final test were performed on the following channels based on pre-scans

218.5MHz

#### 4.5.1.3 *Deviations*

None.

#### 4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 95

*Emission limits are taken from Emission mask 95.857*

#### 4.5.3 Test Results



The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and Test Plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

SOP 1 Radiated Emissions										Tracking # 31260509.004 Page 1 of 4	
<b>EUT Name</b>	TransAir PTC-3006					<b>Date</b>	March 7, 2012				
<b>EUT Model</b>	PTC-3006					<b>Temp / Hum in</b>	23°C / 39%rh				
<b>EUT Serial</b>	D1-10					<b>Temp / Hum out</b>	N/A				
<b>EUT Config.</b>	TX ON					<b>Line AC / Freq</b>	12 Vdc				
<b>Standard</b>	CFR47 Part 15 part 95					<b>RBW / VBW</b>	120/300 kHz				
<b>Dist/Ant Used</b>	3m / EMCO3115 / 1m - RA42-K-F-4B-C					<b>Performed by</b>	Suresh Kondapalli				
Frequency Peak	Gen	Cable	Antenna	EIRP	Antenna	Table	Height	Limit	Margin		
MHz	dBuV/m	dBm	dB	dbi	dBm	POL	deg	cm	dBm	dB	
Transmitted Data 218.5 MHz GMSK/16QPSK/32 QPSK											
42.25	57.17	-32.74	0.98	-8.90	-42.62	V	329	100	-13	-29.62	
66.75	63.30	-31.28	1.17	-1.02	-33.47	V	213	150	-13	-20.47	
121.88	54.50	-42.21	1.51	-2.06	-45.78	H	97	185	-13	-32.78	
413.42	47.14	-57.43	2.65	5.90	-54.18	H	324	102	-13	-41.18	
423.20	52.36	-52.11	2.68	5.90	-48.88	H	150	102	-13	-35.88	
432.00	56.61	-47.91	2.71	6.04	-44.58	H	150	102	-13	-31.58	
436.99	74.15	-30.38	2.72	6.14	-26.96	H	139	102	-13	-13.96	
441.60	54.85	-49.64	2.73	6.20	-46.17	H	136	102	-13	-33.17	
451.40	49.98	-54.37	2.76	6.27	-50.86	H	154	102	-13	-37.86	
655.90	50.80	-53.54	3.31	6.35	-50.49	H	224	150	-13	-37.49	
874.00	65.20	-38.96	3.88	6.70	-36.15	H	194	102	-13	-23.15	
Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty Total CF= Amp Gain + Cable Loss + ANT Factor											
Combined Standard Uncertainty $u_c(y) = \pm 3.2 \text{ dB}$ Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Notes: EUT is Class A device Table combines all data rates/modulations These measurements were performed at higher power for part 80 /90.											

**SOP 1 Radiated Emissions**Tracking # 31260509.004 Page 2 of 4  
B



<b>EUT Name</b>	TransAir PTC-3006	<b>Date</b>	August 01, 2012
<b>EUT Model</b>	PTC-3006	<b>Temp / Hum in</b>	23°C / 40%rh
<b>EUT Serial</b>	D1-10	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX ON	<b>Line AC</b>	12 Vdc
<b>Standard</b>	CFR47 Part 95	<b>RBW / VBW</b>	120/300 kHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

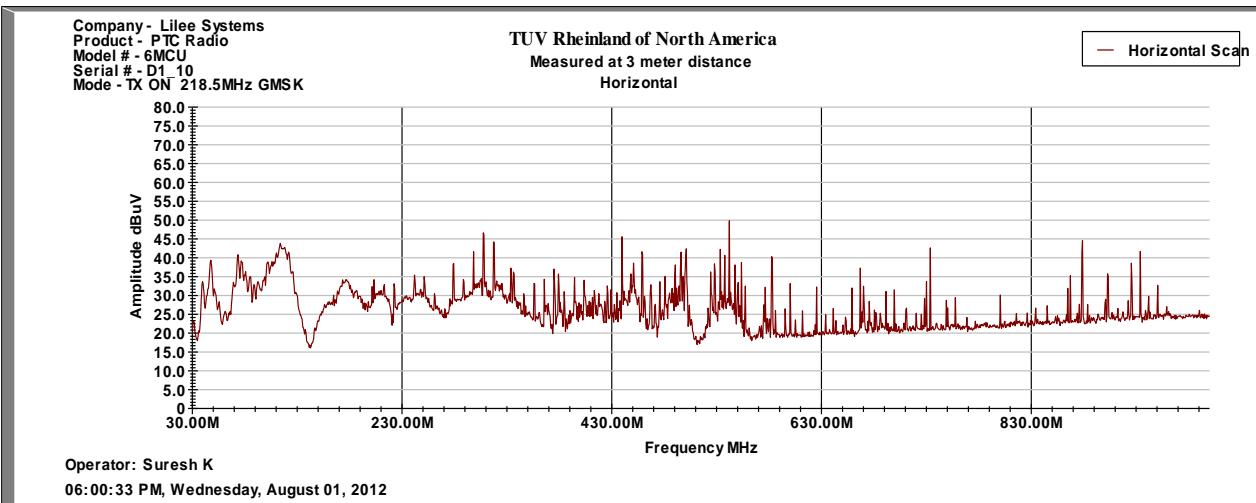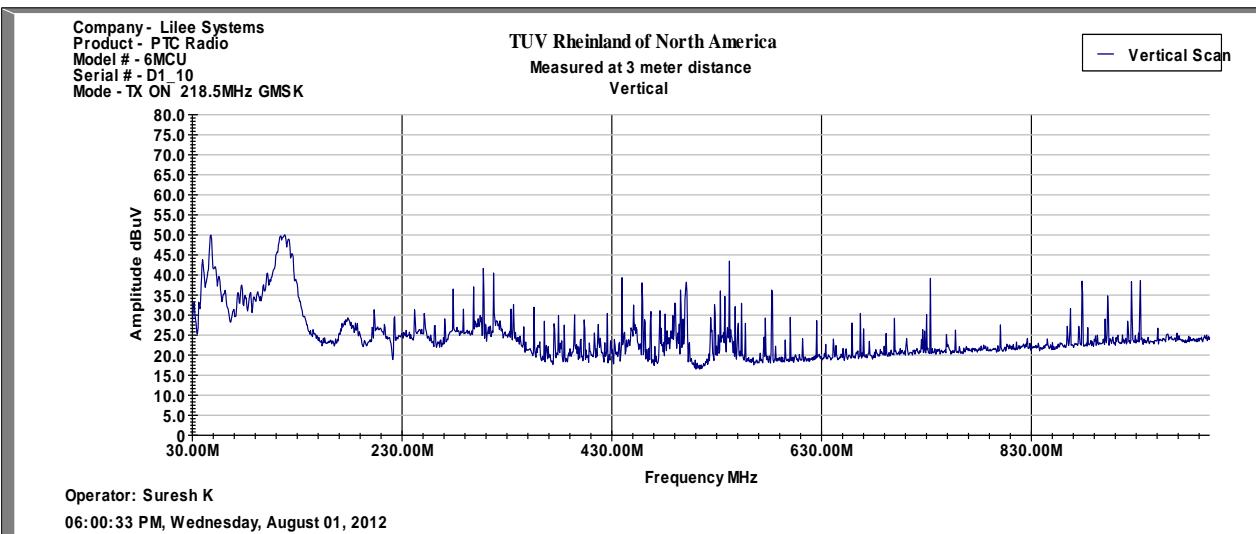

Notes:

**SOP 1 Radiated Emissions**Tracking # 31260509.004 Page 2 of 4  
B

<b>EUT Name</b>	TransAir PTC-3006	<b>Date</b>	August 01, 2012
<b>EUT Model</b>	PTC-3006	<b>Temp / Hum in</b>	23°C / 40%rh
<b>EUT Serial</b>	D1-10	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX ON	<b>Line AC</b>	12 Vdc
<b>Standard</b>	CFR47 Part 95	<b>RBW / VBW</b>	120/300 kHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

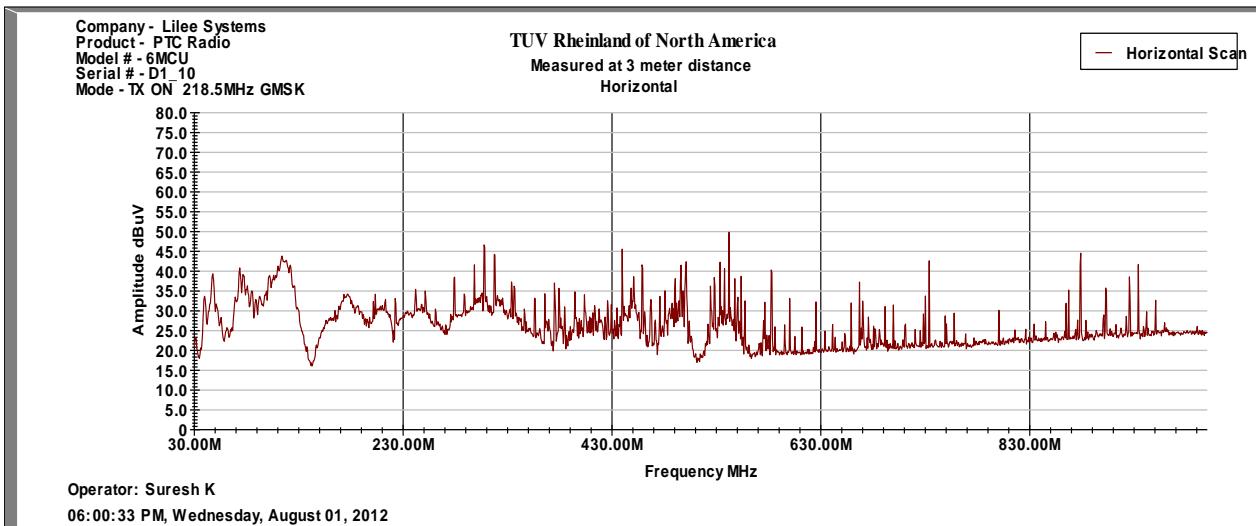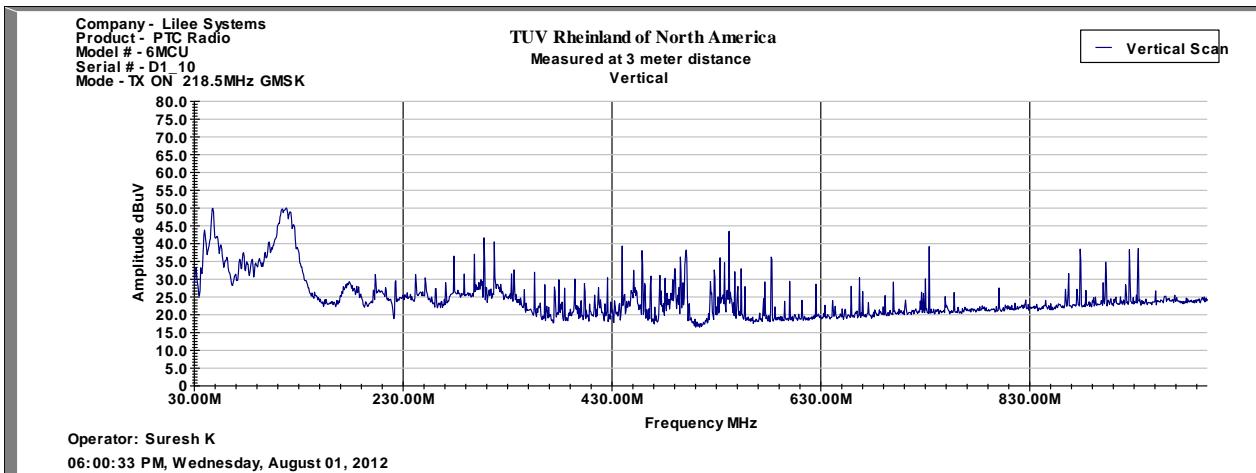


Notes:

**SOP 1 Radiated Emissions**Tracking # 31260509.004 Page 3 of 4  
B

<b>EUT Name</b>	TransAir PTC-3006	<b>Date</b>	04/06/2012
<b>EUT Model</b>	PTC-3006	<b>Temp / Hum in</b>	23°C / 39%rh
<b>EUT Serial</b>	D1-10	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX ON	<b>Line AC</b>	12 Vdc
<b>Standard</b>	CFR47 Part 15 Part 95	<b>RBW / VBW</b>	120 kHz/300 kHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 to 2.5GHz Plot for Transmit Mode: 218.50MHz

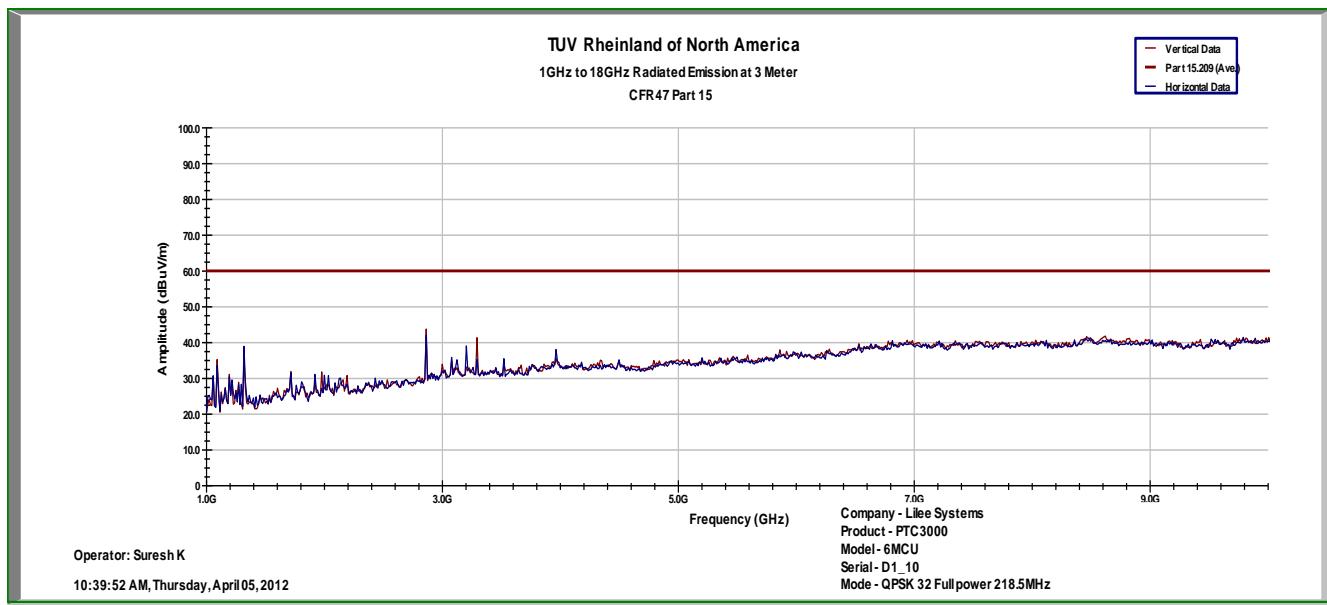

Note: These measurements performed at higher power for part 80 /90 are applicable

**SOP 1 Radiated Emissions**

 Tracking # 31260509.004 Page 4 of 4  
 B

<b>EUT Name</b>	TransAir PTC-3006	<b>Date</b>	04/06/2012
<b>EUT Model</b>	PTC-3006	<b>Temp / Hum in</b>	23°C / 39%rh
<b>EUT Serial</b>	D1-10	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX ON	<b>Line AC / Freq</b>	DC 12Volts
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz/300 kHz
<b>Dist/Ant Used</b>	3m / EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

Frequency Peak	Gen	Cable	Antenna	EIRP	Antenna	Table	Height	Limit	Margin	
MHz	dBuV/m	dBm	dB	dbi	dBm	POL	deg	cm	dBm	dB
1102.49	41.73	-24.48	1.24	6.76	-54.75	V	17	121	-13.0	-41.75
1466.78	35.21	-23.58	1.34	7.76	-60.57	V	40	111	-13.0	-47.57

Transmitted Data GMSK/16QPSK/32 QPSK all Channels combined										
1102.49	41.73	-24.48	1.24	6.76	-54.75	V	17	121	-13.0	-41.75
1466.78	35.21	-23.58	1.34	7.76	-60.57	V	40	111	-13.0	-47.57
1984.48	37.88	-22.69	1.50	8.81	-64.11	H	54	148	-13.0	-51.11
2125.76	35.99	-22.38	1.70	9.32	-59.79	H	35	143	-13.0	-46.79
2666.8	28.94	-22.29	1.70	9.41	-46.85	H	48	143	-13.0	-33.85
2866.52	45.92	-22.39	1.80	9.41	-49.87	H	38	137	-13.0	-36.87

#### 4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

## 4.6 Receiver Spurious Emissions

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 15.109 and RSS GEN Sect 6.1.

### 4.6.1 Test Methodology

#### 4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

#### 4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

#### 4.6.1.3 Deviations

None.

## 4.6.2 Receiver Spurious Emission Limit

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 80 & 90 and RSS 119.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

## 4.6.3 Test Results

The final measurement data indicates the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and 1.5.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

### 4.6.3.1 Final Data

The data recorded in this section contains the final results under the worst-case conditions and without any modifications or special accessories implemented as the manufacturer intends.

## 4.6.4 Conducted spurious emissions in Receive mode

Limits : CFR 47 15.111 -57dBm

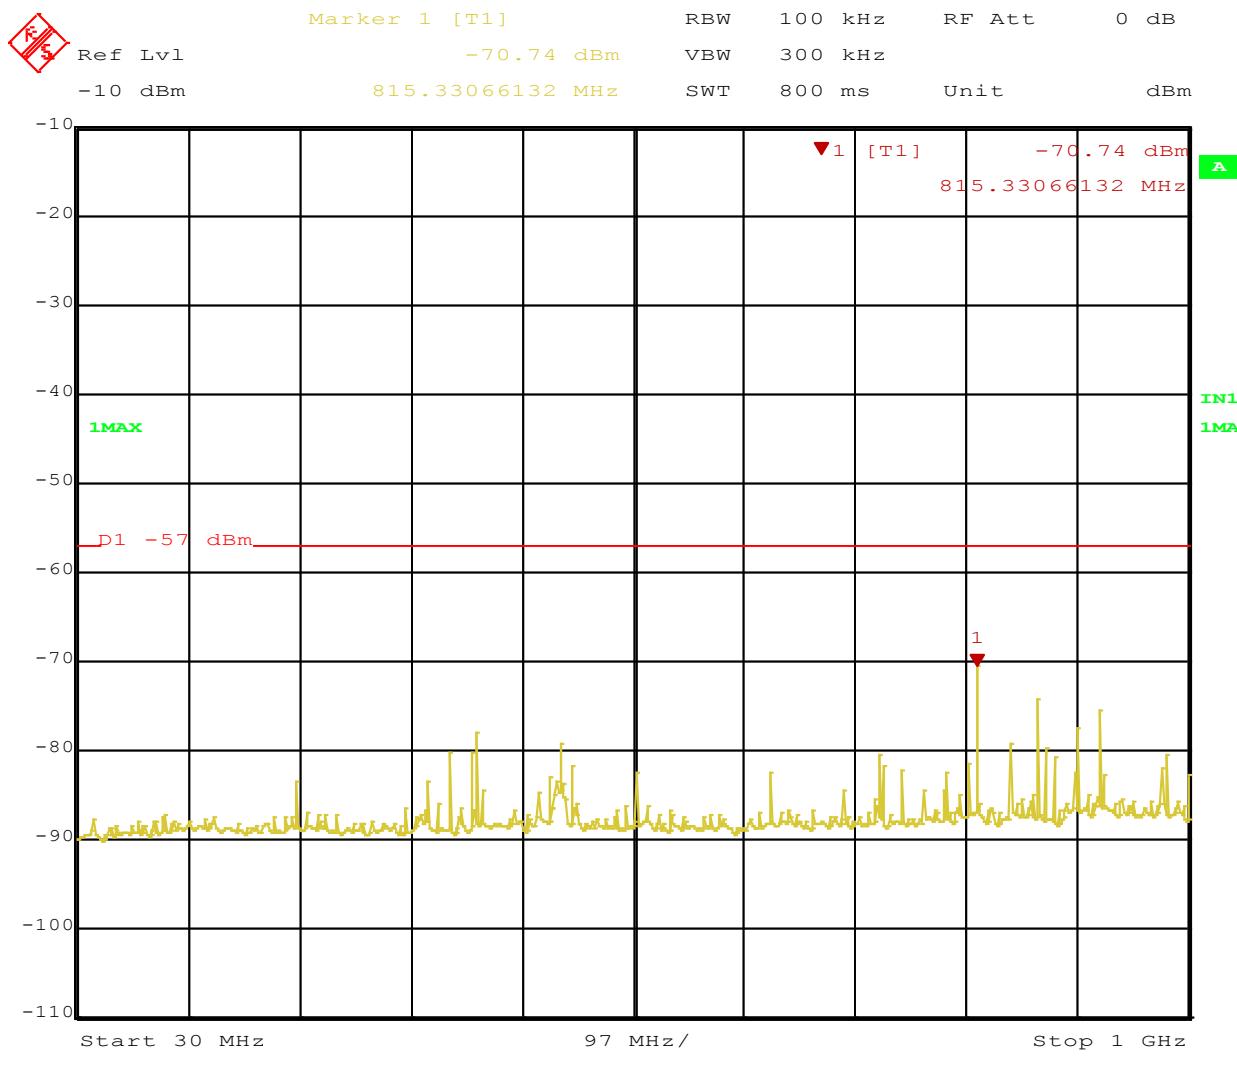

SOP 1 Radiated Emissions										Tracking # 31260509.004 Page 1 of 3
<b>EUT Name</b>	TransAir PTC-3006					<b>Date</b>	B March 07, 2012			
<b>EUT Model</b>	PTC-3006					<b>Temp / Hum in</b>	23°C / 39%rh			
<b>EUT Serial</b>	D1-10					<b>Temp / Hum out</b>	N/A			
<b>EUT Config.</b>	Receive Mode					<b>Line AC / Freq</b>	12 Vdc			
<b>Standard</b>	CFR 47 part 95					<b>RBW / VBW</b>	120/300 kHz			
<b>Dist/Ant Used</b>	3m / EMCO3115 / 1m - RA42-K-F-4B-C					<b>Performed by</b>	Suresh Kondapalli			
Emission	FIM	FIM	Total	E-Field	Spec	Spec	Table	ANT	ANT	Type
Freq	Pk	QP/Avg	CF	QP	Limit	Margin	Pos	Pos	Pola	
120.40	50.41	48.67	-11.85	36.82	43.52	-6.70	267	181	H	Spurious
220.80	53.47	53.40	-13.73	39.67	46.02	-6.35	272	127	H	Spurious
230.40	52.34	51.03	-12.97	38.06	46.02	-7.96	269	125	H	Spurious
431.75	24.47	46.10	-8.08	38.02	46.02	-8.00	205	289	H	Spurious
441.60	49.08	49.12	-8.15	40.97	46.02	-5.05	183	102	H	Spurious
451.19	49.82	50.04	-8.06	41.98	46.02	-4.04	123	222	H	Spurious
65.41	58.01	55.19	-18.55	36.64	40.00	-3.36	143	120	V	Spurious
121.95	45.92	44.25	-11.93	32.32	43.52	-11.20	30	160	V	Spurious
431.75	23.00	43.06	-8.42	34.64	46.02	-11.38	238	132	V	Spurious
441.34	23.85	45.83	-8.45	37.38	46.02	-8.64	194	164	V	Spurious
1000.00	42.36	34.03	-9.25	24.78	54.00	-29.22	224	100	H	Spurious
1666.71	41.07	40.97	-6.29	34.68	54.00	-19.32	170	114	H	Spurious
1805.44	41.92	37.33	-4.91	32.42	54.00	-21.58	81	105	H	Spurious
2125.77	42.05	36.28	-4.38	31.90	54.00	-22.10	12	129	H	Spurious
Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty										
Total CF= Amp Gain + Cable Loss + ANT Factor										
Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence										
Notes: These measurements were performed at higher power for part 80 /90 are still applicable below 1Ghz: RBW=120 kHz,VBW=300 kHz 1GHz – 25 GHz: RBW=1MHz, VBW=3MHz										

## SOP 1 Radiated Emissions


Tracking # 31260509.004 Page 2 of 3  
B

EUT Name	TransAir PTC-3006	Date	April 03, 2012
EUT Model	PTC-3006	Temp / Hum in	22°C / 40%rh
EUT Serial	D1-10	Temp / Hum out	N/A
EUT Config.	EUT on with all antennas and I/O ports active	Line AC / Freq	12 Vdc
Standard	CFR47 Part 15.109, Class A	RBW / VBW	See Note
Dist/Ant Used	3m / JB3 & EMC03115	Performed by	Suresh Kondapalli

Company - LiLee Systems  
Product - PTC radio  
Model # - 6MCU  
Serial # - D110

TUV Rheinland of North America  
Measured at 3 meter distance  
Vertical FCC 15.209

Vertical Scan  
FCC Class B

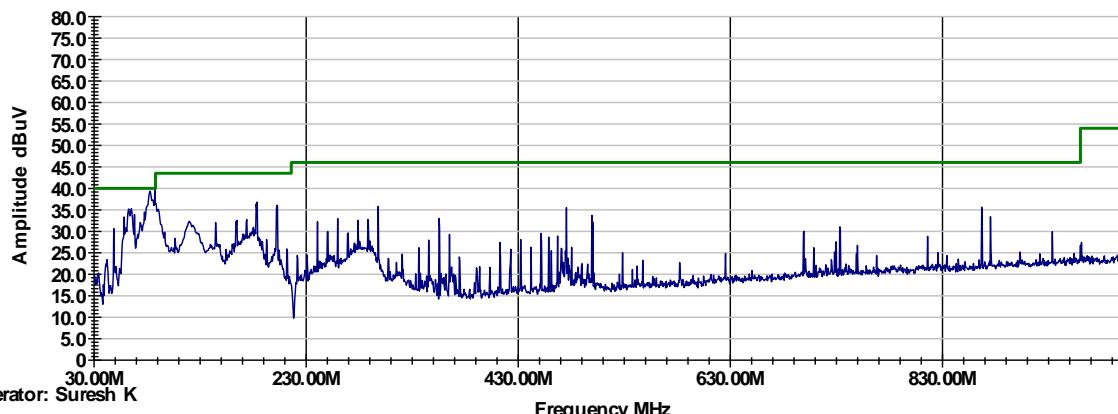


Operator: Suresh K  
Receive mode at 3meters 30 to 1000Mhz.TIL  
03:07:07 PM, Tuesday, April 03, 2012

Company - LiLee Systems  
Product - PTC radio  
Model # - 6MCU  
Serial # - D110

TUV Rheinland of North America  
Measured at 3 meter distance  
Horizontal FCC 15.209

Horizontal Scan  
FCC Class B

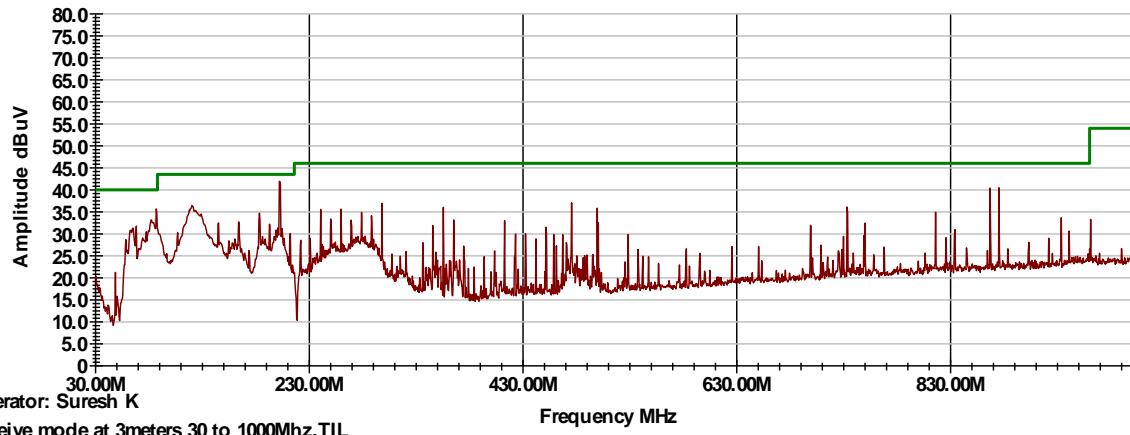


Operator: Suresh K  
Receive mode at 3meters 30 to 1000Mhz.TIL  
03:07:07 PM, Tuesday, April 03, 2012

Notes : None

**SOP 1 Radiated Emissions**Tracking # 31260509.00 Page 3 of 3  
4B

<b>EUT Name</b>	TransAir PTC-3006	<b>Date</b>	04/05/2012
<b>EUT Model</b>	PTC-3006	<b>Temp / Hum in</b>	22°C / 40%rh
<b>EUT Serial</b>	D1-10	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Receive Mode	<b>Line AC</b>	12 Vdc
<b>Standard</b>	CFR 47 part 90	<b>RBW / VBW</b>	1MHz/3MHz
<b>Dist/Ant Used</b>	3m / JB3	<b>Performed by</b>	Suresh Kondapali

Above 1GHz Plot for Receive Mode

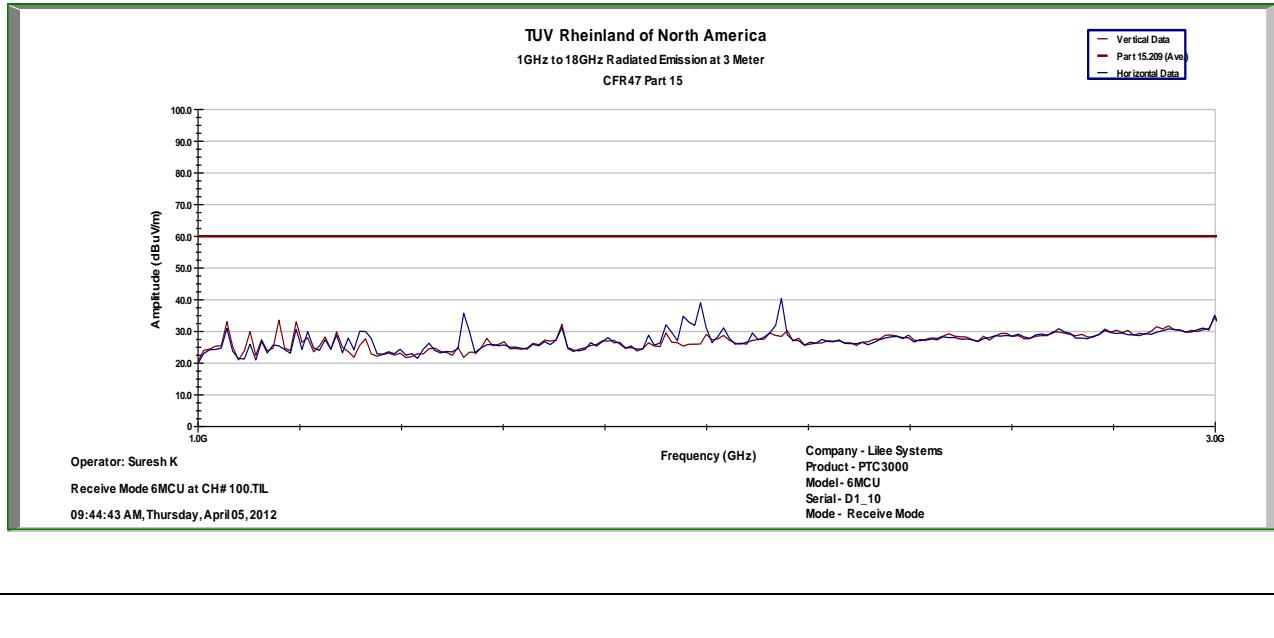**4.6.5 Sample Calculation**

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dBμV)

AMP = Amplifier Gain (dB)


CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

#### 4.7 *Test Setup Photos*



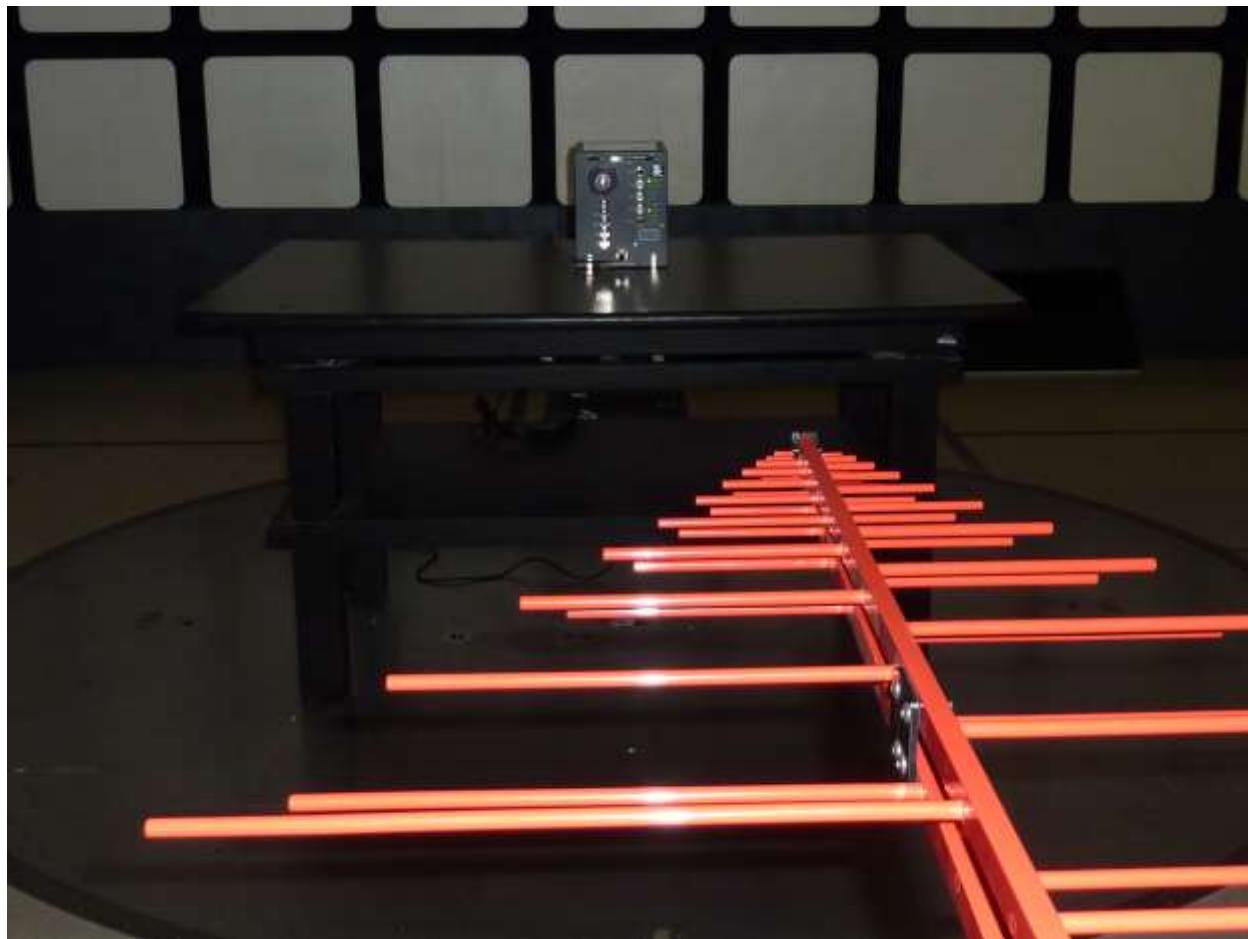

## 5 Test Equipment Use List

### 5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Bilog Antenna	Sunol Sciences	JB3	A102606	5/19/2012	5/19/2013
Horn Antenna	Sunol Sciences	DRH-118	A040806	9/29/2010	9/29/2012
Antenna (18-26GHz)	CMT	RA42-K-F-4B-C	020131-004	1/17/2012	1/17/2013
Antenna (26-40GHz)	CMT	RA28-K-F-4B-C	011469R-003	1/17/2012	1/17/2013
EMI Receiver	Hewlett Packard	8546A	3807A00445	1/17/2012	1/17/2013
Preselector	Hewlett Packard	85460A	3704A00407	1/17/2012	1/17/2013
Amplifier	Hewlett Packard	8447D	2944A07996	1/16/2012	1/16/2013
Spectrum Analyzer	Rhode & Schwarz	ESIB	832427/002	1/17/2012	1/17/2013
Amplifier	Rhode & Schwarz	TS-PR18	3545.7008.03	9/29/2010	9/29/2012
Amplifier	Rhode & Schwarz	TS-PR26	100011	1/16/2012	1/16/2013
Amplifier	Rhode & Schwarz	TS-PR40	100012	1/16/2012	1/16/2013
Signal Generator	Anritsu	MG3694A	42803	1/17/2012	1/17/2013
Notch Filter	Micro-Tronics	BRM50702	37	1/17/2012	1/17/2013
Notch Filter	Micro-Tronics	BRC50705	9	1/17/2012	1/17/2013
High Pass Filter (3.5 GHz)	Hewlett Packard	84300-80038	820004	1/17/2012	1/17/2013
High Pass Filter (8.5 GHz)	Micro-Tronics	HPM50107	4	1/17/2012	1/17/2013
Notch Filter	Telonic Berkely, Inc	TTR190-3EE	50033-2	VB	VB
Power Supplier	Kikosui	PCR8000W	CM000912	1/19/2012	1/19/2013
Digital Multimeter	Fluke	177	92780314	1/18/2012	1/18/2013
Power Meter	Agilent	E4418B	MY45103902	1/19/2012	1/19/2013
Power Sensor	Hewlett Packard	8482A	55-5131	1/19/2012	1/19/2013
Spectrum Analyzer	Agilent	E4407B	SG43330468	10/05/2011	10/05/2012
Thermometer	Fluke	5211	96480034	8/26/2011	8/26/2012
Thermo Chamber	Associated Environmental	SK-3102	5999	VB	VB

VB: Verify before use

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

## 6 EMC Test Plan

### 6.1.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 6.1.2 Customer

**Table 6:** Customer Information

<b>Company Name</b>	Lilee Systems, Ltd
<b>Address</b>	2905 Stender Way, Suite 78
<b>City, State, Zip</b>	Santa Clara, CA 95054
<b>Country</b>	U.S.A.
<b>Phone</b>	(408) 988-8672
<b>Fax</b>	(408) 988-8813

**Table 7:** Technical Contact Information

<b>Name</b>	Hamid Movahedi
<b>E-mail</b>	hmovahedi@lileesystems.com
<b>Phone</b>	(408) 898-8672
<b>Fax</b>	(408) 988-8813

### 6.1.3 Equipment Under Test (EUT)

**Table 8:** EUT Specifications

EUT Specification	
Dimensions	Lenth: 29cm Width: 16cm (w). Height: 30cm
Power	Input Voltage: 10 to 24 Vdc Input Current: 12 A
Environment	Mobile/Fixed
Operating Temperature Range:	-40 to +70 degrees C
Multiple Feeds	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Hardware Version	D
Part Number	None
RF Software Version	None
Radio	
Operating Mode	Base station, Waystation and mobile
Transmitter Frequency Band	216 to 222 MHz This report covers FCC CFR 47 part 95F, 218 to 219MHz band only
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	Power setting is from Att 31 = 20 dBm to ATT 0= 45.8 dBm See Channel Planning Table. Transmision at 218.5MHz shall be limited to 1watt for mobile and 4 watts for Base Station.
Antenna Type	Lilee systems TransAir 220MHz 3dBi Max gain 2.97dBi for part 95F Operation
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> DSSS <input type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: GMSK, $\Pi/4$ QPSK, QPSK, OQPSK, BPSK, SOQPSK, & DQPSK,
Data Rate	9600BPS, 16KBPS, 32KBPS
TX/RX Chain (s)	2 ( Primary and standby only one active at a time)
Directional Gain Type	<input checked="" type="checkbox"/> Uncorrelated <input checked="" type="checkbox"/> No Beam-Forming <input type="checkbox"/> Other describe:
Type of Equipment	<input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other Fixed and mobile modes, used in Locomotive, Wayside Station, Fixed mounted/ Base station

**Table 9:** EUT Channel Power Specifications

Frequency (MHz)	Power Set Value
	See Table 2

**EUT channels available:**

PTC-3006 uses 216 to 222MHz band as follows

This report covers only CFR 47 part 95F, 218 to 219MHz band. No specific channels are assigned for CFR 47 part 95F.

PTC-3006 operates in both segments of the band Segment A: 218.0- 218.5MHz and segment B: 218.5 to 219MHz. The test was performed on first and last channels.

**Table 10:** Interface Specifications:

Description of various models:

Power Output through custom connector, SPI and control signals

**Table 11:** Supported Equipment :

None

**Table 12:** Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 95
PTC-3006 Transmitter	PTC transmitter card 556D904D04G21000 005M0LB Sr# D1-10	N- Female terminated with Load  N-Female Connected directly to Spectrum analyzer through short coax cable and Calibrated 30 dB pad	TX Emission, RX Emission,  RF Power Output, Out of Band Emission, Emission mask, Occupied Bandwidth Frequency Stability

**Table 13:** Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	
PTC-3006 Transmitter	Dummy Load	* Transmit * Receive	EUT is normally rack mounted/ used on table top. EUT was evaluated as table top equipment
EUT Sr# D1-10			

#### 6.1.4 Test Specifications

Testing requirements

**Table 14:** Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 95F	All