

Certification Test Report

CFR 47 FCC Part 15, Subpart C Section 15.247 Industry Canada RSS 210, Issue 7

On-Ramp Wireless eNode

FCC ID: XTE-ULPENODE110 IC: 8655A-ULPENODE110

Project Code C-0095298

(Report C-0095298-RA-1-1) Revision: 1

July 21, 2010

Prepared for: On-Ramp Wireless Inc.

Author: Deniz Demirci

Senior Wireless / EMC Technologist

Approved by: Nick Kobrosly

Director of Canadian Operations

Confidentiality Statement: This report and the information contained herein represent the results of testing articles/products identified and selected by the client. The tests were performed to specifications and/or procedures approved by the client. National Technical Systems ("NTS") makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article or similar products for a particular purpose. This document shall not be reproduced except in full without written approval from National Technical Systems ("NTS") and the customer.



Report Summary

Test Facility:	National Technical Systems, Canada Product Integrity Laboratory 5151-47 th Street, N.E. Calgary Alberta T3J 3R2	
Accreditation Numbers:	0214.22 Electrical 0214.23 Mechanical Accredited by A2LA The American Association for Laboratory Accreditation CLIENTS SERVED: All interested parties FIELDS OF TESTING: Electrical/Electronic, Mechanical/Physical ACCREDITATION DATE:: May 14, 2009 VALID TO: December 31, 2011	
Applicant:	On-Ramp Wireless Inc. 10902 Via Frontera, Suite 200 San Diego, CA 92127 USA Tel: (858) 592-6008	
Customer Representative:	Rob Boesel / Jason Wilson Tel: (852) 312-8361 rob@onrampwireless.com / Jason.wilson@onrampwireless.com	



Test Summary

ndix	Test/Requirement	Deviations* from:		Deviations* from:		Deviations* from:		Deviations* from:		Applicable	Applicable
Appendix	Description	Base Standard	Test Basis	NTS Procedure	Fail	FCC Rule Parts	Industry Canada Rule Parts				
Α	Power Line Conducted Emission	No	No	No	Pass	FCC Subpart C 15.207 (a)	RSS-Gen Issue 2 7.2.2				
В	6 dB Bandwidth	No	No	No	Pass	FCC Subpart C 15.247 (a) (2)	RSS 210 Issue 7 A8.2 (a)				
С	Occupied Bandwidth (99% emission bandwidth)	No	No	No	N/A	N/A	RSS-Gen Issue 2 4.6.1				
D	Peak Power Output	No	No	No	Pass	FCC Subpart C 15.247 (b) (3)	RSS 210 Issue 7 A8.4 (4)				
Е	Power Spectral Density	No	No	No	Pass	FCC Subpart C 15.247 (e)	RSS 210 Issue 7 A8.2 (b)				
F	Conducted Spurious Emissions (TX)	No	No	No	Pass	FCC Subpart C 15.247 (d)	RSS 210 Issue 7 A8.5				
G	Conducted Spurious Emissions Band Edge	No	No	No	Pass	FCC Subpart C 15.247 (d)	RSS 210 Issue 7 A8.5				
Н	Duty Cycle	No	No	No	N/A	FCC Subpart C 15.35 (c)	RSS-Gen Issue 2 4.5				
1	Radiated Spurious Emissions Band Edge	No	No	No	Pass	FCC Subpart C 15.247, 15.205	RSS 210 Issue 7 2.6, A8.5				
J	Radiated Spurious Emissions (TX and RX)	No	No	No	Pass	FCC Subpart C 15.247, 15.205	RSS 210 Issue 7 2.6, A8.5 RSS Gen Issue 2 4.10				

Test Result:	The product presented for testing complied with test requirements as shown above.
Prepared By:	Deniz Demirci Senior Wireless / EMC Technologist
Reviewed By:	Glen Moore Wireless / EMC Manager
Approved By:	Alex Mathews

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

Quality Management Representative



Table of Contents

REPORT SUMMARY	2
TEST SUMMARY	3
REGISTER OF REVISIONS	5
1.0 INTRODUCTION	6
1.1 PURPOSE	6
2.0 EUT DESCRIPTION	6
2.1 CONFIGURATION	6
2.2 EUT SET UP CONFIGURATION	7
2.3 EUT POWER	7
2.4 EUT FREQUENCY LIST	7
2.5 EUT SOFTWARE	7
2.6 MODE OF OPERATION DURING TESTS	7
3.0 SUPPORT EQUIPMENT	8
3.1 CONFIGURATION	8
3.2 SUPPORT CABLE LIST	8
3.3 SUPPORT FREQUENCY LIST	8
4.0 TEST ENVIRONMENT	8
4.1 NORMAL TEST CONDITIONS	8
APPENDICES	9
APPENDIX A: POWER LINE CONDUCTED EMISSION	10
APPENDIX B: 6 DB BANDWIDTH	14
APPENDIX C: OCCUPIED BANDWIDTH	17
APPENDIX D: PEAK POWER OUTPUT	20
APPENDIX E: POWER SPECTRAL DENSITY	23
APPENDIX F: CONDUCTED SPURIOUS EMISSIONS (TX)	26
APPENDIX G: CONDUCTED SPURIOUS EMISSIONS BAND EDGE	29
APPENDIX H: DUTY CYCLE	31
APPENDIX I: RADIATED SPURIOUS EMISSIONS BAND EDGE	33
APPENDIX J: RADIATED SPURIOUS EMISSIONS (TX AND RX)	37
APPENDIX K: TEST EQUIPMENT LIST	
END OF DOCUMENT	



Register of revisions

Revision	Date	Description of Revisions
1	July 21, 2010	Final release for customer review

1.0 INTRODUCTION

1.1 PURPOSE

The purpose of this document is to describe the tests applied by NTS Canada to demonstrate compliance of the On-Ramp Wireless eNode to FCC Part 15 Subpart C section 15.247 for DTS transmitter and the equivalent sections of Industry Canada's RSS 210, Issue 7

2.0 EUT DESCRIPTION

2.1 CONFIGURATION

	Name	Model	Revision / Description	Serial Number
EUT	On-Ramp Wireless eNode	ULPN110	8	10315
Classification	Portable			
Operating Frequency Range	2402 MHz to 2476 M	2402 MHz to 2476 MHz		
Modulation	SS DBPSK			
Size (m)	59.5 mm x 25.9 mm	x 16.7 mm (2.341 in x 1.02	21 in x 0.659 in)	
Weight	14 grams			
Antenna Type/Gain	5dBi Antenna NEARSON Part # S151FL-L-RMM-2450S 2dBi Antenna NEARSON Part # S181FL-L-RMM- 2450S 1dBi Antenna Hyperlink Technologies Part # HG2401RD-MMCX			
Functional description	Ultra-Link Processing (ULP) provides wireless coverage to multiple eNodes via a network of one or more Access Points deployed over the intended coverage area. The ULP eNode is an RF communications module exposing an MMCX antenna port and digital signal pins for a low-power Serial Peripheral Interface Bus (SPI) for interfacing with application specific host devices. Typical applications for the eNode include sensor, metering and asset tracking data. Ultra-Link Processing is based upon a proprietary direct sequence spread spectrum (DSSS-DBPSK) communications protocol operating in the 2400-2483.5 MHz ISM band using 1 MHz channel spacing. It finds weak signals even in high noise environments, yielding extreme coverage, high level of immunity to interference, and significantly lowers the cost to deploy and operate a network.			
Physical Description	Single double sided PCB. Top side with MMCX connector poking through 2 piece metal EMI shield with two compartments. RF components and analog baseband circuitry are under smaller EMI shield compartment. Digital processing components are under larger EMI shield compartment. Bottom side of PCB is unshielded and contains minor support components as well as two 1 x 10 100 mil pitch PCB to PCB connectors.			



2.2 EUT SET UP CONFIGURATION

Quantity	EUT Description	P/N	S/N	Rev
1	ULP eNode	550-0004-02	10315	8

2.3 EUT POWER

Voltage	5 Volts
Number of Feeds	1
Gauge of cable	N/A
Current Draw	0.5 Amps
Special Requirements	Applied to 100 mil connector pin

2.4 EUT FREQUENCY LIST

Module	Signal	Frequency (MHz)
eNode	Real-time Clock	0.032768
eNode	System Clock	26.0
eNode	eASIC	84.0
eNode	Host Interface SPI	0-8.67
eNode	CPU to eASIC SPI	8.67

2.5 EUT SOFTWARE

Software Name	Software Release Number	Software Configuration
v2.8.5	2.8.5	N/A

2.6 Mode of Operation During tests

The EUT was tested in all configurations, all three orthogonal positions and antennas to determine worst case results with 100% duty cycle in low, mid and high channels in continuous Tx and Rx modes . See test appendices for specific EUT operating modes and conditions



3.0 SUPPORT EQUIPMENT

3.1 CONFIGURATION

The following equipment was used as the host system for the EUT

Peripheral / Device Description	Manufacturer	Model	Serial Number
Engineering board providing SPI control and power to the eNode. Attached beneath eNode via 100 mil connector	On-Ramp	PCA 510-0005-5	86
Switch-mode power supply	CUI INC	3A-211DN05	P/N:ETS050400UTC- P5P-SZ
Laptop computer interacts with engineering board via RS232 comm cable to enable test modes.	Dell	Inspiron 8100	CN-03N642-12961- 21K-8188
ESG Vector Signal Generator	Agilent	E4438C	US41461088

3.2 SUPPORT CABLE LIST

Quantity	Model	Ro	outing Description		Cable Length
Que		From	То		(m)
1	Generic RS-232 Serial Cable	Laptop in support room	Engineering board in RF chamber	To allow test control from laptop.	6

3.3 SUPPORT FREQUENCY LIST

Signal	Frequency (MHz)
Engineering Board Clock	26.0
Host to eNode Interface SPI	8.67
RS-232	0.115

4.0 TEST ENVIRONMENT

4.1 NORMAL TEST CONDITIONS

Temperature: 20 – 23 °C Relative Humidity: 28 – 35 % Atmospheric pressure: 883 – 890 mbar Nominal test voltage: 120 VAC 60Hz

The values are the limits registered during the test period.



APPENDICES



APPENDIX A: POWER LINE CONDUCTED EMISSION

A.1. Base Standard & Test Basis

Base Standard	FCC PART 15.207 (a) RSS-Gen Issue 2 7.2.2
Test Basis	ANSI C63.4-2003
Test Method	SOP-CAG- EMC-02

A.2. Specifications

Fraguenov	Limit (Class B)		
Frequency MHz	Quasi-Peak	Average	
IVII IZ	dBμV	dBμV	
0.150 - 0.500	66 to 56 ¹	56 to 46 ¹	
0.500 - 5.00	56	46	
5.00 - 30.00	60	50	

Note 1: decrease with the logarithm of the frequency

A.3. Test Procedure

ANSI C63.4-2003.

The EUT was pre tested in all modes including low, mid and high channel with the worst case test results being reported.

A.4. Deviations

Deviation Time &		Description and	Deviation Reference			
Number	Date	Justification of Deviation	Base Standard	Test Basis	NTS Procedure	Approval
None						

A.5. Test setup

On Ramp Wireless eNode was installed onto the On Ramp engineering board PCA 510-0005-3. CUI INC switch mode power supply was used to power up the engineering board. DELL Inspiron 8100 laptop was used to configure engineering board and On Ramp Wireless eNode via RS232

A.6. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist

A.7. Test date

July 19, 2010



A.8. Test Results

Product Integrity

Laboratory V2.5

Project Number: C0095298 Tester: Deniz

Model: On Ramp eNode Test ID: CE02tc-10m-0095298
Comments: Conf45: eNode R8 Tx Mid channel (2440),Max power,100% duty cycle, 1 dBi Antenna CUI

INC switch mode power supply 120 VAC 60 Hz

FCC15 B Standard: Correction Emission Measured Frequency Measurement Limit Margin Factors Voltage/Line Value Level Limit Type (MHz) Detector $(dB\mu V)$ (dB) (dB) $(dB\mu\nabla)$ $(dB\mu V)$ 35.68 47.81 AC 120V Line1A 0.162 QP 12.13 QΡ 65.35 17.54 0.190 QP 31.46 11.79 43.25 QΡ 64.03 20.78 AC 120V Line1A 0.395 QΡ 10.93 30.26 QΡ 57.95 AC 120V Line1A 19.33 27.69 AC 120V NeutralA 0.164 QP 34.79 12.16 46.95 QP 65.24 18.29 QP 25.60 11.47 37.07 QP AC 120V NeutralA 0.228 62.51 25.44 0.258 AC 120V NeutralA QP 22.42 11.19 33.61 QP 61.50 27.89 AC 120V Line1A 0.153 21.51 12.16 33.67 55.85 ΑV ΑV 22.18 AC 120V Line1A 0.197 ΑV 11.45 11.79 23.24 ΑV 53.74 30.50 17.98 0.388 ΑV 10.95 28.93 ΑV 48.12 19.19 AC 120V Line1A AC 120V Line1A 1.119 ΑV 8.51 10.75 19.26 ΑV 46.00 26.74 AC 120V NeutralA 0.151 ΑV 21.20 12.20 33.40 55.94 22.54 ΑV 7.62 19.03 52.01 AC 120V NeutralA ΑV 11.41 ΑV 0.243 32.98 0.390 AC 120V NeutralA ΑV 18.51 10.87 29.38 ΑV 48.07 18.69 AC 120V NeutralA 1.404 9.75 10.70 20.45 46.00 25.55 ΑV ΑV

The highest emission measured was 47.81 dB μ V with quasi peak detector at 162 kHz. It has 17.54 dB margin to the FCC Part 15.207 and RSS-Gen Issue 2 7.2.2 limits.

Figure 1 Conducted Emission 120 VAC Line - Quasi-peak Detector


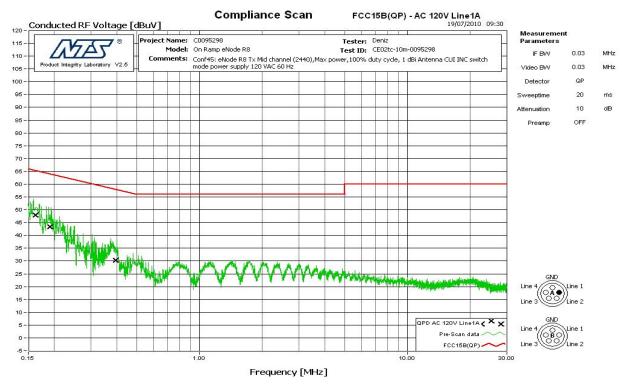


Figure 2 Conducted Emission 120 VAC Return - Quasi-peak Detector

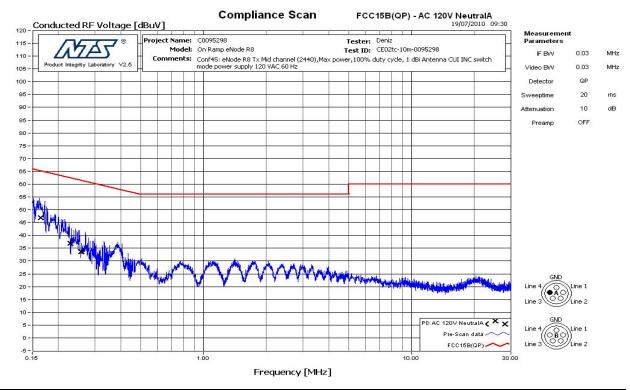

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Figure 3 Conducted Emission 120 VAC Line - Average Detector


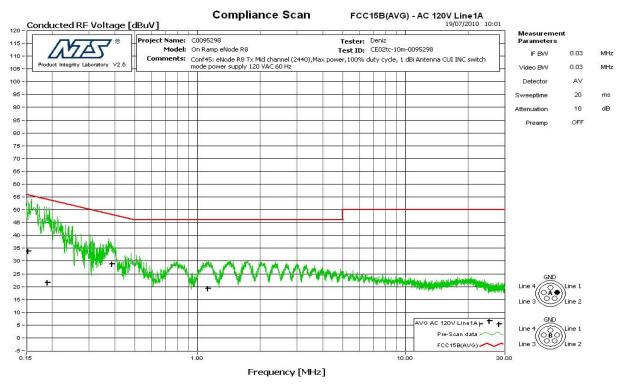


Figure 4 Conducted Emission 120 VAC Return - Average Detector



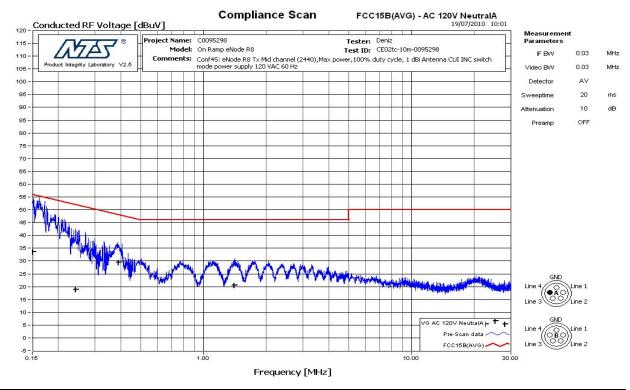

APPENDIX B: 6 DB BANDWIDTH

B.1. Base Standard & Test Basis

Base Standard	FCC PART 15.247 (a) (2) RSS 210 Issue 7 A8.2 (a)
Test Basis	ANSI C63.10 RSS-Gen Issue 2 4.6.2
Test Method	ANSI C63.10 RSS 210 Issue 7 A8.2 (a)

B.2. Specifications

15.247 2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

B.3. Deviations

Deviation	Time &	Description and	De	viation Referen	ce	
Number	Date	Justification of Deviation	Base Standard	Test Basis	NTS Procedure	Approval
	•		None	•		

B.4. Test Procedure

ANSI C63.10 and RSS 210

B.5. Test Results

The EUT is in compliance with the requirement as specified above

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	
Low	2402	1.082	
Mid	2440	1.062	
High	2476	1.022	

All final reported values are corrected values.

B.6. Operating Mode During Test

The EUT was tuned to a low, middle and high channel in continuous transmit mode at maximum rated RF output power and 100% duty cycle. Power level setting was adjusted to # 59 for high channel measurement

B.7. Tested By


This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci


Function: Senior Wireless / EMC Technologist

B.8. Test date


July 9, 2010

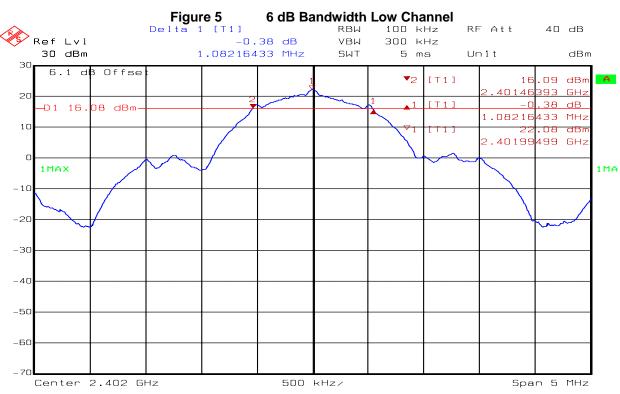

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Low Channel, (2402 MHz) Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 9:04:38

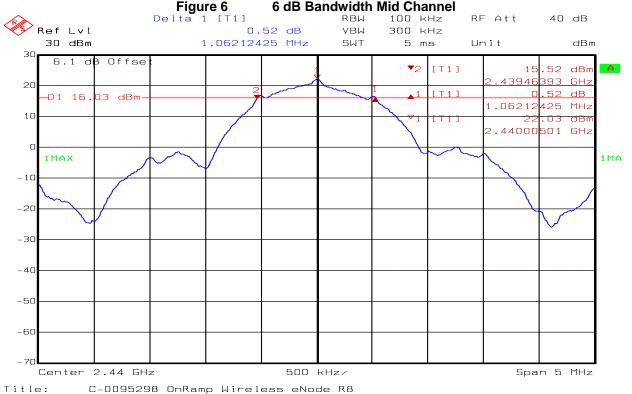

Comment A: Mid Channel, (2440 MHz)Max pwr, 100% Duty Cycle Date: 9.JUL.2010 12:07:37

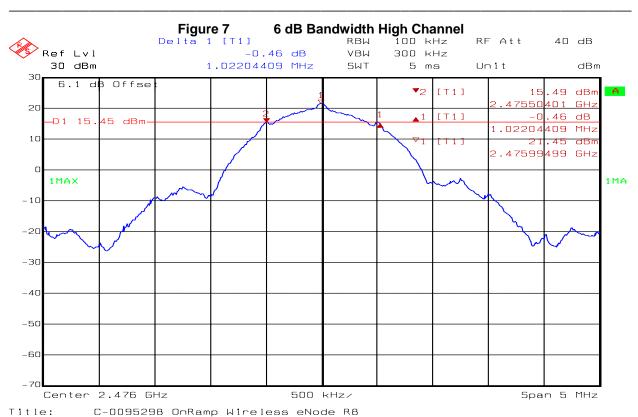

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: High Channel, (2476 MHz) pwr#59, 100% Duty Cycle
Date: 9.JUL.2010 13:31:50



APPENDIX C: OCCUPIED BANDWIDTH

C.1. Base Standard & Test Basis

Base Standard	RSS-Gen Issue 2 4.6.1
Test Basis	RSS-Gen Issue 2 4.6.1
Test Method	RSS-Gen Issue 2 4.6.1

C.2. Specifications

4.6.1 When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

C.3. Test Procedure

RSS-Gen Issue 2

C.4. Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
Low	2402	2.174	
Mid	2440	1.814	
High	2476	1.523	

All final reported values are corrected values

C.5. Operating Mode During Test

The EUT was tuned to a low, middle and high channel in continuous transmit mode at maximum rated RF output power and 100% duty cycle. Power level setting was adjusted to # 59 for high channel measurement

C.6. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.


Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist


C.7. Test date


July 9, 2010



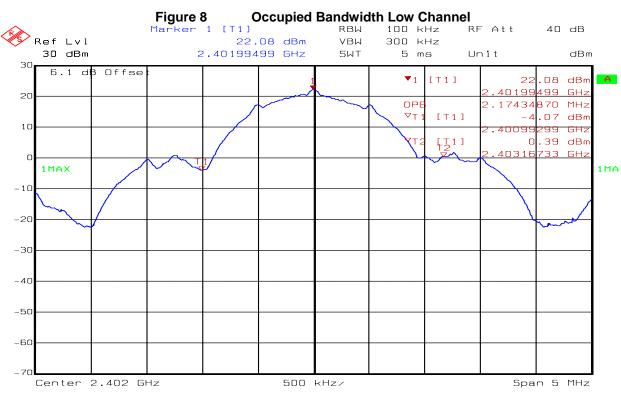

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Low Channel, (2402 MHz) Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 9:07:58

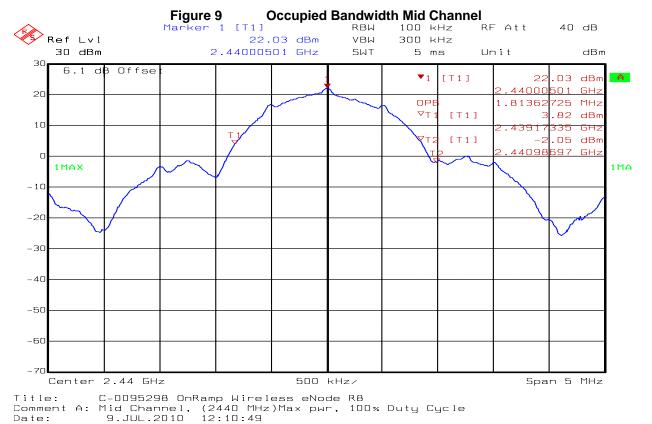

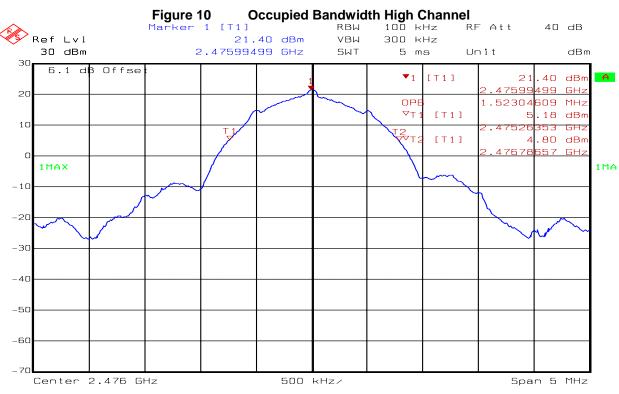

Title: C-0095298 OnRamp Wireless eNode R8 Comment A: High Channel, (2476 MHz) pwr#59, 100% Duty Cycle Date: 9.JUL.2010 11:02:02



APPENDIX D: PEAK POWER OUTPUT

D.1. Base Standard & Test Basis

Base Standard	FCC 15.247 RSS 210 Issue 7 A8.4 (4)
Test Basis	FCC 15.247 as per ANSI C63.10 RSS-Gen Issue 2 4.8
Test Method	ANSI C63.10 and RSS-Gen Issue 2 4.8

D.2. Specifications

The maximum peak output power shall not exceed 30 dBm in the 2400 MHz- 2483.5 MHz band

D.3. Test Procedure

ANSI C63.10, 6.10.3

T is the transmission pulse duration over which the unlicensed wireless device is on and transmitting at its maximum power control level.

T = 2.10 seconds (see appendix G)

Set resolution bandwidth (RBW) = 1 MHz. Set the span to encompass the entire emission bandwidth (EBW) of the signal. Use automatic setting for analyzer sweep time.

Check the sweep time to determine which procedure to use,

Sweep time = 5 ms,

Sweep time << T

ANSI C63.10, 6.10.3.1 Method 1—spectral trace averaging

- a) Set span to encompass the entire EBW of the signal.
- b) Set RBW = 1 MHz.
- c) Set VBW ≥ 3 MHz.
- d) Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise, use peak detector mode
- e) Use a video trigger with the trigger level set to enable triggering only on full power pulses. Unlicensed wireless device must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run." Powergated sweeping may be used to ensure the analyzer sweeps only while the device is transmitting.
- f) Trace average across 100 traces in power averaging mode.
- g) Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

D.4. Operating Mode During Test

The EUT was tuned to a low, middle and high channel in continuous transmit mode at maximum rated RF output power and 100% duty cycle. Power level setting was adjusted to # 59 for high channel measurement



D.5. Test Results

Channel	Frequency (MHz)		
Low	2402	20.10	
Mid	2440	19.92	
High	2476	18.81	

Compliant – The maximum peak power was 20.10 dBm measured conducted at the RF connector All final reported values are corrected values

D.6. Tested By


This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci


Function: Senior Wireless / EMC Technologist

D.7. Test date


July 9, 2010

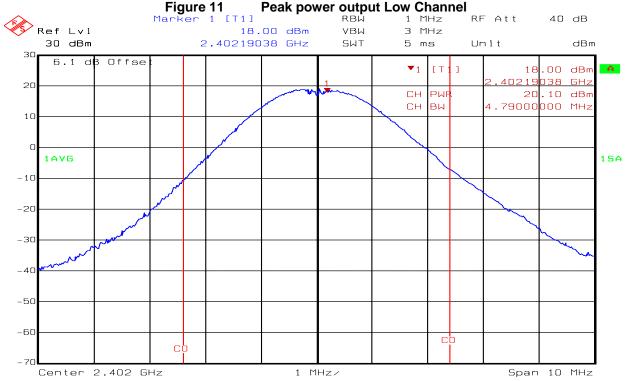

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Low Channel, (2402 MHz) Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 14:35:20

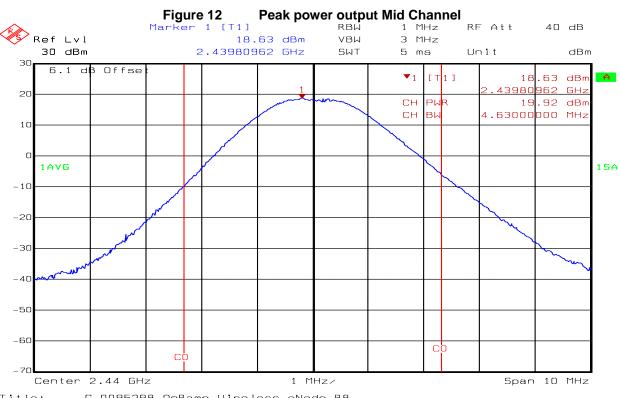

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Mid Channel, (2440 MHz)Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 12:18:22

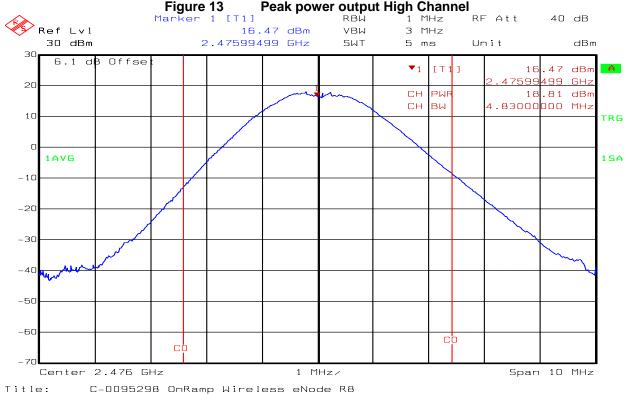

Comment A: High Channel, (2476 MHz) pwr#59, 100% Duty Cycle Date: 9.JUL.2010 11:08:55



APPENDIX E: POWER SPECTRAL DENSITY

E.1. Base Standard & Test Basis

Base Standard	FCC 15.247 (e) RSS 210 Issue 7 A8.2 (b)
Test Basis	FCC 15.247 as per ANSI C63.10 RSS 210 Issue 7 A8.2 (b)
Test Method	ANSI C63.10 and RSS 210 Issue 7 A8.2 (b)

E.2. Specifications

15.247 e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

E.3. Test Procedure

ANSI C63.10, 6.11,2,4

- a) Set RBW = 3 kHz b) Set VBW ≥ 9 kHz c) Set Sweep time to Automatic
- d) Use a peak detector. A sample detector mode can be used only if the following conditions can be achieved with automatic sweep time and adjusting the bin width.
- 1) Bin width (i.e., span/number of points in spectrum display) < 0.5 RBW.
- 2) The transmission pulse or sequence of pulses remains at maximum transmit power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps. e) Use a video trigger (or RF gating) with the trigger level set to enable the sweep only during full power pulses. Transmitter shall operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to free run. f) Trace average 100 traces in power averaging mode. Do not use video averaging mode.

E.4. Operating Mode During Test

The EUT was tuned to a low and middle channel in continuous transmit mode at maximum rated RF output power and 100% duty cycle. Power level setting was adjusted to # 59 for high channel measurement

E.5. Test Results

Compliant. The maximum measured power spectral density was -4.07 dBm as measured conducted at the RF connector

E.6. Test Data Summary

Channel	Frequency (MHz)	Power Spectral Density (dBm)	
Low	2402	-4.22	
Mid	2440	-4.07	
High	2476	-5.14	

All final reported values are corrected values

E.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.


Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist


E.8. Test date

July 9, 2010




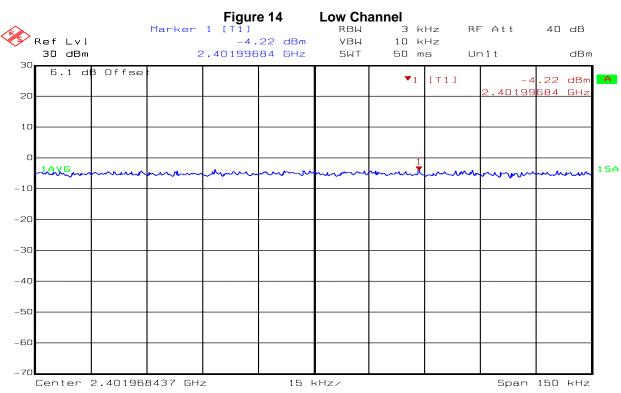

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Low Channel, (2402 MHz) Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 9:35:57

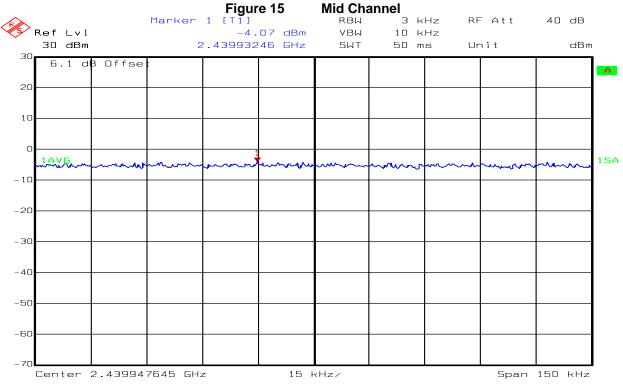

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Mid Channel, (2440 MHz)Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 12:23:27

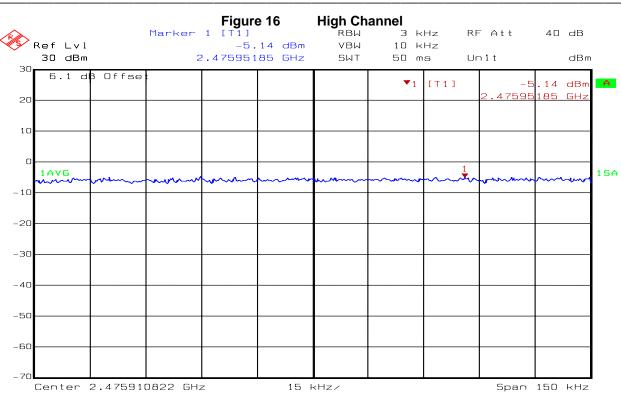

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: High Channel, (2476 MHz) pwr#59, 100% Duty Cycle
Date: 9.JUL.2010 11:16:20



APPENDIX F: CONDUCTED SPURIOUS EMISSIONS (TX)

F.1. Base Standard & Test Basis

Base Standards FCC CFR Title 47 – Telecommunications, Chapter I Part 15.247 (d) RSS-210 Issue 7 A8.5	
Test Basis RF conducted as per ANSI C63.10 RSS-210 Issue 7 A8.5	
Test Method RF conducted as per ANSI C63.10 RSS-210 Issue 7 A8.5	

F.2. Specifications

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

F.3. Test Procedure

ANSI C63.10

F.4. Operating Mode During Test

The EUT was tuned to a low, middle and high channel in continuous transmit mode at maximum rated RF output power with 100% duty cycle. Power level setting was adjusted to # 59 for high channel measurement

F.5. Test Results Summary

Compliant.

The worst case emission was 54.54 dB below the carrier power in low channel at 6.952 GHz All final reported values are corrected values

F.6. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist

F.7. Test date

July 9, 2010

-30

-40


-50

-60

Start 30 MHz




Stop 26 GHz

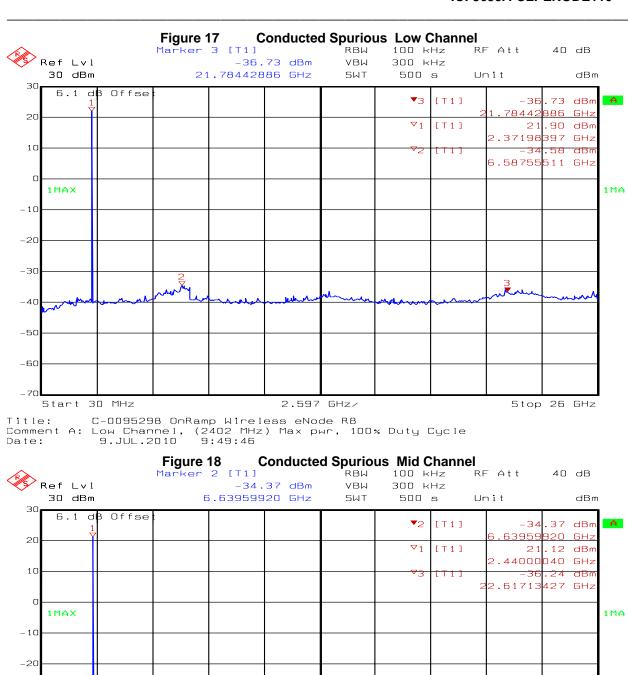

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Mid Channel, (2440 MHz)Max pwr, 100% Duty Cycle
Date: 9.JUL.2010 12:57:46



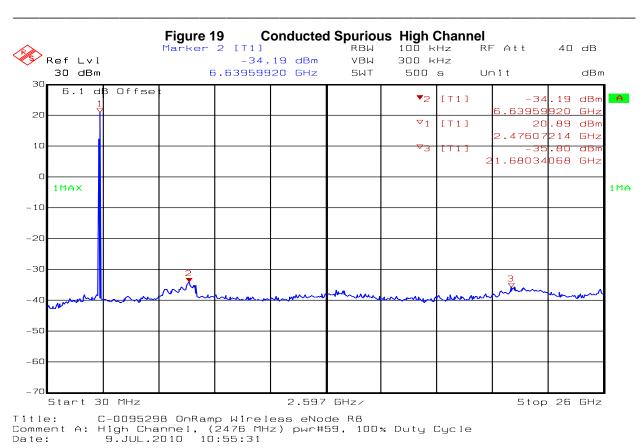

APPENDIX G: CONDUCTED SPURIOUS EMISSIONS BAND EDGE

G.1. Base Standard & Test Basis

Base Standards FCC CFR Title 47 – Telecommunications, Chapter I Part 15.247 (d) RSS-210 Issue 7 A8.5	
Test Basis RF conducted as per ANSI C63.10 RSS-210 Issue 7 A8.5	
Test Method RF conducted as per ANSI C63.10 RSS-210 Issue 7 A8.5	

G.2. Specifications

15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

G.3. Test Procedure

ANSI C63.10

G.4. Operating Mode During Test

The EUT was tuned to a low and high channel in continuous transmit mode at maximum rated RF output power and 100 % duty cycle. Power level setting was adjusted to # 59 for high channel measurement

G.5. Test Results

Compliant.

Channel	Frequency (MHz)	Conducted band edge (dB)	
Low	2401.99	33.45	
High	2487.73	59.97	

Worst case spurious emission was 33.45 dB below the carrier

All final reported values are corrected values

G.6. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist

G.7. Test date

July 9, 2010




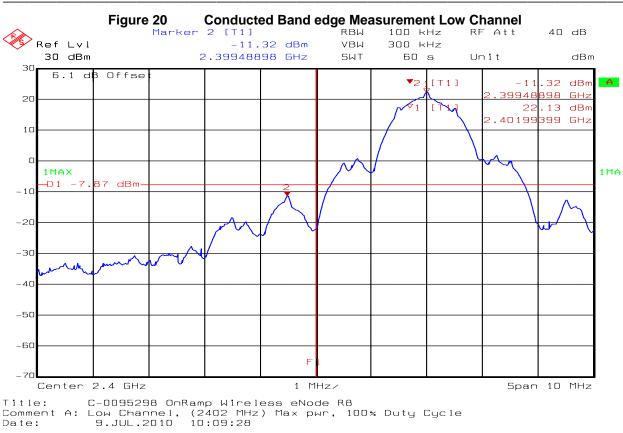


Figure 21 Conducted Band edge Measurement High Channel



Comment A: High Channel, (2476 MHz) pwr#59, 100% Duty Cycle Date: 9.JUL.2010 10:27:07

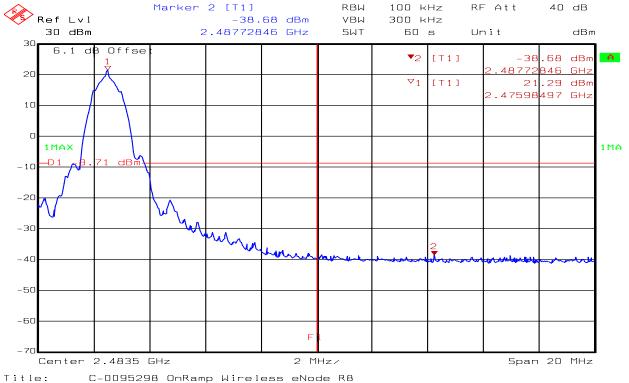

APPENDIX H: DUTY CYCLE

H.1. Base Standard & Test Basis

Base Standard FCC 15.35 (c) RSS-Gen Issue 2 4.5	
Test Basis FCC 15.35 (c) as per ANSI C63.10 RSS-Gen Issue 2 4.5	
Test Method	NTS Calgary SOP CAG EMC 02 Emission Test Methods and Zero span

H.2. Specifications

15.35 (c) Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

H.3. Deviations

Deviation	Deviation Time & Description and		Deviation Reference			
Number	Date	Justification of Deviation	Dase		NTS Procedure	Approval
			none			

H.4. Test Procedure

As per FCC 15.35 with spectrum analyzer in Zero span mode.

H.5. Operating Mode During Test

On-Ramp Wireless eNode normal operating mode with maximum duty cycle

H.6. Test Results

On time (2.10 second) is longer than 0.1 second Therefore the duty cycle correction factor does not apply

H.7. Tested By


This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci


Function: Senior EMC / Wireless Technologist

H.8. Test date

July 9, 2010

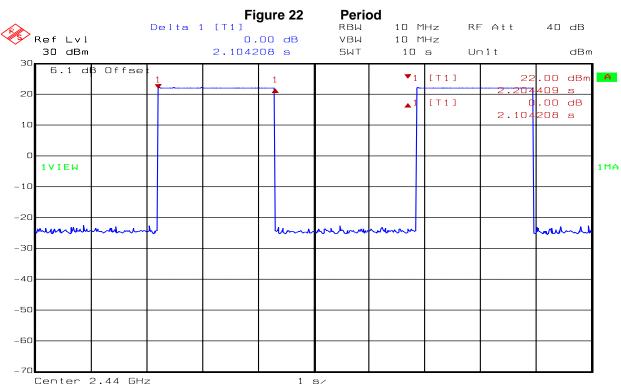

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Mid Channel, (2440 MHz) Maximum Duty Cycle
Date: 9.JUL.2010 14:10:04

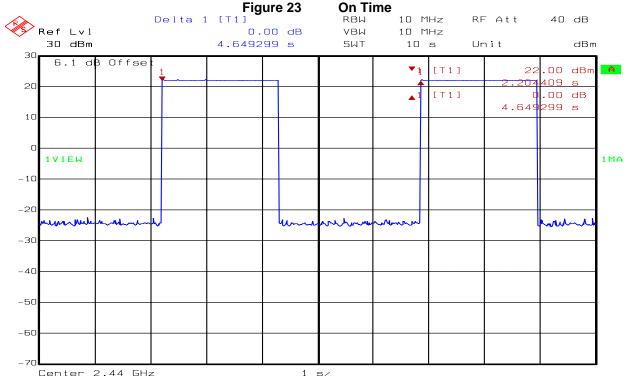

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Mid Channel, (2440 MHz) Maximum Duty Cycle
Date: 9.JUL.2010 14:09:09

APPENDIX I: RADIATED SPURIOUS EMISSIONS BAND EDGE

I.1. Base Standard & Test Basis

Base Standard	FCC CFR Title 47 – Telecommunications, Chapter I Part 15.209 – Radio Frequency Devices, Part 15.205 – Restricted bands of operation RSS 210 Issue 7 A8.5
Test Basis	ANSI C63.4-2003 Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz,
Test Method	NTS Radiated Emissions Test Method SOP-CAG-EMC-02 and ANSI C63.10

I.2. Specifications

FCC 15.205 and RSS 210 Issue 7 2.2 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090-0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725-4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362-8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625-8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	N/A
13.36–13.41	N/A	N/A	N/A

⁽b) The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.



I.3. Test Procedure

RF radiated measurement at 3 meters distance.

For measurements above 1 GHz, RBW = 1 MHz, VBW = 3 MHz were used for peak measurements, RBW = 1 MHz, VBW = 10 Hz were used for average measurements

I.4. Operating Mode During Test

The EUT was tested in three orthogonal orientations with three different antennas tuned to a low and high channel in continuous transmit mode at maximum rated RF output power with 100% duty cycle.

Power level setting was adjusted to # 59 for high channel measurements for all type of antennas.

I.5. Test Results

Compliant

Worst case emissions observed with the 5 dBi antenna when antenna and EUT was in horizontal orientation

Frequency (MHz)	Polarization	Measured level (dBµV/m)	Detector	Limit (dBµV/m)	Margin (dB)
2389.88	Horizontal	63.41	Peak	73.98	10.57
2376.14	Horizontal	48.99	Average	53.98	4.99
2483.50	Horizontal	69.65	Peak	73.98	4.33
2483.50	Horizontal	52.87	Average	53.98	1.11

All final reported values are corrected values. Worst case emissions presented.

I.6. Sample Calculations

Part 15.209 Average Limit: $500 \,\mu\text{V/m} \, @ \, 3\text{m} = 20^*\text{Log} \, (500) = 53.98 \, dB\mu\text{V/m}$, Peak limit = $73.98 \, dB\mu\text{V/m}$ Measured / Calculated level ($dB\mu\text{V/m}$) = Measured carrier level ($dB\mu\text{V/m}$) - Marker Delta ($dB\mu$)

I.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.


Name: Deniz Demirci

Function: Senior Wireless / EMC Technologist

I.8. Test date

Started: July 7, 2010 Completed: July 8, 2010

Span 30 MHz

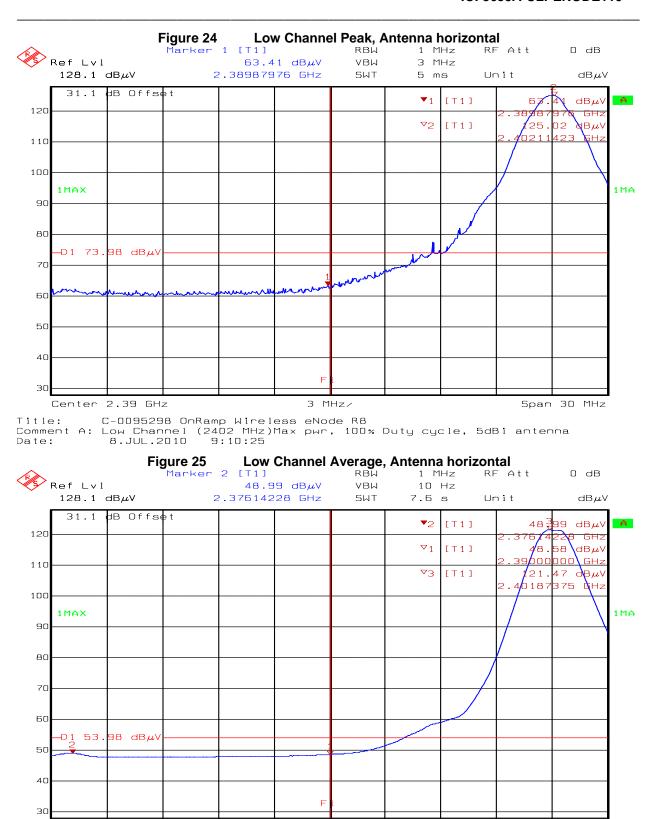


Title: C-0095298 OnRamp Wireless eNode R8
Comment A: Low Channel (2402 MHz)Max pwr, 100% Duty cycle, 5dBi antenna
Date: 8.JUL.2010 9:19:12


The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

Center 2.39 GHz



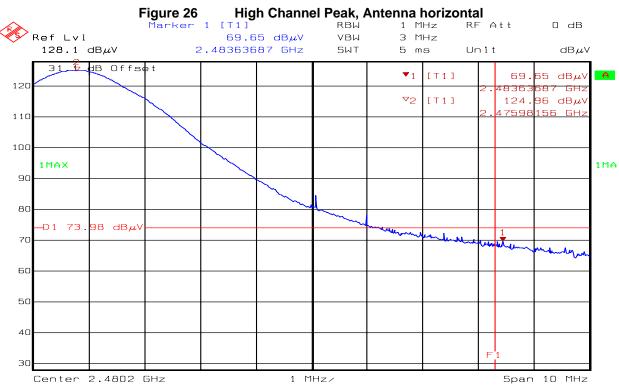

Title: C-0095298 OnRamp Wireless eNode R8
Comment A: High Channel (2476 MHz) pwr59 100% Duty Cyle, 5dBi antenna
Date: 7.JUL.2010 14:19:05

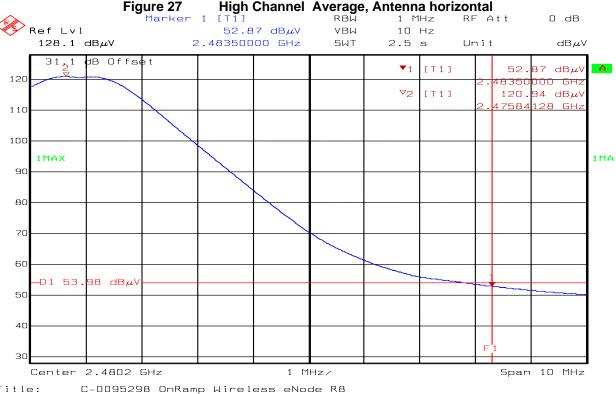

Date: 7.JUL.2010 14:20:49

APPENDIX J: RADIATED SPURIOUS EMISSIONS (TX AND RX)

J.1. Base Standard & Test Basis

Base Standard	FCC CFR Title 47 – Telecommunications, Chapter I Part 15.209 – Radio Frequency Devices, Part 15.205 – Restricted bands of operation RSS 210 Issue 7 2.6 and A8.5 RSS Gen Issue 2 4.10 and 7.2.3 Receiver Spurious Emission
Test Basis	ANSI C63.4-2003 Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, ANSI C63.10
Test Method	NTS Radiated Emissions Test Method SOP-CAG-EMC-02 and ANSI C63.10

J.2. Specifications

FCC 15.205 and RSS 210 Issue 7 2.2 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090-0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725-4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362-8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625-8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	N/A
13.36–13.41	N/A	N/A	N/A

(b) The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

J.3. Test Procedure

J.3.1 Tx Spurious measurements

RF radiated measurement at 3 meters distance.

For measurements above 1 GHz, RBW = 1 MHz, VBW = 3 MHz were used for peak measurements, RBW = 1 MHz, VBW = 10 Hz were used for average measurements

J.3.2 RSS Gen Issue 2, 4.10 Receiver Spurious Emission

The receiver shall be operated in the normal receive mode near the mid-point of the band over which the receiver is designed to operate.

Unless otherwise specified in the applicable RSS, the radiated emission measurement is the standard measurement method (with the device's antenna in place) to measure receiver spurious emissions.

Radiated emission measurements are to be performed using a calibrated open-area test site. As an alternative, the conducted measurement method may be used when the antenna is detachable. In such a case, the receiver spurious signal may be measured at the antenna port.

For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

For emissions below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector with the same measurement bandwidth as that for CISPR quasi-peak measurements. Above 1 GHz, measurements shall be performed using an average detector and a resolution bandwidth of 300 kHz to 1 MHz.

Spurious Emission Limits for Receivers

Opanioae Ennioae	The second secon
Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

J.4. Operating Mode During Test

The EUT was tested in three orthogonal orientations with three different antennas tuned to a low, mid and high channel in continuous transmit mode at maximum rated RF output power with 100% duty cycle Power level was adjusted to # 59 for high channel measurements for all type of antennas.

Worst case emissions below observed with the 5 dBi antenna

For Rx spurious emissions: The EUT was tuned to receive only mode in mid channel with three different antennas



J.5. Test Results

Pass, Worst case results reported

J.5.1 Rx mode

There were no measurable emissions observed in Rx mode.

Maximum measured peak noise floor was 43.55 dB μ V/m at 7395 MHz with RBW= 1 MHz, VBW= 3 MHz Which has 10.43 dB margin to the RSS Gen Issue 2, 4.10 Receiver Spurious Emission Average limit

J.5.2 TX Mode

Channel	Frequency (MHz)	Polarization	Detector	Measured level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Low	4803.96	Horizontal	Peak	49.33	73.98	24.65
	4804.01	Horizontal	Average	41.54	53.98	12.44
	4804.03	Vertical	Peak	48.44	73.98	25.54
	4803.98	Vertical	Average	41.01	53.98	12.97
Mid	4880.15	Horizontal	Peak	49.51	73.98	24.47
	4880.07	Horizontal	Average	42.66	53.98	11.32
	4879.57	Vertical	Peak	51.09	73.98	22.89
	4880.11	Vertical	Average	45.14	53.98	8.84
High	4952.07	Horizontal	Peak	51.31	73.98	22.67
	4952.07	Horizontal	Average	45.4	53.98	8.58
	4952.17	Vertical	Peak	52.04	73.98	21.94
	4952.07	Vertical	Average	46.46	53.98	7.52

Worst case spurious emissions were observed with 5 dBi antenna with antenna and EUT were in horizontal positions on the table

Worst case average spurious emission was 46.46 dB μ V/m at 4952.07 MHz vertical polarization in high channel. It has 7.52 dB margin to the average limit.

Note:

Plots were not provided in order to reduce file size

J.6. Sample Calculations

Average Limit for above 960 MHz = 500 μ V/m @ 3m = 20*Log (500) = 53.98 dB μ V/m Peak Limit for above 960 MHz = Average Limit + 20 (dB) = 73.98 dB μ V/m

J.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Lixin Wang Deniz Demirci

Function: EMC Technologist Senior Wireless / EMC Technologist

J.8. Test date

Started: July 6, 2010, Completed: July 8, 2010

APPENDIX K: TEST EQUIPMENT LIST

Туре	Manufacturer	Model	Asset #	Cal Due	Cal Date
Bilog Antenna	Teseq	CBL 6112B	CG0314	21SEP10	29OCT08
Horn Antenna (Rx) 1 GHz – 18 GHz	EMCO	3115	CG0368	08SEP11	08SEP09
Horn Antenna (Rx) 1 GHz – 18 GHz	EMCO	3115	CG0103	06MAR11	30SEP08
Standard Gain Horn (Rx) 18 GHz – 26.5 GHz	EMCO	3160-09	CG0075	N/A (1)	27NOV01
Standard Gain Horn (Rx) 18 GHz – 26.5 GHz	EMCO	3160-09	CG0075	N/A (1)	27NOV01
LNA 1 GHz < f < 18 GHz	Miteq	JSD00121	CG0761	13NOV11	13NOV09
LNA 18GHz < f < 26.5GHz	Miteq	JSD00119	CG0482	02OCT11	02OCT09
High pass filter f > 1000 MHz	MicroTronics	HPM14576	CG0963	13NOV11	13NOV09
High pass filter f > 2800 MHz	MicroTronics	HPM50111	CG0964	N/A	N/A
Spectrum Analyzer 9 kHz – 40 GHz	Rohde & Schwarz	FSEK-20	CG0118	06AUG10	06AUG09
Test Receiver	Rohde & Schwarz	ESMI	CG0123 CG0434	04MAY11	04MAY09
Table Top LISN	EMCO	3825	CG0367	29JAN11	29JAN09
HPIB Extender	HP	37204	CG0181	N/A	N/A
Mast Controller	EMCO	2090	CG0179	N/A	N/A
Turntable Controller	EMCO	2090	CG0178	N/A	N/A

^{(1):} As per manufacturer recommend, this item does not require periodic calibration. Its electromagnetic performance is almost exclusively depended on the physical dimension of the horn. A thorough mechanical check is all that is needed to guarantee the antenna performance.

END OF DOCUMENT