


SK TECH CO., LTD.

Page 1 of 23

TEST REPORT

| | | | |
|------------------------------|---|-------------------------|------------------------|
| Test Report No.: | SKTRFC-101118-013 | | |
| Applicant: | TIT ENG Co.,Ltd. | | |
| Applicant Address: | 7 Floor, Shin-do B/D. 10, Garak-dong, Songpa-Gu, Seoul, 138-160 South Korea | | |
| Manufacturer: | TIT ENG Co.,Ltd. | | |
| Manufacturer Address: | 7 Floor, Shin-do B/D. 10, Garak-dong, Songpa-Gu, Seoul, 138-160 South Korea | | |
| Equipment Under Test: | ID Card Printer | | |
| FCC ID: | XTNTP9000 | Model No.: | TP-9000, Javelin J200i |
| Brand/Trade Name: | ID Card Printer | | |
| Receipt No.: | SKTEU10-1150 | Date of receipt: | October 21, 2010 |
| Date of Issue: | November 15, 2010 | | |
| Location of Testing: | SK TECH CO., LTD. #820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea | | |
| Test Procedure: | ANSI C63.4-2003 | | |
| Test Specification: | 47CFR, Part 15 Rules | | |
| Equipment Class: | DXX - Part 15 Low Power Communication Device Transmitter | | |
| Test Result: | The above-mentioned device has been tested and passed. | | |

Tested & Reported by: Jungtae Kim

Approved by: Jongsoo Yoon

November 18, 2010

Signature

November 18, 2010

Signature

Date

| | |
|-----------------------|--|
| Other Aspects: | - |
| Abbreviations: | · OK, Pass = passed · Fail = failed · N/A = not applicable |



- This test report is not permitted to copy partly and entirely without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of submitted samples of the above mentioned.



>> CONTENTS <<

| | |
|---|----|
| 1. GENERAL | 3 |
| 2. TEST SITE | 3 |
| 2.1 Location | 3 |
| 2.2 List of Test and Measurement Instruments | 4 |
| 2.3 Test Date | 4 |
| 2.4 Test Environment | 4 |
| 3. DESCRIPTION OF The EQUIPMENT UNDER TEST | 5 |
| 3.1 Rating and Physical Characteristics | 5 |
| 3.2 Submitted Documents | 5 |
| 3.3 Equipment Modifications | 5 |
| 4. MEASUREMENT CONDITIONS | 6 |
| 4.1 Description of test configuration | 6 |
| 4.2 List of Peripherals | 6 |
| 4.3 Type of Used Cables | 6 |
| 4.4 Uncertainty | 6 |
| 5. TEST AND MEASUREMENTS | 7 |
| 5.1 ANTENNA REQUIREMENT | 7 |
| 5.1.1 Regulation | 7 |
| 5.1.2 Result | 7 |
| 5.2 RADIATED EMISSIONS | 8 |
| 5.2.1 Regulation | 8 |
| 5.2.2 Measurement Procedure | 9 |
| 5.2.3 Calculation of the filed strength limits below 30 MHz | 10 |
| 5.2.4 Test Results | 11 |
| Table 1: Field strength below 30 MHz | 11 |
| Table 2: Field strength above 30 MHz | 12 |
| Figure 1: Plot of the Band edge | 13 |
| Figure 2: Plot of the 20 dB bandwidth | 14 |
| 5.3 FREQUENCY TOLERANCE OF CARRIER SIGNAL | 15 |
| 5.3.1 Regulation | 15 |
| 5.3.2 Measurement Procedure | 15 |
| 5.3.3 Test Results | 16 |
| Table 3: Frequency Tolerance | 16 |
| 5.4 AC POWER LINE CONDUCTED EMISSIONS | 18 |
| 5.4.1 Regulation | 18 |
| 5.4.2 Measurement Procedure | 18 |
| 5.4.3 Test Results | 19 |
| Table 4: Measured Values of the Conducted Emissions | 19 |
| Figure 3: Plot of the Conducted Emissions | 21 |



1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4-2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.225. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

SK TECH Co., Ltd.

2.1 Location

#820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea

(FCC Registered Test Site Number: 90752)

(OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 5429A)

This laboratory is recognized as a Conformity Assessment Body (CAB) for CAB's Designation Number: KR0007 by FCC, is accredited by NVLAP for NVLAP Lab. Code: 200220-0.



2.2 List of Test and Measurement Instruments

| No. | Description | Manufacturer | Model No. | Serial No. | Calibrated until | Used |
|-----|--------------------------------------|---------------|---------------|-------------|------------------|-------------------------------------|
| 1 | Spectrum Analyzer | Agilent | E4405B | US40520856 | 2011.05 | |
| 2 | Spectrum Analyzer | Agilent | E4440A | MY46186322 | 2011.05 | <input checked="" type="checkbox"/> |
| 3 | EMC Spectrum Analyzer | Agilent | E7405A | US40240203 | 2011.03 | <input checked="" type="checkbox"/> |
| 4 | EMI Test Receiver | Rohde&Schwarz | ESIB40 | 100277 | 2011.03 | <input checked="" type="checkbox"/> |
| 5 | EMI Test Receiver | Rohde&Schwarz | ESHS10 | 862970/019 | 2011.07 | <input checked="" type="checkbox"/> |
| 6 | Artificial Mains Network | Rohde&Schwarz | ESH3-Z5 | 836679/018 | 2011.07 | <input checked="" type="checkbox"/> |
| 7 | Pre-amplifier | HP | 8447F | 3113A05153 | 2011.07 | <input checked="" type="checkbox"/> |
| 8 | Pre-amplifier | MITEQ | AFS44 | 1116321 | 2010.12 | |
| 9 | Pre-amplifier | MITEQ | AFS44 | 1116322 | 2011.07 | |
| 10 | Power Meter | Agilent | E4417A | MY45100426 | 2011.07 | |
| 11 | Power Meter | Agilent | E4418B | US39402176 | 2011.07 | |
| 12 | Power Sensor | Agilent | E9327A | MY44420696 | 2011.07 | |
| 13 | Power Sensor | Agilent | 8482A | MY41094094 | 2011.07 | |
| 14 | Attenuator (10dB) | HP | 8491B | 38067 | 2011.07 | |
| 15 | Attenuator (20dB) | Weinschel | 44 | AH6967 | 2011.07 | |
| 16 | High Pass Filter | Wainwright | WHKX3.0/18G | 8 | 2011.07 | |
| 17 | VHF Precision Dipole Antenna (TX/RX) | Schwarzbeck | VHAP | 1014 / 1015 | 2011.05 | |
| 18 | UHF Precision Dipole Antenna (TX/RX) | Schwarzbeck | UHAP | 989 / 990 | 2011.05 | |
| 19 | Loop Antenna | Schwarzbeck | HFH2-Z2 | 863048/019 | 2011.11 | <input checked="" type="checkbox"/> |
| 20 | TRILOG Broadband Antenna | Schwarzbeck | VULB9168 | 230 | 2011.07 | <input checked="" type="checkbox"/> |
| 21 | TRILOG Broadband Antenna | Schwarzbeck | VULB9168 | 189 | 2011.05 | |
| 22 | Horn Antenna | AH Systems | SAS-200/571 | 304 | N/A | |
| 23 | Horn Antenna | EMCO | 3115 | 00040723 | 2011.04 | |
| 24 | Horn Antenna | EMCO | 3115 | 00056768 | 2010.09 | |
| 25 | Horn Antenna | Schwarzbeck | BBHA9170 | BBHA9170318 | 2013.09 | |
| 26 | Vector Signal Generator | Agilent | E4438C | MY42080359 | 2011.08 | |
| 27 | PSG analog signal generator | Agilent | E8257D-520 | MY45141255 | 2011.07 | |
| 28 | DC Power Supply | HP | 6633A | 3448A032223 | 2011.08 | |
| 29 | DC Power Supply | HP | 6268B | 2542A-07856 | 2011.07 | |
| 30 | Temperature/Humidity Chamber | All Three | ATM-50M | 20030425 | 2011.03 | <input checked="" type="checkbox"/> |
| 31 | Hygro/Thermo Graph | SATO | PC-5000TRH-II | - | 2011.07 | <input checked="" type="checkbox"/> |

2.3 Test Date

Date of Test: November 5, 2010 ~ November 10, 2010

2.4 Test Environment

See each test item's description.



3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

| | | |
|--|--|--|
| Power source | External AC/DC adaptor | |
| Local Oscillator or X-Tal | X-Tal: (Main board) 16 MHz, 6 MHz (Card RFID board) 13.56 MHz (Ribbon RFID board) 13.56 MHz, 8 MHz (SAM board) 22.1184 MHz, 4 MHz, (Ethernet board) 25 MHz | |
| Tx Frequency | 13.56 MHz (two RFID boards) | |
| Antenna Type* | Card RFID board - External PCB antenna (65 × 34 mm, 3-turns) - Internal PCB antenna (70 × 34 mm, 3-turns) | Ribbon RFID board -Internal PCB antenna (51 × 25 mm, 10-turns) |
| Type of Modulation | ASK | |
| RJ-45 RS-232 USB External Ports** | <ul style="list-style-type: none"> - Ethernet interface - Serial port - USB interface - from the AC/DC Adaptor <p>Manufacturer: NingBo ISO Electronic Co., Ltd. Model Name: KPA-060M Input: AC 100 – 240 V, 50/60 Hz, 1.7 A Output: DC 24 V, 2.5 A</p> | |

*: Two RFID boards cannot be operated simultaneously and RF signals cannot be radiated simultaneously from the each antenna.

**: The test report for compliance with FCC Part 15B as a digital device was made under DoC process with a separate report.

3.2 Equipment Modifications

None

3.3 Submitted Documents

Block diagram

Schematic diagram

Part List


User manual



4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in transmitting RF signals continuously.

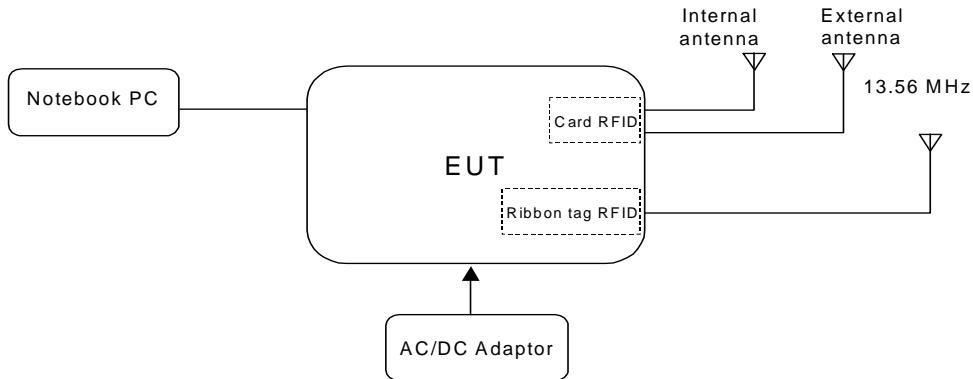

[System Block Diagram of Test Configuration]

Test software used: (for Card RFID)TP9XDII_TEST.exe, Ver1.0.2.6 / (for Ribbon tag RFID) RFCheck.exe, Ver1.0.0.2

4.2 List of Peripherals

| Equipment Type | Manufacturer | Model | S/N |
|------------------------------|---------------------------------|------------|--------------------------|
| Notebook PC | DELL | INSPIRON | 14791079949 |
| Adaptor (for Notebook PC) | DELL | LA65NS0-00 | CN-0MG532-70166-6BT-004G |
| AC/DC Adaptor | NingBo ISO Electronic Co., Ltd. | KPA-060M | 1001324 |

4.3 Type of Used Cables

| # | START | | END | | CABLE | |
|---|---------------|----------|---------------|-----------|-----------|----------------------|
| | NAME | I/O PORT | NAME | I/O PORT | LENGTH(m) | SHIELDED |
| 1 | EUT | USB | Notebook PC | USB | 2.9 | NO |
| 2 | EUT | DC IN | AC/DC Adaptor | DC OUT | 0.8 | NO (Ferrite core) |
| 3 | AC/DC Adaptor | AC IN | AC mains | AC mains | 1.4 | NO |
| 4 | Notebook PC | DC Input | Adaptor | DC Output | 2.0 | NO |
| 5 | Adaptor | AC Input | AC mains | - | 0.8 | NO |

4.4 Uncertainty

| Measurement Item | Combined Standard Uncertainty U_c | Expanded Uncertainty $U = k \times U_c (k = 1.96)$ |
|-----------------------|--|---|
| Radiated disturbance | ± 2.30 dB | ± 4.51 dB |
| Conducted disturbance | ± 1.96 dB | ± 3.84 dB |



5. TEST AND MEASUREMENTS

Summary of Test Results

| Requirement | FCC, 47CFR15 | Report Section | Test Result |
|---|------------------------|----------------|-------------|
| Antenna Requirement | 15.203 | 5.1 | PASS |
| Radiated Emissions Field Strength within the band 13.553-13.567 MHz | 15.225(a) | 5.2 | PASS |
| Field Strength within the bands 13.410-13.553 MHz and 13.567-13.710 MHz 13.110-13.410 MHz and 13.710-14.010 MHz | 15.225(b) & (c) | 5.2 | PASS |
| Radiated Harmonics and Spurious Emissions Outside of the 13.110 – 14.010 MHz | 15.225(d) 15.209(a) | 5.2 | PASS |
| Frequency Tolerance of Carrier Signal | 15.225(e) | 5.3 | PASS |
| AC Power Line Conducted Emissions | 15.207(a) | 5.4 | PASS |

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.1.2 Result:

PASS

The EUT has three integral PCB loop antennas, and meets the requirements of this section.



5.2 RADIATED EMISSIONS

5.2.1 Regulation

FCC 47CFR15 – 15.225

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

| Frequency (MHz) | Field strength limit (μ V/m) @ 30 m | Field strength limit ($\text{dB}\mu$ V/m) @ 30 m | Field strength limit ($\text{dB}\mu$ V/m) @ 3 m |
|-----------------|--|---|--|
| 13.110 – 13.410 | 106 | 40.5 | 80.5 |
| 13.410 – 13.553 | 334 | 50.5 | 90.5 |
| 13.553 – 13.567 | 15,848 | 84.0 | 124.0 |
| 13.567 – 13.710 | 334 | 50.5 | 90.5 |
| 13.710 – 14.010 | 106 | 40.5 | 80.5 |

FCC 47CFR15 – 15.209

- (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength limit (μ V/m) | Field strength limit ($\text{dB}\mu$ V/m) | Measurement Distance (m) |
|-----------------|-----------------------------------|--|--------------------------|
| 0.009 – 0.490 | $2400/F$ (kHz) = 266.7 – 4.9 | 48.5 – 13.8 | 300 |
| 0.490 – 1.705 | $24000/F$ (kHz) = 49.0 – 14.1 | 33.8 – 23.0 | 30 |
| 1.705 – 30.0 | 30 | 29.5 | 30 |
| 30 – 88 | 100 | 40.0 | 3 |
| 88 – 216 | 150 | 43.5 | 3 |
| 216 – 960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

* The lower limit shall apply at the transition frequencies.



5.2.2 Measurement Procedure

Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 1 meter or 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

Radiated Emissions Test, above 30 MHz

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the TRILOG broadband antenna and from 1000 MHz to 18000 MHz or to tenth harmonic of the highest fundamental frequency, whichever is higher, using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.



5.2.3 Calculation of the field strength limits below 30 MHz

1. No special calculation for obtaining the field strength in dB μ V/m is necessary, because the EMI receiver and the active loop antenna operate as a system, where the reading gives directly the field strength result (dB μ V/m). The antenna factors and cable losses are already taken into consideration.
2. For test distance other than what is specified, but fulfilling the requirements of section 15.31 (f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40dB/decade (inverse linear distance for field strength measurements).
3. All following emission measurements were performed using the test receiver's average, peak, and quasi-peak detector function with specified bandwidth.
4. The basic equation is as follows;

$$FS = RA + DF$$

Where

FS = Field strength in dB μ V/m

RA = Receiver Amplitude in dB μ V/m

DF = Distance Extrapolation Factor in dB

Where $DF = 40\log(D_{TEST} / D_{SPEC})$ where D_{TEST} = Test Distance and D_{SPEC} = Specified Distance

$DF = 40\log(3m/300m) = -80\text{dB}$, for frequency band: 0.009 to 0.490MHz

$DF = 40\log(3m/30m) = -40\text{dB}$, for frequency band: 0.490 to 30MHz


SK TECH CO., LTD.

Page 11 of 23

5.2.4 Test Results:
PASS
Table 1: Field strength below 30 MHz

| Frequency [MHz] | RBW [kHz] | Reading [dB(μ V/m)] | Cable Loss [dB] | Actual [dB(μ V/m)] | Limit (at 3m) [dB(μ V/m)] | Margin [dB] |
|--|--------------|-----------------------------|--------------------|----------------------------|-----------------------------------|----------------|
| Emissions Quasi-peak DATA under 15.225(a), (b)&(c) (Card RFID - External antenna) | | | | | | |
| 13.556 | 9 | 63.72 | 0.3 | 64.02 | 124.0 | 59.98 |
| 13.662 | 9 | 47.67 | 0.3 | 47.97 | 90.5 | 42.53 |
| 13.451 | 9 | 47.55 | 0.3 | 47.85 | 90.5 | 42.65 |
| 13.345 | 9 | 44.86 | 0.3 | 45.16 | 80.5 | 35.34 |
| 13.772 | 9 | 44.70 | 0.3 | 45.00 | 80.5 | 35.50 |
| | | | | | | |
| | | | | | | |
| Emissions Quasi-peak DATA under 15.225(a), (b)&(c) (Card RFID - Internal antenna) | | | | | | |
| 13.565 | 9 | 55.76 | 0.3 | 56.06 | 124.0 | 67.94 |
| | | | | | | |
| | | | | | | |
| Emissions Quasi-peak DATA under 15.225(a), (b)&(c) (Ribbon RFID) | | | | | | |
| 13.565 | 9 | 56.89 | 0.3 | 57.19 | 124.0 | 66.81 |
| 13.673 | 9 | 40.02 | 0.3 | 40.32 | 90.5 | 50.18 |
| 13.456 | 9 | 38.47 | 0.3 | 38.77 | 90.5 | 51.73 |
| 13.355 | 9 | 36.51 | 0.3 | 36.81 | 80.5 | 43.69 |
| 13.776 | 9 | 37.61 | 0.3 | 37.91 | 80.5 | 42.59 |
| | | | | | | |
| | | | | | | |
| Emissions Quasi-peak DATA under 15.225(d), 15.209 (Card RFID - External antenna, Card RFID - Internal antenna, Ribbon RFID) | | | | | | |
| 27.121 | 9 | --- | 0.3 | --- | 69.5 | --- |
| | | | | | | |
| | | | | | | |

Actual (dB μ V/m) = Reading + Cable Loss
Margin (dB) = Limit – Actual

NOTE: These test results were measured at the 3 m distance.

Remark: "---" means the emission level was too low to be measured or in the noise floor.



SK TECH CO., LTD.

Page 12 of 23

Table 2: Measured values of the Field strength (above 30 MHz)
(Card RFID-External antenna, Card RFID-Internal antenna, Ribbon RFID)

| Frequency [MHz] | RBW [kHz] | POL [V/H] | ANT [m] | Reading [dB μ V] | AMP [dB] | AF [dB/m] | CL [dB] | Actual [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|--------------------|--------------|--------------|------------|-------------------------|-------------|--------------|------------|--------------------------|-------------------------|----------------|
| 176.50 | 120 | H | 1.90 | 41.55 | 28.37 | 23.83 | 3.04 | 40.05 | 46.00 | 5.95 |
| 176.50 | 120 | V | 1.05 | 42.96 | 28.37 | 23.83 | 3.04 | 41.46 | 46.00 | 4.54 |
| 593.95 | 120 | H | 1.10 | 44.97 | 28.90 | 20.96 | 2.43 | 39.46 | 46.00 | 6.54 |
| 593.95 | 120 | V | 1.00 | 40.55 | 28.90 | 20.96 | 2.43 | 35.04 | 46.00 | 10.96 |
| 726.00 | 120 | H | 1.73 | 46.72 | 28.72 | 22.08 | 2.73 | 42.81 | 46.00 | 3.19** |
| 726.00 | 120 | V | 1.00 | 41.87 | 28.72 | 22.08 | 2.73 | 37.96 | 46.00 | 8.04 |
| 791.94 | 120 | H | 1.26 | 45.62 | 28.90 | 17.74 | 2.41 | 36.87 | 46.00 | 9.13 |
| 791.94 | 120 | V | 1.00 | 45.77 | 28.90 | 17.74 | 2.41 | 37.02 | 46.00 | 8.98 |
| 924.03 | 120 | H | 1.88 | 50.83 | 27.89 | 11.88 | 1.30 | 36.12 | 43.50 | 7.38 |
| 924.03 | 120 | V | 1.00 | 49.21 | 27.89 | 11.88 | 1.30 | 34.50 | 43.50 | 9.00 |

Margin (dB) = Limit – Actual**[Actual = Reading + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

NOTE: 1. All emissions not reported were more than 20 dB below the specified limit or in the noise floor.


2. These test results measured at the 3 m distance.

*** The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.*




Figure 1. Plot of the Band edge (Preliminary measurement in the anechoic chamber at 3 m distance to find out the frequencies, at which the spurious emissions occur, with the peak detector function)


Card RFID
External antenna

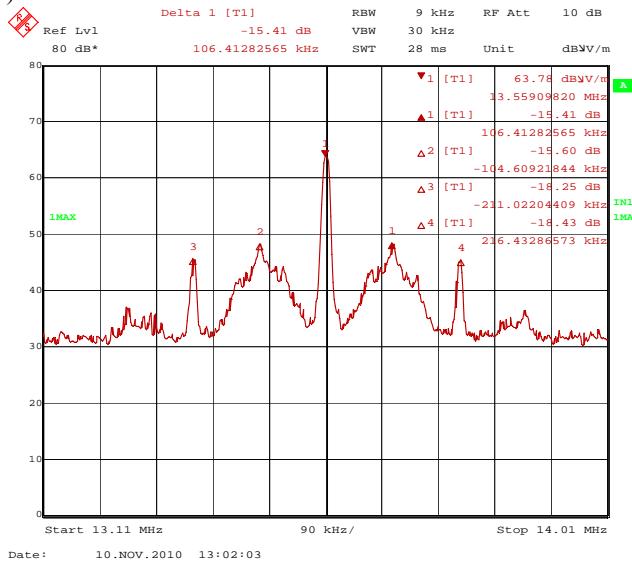

Card RFID
Internal antenna

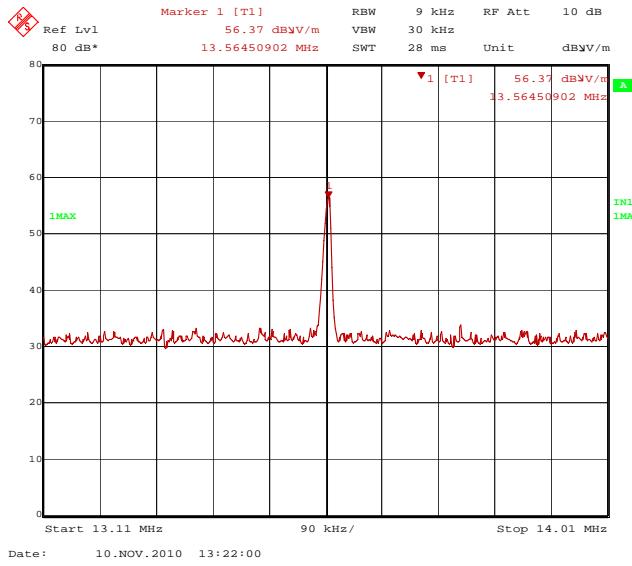

Ribbon RFID

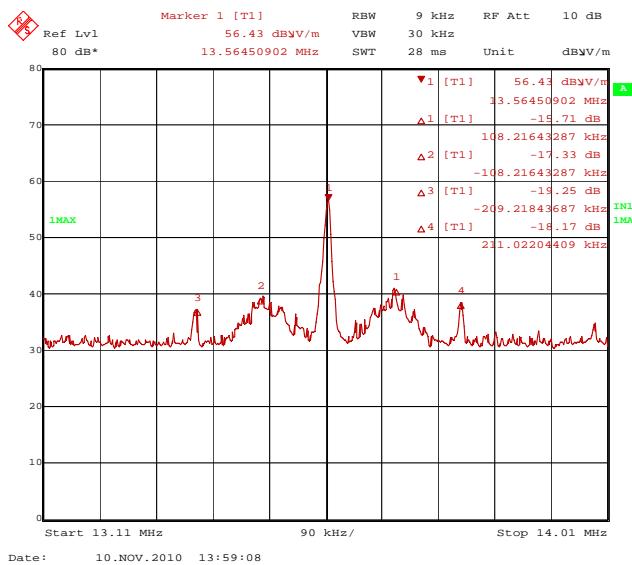




SK TECH CO., LTD.


Page 14 of 23

Figure 2. Plot of the 20 dB bandwidth


Card RFID
External antenna

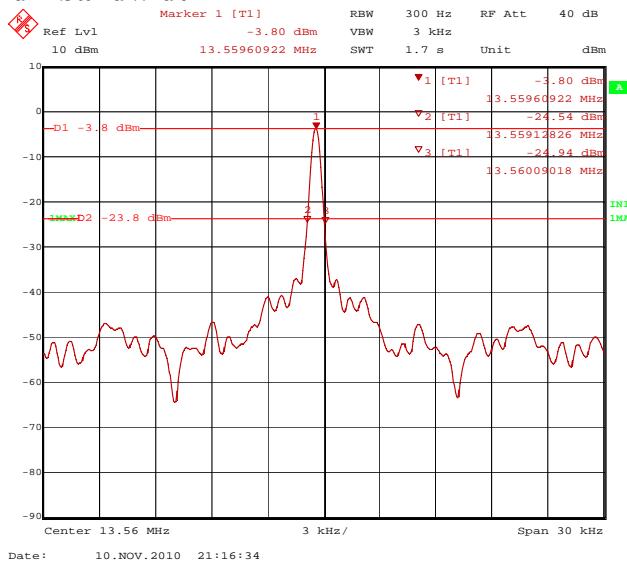

Card RFID
Internal antenna

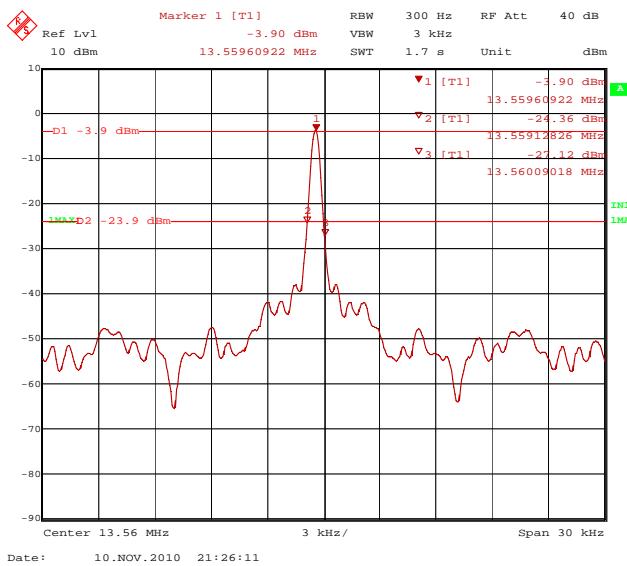

Ribbon RFID

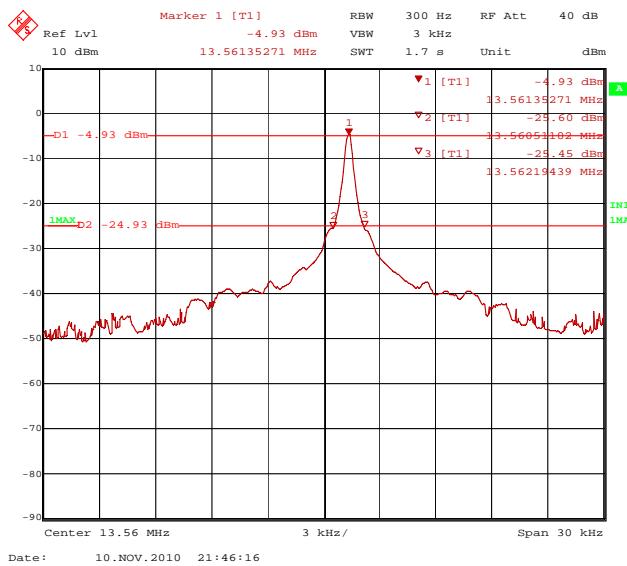



5.3 FREQUENCY TOLERANCE OF CARRIER SIGNAL

5.3.1 Regulation

FCC 47CFR15 – 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

5.3.2 Measurement Procedure

Frequency stability versus environmental temperature

1. Supply the EUT with nominal AC voltage.
2. Turn the EUT off, and place it inside an environmental temperature chamber. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber.
3. RF output was connected to a frequency counter or other frequency-measuring instrument via feed through attenuators.
4. Set the temperature control on the chamber to the highest specified EUT operating temperature, and allow the temperature inside the chamber to stabilize at the set temperature before starting frequency measurements.
5. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup and two, five, and ten minutes after the EUT is energized.
6. After all measurements have been made at the highest specified temperature turn the EUT off.
7. Repeat the above measurement process for the EUT with the test chamber set at the appropriate temperature.

Frequency Stability versus Input Voltage

1. At room temperature (20 ± 5) °C supply the EUT with nominal AC voltage.
2. Couple RF output to a frequency counter or other frequency-measuring instrument.
3. Turn the EUT on, and measure the EUT operating frequency at startup and two, five, and ten minutes after startup.
4. Supply it with 85 % of the nominal AC voltage and repeat the above procedure.
5. Supply it with 115 % of the nominal AC voltage and repeat the above procedure.


SK TECH CO., LTD.

Page 16 of 23

5.3.3 Test Results:
PASS
Table 3: Frequency Tolerance

| Environment Temperature [°C] | Power Supplied [V _{AC}] | Carrier Frequency Measured with Time Elapsed | | | | | | | |
|---|--------------------------------------|--|----------|-----------|----------|-----------|----------|------------|----------|
| | | STARUP | | 2 minutes | | 5 minutes | | 10 minutes | |
| | | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1 356 Hz (Card RFID - External antenna) | | | | | | | | | |
| +50 | 120 | 13.559209 | -791 | 13.559208 | -792 | 13.559202 | -798 | 13.559199 | -801 |
| +40 | 120 | 13.559243 | -757 | 13.559235 | -765 | 13.559227 | -773 | 13.559221 | -779 |
| +30 | 120 | 13.559272 | -728 | 13.559268 | -732 | 13.559262 | -738 | 13.559256 | -744 |
| +20 | 120 | 13.559360 | -640 | 13.559353 | -647 | 13.559351 | -649 | 13.559347 | -653 |
| +10 | 120 | 13.559340 | -660 | 13.559342 | -658 | 13.559344 | -656 | 13.559346 | -654 |
| 0 | 120 | 13.559346 | -654 | 13.559328 | -672 | 13.559316 | -684 | 13.559308 | -692 |
| -10 | 120 | 13.559443 | -557 | 13.559451 | -549 | 13.559462 | -538 | 13.559471 | -529 |
| -20 | 120 | 13.559487 | -513 | 13.559499 | -501 | 13.559511 | -489 | 13.559526 | -474 |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1 356 Hz (Card RFID - Internal antenna) | | | | | | | | | |
| +50 | 120 | 13.559256 | -744 | 13.559241 | -759 | 13.559228 | -772 | 13.559219 | -781 |
| +40 | 120 | 13.559288 | -712 | 13.559269 | -731 | 13.559253 | -747 | 13.559245 | -755 |
| +30 | 120 | 13.559321 | -679 | 13.559297 | -703 | 13.559278 | -722 | 13.559263 | -737 |
| +20 | 120 | 13.559377 | -623 | 13.559363 | -637 | 13.559341 | -659 | 13.559339 | -661 |
| +10 | 120 | 13.559359 | -641 | 13.559355 | -645 | 13.559350 | -650 | 13.559350 | -650 |
| 0 | 120 | 13.559321 | -679 | 13.559317 | -683 | 13.559313 | -687 | 13.559308 | -692 |
| -10 | 120 | 13.559412 | -588 | 13.559414 | -586 | 13.559444 | -556 | 13.559457 | -543 |
| -20 | 120 | 13.559476 | -524 | 13.559484 | -516 | 13.559499 | -501 | 13.559507 | -493 |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1 356 Hz (Ribbon RFID) | | | | | | | | | |
| +50 | 120 | 13.561214 | 1214 | 13.561245 | 1245 | 13.561281 | 1281 | 13.561297 | 1297 |
| +40 | 120 | 13.561162 | 1162 | 13.561186 | 1186 | 13.561212 | 1212 | 13.561232 | 1232 |
| +30 | 120 | 13.561117 | 1117 | 13.561143 | 1143 | 13.561161 | 1161 | 13.561171 | 1171 |
| +20 | 120 | 13.561067 | 1067 | 13.561113 | 1113 | 13.561117 | 1117 | 13.561119 | 1119 |
| +10 | 120 | 13.561102 | 1102 | 13.561101 | 1101 | 13.561099 | 1099 | 13.561096 | 1096 |
| 0 | 120 | 13.561093 | 1093 | 13.561108 | 1108 | 13.561114 | 1114 | 13.561123 | 1123 |
| -10 | 120 | 13.561078 | 1078 | 13.561075 | 1075 | 13.561051 | 1051 | 13.561060 | 1060 |
| -20 | 120 | 13.560950 | 950 | 13.560933 | 933 | 13.560907 | 907 | 13.560894 | 894 |

Err [Hz] = Measured carrier frequency (MHz) - Reference Frequency (13.56 MHz)


SK TECH CO., LTD.

Page 17 of 23

Table 3: Frequency Tolerance

| Power Supplied [V _{AC}] | Carrier Frequency Measured with Time Elapsed | | | | | | | |
|--|--|----------|-----------|----------|-----------|----------|------------|----------|
| | STARUP | | 2 minutes | | 5 minutes | | 10 minutes | |
| | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] | [MHZ] | Err [Hz] |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1.356 Hz (Card RFID - External antenna) | | | | | | | | |
| 85 % | 13.559369 | -631 | 13.559362 | -638 | 13.559363 | -637 | 13.559347 | -653 |
| 100 % | 13.559360 | -640 | 13.559353 | -647 | 13.559351 | -649 | 13.559347 | -653 |
| 115 % | 13.559378 | -622 | 13.559370 | -630 | 13.559368 | -632 | 13.559353 | -647 |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1.356 Hz (Card RFID - Internal antenna) | | | | | | | | |
| 85 % | 13.559377 | -623 | 13.559346 | -654 | 13.559338 | -662 | 13.559318 | -682 |
| 100 % | 13.559377 | -623 | 13.559363 | -637 | 13.559341 | -659 | 13.559339 | -661 |
| 115 % | 13.559376 | -624 | 13.559352 | -648 | 13.559339 | -661 | 13.559319 | -681 |
| Reference Frequency: 13.5600MHz, LIMIT: within ± 1.356 Hz (Ribbon RFID) | | | | | | | | |
| 85 % | 13.561078 | 1078 | 13.561103 | 1103 | 13.561107 | 1107 | 13.561123 | 1123 |
| 100 % | 13.561067 | 1067 | 13.561113 | 1113 | 13.561117 | 1117 | 13.561119 | 1119 |
| 115 % | 13.561063 | 1063 | 13.561107 | 1107 | 13.561110 | 1110 | 13.561125 | 1125 |

Err [Hz] = Measured carrier frequency (MHz) - Reference Frequency (13.56 MHz)



5.4 AC POWER LINE CONDUCTED EMISSIONS

5.4.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a $50\mu\text{H}/50\Omega$ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB μV) | |
|-----------------------------|-------------------------------------|------------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

5.4.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a $50\Omega/50\mu\text{H}$ LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.


SK TECH CO., LTD.

Page 19 of 23

5.4.3 Test Results:
PASS
Table 4: Measured values of the Conducted Emissions

| Frequency [MHz] | Reading [dB μ V] | L / N | CF [dB] | CL [dB] | Actual [dB μ V] | Limit [dB μ V] | Margin [dB] |
|---|-------------------------|-------|------------|------------|------------------------|-----------------------|----------------|
| QUASI-PEAK DATA (Card RFID - External antenna) | | | | | | | |
| 0.1500 | 50.14 | N | 0.10 | 0.02 | 50.26 | 66.00 | 15.74 |
| 0.1950 | 44.62 | N | 0.10 | 0.02 | 44.74 | 63.82 | 19.08 |
| 0.2450 | 39.56 | L | 0.13 | 0.02 | 39.71 | 61.92 | 22.21 |
| 0.3950 | 43.60 | N | 0.11 | 0.02 | 43.73 | 57.96 | 14.23 |
| 0.4400 | 37.46 | L | 0.11 | 0.02 | 37.59 | 57.06 | 19.47 |
| 0.4450 | 37.90 | N | 0.11 | 0.02 | 38.03 | 56.97 | 18.94 |
| 13.5600 | 40.06 | N | 0.34 | 0.19 | 40.59 | 60.00 | 19.41 |
| QUASI-PEAK DATA (Card RFID - Internal antenna) | | | | | | | |
| 0.1500 | 49.62 | L | 0.14 | 0.02 | 49.78 | 66.00 | 16.22 |
| 0.1950 | 44.54 | N | 0.10 | 0.02 | 44.66 | 63.82 | 19.16 |
| 0.2450 | 39.46 | N | 0.10 | 0.02 | 39.58 | 61.92 | 22.34 |
| 0.3900 | 43.52 | N | 0.12 | 0.02 | 43.66 | 58.06 | 14.40 |
| 0.4400 | 38.34 | N | 0.11 | 0.02 | 38.47 | 57.06 | 18.59 |
| 0.4900 | 33.14 | L | 0.11 | 0.02 | 33.27 | 56.17 | 22.90 |
| 13.5600 | 30.92 | N | 0.34 | 0.19 | 31.45 | 60.00 | 28.55 |
| QUASI-PEAK DATA (Ribbon RFID) | | | | | | | |
| 0.1750 | 45.54 | N | 0.10 | 0.02 | 45.66 | 64.72 | 19.06 |
| 0.1800 | 45.78 | L | 0.14 | 0.02 | 45.94 | 64.49 | 18.55 |
| 0.2200 | 41.08 | N | 0.10 | 0.02 | 41.20 | 62.82 | 21.62 |
| 0.3600 | 36.94 | N | 0.12 | 0.02 | 37.08 | 58.73 | 21.65 |
| 0.4000 | 42.88 | N | 0.11 | 0.02 | 43.01 | 57.85 | 14.84 |
| 0.4050 | 41.34 | L | 0.11 | 0.02 | 41.47 | 57.75 | 16.28 |
| 13.5600 | 31.24 | N | 0.34 | 0.19 | 31.77 | 60.00 | 28.23 |

Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]

L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit.


SK TECH CO., LTD.

Page 20 of 23

Table 4: Measured values of the Conducted Emissions

| Frequency [MHz] | Reading [dB μ V] | L / N | CF [dB] | CL [dB] | Actual [dB μ V] | Limit [dB μ V] | Margin [dB] |
|--|-------------------------|-------|------------|------------|------------------------|-----------------------|----------------|
| AVERAGE DATA (Card RFID - External antenna) | | | | | | | |
| 0.1500 | 34.32 | L | 0.14 | 0.02 | 34.48 | 56.00 | 21.52 |
| 0.1950 | 31.13 | L | 0.13 | 0.02 | 31.28 | 53.82 | 22.54 |
| 0.3950 | 33.15 | N | 0.11 | 0.02 | 33.28 | 47.96 | 14.68 |
| 0.4400 | 26.43 | L | 0.11 | 0.02 | 26.56 | 47.06 | 20.50 |
| 0.4450 | 25.88 | N | 0.11 | 0.02 | 26.01 | 46.97 | 20.96 |
| 0.4900 | 25.22 | L | 0.11 | 0.02 | 25.35 | 46.17 | 20.82 |
| 13.5600 | 37.39 | N | 0.34 | 0.19 | 37.92 | 50.00 | 12.08 |
| AVERAGE DATA (Card RFID - Internal antenna) | | | | | | | |
| 0.1500 | 34.04 | L | 0.14 | 0.02 | 34.20 | 56.00 | 21.80 |
| 0.1950 | 31.56 | L | 0.13 | 0.02 | 31.71 | 53.82 | 22.11 |
| 0.2450 | 27.39 | L | 0.13 | 0.02 | 27.54 | 51.92 | 24.38 |
| 0.3900 | 34.97 | N | 0.12 | 0.02 | 35.11 | 48.06 | 12.95 |
| 0.4400 | 27.68 | N | 0.11 | 0.02 | 27.81 | 47.06 | 19.25 |
| 0.4900 | 25.22 | L | 0.11 | 0.02 | 25.35 | 46.17 | 20.82 |
| 13.5600 | 27.05 | N | 0.34 | 0.19 | 27.58 | 50.00 | 22.42 |
| AVERAGE DATA (Ribbon RFID) | | | | | | | |
| 0.1750 | 29.24 | N | 0.10 | 0.02 | 29.36 | 54.72 | 25.36 |
| 0.1800 | 29.84 | L | 0.14 | 0.02 | 30.00 | 54.49 | 24.49 |
| 0.2200 | 23.90 | N | 0.10 | 0.02 | 24.02 | 52.82 | 28.80 |
| 0.3600 | 26.21 | N | 0.12 | 0.02 | 26.35 | 48.73 | 22.38 |
| 0.4000 | 31.70 | N | 0.11 | 0.02 | 31.83 | 47.85 | 16.02 |
| 0.4050 | 29.24 | L | 0.11 | 0.02 | 29.37 | 47.75 | 18.38 |
| 13.5600 | 27.20 | N | 0.34 | 0.19 | 27.73 | 50.00 | 22.27 |

Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]



L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit.



**SK TECH CO., LTD.**

Page 21 of 23

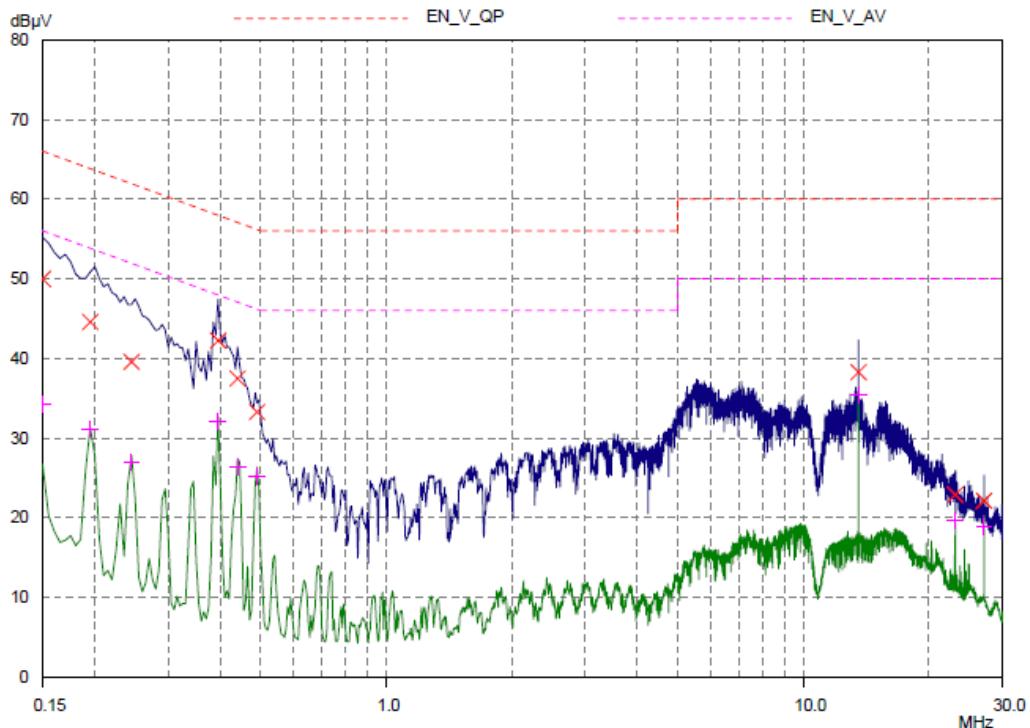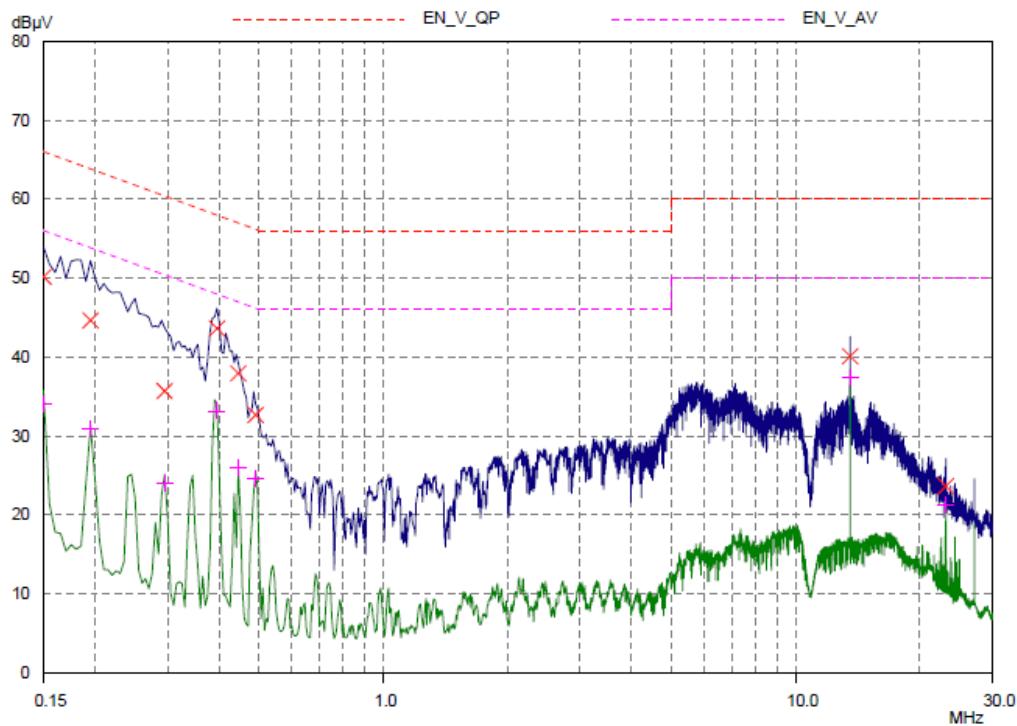Figure 3. Plot of the Conducted Emissions**Card RFID (External antenna)****Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**


**SK TECH CO., LTD.**

Page 22 of 23

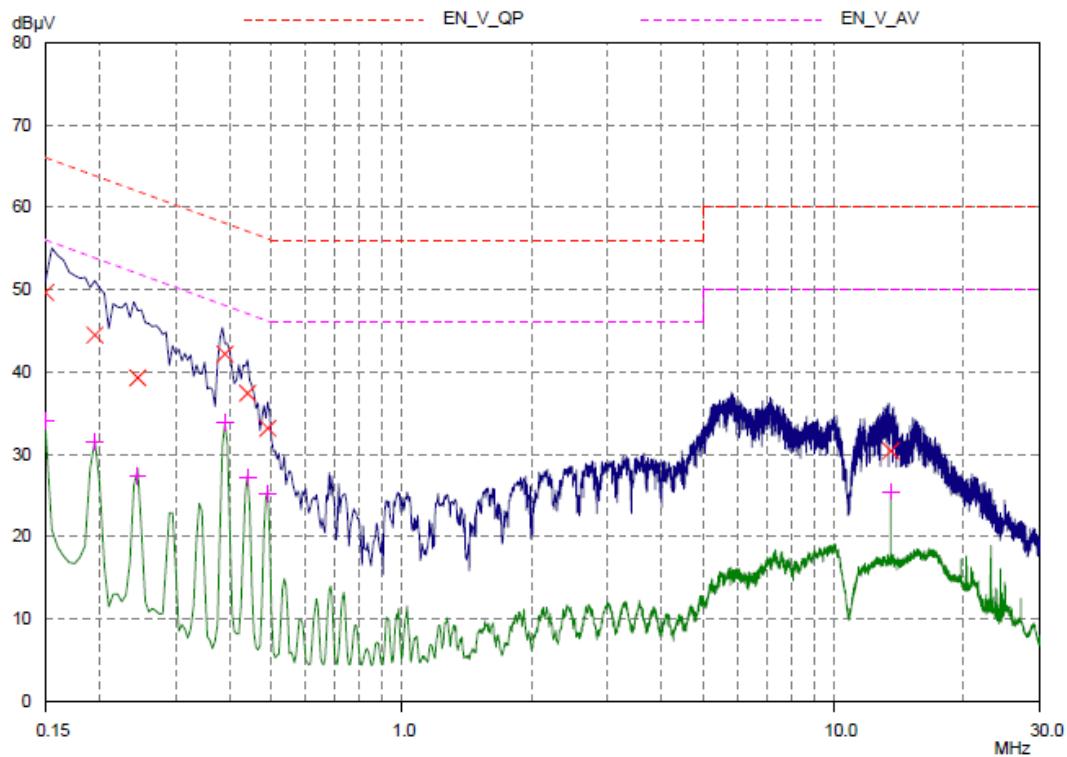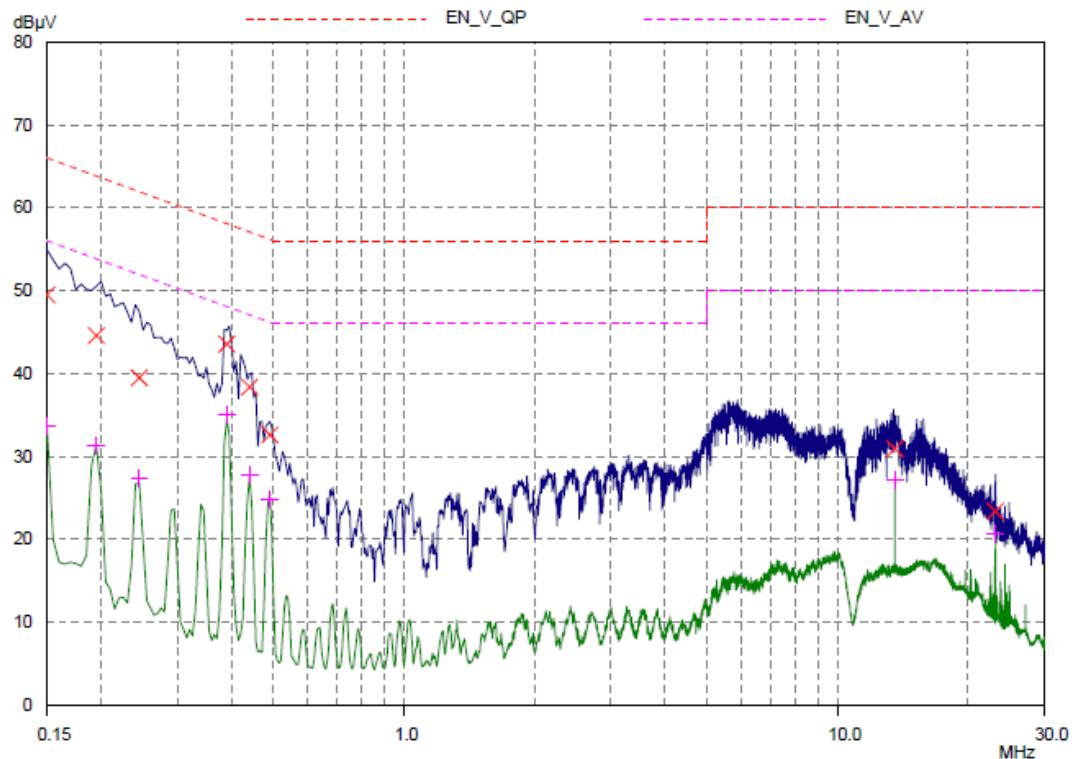Card RFID (Internal antenna)**Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**

**SK TECH CO., LTD.**

Page 23 of 23

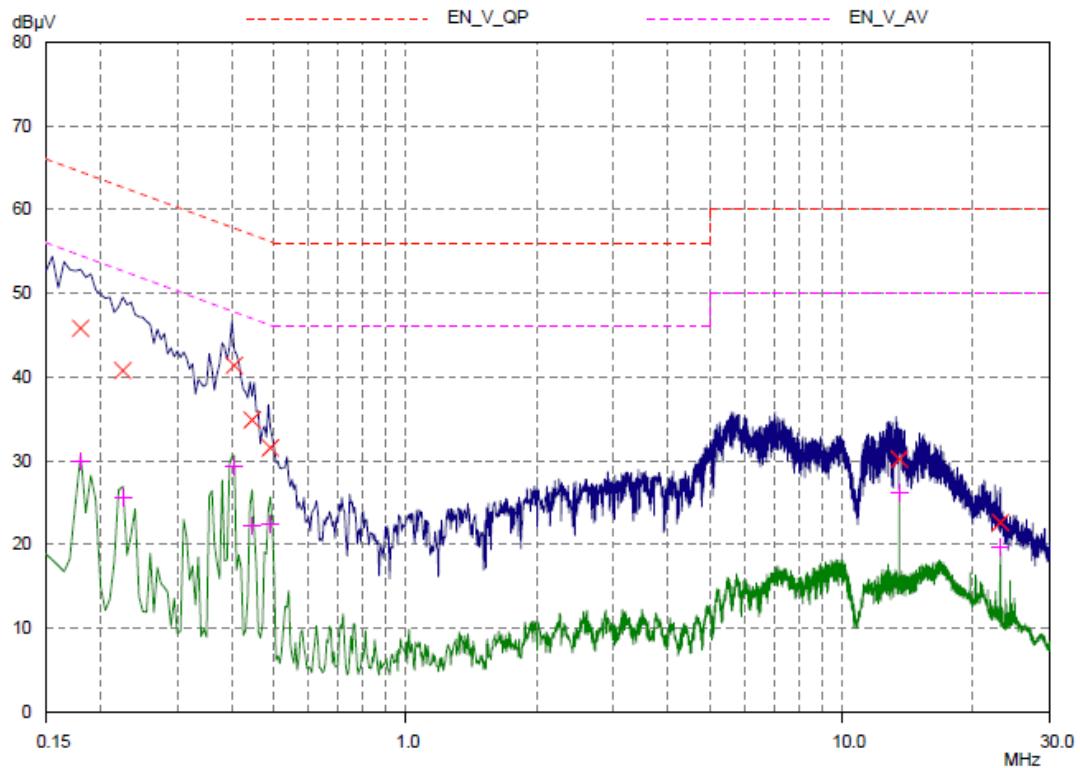Ribbon RFID**Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**