

TEST REPORT For FCC

Test Report No. :TK-FR9020 Date of Issue : 11/02/2009 FCC ID : XTZRCL-T700 Description of Product : RCL TX charger : RCL-T700 Model No. : RCL KOREA **Applicant** 1566 Joong San-dong Ilsang dong-gu, Goyang City Gyeonggi-do Korea : RCL KOREA Manufacturer 1566 Joong San-dong Ilsang dong-gu, Goyang City Gyeonggi-do Korea : FCC Part90 Standards **Test Date** : 10/23/2009 - 11/02/2009 **Test Results** : ⊠ PASS ☐ FAIL The test results relate only to the items tested.

THRU-KES CO.,LTD.

Reviewed by

Technical Manager

Date: 11/02/2009

477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do,469-803, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test Report No.: TK-FR9020

Model No: RCL-T700

Tested by

Kyu-Chul Shin Test Engineer

Date:11/02/2009



TABLE OF CONTENTS

1.0	(General Product Description	. 3
1.1	Т	ested Frequency	. 3
1.2	F	Power Input into the Final Amplifier	. 3
1.3		Model Differences	
1.4		Device Modifications	
1.5	F	Peripheral Devices	. 4
1.6		Calibration Details of Equipment Used for Measurement	. 5
1.7		est Facility	
1.8	L	aboratory Accreditations and Listings	. 5
2.0	5	Summary of tests	. 6
2.1	Т	echnical Characteristic Test	. 7
2.	.1.1	Power Limit	. 7
2.	.1.2	Type of Emission	10
2.	.1.3	Banddwidth Limitation	11
2.	.1.4	Emissions Mask	13
2.	.1.5	Transmitter Spurious Conducted Emission	16
2.	1.6	Frequency Stability	19
2.	.1.7	TRANSIENT FREQUENCY BEHAVIOR	21
2.	.1.8	Field Strength of Surious Radiation	24
APPEN	NDI:	X A – Test Equipment Used For Tests	26
Test S	Setu	p Photo and Configurationb-(Part 90)	27

Test Report No.: TK-FR9020



1.0 General Product Description

EUT Type	:	RCL TX charger
FCC Rule Part(s)	:	§2; §15; §90
Model name	:	RCL-T700
Serial number	:	Identical prototype
Tx Freq. Range	:	450.0250 ~ 469.9975 MHz
Channel Space Bandwidth		25kHz
Type of Modulation	:	19K5F1D
Frequency Tolerance:	:	± 0.00025 % (2.5ppm)
Maximum Output Power	:	Conducted: 1.73W
Power Source	:	12 Vdc
Antenna type	:	Whip antenna Gain: -0.57dBi

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	450.0250	457.5750	469.9775

1.2 Power Input into the Final Amplifier

DC Voltages and currents info the final amplifier :

Vce : 12 volts

Test Report No.: TK-FR9020 Model No: RCL-T700



1.3 Model Differences

None

1.4 Device Modifications

The following modifications were necessary for compliance: Not applicable

1.5 Peripheral Devices

	Device Manufacturer			Model No.	Serial No.							
E	U	Т	R	С	L	K	0	R	Ε	Α	RCL-T700	-

Test Report No.: TK-FR9020 Page 4 of 28



1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to RRA & HCT, therefore, all test data recorded in this report is traceable to RRA & HCT.

1.7 Test Facility

The measurement facility is located at 477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do,469-803, Korea. Tel: +82-31-883-5092/Fax: +82-31-883-5169. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	FC 343818
KOREA	ксс	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site)	KR100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1

Test Report No.: TK-FR9020 Page 5 of 28



2.0 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
90.205	Power Limit		С
90.207	Type of Emission		С
90.209	Bandwidth Limitation		С
90.210	Emissions Mask	Conducted	С
2.1057	Transmitter Spurious Conducted Emission		С
90.213	Frequency Stability		С
90.214	Transient Frequency Behavior		С
90.210	Field Strength of Spurious Radiation	Radiated	С

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

Test Report No.: TK-FR9020



2.1 Technical Characteristic Test

2.1.1 Power Limit

90.205(h) 450-470 MHz:

The maximum allowable station effective radiated power(ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2. (I.e. 2W for service area less than 3 km.)

Table 2-450-470 MHz-Maximum ERP/Reference HAAT for a Specific Service Area Radius

	Service area radius (km)									
	3	8	13	16	24	32	40	48	64	80
Max. ERP(W)1	2	100	500	500	500	500	500	500	500	500
Up to reference HAAT (m)3	15	15	15	27	63	125	250	410	950	2700

¹ Maximum ERP indicated provides for a 39 dBu signal strength at the edge of the service area per FCCReport R-6602, Fig. 29 (See Sec. 73.699, Fig. 10 b).

ERP allow = ERPmax X (HAATref / HAATactual)

Test Setup Layout

CONDUCTED OUTPUT POWER




Figure 1: Measurement setup for the carrier frequency seperation

Limit: 2Watts

Test Results

CONDUCTED OUTPUT POWER

Frequency (MHz)	Peak output power(dBm)	Peak output power(W)	Result
450.0250	32.15	1.64	Complies
457.5750	32.38	1.73	Complies
469.9975	32.28	1.69	Complies

Test Report No.: TK-FR9020


Model No: RCL-T700

Page 7 of 28


³ When the actual antenna HAAT is greater than the reference HAAT, the allowable ERP will be reduced in accordance with the following equation:



Low Frequency

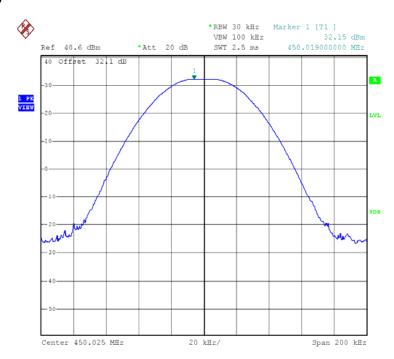

Mid Frequency

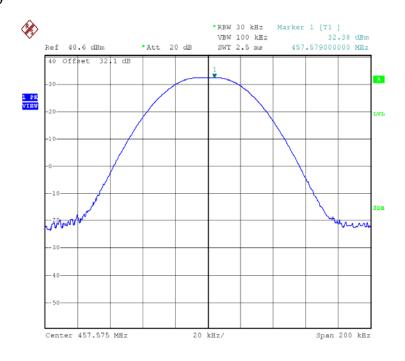


Test Report No.: TK-FR9020

Model No: RCL-T700

Page 8 of 28



High Frequency

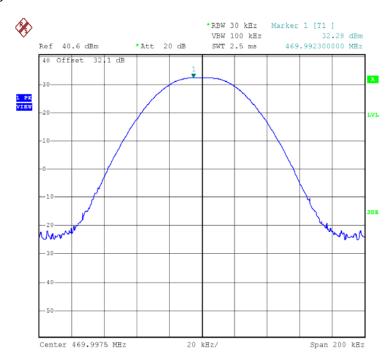

Test Report No.: TK-FR9020 Page 9 of 28



2.1.2 Type of Emission

90.207(e):

For non-voice paging operations, only A1A, A1D, A2B, A2D, F1B, F1D, F2B, F2D, G1B, G1D, G2B, or G2D emissions will be authorized.

RCL-T700: F1D

This equipment is a non-voice only paging operations

This equipment does not have audio low pass filter

2.1003 (4) Type of Emission: 19K5F1D

Bn = 2M + 2DK M = 1200 bits per second D = 9.15 KHz (Peak Deviation) K = 1 Bn = 2(1200bps/2) + 2(9150) = 19.5k

Test Report No.: TK-FR9020



2.1.3 Banddwidth Limitation

90.209.b.(3):

For all other types of emissions, the maximum authorized bandwidth shall not be more than that normally authorized for voice operations.


According to 90.209.b.(5), unless specified elsewhere, channel spacings and bandwidths that willbe authorized in the following frequency bands are given in the following "STANDARDCHANNEL SPACING/BANDWIDTH" table.

Standard Channel Spacing/Bandwidth

	Channel	
Frequency band (MHz)	spacing	Authorized
	(kHz)	bandwidth (kHz)
Below 25		
25-50.	20	20
72-76	20	20
150-174	17.5	1,320/11.25/6
220-222	5	4
406-512	6.25	20/11.25/6
806-809/851-854	12.5	20
809-824/854-869	25	20
896-901/935-940	12.5	13.6
902-928		
929-930	25	20
1427-1432	12.5	12.5
2450-2483.5		
Above 2500		

¹⁾ For stations authorized on or after August 18, 1995.

Test Setup Layout

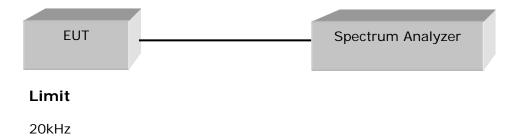


Test Report No.: TK-FR9020

³⁾ Operations using equipment designed to operate with a 25 kHz channel bandwidth will be authorized a20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized an 11.25 kHz bandwidth. Operations using equipment designed to operate with a 6.25kHz channel bandwidth will be authorized a 6 kHz bandwidth. All stations must operate on channels with a band-width of 1.5KHz or less beginning January 1,2013, unless the operations meet the efficiency standard of 90.203(j)(3).



Mid Frequency

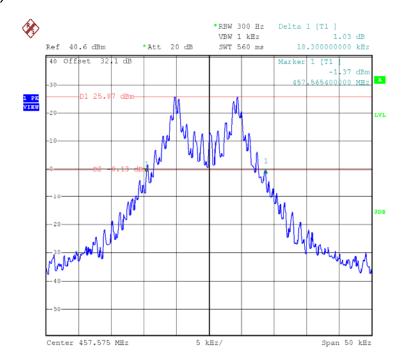

Test Report No.: TK-FR9020 Page 12 of 28 Model No: RCL-T700




2.1.4 Emissions Mask

- * This equipment without audio low pass filter
- * This equipment Paging-only

90.210(g) Emission Mask G.

- (g)Emission Mask G For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:
- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 10 kHz, but no more than 250 percent of the authorized band-width: At least 116log (fd /6.1) dB or 50+10log(P) dB or 70dB, whichever is the lesser attenuation;
- (2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.

Test Setup Layout




See next pages for actual measured spectrum plots.


Test Report No.: TK-FR9020 Model No: RCL-T700



Low Frequency

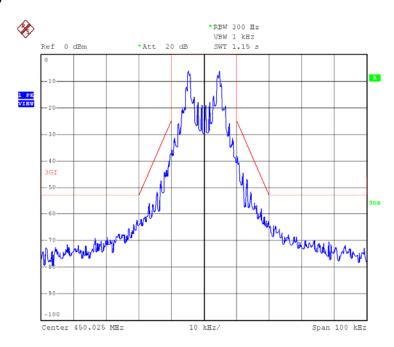


Mid Frequency

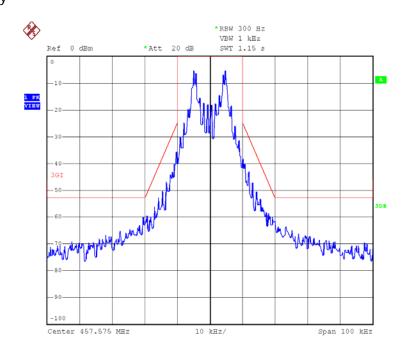

Test Report No.: TK-FR9020



High Frequency

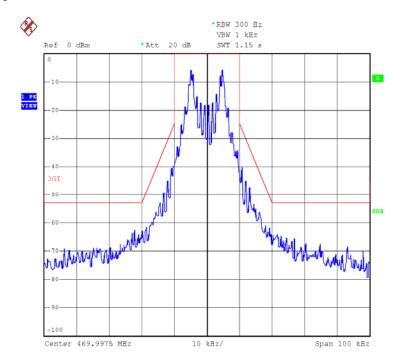



2.1.5 Transmitter Spurious Conducted Emission

- 2.1057 Frequency spectrum to be investigated.
- (a) In all of the measurements set forth in 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
- (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels


RBW = 100 kHz

 $VBW = 100 \text{ kHz} (\geq RBW)$

Span = 100 MHz Detector function = peak

Trace = \max hold Sweep = auto

Test Setup Layout




Limit


-13dBm

See next pages for actual measured spectrum plots.

Test Report No.: TK-FR9020 Model No: RCL-T700



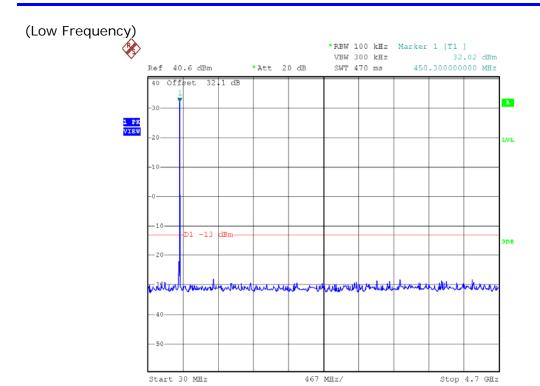


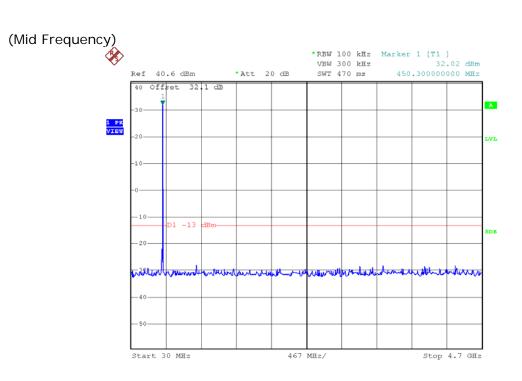

Date: 31.0CT.2009 12:14:34

Test Report No.: TK-FR9020 Model No: RCL-T700



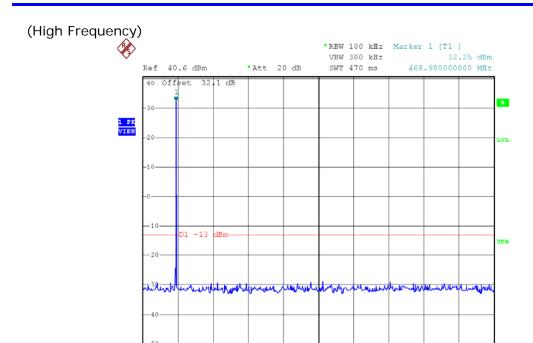

467 MHz/

Stop 4.7 GHz

Start 30 MHz

Test Report No.: TK-FR9020 Page 18 of 28 Model No: RCL-T700



2.1.6 Frequency Stability

90.213: Frequency Stability

Minimum Frequency Stability[Parts per million (ppm)

Frequency range	Fixed and base	Mobile Stations					
(MHz)	Stations	Over 2W output power	2 watts or less output power				
Below 25	1.13-100	100	100				
25-50	20	20	50				
72-76	5	70.00	50				
150-174	5.11.5	4. 5	**50				
220-222	0.1	1.5	1.5				
421-512	T.IIi. 2.5	E ₅	*5				
806-821	1.5	2.5	2.5				
821-824	1.1.0	1.5	1.5				
851-866	1.5	2.5	2.5				
866-869	1.0	1.5	1.5				
896-901	1-0.1	1.5	1.5				
902-928	2.5	2.5	2.5				
902-928	2.5	2.5	2.5				
929-930	1.5		4.50				
935-940	0.1	1.5	1.5				
1427-1435	300	300	300				
Above 2450	25	•	3*1				

- 1 Fixed and base stations with over 200 watts transmitter power must have a frequency stability of 50 ppm except for equipment used in the Public Safety Pool where the frequency stability is 100 ppm.
- 2 For single sideband operations below 25 MHz, the carrier frequency must be maintained within 50 Hz of the authorized carrier frequency.
- 3 Travelers information station transmitters operating from 530–1700 kHz and transmitters exceeding 200 watts peak envelope power used for disaster communications and long distance circuit operations pursuant to §§ 90.242 and 90.264must maintain the carrier frequency to within 20 Hz of the authorized frequency.
- 4 Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of5 ppm.
- 5 In the 150–174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- 6 In the 150–174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations de-signed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.
- 7 In the 421–512 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 1.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 0.5 ppm.
- 8 In the 421–512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have afrequency stability of 1.0 ppm.
- 9 Fixed stations with output powers above 120 watts and necessary bandwidth less than 3 kHz must operate with a frequency stability of 100 ppm. Fixed stations with output powers less than 120 watts and using time-division multiplex, must operate with a frequency stability of 500 ppm.
- 10 Frequency stability to be specified in the station authorization.
- 11 Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150–174 MHz band and 2.5 ppm in the 421–512 MHz band.
- 12 Mobile units may utilize synchronizing signals from associated base stations to achieve the specified carrier stability.


Test Report No.: TK-FR9020



13 Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency tolerance restrictions. 14 Control stations may operate with the frequency tolerance specified for associated mobile frequencies.

- (a) Unless noted elsewhere, transmitters used in the services governed by this part must have minimum frequency stability as specified in the following table.
- 8 In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- (b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated output power as specified by the manufacturer.

Test Setup Layout



TEST Results:

Assigned Frequency (Ref. Frequency): 450.025MHz

TEMPERATURE	FREQUENCY(MHz)	PPM	LIMIT(ppm)	비고
-30	457.574902	-0.21	2.5	pass
-20	457.575088	0.19	2.5	pass
-10	457.575158	0.34	2.5	pass
0	457.575160	0.35	2.5	pass
10	457.575194	0.42	2.5	pass
20	457.574984	-0.03	2.5	pass
30	457.574984	-0.03	2.5	pass
40	457.574816	-0.40	2.5	pass
50	457.574966	-0.07	2.5	pass
+15% Battery : 13.8V	457.574544	-1.00	2.5	pass
-15% Battery : 10.2V	457.574550	-0.98	2.5	pass

Limit

2.5ppm

Test Report No.: TK-FR9020

Page 20 of 28



2.1.7 TRANSIENT FREQUENCY BEHAVIOR

90.214: Transient Frequency Behavior

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum Frequency	All Equipment		
	Difference	150 to 174MHz	421 to 512MHz	
Transient frequency	Behavior for Equipment Design	ed to Operate on 25kHz (Charmels	
tı ⁴	±25.0 kHz	5.0 ms	10.0 ms	
t ₂	±12.5 kHz	20.0 ms	25.0 ms	
t₅⁴	±25.0 kHz	5.0 ms	10.0 ms	
	Behavior for Equipment Design	ed to Operate on 12.5kH	z Channels	
tı ⁴	±12.5 kHz	5.0 ms	10.0 ms	
t ₂	±6.25 kHz	20.0 ms	25.0 ms	
ts ⁴	±12.5 kHz	5.0 ms	10.0 ms	
	Behavior for Equipment Design	ed to Operate on 6.25kH	z Channels	
ti ⁴	±6.25 kHz	5.0 ms	10.0 ms	
t ₂	±3.125 kHz	20.0 ms	25.0 ms	
t ₅ ⁴	±6.25 kHz	5.0 ms	10.0 ms	

¹ ton is the instant when a 1 kHz test signal is completely suppressed, including any capture time due tophasing. 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period

Test Report No.: TK-FR9020 Model No: RCL-T700


t1. is the time period immediately following ton

t2 is the time period immediately following

t3 is the time period immediately before to ff



Test Setup Layout

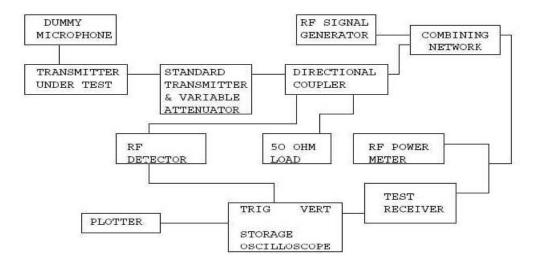

Limit


t2=25ms; during time interval t2 the maximum frequency different= $\pm 6.25KHz$


See next pages for actual measured spectrum plots.

Test Report No.: TK-FR9020



TRANSIENT FREQUENCY BEHAVIOR

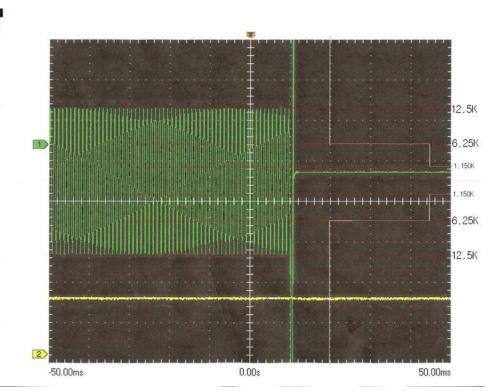

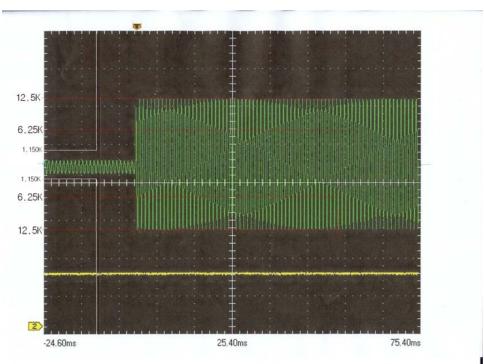

Test Report No.: TK-FR9020



2.1.8 Field Strength of Surious Radiation

REGULATIONS : 2.1053 , 90.210

TEST METHOD/GUIDE: ANSI/TIA-603-C

Test Procedure

1. Adjust the spectrum analyzer for the following Setting:

a) WBW : 10kHz(<1GHz), 1MHz(>1GHz).

b) VBW: 300kHz(<1GHz), 3MHz(>1GHz).


C) Sweep Speed: 50mS

d) Detector mode: Positive Peak

- 2. The transmitter was placed on a wooden turntable, and it was transmitting into non-radiation load which was also placed on the turntable.
- 3. The measurement antenna was placed at a distance of 3meters from the EUT. During test, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT The test was performed by placing the EUT on 3-orthogonal axis.
- 4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 5. Remove the EUT and replace it with substitution antenna A signal generator was connected to the substitution antenna by a non-radiating cable.

 The absolute levels of the spurious emissions were measured by the substitution.

Measuring Equipment Configuration

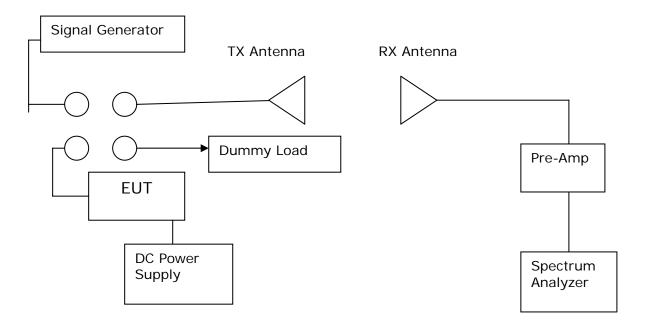

Test Report No.: TK-FR9020

Model No: RCL-T700

Page 24 of 28



Test result : Low Frequency : 43 +10LOG(1.64)=45.15 dB

No	Emission Frequency (MHz)	Spectrum Reading (dBm)	Generator Reading (dBm)	Ant. Polaritry	Antenna Gain (dBi)	Cable Loss (dB)	Result	Margin (dBm)	Limit
NO							(dBm)		(dBm)
No emissions were detected at a level greater than 20dB below limit.									

Test result: mid Frequency: 43 +10LOG(1.73)=45.38 dB

	No	Emission Frequency (MHz)	Spectrum Reading (dBm)	Generator Reading (dBm)	Ant. Polaritry	Antenna Gain (dBi)	Cable Loss (dB)	Result	Margin (dBm)	Limit (dBm)	
No	NO							(dBm)			
	No emissions were detected at a level greater than 20dB below limit.										

Test result : High Frequency : 43 +10LOG(1.69)=45.28 dB

No	Emission Frequency (MHz)	Spectrum Reading (dBm)	Generator Reading (dBm)	Ant. Polaritry	Antenna Gain (dBi)	Cable Loss (dB)	Result	Margin (dBm)	Limit (dBm)	
NO							(dBm)			
No emissions were detected at a level greater than 20dB below limit.										
·										

Test Report No.: TK-FR9020 Page 25 of 28



APPENDIX A – Test Equipment Used For Tests

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.
1	Test Receiver	Rohde & Schwarz	ESHS 10	862970/018	2010.06.11
2	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2010.05.20
3	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2010.05.15
4	Spectrum Analyzer	Rohde & Schwarz	FSP13	100130	2010.05.15
5	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2010.05.15
6	Audio analyzer	Hewlett Packard	8903B	3011A12915	2010.05.15
7	Preamplifer	Hewlett Packard	8447F	2805A02570	2010.05.15
8	Preamplifer	A.H. Systems	PAM-0118	164	2010.04.17
9	Signal Generator	Hewlett Packard	8673D	2708A00448	2010.05.15
10	Power Meter	Hewlett Packard	437B	312U24787	2010.04.21
11	Power Sensor	Hewlett Packard	8482B	3318A06943	2010.05.15
12	Digital Multi Meter	Tektronix	DMM916	138401	2010.05.15
13	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2011.02.06
14	Dipole Antenna	Rohde & Schwarz	VHAP	574	2010.07.07
15	Dipole Antenna	Rohde & Schwarz	VHAP	575	2010.07.17
16	Dipole Antenna	Rohde & Schwarz	UHAP	545	2010.07.17
17	Dipole Antenna	Rohde & Schwarz	UHAP	546	2010.07.07
18	Biconical Antenna	Eaton Corp.	94455-1	0977	2010.07.03
19	Biconical Antenna	EMCO	3104C	9111-2468	2010.07.03
20	Log Periodic Antenna	EMCO	3146	2051	2010.06.05
21	Log Periodic Antenna	EMCO	3146	8901-2320	2010.07.03
22	Horn Antenna	A.H. Systems	SAS-571	414	2011.03.16
23	Trilog-Broadband	SCHWARZBECK	VULB 9168	9168-350	2011.03.27
24	Antenna LISN	EMCO	3810/2	2228	2010.05.15
25	Waveform Generator	Hewlett Packard	33120A	US34001190	2010.05.15
26	Digital Oscilloscope	Tektronix	TDS 340A	B012287	2010.05.15
27	Dummy Load	Bird Electronics	8251	11511	2010.04.17

Test Report No.: TK-FR9020



Test Setup Photo and Configurationb-(Part 90)





Test Report No.: TK-FR9020







Test Report No.: TK-FR9020