


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	60%
Test Engineer	Denis Su	Configurations	Normal Link (2.4G+5G)

Horizontal

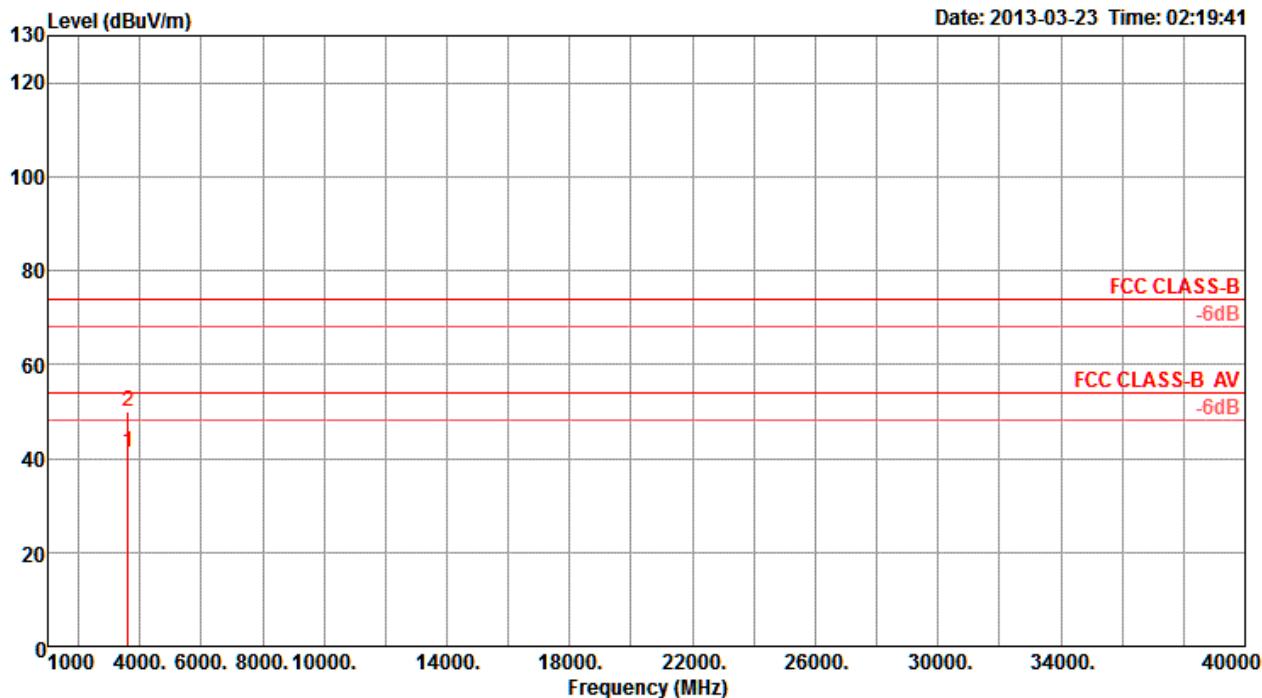

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	3600.03	41.35	54.00	-12.65	41.82	3.63	34.69	30.59 Average	159	117	HORIZONTAL
2 p	3600.52	49.85	74.00	-24.15	50.32	3.63	34.69	30.59 Peak	159	117	HORIZONTAL

Vertical

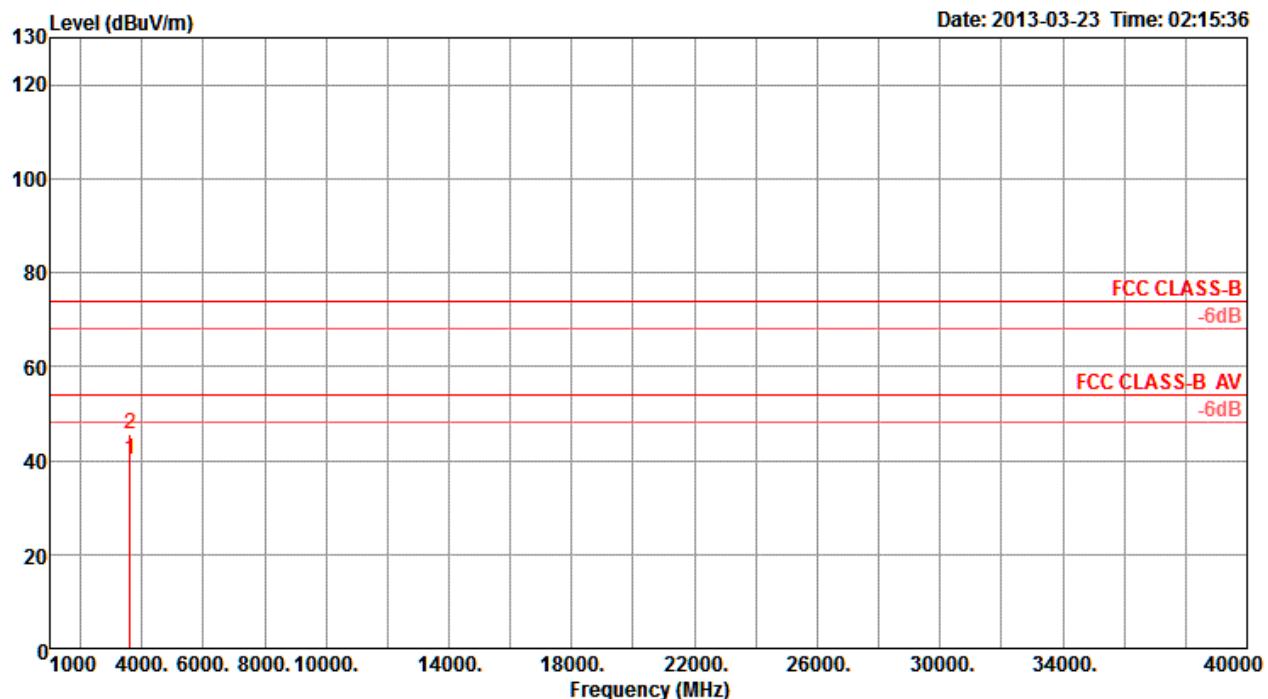

Freq	Level	Limit	Over	Read	Cable			Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB/m		deg	cm	
1 a	3600.15	40.12	54.00	-13.88	40.59	3.63	34.69	30.59	Average	275	100	VERTICAL
2 p	3601.23	45.76	74.00	-28.24	46.23	3.63	34.69	30.59	Peak	275	100	VERTICAL