


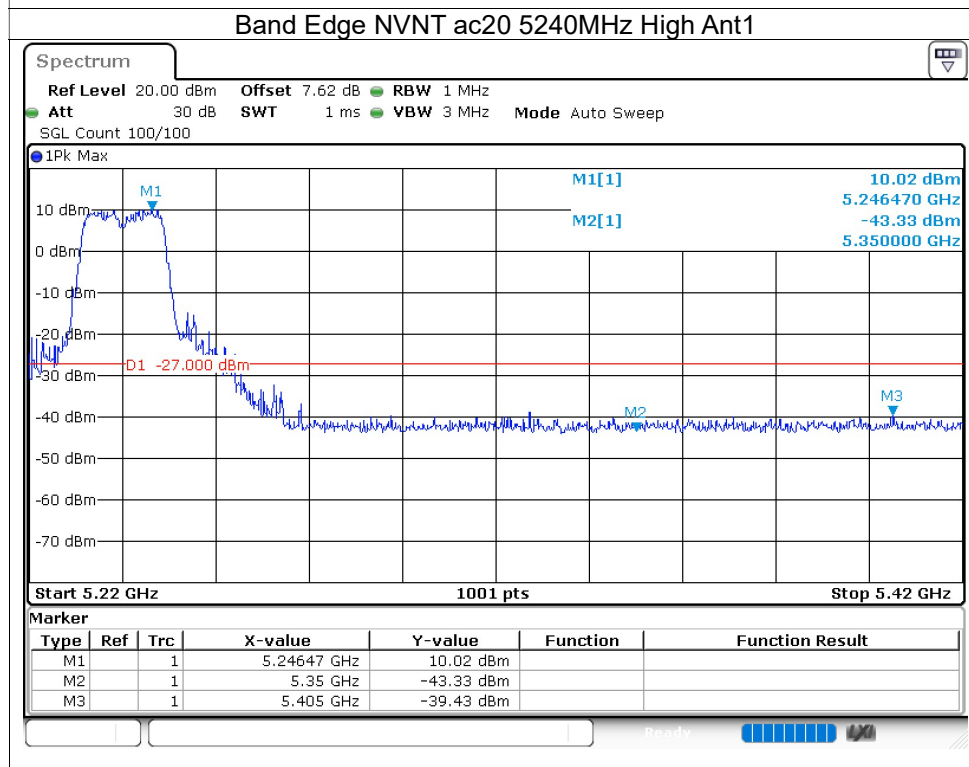
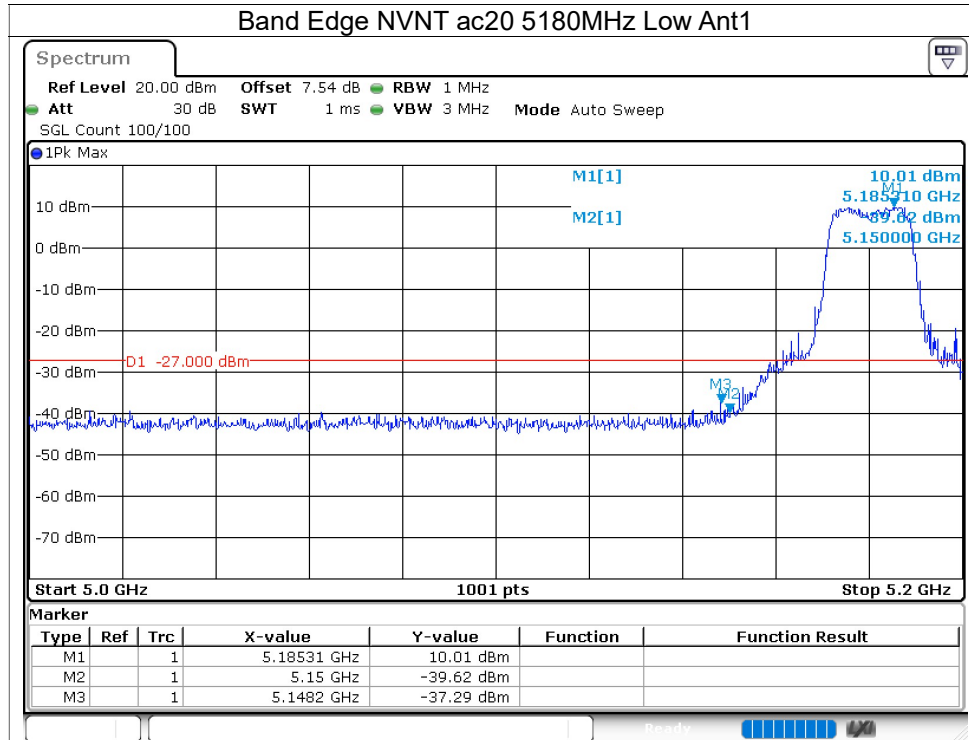
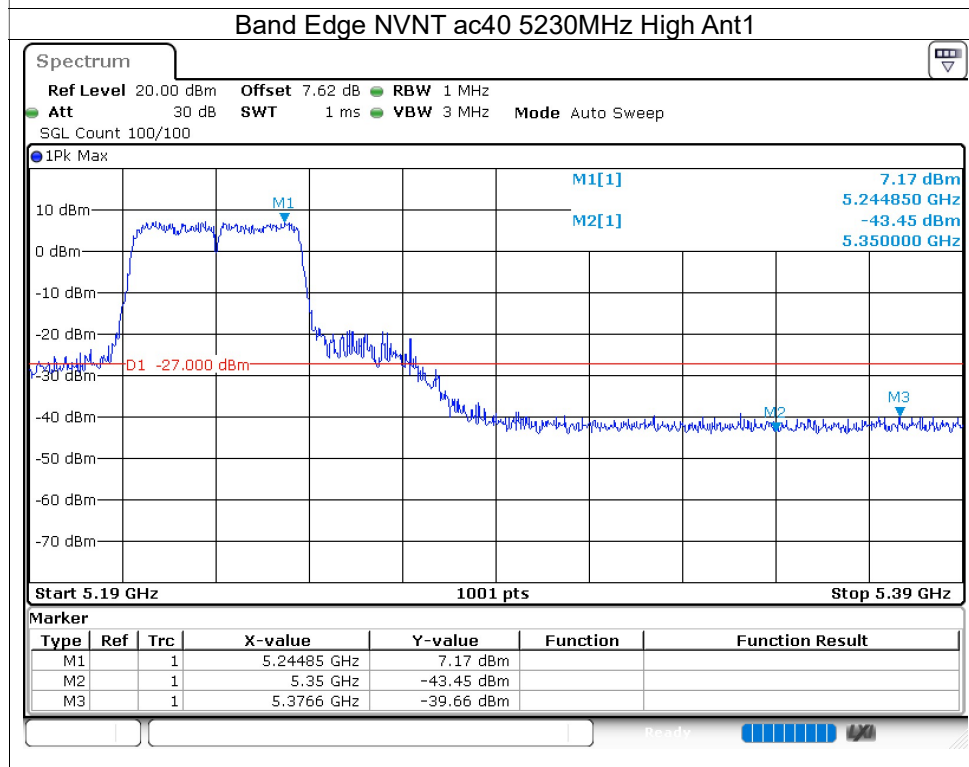


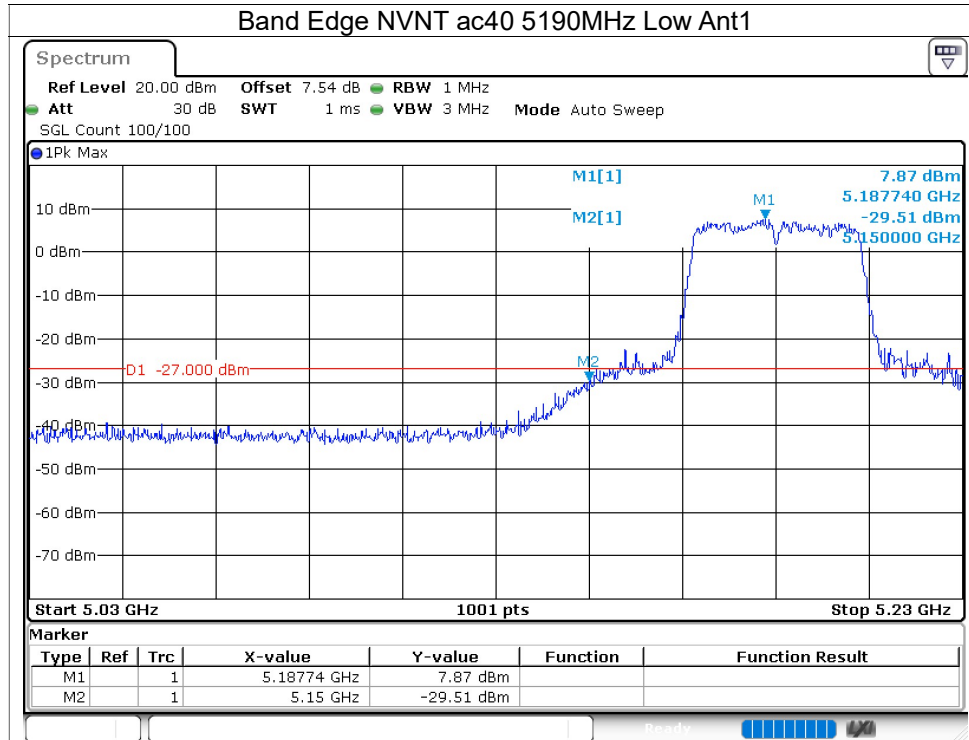

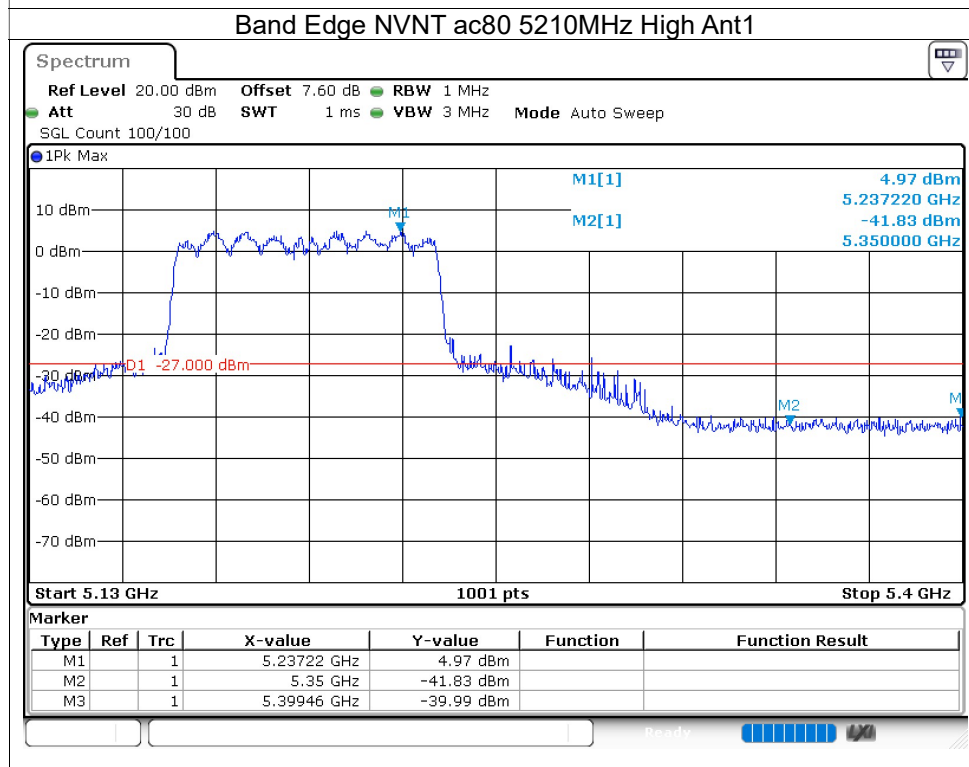

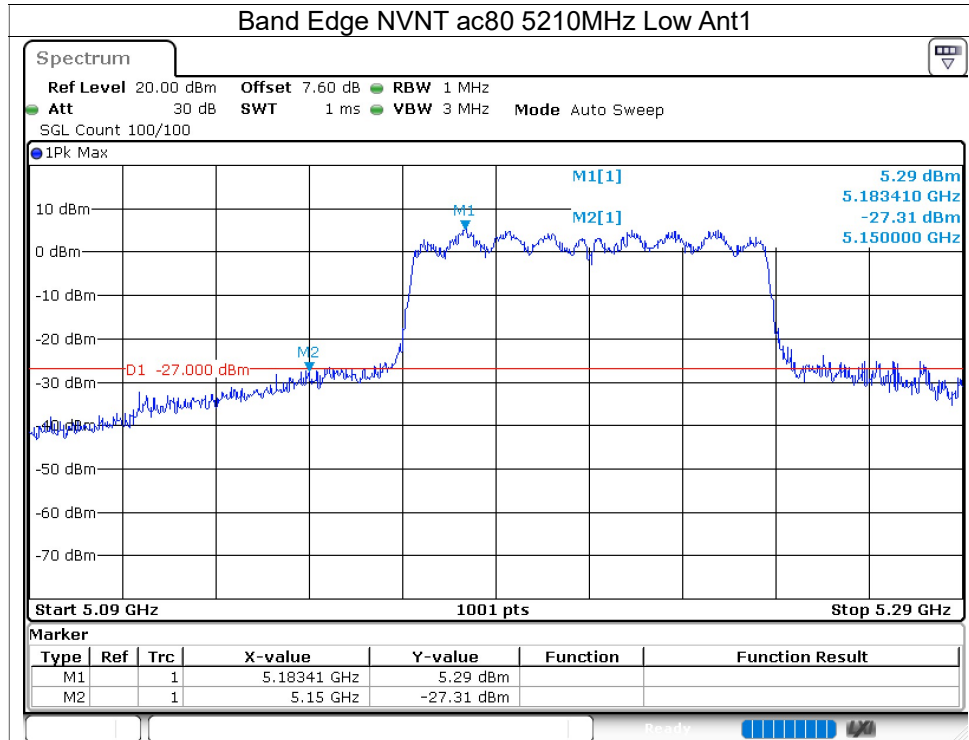

5.1.7 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-30.45	-27	Pass
NVNT	a	5200	Ant1	-30.61	-27	Pass
NVNT	a	5240	Ant1	-30.1	-27	Pass
NVNT	n20	5180	Ant1	-30.89	-27	Pass
NVNT	n20	5200	Ant1	-30.94	-27	Pass
NVNT	n20	5240	Ant1	-29.32	-27	Pass
NVNT	n40	5190	Ant1	-30.72	-27	Pass
NVNT	n40	5230	Ant1	-30.59	-27	Pass
NVNT	ac20	5180	Ant1	-30.82	-27	Pass
NVNT	ac20	5200	Ant1	-30.55	-27	Pass
NVNT	ac20	5240	Ant1	-30.54	-27	Pass
NVNT	ac40	5190	Ant1	-30.21	-27	Pass
NVNT	ac40	5230	Ant1	-31.12	-27	Pass
NVNT	ac80	5210	Ant1	-31.3	-27	Pass

Note: This test has increased antenna gain .

