



## Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

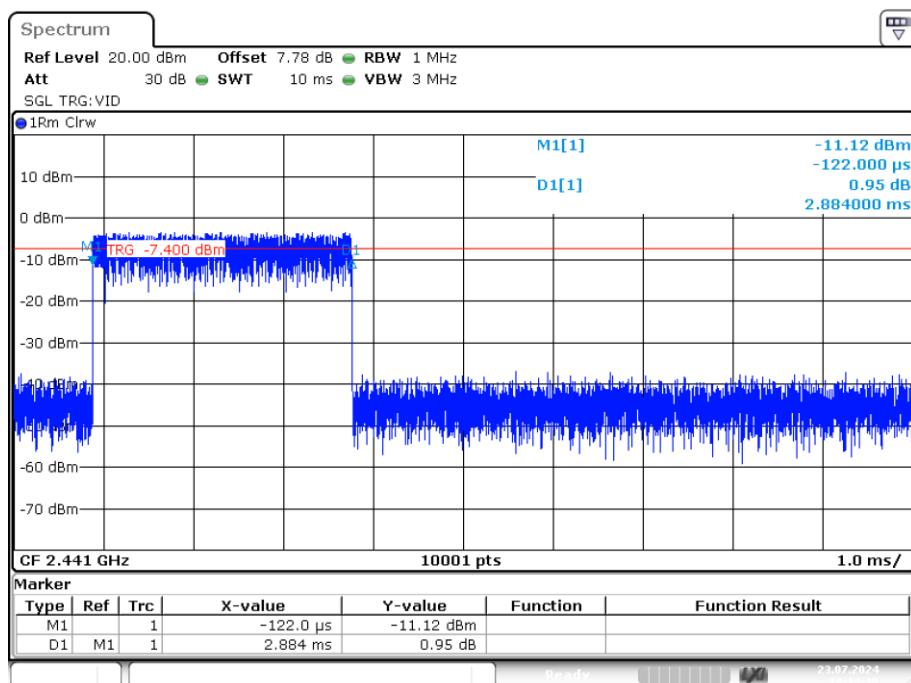

Date: 23.JUL.2024 18:14:14

## Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

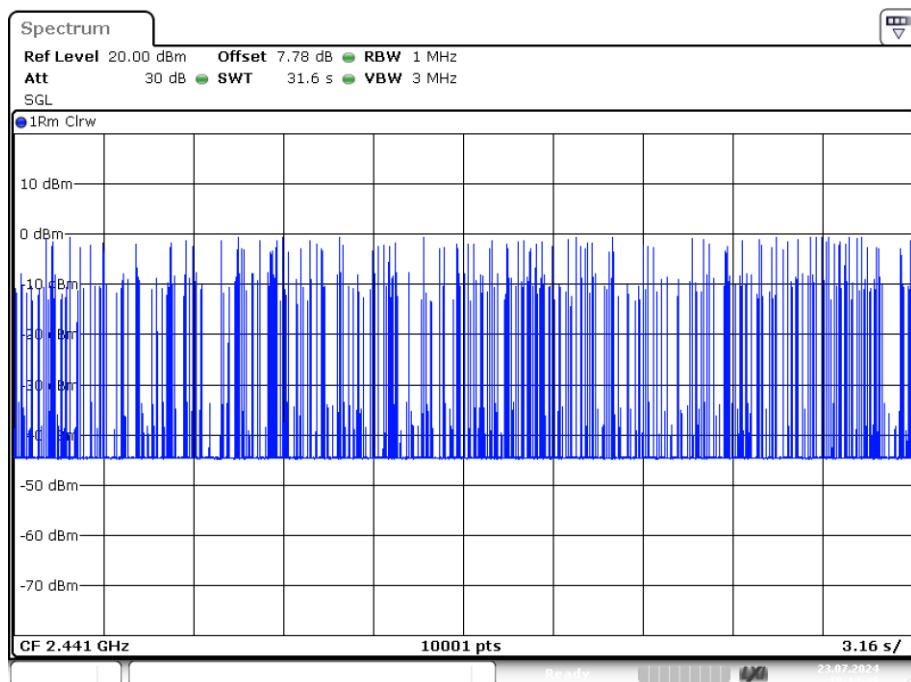

Date: 23.JUL.2024 18:14:49

## 8. RADIATED EMISSIONS

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### RSS-GEN Restricted frequency band

**Table 7 – Restricted frequency bands**<sup>Note 1</sup>

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0

6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Note: The peak limit is 20 dB higher than the average limit

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30


**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

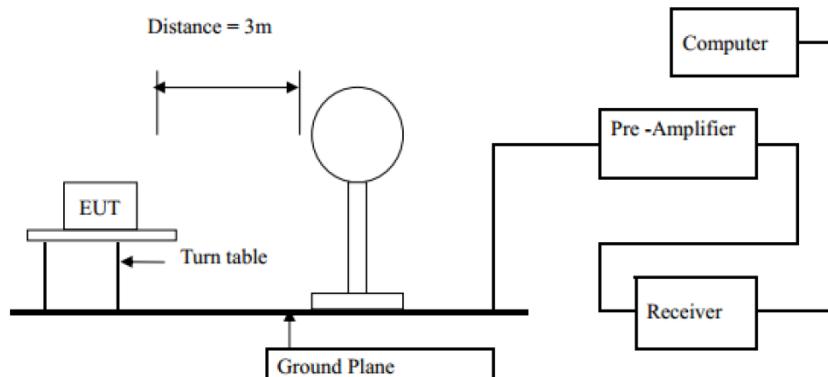

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

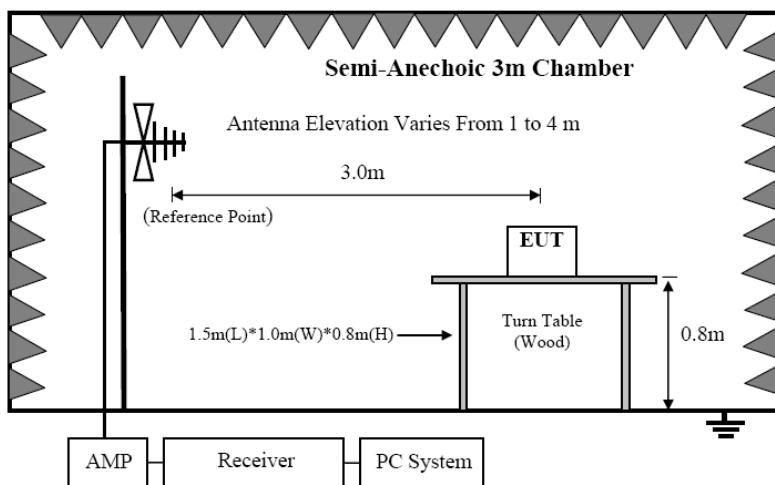

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

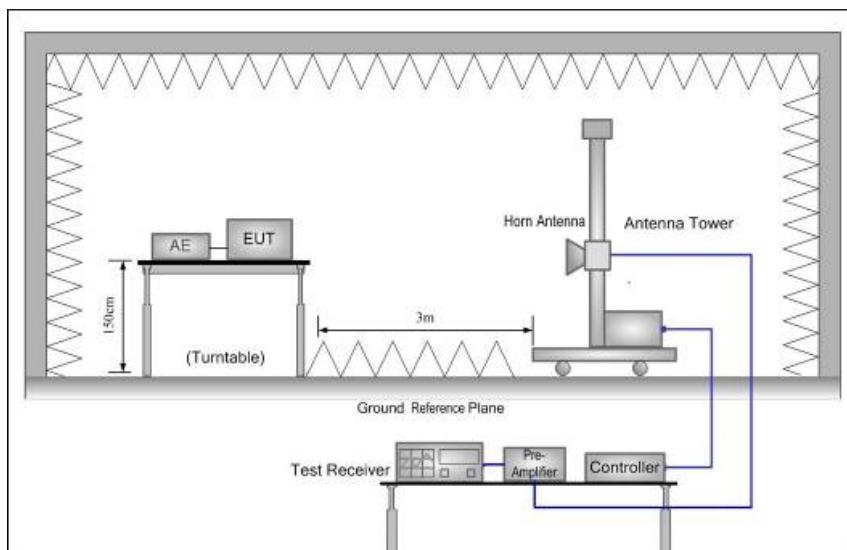

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

### 8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


**Vertical:**

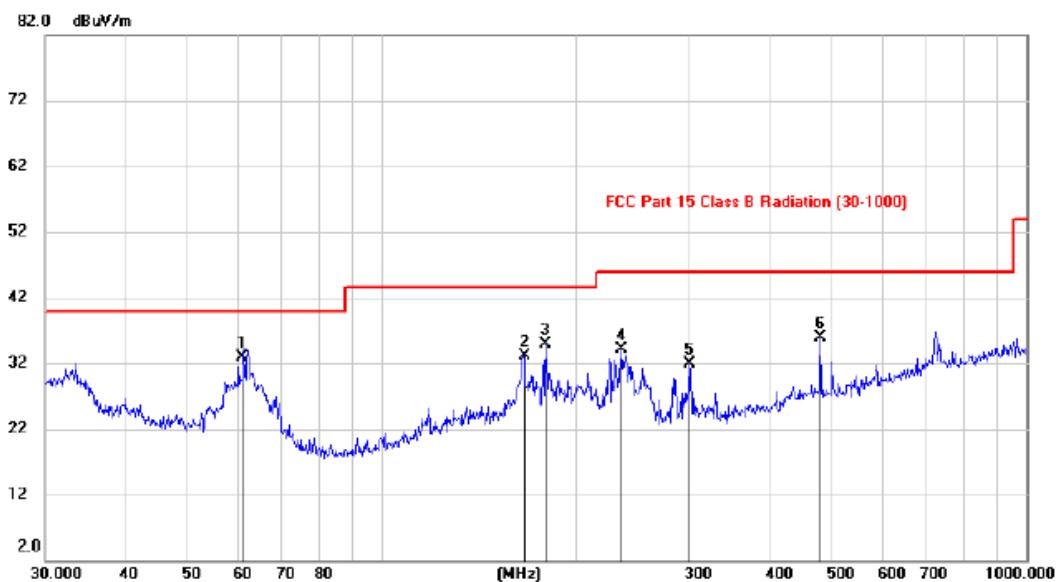

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment		Limit	Margin	
				MHz	dBuV	dB	dBuV/m	dB
1 *	60.9174	19.94	12.90	32.84	40.00	-7.16	QP	
2	166.4761	18.62	14.42	33.04	43.50	-10.46	peak	
3	180.0164	22.16	12.68	34.84	43.50	-8.66	peak	
4	235.7333	21.64	12.45	34.09	46.00	-11.91	peak	
5	300.0514	17.85	14.10	31.95	46.00	-14.05	peak	
6	480.0221	17.99	17.95	35.94	46.00	-10.06	peak	

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor, Correct Factor=Antenna Factor+Cable Loss.

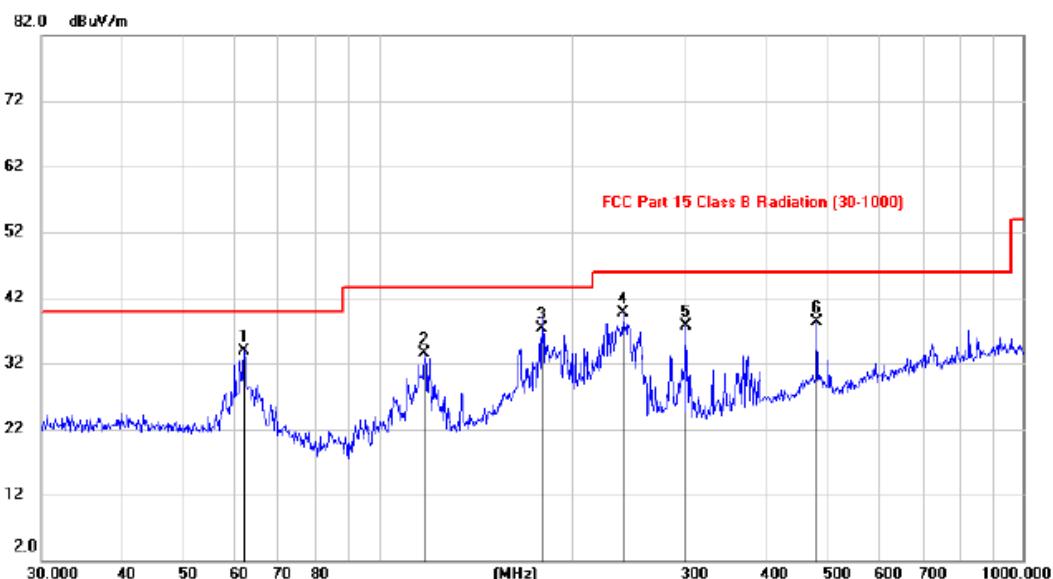**Horizontal:**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	61.8213	21.08	12.88	33.96	40.00	-6.04	peak
2		118.1447	20.74	12.81	33.55	43.50	-9.95	peak
3		180.0164	24.61	12.68	37.29	43.50	-6.21	QP
4		240.7459	27.18	12.57	39.75	46.00	-6.25	peak
5		300.0514	23.65	14.10	37.75	46.00	-8.25	peak
6		480.0221	20.27	17.95	38.22	46.00	-7.78	peak

Note: 1. \*:Maximum data; x:Over limit; l:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.22	V	33.95	10.18	34.26	55.09	74	-18.91	PK
4804	35.57	V	33.95	10.18	34.26	45.44	54	-8.56	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.52	H	33.95	10.18	34.26	57.39	74	-16.61	PK
4804	37.04	H	33.95	10.18	34.26	46.91	54	-7.09	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	41.50	V	33.93	10.2	34.29	51.34	74	-22.66	PK
4882	35.68	V	33.93	10.2	34.29	45.52	54	-8.48	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	45.53	H	33.93	10.2	34.29	55.37	74	-18.63	PK
4882	35.11	H	33.93	10.2	34.29	44.95	54	-9.05	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	46.36	V	33.93	10.2	34.29	56.20	74	-17.80	PK
4960	36.74	V	33.93	10.2	34.29	46.58	54	-7.42	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.97	H	33.93	10.2	34.29	54.81	74	-19.19	PK
4960	32.79	H	33.93	10.2	34.29	42.63	54	-11.37	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.01	V	33.95	10.18	34.26	55.88	74	-18.12	PK
4804	34.71	V	33.95	10.18	34.26	44.58	54	-9.42	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	48.16	H	33.95	10.18	34.26	58.03	74	-15.97	PK
4804	38.15	H	33.95	10.18	34.26	48.02	54	-5.98	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	42.56	V	33.93	10.2	34.29	52.40	74	-21.60	PK
4882	33.15	V	33.93	10.2	34.29	42.99	54	-11.01	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.40	H	33.93	10.2	34.29	53.24	74	-20.76	PK
4882	34.78	H	33.93	10.2	34.29	44.62	54	-9.38	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	46.19	V	33.93	10.2	34.29	56.03	74	-17.97	PK
4960	32.93	V	33.93	10.2	34.29	42.77	54	-11.23	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.04	H	33.93	10.2	34.29	51.88	74	-22.12	PK
4960	33.32	H	33.93	10.2	34.29	43.16	54	-10.84	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: 8DPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.04	V	33.95	10.18	34.26	56.91	74	-17.09	PK
4804	35.74	V	33.95	10.18	34.26	45.61	54	-8.39	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.99	H	33.95	10.18	34.26	54.86	74	-19.14	PK
4804	36.10	H	33.95	10.18	34.26	45.97	54	-8.03	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX Mid									
4882	41.72	V	33.93	10.2	34.29	51.56	74	-22.44	PK
4882	33.70	V	33.93	10.2	34.29	43.54	54	-10.46	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	44.46	H	33.93	10.2	34.29	54.30	74	-19.70	PK
4882	33.09	H	33.93	10.2	34.29	42.93	54	-11.07	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX High									
4960	46.00	V	33.93	10.2	34.29	55.84	74	-18.16	PK
4960	35.73	V	33.93	10.2	34.29	45.57	54	-8.43	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.60	H	33.93	10.2	34.29	53.44	74	-20.56	PK
4960	35.09	H	33.93	10.2	34.29	44.93	54	-9.07	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


## Conducted RF Spurious Emission

## Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

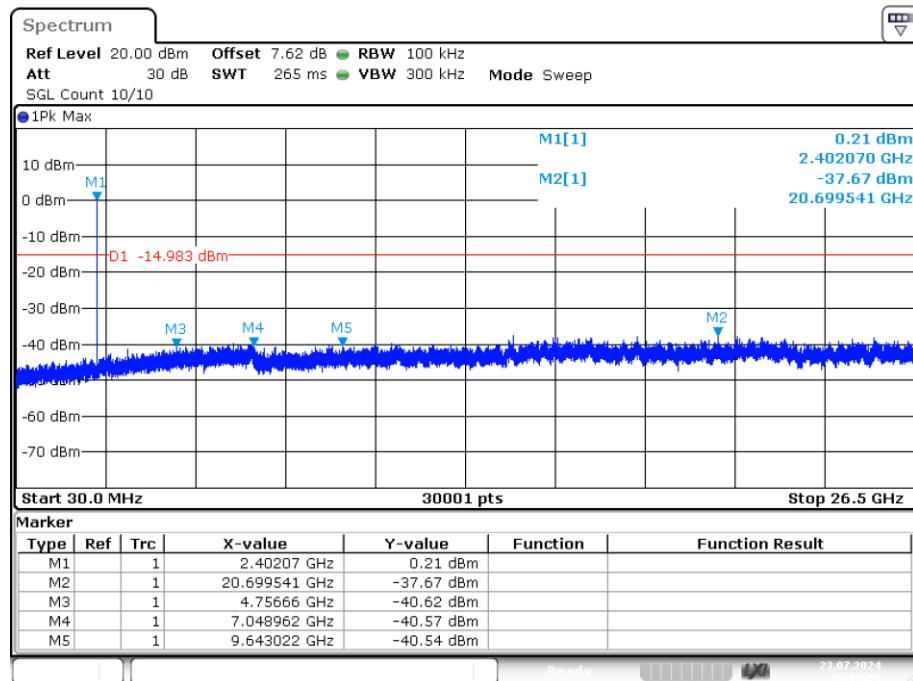


Date: 23.JUL.2024 15:16:02

## Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

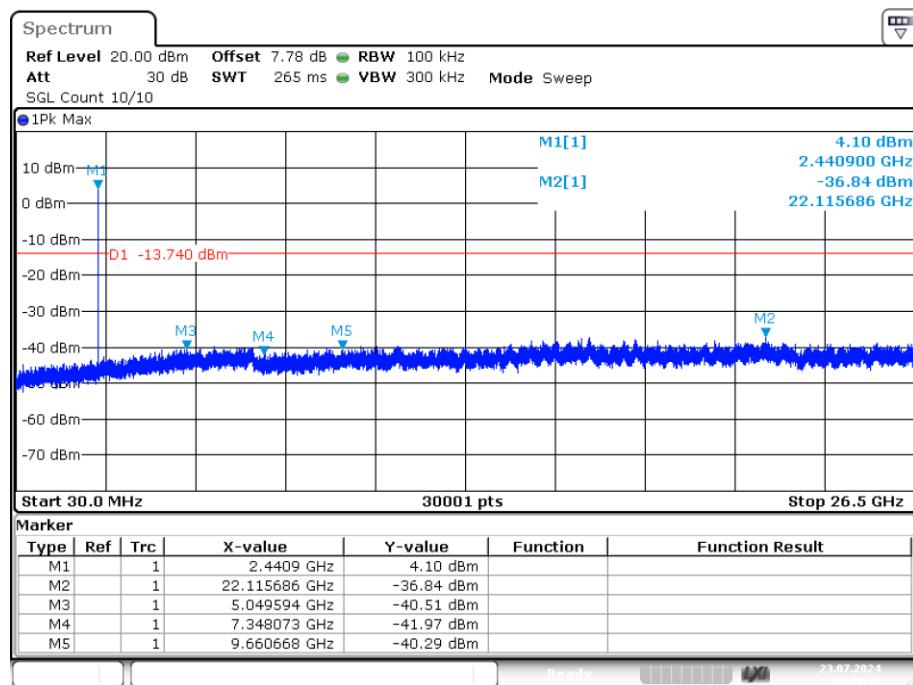


Date: 23.JUL.2024 15:18:37

## Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

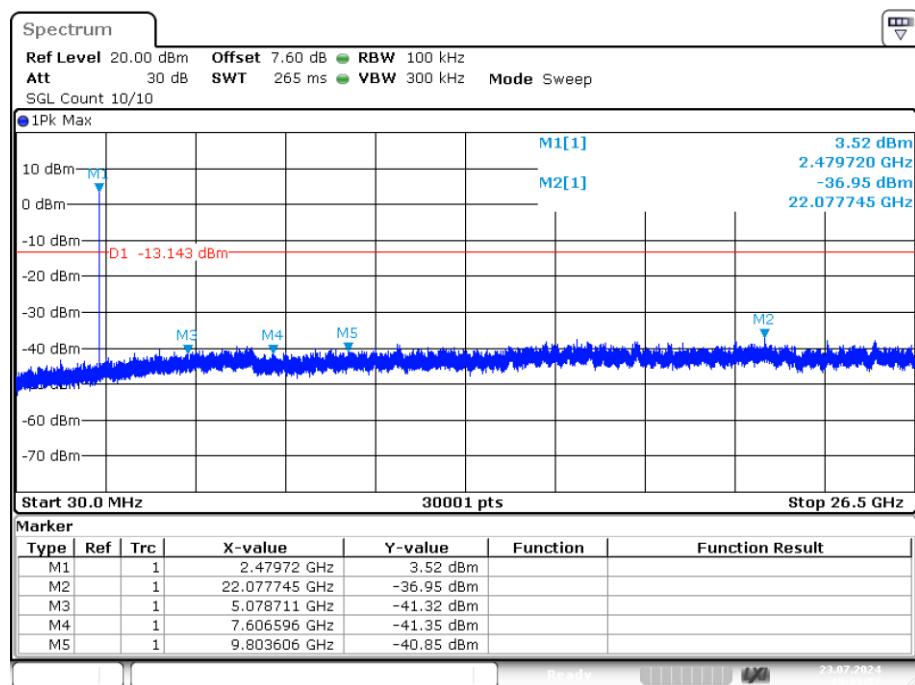


Date: 23.JUL.2024 15:25:56

## Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

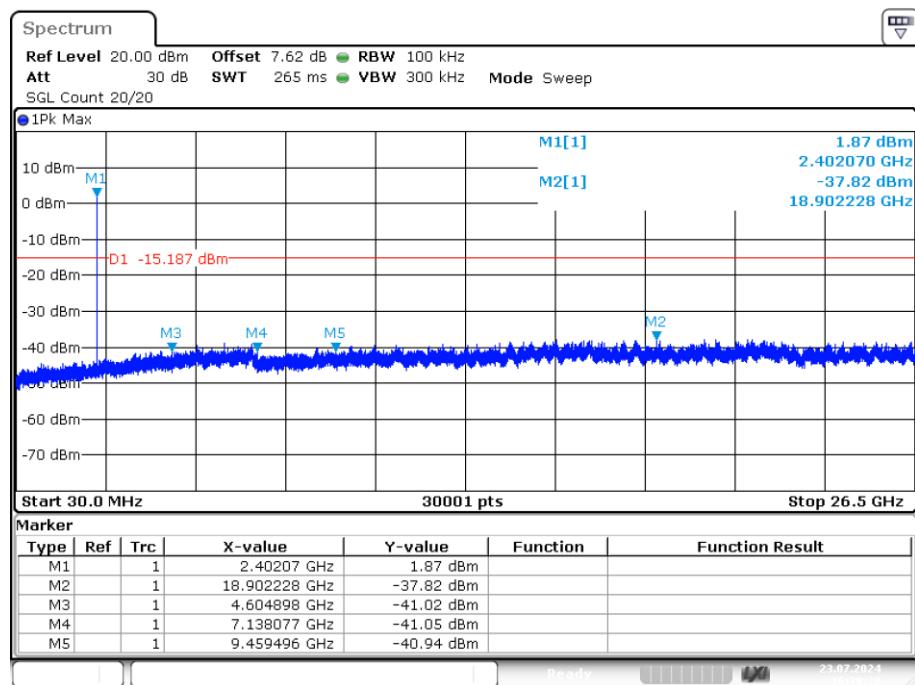


Date: 23.JUL.2024 16:38:22

## Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

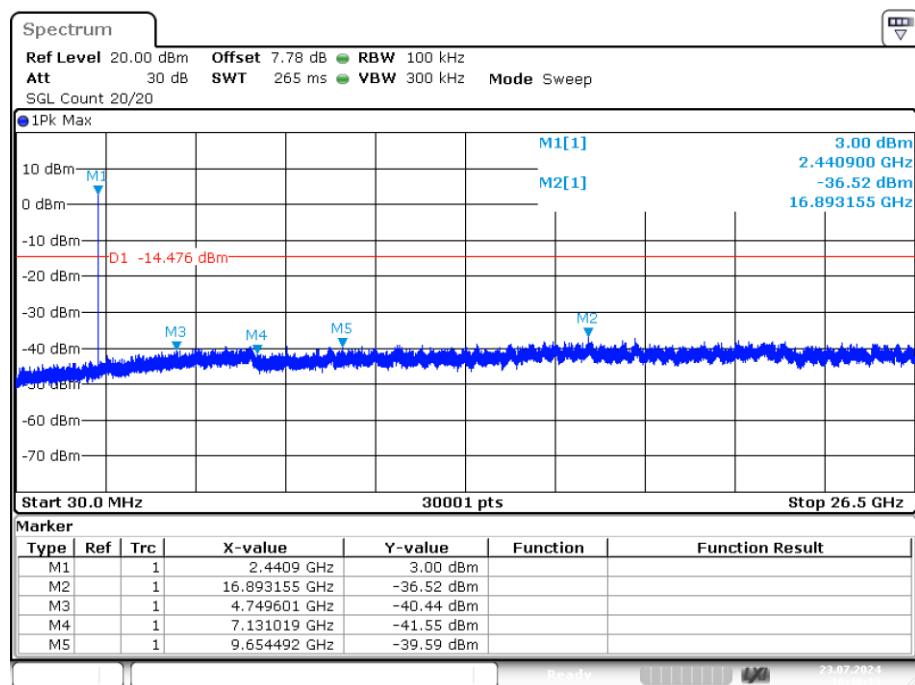


Date: 23.JUL.2024 16:40:40

## Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

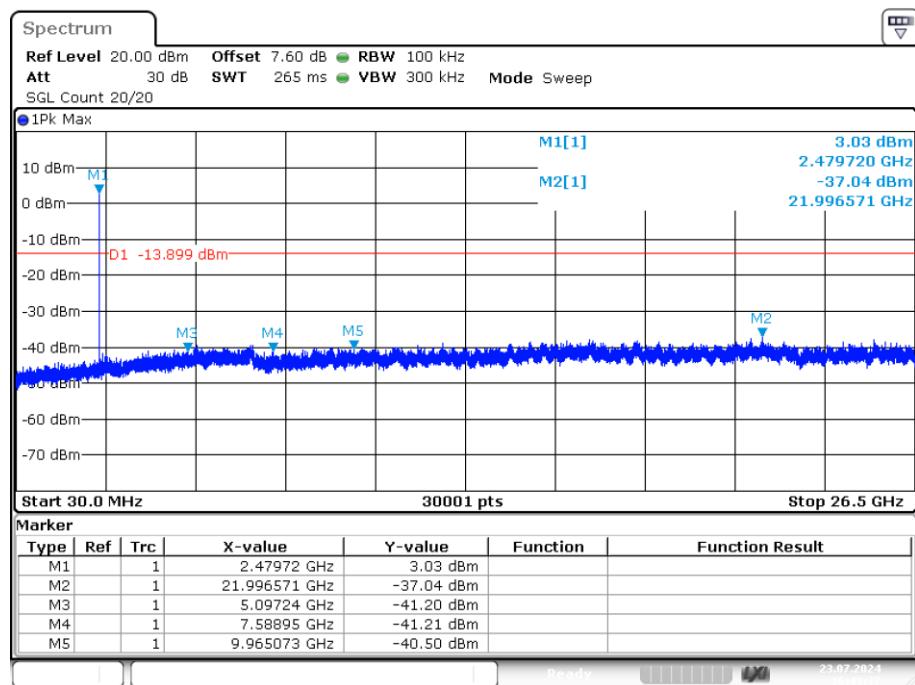


Date: 23.JUL.2024 16:43:37

## Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

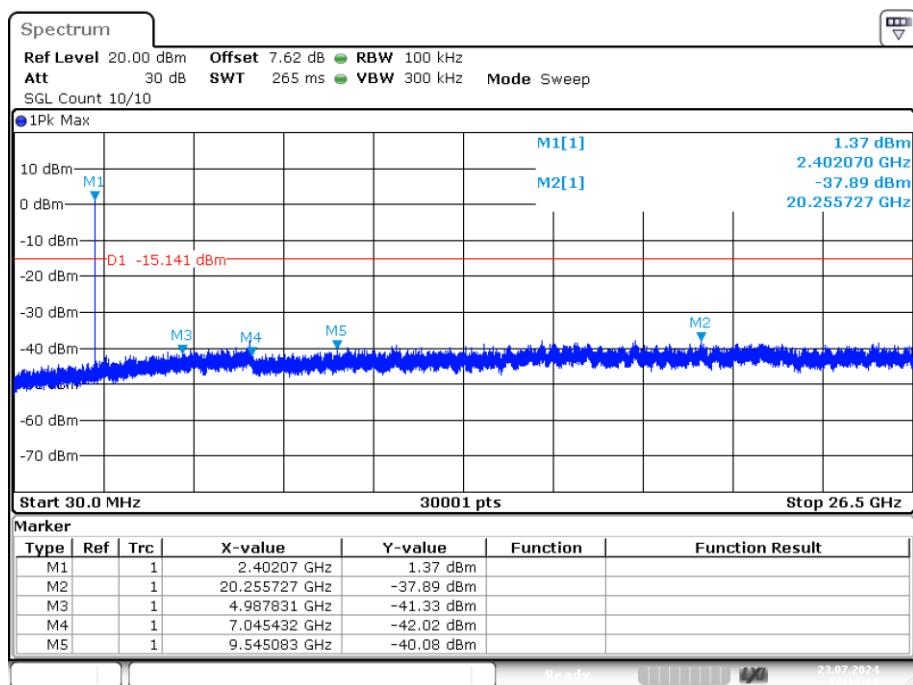


Date: 23.JUL.2024 17:12:09

## Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

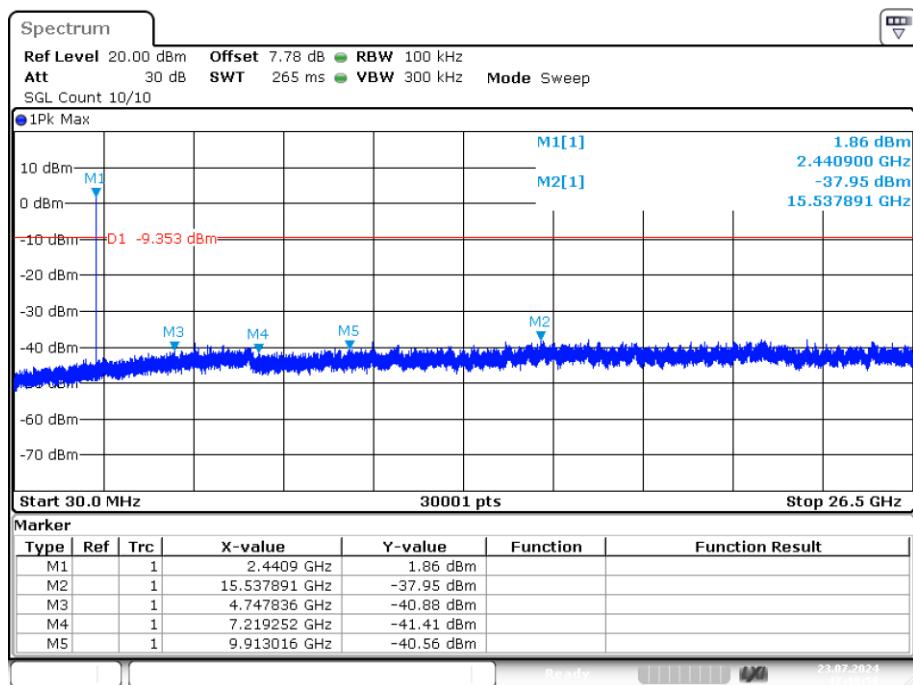

Date: 23.JUL.2024 17:18:58


## Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

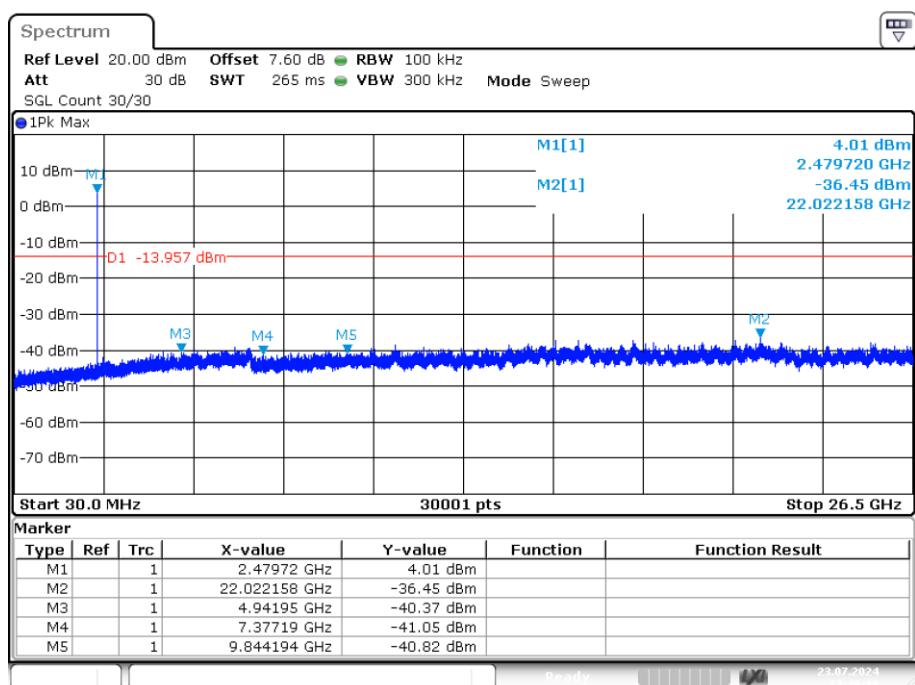

Date: 23.JUL.2024 17:26:18

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

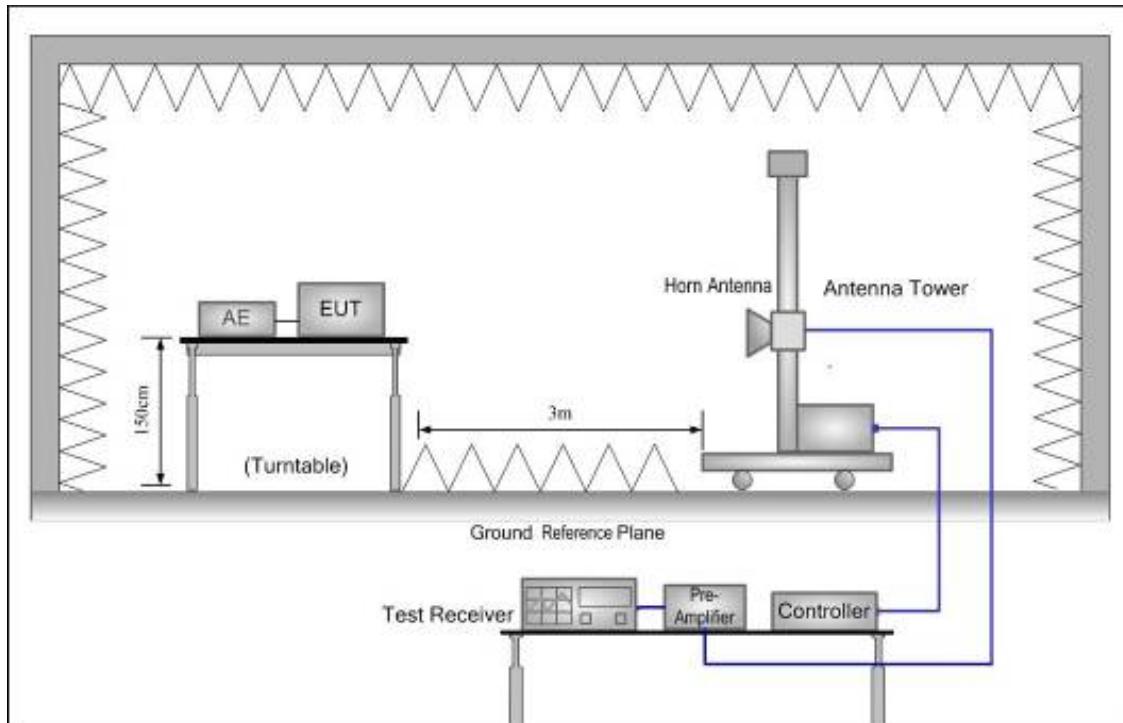

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 and RSS-GEN limits.


### 9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


### 9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

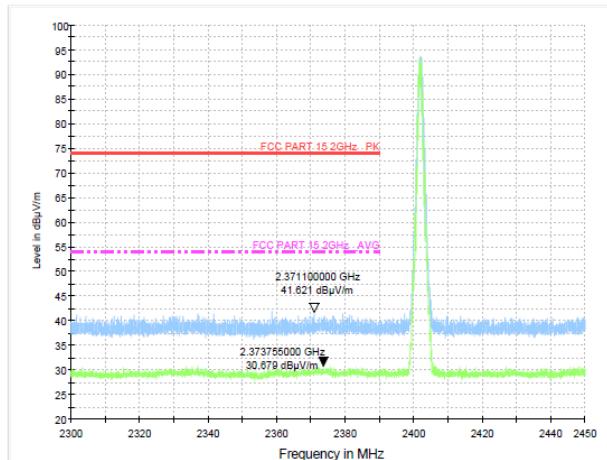


Test Mode: GFSK-High Hopping-off

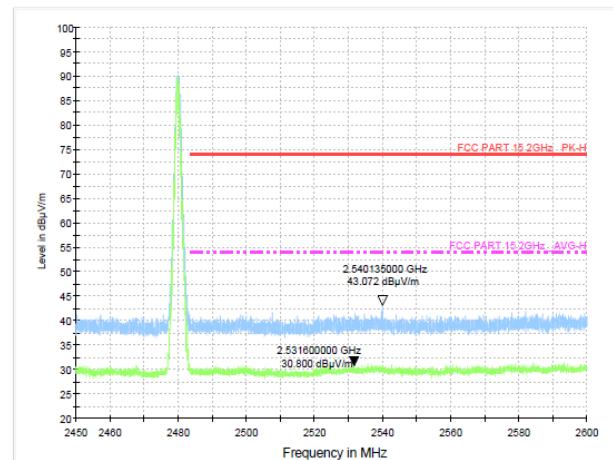

Test Mode: GFSK-Low Hopping-on




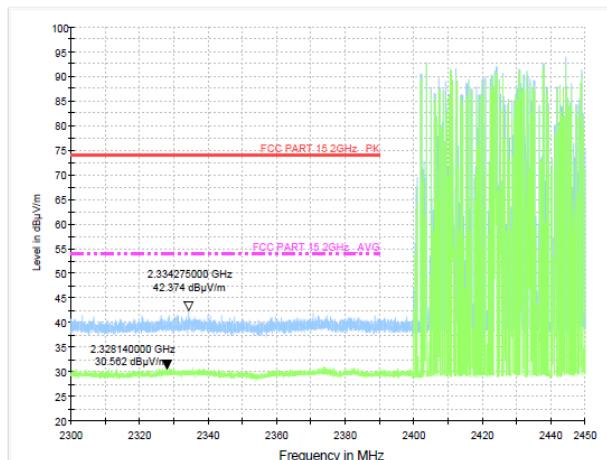


Test Mode: GFSK-High Hopping-on

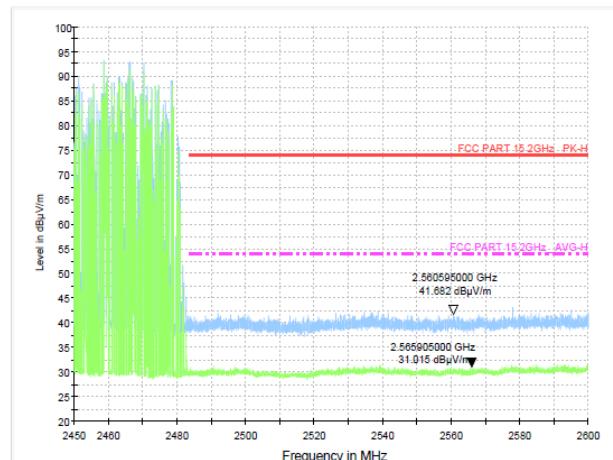

Note: 1. \*:Maximum data; x:Over limit; !:over margin.


2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

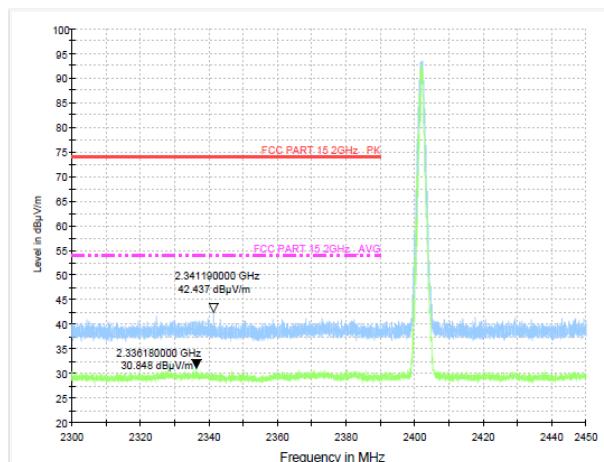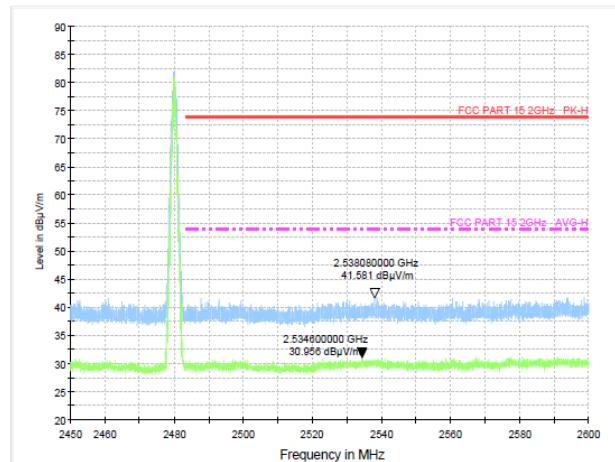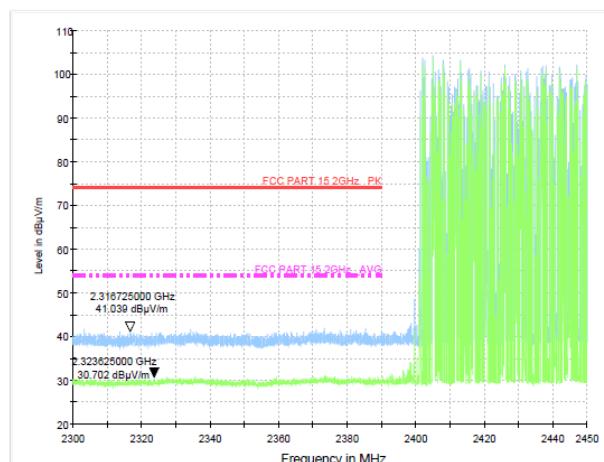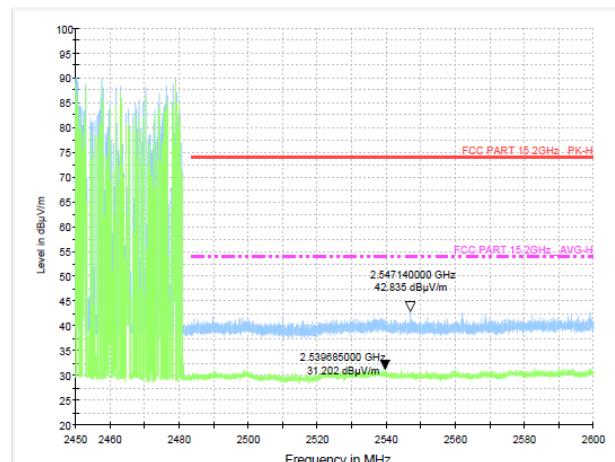Test Mode:  $\pi/4$  DQPSK-Low Hopping-offTest Mode:  $\pi/4$  DQPSK-High Hopping-offTest Mode:  $\pi/4$  DQPSK-Low Hopping-onTest Mode:  $\pi/4$  DQPSK-High Hopping-on


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

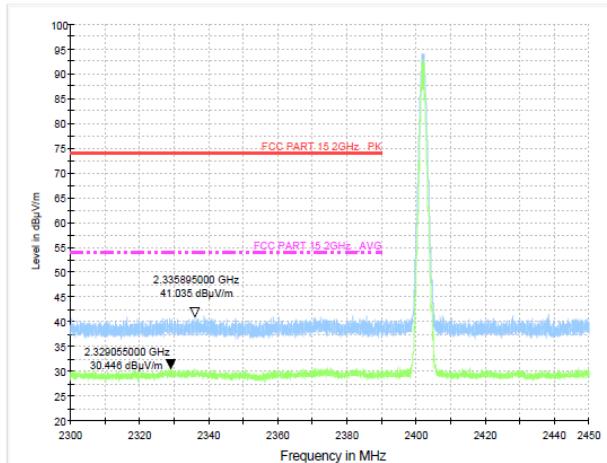


Test Mode: 8DPSK-High Hopping-off

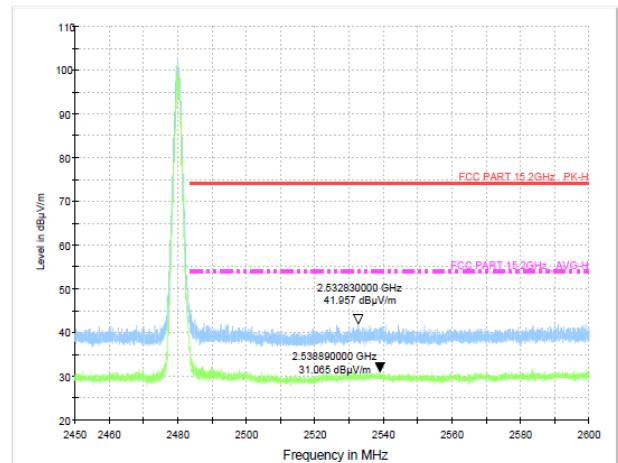

Test Mode: 8DPSK-Low Hopping-on

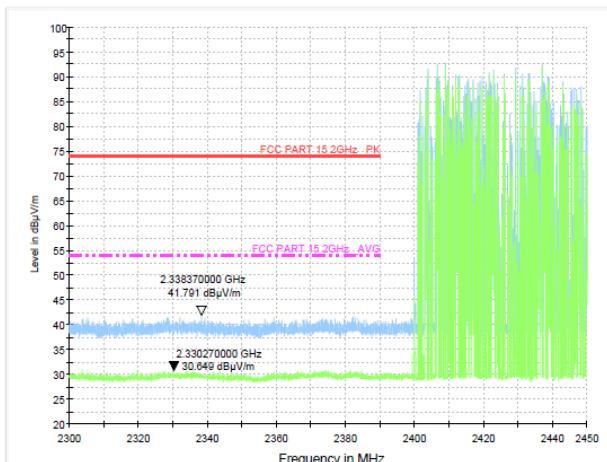

Test Mode: 8DPSK-High Hopping-on

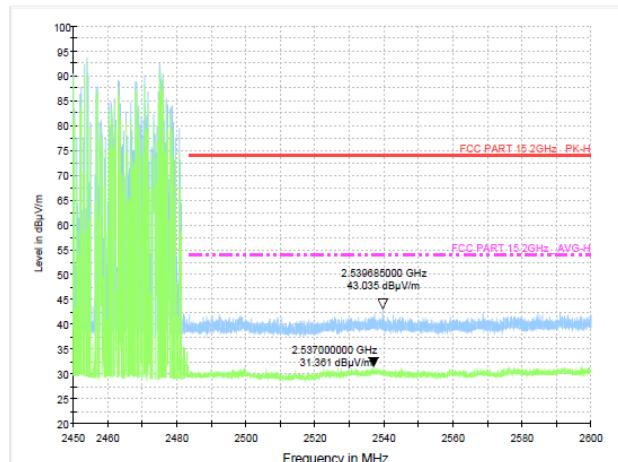



Note: 1. \*:Maximum data; x:Over limit; !:over margin.



2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

## Conducted Method

### GFSK Mode:

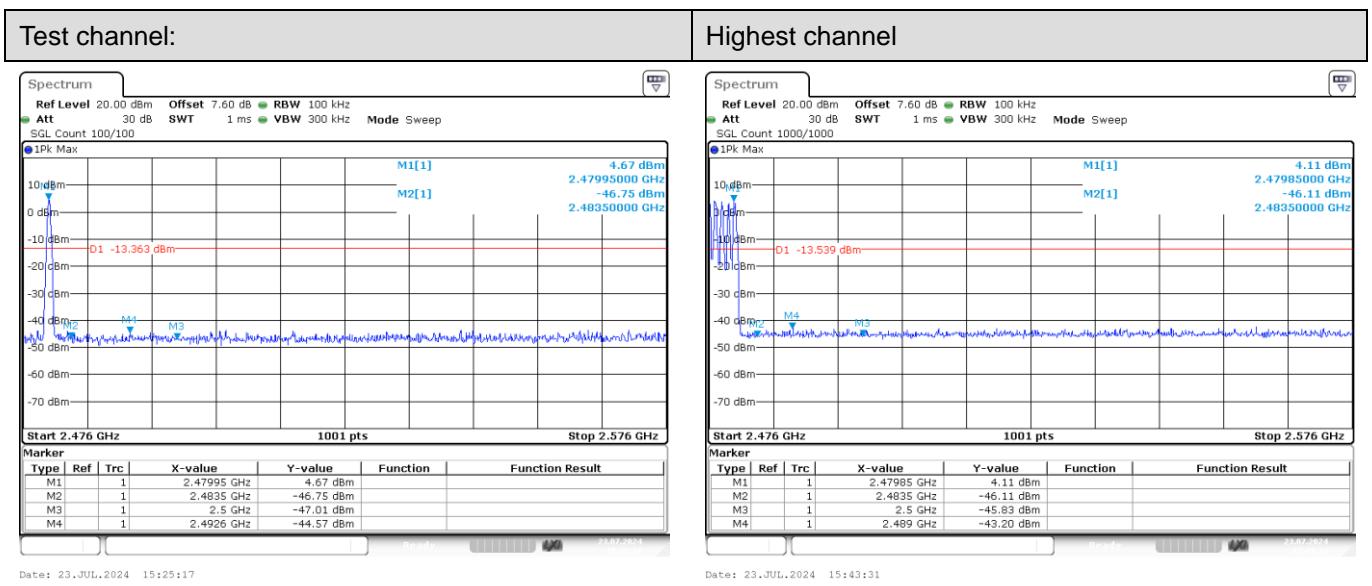


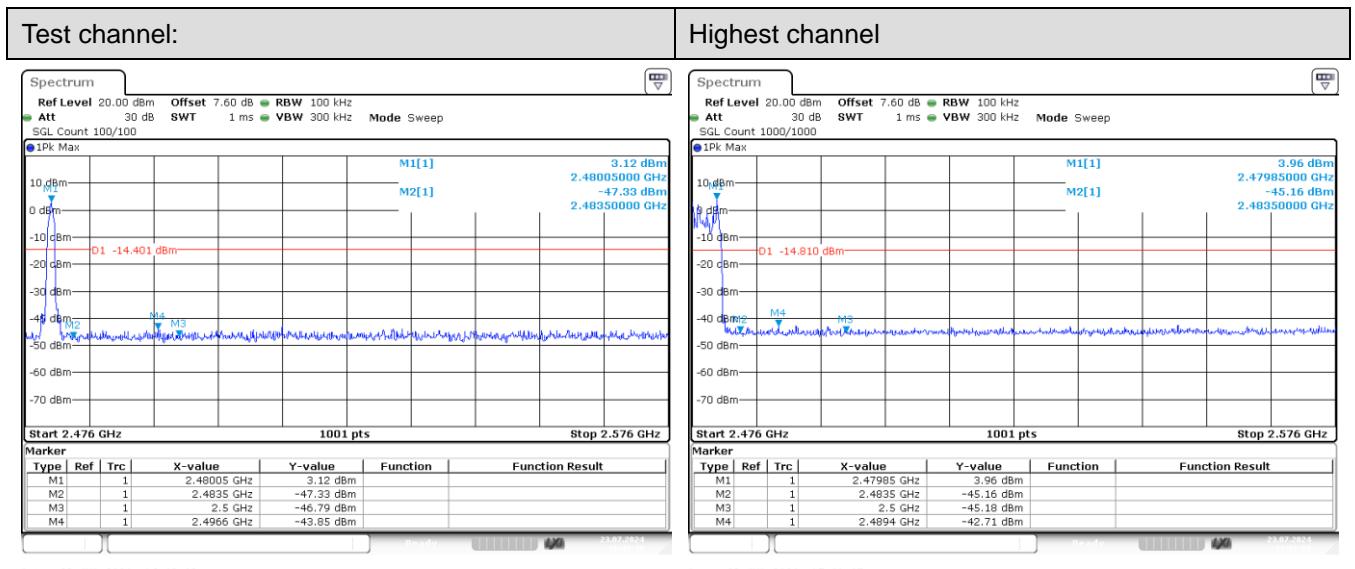**$\pi/4$ DQPSK Mode:****No-hopping mode****Hopping mode****No-hopping mode****Hopping mode**

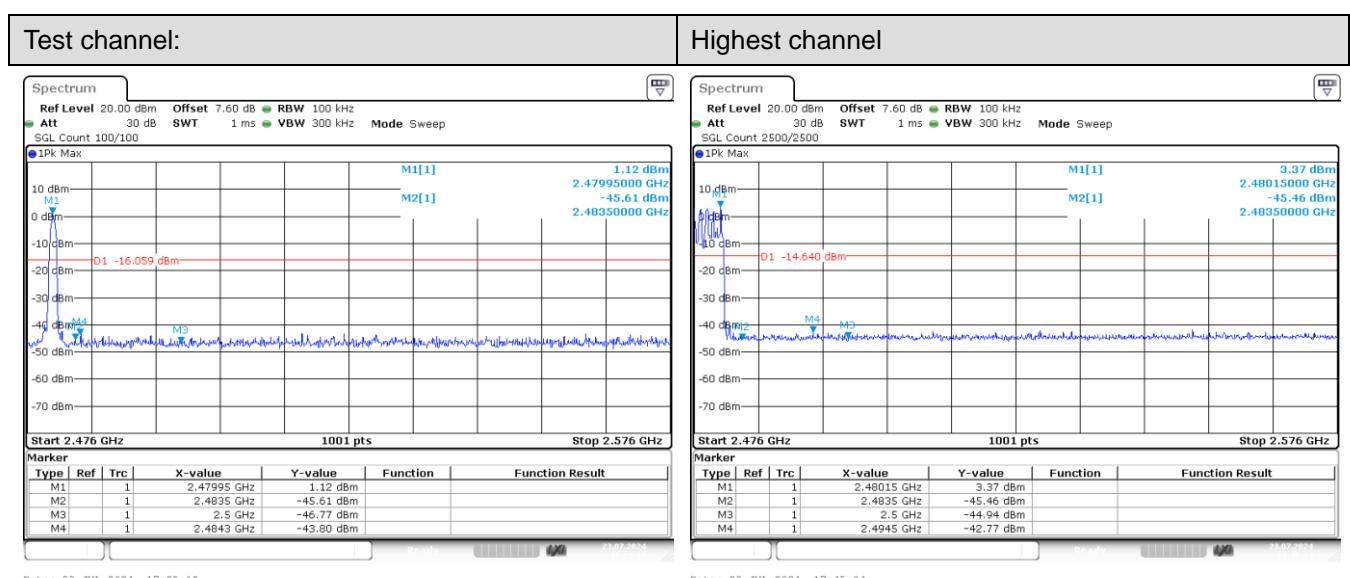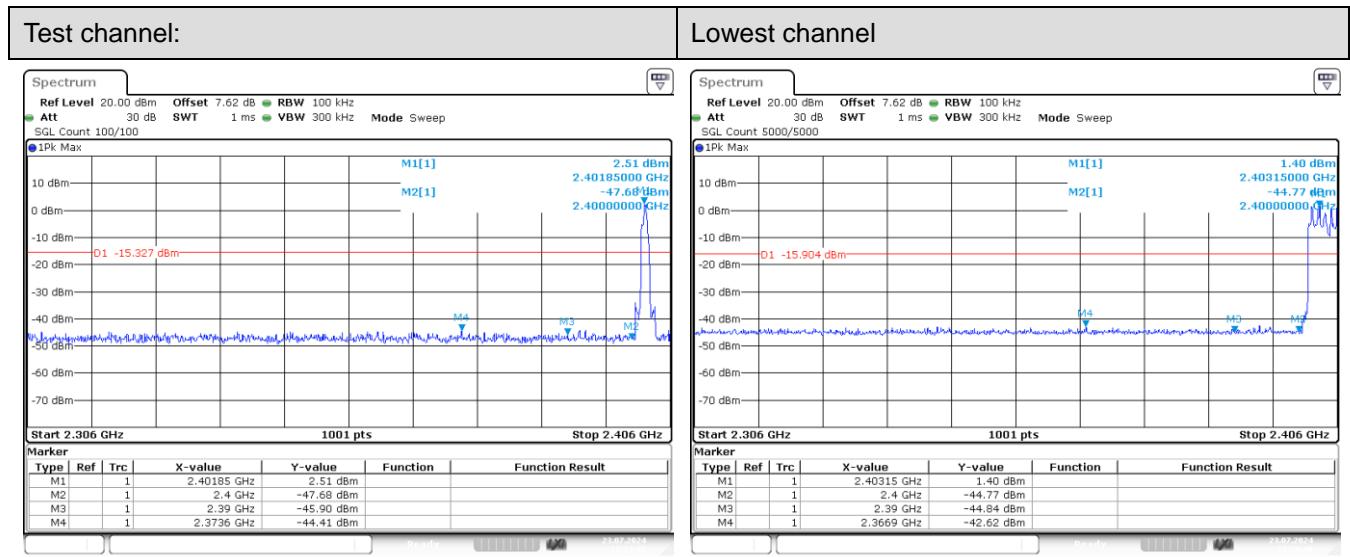**8DPSK Mode:**

## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

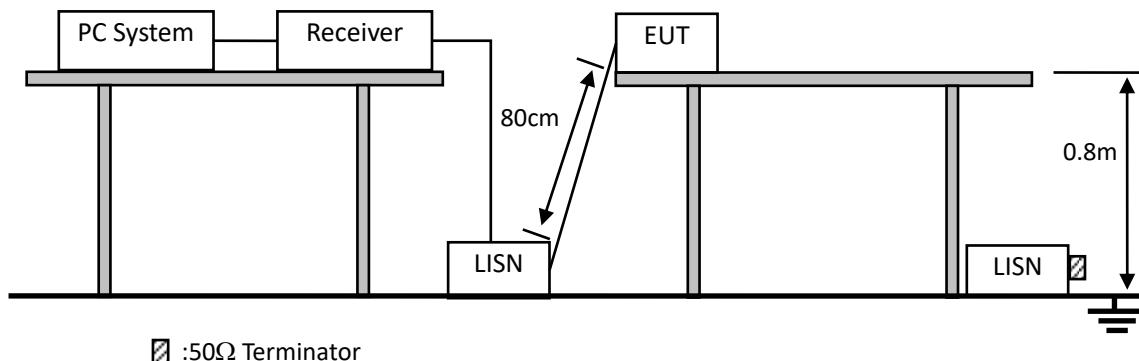

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

## Line:

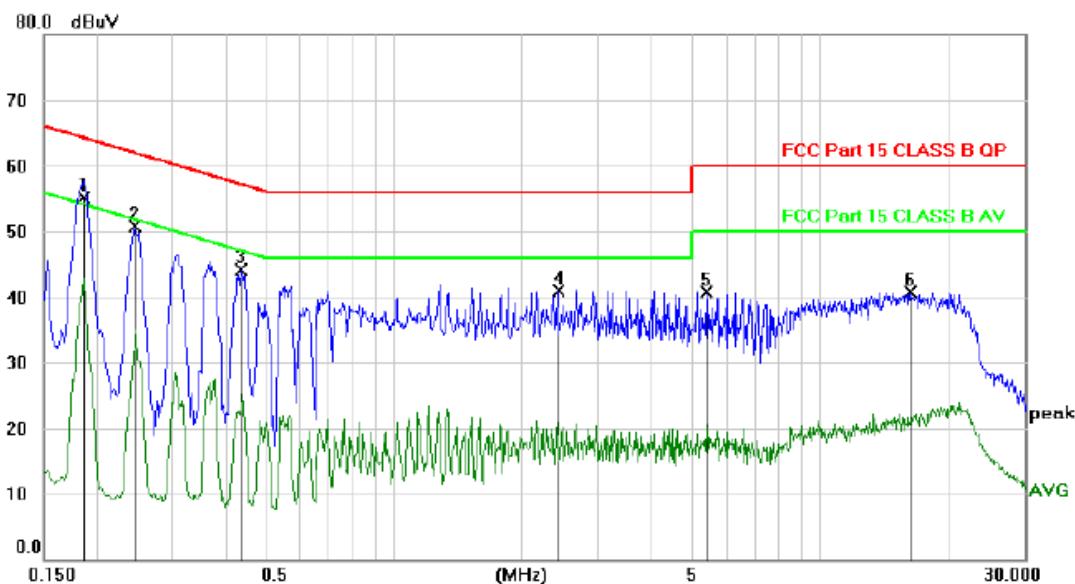


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1	*	0.1859	45.14	9.92	55.06	64.22	-9.16		QP
2		0.2459	40.68	9.97	50.65	61.89	-11.24		peak
3		0.4349	34.11	9.95	44.06	57.16	-13.10		peak
4		2.4148	30.96	9.90	40.86	56.00	-15.14		peak
5		5.3730	30.68	10.05	40.73	60.00	-19.27		peak
6		16.1726	30.44	10.36	40.80	60.00	-19.20		peak

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

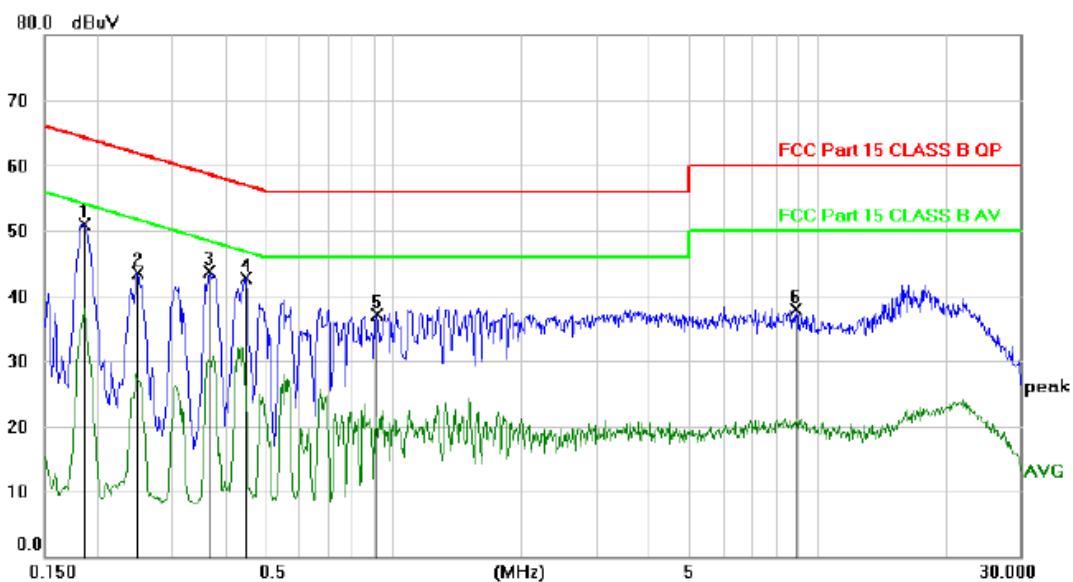**Neutral:**

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Comment
		dBuV	dB	dBuV	dB	Detector	
1 *	0.1859	41.06	9.92	50.98	64.22	-13.24	peak
2	0.2489	33.44	9.97	43.41	61.79	-18.38	peak
3	0.3689	33.78	9.95	43.73	58.53	-14.80	peak
4	0.4470	32.84	9.95	42.79	56.93	-14.14	peak
5	0.9090	27.08	9.97	37.05	56.00	-18.95	peak
6	8.8916	27.66	10.18	37.84	60.00	-22.16	peak

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

## 11. ANTENNA REQUIREMENTS

### 11.1. Limit



For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..

### 11.2. Result


The EUT antenna is FPC Antenna. It complies with the standard requirement.

## 12. TEST SETUP PHOTO

### 12.1. Photo of Radiated Emission test

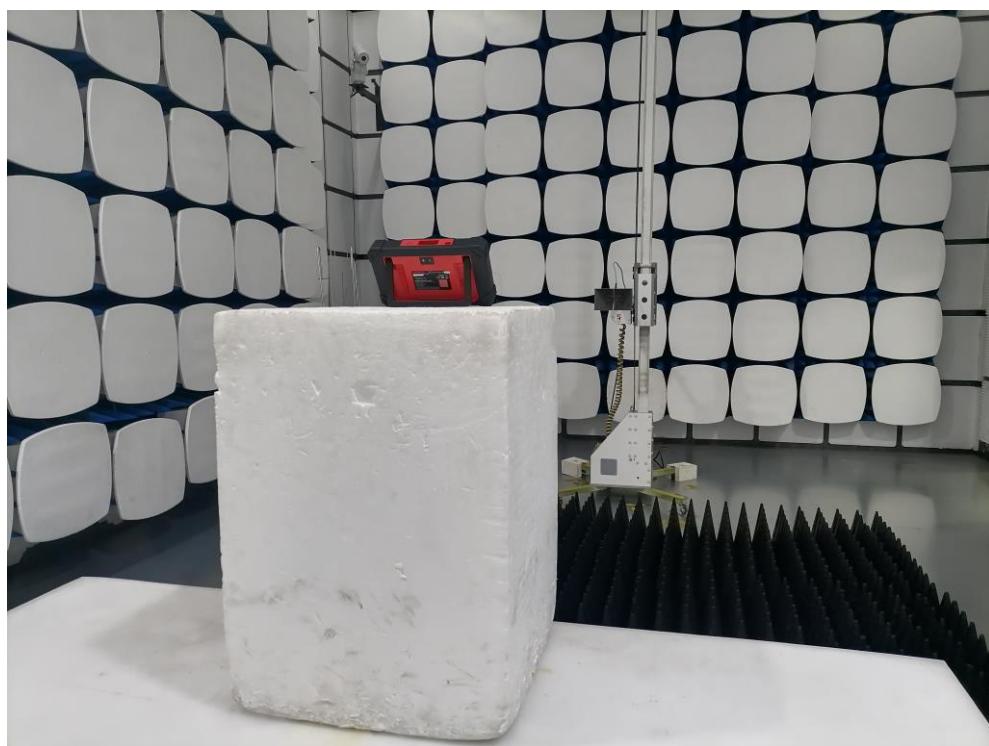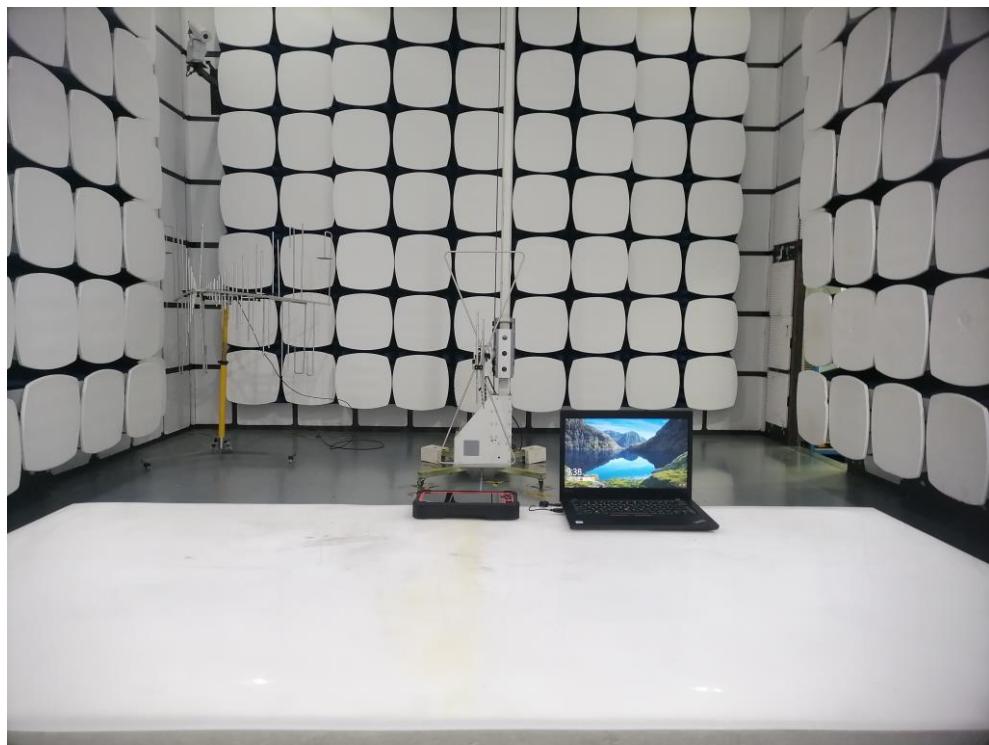

12.2.Photo of Conducted Emission test

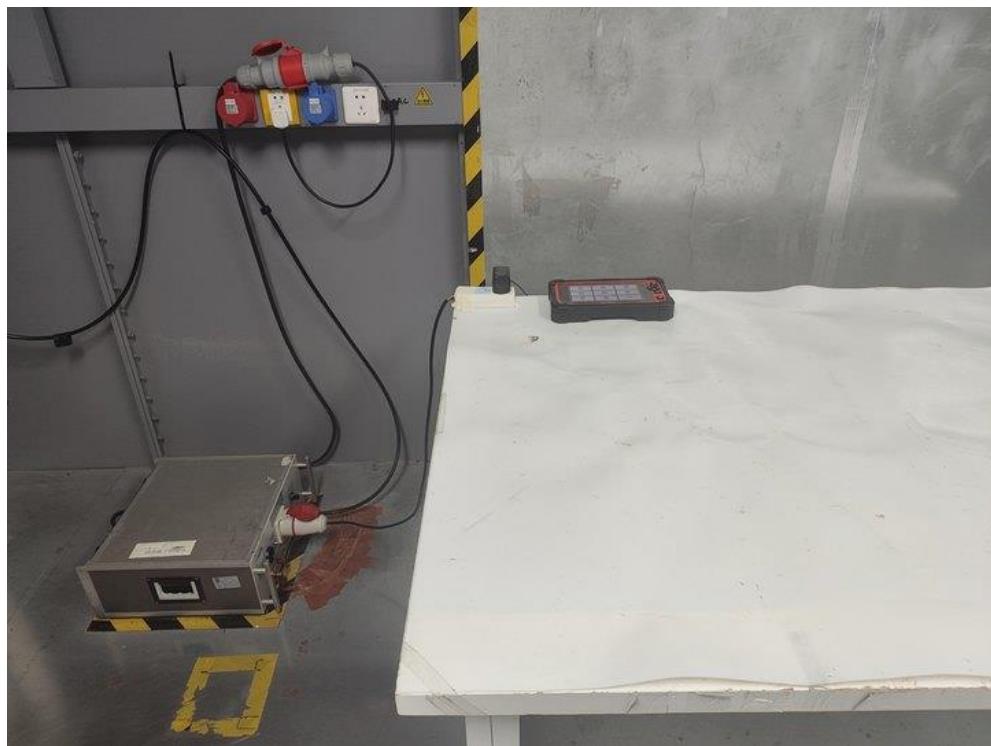

-----END OF REPORT-----