

TEST REPORT

Reference No. : WTS20S06036033W003 V1
FCC ID..... : XUJS4001
Applicant..... : Launch Tech Co., Ltd.
Address : Launch Industrial Park, North of Wuhe Rd. Banxuegang, Longgang, Shenzhen, China
Manufacturer : Launch Tech Co., Ltd.
Address : Launch Industrial Park, North of Wuhe Rd. Banxuegang, Longgang, Shenzhen, China
Product..... : Heavy duty / Medium duty / Light duty Vehicle Communication Interface
Model(s)..... : S4001
Standards..... : FCC CFR47 Part 15 E Section 15.407
Date of Receipt sample..... : 2020-06-11
Date of Test..... : 2020-06-12 to 2021-03-17
Date of Issue : 2021-03-17
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.


Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998


Fax: +86-769-2267 6828

Compiled by:

Approved by:



Andy Feng / Project Engineer



Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST.....	5
4.4 TEST FACILITY.....	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 DESCRIPTION OF SUPPORT UNITS	8
5.3 MEASUREMENT UNCERTAINTY	8
5.4 TEST EQUIPMENT CALIBRATION	8
6 TEST SUMMARY	9
7 RADIATED EMISSIONS.....	10
7.1 EUT OPERATION.....	10
7.2 TEST SETUP	11
7.3 SPECTRUM ANALYZER SETUP	12
7.4 TEST PROCEDURE	13
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.6 SUMMARY OF TEST RESULTS	14
8 DUTY CYCLE.....	16
8.1 SUMMARY OF TEST RESULTS	17
9 BAND EDGE	19
9.1 TEST PRODUCE	19
9.2 TEST RESULT	20
10 6 DB BANDWIDTH.....	21
10.1 TEST PROCEDURE:.....	21
10.2 TEST RESULT:	21
5805 MHz	21
11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	23
11.1 TEST PROCEDURE:.....	23
11.2 TEST RESULT:	24
12 CONDUCTED OUTPUT POWER	26
12.1 TEST PROCEDURE:.....	26
12.2 TEST RESULT :	27
13 POWER SPECTRAL DENSITY	28
13.1 TEST PROCEDURE:.....	28
13.2 TEST RESULT:	29
14 FREQUENCY STABILITY.....	31
14.1 TEST PROCEDURE:.....	31
14.2 TEST RESULT:	32
15 ANTENNA REQUIREMENT	33
16 PHOTOGRAPHS OF TEST SETUP AND EUT.....	34

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS20S06036 033W003	2020-06-11	2020-06-12 to 2021-03-15	2021-03-16	original	-	Replaced
WTS20S06036 033W003 V1	2020-06-11	2020-06-12 to 2021-03-17	2021-03-17	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Heavy duty / Medium duty / Light duty Vehicle Communication Interface
Model(s):	S4001
Model Description:	N/A
Wi-Fi Specification:	5G-802.11a
Bluetooth Version:	Bluetooth v4.2 with BLE
Hardware Version:	V1.00.000
Software Version:	V1.0

4.2 Details of E.U.T.

Operation Frequency:	802.11a: 5805MHz
Max. RF output power:	8.28dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	2.0dBi
Ratings:	Input: 9-36V , 0.5A max

4.3 Channel List

For 802.11a:

channel	Frequency(MHz)
161	5805

Note: The device only supports 802.11a mode and only runs on one channel 161.

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions (SAEMC)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	1Year
2	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25	1Year
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-11-13	1Year
					2020-08-26	1Year
4	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2020-04-20	1Year
5	Spectrum Analyzer	R&S	FSP40	100501	2019-11-13	1Year
					2020-07-30	1Year
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	335	2019-11-13	1Year
					2020-07-30	1Year
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2019-11-13	1Year
					2020-07-30	1Year
8	Cable	ZT40-2.92J-2.92J-2.0M	10MHz-40GHz	17100919	2020-04-27	1Year
3m Semi-anechoic Chamber for Radiation Emissions (TDK)						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-20	1Year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25	1Year
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2020-05-06	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2020-04-20	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20	1Year
6	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2020-04-20	1Year

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	N/A
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

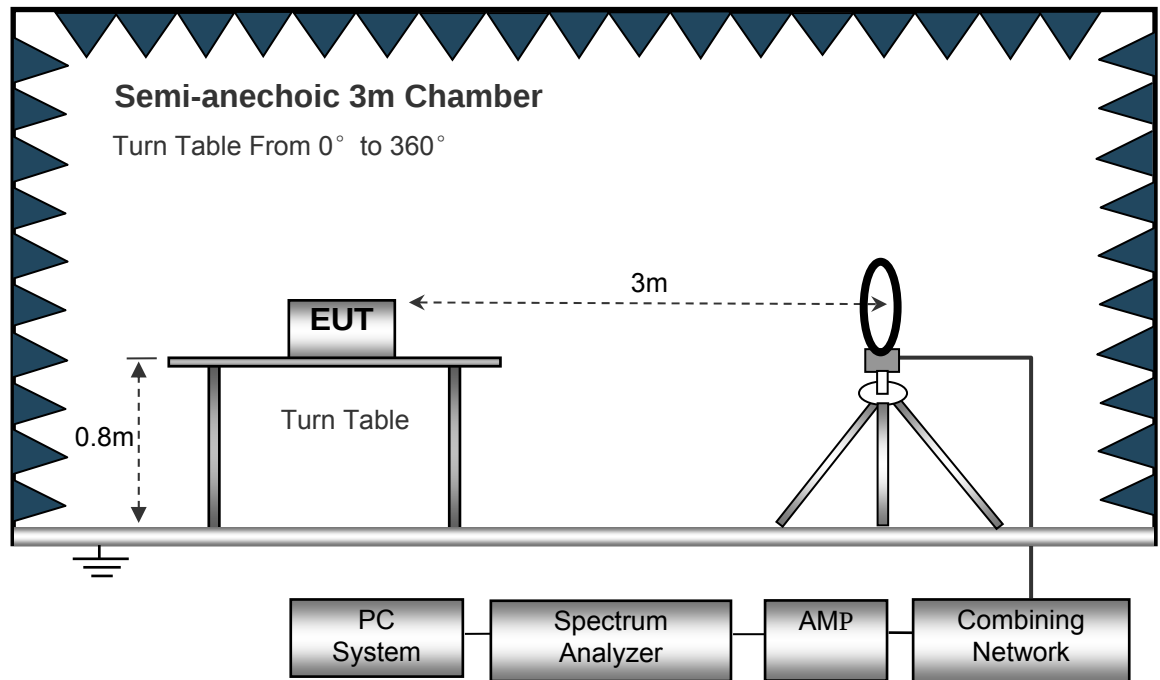

The test setup for emission measurement from 30 MHz to 1 GHz.

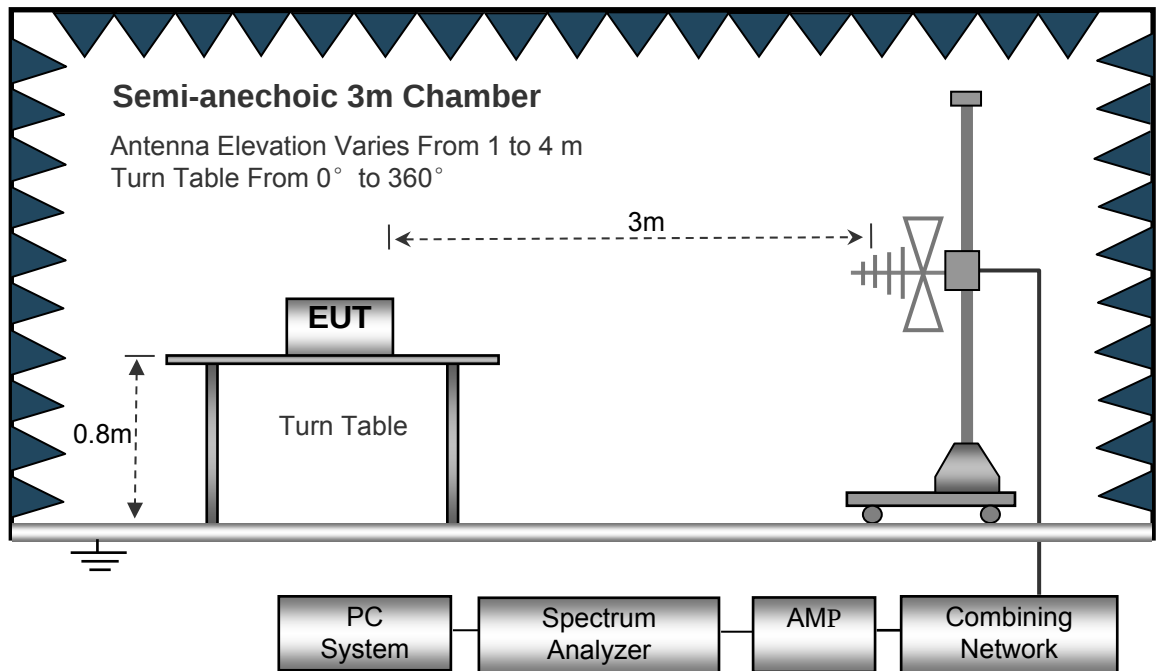

The test setup for emission measurement above 1 GHz.

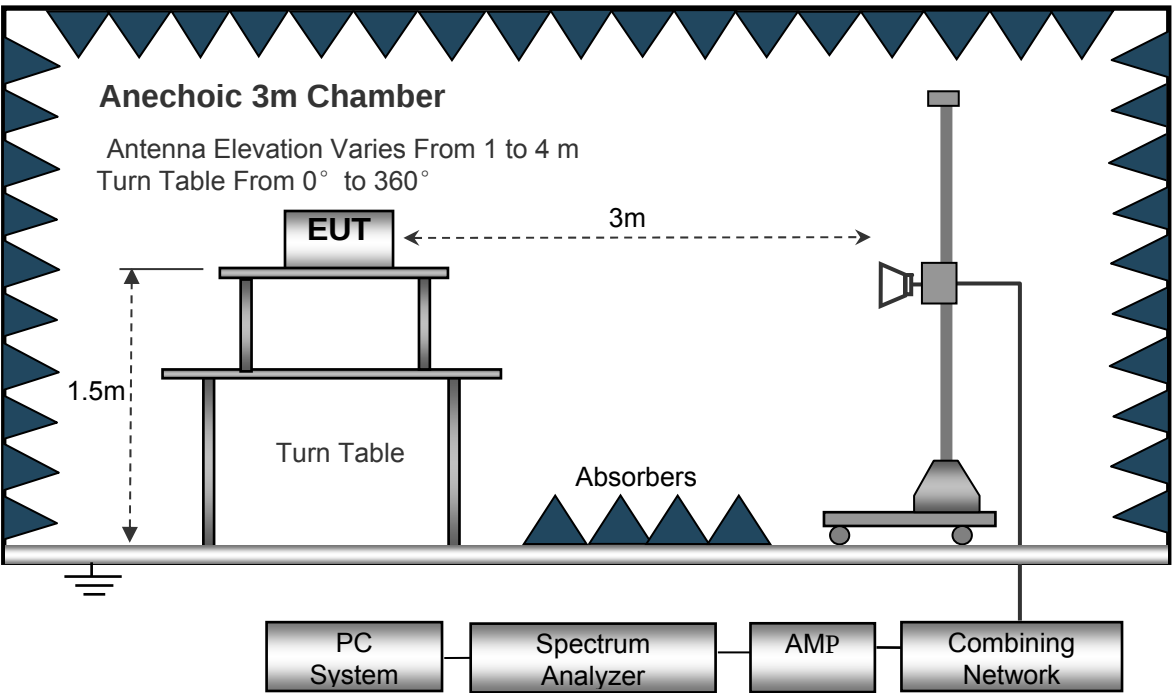

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-3 802.11a 5805MHz							
6.021	24.57	QP	21.84	40.00	6.41	29.54	-23.13
15.730	25.15	QP	21.35	40.00	6.50	29.54	-23.04
25.680	25.69	QP	20.67	40.00	6.36	29.54	-23.18

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-3 Channel 5805MHz									
223.45	39.62	QP	156	2.0	H	-11.62	28.00	46.00	-18.00
223.45	34.50	QP	251	1.2	V	-11.62	22.88	46.00	-23.12
4500.86	51.19	PK	170	1.9	H	-2.06	49.13	74.00	-24.87
4500.86	47.97	Ave	170	1.9	H	-2.06	45.91	54.00	-8.09
11610.00	40.24	PK	175	1.4	H	5.93	46.17	68.20	-22.03
11610.00	35.42	Ave	175	1.4	H	5.93	41.35	54.00	-12.65

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

8 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS

8.1 Summary of Test Results

802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
161	100	100	100

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz channel

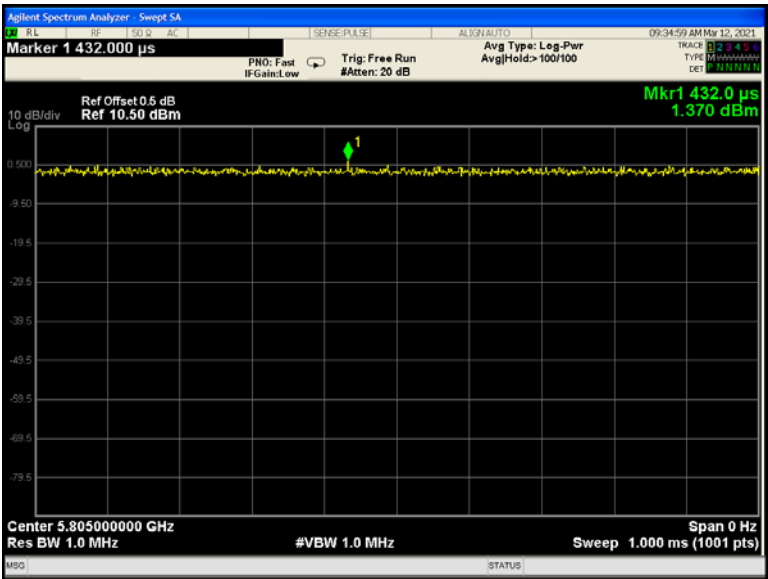

9 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
Test Result:	PASS


9.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


9.2 Test Result

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz Band edge-left side

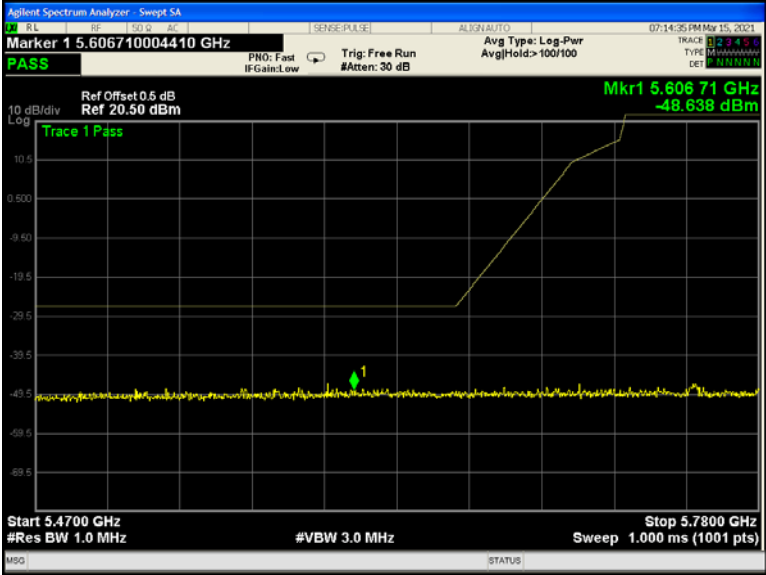

802.11a U-NII-3 5805 MHz Band edge-right side

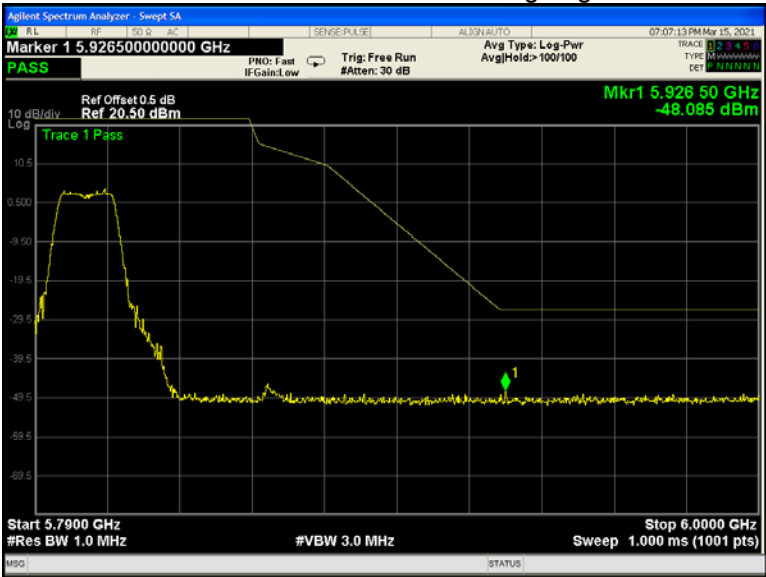

10 6 dB Bandwidth

Test Requirement: FCC CFR47 Part 15 Section 15.407(e)
KDB662911 D01 Multiple Transmitter Output v02r01
Test Method: KDB789033 D02 General U-NII Test Procedures New Rules v02r01
Section C
Test Limit: ≥ 500 kHz
Test Result: PASS

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


10.2 Test Result:

5805 MHz

Band	Operation mode	6 dB Bandwidth (MHz)
U-NII-3	802.11a	16.47

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz channel

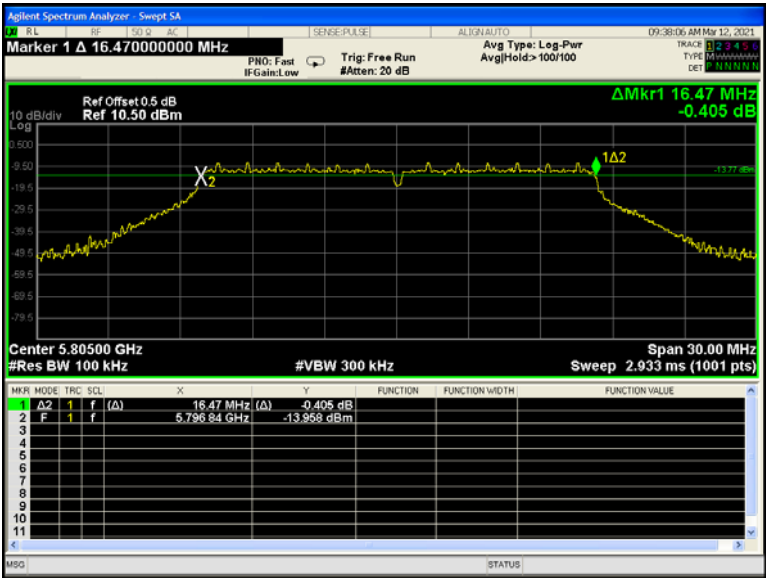

11 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW

11.2 Test Result:

Band	Operation mode	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
U-NII-3	802.11a	21.43	16.748

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz channel

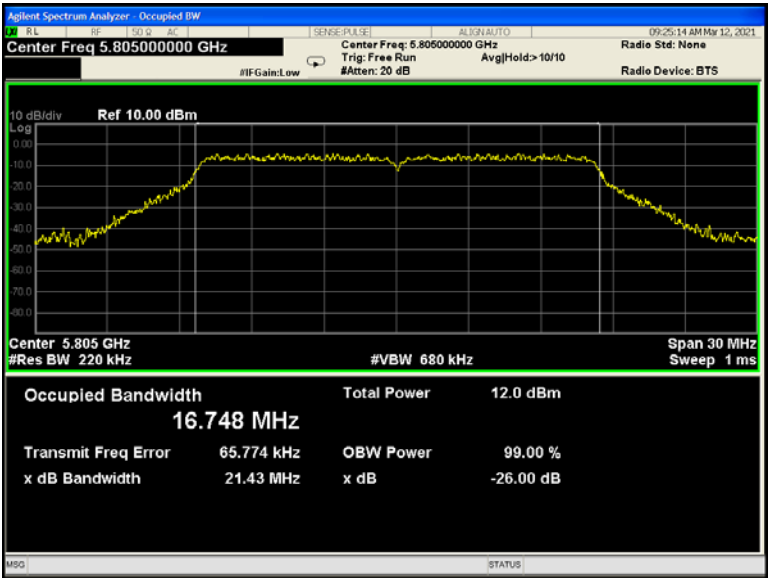

12 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section E
Test Limit:	U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


12.2 Test Result :

Band	Operation mode	Conducted Output Power (dBm)
		5805 MHz
U-NII-3	802.11a	8.28

* All transmit signals are completely uncorrelated with each other, Directional gain = G_{ANT} which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz channel

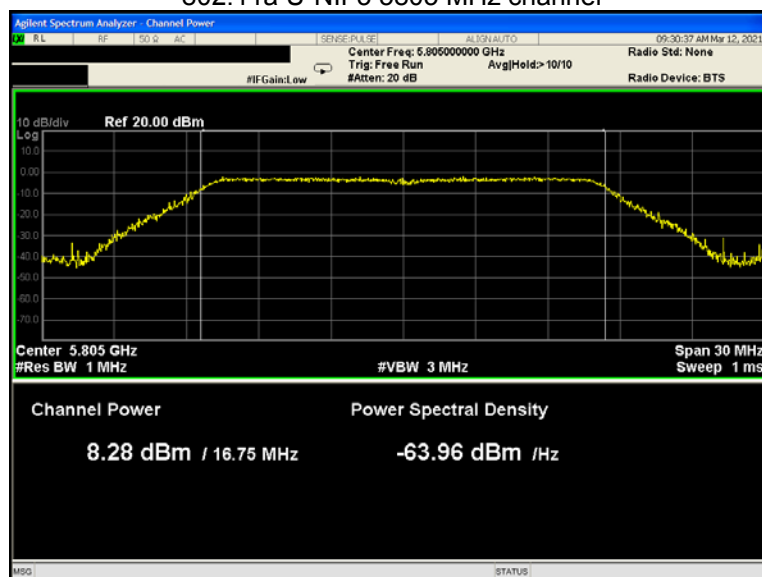

13 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section F
Test Limit:	$\leq 30.00\text{dBm}/500\text{KHz}$ for Operation in the U-NII-3(5725MHz- 5850MHz)of device
Test Result:	PASS

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
U-NII-1
RBW = 1MHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
U-NII-3
RBW = 510KHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Band	Operation mode	Power Spectral Density (dBm/MHz)
		5805 MHz
U-NII-3	802.11a	0.178
	Limit	$\leq 30.00 \text{ dBm/MHz}$

* All transmit signals are completely uncorrelated with each other, Directional gain = G_{ANT} which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:

802.11a U-NII-3 5805 MHz channel

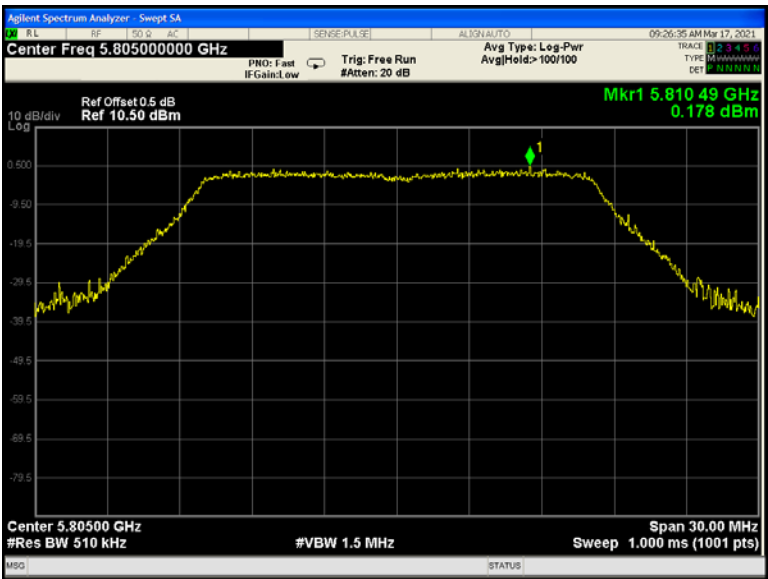

14 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

14.1 Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
EUT have transmitted absence of unmodulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
2. Extreme temperature rule is $-15^{\circ}\text{C} \sim 45^{\circ}\text{C}$.

14.2 Test Result:

U-NII-3 Test Frequency:5805MHz				
Temperature (°C)	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	12	/	/	/
45		1919	2.2938	20
30		1911	2.2842	20
20		1915	2.2890	20
10		1923	2.2986	20
0		1907	2.2795	20
-10		1908	2.2807	20
-15		1914	2.2878	20
-30		/	/	/
20	10.8	1918	2.2926	20
20	13.2	1906	2.2783	20

15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-S4001-Photos.

=====End of Report=====