

Königswinkel 10
32825 Blomberg, Germany
Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10
office@phoenix-testlab.de
www.phoenix-testlab.de

Test Report

Report Number:

F201061E3

Equipment under Test (EUT):

TrackSense LyoPro Reader Station

Applicant:

Ellab A/S

Manufacturer:

Ellab A/S




Deutsche
Akkreditierungsstelle
D-PL-17186-01-01
D-PL-17186-01-02
D-PL-17186-01-03

References

- [1] **ANSI C63.10-2013**, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC CFR 47 Part 15**, Radio Frequency Devices
- [3] **558074 D01 15.247 Meas Guidance v05r02 (April 2019)**, GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
- [4] **RSS-247, Issue 2 (2017-02)** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- [4] **RSS-Gen, Issue 5 (2019-03)** General Requirements for Compliance of Radio Apparatus

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

Tested and written by:	Bernward ROHDE	 Signature	12.10.2020
	Name		Date
Reviewed and approved by:	Paul NEUFELD	 Signature	12.10.2020
	Name		Date

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 Identification	6
1.1 Applicant	6
1.2 Manufacturer.....	6
1.3 Test Laboratory.....	6
1.4 EUT (Equipment under Test).....	7
1.5 Technical Data of Equipment.....	8
1.5.1 Ancillary Equipment / Equipment used for testing	9
1.6 Dates.....	9
2 Operational States.....	10
2.1 Description of function of the EUT	10
2.2 The following states were defined as the operating conditions	10
2.2.1 Radio test	10
2.2.2 Operation modes.....	10
3 Additional Information.....	11
4 Overview	12
5 Results	13
5.1 Duty cycle	13
5.1 Maximum conducted output power.....	13
5.1.1 Method of measurement (conducted)	13
5.1.2 Test results.....	14
5.1 DTS Bandwidth / 99% Bandwidth.....	16
5.1.1 Method of measurement (conducted)	16
5.1.2 Test results.....	17
5.2 Power spectral density.....	19
5.2.1 Method of measurement (conducted)	19
5.2.2 Test results.....	20
5.3 Band edge.....	22
5.3.1 Method of measurement (conducted)	22
5.3.2 Method of measurement (radiated).....	22
5.3.3 Test results.....	23
5.3.3.1 Band-edge testing (unrestricted bands; conducted):	23
5.3.3.2 Band-edge testing (restricted bands; radiated):	24
5.4 Maximum unwanted emissions Maximum unwanted emissions	25
5.4.1 Method of measurement (radiated).....	25

5.4.2 Test results (radiated)	32
5.4.2.1 Test results (9 kHz – 30 MHz).....	32
5.4.2.2 Test results (30 MHz – 1 GHz).....	33
5.4.2.3 Test results (above 1 GHz)	36
5.5 Conducted emissions on power supply lines (150 kHz to 30 MHz)	41
5.5.1 Method of measurement	41
5.5.2 Test results (conducted emissions on power supply lines).....	42
5.5.2.1 Test results with EUT supplied via AC/DC Power Adaptor	42
6 Test Equipment used for Tests.....	44
7 Test site Validation	45
8 Report History	45
9 List of Annexes.....	45

1 Identification

1.1 Applicant

Name:	Ellab A/S
Address:	Trollesmindealle 25, 3400 Hilleroed
Country:	Denmark
Name for contact purposes:	Mr. James JACOBSSON
Phone:	+45 4452 0515
Fax:	-
eMail Address:	jja@ellab.com
Applicant represented during the test by the following person:	-

1.2 Manufacturer

Name:	Ellab A/S
Address:	Trollesmindealle 25, 3400 Hilleroed
Country:	Denmark
Name for contact purposes:	Mr. James JACOBSSON
Phone:	+45 4452 0515
Fax:	-
eMail Address:	jja@ellab.com
Applicant represented during the test by the following person:	-

1.3 Test Laboratory

The tests were carried out by:

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Germany

Accredited by Deutsche Akkreditierungsstelle GmbH (DakkS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-05 and D-PL-17186-01-06, FCC Test Firm Accreditation designation number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

1.4 EUT (Equipment under Test)

EUT	
Test object: *	Wireless Data Logger Reader Station for validation and monitoring
PMN / Model name: *	TrackSense LyoPro Reader Station
FCC ID: *	XUS-LYORS1
IC:	8758A-LYORS1
Serial number: *	558143 (radiated) 558145 (conducted)
PCB identifier: *	610000111
Hardware version: * HVIN: *	66305100
Software version: * FVIN: *	n/a

* Declared by the applicant

Note: PHOENIX Testlab GmbH does not take samples. The samples used for the tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

EUT data						
Power supply EUT: *	DC (by power adapter)					
Supply voltage EUT: *	U _{nom} =	5 V _{DC}	U _{min} =	4 V _{DC}	U _{max} =	12 V _{DC}
Temperature range: *	0 °C to +50 °C					
Lowest / highest internal clock frequency: *	32.768 kHz / 2480 MHz (in IEEE802.15.4 mode)					

Ports / Connectors				
Identification			Length during test	Shielding (Yes / No)
	EUT	Ancillary		
USB	USB-B	USB-A	2.5 m	Yes
Ethernet	RJ45	RJ45	3 m	Yes
DC in	DC jack	-	1.5 m	No

IEEE 802.15.4 radio mode		
Fulfils radio specification: *	IEEE 802.15.4	
Radio chip: *	Atmel AT86RF233	
Antenna type: *	Chip-Ceramic	
Antenna name: *	7488910245; Würth	
Antenna gain: *	Peak:	3 dBi (Typical)
Antenna connector: *	-	
Conducted output power: *	IEEE 802.15.4	2.3 dBm (Peak)
	2.1 dBm (Average)	
Type of modulation: *	IEEE 802.15.4	O-QPSK (250 kbit/s)
Operating frequency range: *	IEEE 802.15.4	2405 – 2480 MHz
Number of channels: *	IEEE 802.15.4	16 (5 MHz channel spacing)

IEEE 802.15.4 frequencies				
Channel 11	RX	2405 MHz	TX	2405 MHz
Channel 12	RX	2410 MHz	TX	2410 MHz
Channel 13	RX	2415 MHz	TX	2415 MHz
Channel 14	RX	2420 MHz	TX	2420 MHz
Channel 15	RX	2425 MHz	TX	2425 MHz
Channel 16	RX	2430 MHz	TX	2430 MHz
Channel 17	RX	2435 MHz	TX	2435 MHz
Channel 18	RX	2440 MHz	TX	2440 MHz
Channel 19	RX	2445 MHz	TX	2445 MHz
Channel 20	RX	2450 MHz	TX	2450 MHz
Channel 21	RX	2455 MHz	TX	2455 MHz
Channel 22	RX	2460 MHz	TX	2460 MHz
Channel 23	RX	2465 MHz	TX	2465 MHz
Channel 24	RX	2470 MHz	TX	2470 MHz
Channel 25	RX	2475 MHz	TX	2475 MHz
Channel 26	RX	2480 MHz	TX	2480 MHz

1.5.1 Ancillary Equipment / Equipment used for testing

Equipment used for testing	
DC Power supply * ¹	MEAN WELL AC/DC Switching Adaptor, Model No. GE12I05-P1J
Laptop for remote access: * ¹	Lenovo X1 carbon

*¹ Provided by the applicant

1.6 Dates

Date of receipt of test sample:	06.08.2020
Start of test:	11.08.2020
End of test:	30.08.2020

2 Operational States

2.1 Description of function of the EUT


The EUT is intended to be used as reader station for wireless data loggers.

2.2 The following states were defined as the operating conditions

2.2.1 Radio test

During all radiated tests the EUT was supplied with 5 DC by delivered power supply. A USB connection was established for configuration purposes.

Test modes were applied via a Laptop with a special software as provided by the applicant (LYO Pro Link Test House Version, 0.0.0120.0).

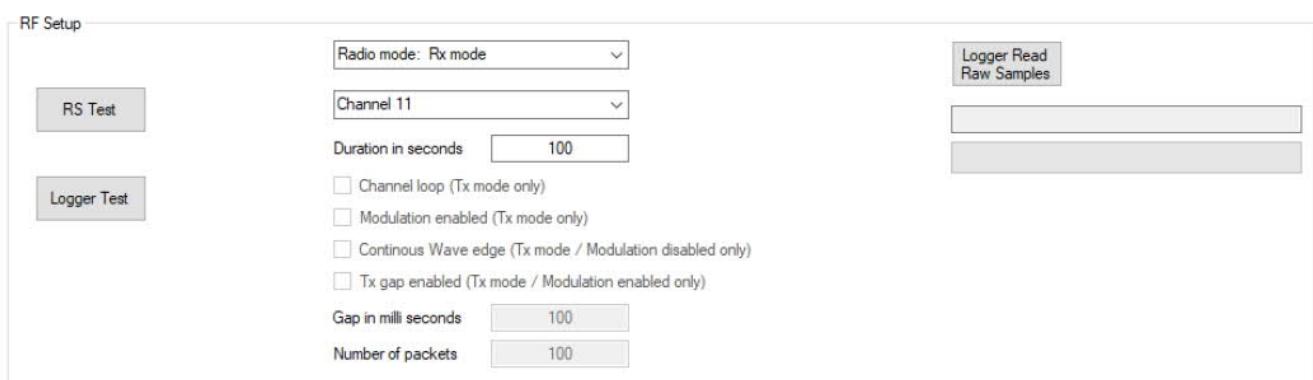

2.2.2 Operation modes

Operation mode #	Radio technology	Frequency [MHz]	Channel / Band	Modulation / Mode	Data rate	Power setting
1	IEEE 802.15.4	2405	11	O-QPSK	250 kbit/s	+4 dBm
2	IEEE 802.15.4	2440	18	O-QPSK	250 kbit/s	+4 dBm
3	IEEE 802.15.4	2480	26	O-QPSK	250 kbit/s	+4 dBm

The maximum output power of the Radio chis is +4 dBm (typical)


3 Additional Information

Object of this test report is the IEEE802.15.4 part of the EUT only.

The tested sample was not labeled as required by the FCC.

The radiated tests were done with an unmodified sample.

The conducted tests were done with a sample with a temporary SMA antenna connector

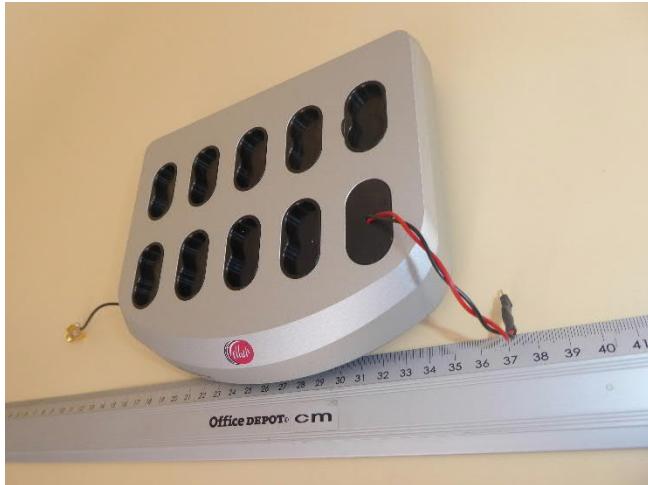

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS-247 [4] RSS-Gen [5]	Status	Refer page
Maximum peak conducted output power	2400.0 - 2483.5	15.247 (b) (3), (4)	5.4 (d) [4]	Passed	13
Maximum conducted output power	2400.0 - 2483.5	15.247 (b) (3), (4)	5.4 (d) [4]	Passed	13
DTS Bandwidth / 99% Bandwidth	2400.0 - 2483.5	15.247 (a) (2)	5.2 (a) [4]	Passed	16
Peak Power Spectral Density	2400.0 - 2483.5	15.247 (e)	5.2 (b) [4]	Passed	19
Average Power Spectral Density	2400.0 - 2483.5	15.247 (e)	5.2 (b) [4]	Passed	19
Band edge compliance	2400.0 - 2483.5	15.247 (d) 15.205 (a) 15.209 (a)	5.5 [4]	Passed	22
Maximum unwanted emissions	0.009 – 26,500*	15.247 (d) 15.205 (a) 15.209 (a)	8.9 [5]	Passed*	24
Conducted emissions on supply lines	0.150 - 30	§15.207 (a)	8.8 [4]	Passed	41
Antenna Requirement	-	15.203 15.247 (b)	5.4 (f) (ii) [4]	Passed* ¹	-

*¹ Fixed Antenna, gain below 6 dBi, no power reduction necessary.

5 Results

5.1 Duty cycle


The duty cycle of the IEEE 802.15.4 part of the EUT was set to 100 %, therefore no duty cycle correction factor (DCCF) needs to be calculated.

5.1.1 Maximum conducted output power

5.1.1.1 Method of measurement (conducted)

The measurements were done conducted at the antenna connectors of both antennas.

Test Setup:

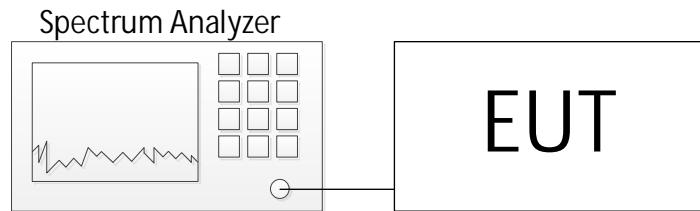

Acceptable measurement configurations

See 8.3 of document [3] for details.

For the **Maximum peak conducted output power** the Procedure **11.9.1.1** in [1] was used.

For the **Maximum conducted average output power** the Procedure **11.9.2.2.4** in [1] was used.


Only one representative plot for each measurement configuration is provided.

5.1.2 Test results

Ambient temperature	22 °C
Relative humidity	53 %


Date	11.08.2020
Tested by	B. ROHDE

Maximum peak conducted output power:

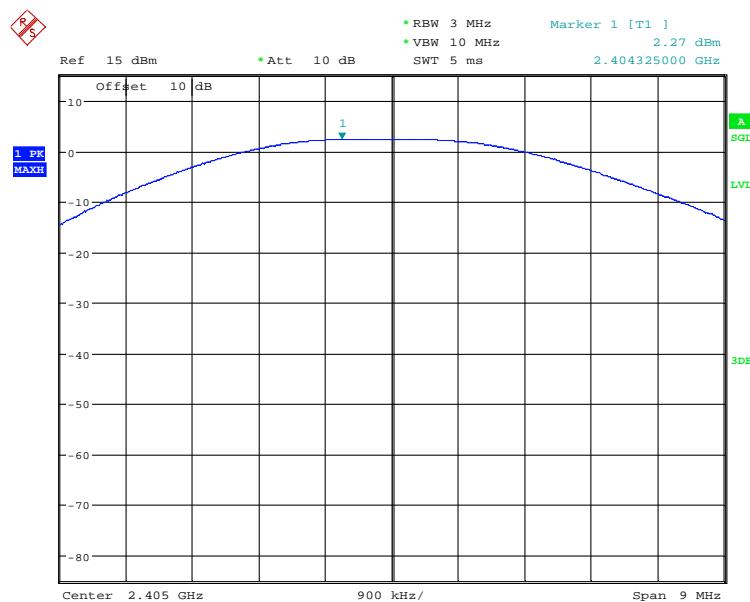

Operation mode	Reading [dBm]	Corr. Fact. [dB]	Result [dBm]	Limit [dBm]
1	2.3	0.0	2.3	30
2	1.7	0.0	1.7	30
3	0.7	0.0	0.7	30

Maximum average conducted output power:

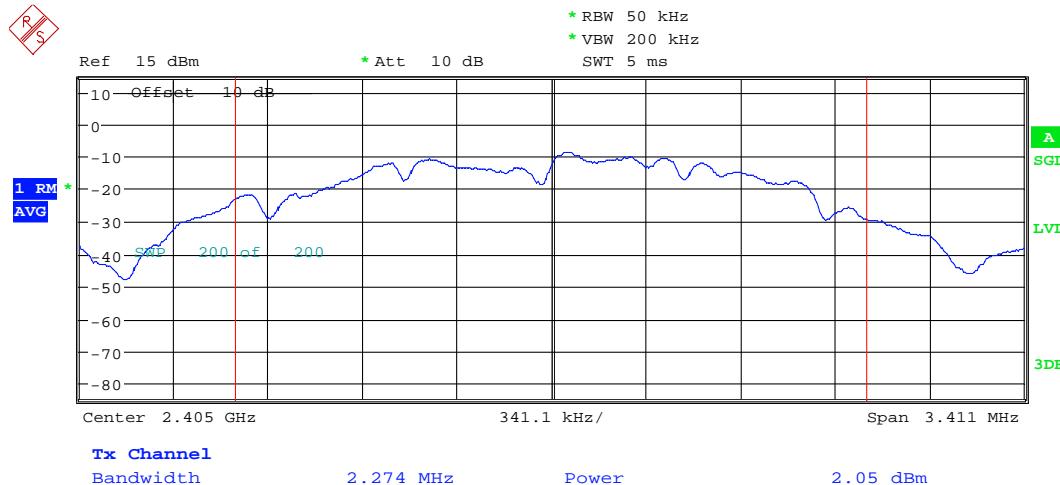

Operation mode	Reading [dBm]	Corr. Fact. [dB]	Power [dBm]	DCCF [dB]	Power Incl. DCCF [dBm]	Result [dBm]	Limit [dBm]
1	2.1	0.0	2.1	0.0	2.1	2.1	30
2	1.4	0.0	1.4	0.0	1.4	1.4	30
3	0.5	0.0	0.5	0.0	0.5	0.5	30

Test equipment (please refer to chapter 6 for details)


1

5.1 DTS Bandwidth / 99% Bandwidth

5.1.1 Method of measurement (conducted)

The measurements were done conducted at the antenna connectors of both antennas.

Test Setup:

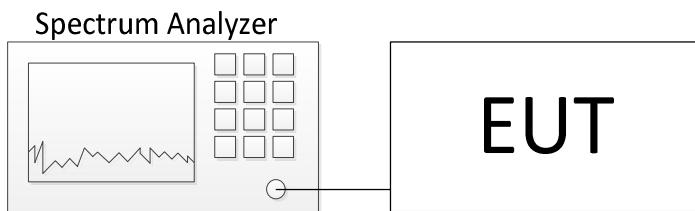

Acceptable measurement configurations

See chapter 8.2 of document [3]

For the **DTS bandwidth** the Procedure **11.8.1** in [1] was used.

For the **Occupied bandwidth – 99% Bandwidth** the Procedure **6.9.3** in [1] was used.


Only one representative plot for each measurement configuration is provided.

5.1.2 Test results


Ambient temperature	22 °C
Relative humidity	53 %

Date	11.08.2020
Tested by	B. ROHDE

Representative plot DTS bandwidth

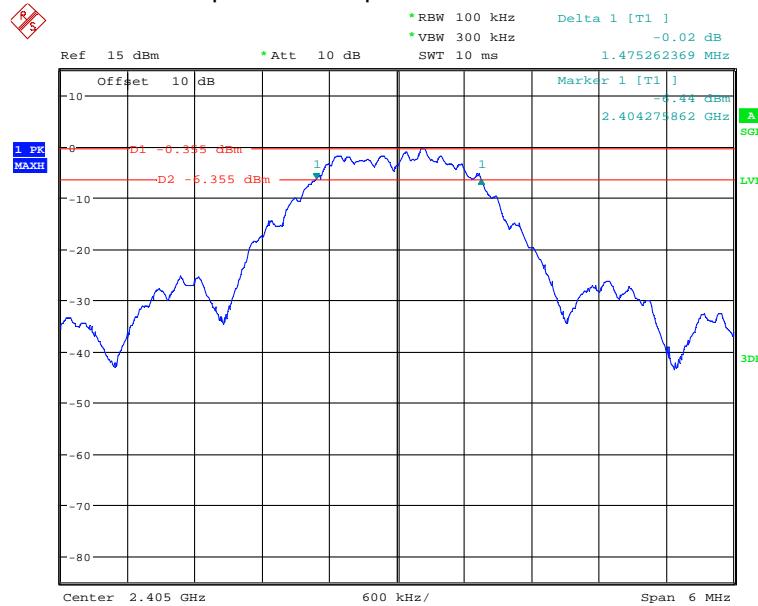

Representative plot 99 % bandwidth

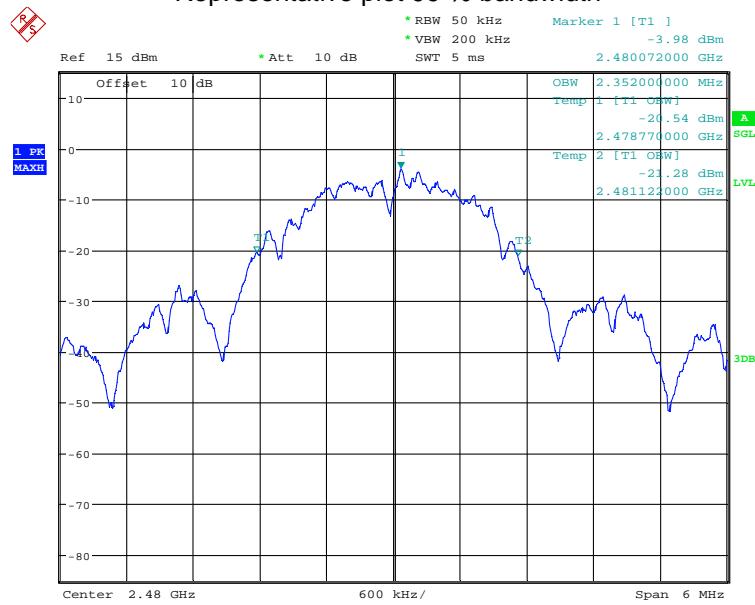

OP mode	Data rate	Center Frequency [MHz]	Minimum 6-dB Bandwidth Limit [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
1	250 kbit/s	2405	0.5	1.475	2.280	Passed
2	250 kbit/s	2440	0.5	1.517	2.322	Passed
3	250 kbit/s	2480	0.5	1.517	2.352	Passed

Test equipment (please refer to chapter 6 for details)
--


1

5.2 Power spectral density

5.2.1 Method of measurement (conducted)

The measurements were done conducted at the antenna connectors of both antennas.

Test Setup:

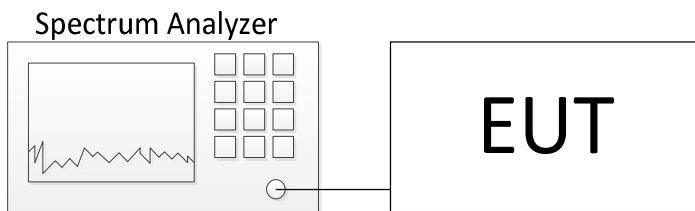

Acceptable measurement configurations

See chapter 8.4 of document [3]

For the **Maximum peak power spectral density level in the fundamental emission** the Procedure **11.10.2** in [1] was used.

For the **Maximum average power spectral density level in the fundamental emission** the Procedure **11.10.5** in [1] was used.


Only one representative plot for each measurement configuration is provided.

5.2.2 Test results

Ambient temperature	22 °C
Relative humidity	53 %


Date	11.08.2020
Tested by	B. ROHDE

Maximum peak power spectral density level in the fundamental emission:

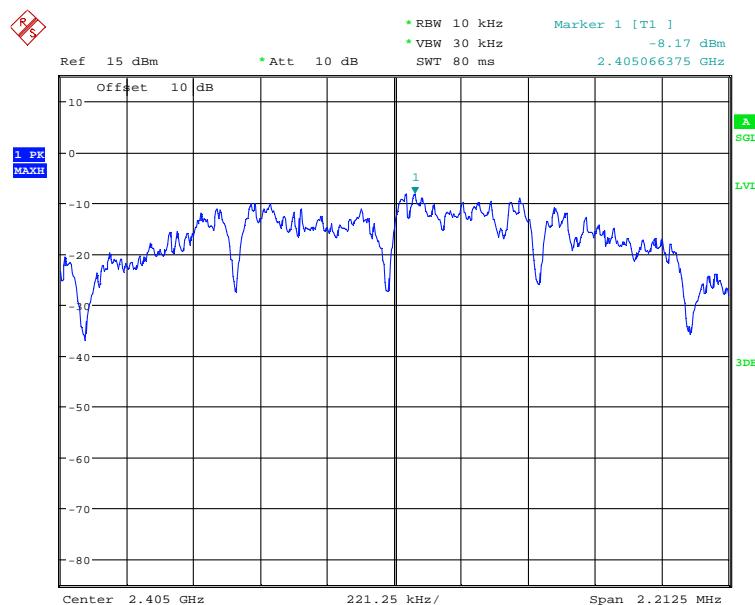

OP mode	Peak Frequency [MHz]	PPSD [dBm / 10 kHz]	PSD Limit [dBm / 3 kHz]	Result
1	2405.066	-8.2	8	Passed
2	2440.068	-9.1	8	Passed
3	2480.064	-10.3	8	Passed

Maximum average power spectral density level in the fundamental emission:

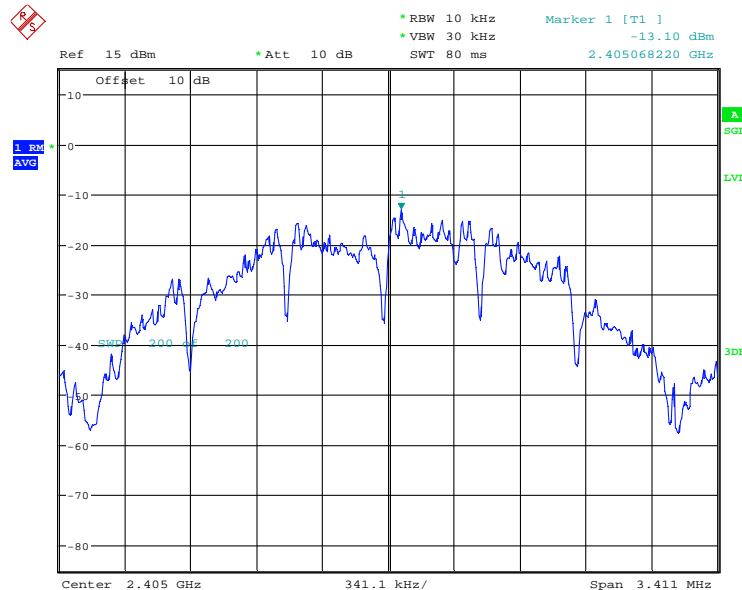

OP mode	Peak Frequency [MHz]	PSD [dBm / 10 kHz]	Result incl. DCCF [dBm / 10 kHz]	PSD Limit [dBm / 3 kHz]	Result
1	2405.068	-13.1	-13.1	8	Passed
2	2440.066	-14.4	-14.4	8	Passed
3	2480.067	-15.7	-15.7	8	Passed


Test equipment (please refer to chapter 6 for details)
1

5.3 Band edge

5.3.1 Method of measurement (conducted)

The measurements were done conducted at the antenna connectors of both antennas.

Test Setup:

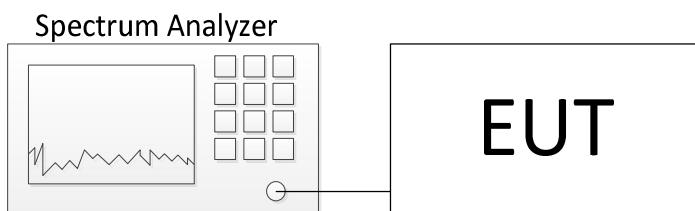

Acceptable measurement configurations

See chapter 8.7 of document [3].

For the **Band-edge testing (unrestricted bands)** the Procedure 6.10.4 in [1] was used, see remarks of #59, table A2 of document [1].

For the **Band-edge testing (restricted bands)** the tests were done radiated.

Only one representative plot is provided.

5.3.2 Method of measurement (radiated)

The EUT was measured radiated in an anechoic chamber. For test setup and measurement configuration see 5.4.1

For the **Band-edge testing (restricted bands)** the 15.209 limits apply.


Only one representative plot is provided.

5.3.3 Test results

5.3.3.1 Band-edge testing (unrestricted bands; conducted):

Ambient temperature	22 °C
Relative humidity	53 %

Date	11.08.2020
Tested by	B. ROHDE

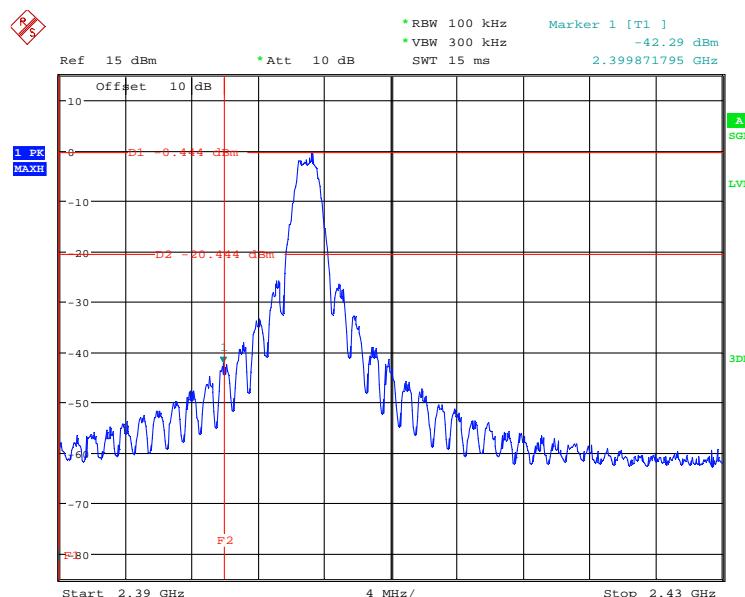


Operation mode	Data rate	Frequency [MHz]	Reference Level [dBm]	Limit [dBm]	Emission Level [dBm]	Margin [dB]	Result
1	250 kbit/s	2399.872	-0.4	-20.4	-42.1	21.6	Passed

Test equipment (please refer to chapter 6 for details)
1

5.3.3.2 Band-edge testing (restricted bands; radiated):

Ambient temperature	22 °C
Relative humidity	42 %

Date	02.06.2020
Tested by	B. ROHDE

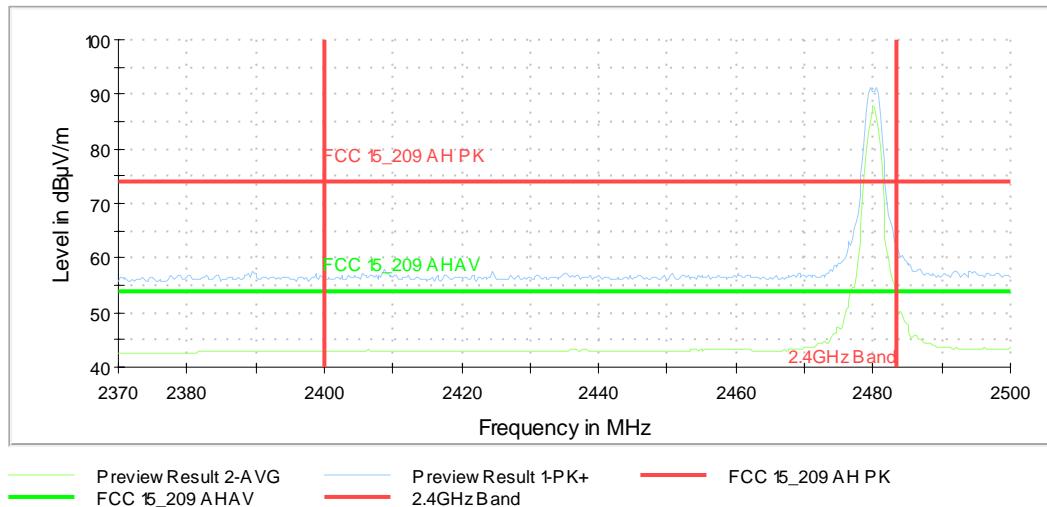

Frequency [MHz]	Result (Pk) [dB μ V/m]	Result (Av) [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Readings [dB μ V]	Correction [dB]	Elevation [deg]	Azimuth [deg]	Pol.	Result
2483.500000	60.4	---	74	13.6	27.0	33.4	120	106	H	Passed
2483.500000	---	49.7	54	4.3	16.3	33.4	120	106	H	Passed
Measurement uncertainty					± 5.5 dB					

Test equipment (please refer to chapter 6 for details)
2 - 11

5.4 Maximum unwanted emissions Maximum unwanted emissions

5.4.1 Method of measurement (radiated)

The radiated emission measurement is subdivided into six stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an outdoor test site without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A preliminary and final measurement carried out in a semi anechoic chamber with a varying antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary and final measurement carried out in a semi anechoic chamber with ground absorbers with a varying antenna height in the frequency range above 1 GHz.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting turn device on the height of 0.8 m. Floor-standing devices will be placed directly on the turntable/ground plane. The set-up of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyzer while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to find the maximum emissions.

The resolution bandwidth of the spectrum analyzer will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

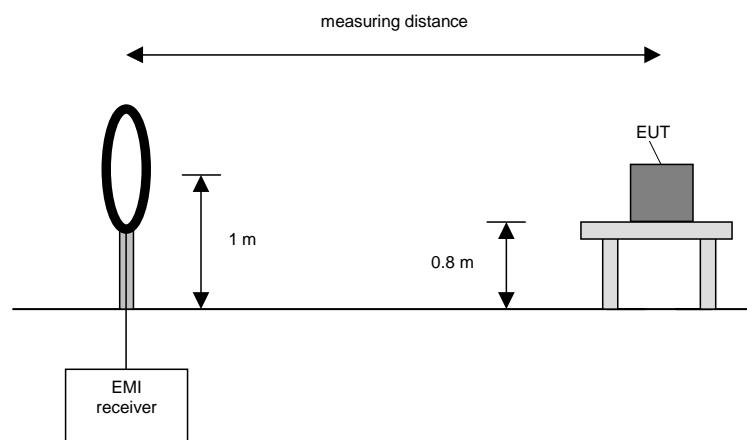

Preliminary measurement procedure:

Pre-scans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

Pre-scans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:

1. Monitor the frequency range at horizontal polarization and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Repeat 1) to 3) with the vertical polarization of the measuring antenna.
5. Make a hardcopy of the spectrum.
6. Repeat 1) to 5) with the EUT raised by an angle of 0° (45°, 90°) according to 6.6.5.4 in [1].
7. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the frequencies, which were detected during the preliminary measurements, the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

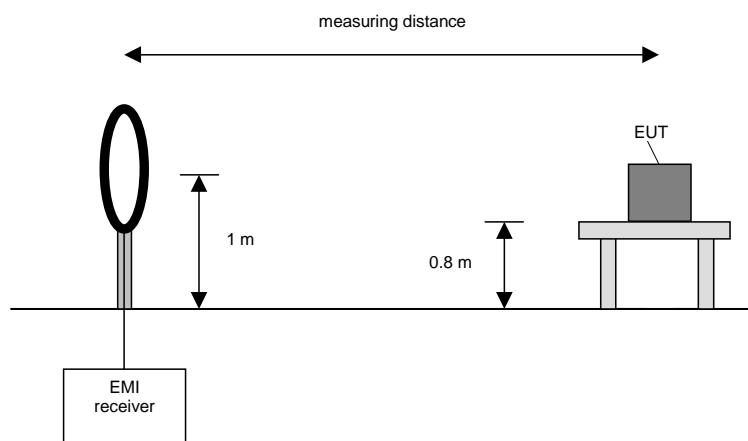


Preliminary and final measurement (30 MHz to 1 GHz)

The preliminary and final measurements were conducted in a semi-anechoic chamber with a metal ground plane. During the test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Test	Frequency range	Resolution bandwidth	Step size	Measurement time
Preliminary measurement	30 MHz to 1 GHz	120 kHz	40 kHz	100 ms
Frequency peak search	3 x RBW	120 kHz	10 kHz	1000 ms
Final measurement	30 MHz to 1 GHz	120 kHz	-	5 x 1000 ms

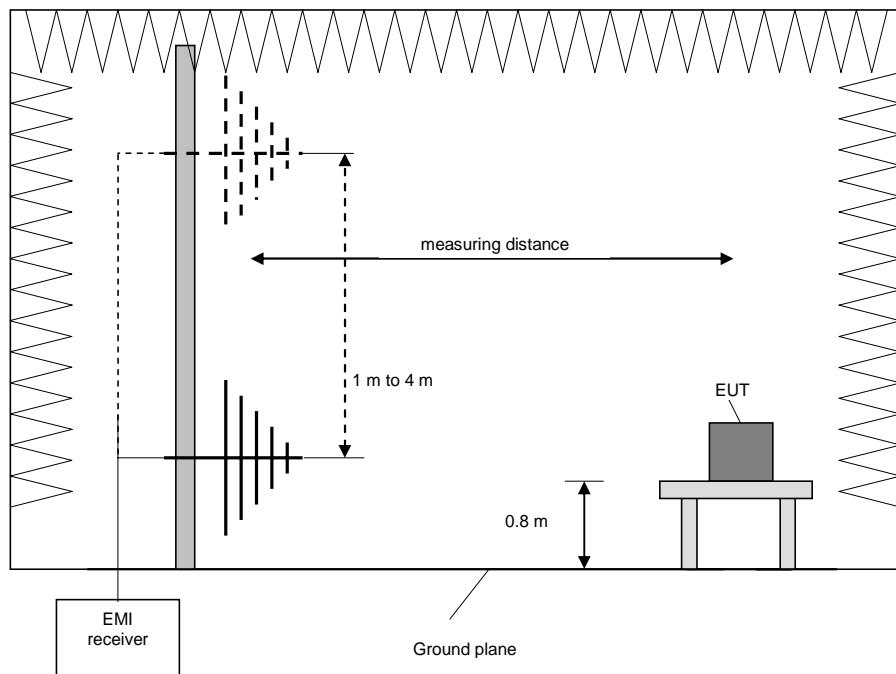

Procedure preliminary measurement:

The following procedure is used:

1. Set the measurement antenna to 1 m height.
2. Monitor the frequency range at vertical polarization and a EUT azimuth of 0 °.
3. Rotate the EUT by 360° to maximize the detected signals.
4. Repeat 1) to 2) with the vertical polarization of the measuring antenna.
5. Increase the height of the antenna for 0.5 m and repeat steps 2 – 4 until the final height of 4 m is reached.
6. The highest values for each frequency will be saved by the software, including the antenna height, measurement antenna polarization and turntable azimuth for the highest value.

Procedure final measurement:

The following procedure is used:

1. Select the highest frequency peaks to the limit for the final measurement.
2. The software will determine the exact peak frequencies by doing a partial scan with reduced step size with +/- 3 times the RBW of the pre-scan of the selected peaks.
3. If the EUT is portable or ceiling mounted, find the worst case EUT orientation (x,y,z) for the final test.
4. The worst measurement antenna height is found by the measurement software by varying the measurement antenna height by +/- 0.5 m from the worst-case value obtained in the preliminary measurement, and to monitor the emission level.
5. The worst azimuth turntable position is found by varying the turntable azimuth by +/- 30° from the worst-case value obtained in the preliminary measurement, and to monitor the emission level.
6. The final measurement is performed at the worst-case antenna height and the worst-case turntable azimuth.
7. Steps 2 – 6 will be repeated for each frequency peak selected in step 1.

Preliminary and final measurement (1 GHz to 40 GHz)


This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device on the height of 1.5m. The set-up of the Equipment under test will be in accordance to [1].

Preliminary measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

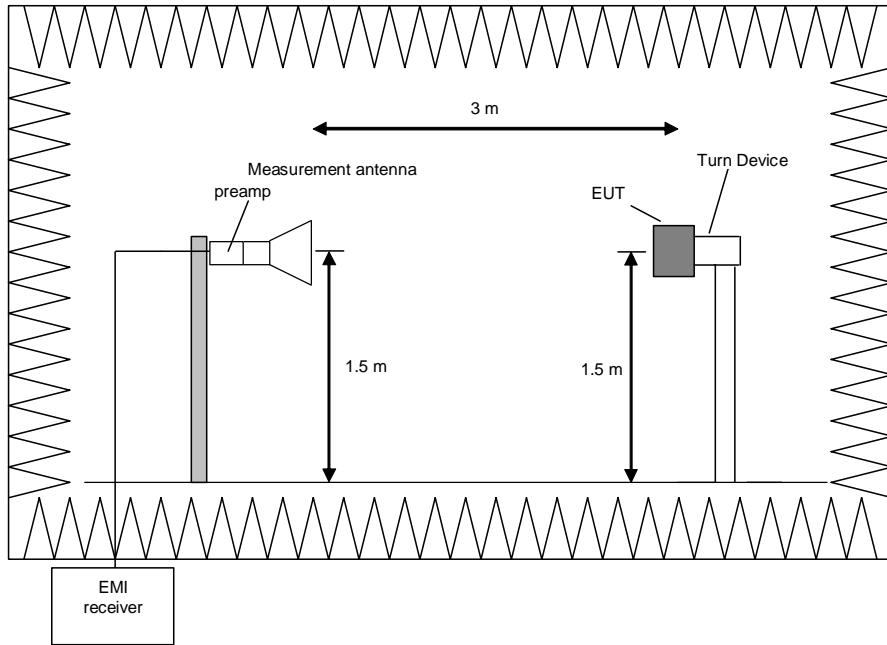

Procedure preliminary measurement:

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60°, 90°, 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

Final measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed by rotating the turntable through 0 to 360° in the worst-case EUT orientation which was obtained during the preliminary measurements.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

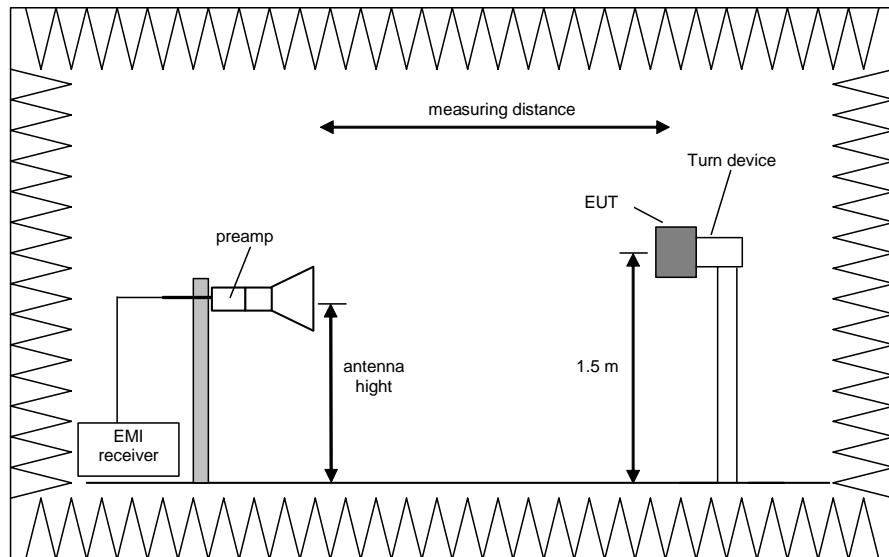

Procedure of measurement:

The measurements were performed in the frequency ranges 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 25 /26.5 GHz and 26.5 GHz to 40 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the TT Pos. that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.

5.4.2 Test results (radiated)

5.4.2.1 Test results (9 kHz – 30 MHz)

Ambient temperature	24 °C
Relative humidity	70 %

Date	17.08.2020
Tested by	B. ROHDE


Position of EUT: For tests for f between 9 kHz and 30 MHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: The measurement value was already corrected by 40 dB/decade as described in §15.31 (f) (2) regarding to the measurement distance as requested in §15.209

5.4.2.1.1 Plots

9k-30M: Spurious emissions from 9 kHz to 30 MHz

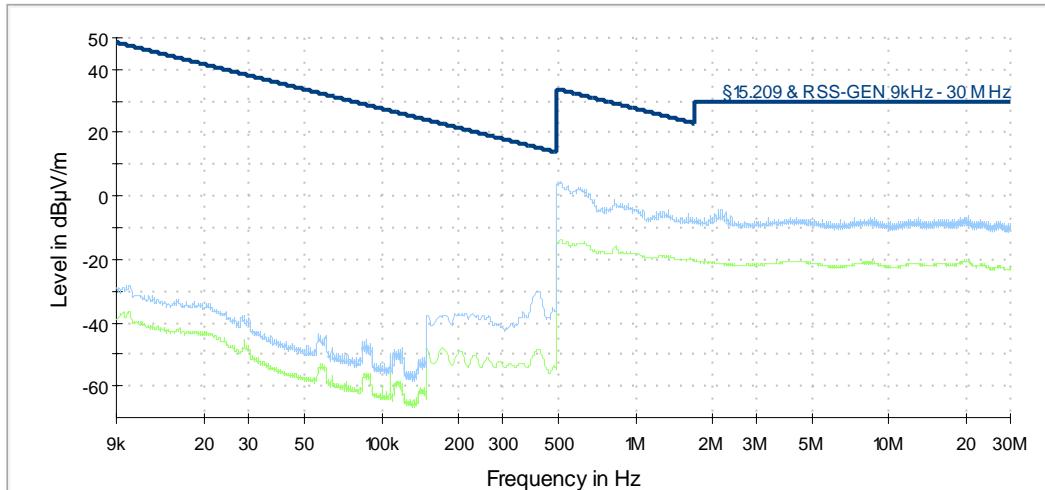

Remark: In the shown plot a distance correction factor was added to the measurement results to account for the different measuring distances according to standard (9 kHz to 490 kHz @ 300 m; 490 kHz to 30 MHz @ 30 m).

5.4.2.1.2 Result table

All emissions are more the 20 dB from the limit, so no final measurement was conducted.

Test equipment (please refer to chapter 6 for details)
12 - 19

5.4.2.2 Test results (30 MHz – 1 GHz)

Ambient temperature	22 °C
Relative humidity	70 %

Date	17.08.2020
Tested by	B. ROHDE

Position of EUT: The EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.


Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Only the worst-case plot is submitted below.

Remark: -

5.4.2.2.1 **Plots**

Spurious emissions from 30 MHz to 1 GHz (operation mode 2):

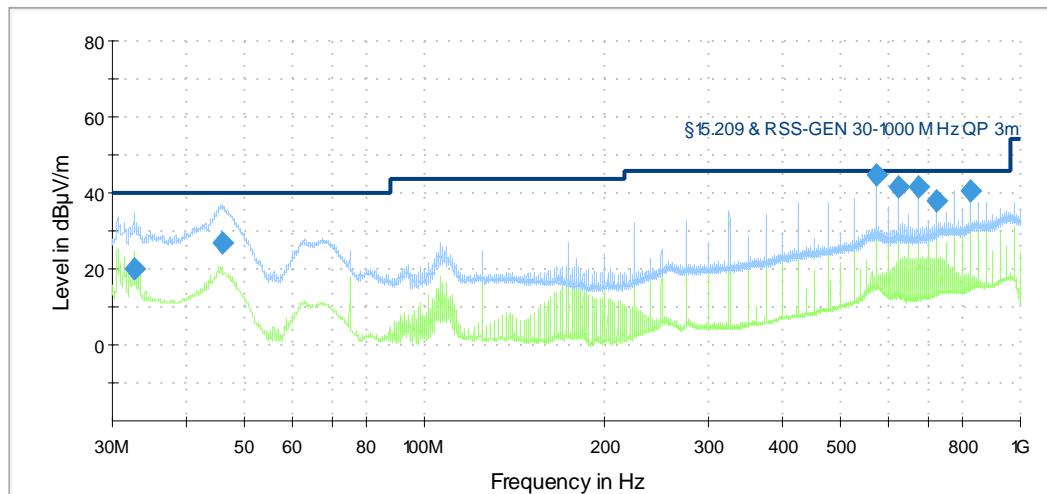

5.4.2.2.2 Result tables

Result table (operation mode 1):

Frequency [MHz]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Readings [dB μ V]	Correction [dB/m]	Height [cm]	Azimuth [deg]	Pol.	Result
75.000000	23.3	40	16.7	9.3	14.0	122	228	V	Passed
175.000000	30.0	43.52	13.5	13.3	16.7	100	10	V	Passed
225.000000	28.8	46.02	17.2	11.6	17.2	109	197	H	Passed
575.010000	43.5	46.02	2.5	15.3	28.2	100	114	V	Passed
625.010000	41.4	46.02	4.6	12.5	28.8	116	210	H	Passed
675.010000	42.3	46.02	3.7	13.5	28.9	100	305	V	Passed
725.010000	41.5	46.02	4.5	11.4	30.2	100	195	H	Passed
775.010000	38.8	46.02	7.2	8.0	30.8	100	168	H	Passed
825.020000	38.9	46.02	7.1	7.5	31.5	150	197	H	Passed
Measurement uncertainty				± 5.5 dB					

Result table (operation mode 2):

Frequency [MHz]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Readings [dB μ V]	Correction [dB/m]	Height [cm]	Azimuth [deg]	Pol.	Result
32.630000	20.1	40	19.9	-6.1	26.2	100	70	V	Passed
45.940000	27.0	40	13.0	7.9	19.1	100	105	V	Passed
575.010000	44.6	46.02	1.4	16.4	28.2	102	118	V	Passed
625.010000	41.6	46.02	4.4	12.8	28.8	102	126	V	Passed
675.010000	41.6	46.02	4.4	12.7	28.9	102	126	V	Passed
725.010000	38.2	46.02	7.8	8.0	30.2	102	126	V	Passed
825.020000	40.8	46.02	5.2	9.3	31.5	143	-28	V	Passed
Measurement uncertainty				± 5.5 dB					

Result table (operation mode 3):

Frequency [MHz]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Readings [dB μ V]	Correction [dB/m]	Height [cm]	Azimuth [deg]	Pol.	Result
30.620000	32.8	40	7.2	5.7	27.1	100	179	V	Passed
45.740000	32.8	40	7.2	13.6	19.2	102	164	V	Passed
325.010000	37.5	46.02	8.5	16.2	21.3	100	228	H	Passed
575.010000	44.0	46.02	2.0	15.8	28.2	102	123	V	Passed
625.010000	41.0	46.02	5.0	12.2	28.8	102	126	V	Passed
675.010000	41.8	46.02	4.2	12.9	28.9	102	130	V	Passed
725.010000	39.1	46.02	6.9	8.9	30.2	102	154	V	Passed
825.020000	40.7	46.02	5.3	9.2	31.5	142	-28	V	Passed
Measurement uncertainty					± 5.5 dB				

Test equipment (please refer to chapter 6 for details)
13 - 20

5.4.2.3 Test results (above 1 GHz)

Ambient temperature	23 °C
Relative humidity	61 %

Date	30.08.2020
Tested by	B. ROHDE

Position of EUT: For tests for f between 1 GHz and the 10th harmonic, the EUT was set-up on a table with a height of 150 cm. The distance between EUT and antenna was 3 m.


Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Only the worst-case plot for each frequency range is submitted below.


Remark: -

5.4.2.3.1 Plots


Spurious emissions from 1 GHz to 4 GHz (operation mode 1):

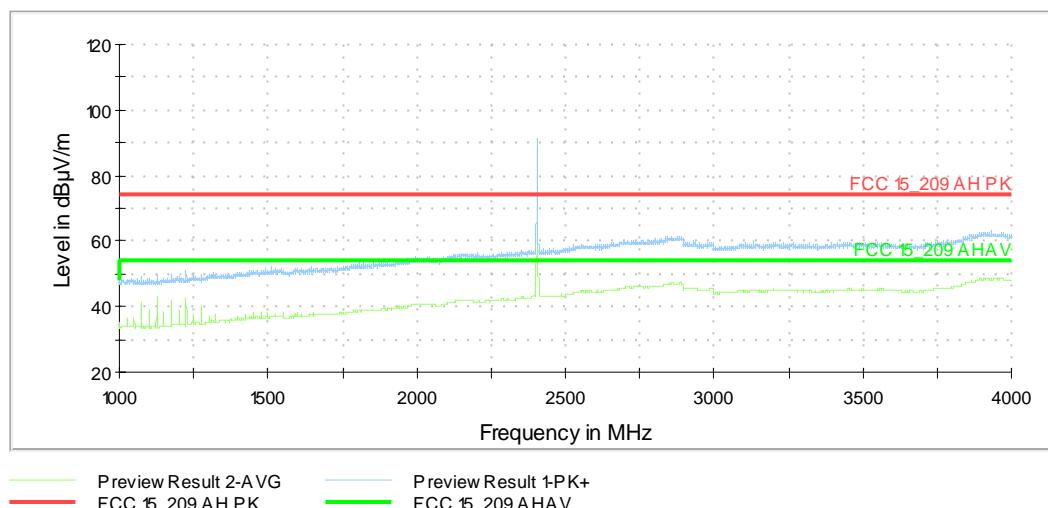


Spurious emissions from 4 GHz to 12 GHz (operation mode 3):

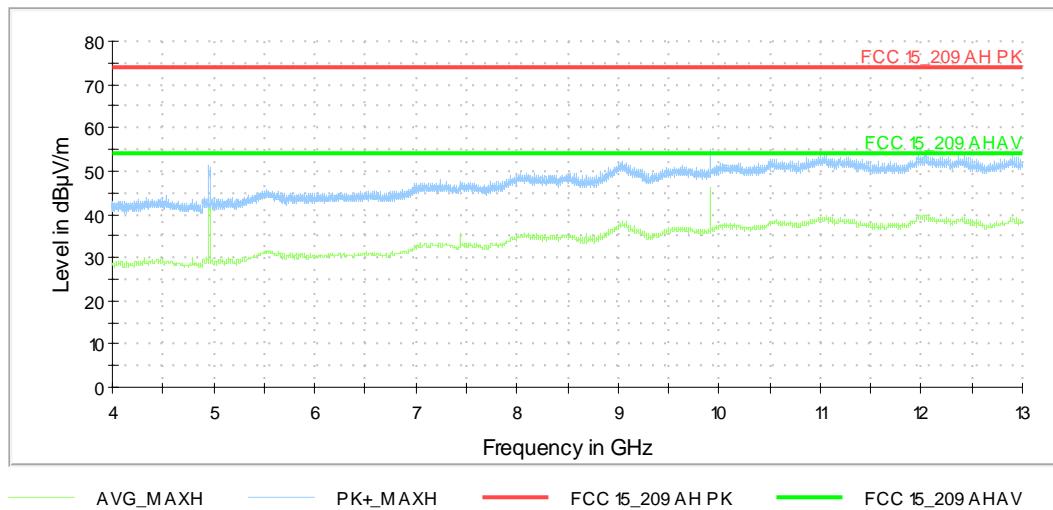

Spurious emissions from 12 GHz to 18 GHz (operation mode 1):

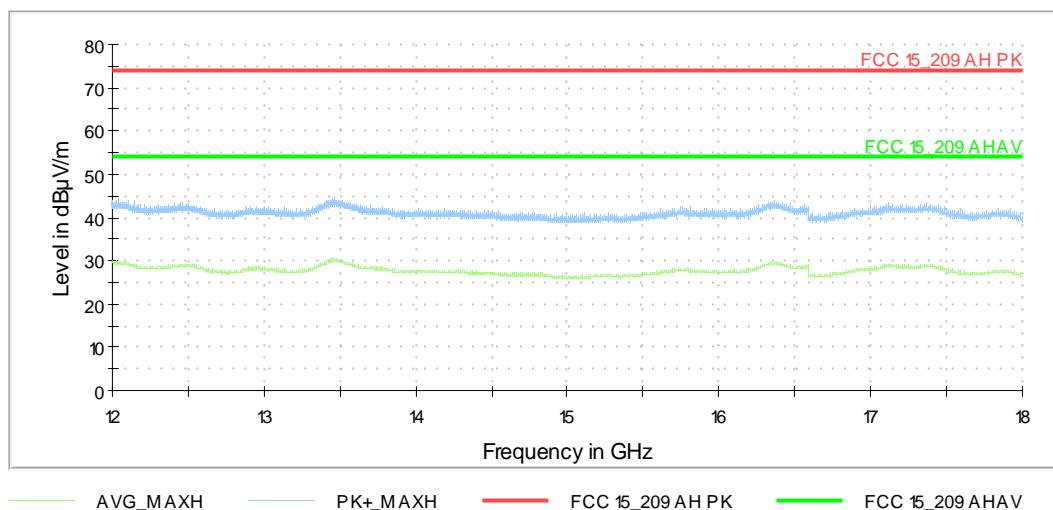

Spurious emissions from 18 GHz to 26.5 GHz (operation mode 1):

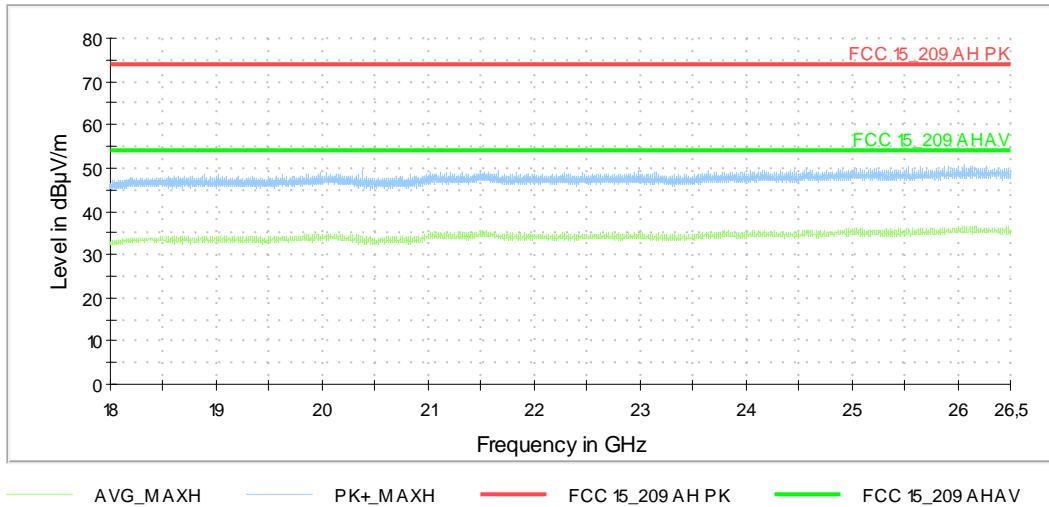

5.4.2.3.2 Result tables

Result table operation mode 1:

Frequency [MHz]	MaxPeak [dBμV/m]	Average [dBμV/m]	Limit [dBμV/m]	Margin (dB)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Result
1125.000000	---	42.6	54	11.4	H	103	90	25.0	Passed
1125.000000	45.4	---	74	28.6	H	103	90	25.0	Passed
1225.000000	---	40.6	54	13.4	V	99	60	26.0	Passed
1225.000000	44.4	---	74	29.6	V	99	60	26.0	Passed
2404.500000	---	84.9	-	-	H	116	150	33.3	Fund.
2404.500000	91.2	---	-	-	H	116	150	33.3	Fund.
2405.000000	---	88.1	-	-	H	115	150	33.3	Fund.
2405.000000	90.5	---	-	-	H	115	150	33.3	Fund.
2405.500000	---	85.9	-	-	H	115	150	33.3	Fund.
2405.500000	91.1	---	-	-	H	115	150	33.3	Fund.
2840.000000	---	33.6	54	20.4	H	330	90	35.4	Passed
2840.000000	46.0	---	74	28.0	H	330	90	35.4	Passed
3931.500000	---	40.8	54	13.2	V	174	30	39.5	Passed
3931.500000	53.7	---	74	20.3	V	174	30	39.5	Passed
4811.000000	---	38.8	54	15.2	V	148	0	-2.1	Passed
4811.000000	47.2	---	74	26.8	V	148	0	-2.1	Passed
9622.000000	---	42.4	54	11.6	V	64	150	7.5	Passed
9622.000000	52.6	---	74	21.4	V	64	150	7.5	Passed
Measurement uncertainty				+/- 4.79 dB					

Result table operation mode 2:

Frequency [MHz]	MaxPeak [dB μ V/m]	Average [dB μ V/m]	Limit [dB μ V/m]	Margin (dB)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Result
1125.000000	---	41.7	54	12.3	H	90	90	25.0	Passed
1125.000000	44.6	---	74	29.4	H	90	90	25.0	Passed
1175.000000	---	39.6	54	14.4	H	118	90	25.9	Passed
1175.000000	43.4	---	74	30.6	H	118	90	25.9	Passed
2439.500000	---	85.5	-	-	H	108	120	33.5	Fund.
2439.500000	91.8	---	-	-	H	108	120	33.5	Fund.
2440.000000	---	88.6	-	-	H	108	120	33.5	Fund.
2440.000000	91.1	---	-	-	H	108	120	33.5	Fund.
2440.500000	---	86.6	-	-	H	108	120	33.5	Fund.
2440.500000	91.8	---	-	-	H	108	120	33.5	Fund.
3901.000000	---	40.6	54	13.4	H	116	90	39.6	Passed
3901.000000	52.9	---	74	21.1	H	116	90	39.6	Passed
4881.000000	38.4	---	74	35.6	V	160	0	-1.8	Passed
4881.000000	---	26.3	54	27.7	V	160	0	-1.8	Passed
9762.000000	47.4	---	74	26.6	V	2	0	6.9	Passed
9762.000000	---	35.2	54	18.8	V	2	0	6.9	Passed
Measurement uncertainty				+/- 4.79 dB					

Result table operation mode 3:

Frequency [MHz]	MaxPeak [dB μ V/m]	Average [dB μ V/m]	Limit [dB μ V/m]	Margin (dB)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Result
1125.000000	44.2	---	74	29.8	H	131	90	25.0	Passed
1125.000000	---	40.9	54	13.1	H	131	90	25.0	Passed
1225.000000	---	40.2	54	13.8	V	69	60	26.0	Passed
1225.000000	43.9	---	74	30.1	V	69	60	26.0	Passed
2479.500000	---	84.8	-	-	H	106	120	33.4	Fund.
2479.500000	91.1	---	-	-	H	106	120	33.4	Fund.
2480.000000	---	87.7	-	-	H	106	120	33.4	Fund.
2480.000000	90.2	---	-	-	H	106	120	33.4	Fund.
2480.500000	---	85.9	-	-	H	107	120	33.4	Fund.
2480.500000	91.1	---	-	-	H	107	120	33.4	Fund.
3931.000000	53.4	---	74	20.6	H	321	0	39.5	Passed
3931.000000	---	40.8	54	13.2	H	321	0	39.5	Passed
4961.000000	---	44.1	54	9.9	H	74	120	-2.0	Passed
4961.000000	51.3	---	74	22.7	H	74	120	-2.0	Passed
9922.000000	---	45.6	54	8.4	H	114	120	7.3	Passed
9922.000000	54.7	---	74	19.3	H	114	120	7.3	Passed
12041.000000	---	38.4	54	15.6	H	353	150	7.4	Passed
12041.000000	50.7	---	74	23.3	H	353	150	7.4	Passed
Measurement uncertainty			+/- 4.79 dB						

Test equipment (please refer to chapter 6 for details)
2 - 11, 21 - 27

5.5 Conducted emissions on power supply lines (150 kHz to 30 MHz)


5.5.1 Method of measurement

This test will be carried out in a shielded chamber. Tabletop devices will be set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The setup of the Equipment under test will be in accordance to [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriaible limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

Test setup for measurement with the EUT supplied via USB:

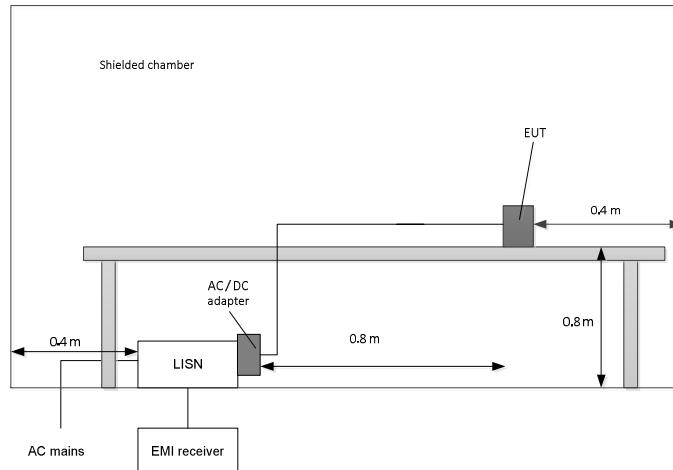

5.5.2 Test results (conducted emissions on power supply lines)

5.5.2.1 Test results with EUT supplied via AC/DC Power Adaptor

Ambient temperature	23 °C
Relative humidity	70 %

Date	15.08.2020
Tested by	B. ROHDE

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.


Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During this test the EUT was powered with 5.0 V_{DC} by the supplied AC/DC power adaptor (Mean well Model No. GE12I02), which was itself supplied with 120 V_{AC} / 60 Hz.

Remark: Operation mode 1 was used for testing

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by  , the average measured points with .

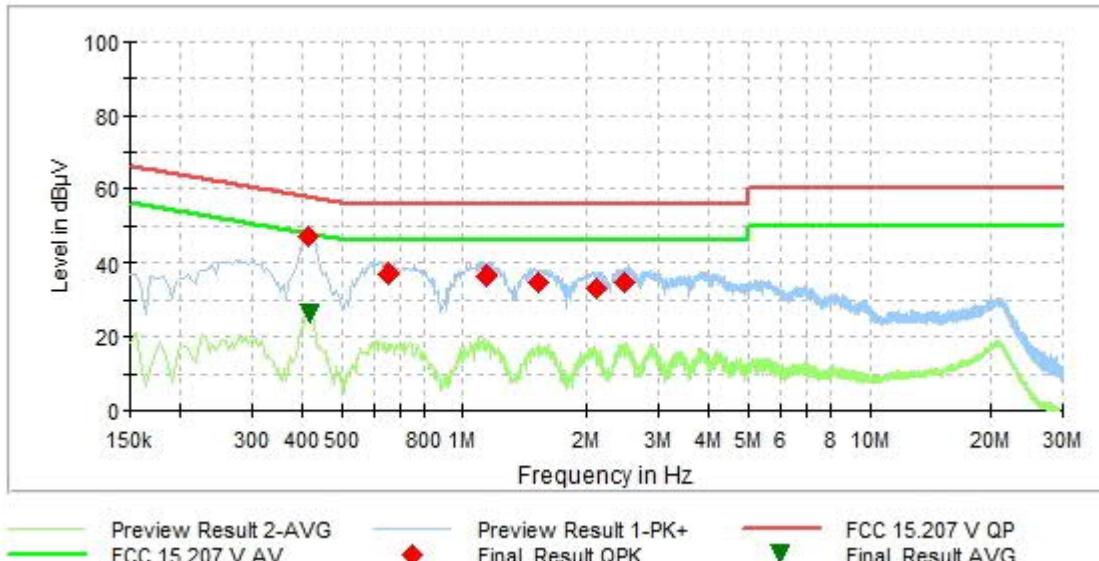

Frequency [MHz]	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	PE	Corr. [dB]
0.413700	46.75	---	57.57	10.82	5000.0	9.000	N	FLO	9.9
0.418200	---	26.30	47.48	21.18	5000.0	9.000	N	GND	9.9
0.648600	37.16	---	56.00	18.84	5000.0	9.000	N	GND	9.9
1.143600	36.66	---	56.00	19.34	5000.0	9.000	N	GND	9.9
1.511700	34.84	---	56.00	21.16	5000.0	9.000	N	FLO	9.9
2.097600	33.46	---	56.00	22.54	5000.0	9.000	N	FLO	10.1
2.487300	34.73	---	56.00	21.27	5000.0	9.000	N	FLO	10.2
Measurement uncertainty		± 2.8 dB							

Test: Passed

Test equipment (please refer to chapter 6 for details)
28 - 33

6 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Spectrum Analyser	FSU46	Rohde & Schwarz	200125	480956	13.02.2020	02.2021
2	Antenna (Log.Per.)	HL050	Rohde & Schwarz	100438	481170	09.10.2017	10.2020
3	RF-Cable No. 40	Sucoflex 106B	Suhner	0708/6B / Kabel 40	481330	Calibration not necessary	
4	EMI Receiver / Spectrum Analyser	ESW44	Rohde & Schwarz	101635	482467	18.02.2020	02.2022
5	Software	WMS32	Rohde & Schwarz	-	481800	Calibration not necessary	
6	Positioners	TDF 1.5- 10Kg	Maturo	15920215	482034	Calibration not necessary	
7	Turntable	DS420 HE	Deisel	420/620/00	480315	Calibration not necessary	
8	Fully anechoic chamber M20	B83117-E2439-T232	Albatross Projects	103	480303	Calibration not necessary	
9	Antenna mast	AS615P	Deisel	615/310	480187	Calibration not necessary	
10	Multiple Control Unit	MCU	Maturo GmbH	MCU/043/97110 7	480832	Calibration not necessary	
11	RF-cable No.38	Sucoflex 106B	Suhner	0709/6B / Kabel 38	481328	Calibration not necessary	
12	Loop antenna	HFH2-Z2	Rohde & Schwarz	100417	481912	05.02.2020	02.2021
13	RF Switch Matrix	OSP220	Rohde & Schwarz		482976	Calibration not necessary	
14	Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
15	Antennasupport	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
16	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
17	Semi Anechoic Chamber M276	SAC5-2	Albatross Projects	C62128-A540-A138-10-0006	483227	Calibration not necessary	
18	Measuring software EMC32 M276	EMC32	Rohde & Schwarz	100970	482972	Calibration not necessary	
19	EMI Testreceiver	ESW44	Rohde & Schwarz	101828	482979	14.11.2019	11.2021
20	Antenna (Bilog)	CBL6111D	Schaffner Elektrotest GmbH	25761	480984	19.10.2017	10.2020
21	standard gain horn antenna	18240-20	Flann Microwave	483	480294	Calibration not necessary	
22	Preamplifier 12 GHz - 18 GHz	JS3-12001800-16-5A	MITEQ Hauppauge N.Y.	571667	480343	13.02.2020	02.2022
23	standard gain horn antenna	20240-20	Flann Microwave	411	480297	Calibration not necessary	
24	Preamplifier 18 GHz - 26 GHz	JS4-18002600-20-5A	MITEQ Hauppauge N.Y.	658697	480342	13.02.2020	02.2022
25	High pass Filter	WHKX4.0/18G-8SS	Wainwright Instruments GmbH	1	480587	Calibration not necessary	
26	Microwave cable 2m	Insulated Wire Inc.	Insulated Wire	KPS-1533-800-KPS	480302	Calibration not necessary	
27	Preamplifier 100 MHz - 16 GHz	AFS6-00101600-23-10P-6-R	Narda MITEQ	2011215	482333	13.02.2020	02.2022
28	Transient Filter Limiter	CFL 9206A	Teseq GmbH	38268	481982	12.02.2020	02.2022

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
29	Software	EMC32	Rohde & Schwarz	100061	481022	Calibration not necessary	
30	Shielded chamber M4	B83117-S1-X158	Siemens	190075	480088	Calibration not necessary	
31	EMI Receiver / Spectrum Analyser	ESIB 26	Rohde & Schwarz	100292	481182	12.02.2020	02.2022
32	LISN	NSLK8128	Schwarzbeck	8128161	480138	11.02.2020	02.2022
33	AC Power Supply	AC6803A AC Quelle 2000VA	Keysight	JPVJ002509	482350	Calibration not necessary	

7 Test site Validation

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4-2017	19.09.2019	18.09.2021
Fully anechoic chamber M20	480303	1 -18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	24.08.2020	23.08.2022
Shielded chamber M4	480088	9 kHz – 30 MHz	GND-Plane	ANSI C63.4-2014	06.11.2018	05.11.2020

8 Report History

Report Number	Date	Comment
F201061E3	12.10.2020	Initial Test Report
-	-	-
-	-	-

9 List of Annexes

Annex A	Test Setup Photos	10 pages
Annex B	External Photos	7 pages
Annex C	Internal Photos	11 pages