

FCC Test Report

Technolog Ltd Remote Telemetry Outstation, Model: Cello 4S

In accordance with FCC 47 CFR Part 15B

Prepared for: Technolog Ltd
Ravenstor Road
Wirksworth
DE4 4FY
United Kingdom

FCC ID: XUV-2172TT2400



Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document 75948801-02 Issue 01

| SIGNATURE | | | |
|--|-----------------|----------------------|--------------|
| A handwritten signature of "Andy Lawson" in black ink. | | | |
| NAME | JOB TITLE | RESPONSIBLE FOR | ISSUE DATE |
| Andy Lawson | Senior Engineer | Authorised Signatory | 01 Sept 2020 |

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

| RESPONSIBLE FOR | NAME | DATE | SIGNATURE |
|-----------------|-----------------|--------------|--|
| Testing | Matthew Dawkins | 01 Sept 2020 | A handwritten signature of "Matthew Dawkins" in black ink. |

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15B: 2019 for the tests detailed in section 1.3.

| | | |
|---|--|---|
| The ILAC-MRA logo, featuring a circular emblem with concentric lines and the text "ILAC-MRA" below it. | The UKAS Testing logo, featuring a circular emblem with a stylized "K" and the text "UKAS TESTING" below it. | DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2020 TÜV SÜD. This report relates only to the actual item/items tested. |
| ACCREDITATION Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). | | |

TÜV SÜD
is a trading name of TUV SUD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TUV SUD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

Contents

| | | |
|----------|--------------------------------------|-----------|
| 1 | Report Summary | 2 |
| 1.1 | Report Modification Record..... | 2 |
| 1.2 | Introduction..... | 2 |
| 1.3 | Brief Summary of Results | 3 |
| 1.4 | Declaration of Build Status | 4 |
| 1.5 | Product Information | 7 |
| 1.6 | Deviations from the Standard..... | 7 |
| 1.7 | EUT Modification Record | 8 |
| 1.8 | Test Location..... | 8 |
| 2 | Test Details | 9 |
| 2.1 | Radiated Disturbance..... | 9 |
| 3 | Measurement Uncertainty | 26 |

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

| Issue | Description of Change | Date of Issue |
|-------|-----------------------|---------------|
| 1 | First Issue | 01 Sept 2020 |

Table 1

1.2 Introduction

| | |
|-------------------------------|-----------------------------------|
| Applicant | Technolog Ltd |
| Manufacturer | Technolog Ltd |
| Model Number(s) | Cello 4S |
| Serial Number(s) | 20201793756-F4 and 20201793755.92 |
| Hardware Version(s) | 2172TT2400B |
| Software Version(s) | 4.47 |
| Number of Samples Tested | 2 |
| Test Specification/Issue/Date | FCC 47 CFR Part 15B: 2019 |
| Order Number | PO-020235 |
| Date | 09-April-2020 |
| Date of Receipt of EUT | 28-April-2020 and 30-April-2020 |
| Start of Test | 01-May-2020 |
| Finish of Test | 01-May-2020 |
| Name of Engineer(s) | Matthew Dawkins |
| Related Document(s) | ANSI C63.4: 2014 |



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15B is shown below.

| Section | Specification Clause | Test Description | Result | Comments/Base Standard |
|---|----------------------|----------------------|--------|------------------------|
| Configuration and Mode: Battery Powered - Internal Battery - Idle | | | | |
| 2.1 | 15.109 | Radiated Disturbance | Pass | ANSI C63.4: 2014 |
| Configuration and Mode: Battery Powered - External Battery - Idle | | | | |
| 2.1 | 15.109 | Radiated Disturbance | Pass | ANSI C63.4: 2014 |

Table 2



1.4 Declaration of Build Status

Equipment Description

| | |
|--|--|
| Technical Description: <i>(Please provide a brief description of the intended use of the equipment)</i> | Data logger for monitoring pressure and flow in a mains water distribution network. The logger sends data periodically via SMS or a data connection with a server. |
| Manufacturer: | Technolog Ltd |
| Model: | Cello 4S |
| Part Number: | 2172CG3517 |
| Hardware Version: | 2172TT2400B |
| Software Version: | 4.47 |
| FCC ID (if applicable) | XUV-2172TT2400 |
| IC ID (if applicable) | Not Applicable |

Intentional Radiators

| | | | | | |
|---------------------------------------|--|--|--|--|--|
| Technology | GSM 850 | LTE FDD Band 12 Cat-M1 | LTE FDD Band 4 Cat-M1 | LTE FDD Band 12 NB-IoT | LTE FDD Band 4 NB-IoT |
| Frequency Band (MHz) | 824.2 to 848.8 | 699 to 716 | 1710 to 1755 | 699 to 716 | 1710 to 1755 |
| Conducted Declared Output Power (dBm) | 33 (+/-2) | 23 (+/-2) | 23 (+/-2) | 23 (+/-2) | 23 (+/-2) |
| Antenna Gain (dBi) | 2.6 (internal ant) 4.5 (external ant) | 2.6 (internal ant) 4.5 (external ant) | 4.4 (internal ant) 5 (external ant) | 2.6 (internal ant) 4.5 (external ant) | 4.4 (internal ant) 5 (external ant) |
| Supported Bandwidth(s) (MHz) | 0.2 | 1.4 | 1.4 | 0.2 | 0.2 |
| Modulation Scheme(s) | GMSK | OFDMA, 16 QAM | OFDMA | OFDMA, 16 QAM | OFDMA |
| ITU Emission Designator | 200KG7W | 1M40D7W | 200KD7W | 1M40D7W | 200KD7W |
| Bottom Frequency (MHz) | 824.6 | 699.7 | 1710.7 | 699.4 | 1710.4 |
| Middle Frequency (MHz) | 836.4 | 707.4 | 1732.4 | 707.4 | 1732.4 |
| Top Frequency (MHz) | 848.4 | 715.3 | 1754.3 | 715.6 | 1754.6 |

Un-intentional Radiators

| | |
|--|-------------------------------------|
| Highest frequency generated or used in the device or on which the device operates or tunes | 1755 MHz |
| Lowest frequency generated or used in the device or on which the device operates or tunes | 0 Hz |
| Class A Digital Device (Use in commercial, industrial or business environment) | <input checked="" type="checkbox"/> |
| Class B Digital Device (Use in residential environment only) | <input type="checkbox"/> |



Battery Power Source

| | | |
|---|----------------|---|
| Voltage: | 3.6 | V |
| End-point voltage: | 3.5 | V (Point at which the battery will terminate) |
| Alkaline <input type="checkbox"/> Leclanche <input type="checkbox"/> Lithium <input checked="" type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Lead Acid* <input type="checkbox"/> * <i>(Vehicle regulated)</i> | | |
| Other <input type="checkbox"/> | Please detail: | |

Charging

| | |
|---|---|
| Can the EUT transmit whilst being charged | Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> |
|---|---|

Temperature

| | | |
|----------------------|-----|----|
| Minimum temperature: | -20 | °C |
| Maximum temperature: | +60 | °C |

Antenna Characteristics

| | | | | | |
|---|-------|---------|-----------------|-------------------------------|-----|
| Antenna connector <input checked="" type="checkbox"/> | | | State impedance | 50 | Ohm |
| Temporary antenna connector <input type="checkbox"/> | | | State impedance | | Ohm |
| Integral antenna <input checked="" type="checkbox"/> | Type: | Ceramic | Gain | 2.6 @ 700 & 850 4.4 @ 1700 | dBi |
| External antenna <input checked="" type="checkbox"/> | Type: | dipole | Gain | 4.5 @ 700 & 850 5 @ 1700 | dBi |
| For external antenna only: Standard Antenna Jack <input checked="" type="checkbox"/> If yes, describe how user is prohibited from changing antenna (if not professional installed): Equipment is only ever professionally installed <input checked="" type="checkbox"/> Non-standard Antenna Jack <input type="checkbox"/> | | | | | |

Ancillaries (if applicable)

| ANCILLARIES (if applicable) | | | |
|-----------------------------|--|---|--------------------------|
| MANUFACTURING DESCRIPTION | External Pressure Sensor | Input cable (3-way) | External antenna |
| MANUFACTURER | First Sensor | Technolog Ltd | Smarteq |
| TYPE | SS body digital water pressure sensor with flying lead | 5m flying lead (unscreened) | Low profile, full dipole |
| PART NUMBER | SQ619-13219 | CBLUT03U000 | 710266 |
| SERIAL NUMBER | N/A | N/A | N/A |
| COUNTRY OF ORIGIN | Germany | UK | Sweden |
| ANCILLARIES (cont'd) | | | |
| MANUFACTURING DESCRIPTION | Input cable (12-way) | External Battery Pack | |
| MANUFACTURER | Technolog Ltd | Technolog Ltd | |
| TYPE | 1.5m flying lead, unshielded cable. | 3.6v primary lithium. ~400mm connection lead (unshielded) | |
| PART NUMBER | CBL006 | 2133TT3000-1 | |
| SERIAL NUMBER | N/A | N/A | |
| COUNTRY OF ORIGIN | UK | UK | |



I hereby declare that the information supplied is correct and complete.

Name: Joe Sawyer
Position held: Production Engineering Manager
Date: 26 August 2020



1.5 Product Information

1.5.1 Technical Description

The Equipment under test (EUT) was a Cello 4S.

The EUT is a battery-powered data logger primarily used for monitoring and recording parameters in a water utility network. The unit supports LTE Category M1 and NB1 with 2G fall-back.

1.5.2 EUT Port/Cable Identification

| Port | Max Cable Length specified | Usage | Type | Screened |
|--|----------------------------|--------|--------|----------|
| Configuration and Mode: All Configurations and Modes | | | | |
| External Disk Antenna Port | 3 m | Signal | SMA | No |
| External Pressure Sensor Port | 2 m | Data | Custom | No |
| External Battery Port | 0.5 m | Power | Custom | No |
| Flow Input Port | 5 m | Data | 3 way | No |
| Digital Input Port | 2 m | Data | 8 way | No |

Table 3

1.5.3 Test Configuration

| Configuration | Description |
|------------------------------------|---|
| Battery Powered - Internal Battery | The EUT was powered via an internal 3.9 V DC cell battery. The EUT was connected to: A Disc Antenna A Pressure Sensor A flow sensor cable with no sensor attached A test box was connected to the digital input. |
| | The EUT was powered via an external 3.6 V DC battery pack. The EUT was connected to: A Disc Antenna A Pressure Sensor A flow sensor cable with no sensor attached A test box was connected to the digital input. |

Table 4

1.5.4 Modes of Operation

| Mode | Description |
|------|---|
| Idle | The EUT was powered with all transmitters disabled. |

Table 5

1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

| Modification State | Description of Modification still fitted to EUT | Modification Fitted By | Date Modification Fitted |
|--|---|------------------------|--------------------------|
| Model: Cello 4S, Serial Number: 20201793756-F4 | | | |
| 0 | As supplied by the customer | Not Applicable | Not Applicable |
| Model: Cello 4S, Serial Number: 20201793755.92 | | | |
| 0 | As supplied by the customer | Not Applicable | Not Applicable |

Table 6

1.8 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

| Test Name | Name of Engineer(s) | Accreditation |
|---|---------------------|---------------|
| Configuration and Mode: Battery Powered - Internal Battery - Idle | | |
| Radiated Disturbance | Matthew Dawkins | UKAS |
| Configuration and Mode: Battery Powered - External Battery - Idle | | |
| Radiated Disturbance | Matthew Dawkins | UKAS |

Table 7

Office Address:

Octagon House
Concorde Way
Segensworth North
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 Radiated Disturbance

2.1.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.109

2.1.2 Equipment Under Test and Modification State

Cello 4S, S/N: 20201793756-F4 - Modification State 0
Cello 4S, S/N: 20201793755.92 - Modification State 0

2.1.3 Date of Test

01-May-2020

2.1.4 Test Method

The EUT was set up in a semi-anechoic chamber on a remotely controlled turntable and placed on a non-conductive table 0.8m above a reference ground plane.

A pre-scan of the EUT emissions profile was made at a 3m distance while varying the antenna-to-EUT azimuth and polarisation using a peak detector.

Using a list of the highest emissions detected during the pre-scan along with their bearing and associated antenna polarisation, the EUT was formally measured using a Quasi-Peak, Peak or CISPR Average detector as appropriate.

The readings were maximised by adjusting the antenna height, polarisation and turntable azimuth, in accordance with the specification.

2.1.5 Example Calculation

Below 1 GHz:

Quasi-Peak level (dB μ V/m) = Receiver level (dB μ V) + Correction Factor (dB/m)
Margin (dB) = Quasi-Peak level (dB μ V/m) - Limit (dB μ V/m)

Above 1 GHz:

CISPR Average level (dB μ V/m) = Receiver level (dB μ V) + Correction Factor (dB/m)
Margin (dB) = CISPR Average level (dB μ V/m) - Limit (dB μ V/m)

Peak level (dB μ V/m) = Receiver level (dB μ V) + Correction Factor (dB/m)
Margin (dB) = Peak level (dB μ V/m) - Limit (dB μ V/m)

2.1.6 Example Test Setup Diagram

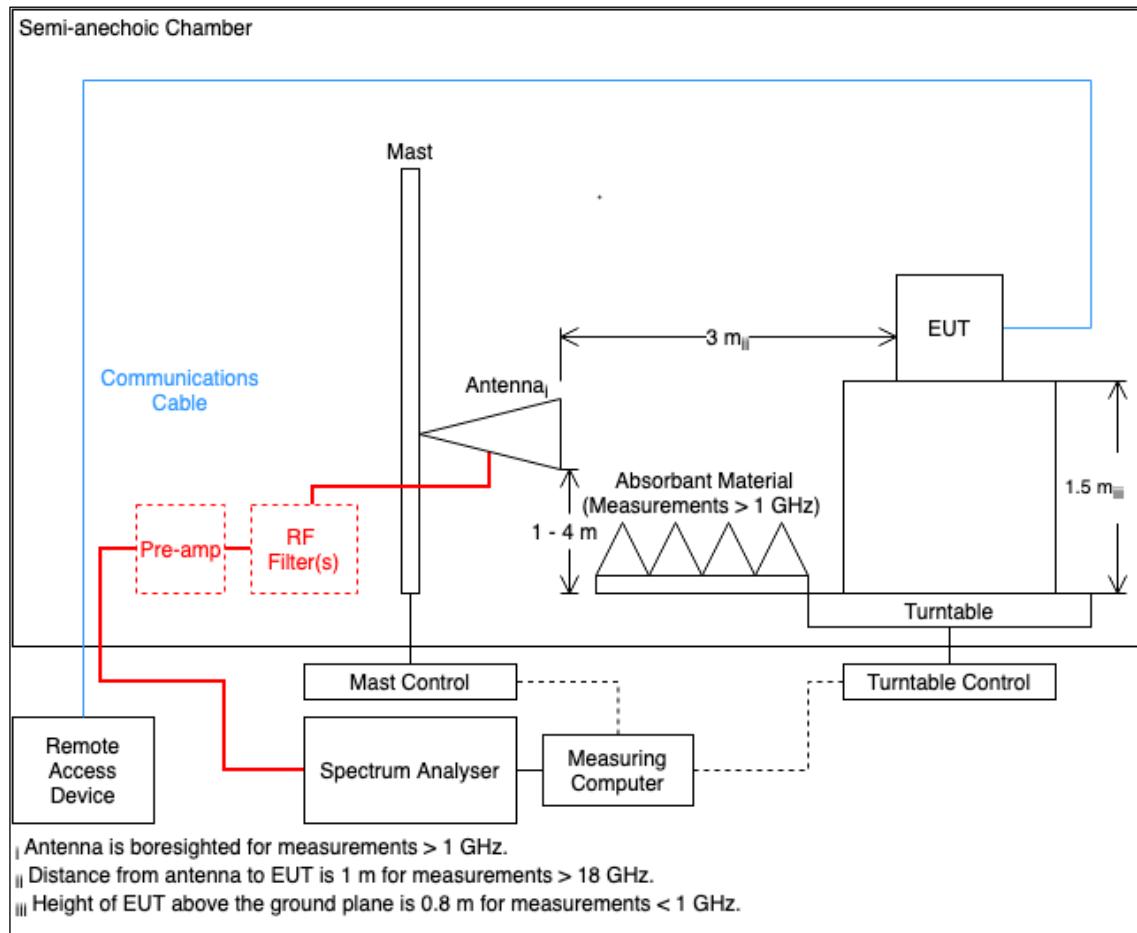


Figure 1

2.1.7 Environmental Conditions

Ambient Temperature 20.0 °C
 Relative Humidity 50.0 %

2.1.8 Specification Limits

| Required Specification Limits, Field Strength (Class A @ 10 m) | | |
|--|---------------------|------------------------------|
| Frequency Range (MHz) | ($\mu\text{V/m}$) | ($\text{dB}\mu\text{V/m}$) |
| 30 to 88 | 90 | 39.1 |
| 88 to 216 | 150 | 43.5 |
| 216 to 960 | 210 | 46.4 |
| Above 960 | 300 | 49.5 |

Supplementary information:
 Quasi-peak detector to be used for measurements below 1 GHz
 CISPR Average detector to be used for measurements above 1 GHz
 Peak test limit above 1 GHz is 20 dB higher than the CISPR Average test limit.

Table 8

2.1.9 Test Results

Results for Configuration and Mode: Battery Powered - Internal Battery - Idle.

The test was performed in accordance with the Class A limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Highest frequency generated or used within the EUT: 1755 MHz
Which necessitates an upper frequency test limit of: 13 GHz

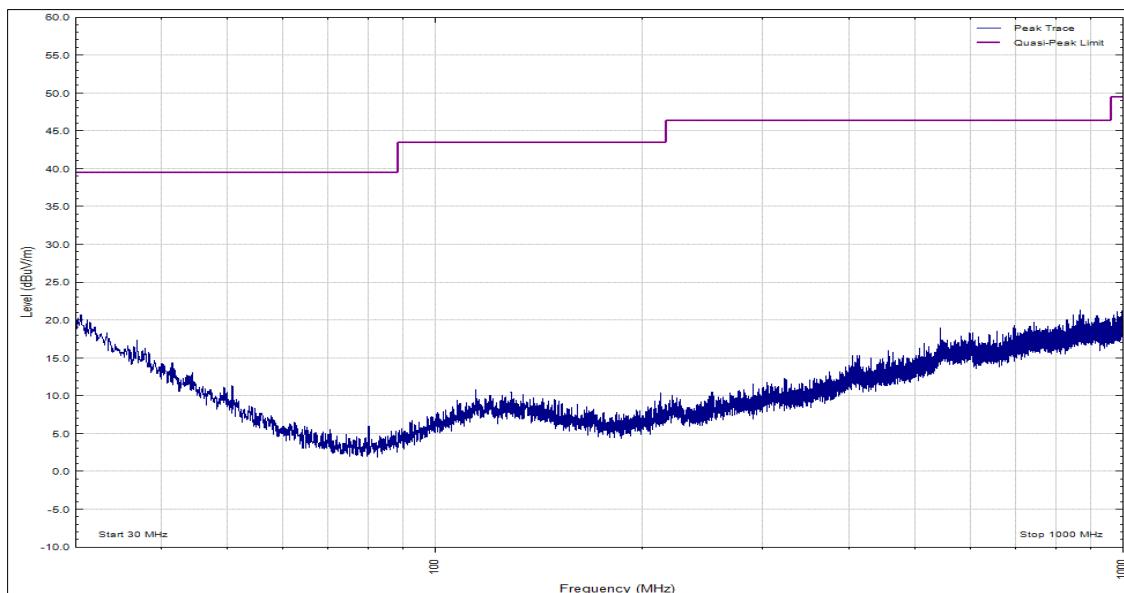


Figure 2 - 30 MHz to 1 GHz, Quasi-Peak, Horizontal

| Frequency (MHz) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------|----------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 9

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

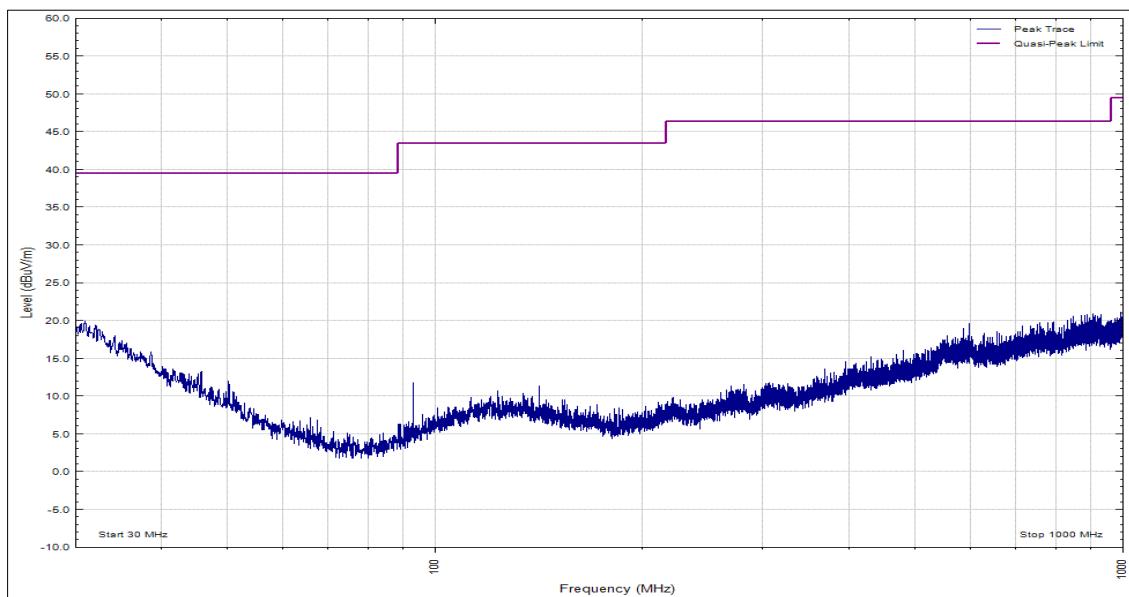


Figure 3 - 30 MHz to 1 GHz, Quasi-Peak, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 10

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

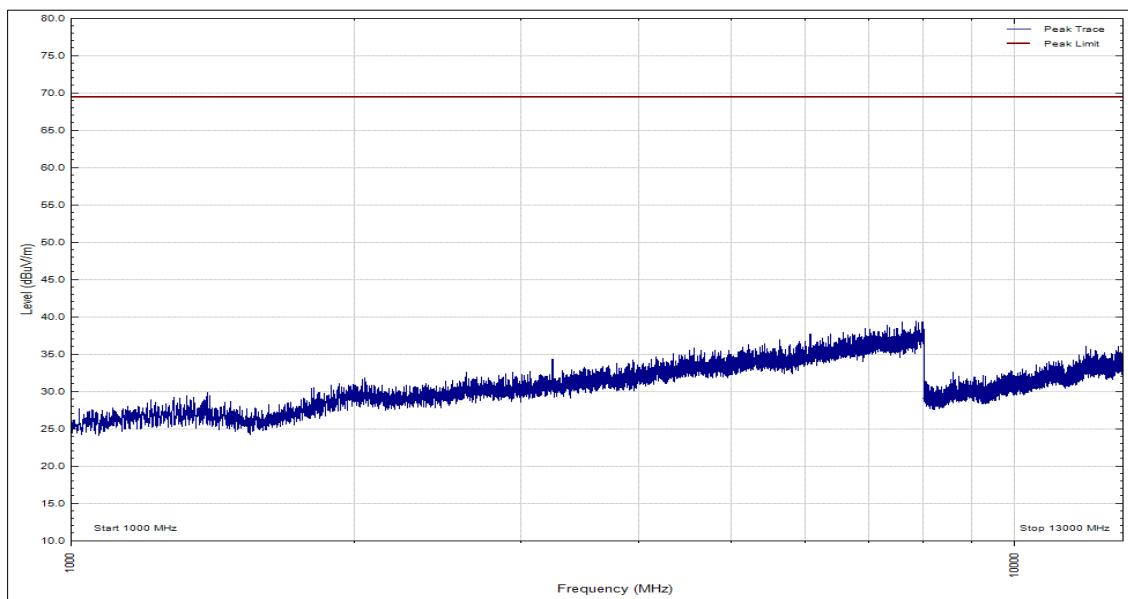


Figure 4 - 1 GHz to 13 GHz, Peak, Horizontal

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 11

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

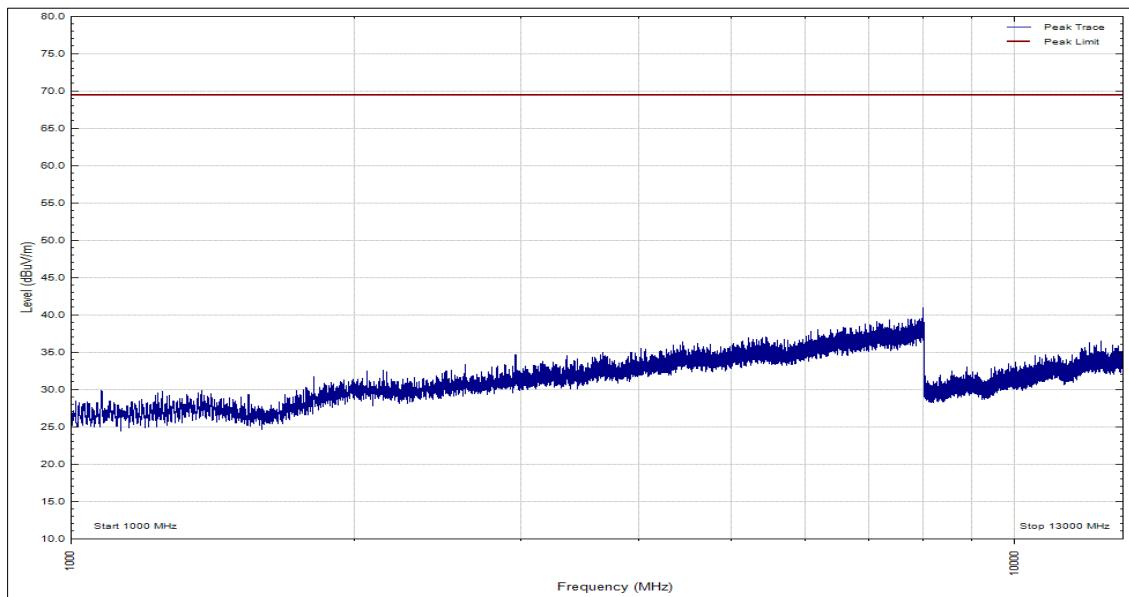


Figure 5 - 1 GHz to 13 GHz, Peak, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 12

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

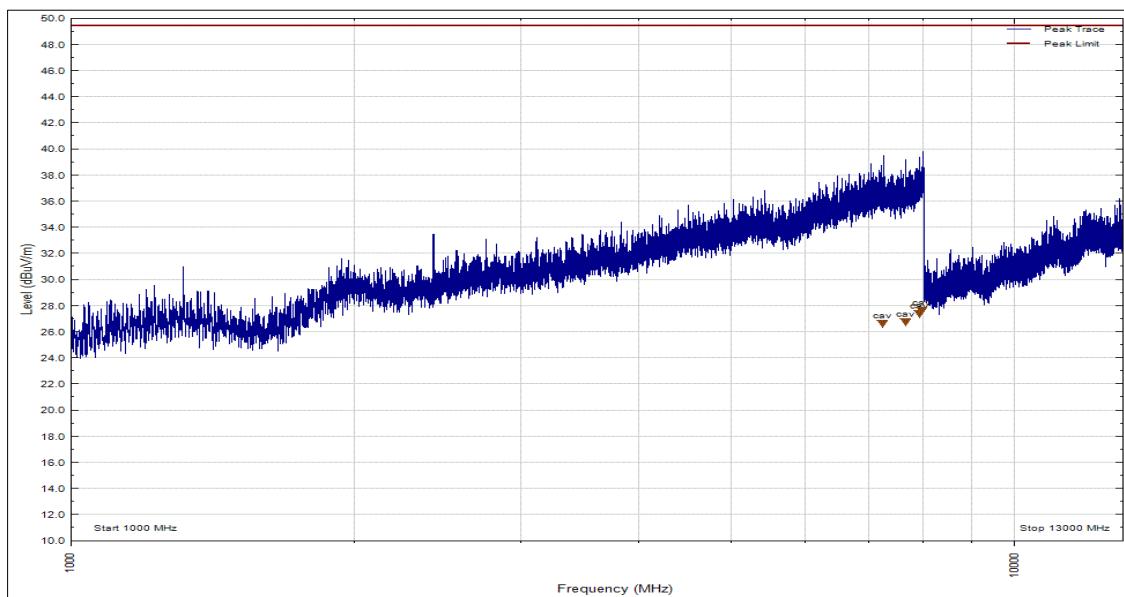


Figure 6 - 1 GHz to 13 GHz, CISPR Average, Horizontal

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| 7246.329 | 26.2 | 49.5 | -23.3 | Average | 219 | 109 | Horizontal | - |
| 7658.283 | 26.3 | 49.5 | -23.2 | Average | 219 | 149 | Horizontal | - |
| 7920.416 | 26.9 | 49.5 | -22.6 | Average | 253 | 234 | Horizontal | - |
| 7976.144 | 27.2 | 49.5 | -22.3 | Average | 124 | 255 | Horizontal | - |

Table 13

No other measurements were made as all other peak emissions seen were greater than 10 dB below the test limit.

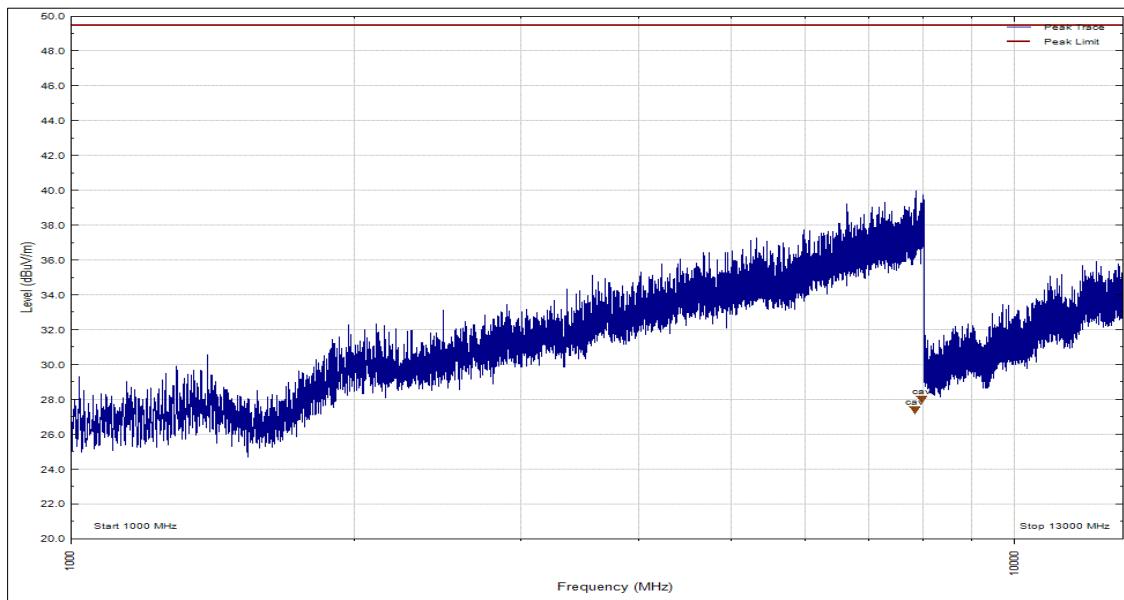


Figure 7 - 1 GHz to 13 GHz, CISPR Average, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| 7848.190 | 27.1 | 49.5 | -22.4 | Average | 360 | 378 | Vertical | - |
| 7981.261 | 27.7 | 49.5 | -21.9 | Average | 160 | 390 | Vertical | - |

Table 14

No other measurements were made as all other peak emissions seen were greater than 10 dB below the test limit.

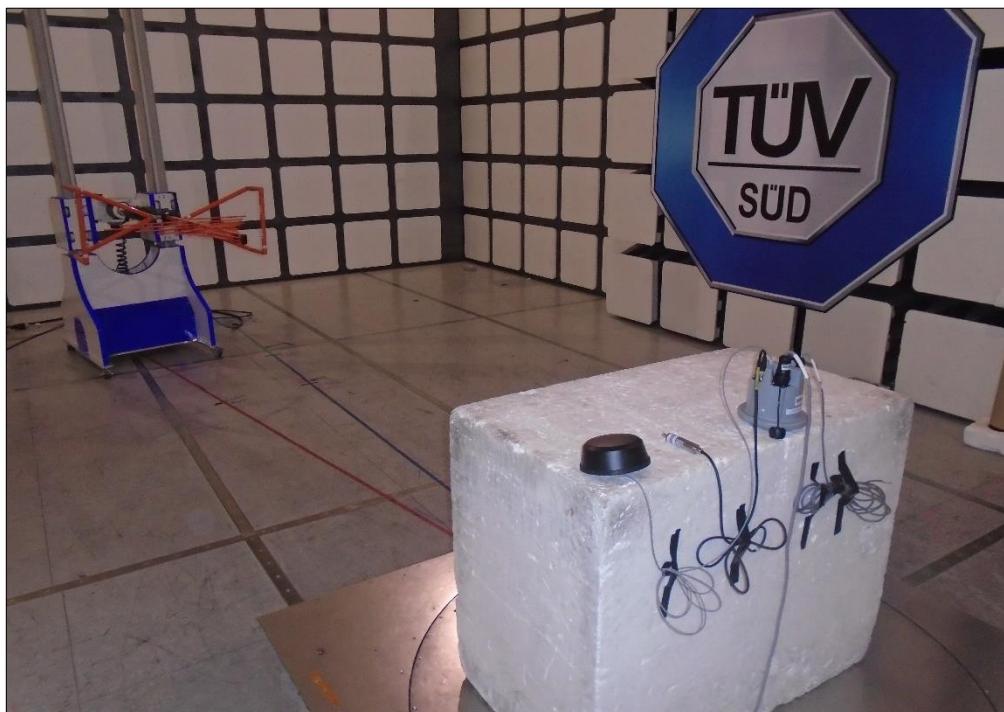


Figure 8 - Test Setup - 30 MHz to 1 GHz



Figure 9 - Test Setup - 1 GHz to 13 GHz

Results for Configuration and Mode: Battery Powered - External Battery - Idle.

The test was performed in accordance with the Class A limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Highest frequency generated or used within the EUT: 1755 MHz
Which necessitates an upper frequency test limit of: 13 GHz

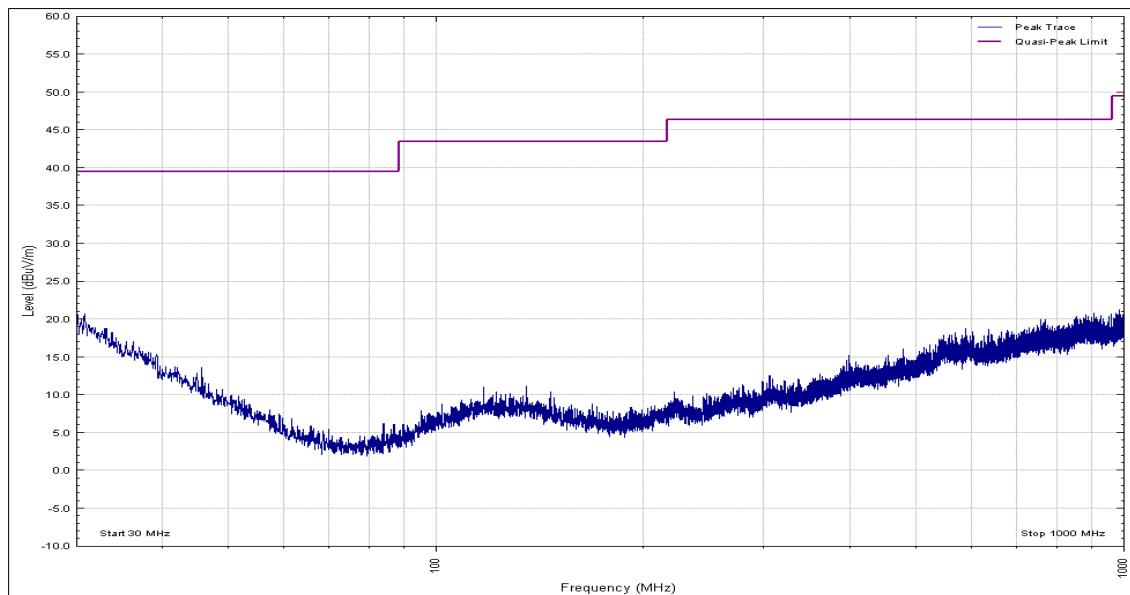


Figure 10 - 30 MHz to 1 GHz, Quasi-Peak, Horizontal

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 15

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

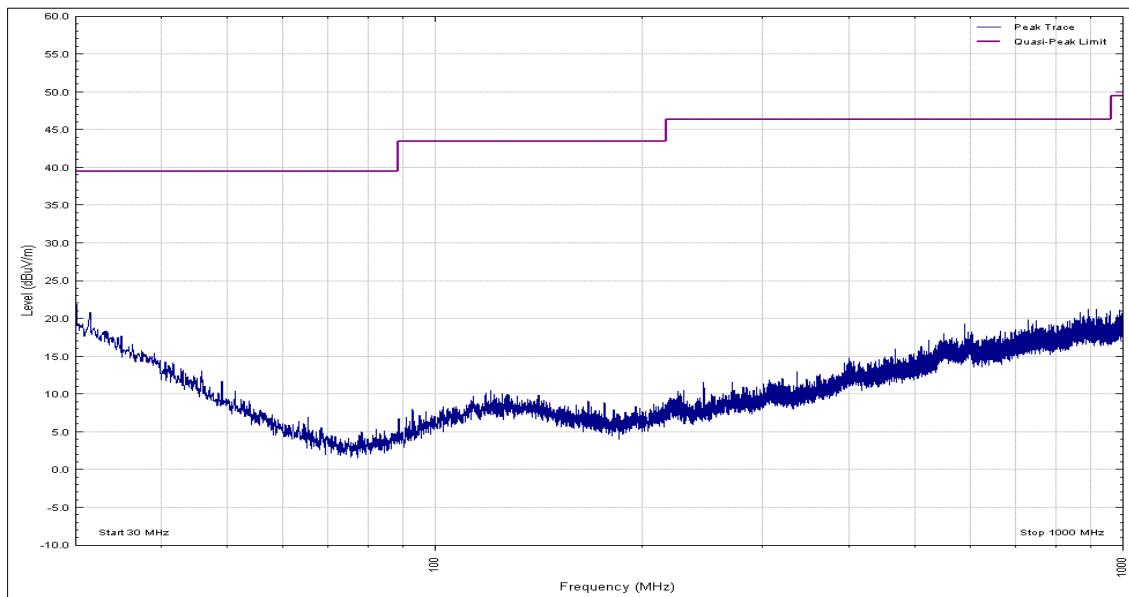


Figure 11 - 30 MHz to 1 GHz, Quasi-Peak, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 16

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

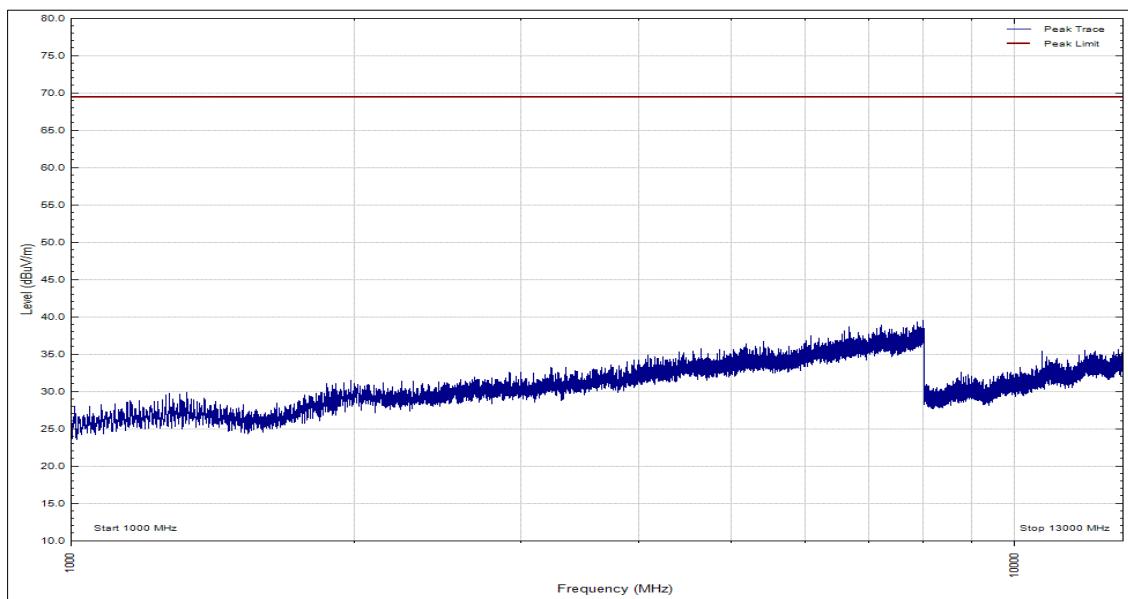


Figure 12 - 1 GHz to 13 GHz, Peak, Horizontal

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 17

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

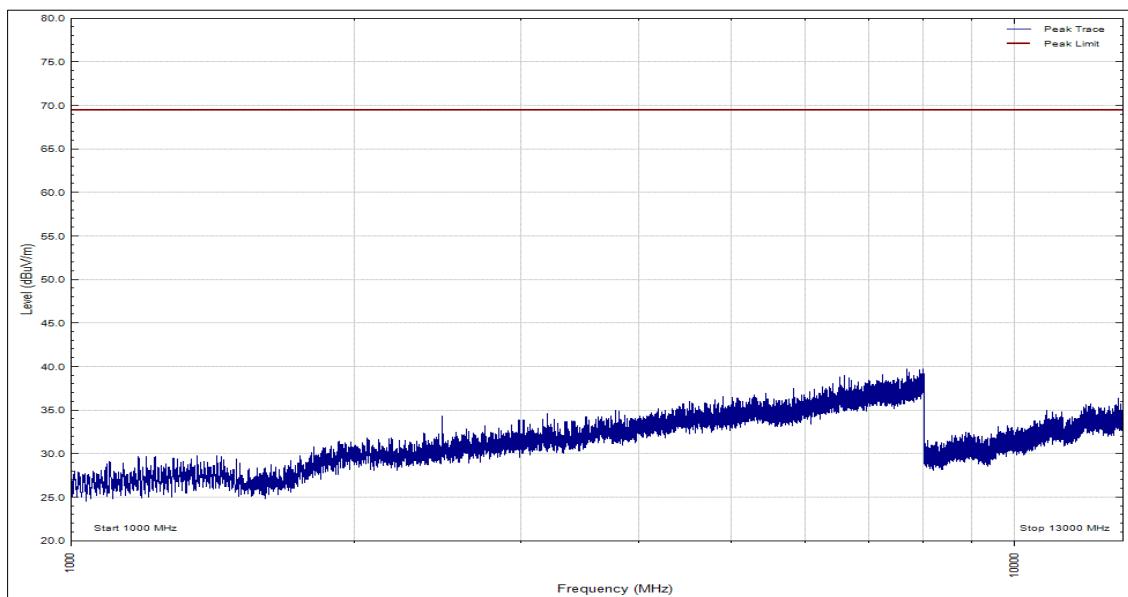


Figure 13 - 1 GHz to 13 GHz, Peak, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| * | | | | | | | | |

Table 18

*No formal measurements were made as all peak emissions seen were greater than 10 dB below the test limit.

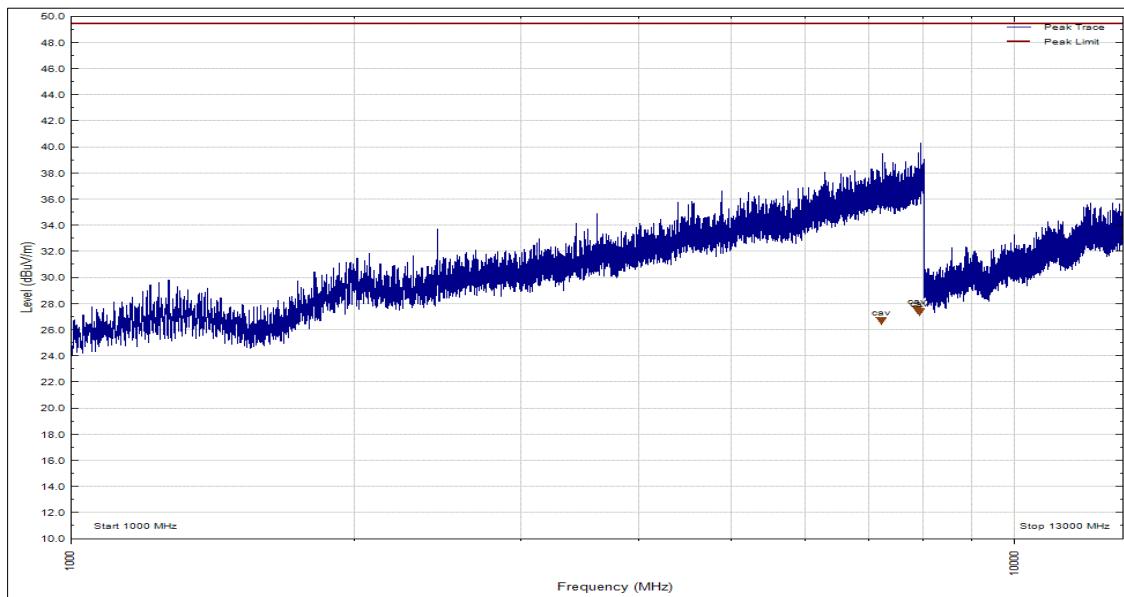


Figure 14 - 1 GHz to 13 GHz, CISPR Average, Horizontal

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| 7223.577 | 26.3 | 49.5 | -23.2 | Peak | 96 | 103 | Horizontal | - |
| 7885.073 | 27.1 | 49.5 | -22.4 | Peak | 294 | 105 | Horizontal | - |
| 7935.397 | 26.9 | 49.5 | -22.6 | Peak | 238 | 100 | Horizontal | - |

Table 19

No other measurements were made as all other peak emissions seen were greater than 10 dB below the test limit.

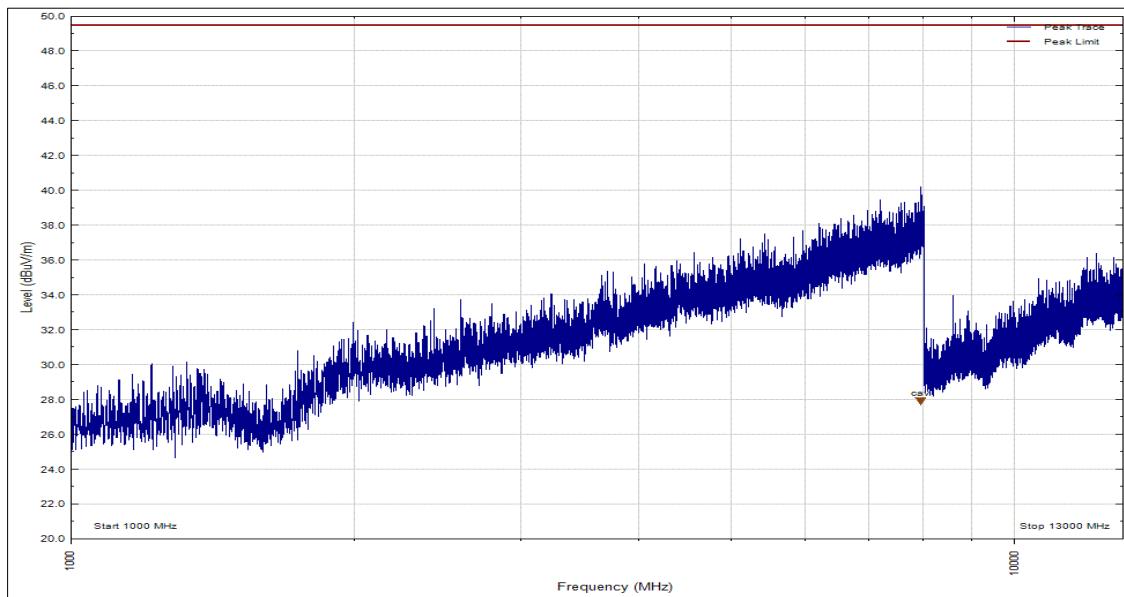


Figure 15 - 1 GHz to 13 GHz, CISPR Average, Vertical

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Angle (°) | Height (cm) | Polarisation | Orientation |
|-----------------|----------------------|----------------------|-------------|----------|-----------|-------------|--------------|-------------|
| 7954.680 | 27.6 | 49.5 | -21.9 | Average | 22 | 152 | Vertical | - |

Table 20

No other measurements were made as all other peak emissions seen were greater than 10 dB below the test limit.



Figure 16 - Test Setup - 30 MHz to 1 GHz



Figure 17 - Test Setup - 1 GHz to 13 GHz

2.1.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

| Instrument | Manufacturer | Type No | TE No | Calibration Period (months) | Calibration Due |
|---|-----------------------|-------------------|-------|-----------------------------|-----------------|
| Screened Room (5) | Rainford | Rainford | 1545 | 36 | 23-Jan-2021 |
| Turntable Controller | Inn-Co GmbH | CO 1000 | 1606 | - | TU |
| Antenna with permanent attenuator (Bilog) | Chase | CBL6143 | 2904 | 24 | 30-Sep-2021 |
| Comb Generator | Schaffner | RSG1000 | 3034 | - | TU |
| Radio Communications Test Set | Rohde & Schwarz | CMU 200 | 3035 | 12 | 28-Jan-2021 |
| Triaxial accelerometer | Meggitt | 66A50 | 4348 | 6 | 30-May-2020 |
| Cable (Yellow, Rx, Km-Km 2m) | Scott Cables | KPS-1501-2000-KPS | 4527 | 6 | 09-Jun-2020 |
| Mast Controller | Maturo GmbH | NCD | 4810 | - | TU |
| Tilt Antenna Mast | Maturo GmbH | TAM 4.0-P | 4811 | - | TU |
| Double Ridge Broadband Horn Antenna | Schwarzbeck | BBHA 9120 B | 4848 | 12 | 10-Mar-2021 |
| 4dB Attenuator | Pasternack | PE7047-4 | 4935 | 24 | 30-Sep-2021 |
| EmX Emissions Software | TÜV SUD | EmX V.V1.5.9 | 5125 | - | Software |
| 8 Meter Cable | Teledyne | PR90-088-8MTR | 5212 | 12 | 30-Aug-2020 |
| Cellular Signalling Box | Keysight Technologies | UXM | 5267 | 12 | 05-Mar-2021 |
| Antenna (DRG Horn 7.5-18GHz) | Schwarzbeck | HWRD750 | 5348 | 12 | 04-Sep-2020 |
| Thermo-Hygro-Barometer | PCE Instruments | OCE-THB-40 | 5470 | 12 | 16-Mar-2021 |
| EMI Test Receiver | Rohde & Schwarz | ESW44 | 5527 | 12 | 06-Feb-2021 |

Table 21

TU – Traceability Unscheduled

3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

| Test Name | Measurement Uncertainty |
|----------------------|---|
| Radiated Disturbance | 30 MHz to 1 GHz, Bilog Antenna, ± 5.2 dB 1 GHz to 40 GHz, Horn Antenna, ± 6.3 dB |

Table 22

Worst case error for both Time and Frequency measurement 12 parts in 10^6 .

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.