



America

Choose certainty.
Add value.

Report On

Application for Grant of Equipment Authorization of the
Telkonet Inc.
EcoSmart VRF Controller

FCC Part 15 Subpart C § 15.247
RSS 247 Issue 2, February 2017
RSS-Gen Issue 4, November 2014

Report No. TP72119798.100

March 2017

REPORT ON Radio Testing of the
Telkonet Inc.
EcoSmart VRF Controller

TEST REPORT NUMBER TP72119798.100

PREPARED FOR Telkonet Inc.
20300 Seneca Meadows Parkway
Germantown, MD 20876

CONTACT PERSON Andrew Pozsgay
apozsgay@telkonet.com

PREPARED BY 

Steven Hoke
Title: Senior EMC Engineer

APPROVED BY



Pete Walsh, NCE
Authorized Signatory
Title: Service Line Manager

DATED

29. March 2017

Revision History

TP72119798.100					
Telkonet Inc.					
EcoSmart VRF Controller					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
29. March 2017	Initial Release				Pete Walsh

TABLE OF CONTENTS

Section	Page No
1 REPORT SUMMARY	5
1.1 Introduction	6
1.2 Brief Summary of Results.....	7
1.3 Product Information	8
1.4 EUT Test configuration	9
1.5 Deviations from the Standard	11
1.6 Modification Record	11
1.7 Test Methodology	11
1.8 Test Facility Location.....	11
1.9 Test Facility Registration	11
2 TEST DETAILS	12
2.1 Peak Output Power.....	13
2.2 Conducted Emissions	16
2.3 99% Emission Bandwidth	18
2.4 Minimum 6 dB RF Bandwidth	21
2.5 Out-of-Band Emissions - Conducted	24
2.6 Band-edge Compliance of RF Conducted Emissions	25
2.7 Spurious Radiated Emissions.....	29
2.8 Power Spectral Density	34
3 TEST EQUIPMENT USED	37
3.1 Test Equipment Used	38
3.2 Measurement Uncertainty	39
4 DIAGRAM OF TEST SETUP	41
4.1 Test Setup Diagram.....	42
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	44
5.1 Accreditation, Disclaimers and Copyright.....	45

SECTION 1

REPORT SUMMARY

Radio Testing of the
Telkonet Inc.
EcoSmart VRF Controller

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Telkonet EcoInsight to the requirements of FCC Part 15 Subpart C § 15.247, RSS-Gen, Issue 4, November 2014 and RSS 247 Issue 2, February 2017.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Telkonet Inc.
Model Number(s)	EcoSmart VRF Controller
FCC ID Number	XV6SS6600
IC Number	22341-SS6600
Serial Number(s)	None
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none">• FCC Part 15 Subpart C § 15.247• RSS 247 Issue 2, February 2017 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.• RSS-Gen, Issue 4, November 2014 General Requirements for Compliance of Radio Apparatus.• 558074 D01 DTS Meas Guidance v03r03, (June 09, 2015) Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.
Start of Test	14. December 2016
Finish of Test	16. December 2016
Name of Engineer(s)	David Foerstner
Related Document(s)	None. Supporting documents for EUT certification are separate exhibits.

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C § 15.247 with cross-reference to the corresponding IC RSS standard is shown below.

Section	§15.247 Spec Clause	RSS	Test Description	Result	Comments/ Base Standard
2.1	§15.247(b)(3)	RSS-247 5.4(4)	Peak Output Power	Compliant	
2.2	§15.207(a)	RSS-Gen 8.8	Conducted Emissions	N/A	
2.3		RSS-Gen 6.6	99% Emission Bandwidth	Compliant	
2.4	§15.247(a)(2)	RSS-247 5.2(1)	Minimum 6 dB RF Bandwidth	Compliant	
2.5	§15.247(d)	RSS-247 5.5	Out-of-Band Emissions - Conducted	N/A	
2.6	§15.247(d)	RSS-247 5.5	Band-edge Compliance of RF Conducted Emissions	Compliant	
2.7	§15.247(d)	RSS-Gen 8.9 and 8.10	Spurious Radiated Emissions	Compliant	
2.7		RSS-Gen 7.1	Receiver Spurious Emissions	Compliant	
2.8	§15.247(e)	RSS-247 5.2(2)	Power Spectral Density for Digitally Modulated Device	Compliant	

N/A *Not performed.*

1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) was an EcoSmart VRF Controller, a wireless energy management device used as an HVAC controller.

1.3.2 EUT General Description

EUT Description	An energy management thermostat with a built-in occupancy sensor and ZigBee® capability
Model Name	EcoSmart VRF Controller
Model Number(s)	none
Rated Voltage	12 VDC
Mode Verified	Zigbee
Capability	Zigbee
Primary Unit (EUT)	<input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
Antenna Manufacturer	Telkonet
Antenna Part Number	None
Antenna Type	PC Etch
Antenna Gain	3.3 dBi
Host Brand	NA
Host Model Name	NA
Host Model Number	NA

1.3.3 Maximum Conducted Output Power (Peak)

Mode	Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
Zigbee	2402 - 2480	16.9	48.97

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
A	Radiated emissions test configuration. EUT transmitting through the integral antenna.

1.4.2 EUT Exercise Software

The manufacturer provided the following instructions: The port configuration is 9600 N81. To enable the command line interface, use a TAB-ENTER key sequence. This sequence must be executed each time the unit boots. At this point you should get the prompt "\$".

To configure the RF channel, use the command "zb -c <channel>". Channel is the 802.15.4 channel number. Valid channel numbers are from 11 to 26.

To enable/disable radio transmissions (one packet per 100ms), use the command "mfg -f <0,1>" where 1 is enable and 0 is disable.

The radio transmit power is fixed at the maximum level.

1.4.3 Support Equipment and I/O cables


Manufacturer	Equipment/Cable	Description
Lenovo	Support Laptop for programming EUT	B570

1.4.4 Worst Case Configuration

EUT verified on all three (3) orthogonal axes. Only worst case axis presented (X).

1.4.5 Simplified Test Configuration Diagram

Radiated Emission Test Setup

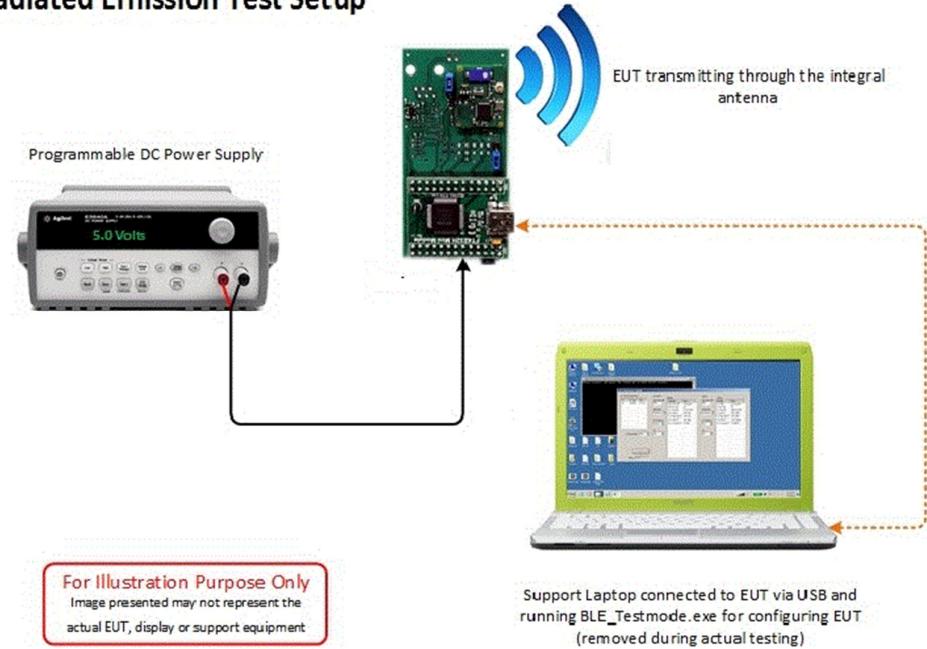

Configuration not presented is when the EUT is installed inside a representative host. Radiated emissions were performed on the host while the EUT is in Rx and TX mode (worst case).

1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Tampa)

5610 W. Sligh Ave., Tampa, FL 33634 Phone: 813 284 2715 FAX: 813-413 3813

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No

The TUV SUD America Inc. (Tampa), test facility has been registered with the Federal Communication Commission as an ISO/IEC 17025 accredited test laboratory and assigned the designation number US1063.

1.9.2 Innovation, Science and Economic Development Canada Registration

The TUV SUD America Inc. (Tampa), test facility has been registered with Innovation, Science and Economic Development Canada and assigned the site number 2087A-2.

FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100



SECTION 2

TEST DETAILS

Radio Testing of the
Telkonet Inc.
EcoSmart VRF Controller

2.1 PEAK OUTPUT POWER

2.1.1 Specification Reference

Part 15 Subpart C §15.247(b)(3)

2.1.2 Standard Applicable

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

2.1.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.1.4 Date of Test/Initial of test personnel who performed the test

14. December 2016 / DF

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.1.7 Additional Observations

- This is a radiated test (Maximum Peak Output Power) using a spectrum analyzer.
- Test methodology is per Clause 9.2.2.6 of KDB 558074 D01 (DTS Meas Guidance v03r05, April 08, 2016). All conditions under this Clause were satisfied.

2.1.8 Test Results

Convert Field Strength to dBm $EIRP = FS + (20 \log D) - 104.7$ $EIRP = FS - 95.2$					
Channel	Field Strength dBuV/m @ 3 meters	$(20 \log 3) - 104.7$		Actual Peak Power (dBm)	Actual Peak Power (mW)
2405 MHz	112.1	-95.2		16.9	48.97
2440 MHz	111.3	-95.2		16.1	40.74
2480 MHz	111.7	-95.2		16.5	44.67

2.1.9 Test Plots

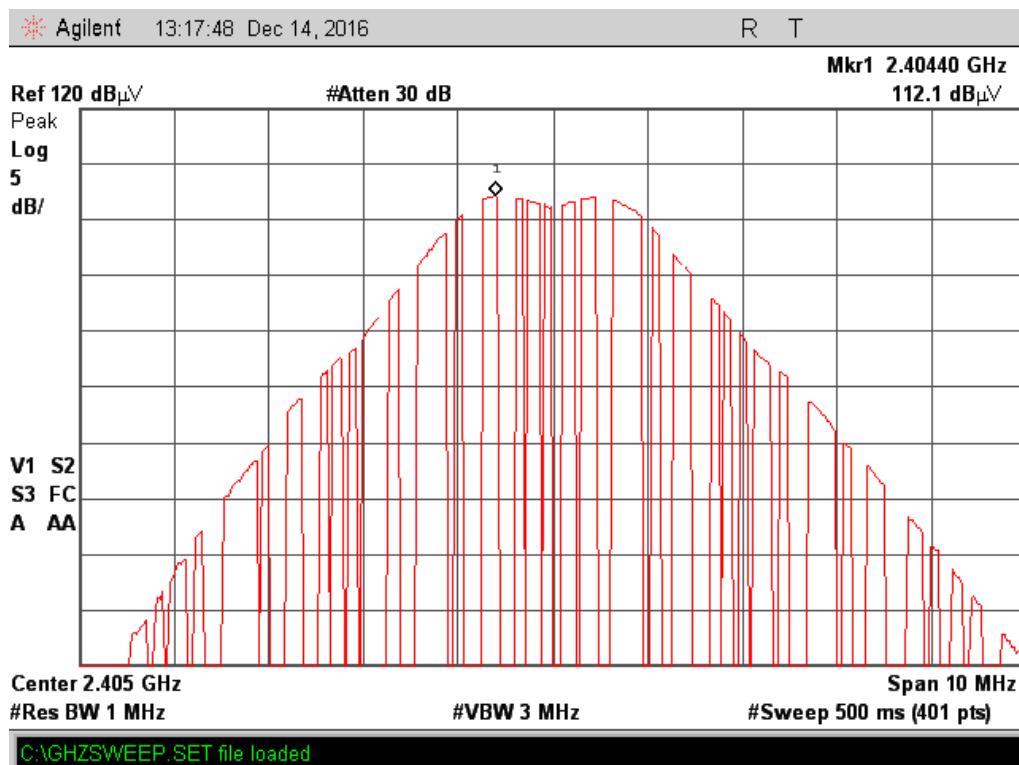


Figure 2.1.9-1 - Low Channel Peak Power

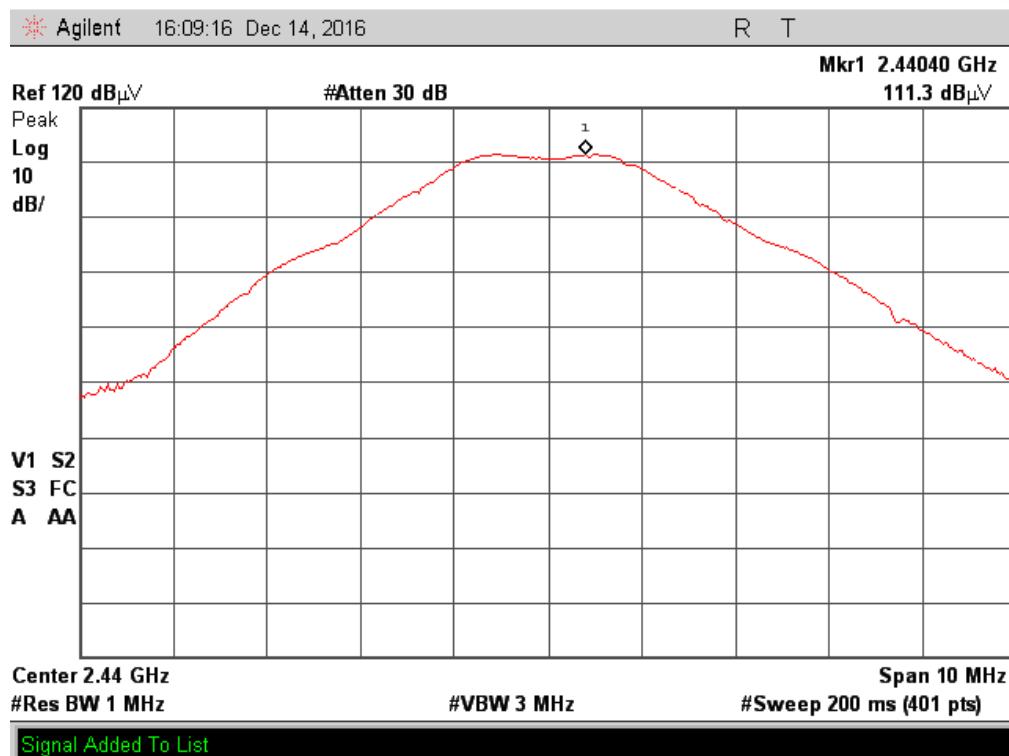


Figure 2.1.9-2 - Mid Channel Peak Power

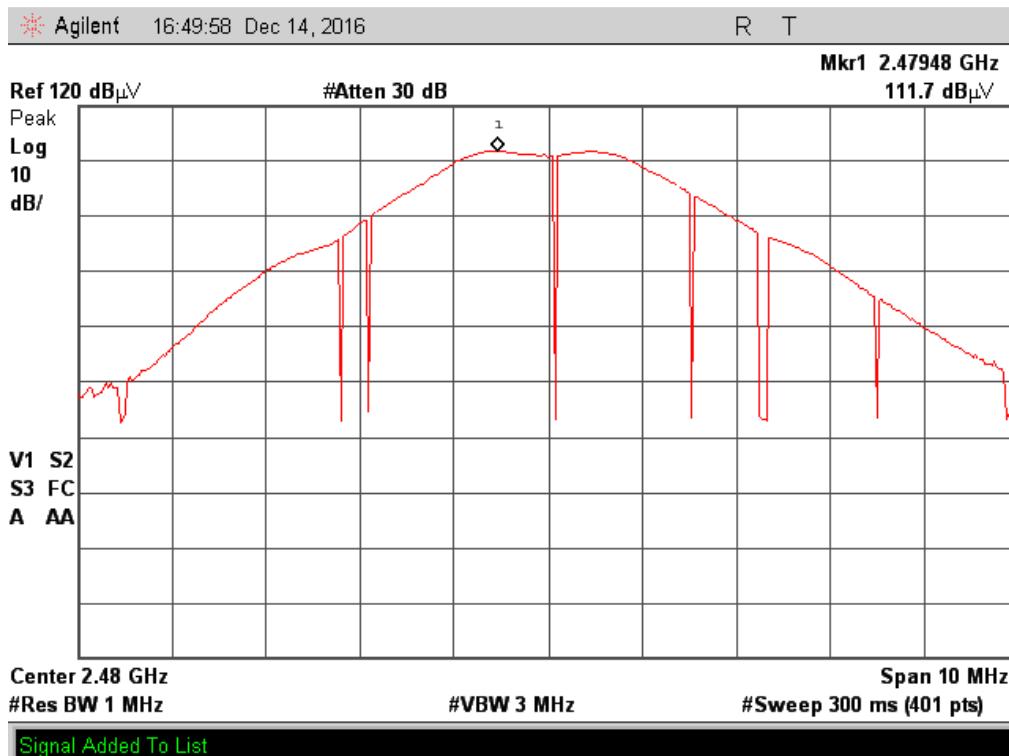


Figure 2.1.9-3 - High Channel Peak Power

2.2 CONDUCTED EMISSIONS

2.2.1 Specification Reference

Part 15 Subpart C §15.207(a)

2.2.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

2.2.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration C

2.2.4 Date of Test/Initial of test personnel who performed the test

NA

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions

Ambient Temperature	25.3°C
Relative Humidity	20.2%
ATM Pressure	99.3 kPa

2.2.7 Additional Observations

2.2.8 Sample Computation (Conducted Emission – Quasi Peak)

Measuring equipment raw measurement (dB μ V) @ 150kHz			30.0
Correction Factor (dB)	TEMC00002 - LISN	0.03	0.11
	Cable 1	0.08	
	Reported QuasiPeak Final Measurement (dB μ V) @ 150kHz	30.11	

FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100



2.2.9 Test Results

The conducted emissions tests was not applicable since the EUT was powered by 12 VDC; did not connect to a public utility ac line.

2.3 99% Emission Bandwidth

2.3.1 Specification Reference

RSS-Gen Clause 6.6

2.3.2 Standard Applicable

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

2.3.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.3.4 Date of Test/Initial of test personnel who performed the test

14. December 2016 / DF

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature 24 - 26 °C
Relative Humidity 30 - 32 %

2.3.7 Additional Observations

- This is a radiated test. EUT on normal test mode.
- Span is wide enough to capture the channel transmission.
- RBW is 1% to 5% of the span.
- VBW is 3X RBW.
- Sweep is auto.
- Detector is peak.

2.3.8 Test Results (For reporting purposes only)

Mode	Channel	Measured 99% Bandwidth (MHz)
Zigbee	2405 MHz	2.68
	2440 MHz	2.85
	2480 MHz	2.88

2.3.9 Test Plots



Figure 2.3.9-1 - Low Channel Bandwidth

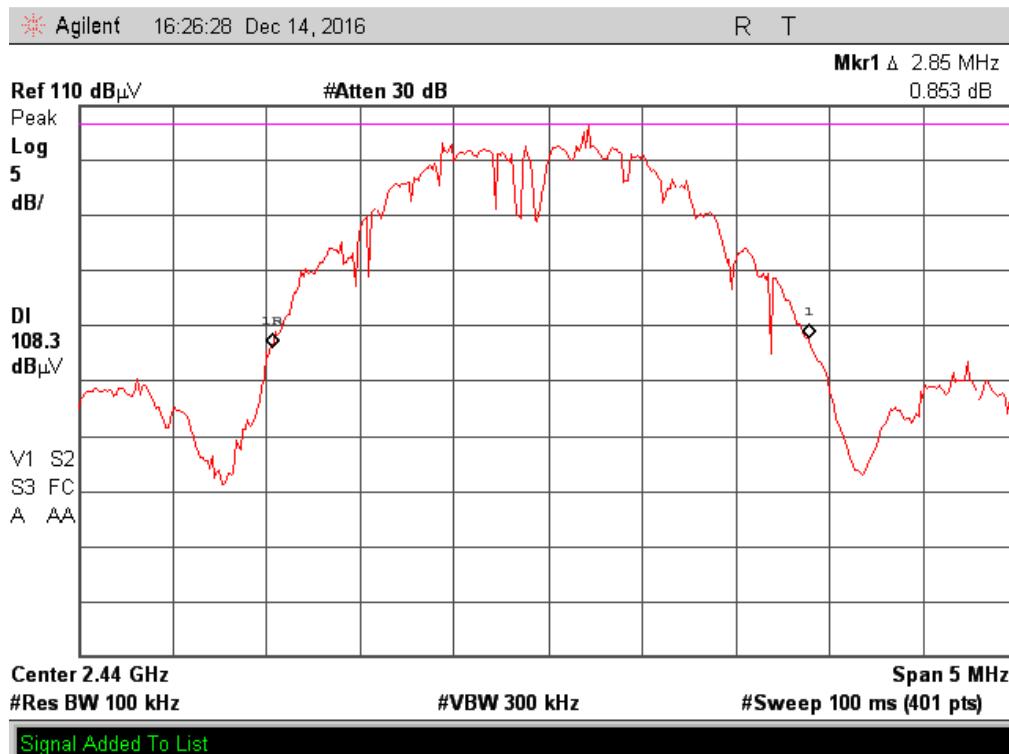


Figure 2.3.9-2 - Mid Channel Bandwidth

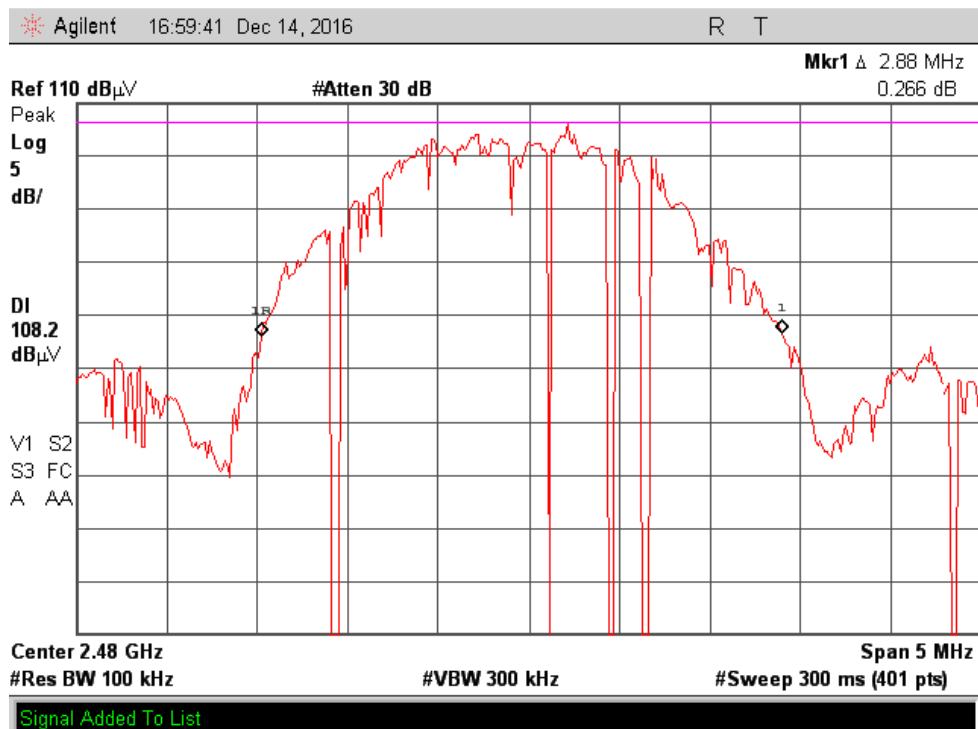


Figure 2.3.9-3 - High Channel Bandwidth

2.4 MINIMUM 6 dB RF BANDWIDTH

2.4.1 Specification Reference

Part 15 Subpart C §15.247(a)(2)

2.4.2 Standard Applicable

(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.3 Equipment Under Test and Modification State

Serial No: none/ Test Configuration A

2.4.4 Date of Test/Initial of test personnel who performed the test

14. December 2016 / DF

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.4.7 Additional Observations

- This is a radiated test.
- Span is wide enough to capture the channel transmission.
- RBW is set to 100 kHz.
- VBW is ≥ 3 X RBW.
- Sweep is auto.
- Detector is peak.
- The “n” dB down marker function of the spectrum analyzer was used for this test.

2.4.8 Test Results

Mode	Channel	Measured Bandwidth (MHz)	Minimum Bandwidth (MHz)	Compliance
Zigbee	2405 MHz	1.585	0.500	Complies
	2440 MHz	1.550	0.500	Complies
	2480 MHz	1.570	0.500	Complies

2.4.9 Test Results Plots



Figure 2.4.9-1 - Low Channel Bandwidth



Figure 2.4.9-2 - Mid Channel Bandwidth

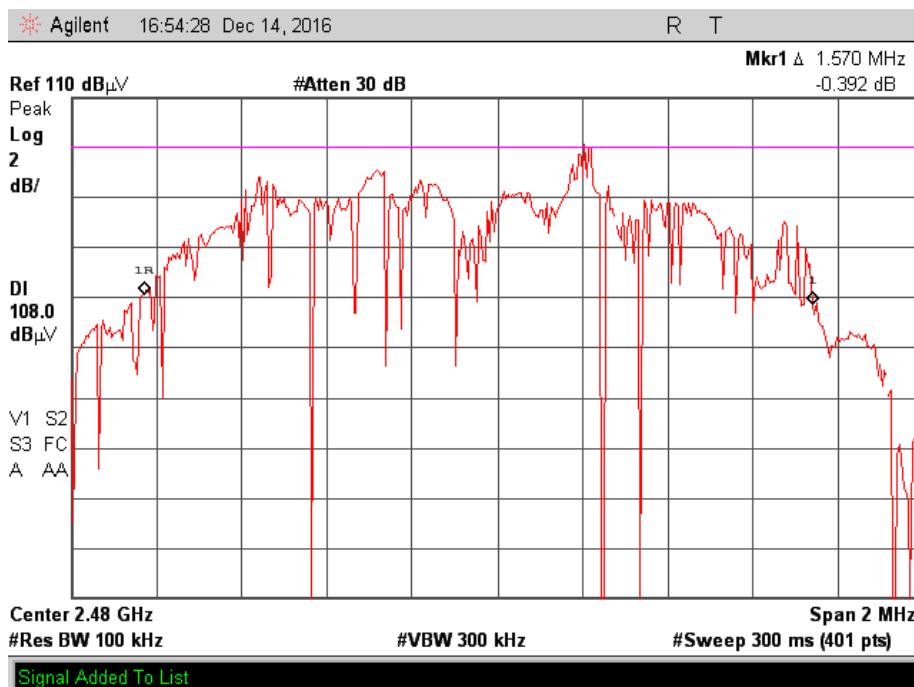


Figure 2.4.9-3 - High Channel Bandwidth

2.5 OUT-OF-BAND EMISSIONS - CONDUCTED

2.5.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.5.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.5.3 Equipment Under Test and Modification State

Serial No: none/ Test Configuration A

2.5.4 Date of Test/Initial of test personnel who performed the test

NA

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.5.7 Additional Observations

2.6 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

2.6.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.6.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.6.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.6.4 Date of Test/Initial of test personnel who performed the test

14.December 2016 / DF

2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.6.7 Additional Observations

- This is a radiated test.
- RBW is 100kHz.VBW is 3X RBW.
- Sweep is auto. Detector is peak. Trace is max hold.
- Trace was centred on the band-edge frequency.
- Span was set to encompass the band-edge frequency and the peak of the emission.
- Using Marker function, peak of the emission was determined and the delta to the band-edge frequency measured.
- Band-edges were verified ≤ 30 dBc.

FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100



2.6.8 Test Results

Complies. See attached plots.

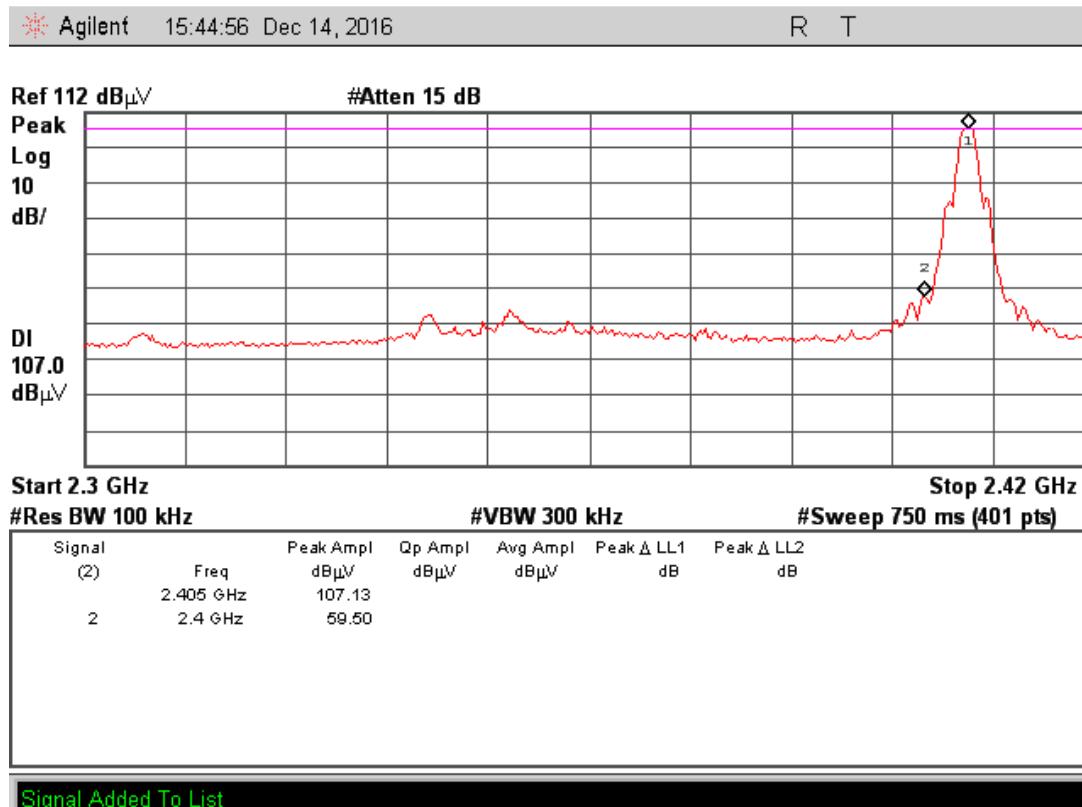


Figure 2.5.8-1 - Low Channel (2405 MHz) Out-of-Band Conducted Emissions

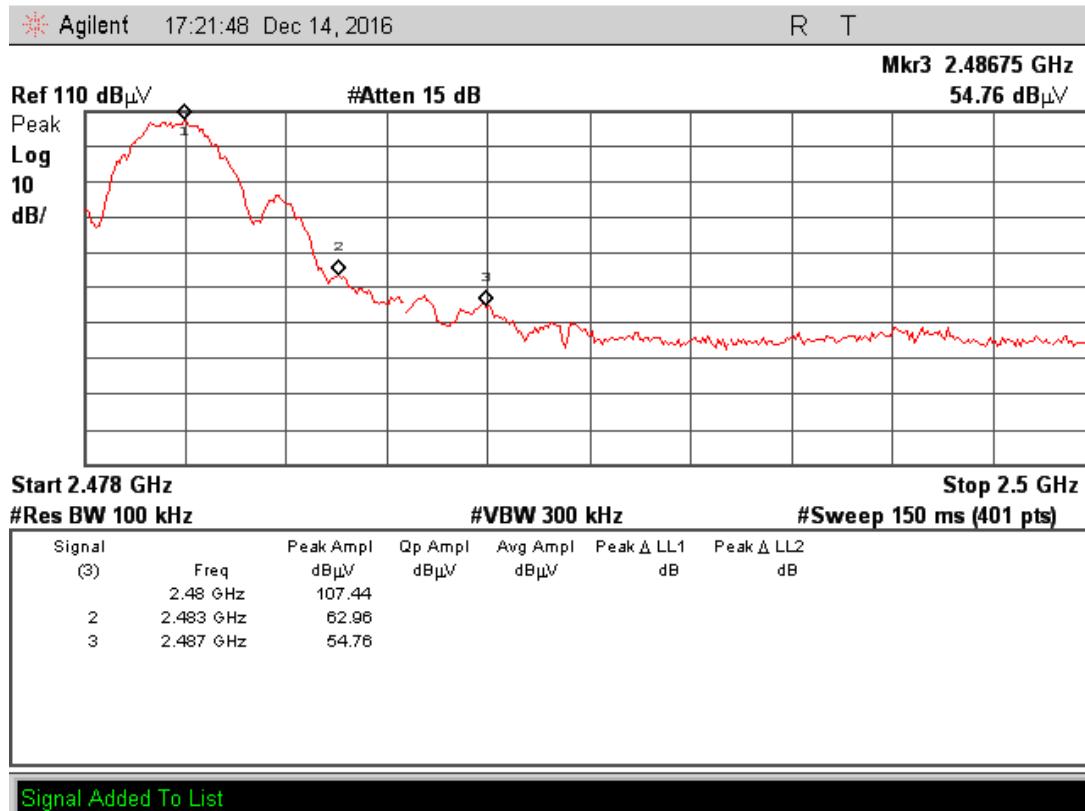


Figure 2.5.8-2 - High Channel (2480 MHz) Out-of-Band Conducted Emissions

2.7 SPURIOUS RADIATED EMISSIONS

2.7.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.7.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.7.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration B and C

2.7.4 Date of Test/Initial of test personnel who performed the test

15-16. December 2016 /CF

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.7.7 Additional Observations

- This is a radiated test. The spectrum was searched from 30MHz to the 10th harmonic.
- There are no emissions found that do not comply to the restricted bands defined in FCC Part 15 Subpart C, 15.205 or Part 15.247(d).
- Only noise floor measurements observed above 18GHz.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.6.8 for sample computation.

2.7.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (dB μ V) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
	Reported QuasiPeak Final Measurement (dB μ V/m) @ 30MHz		11.8

2.7.9 Test Results

See attached plots.

2.7.10 Test Results below 1GHz (Worst Case Configuration)

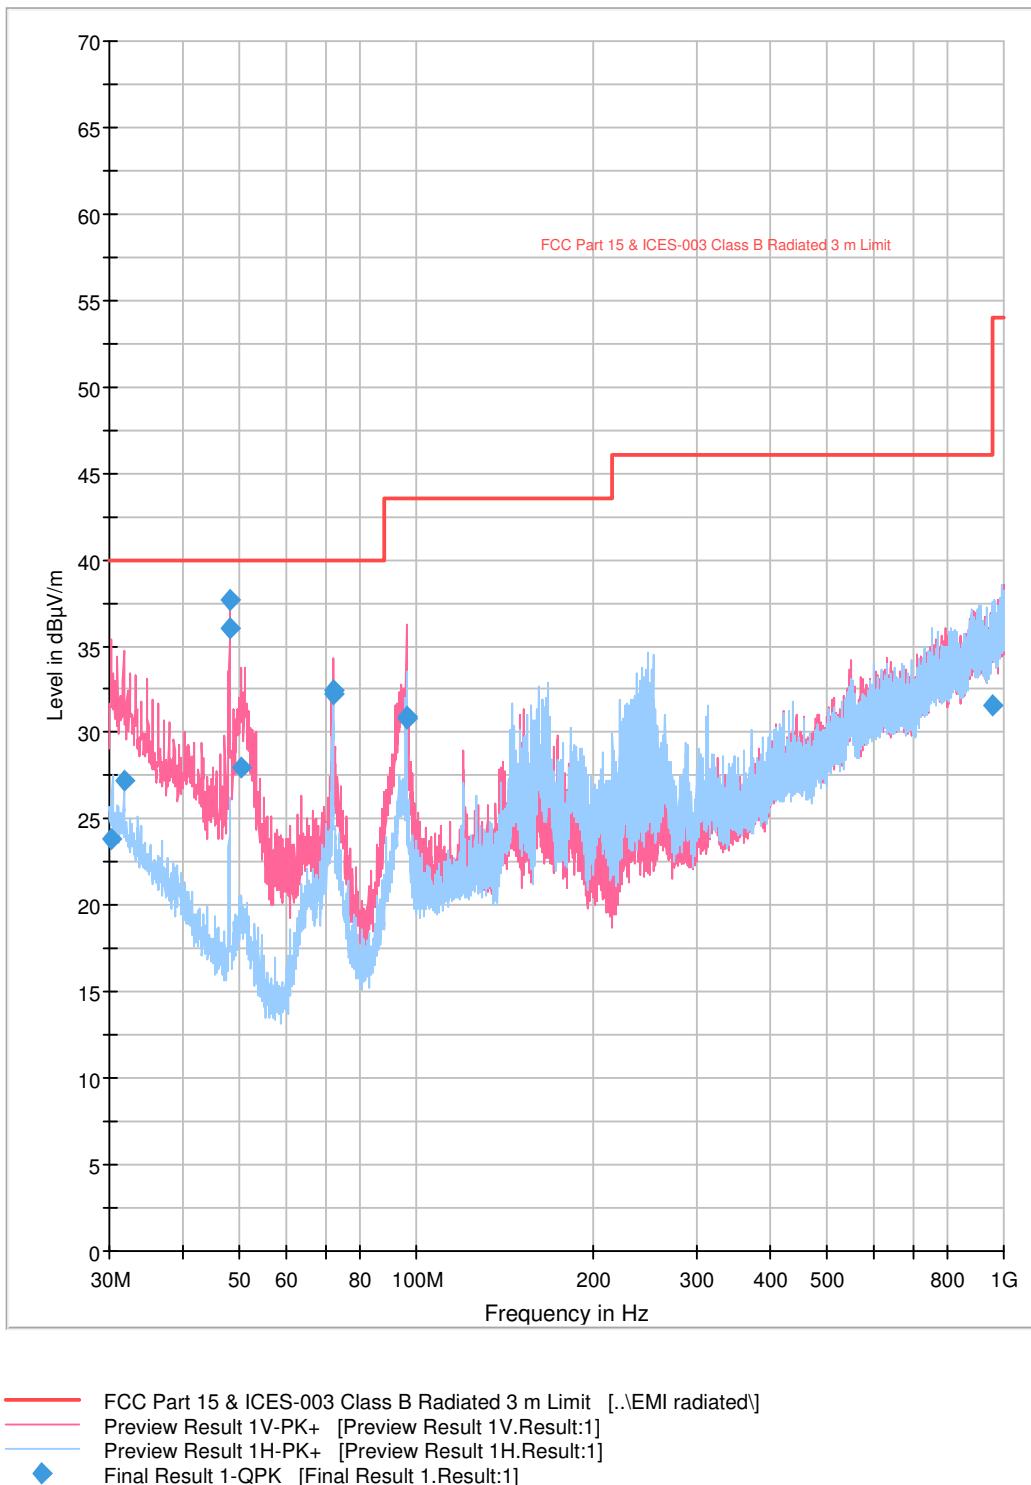


Figure 2.7.10-1 – Radiated Emissions Plot

Table 2.7.10-1 - Quasi Peak Data

Frequency (MHz)	Quasi-peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
30.200000	23.8	144.0	V	47.0	24.8	16.2	40.0
31.720000	27.2	100.0	V	117.0	23.9	12.8	40.0
47.960000	36.1	100.0	V	271.0	15.2	3.9	40.0
48.040000	37.7	100.0	V	312.0	15.2	2.3	40.0
50.320000	28.0	100.0	V	91.0	14.3	12.0	40.0
72.040000	32.2	139.0	V	0.0	12.9	7.8	40.0
72.080000	32.5	138.0	V	0.0	12.9	7.5	40.0
96.080000	31.0	200.0	V	206.0	16.7	12.5	43.5
96.120000	30.8	130.0	V	180.0	16.7	12.7	43.5
954.520000	31.5	322.0	V	239.0	31.3	14.5	46.0

2.7.11 Test Results Above 1GHz (Worst Case Configuration)

Table 2.7.11-1 - Low Channel

Frequency (MHz)	Field Strength (dB μ V/m)	Detector	Polarization	Restricted Band	Margin (dB)	Limit (dB μ V/m)
2405	88.6	AVG	Horz	NO	NA	NA
2405	112.1	PEAK	Horz	NO	NA	NA
4810	35.3	AVG	Vert	YES	-18.7	54
4810	59.5	PEAK	Vert	YES	-14.5	74
7215	40.6	AVG	Horz	NO	-18	58.6
7215	65.7	PEAK	Horz	NO	-16.4	82.1
9620	44	AVG	Vert	NO	-14.6	58.6
9620	64.5	PEAK	Vert	NO	-17.6	82.1
12025	51.3	AVG	Vert	YES	-2.7	54
12025	68.1	PEAK	Vert	YES	-5.9	74

Table 2.7.11-2 - Mid Channel

Frequency (MHz)	Field Strength (dB μ V/m)	Detector	Polarization	Restricted Band	Margin (dB)	Limit (dB μ V/m)
2440	89.6	AVG	Horz	NO	NA	NA
2440	111.3	PEAK	Horz	NO	NA	NA
4880	36.4	AVG	Vert	YES	-17.6	54
4880	60.2	PEAK	Vert	YES	-13.8	74
7320	42.1	AVG	Horz	YES	-11.9	54
7320	66.4	PEAK	Horz	YES	-7.6	74
9760	45.3	AVG	Vert	NO	-14.3	59.6
9760	65	PEAK	Vert	NO	-16.3	81.3
12200	50.9	AVG	vert	YES	-3.1	54
12200	69	PEAK	vert	YES	-5	74

Table 2.7.11-3 - High Channel

Frequency (MHz)	Field Strength (dB μ V/m)	Detector	Polarization	Restricted Band	Margin (dB)	Limit (dB μ V/m)
2480	86.5	AVG	Horz	NO	NA	NA
2480	111.7	PEAK	Horz	NO	NA	NA
4960	34.2	AVG	Vert	YES	-19.8	54
4960	59.1	PEAK	Vert	YES	-14.9	74
7440	41.5	AVG	Horz	YES	-12.5	54
7440	66.2	PEAK	Horz	YES	-7.8	74
9920	44	AVG	Horz	NO	-12.5	56.5
9920	64.9	PEAK	Horz	NO	-16.8	81.7
12400	50.7	AVG	Vert	YES	-3.3	54
12400	69.8	PEAK	Vert	YES	-4.2	74

Test Notes: No significant emissions observed above 12GHz. Measurements above 12GHz were noise floor figures.

2.8 POWER SPECTRAL DENSITY

2.8.1 Specification Reference

Part 15 Subpart C §15.247(e)

2.8.2 Standard Applicable

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.8.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.8.4 Date of Test/Initial of test personnel who performed the test

14. December 2016 / DF

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	24 - 26 °C
Relative Humidity	30 - 32 %

2.8.7 Additional Observations

- This is a radiated test.
- Test procedure is per Section 10.8 of KDB 558074 v03r05, (April 08, 2016).
- Detector is Peak.
- Trace Mode is Max hold.
- Sweep time is Auto Couple.
- EUT complies with 3 kHz RBW.

2.8.8 Test Results Summary (PKPSD Method)

Channel	Marker Reading using 3 kHz RBW (dB _{uV/m})	PSD (dBm)	PSD Limit (dBm)	Compliance
2405 MHz	102.0	6.8	8	Complies
2440 MHz	100.7	5.5	8	Complies
2480 MHz	101.8	6.6	8	Complies

2.8.9 Test Results Plots

Convert Field Strength to dBm
 $EIRP = FS + (20 \log D) - 104.7$
 $EIRP = FS - 95.2$

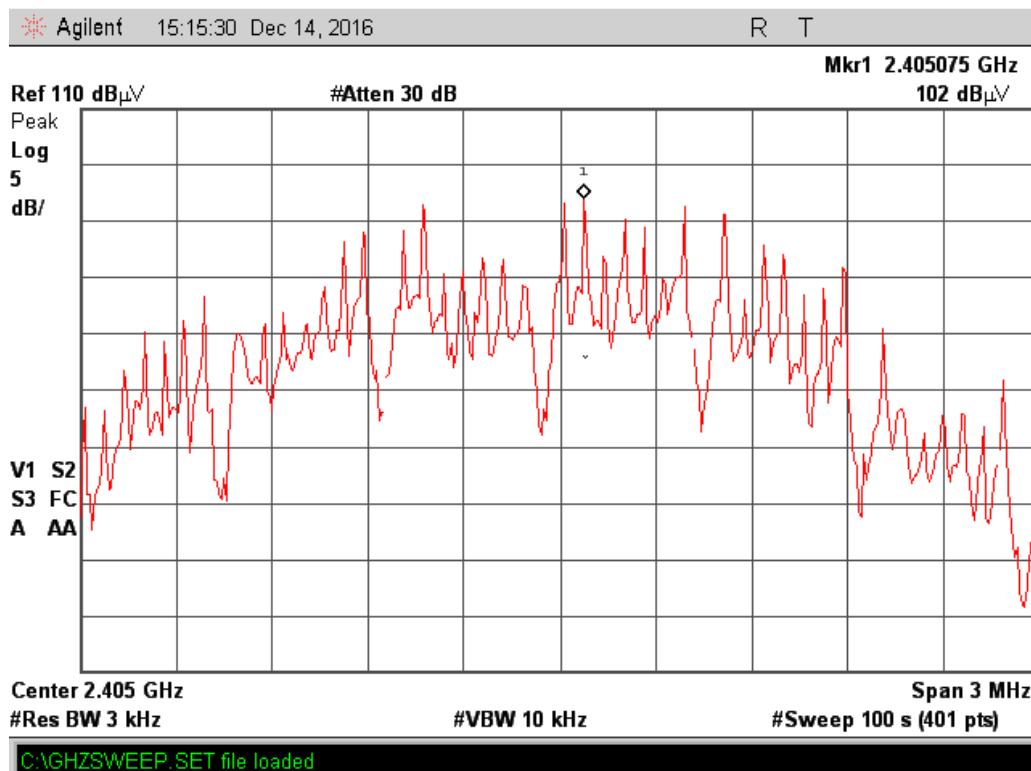


Figure 2.8.9-1 - Low Channel PSD

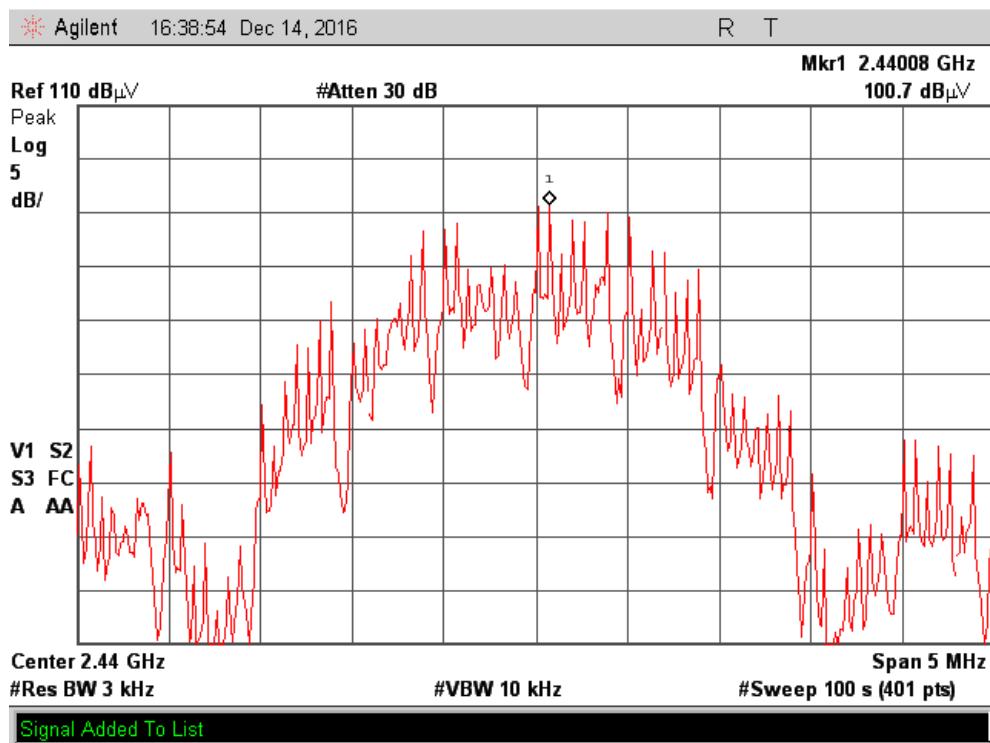


Figure 2.8.9-2 - Mid Channel PSD

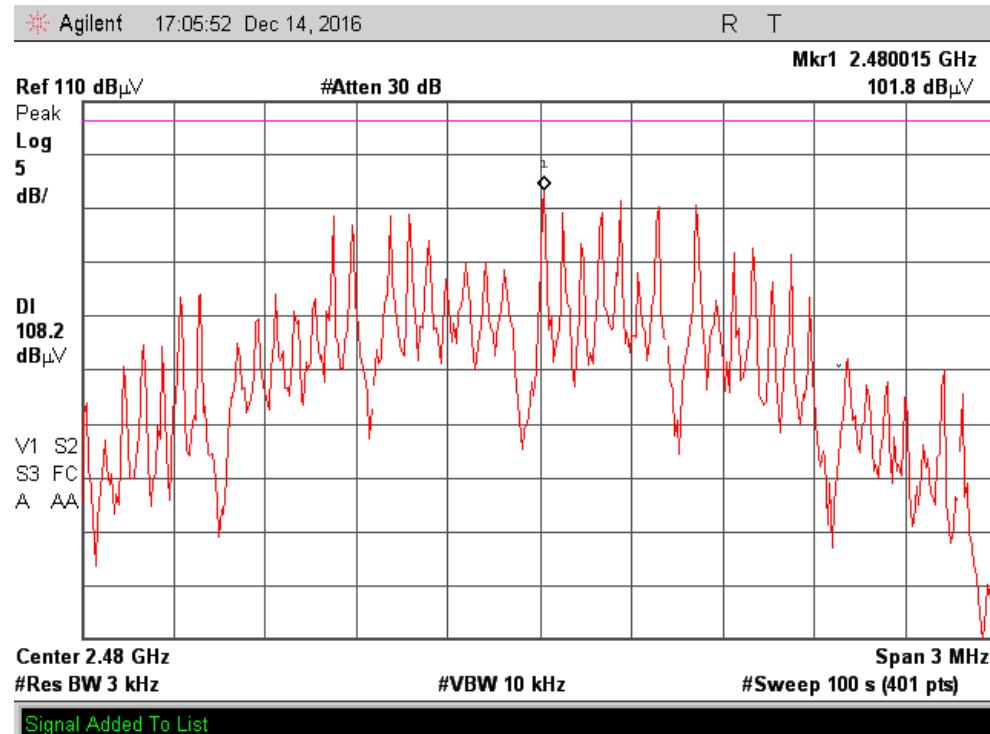


Figure 2.8.9-4 - High Channel PSD

FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100



SECTION 3

TEST EQUIPMENT USED

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Radiated Emissions						
TEMC00005	Bilog Antenna	6112B	2579	Chase EMC		12/17/2017
TEMC00061	Double-ridged waveguide horn antenna	3117	00109296	ETS Lindgren		2/3/2018
TEMC00011	EMI Test Receiver	ESCS30	825788/002	Rhode & Schwarz		12/4/2017
TEMC00012	Spectrum Analyzer	E7404A	MY42000055	Agilent	4/10/2015	4/10/2017
TEMC00013	Pre-amplifier	PA-122	181925	Compower		10/3/2017
Miscellaneous						
N/A	Test Software	EMC32	V8.53	Rhode & Schwarz		N/A

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Radiated Emission Measurements (Below 1GHz)

Radiated Measurement 30 - 1000 MHz at a distance of 3 m						
	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.58 dB	Normal, k=2	2.000	0.29	0.08
4	Receiver sinewave accuracy	0.40 dB	Normal, k=2	2.000	0.20	0.04
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarisation	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.85 dB	Triangular	2.449	1.57	2.47
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty					Normal	2.96 dB
Expanded uncertainty					Normal, k=2	5.92 dB

3.2.2 Radiated Emission Measurements (Above 1GHz)

Radiated Measurement Above 1 GHz at a distance of 3 m

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10	dB	Normal, k=1	1.00	0.10
2	Attenuation: antenna-receiver	0.30	dB	Normal, k=2	2.000	0.15
3	Preamplifier Gain	0.20	dB	Normal, k=2	2.000	0.10
4	Antenna factor AF	0.75	dB	Normal, k=2	2.000	0.38
5	Sinewave accuracy	0.20	dB	Normal, k=2	2.000	0.10
6	Instability of preamp gain	1.21	dB	Rectangular	1.732	0.70
7	Noise floor proximity	0.70	dB	Rectangular	1.732	0.40
8	Mismatch: antenna-preamplifier	1.41	dB	U-shaped	1.414	1.00
9	Mismatch: preamplifier-receiver	1.30	dB	U-shaped	1.414	0.92
10	AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17
11	Directivity difference at 3 m	1.50	dB	Rectangular	1.732	0.87
12	Phase center location at 3 m	0.30	dB	Rectangular	1.732	0.17
13	Cross-polarisation	0.90	dB	Rectangular	1.732	0.52
14	Site imperfections VSWR (Method 2)	2.25	dB	Triangular	2.449	0.92
15	Effect of setup table material	2.90	dB	Rectangular	1.732	1.67
16	Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17
17	Table height at 3 m	0.00	dB	Normal, k=2	2.000	0.00
Combined standard uncertainty					Normal	2.73 dB
Expanded uncertainty					Normal, k=2	5.46 dB

3.2.3 Conducted Antenna Port Measurement

Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1 Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2 Cables	Rectangular	0.50	0.29	0.08
3 EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):			0.72	
Coverage Factor (k):			2	
Expanded Uncertainty:			1.45	


FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100




SECTION 4

DIAGRAM OF TEST SETUP

4.1 TEST SETUP DIAGRAM

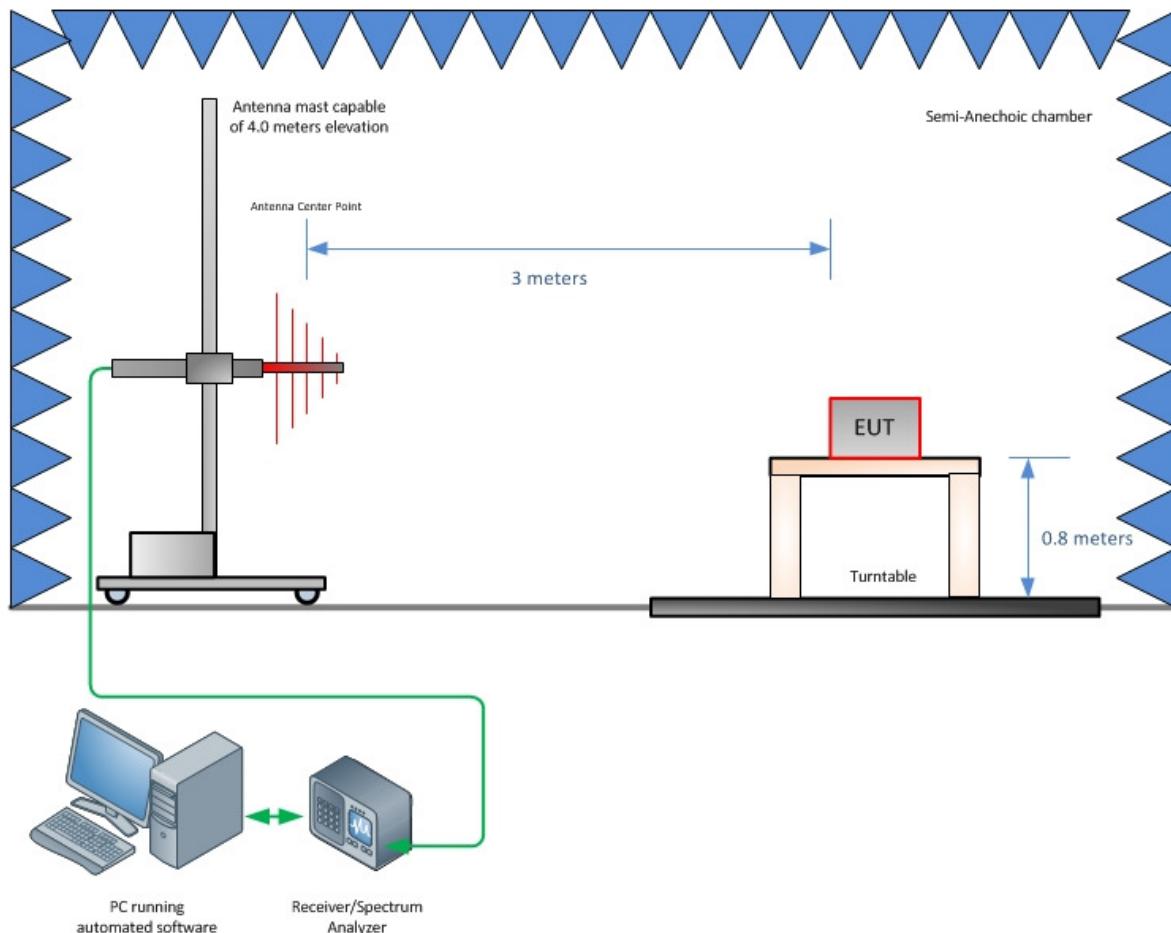

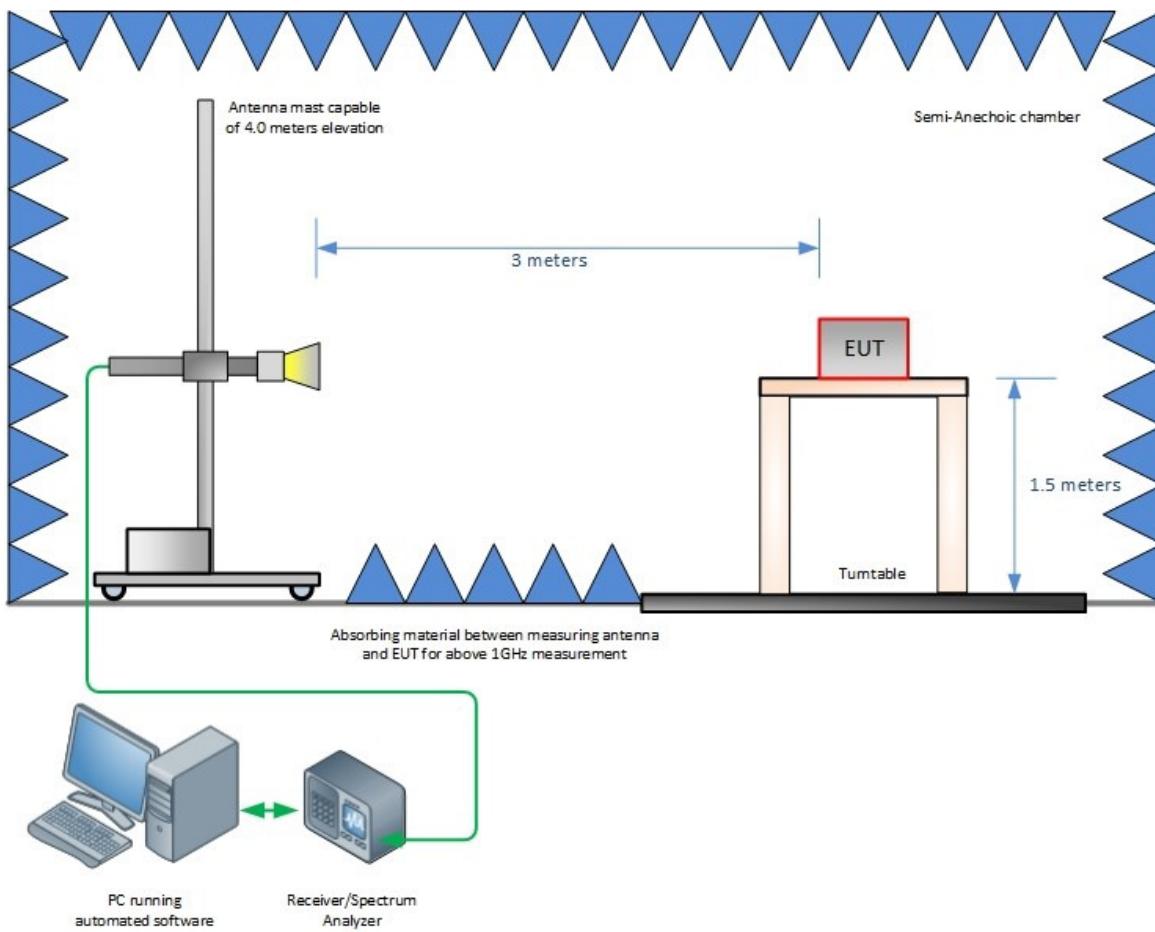

Radiated Emission Test Setup (Above 1GHz)

FCC ID XV6SS6600
IC: 22341-SS6600
Report No. TP72119798.100



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for A2LA, AAMI, ACIL, AEA, ANSI, IEEE, and iNARTE.



A2LA Cert. No. 2955.15

