

TEST REPORT

Report Number: 101090799DAL-001
Project Number: G101090799


Report Issue Date: March 20th, 2013

Product Name: LCHT 2.4GHz Transmitter
FCCID: XVE-SA12323
ICID: 8668A-SA12323
Standards: FCC 47CFR.Part 15 Subpart C 15.247
RSS 210*Issue 8 December 2010

Tested by:
Intertek Testing Services NA, Inc.
1809 10th ST #400
Plano, TX 75074

Client:
Traxxas
1100 Klein Road
Plano, TX 75074

Report prepared by



Shawn K McGuinness
EMC Engineer

Report reviewed by



Jeremy O. Pickens
Senior Staff Engineer



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1	<i>Introduction and Conclusion</i>	3
2	<i>Test Summary</i>	3
3	<i>Peak Conducted Power</i>	6
	<i>Project #</i>	7
	<i>Date</i>	7
	<i>Rule</i>	7
	<i>Distance</i>	7
	<i>Antenna</i>	7
	<i>RBW</i>	7
	<i>VBW</i>	7
	<i>Detector</i>	7
4	<i>Occupied Bandwidth</i>	8
5	<i>Power Spectral Density/Conducted Spurious Emissions</i>	15
6	<i>Duty Cycle Determination (FCC 15A - 15.35(c))</i>	23
7	<i>Radiated Spurious Emissions (Transmitter)</i>	29
8	<i>Radiated Spurious Emissions (Receiver)</i>	44
9	<i>AC Power Line Conducted Emissions</i>	44
10	<i>Measurement Uncertainty</i>	45
11	<i>Revision History</i>	46

1 Introduction and Conclusion

The tests indicated in section 2 were performed on the product constructed as described in section 3. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test method, a list of the actual test equipment used, documentation photos, results and raw data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complied with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

The INTERTEK-Dallas is located at 1809 10th St. # 400, Plano TX 75074. The radiated emission test site is a 3-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1 and ANSI C63.4. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters. The test site is listed with the FCC under registration number 485103. The test site is listed with Industry Canada under site number IC 6018A-1.

2 Test Summary

Page	Test full name	FCC Reference	IC Reference	Result
6	Peak Conducted Power	§ 15.247(b)(3)(4)	RSS-210 (A8.4)	Pass
8	Occupied Bandwidth	§ 15.247(a)(2)	RSS-210 (A8.2), RSS-GEN (4.6.1)	Pass
18	Power Spectral Density and Conducted Spurious Emissions	§ 15.247(e)	RSS-210 (A8.5)	Pass
20	Duty Cycle Determination	FCC 15A - 15.35(c)	RSS-210 (4.5)	Pass
26	Radiated Spurious Emissions (Transmitter) 15.205 in restricted bands, all others <-30dBc	§ 15.247(c)/15.209	RSS-210 (2.2)	Pass
36	Radiated Spurious Emissions (Receiver) see note 1	§ 15.109	RSS-Gen (6.1)	N/A (1)
33	AC Power Line Conducted Emissions	§ 15.107, § 15.207	RSS-Gen (7.2.4)	N/A (2)

Note 1: This device does not contain a receiver function. Therefore, the spurious emissions produced in transmit mode are the only spurious emissions produced in its operating mode.

Note 2: This device is powered by 4 AA Batteries.

Description of Equipment under Test

Equipment Under Test	
Manufacturer	Traxxas
Model Number	LCHT
Serial Number	DAL1302261117-001 & DAL1302261117-002
FCC Identifier	XVE-SA12323
IC Identifier	8668A-SA12323
Receive Date	March 1, 2013
Test Start Date	March 1, 2013
Test End Date	March 20, 2013
Device Received Condition	Pre-production Prototype
Test Sample Type	Spread-Spectrum Transmitter for Radio-Controlled Model Helicopters
Frequency Band	2402-2480MHz
Mode(s) of Operation	Transmit
Modulation Type	GFSK
Maximum Output Power	+22.7dBm
Test Channels	2402 , 2451, 2480
Antenna Type (15.203)	Client OEM 0dBi +/- 0.5
Operating Voltage	DC Battery-powered

Description of Equipment Under Test	
The Traxxas LCHT 2.4GHz Radio System is a 2402 to 2480MHz Spread-Spectrum Transmitter for Radio-Controlled Model Helicopters.	

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	For Peak Power and Radiated Emissions testing EUT was operating in a constant transmit, modulated mode.
2	For all other testing EUT was operated in modulated mode as dictated by the FCC 15.247/RSS210
3	The EUT continuously transmitted at manufacturer's power level 5 pre-set.
4	The EUT was tuned to a low, middle, and high channel to perform power, occupied bandwidth, and spurious/harmonic tests.

Note: The **Traxxas** LCTQ 2.4GHz Radio System was tested to and found to be in compliance with FCC 15.247 and IC RSS-210 issue 8.

System setup including cable interconnection details, support equipment and simplified block diagram**2.1 EUT Block Diagram:**

The test sample was tested in stand alone mode and was not connected to any support equipment during the evaluation.

2.2 Cables:

Cables					
Description	Length	Shielding	Ferrites	Connection	
				From	To
None					

2.3 Support Equipment:

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None			

3 Peak Conducted Power

3.1 Test Limits

§ 15.247(b)(3): For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

§ 15.247(b)(4): The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2 Test Procedure

ANSI C63.10: 2009 and KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247). The peak output power was measured using the channel power function of the spectrum analyzer.

3.3 Test Equipment Used:

Description	Manufacturer	Model	Serial Number	Cal Date	Cal Due
EMI Receiver rated: 10KHz-7GHz	R & S	ESI 7	100044	04/05/2012	04/05/2013
Cable	Taxxas	Production Cable	N/A	N/A	N/A

3.4 Results:

Project #	Date	Rule	Distance	Antenna	RBW	VBW	Detector
G101090799	03/05/2013	15.247	N/A	Direct	1MHz	3 MHz	Peak

Conducted-Transmitting

Frequency (MHz)	Recorded Level (dBm)	Cable Loss (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
2402	22.47	0.20	22.67	30	7.33
2451	21.99	0.20	22.19	30	7.81
2480	22.25	0.20	22.45	30	7.55

Results: Pass

4 Occupied Bandwidth

4.1 Test Limits

§ 15.247(a)(2): Occupied bandwidth measurements were performed on the EUT to determine compliance with FCC 15.247(a)(2) and RSS-210. For digital modulation systems, the minimum 6dB bandwidth shall be at least 500kHz.

4.2 Test Procedure

ANSI C63.10: 2009 and KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

The occupied bandwidth was measured with a spectrum analyzer directly connected to the EUT while the EUT was operating in continuous transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency. Display line and marker delta functions were used to measure the occupied bandwidth of the EUT. However, the 6 and 20dB bandwidth are referenced to a peak power measurement taken at the entire bandwidth or more for RBW, then using 1% RBW for the 6 and 20dB bandwidth. Measurements were made at three frequencies.

The 20dB bandwidth must be measured and reported for the FCC and for IC.


4.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Receiver	Rhode & Schwarz	ESI 7	100044	04/05/2012	04/05/2013
Cable	Taxxas	Production Cable	N/A	N/A	N/A


4.4 Results:

Mode	Channel Number	Frequency (MHz)	Bandwidth (KHz)	Result
6 dB BW	Low	2402	921.84	Pass
6 dB BW	Mid	2451	941.88	Pass
6 dB BW	High	2480	921.84	Pass
20 dB BW	Low	2402	1382.76	Pass
20 dB BW	Mid	2451	1503.00	Pass
20 dB BW	High	2480	1503.0	Pass


Results: Pass

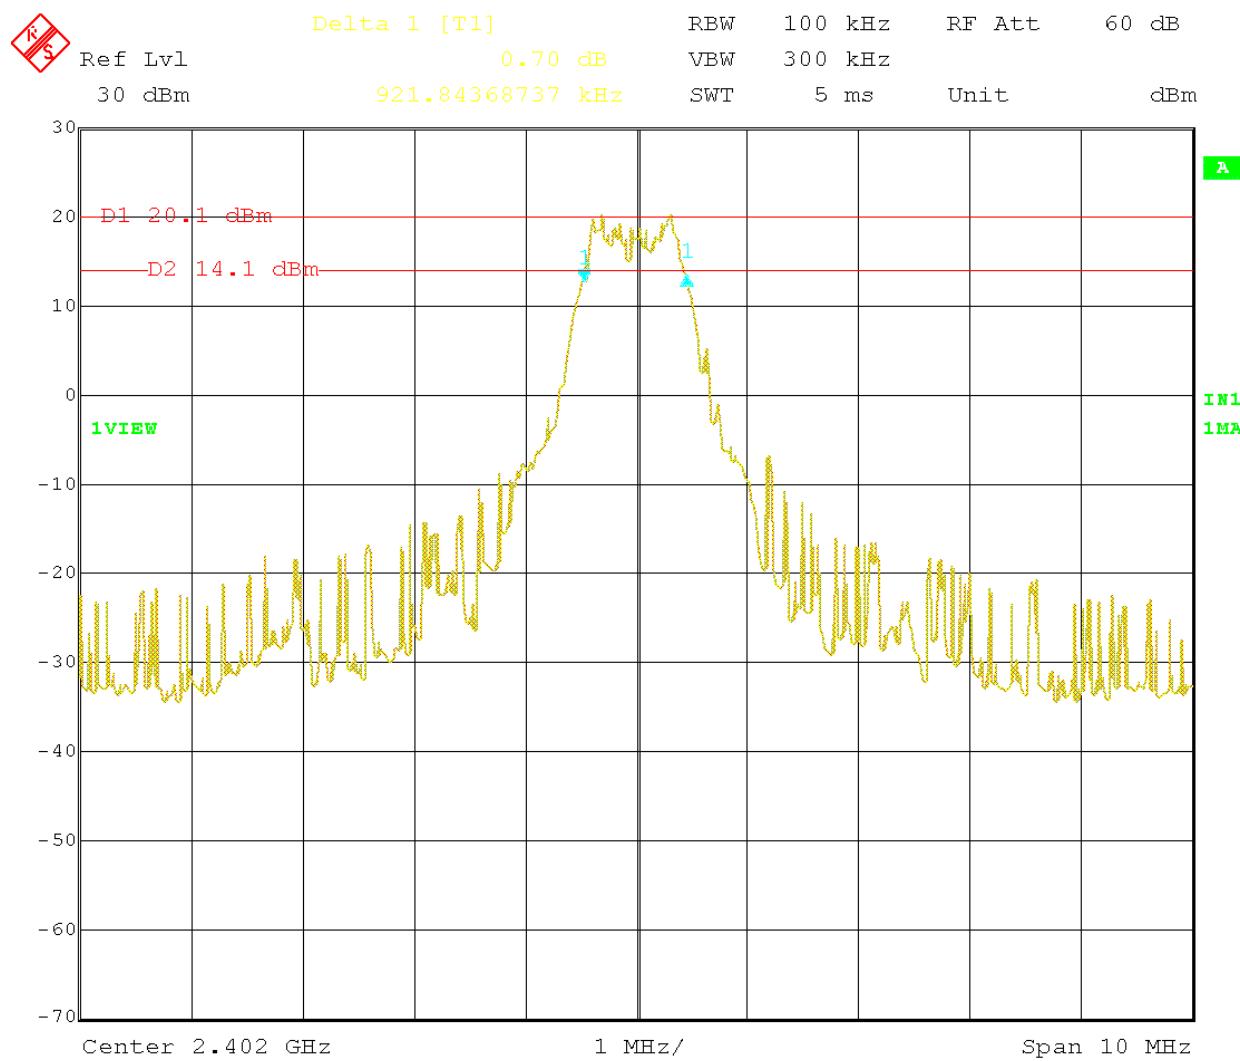

6dB Bandwidth Plot (Low Channel)

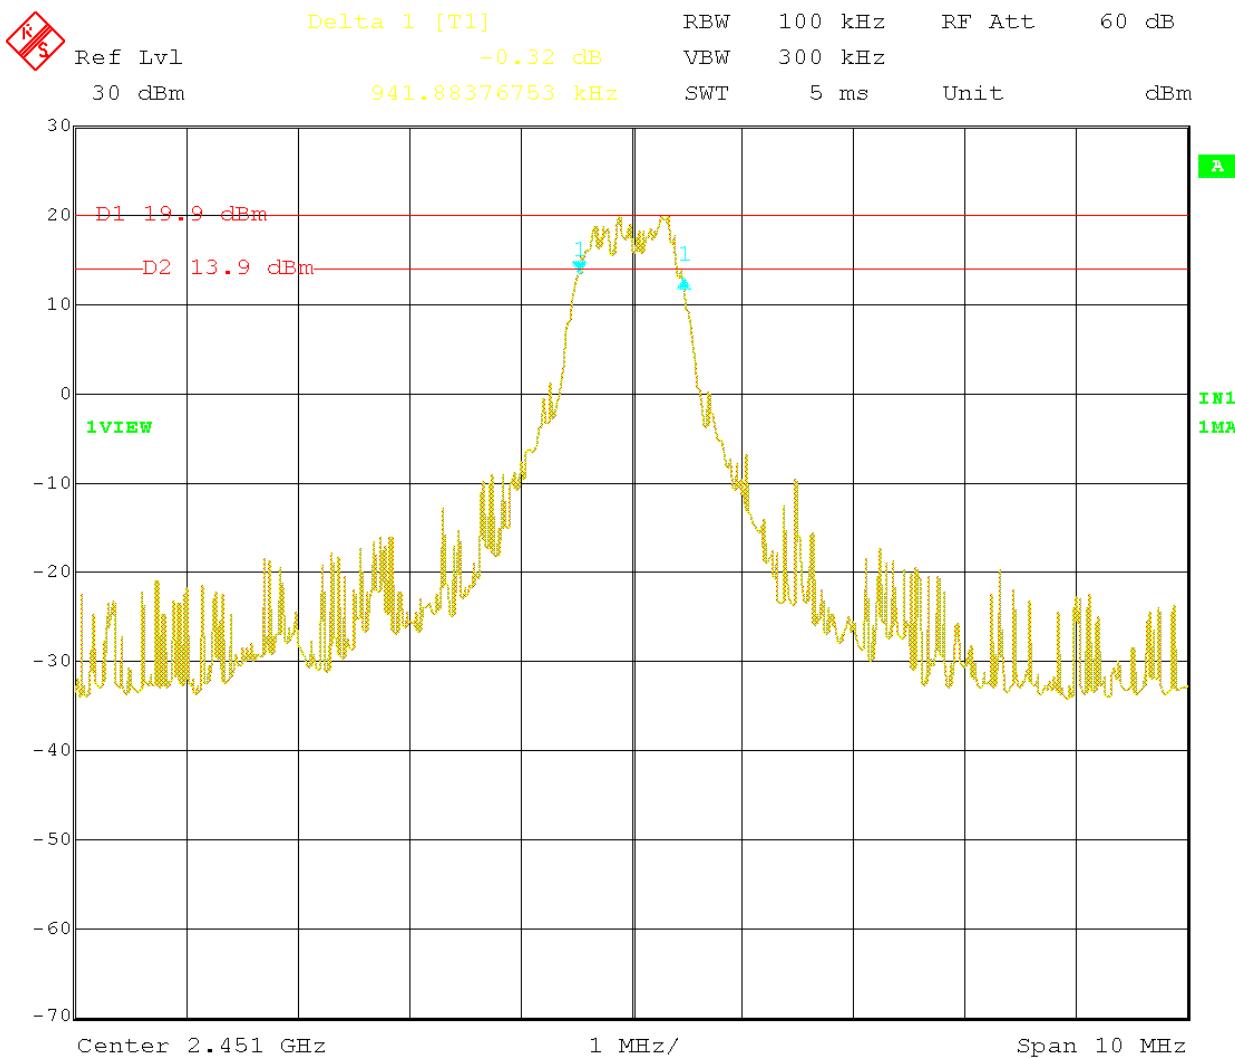


6dB Bandwidth Plot (Mid Channel)

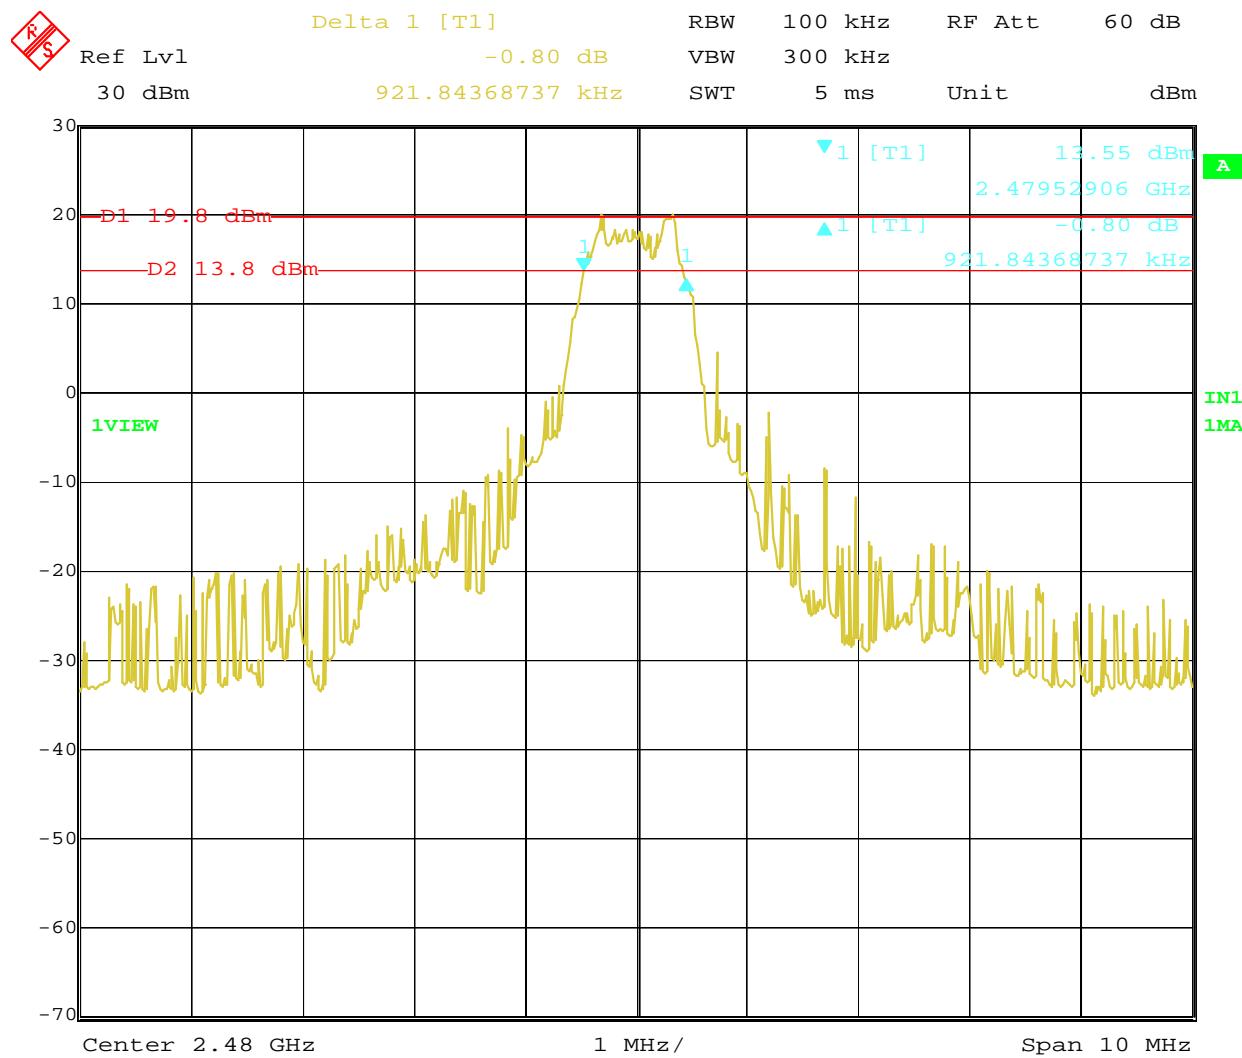


Date: 20.MAR.2013 11:58:55

6dB Bandwidth Plot (High Channel)

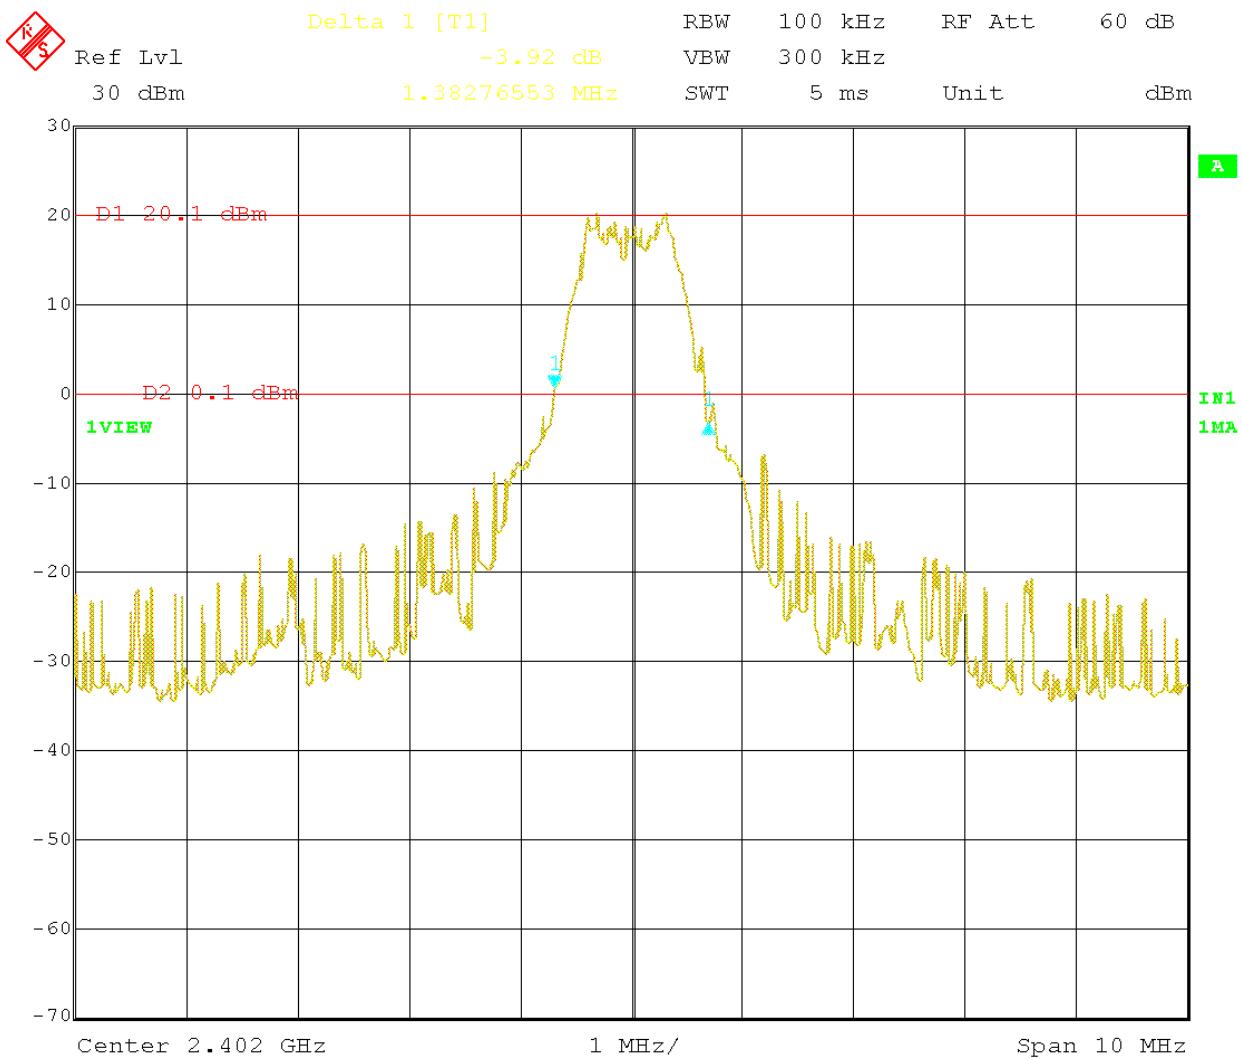


Date: 5.MAR.2013 10:00:02

20dB Bandwidth Plot (Low Channel)

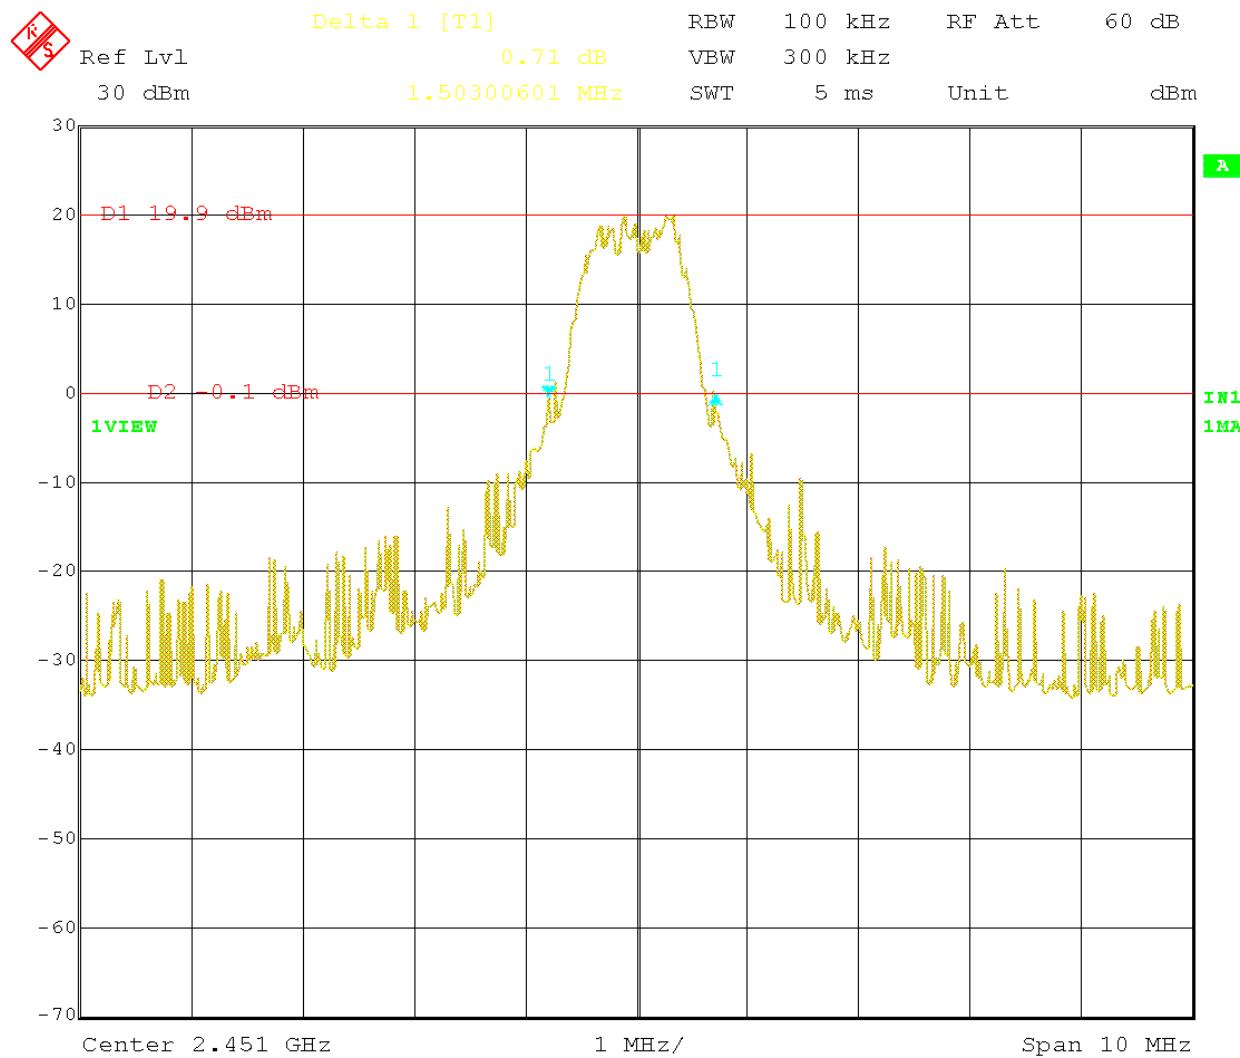

Date: 5.MAR.2013 11:06:24

20dB Bandwidth Plot (Mid Channel)

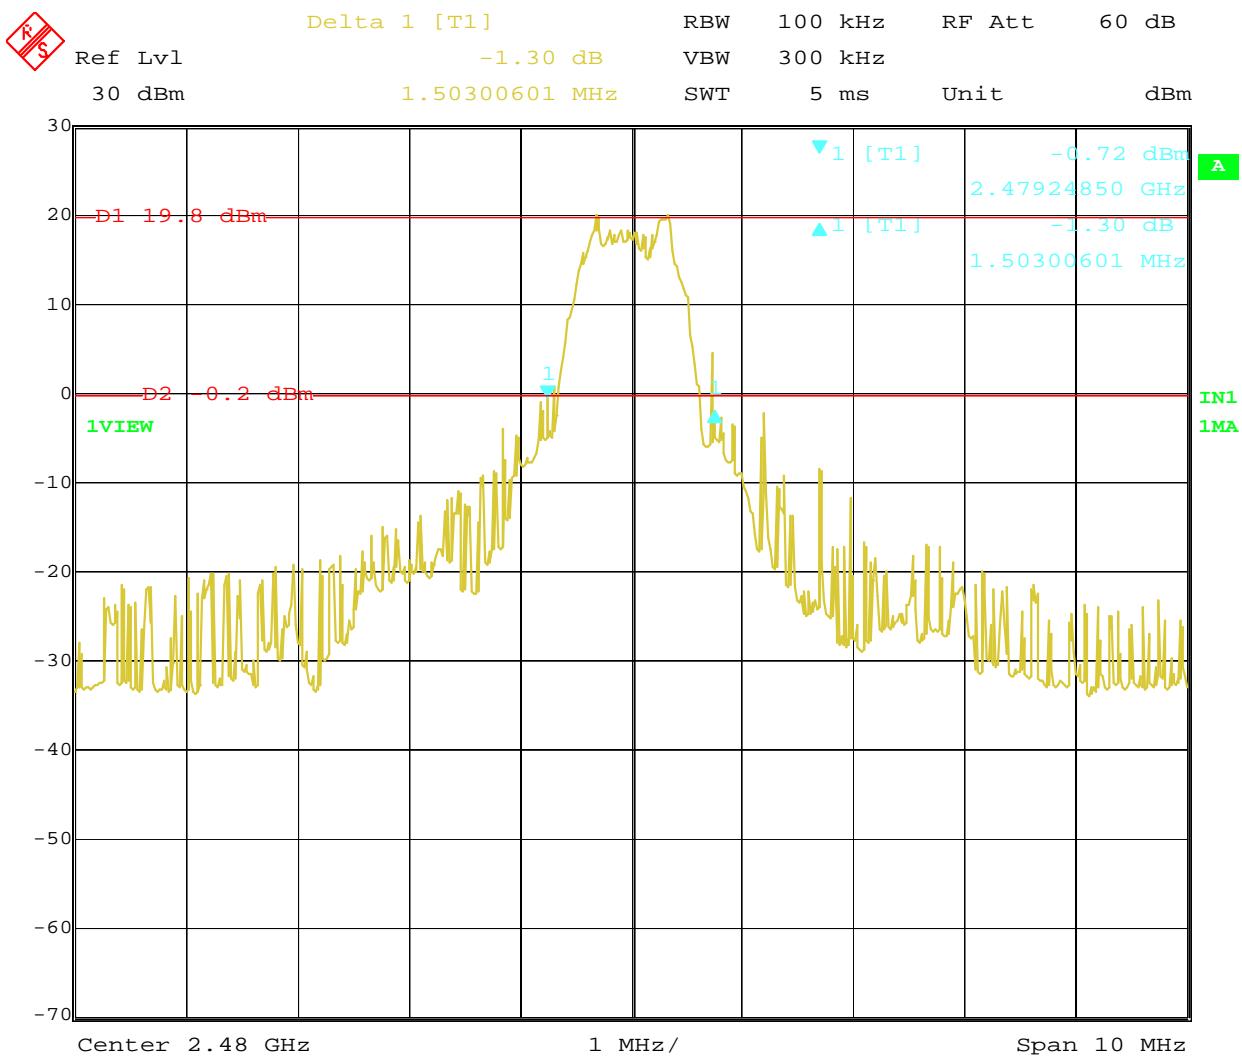

Date: 20.MAR.2013 12:02:45

20dB Bandwidth Plot (High Channel)

5 Power Spectral Density/Conducted Spurious Emissions

5.1 Test Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.2 Test Procedure Conducted Spurious Emissions

ANSI C63.10: 2009 and KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

Peak spurious measurements were made in the frequency range of 30 MHz to a minimum of the 10th harmonic range while the EUT was tuned to the lowest and highest channels. The EUT was directly connected to a spectrum analyzer with a calibrated measurement cable.

From 30 MHz to 1000MHz the RBW/VBW of the Spectrum Analyzer was 100KHz/300Khz.

From 1GHz to 26GHz the RBW/VBW of the Spectrum analyzer was 1MHz/3MHz.

.


5.3 Test Equipment Used:

Description	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
EMI Receiver	Rhode & Schwarz	ESI 7	100044	04/05/2012	04/05/2013
EMI Receiver	Agilent	E7405A	US40240235	05/10/2012	05/10/2013
Conducted Spur TILE profile	Intertek	1130-008	Ver. 10	VBU	VBU


5.4 Results:

The following plots show that there are no conducted spurious emissions exceeding the 20dB down criteria.


Results: Pass

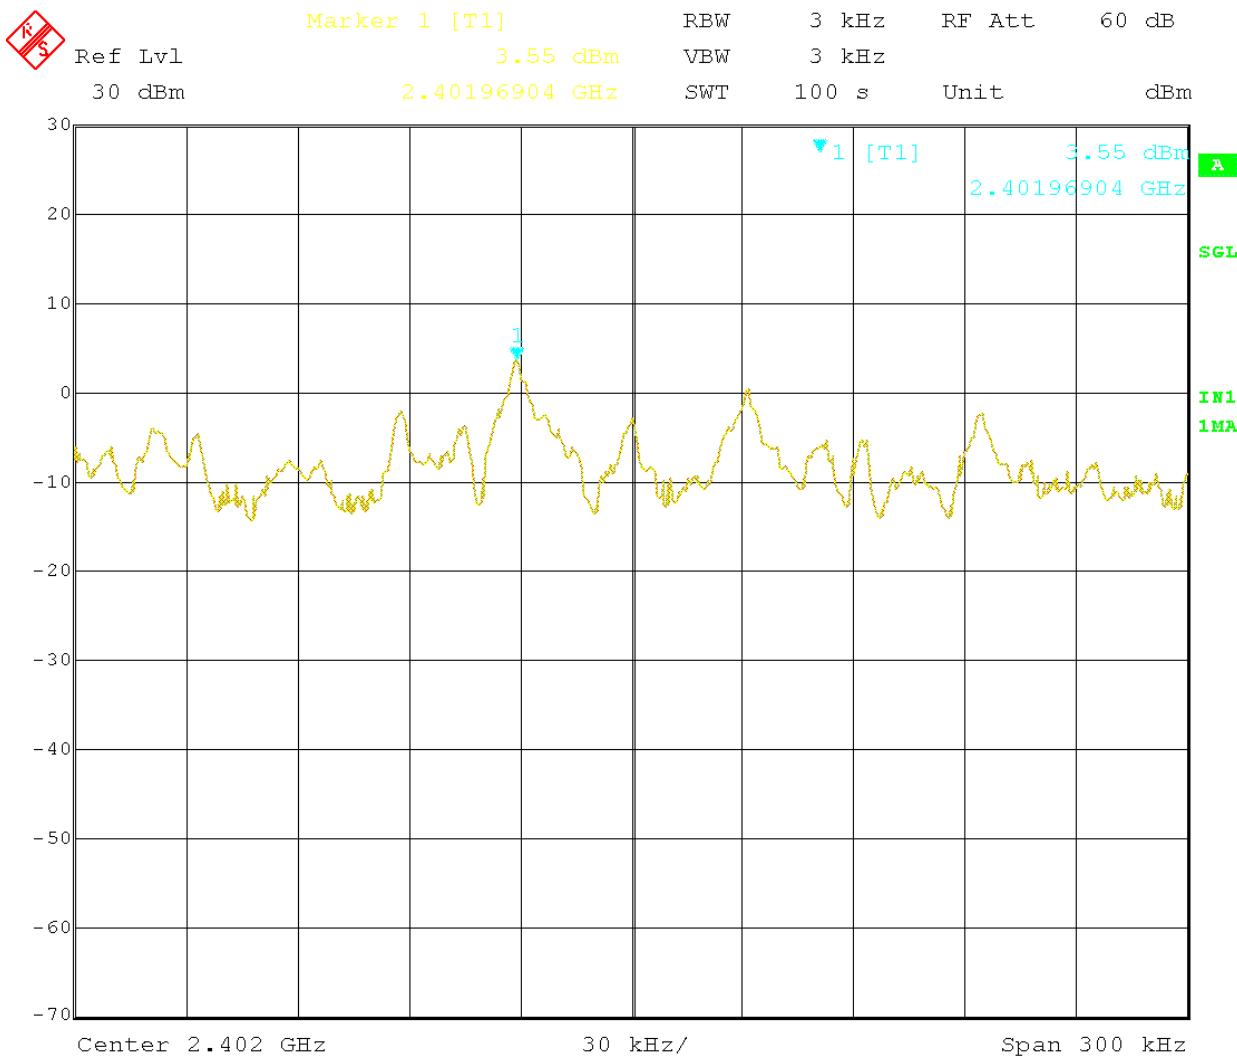

Spectral Density Lo Ch.

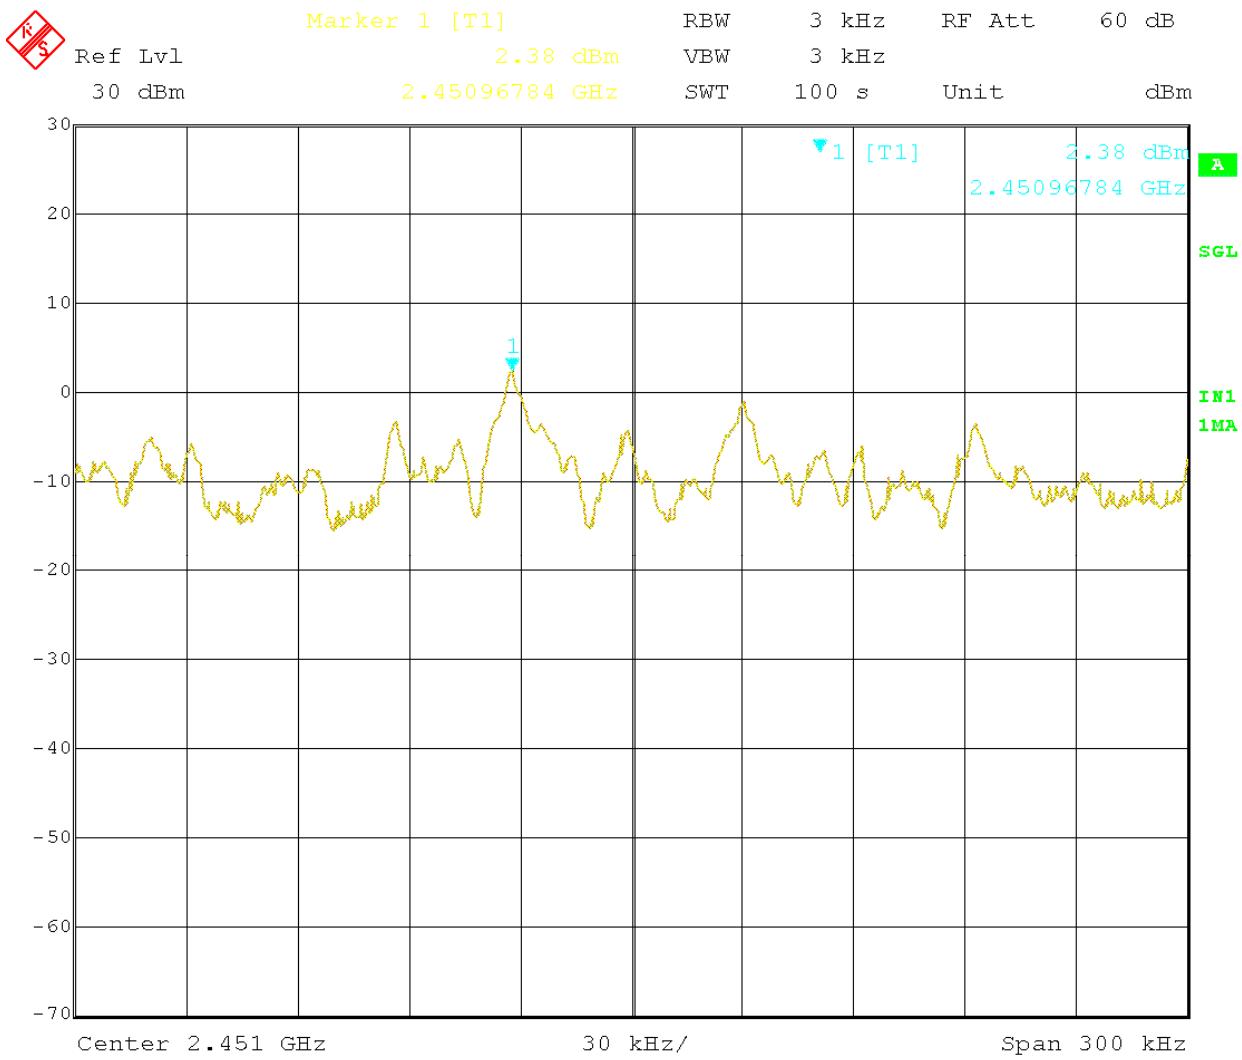


Spectral Density Mid Ch.

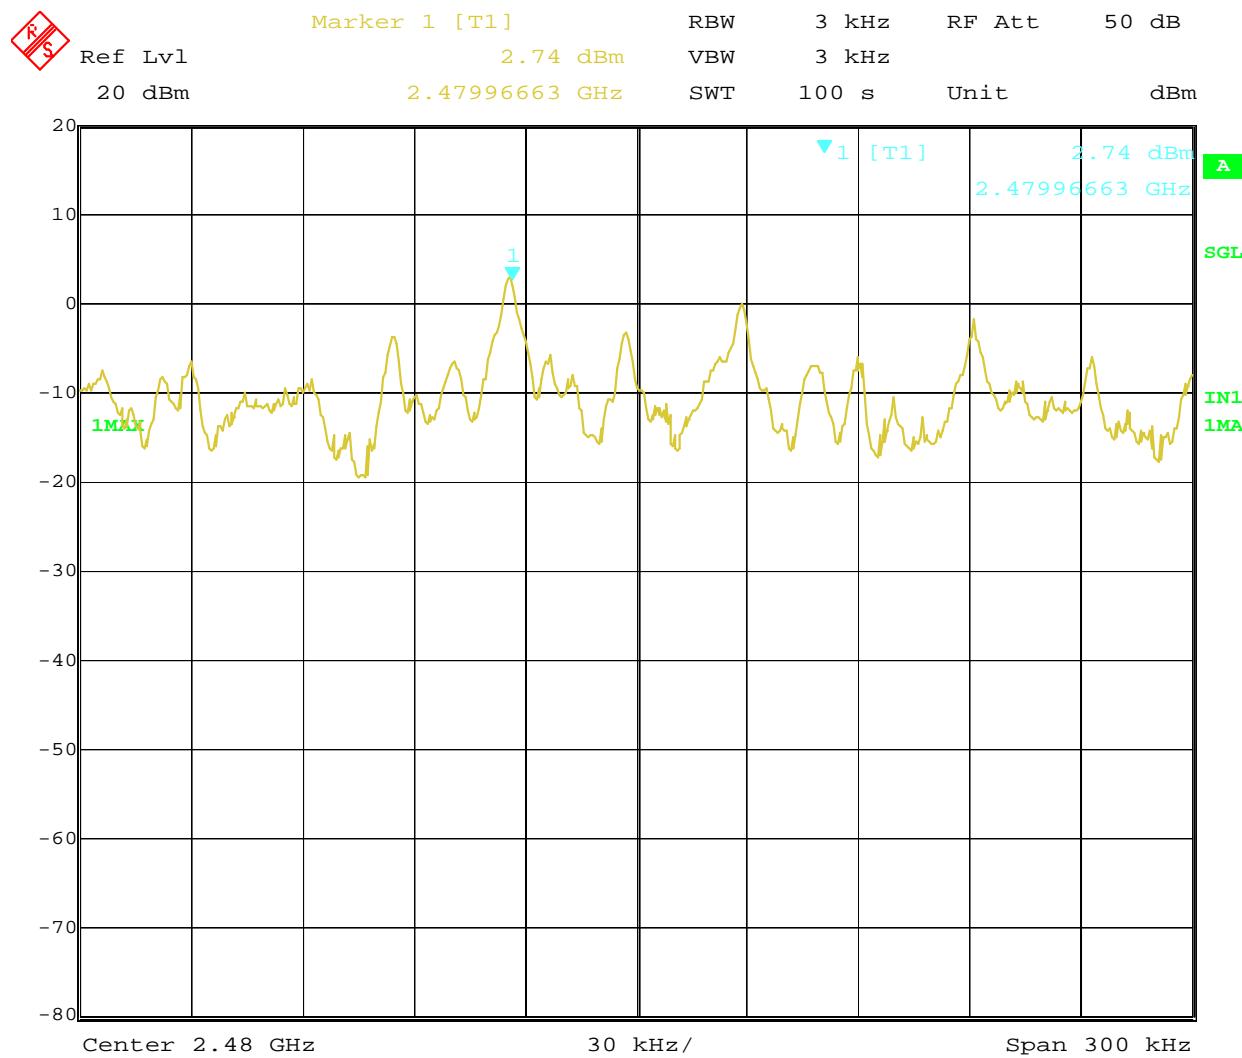


Date: 20.MAR.2013 12:15:25

Spectral Density High Ch.


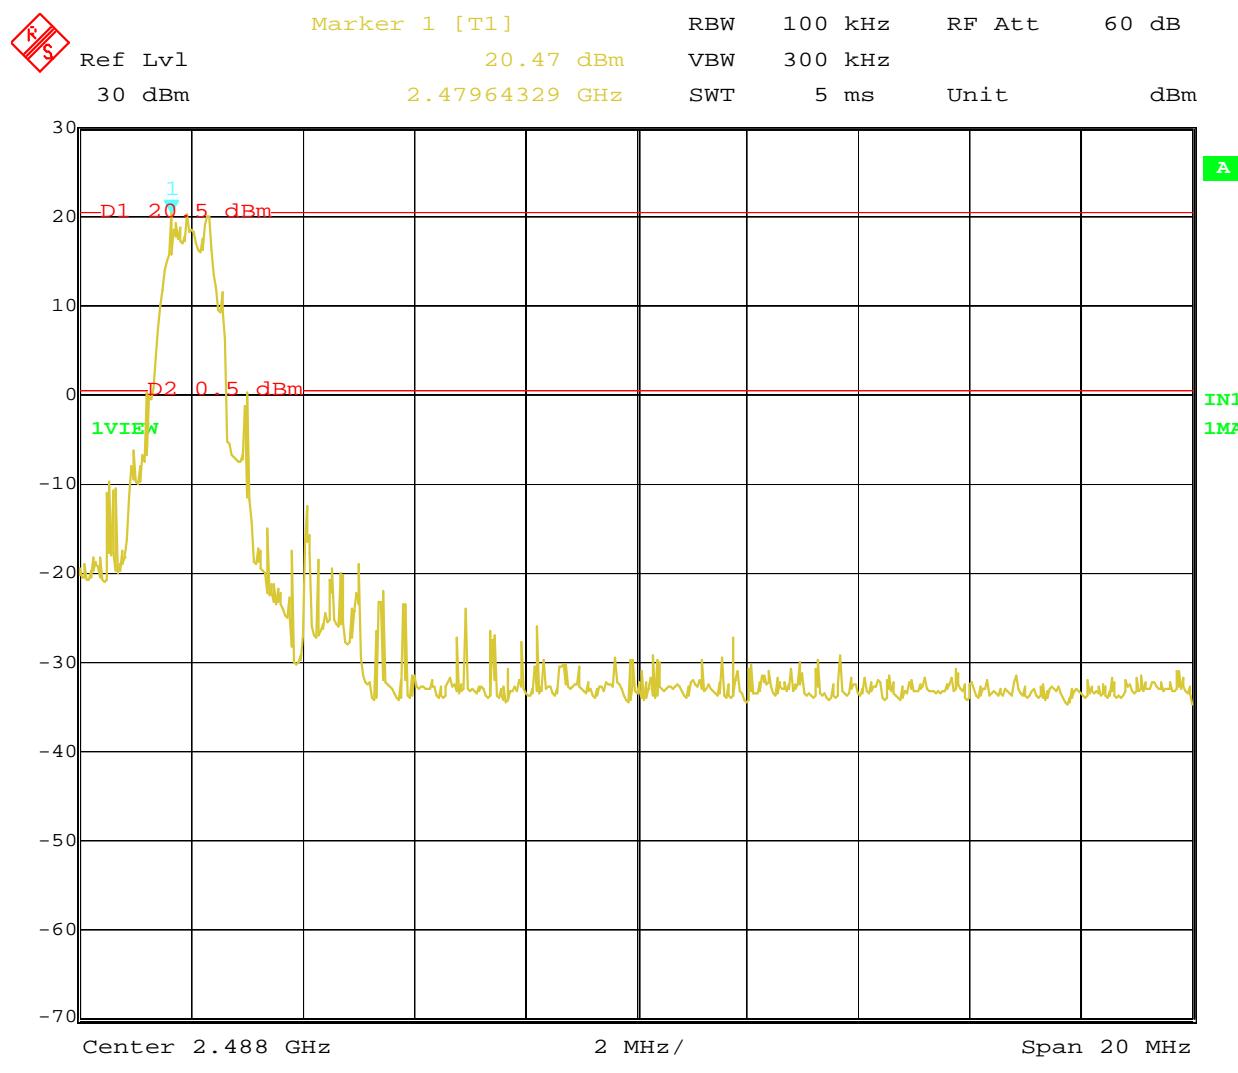



Band Edge Hi Channel

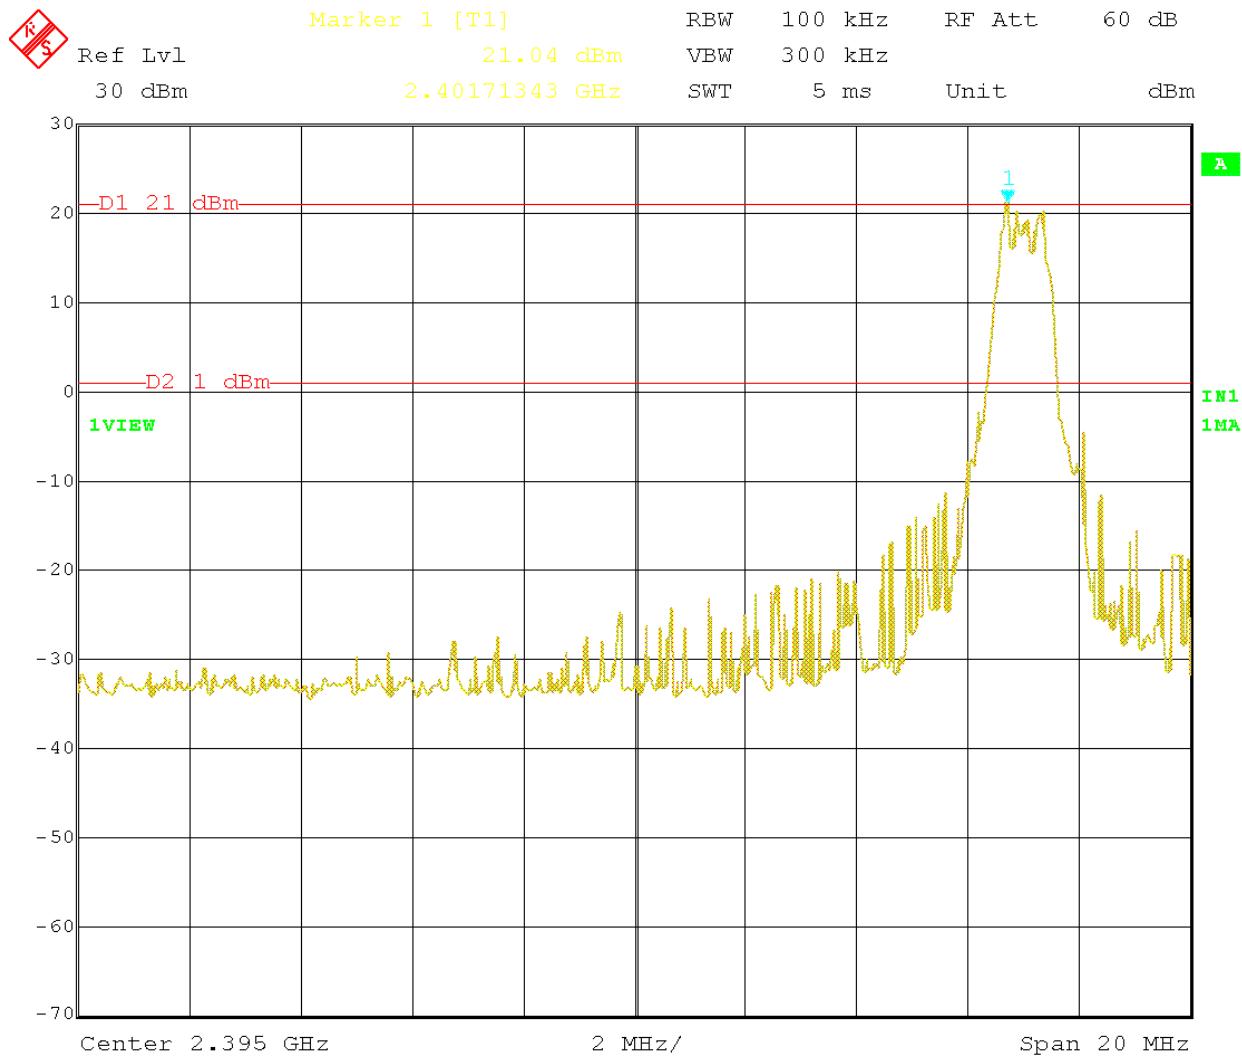

Date: 5.MAR.2013 13:23:28

Band Edge Lo Channel

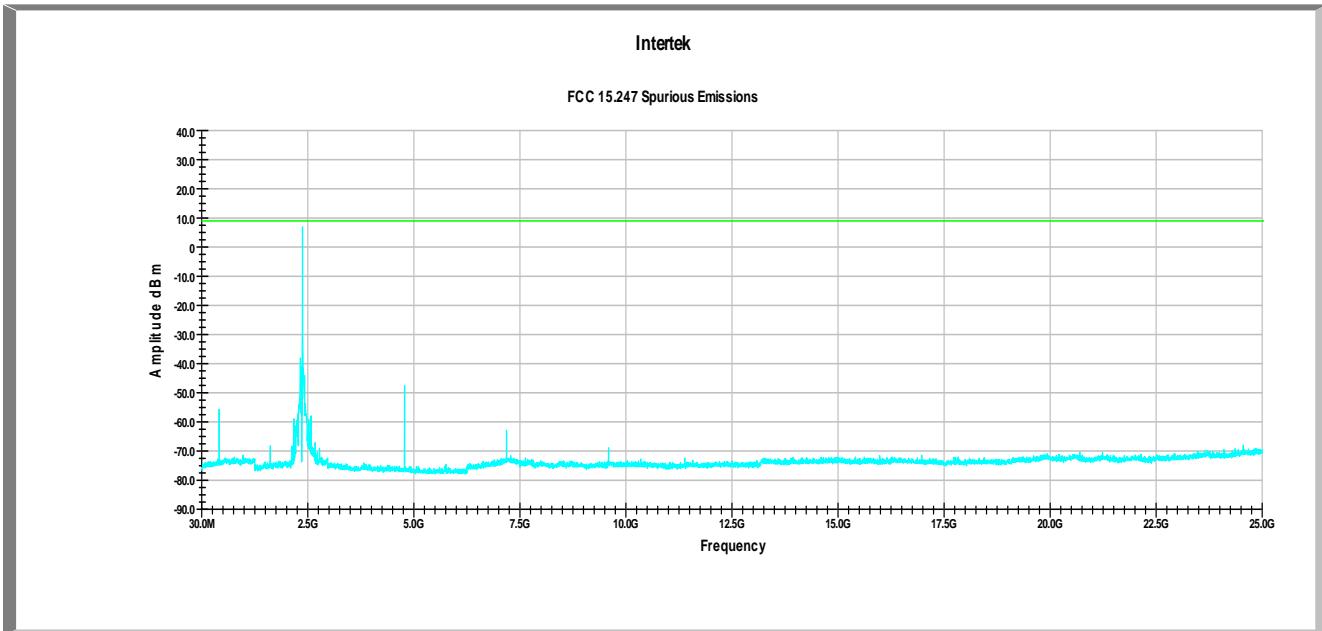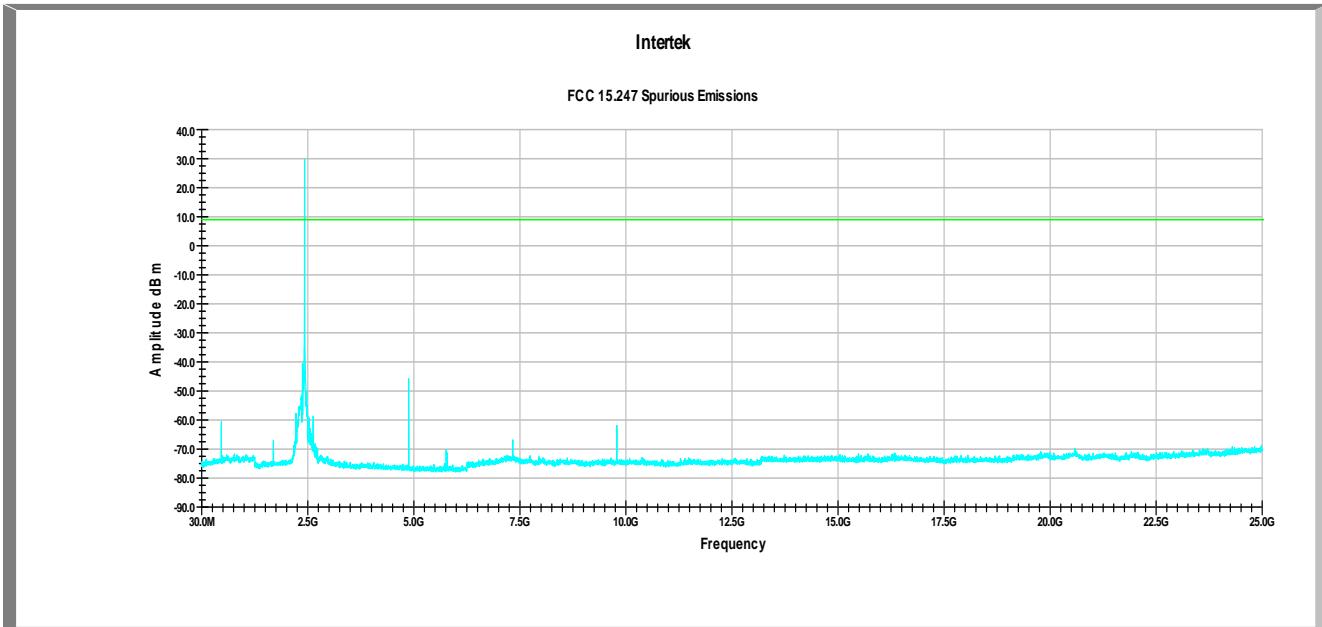**Conducted Spurious Emissions Low Channel****Conducted Spurious Emissions Mid Channel**

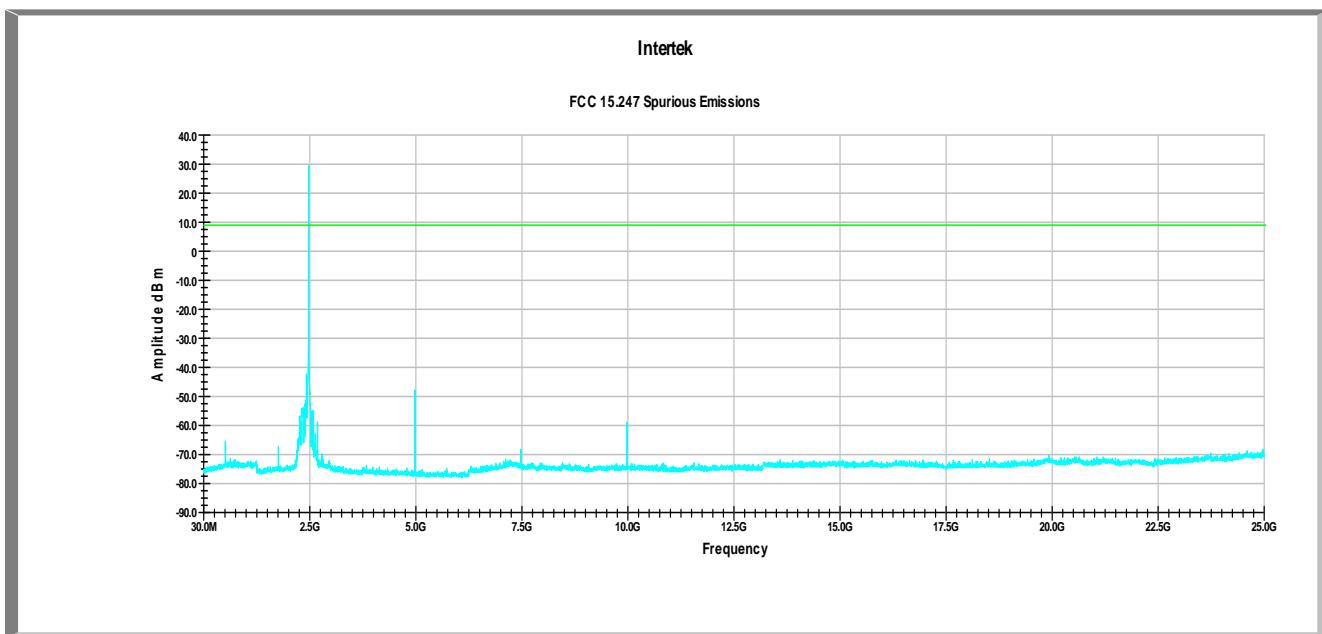**Conducted Spurious Emissions High Channel**

6 Duty Cycle Determination (FCC 15A - 15.35(c))**6.1 Method:**

From 47 CFR Part 15, Subpart A (15.35(c)) and RSS-GEN Section 4.5

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Determine the period of the pulse train, T, in mSec and record the results. T is defined as the time from the beginning of one pulse train to the beginning of the next pulse train.

Count the number of different types of pulses, N and record the results.


For each of the different types of pulses, count the number of occurrences within one pulse train.

Use the Duty Cycle Correction Factor, DCCF, from the results table and use it to adjust the field strength measurements recorded for radiated emissions.


6.2 Test Equipment Used:


Description	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
EMI Receiver	Rhode & Schwarz	ESI	100044	04/05/2012	04/05/2013

6.3 Plots:

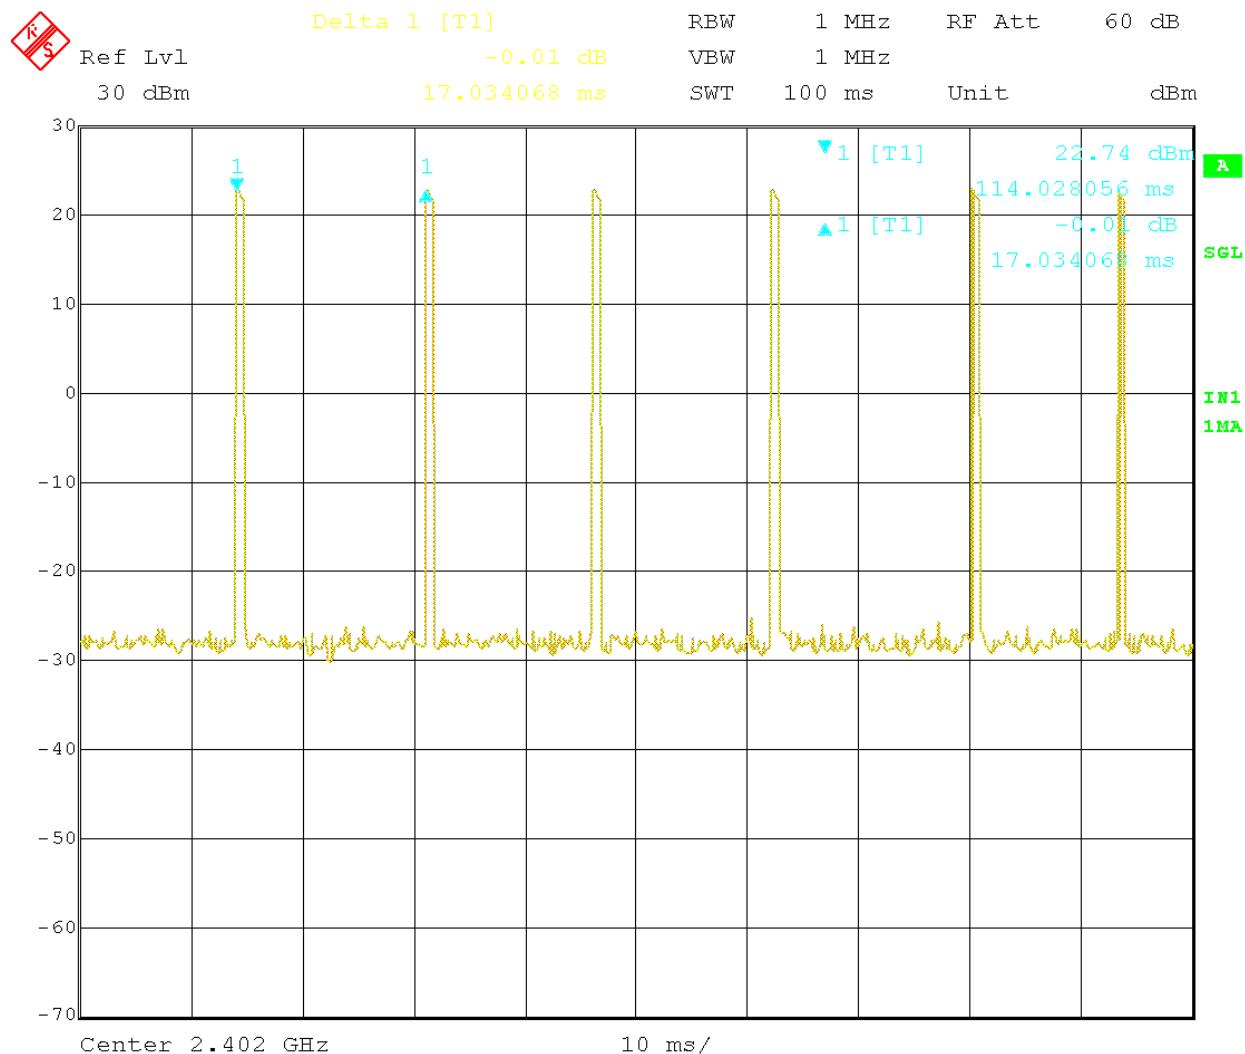


Date: 6.MAR.2013 10:12:43

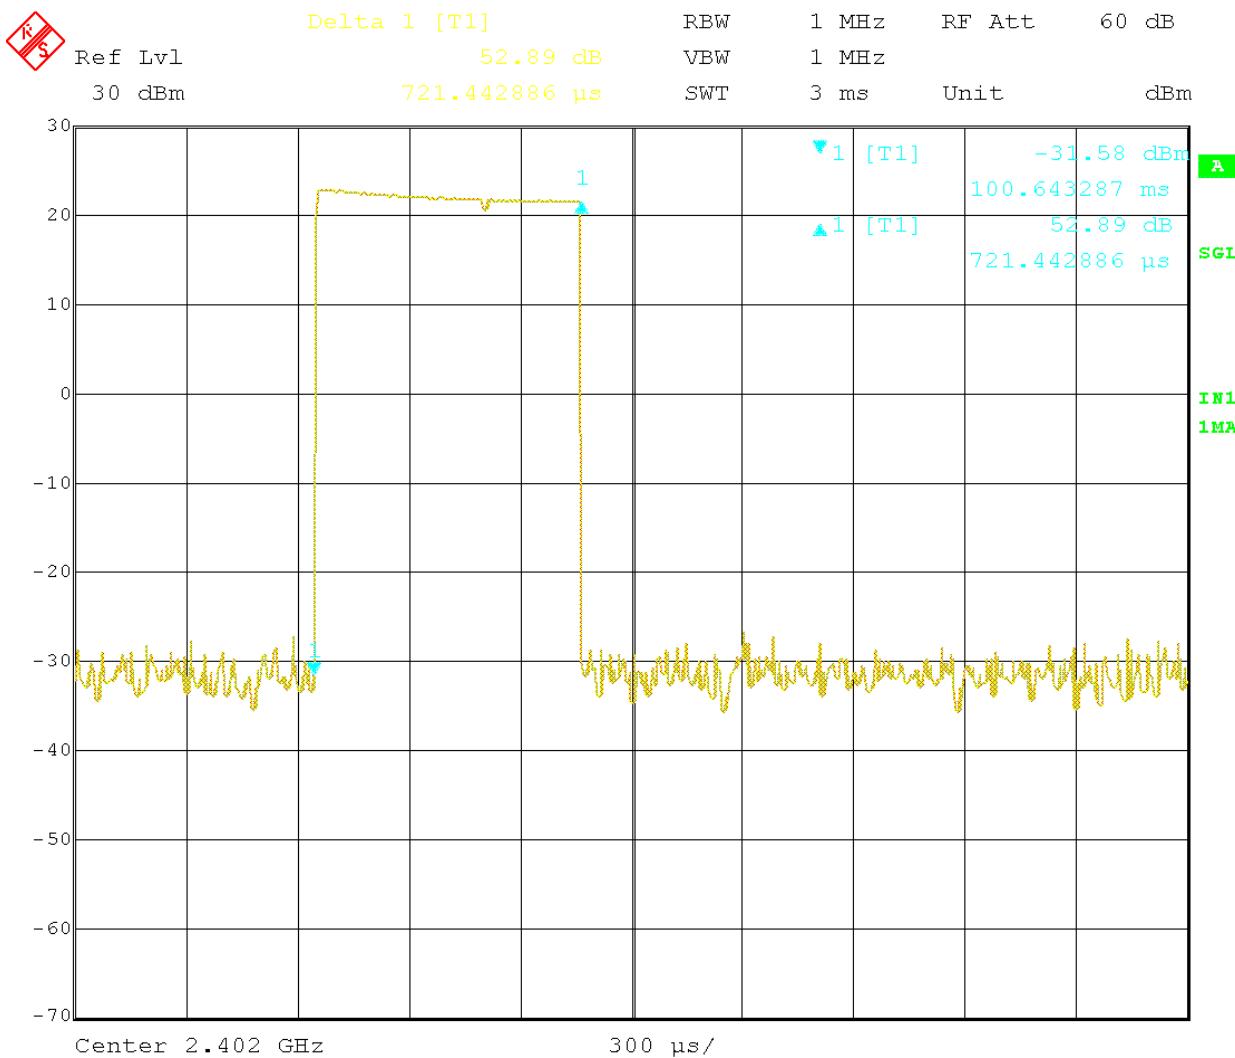

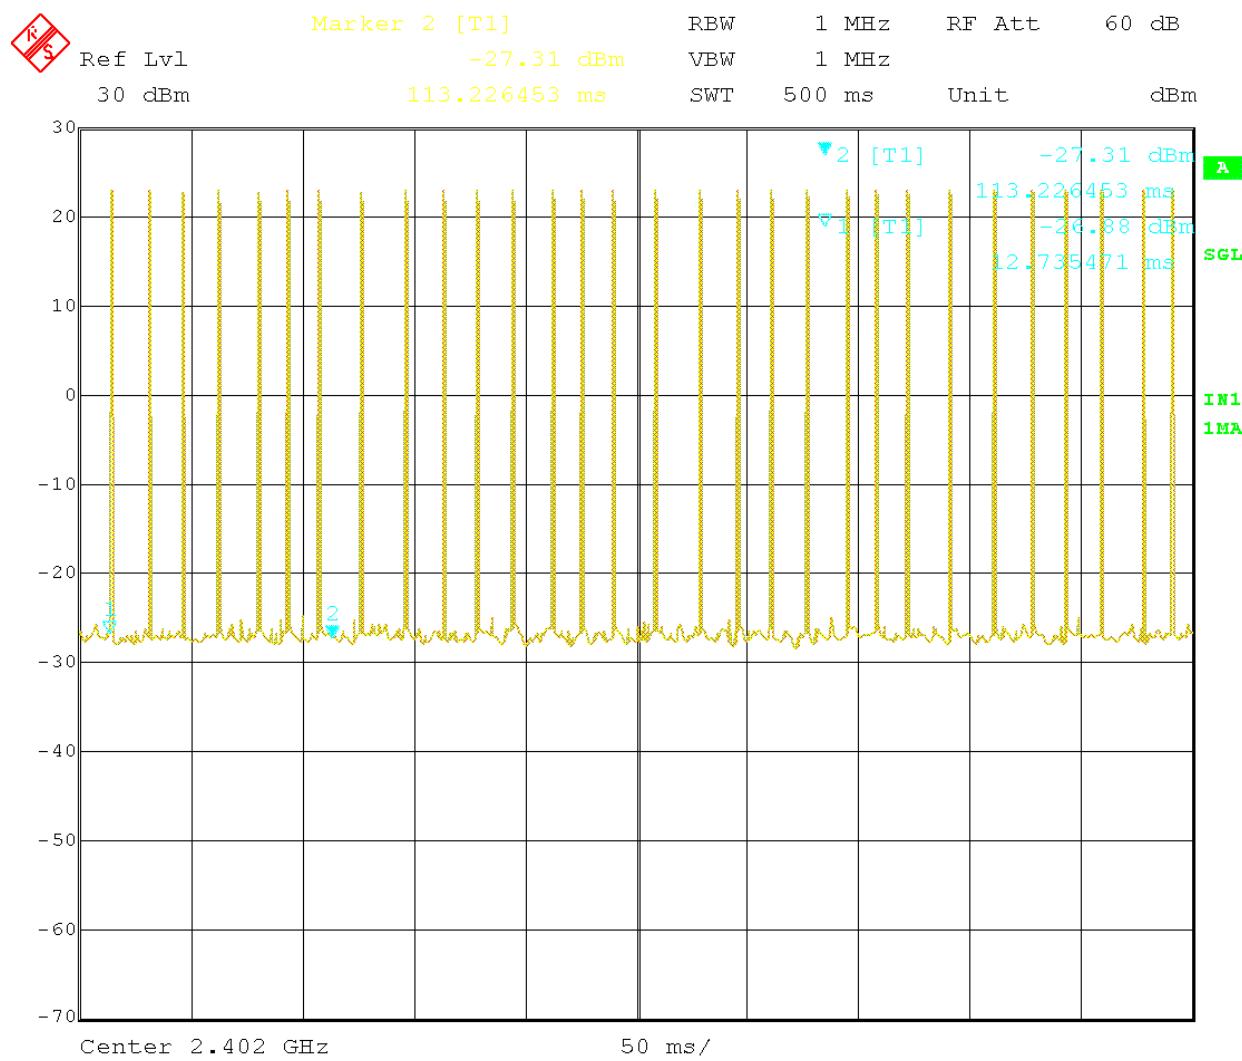

Date: 6.MAR.2013 09:46:57

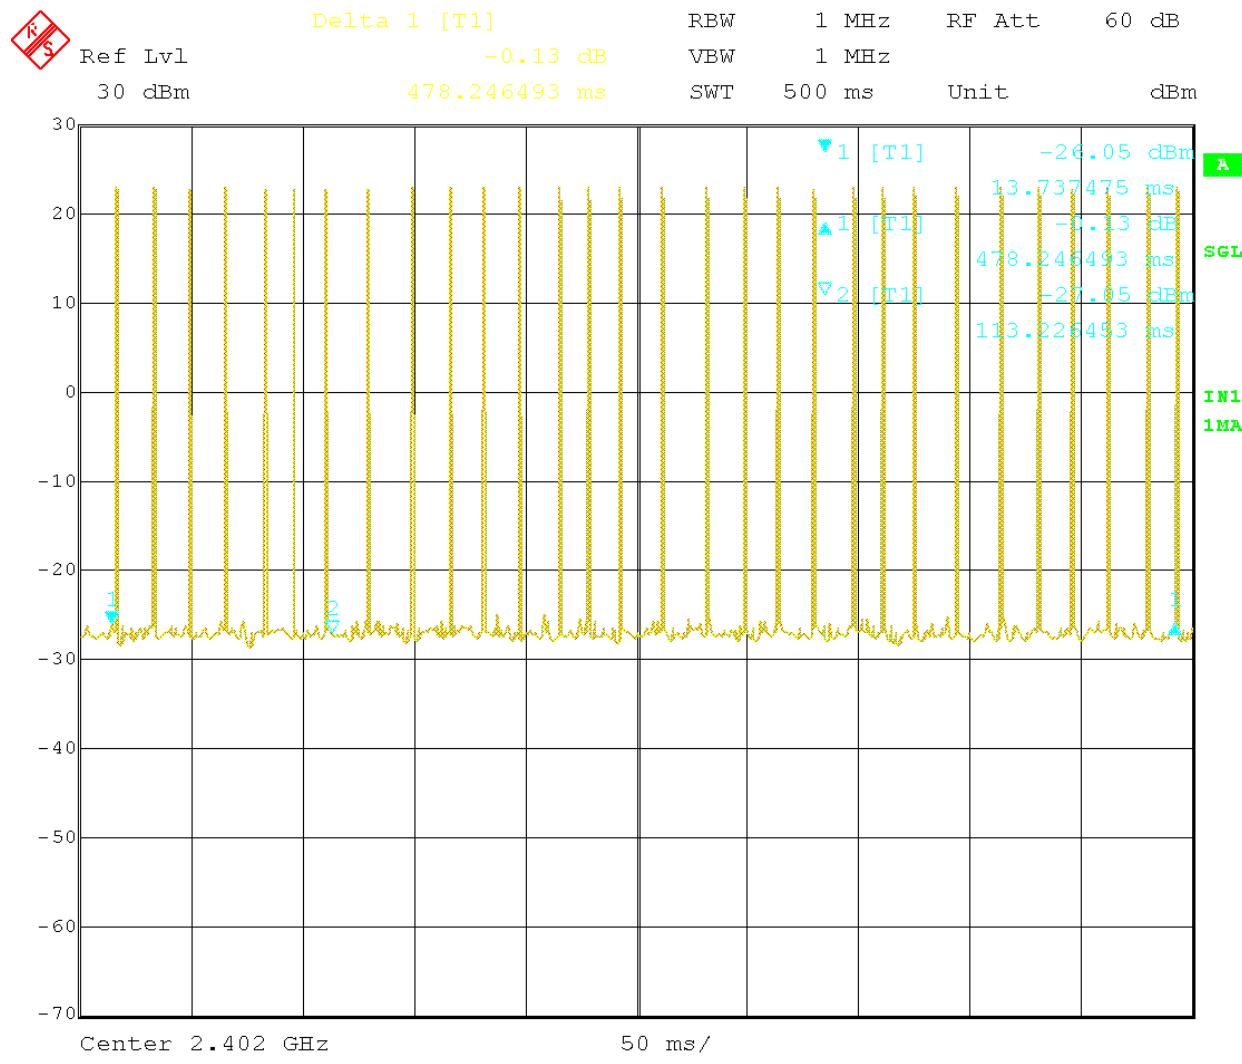

Date: 6.MAR.2013 09:52:40

Duration of Pulse Train, T (mSec): 250
 Averaging Interval, A_I (mSec): 100
 Number of different Pulses, N: 1

Note: Count only the pulses within the first 100 mSec

	Number (#P _x)	Pulse Width, mSec (P _{W_x})	Product (#P _x)*(P _{W_x})
Pulse Width 1	7	0.721	5.047
Pulse Width 2			
Pulse Width 3			
Pulse Width 4			
Pulse Width 5			
Pulse Width 6			
Pulse Width 7			
Pulse Width 8			
Pulse Width 9			
Pulse Width 10			

Duty Cycle: 0.05047
 Duty Cycle Correction Factor, dB: -25.9

$$T_{\text{on}} = (P\text{W}_1 * \#P_1) + (P\text{W}_2 * \#P_2) + \dots + (P\text{W}_n * \#P_n)$$

$$\text{Duty Cycle} = T_{\text{on}} / A_I$$

$$\text{DCCF} = 20 * \text{Log}_{10}(\text{Duty Cycle})$$

7 Radiated Spurious Emissions (Transmitter)

7.1 Test Limits

§ 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Part 15.205(a): Restricted Bands of Operations

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
10.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41.			

¹ Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

² Above 38.6

Part 15.209(a): Field Strength Limits for Restricted Bands of Operation

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.2 Test Procedure

ANSI C63.10: 2009 and KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

7.3 Example of Field Strength Calculation Method:

The measured field strength was calculated by summing the readings taken from the spectrum analyzer with the appropriate correction factors associated with the antenna losses and cable losses. The calculation formula and sample calculations are listed below:

Formula:

$$FS = RA + AF + CF$$

FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude in $\text{dB}\mu\text{V}$

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB (Including preamplifier and filter attenuation)

Example Calculation:

RA = 19.48 $\text{dB}\mu\text{V}$

AF = 18.52 dB

CF = 0.78 dB

$$FS = 19.48 + 18.52 + 0.78 = 38.78 \text{ dB}\mu\text{V}/\text{m}$$

Level in $\mu\text{V}/\text{m}$ = Common Antilogarithm $[(38.78 \text{ dB}\mu\text{V}/\text{m})/20] = 86.89 \mu\text{V}/\text{m}$

7.4 Test Equipment Used:


Description	Manufacturer	Model	Serial Number	Cal Date	Cal Due
Temp. Humidity & Pressure Recorder	Omega	OM-CP-PRHTemp2000	N10673	07/20/2012	07/20/2013
EMI Receiver	Rhode & Schwarz	ESI 7	100044	04/05/2012	04/05/2013
Bi-ConiLog Antenna	Chase	CBL6112B	2726	08/28/2012	08/28/2013
10KHz to 1GHz Preamp	Com-Power	PAM-103	441031	06/05/2012	06/05/2013
Coaxial RF Cable	Insulated Wire Inc	SPS-2303-720-SPS	804	07/19/2012	07/19/2013
Coaxial RF Cable	Insulated Wire Inc	SPS-2303-4250-SPS	805	07/19/2012	07/19/2013
EMI Receiver	Agilent	E7405A	US40240235	05/10/2012	05/10/2013
Horn Antenna 700MHz-18GHz	A H Systems	SAS-571	787	04/12/2012	04/12/2013
RF Pre-amplifier 1 to 18GHz	Miteq	AMF-5D-00501800-28-1	1469795	06/05/2012	06/05/2013
Horn Antenna 18GHz to 40Ghz	A H Systems	SAS-574	570	07/17/2012	07/17/2013
RF Pre-amplifier 18 to 26GHz	Miteq	AMF-6F18002650-20-10	1467280	10/10/2012	10/10/2013
Radiated Emissions TILE profile	Intertek	1130-002	Ver 10	VBU	VBU

7.5 Results:


All spurious emissions were attenuated by at least 20dB below the level of the fundamental as required by Part 15.247(d). Additionally, all emissions falling within restricted bands of operation and at the band edges were found to be below the limit specified in Part 15.209(a) and 15.205(a). The spurious emissions listed in the following tables are the worst case emissions.

Worst Case Spurious Measurements


*Emissions were investigated through 3 orthogonal axis to determine the worst case.

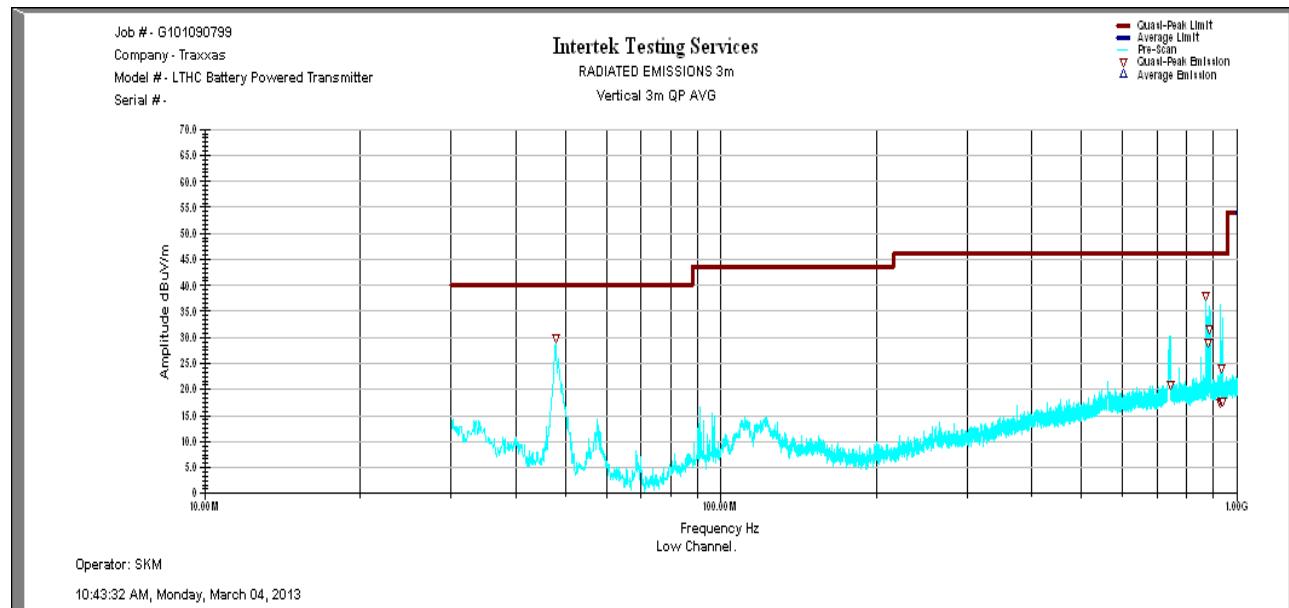


30 to 1000MHz Scan Vertical Antenna Position, Low Ch.

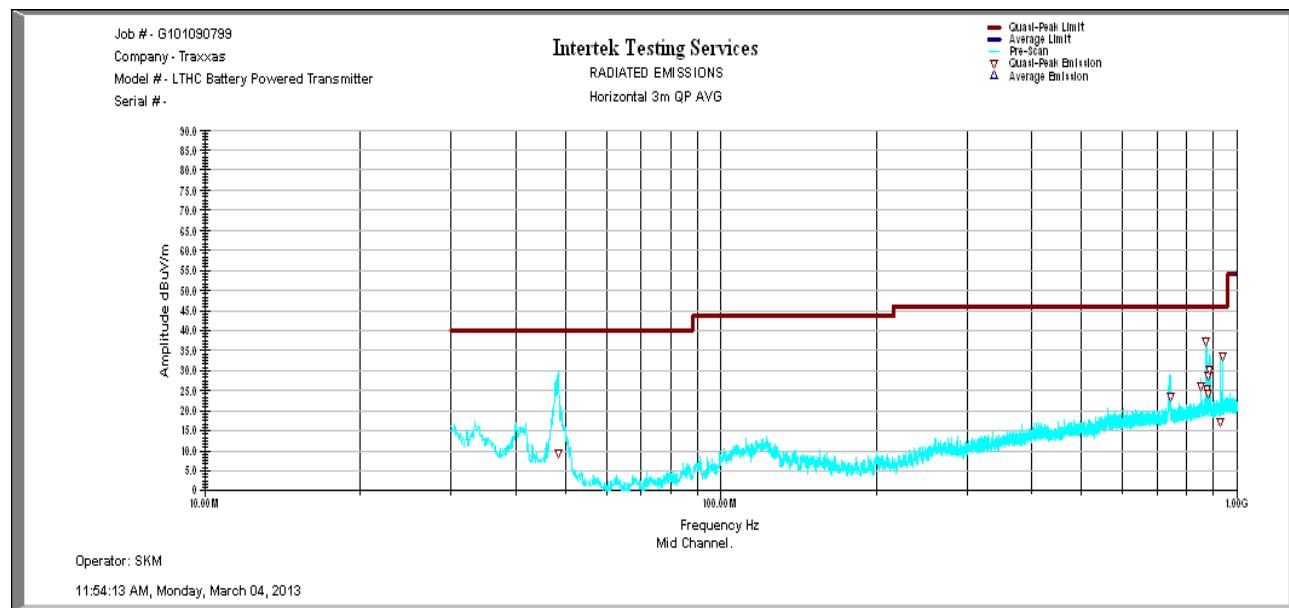


30 to 1000MHz Scan Horizontal Antenna Position, Low Ch.

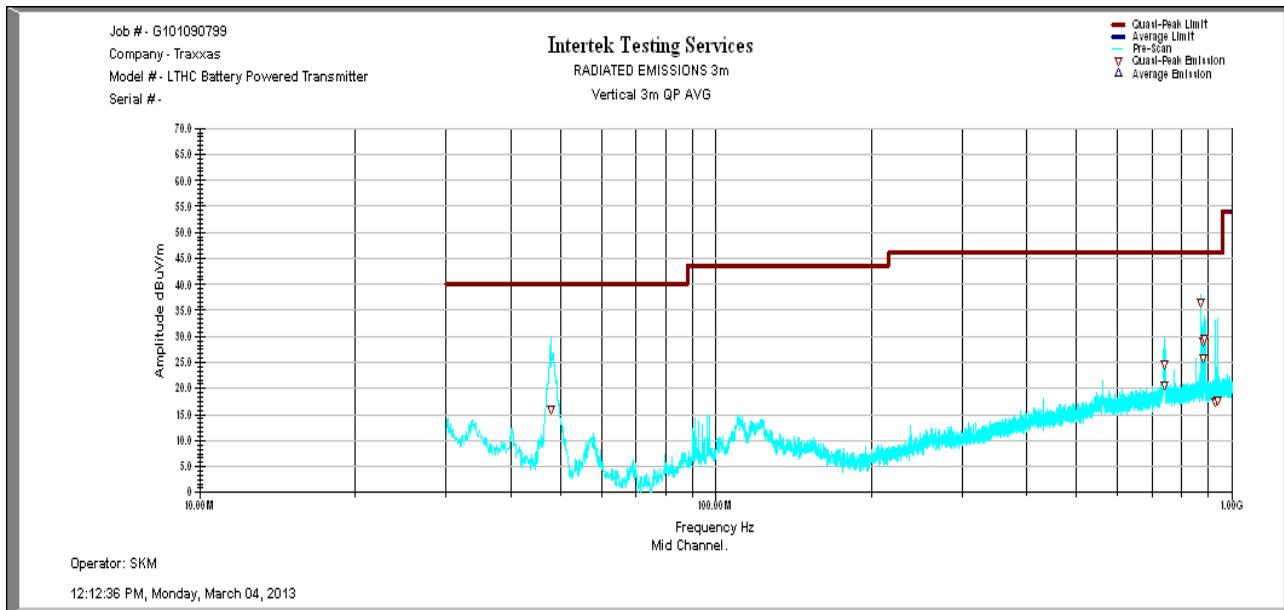


30 to 1000MHz Scan Vertical Antenna Position, Mid Ch.

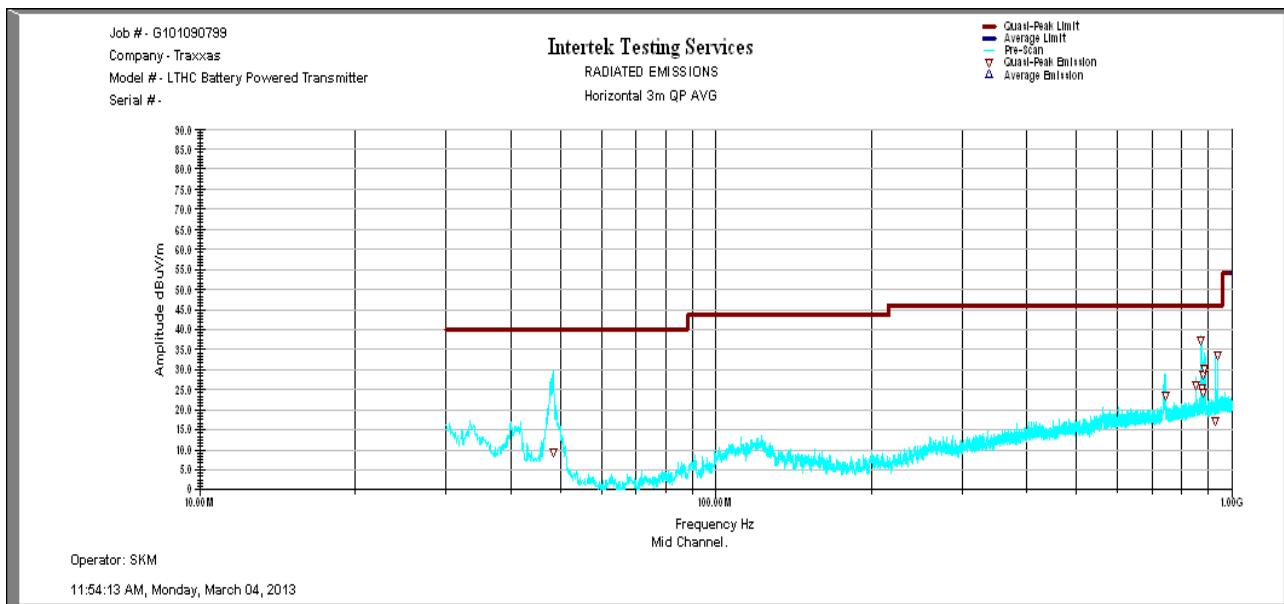

30 to 1000MHz Scan Horizontal Antenna Position, Mid Ch.

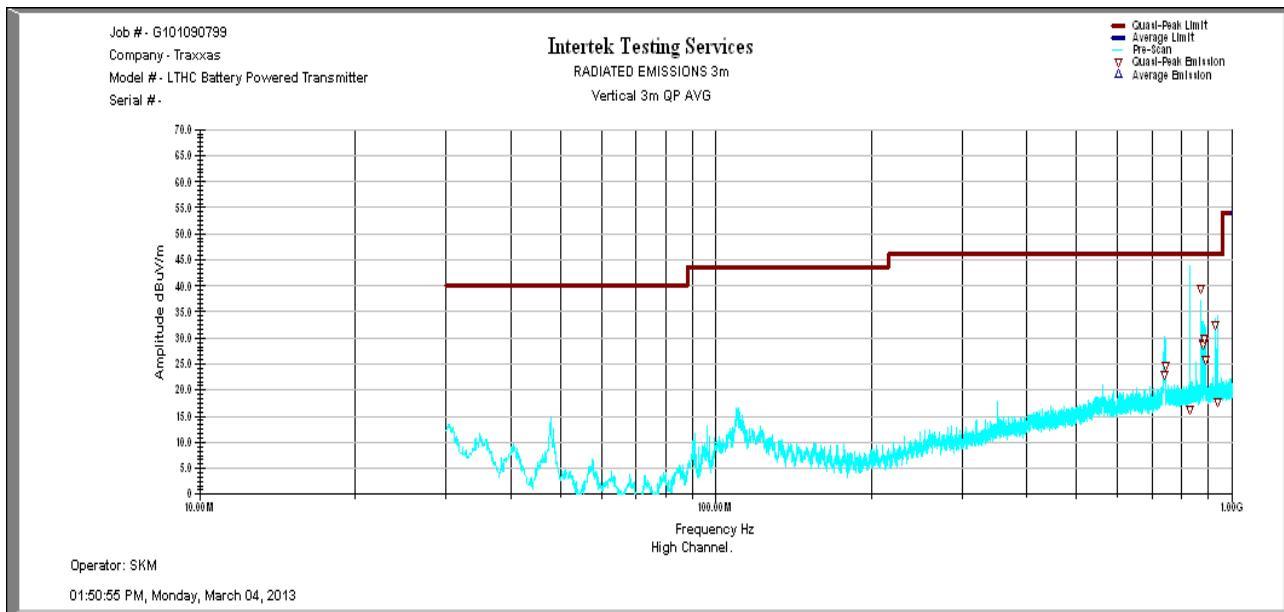

30 to 1000MHz Scan Vertical Antenna Position, High Ch.

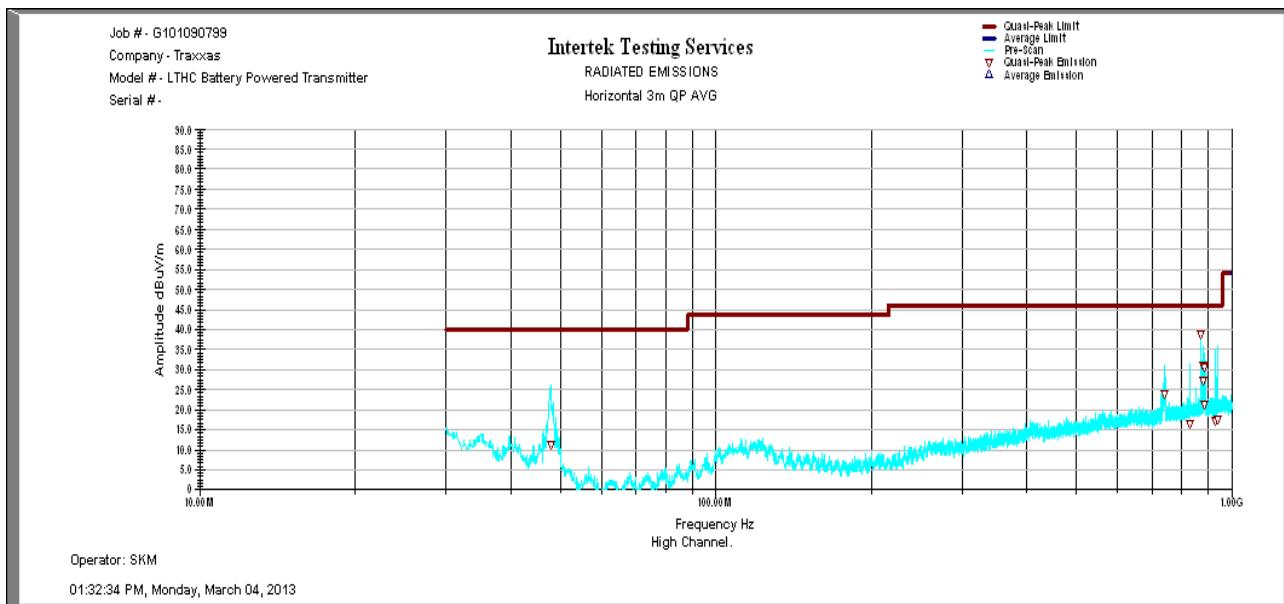


30 to 1000MHz Scan Horizontal Antenna Position, High Ch.

7.6 Data Sheet: 30 to 1000MHz Radiated Scans


Polarity H/V	Frequency MHz	Height cm	Azimuth	QP Reading (dBuV/m)	Antenna Factor	Preamp Factor	Cable Factor	QP Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Low Channel										
V	47.79	166	97	53.832	8.784	35.546	1.152	29.886	40	-10.114
V	742.95	217	145	30.287	20.7	34.394	4.528	21.02	46.021	-25
V	872.85	212	33	45.371	20.9	34.039	4.938	37.971	46.021	-8.05
V	877.87	158	69	36.285	20.843	34.024	4.955	28.915	46.021	-17.105
V	881.15	251	56	36.386	20.8	34.015	4.964	29.034	46.021	-16.986
V	887.11	152	69	38.876	20.8	33.996	4.976	31.556	46.021	-14.464
H	872.75	117	10	42.799	21.7	34.039	4.937	35.398	46.021	-10.623
H	873.33	305	209	27.941	21.7	34.037	4.939	20.544	46.021	-25.477
H	878.16	140	142	35.618	21.7	34.024	4.956	28.25	46.021	-17.771
H	887.32	222	149	34.705	21.7	33.995	4.977	27.386	46.021	-18.634
H	929.66	335	221	42.738	22	33.871	5.09	35.957	46.021	-10.064
H	940.86	155	239	34.769	22.3	33.827	5.112	28.355	46.021	-17.666
Mid Channel										
V	738.5	151	41	34.136	20.67	34.406	4.51	24.78	46.021	-21.241
V	872.79	283	40	44.123	20.9	34.039	4.937	36.722	46.021	-9.298
V	877.98	243	280	36.327	20.84	34.024	4.955	28.958	46.021	-17.063
V	881.29	160	127	33.227	20.8	34.015	4.964	25.876	46.021	-20.145
V	887.15	240	307	36.847	20.8	33.996	4.976	29.528	46.021	-16.493
H	852.18	143	37	33.853	21.544	34.101	4.867	26.162	46.021	-19.858
H	872.85	339	56	44.797	21.7	34.039	4.938	37.396	46.021	-8.624
H	873.35	273	302	32.948	21.7	34.037	4.939	25.551	46.021	-20.47
H	877.93	277	87	36.304	21.7	34.024	4.955	28.935	46.021	-17.086
H	881.22	120	311	31.622	21.7	34.015	4.964	24.271	46.021	-21.75
H	887.24	122	89	37.577	21.7	33.996	4.977	30.258	46.021	-15.762
H	929.73	120	276	24.158	22	33.871	5.09	17.377	46.021	-28.644
High Channel										
V	743.41	205	38	33.905	20.7	34.393	4.53	24.641	46.021	-21.379
V	872.84	234	34	46.912	20.9	34.039	4.938	39.511	46.021	-6.51
V	877.95	157	35	36.401	20.841	34.024	4.955	29.032	46.021	-16.989
V	881.2	172	246	36.138	20.8	34.015	4.964	28.787	46.021	-17.234
V	886.64	215	210	37.154	20.8	33.997	4.975	29.832	46.021	-16.189
V	890.63	184	75	33.178	20.8	33.989	4.988	25.89	46.021	-20.131
V	929.72	178	127	39.394	21.106	33.871	5.09	32.613	46.021	-13.408
H	742.15	143	240	33.334	20.6	34.396	4.523	24.062	46.021	-21.959
H	872.8	340	41	46.336	21.7	34.039	4.938	38.934	46.021	-7.086
H	878.19	148	223	38.23	21.7	34.024	4.956	30.862	46.021	-15.158
H	881.53	143	10	34.514	21.7	34.014	4.964	27.164	46.021	-18.856
H	885.15	117	233	28.785	21.7	34	4.97	21.455	46.021	-24.566
H	886.65	263	142	37.911	21.7	33.997	4.975	30.589	46.021	-15.432

Results: Pass

Note: From 1 to 10 GHz testing was completed at 3 transmit frequencies to determine compliance. EUT was measured at 3m distance.

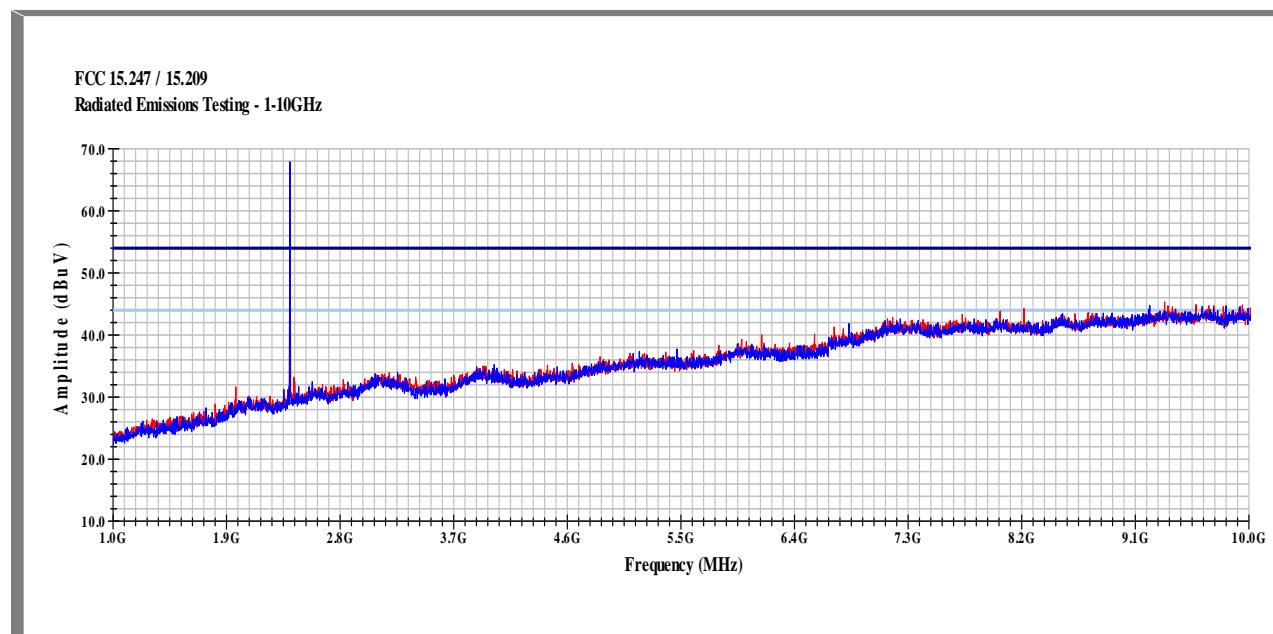


Low Channel, 1 to 10GHz Scan Plot

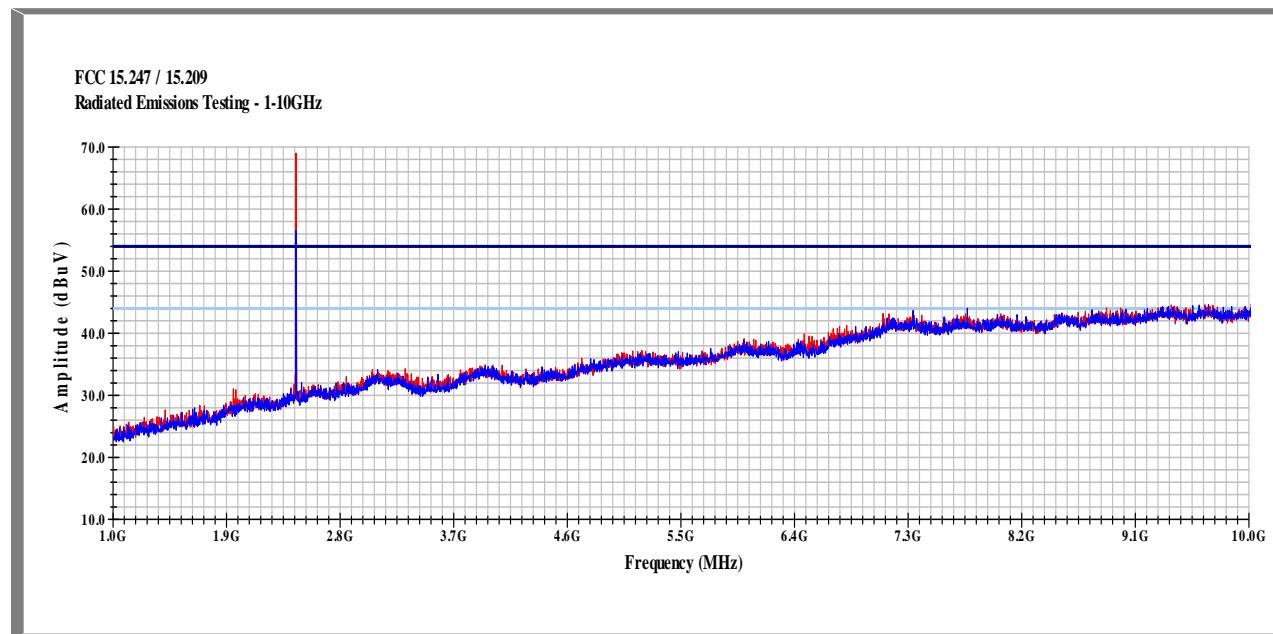


Mid Channel, 1 to 10GHz Scan Plot

FCC 15.247 / 15.209
Radiated Emissions Testing - 1-10GHz

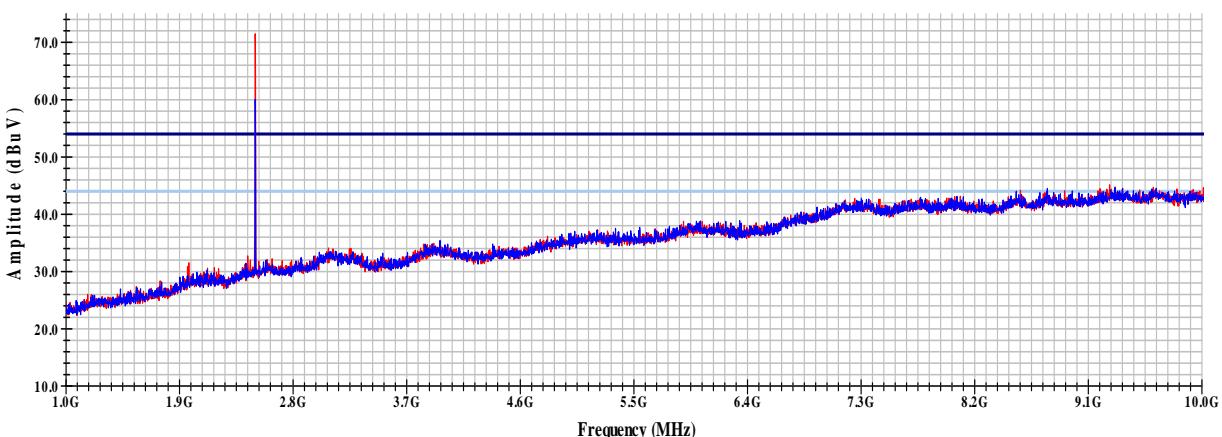


High Channel, 1 to 10GHz Scan Plot



Note: From 10 to 26.5 GHz testing was completed at 3 transmit frequencies to determine compliance. EUT was measured at 1m distance.


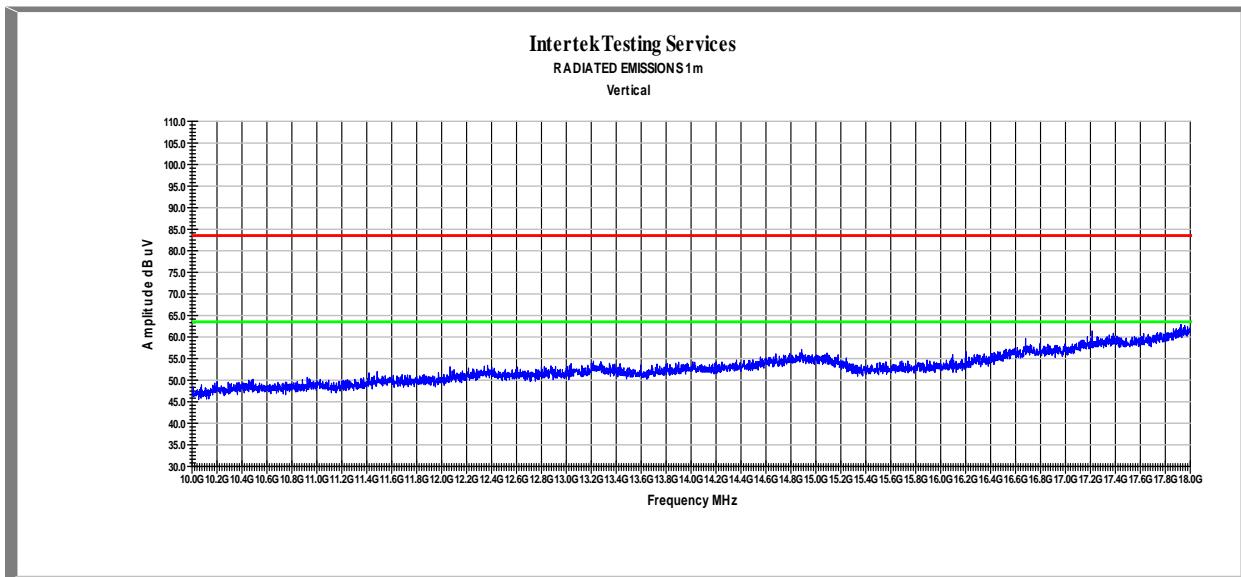




Low Channel, 10 to 18GHz Vertical Antenna Scan Plot


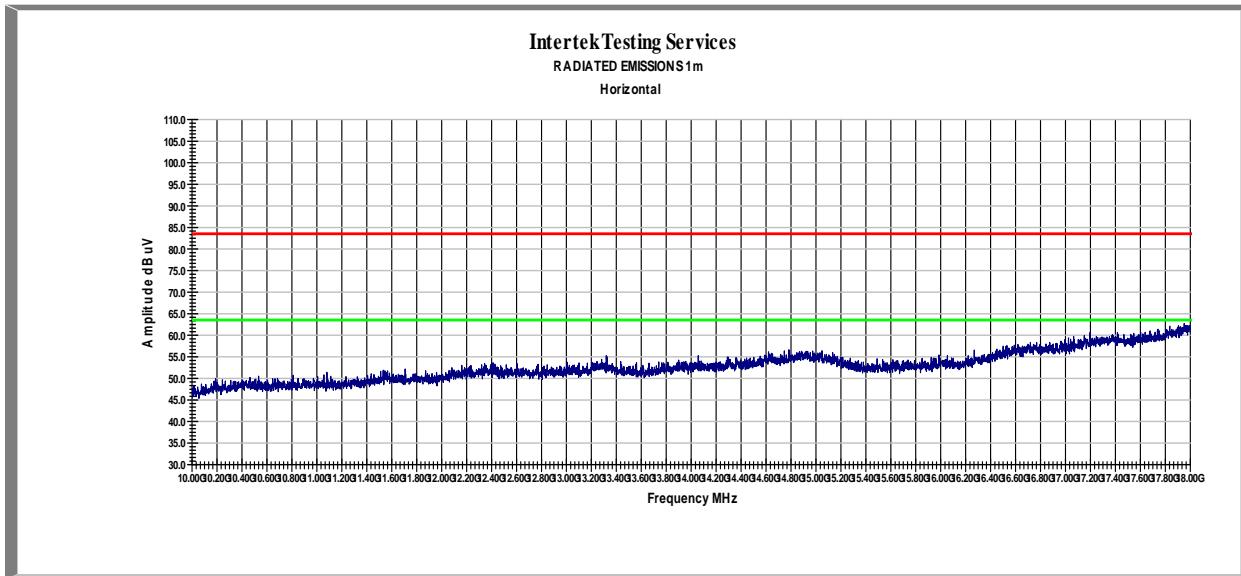



Low Channel, 10 to 18GHz Horizontal Antenna Scan Plot

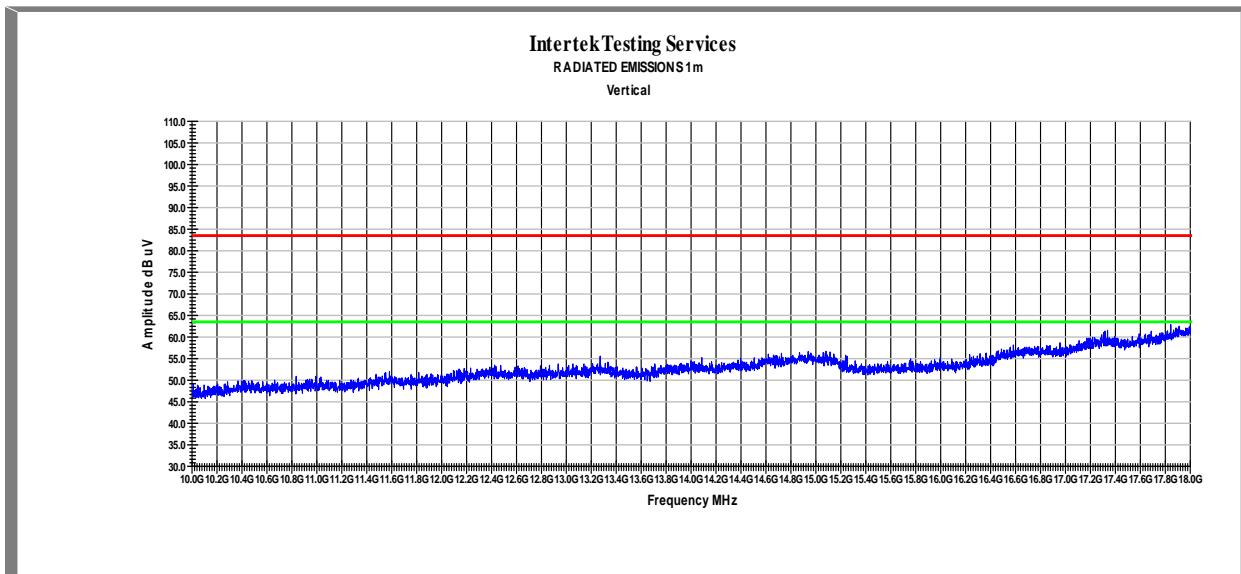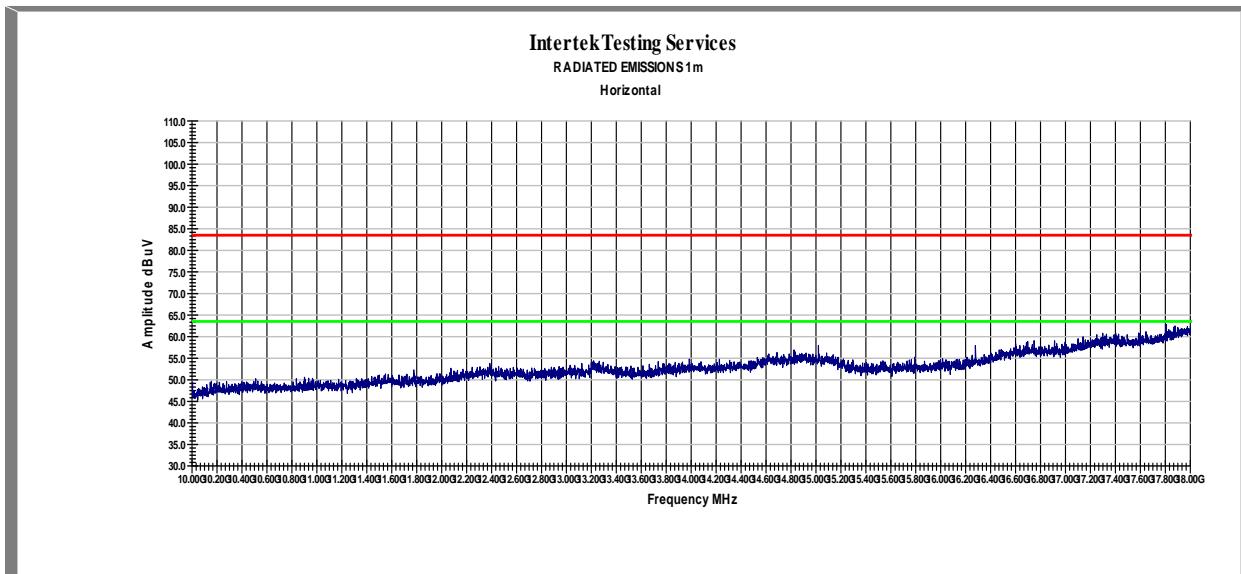**Mid Channel, 10 to 18GHz Vertical Antenna Scan Plot****Mid Channel, 10 to 18GHz Horizontal Antenna Scan Plot**

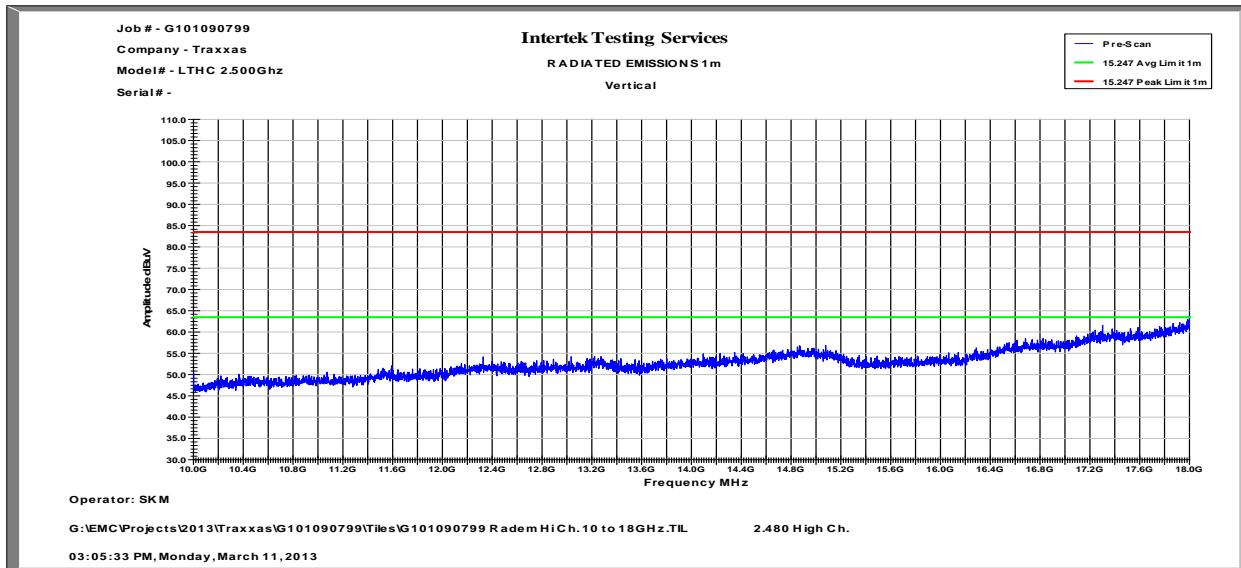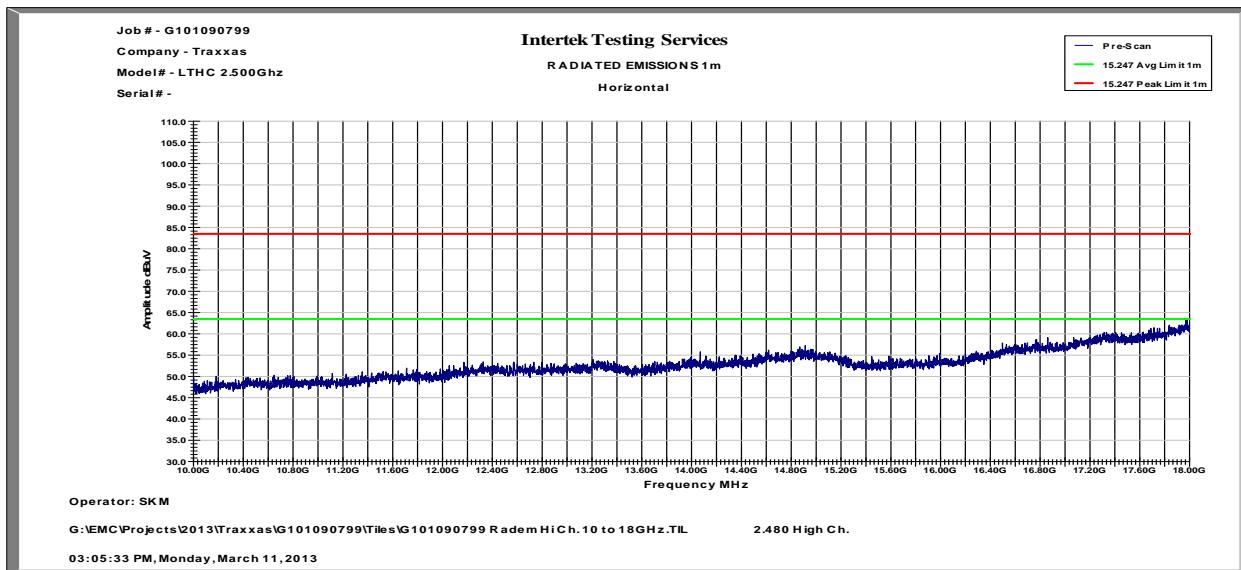
**High Channel, 10 to 18GHz Vertical Antenna Scan Plot****High Channel, 10 to 18GHz Horizontal Antenna Scan Plot**

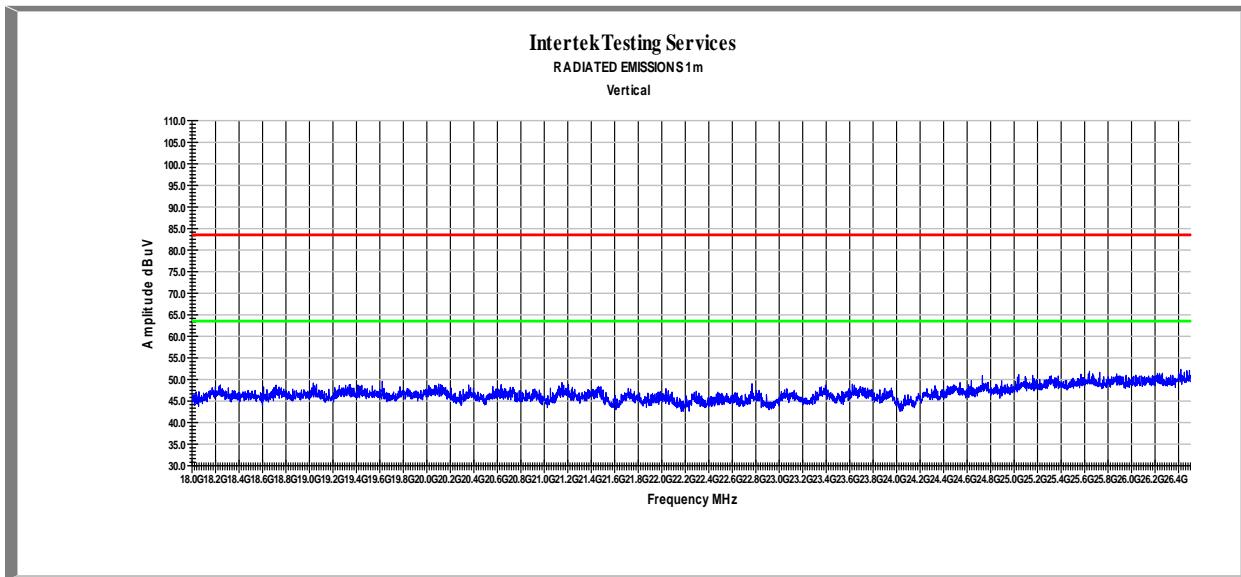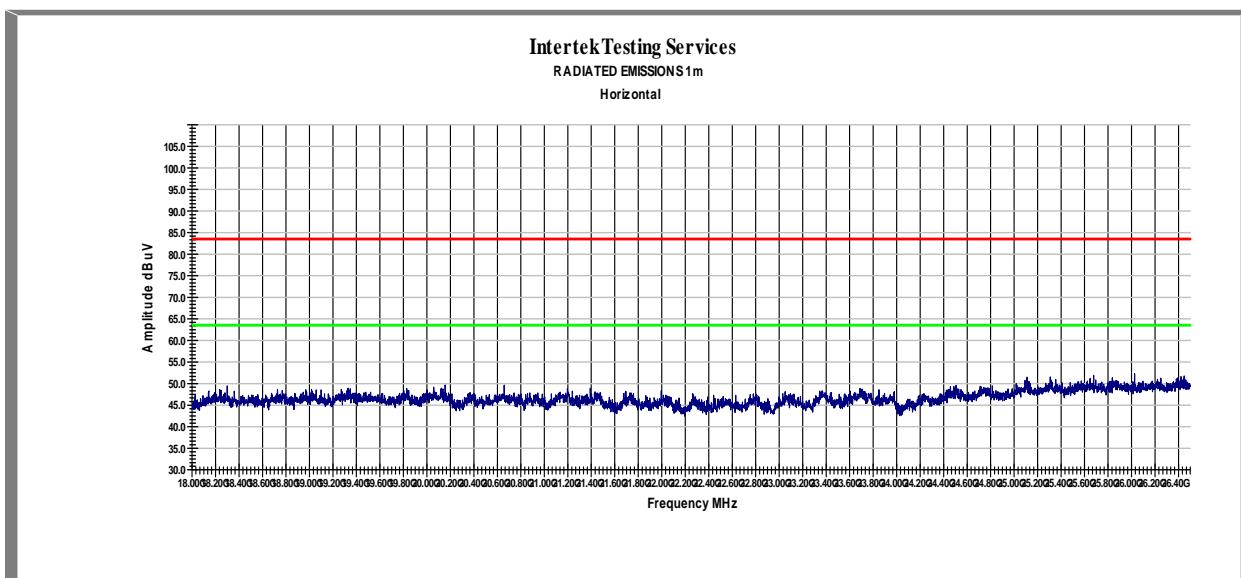**Low Channel, 18 to 26.5GHz Vertical Antenna Scan Plot****Low Channel, 18 to 26.5GHz Horizontal Antenna Scan Plot**

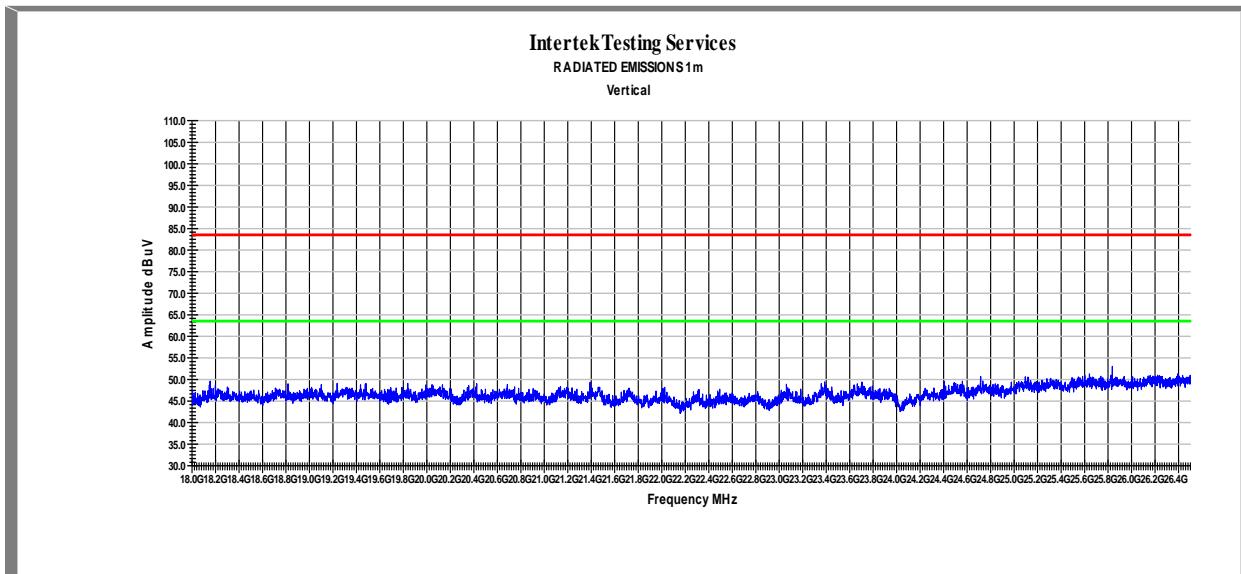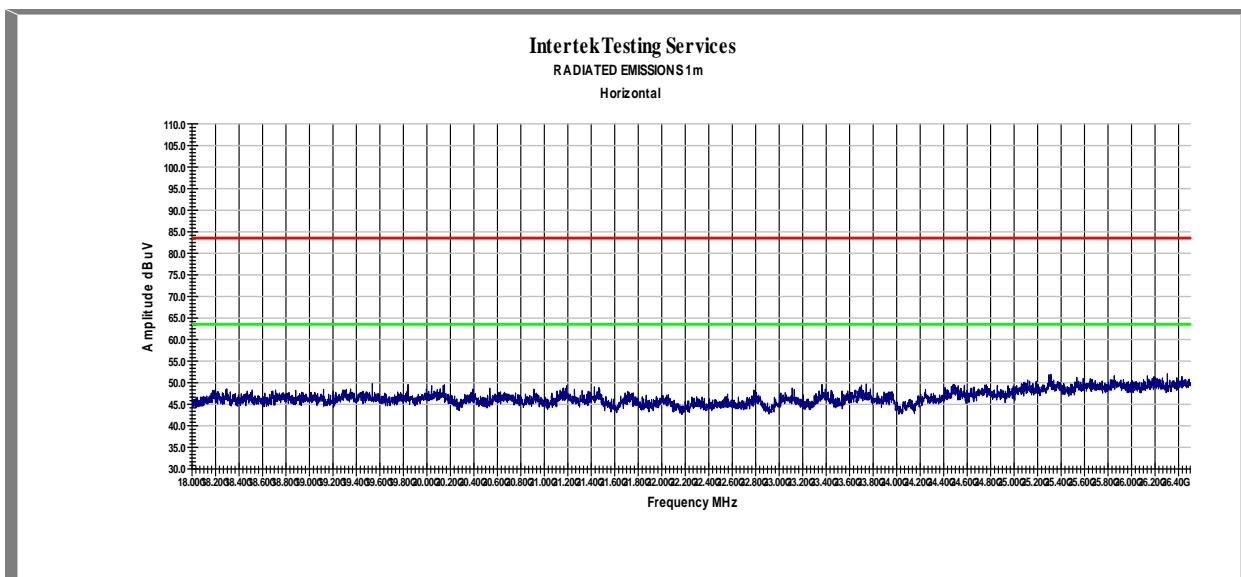**Mid Channel, 18 to 26.5GHz Vertical Antenna Scan Plot****Mid Channel, 18 to 26.5GHz Horizontal Antenna Scan Plot**

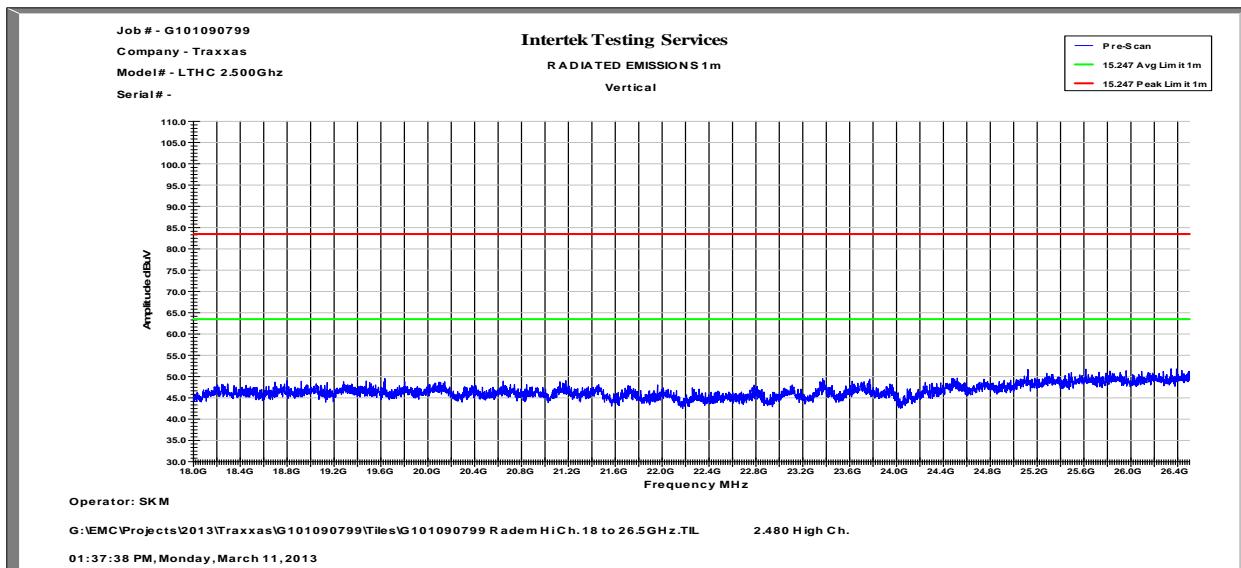

High Channel, 18 to 26.5GHz Vertical Antenna Scan Plot

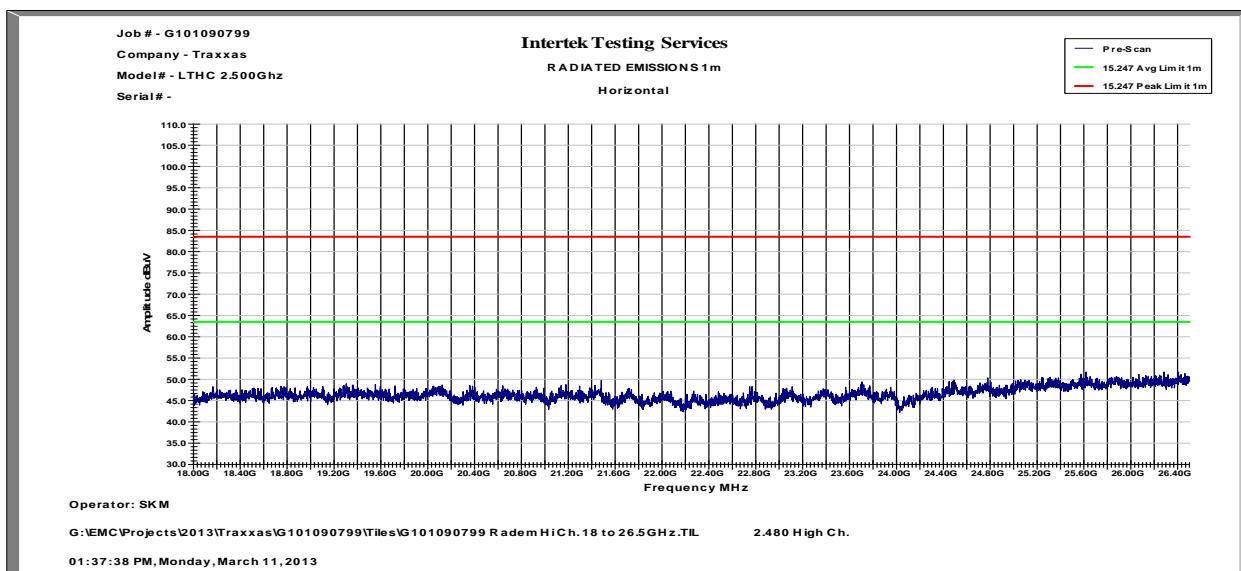

High Channel, 18 to 26.5GHz Horizontal Antenna Scan Plot

7.7 Data Sheet: 1 to 26.5GHz Radiated/Restricted Band Scans

NOTE: From 1 to 26.5GHz no spurious emissions, nor emissions in the restricted bands, were detected or measured above the noise floor. Plots were performed with peak detector utilized. If measurements had been necessary averaging /detectors would have been employed. All emissions falling within restricted bands of operation and at the band edges were found to be below the limit specified in Part 15.205(a).

Results: Pass

8 Radiated Spurious Emissions (Receiver)

Not Applicable: This device does not contain a separate receive function. The nature of this device is that it will only receive while transmitting. Therefore, the spurious emissions produced in transmit mode are the spurious emissions produced in receive mode.

9 AC Power Line Conducted Emissions

Not Applicable: EUT is a battery-powered device.

10 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty	Notes
Radiated emissions, 30 to 1000 MHz	+3.9dB	
Radiated emissions, 1 to 18 GHz	+4.2dB	
Radiated emissions, 18 to 40 GHz	+4.3dB	
Power Port Conducted emissions, 150kHz to 30 MHz	+2.8dB	

11 Revision History

Revision Level	Date	Report Number	Notes
0	March 20, 2013	101090799DAL-001	Original Issue