


FCC Test Report

FCC ID : XVG50-0102-QT-BL
Equipment : HD IPTV receiver
Model No. : Kamai751Q, Amulet 756Q
(Refer to item 1.1.1 for more details)
Multiple Listing : Kamai 7XYQzzzzz
(where "X" can be 0-9, "Y" can be 0-9;
"zzzzzz" can be any combination of "0-9",
"a-z", "-", "/" or blank for marketing purpose)
Amulet 7XYQzzzzz
(where "X" can be 0-9, "Y" can be 0-9;
"zzzzzz" can be any combination of "0-9",
"a-z", "-", "/" or blank for marketing purpose)
Brand Name : Amino
Applicant : Amino Communications Ltd
Address : Buckingway Business Park, Anderson Road,
Swavesey, Cambridge CB24 4UQ, United
Kingdom
Standard : 47 CFR FCC Part 15.247
Received Date : Jun. 13, 2017
Tested Date : Jul. 07 ~ Jul. 11, 2017


We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:

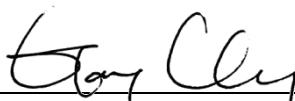

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	Test Equipment List and Calibration Data.....	10
1.5	Test Standards	12
1.6	Measurement Uncertainty	12
2	TEST CONFIGURATION.....	13
2.1	Testing Condition	13
2.2	The Worst Test Modes and Channel Details	13
3	TRANSMITTER TEST RESULTS.....	14
3.1	Conducted Emissions.....	14
3.2	6dB and Occupied Bandwidth	19
3.3	RF Output Power.....	21
3.4	Power Spectral Density	23
3.5	Emissions in Restricted Frequency Bands.....	25
3.6	Emissions in non-restricted Frequency Bands.....	43
4	TEST LABORATORY INFORMATION	45

Release Record

Report No.	Version	Description	Issued Date
FR761304-01AE	Rev. 01	Initial issue	Oct. 05, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.365MHz 40.23 (Margin -8.38dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 38.77MHz 39.39 (Margin -0.61dB) - QP	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 3.89	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Model Name	Multiple Listing	Product Name	Description
Kamai751Q	Kamai 7XYQzzzzz (where "X" can be 0-9, "Y" can be 0-9; "zzzzzz" can be any combination of "0-9", "a-z", "-", "/" or blank for marketing purpose)	HD IPTV receiver	Without HDD
Amulet 756Q	Amulet 7XYQzzzzz (where "X" can be 0-9, "Y" can be 0-9; "zzzzzz" can be any combination of "0-9", "a-z", "-", "/" or blank for marketing purpose)		With HDD

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V4.1 LE	2402-2480	0-39 [40]	1 Mbps
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	1.8	---

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter
-------------------	-----------------------

1.1.5 Accessories

Model Name: Kamai751Q

Accessories		
No.	Equipment	Description
1	Adapter 1	Brand Name: MOSO Model Name: MSA-C2000IS12.0-24Y-US I/P: 100-120Vac, 50/60Hz, 0.7A Max O/P: 12Vdc, 2A Power line: 1.8m non-shielded without core
2	Adapter 2	Brand Name: APD Model Name: WA-24Q12R-EBAB I/P: 100-120Vac, 50-60Hz, 0.7A Max O/P: 12Vdc, 2A Power line: 1.8m non-shielded without core
3	3.5mm to 3RCA cable	Brand : Interconnect Model : KFA1141105074-5, Power line: 1.75m, non-shielded, without core
4	HDMI cable	Brand : Interconnect Model : 18-94H1CS-372G-H Power line: 2m, shielded, without ferrite core
5	Ethernet cable	Brand : WENET Model : P355-3-1 Power line: 2m, non-shielded cable, w/o ferrite core
6.	Remote control	---

Model Name: Amulet 756Q

Accessories		
No.	Equipment	Description
1	Adapter 1	Brand Name: MOSO Model Name: MSA-C2000IS12.0-24Y-US I/P: 100-120Vac, 50/60Hz, 0.7A Max O/P: 12Vdc, 2A Power line: 1.8m non-shielded without core
2	Adapter 2	Brand Name: APD Model Name: WA-24Q12R-EBAB I/P: 100-120Vac, 50-60Hz, 0.7A Max O/P: 12Vdc, 2A Power line: 1.8m non-shielded without core
3	3.5mm to 3RCA cable	Brand Name: Interconnect Model Name: KFA1141105074-5, Power line: 1.75m, non-shielded, without core
4	HDMI cable	Brand Name: Interconnect Model Name: 18-94H1CS-372G-H Power line: 2m, shielded, without ferrite core
5	Ethernet cable	Brand Name: WENET Model Name: P355-3-1 Power line: 2m, non-shielded cable, w/o ferrite core
6.	Remote control	---
7	HDD	Brand Name: WD Model Name: WD10JUCT

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.7 Test Tool and Duty Cycle

Test tool	Tera Term, ver. 4.74
Duty cycle of test signal (%)	63.43%
Duty Factor (dB)	1.98


1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/1Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	9ZFB4X1	RJ45, 10m non-shielded Ethernet, 2m non-shielded
2	TV	CHIMEI	TL-24LF500D	24LF500DK 3511822	3.5mm to 3RCA, 1.75m non-shielded HDMI, 2m shielded
3	USB 3.0 Flash	pqi	U273V 16G	51882	---

1.3 Test Setup Chart

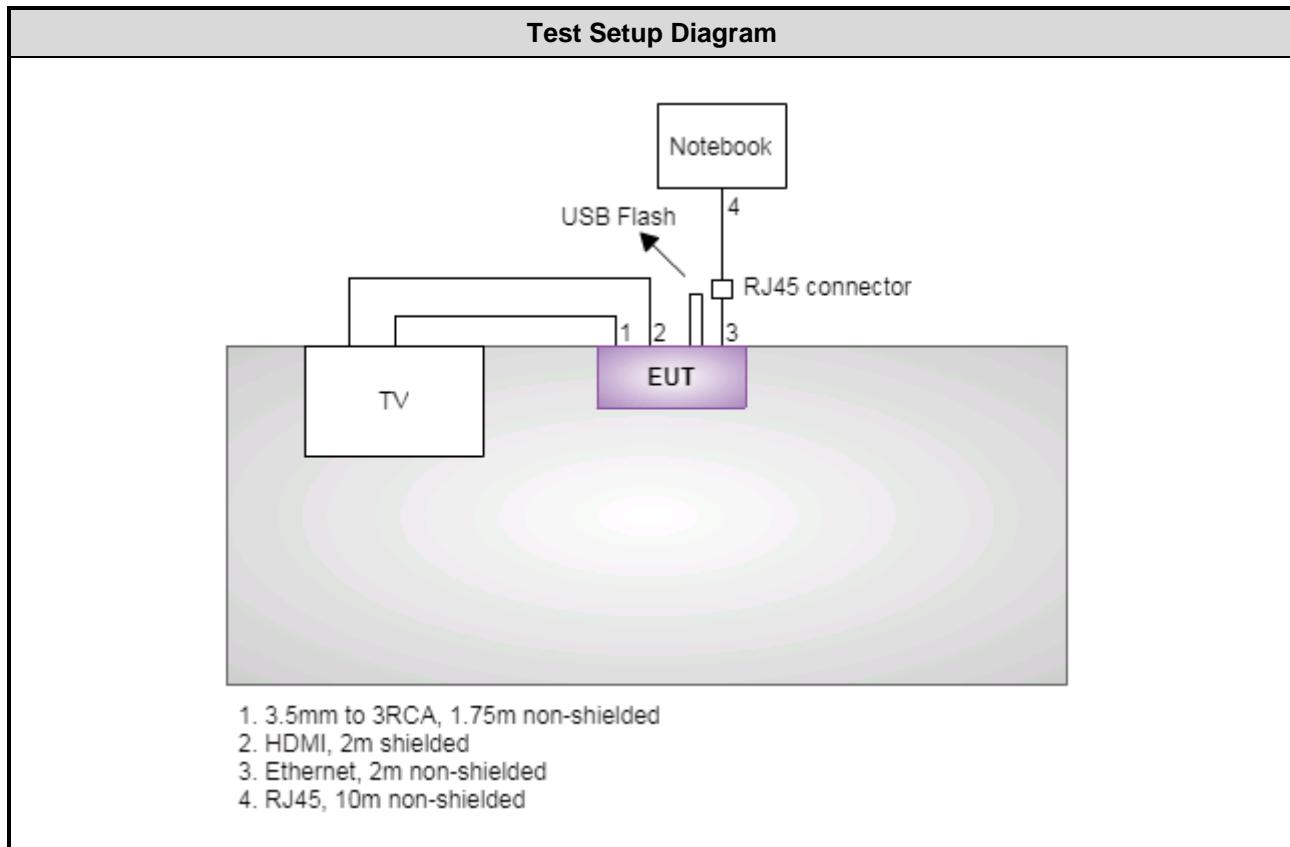

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 25, 2016	Nov. 24, 2017
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 20, 2016	Dec. 19, 2017
50 ohm terminal (Support Unit)	NA	50	04	May 12, 2017	May 11, 2018
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017
Receiver	Agilent	N9038A	MY53290044	Oct. 06, 2016	Oct. 05, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980187	Sep. 08, 2016	Sep. 07, 2017
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 04, 2017	Feb. 03, 2018
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 04, 2017	Feb. 03, 2018
LF cable-13M	EMC	EMC8D-NM-NM-1300	131104	Feb. 04, 2017	Feb. 03, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
AC POWER SOURCE	APC	AFC-500W	F312060012	Oct. 28, 2016	Oct. 27, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017
Receiver	Agilent	N9038A	MY53290044	Oct. 06, 2016	Oct. 05, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980187	Sep. 08, 2016	Sep. 07, 2017
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 04, 2017	Feb. 03, 2018
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 04, 2017	Feb. 03, 2018
LF cable-13M	EMC	EMC8D-NM-NM-1300	131104	Feb. 04, 2017	Feb. 03, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 25, 2016	Nov. 24, 2017
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 20, 2016	Dec. 19, 2017
50 ohm terminal (Support Unit)	NA	50	04	May 12, 2017	May 11, 2018
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Parameters		Uncertainty
Bandwidth		±34.134 Hz
Conducted power		±0.808 dB
Power density		±0.463 dB
Conducted emission		±2.670 dB
AC conducted emission		±2.90 dB
Radiated emission ≤ 1GHz		±3.66 dB
Radiated emission > 1GHz		±5.37 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 56%	Alex Tsai
Radiated Emissions	03CH03-WS	23-24°C / 61-62%	Vincent Yeh Kevin Lee
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE	2440	1Mbps	1, 2
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	1Mbps	1
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1, 2

NOTE:

1. Adapter 1 and Adapter 2 had been pretested and found that **Adapter 2** was the worst case and was selected for final testing (Adapter 1: MOSO adapter; **Adapter 2: APD adapter**).
2. The test configurations are listed as follows:
Configuration 1 : Model Name: Kamai751Q
Configuration 2 : Model Name: Amulet 756Q

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

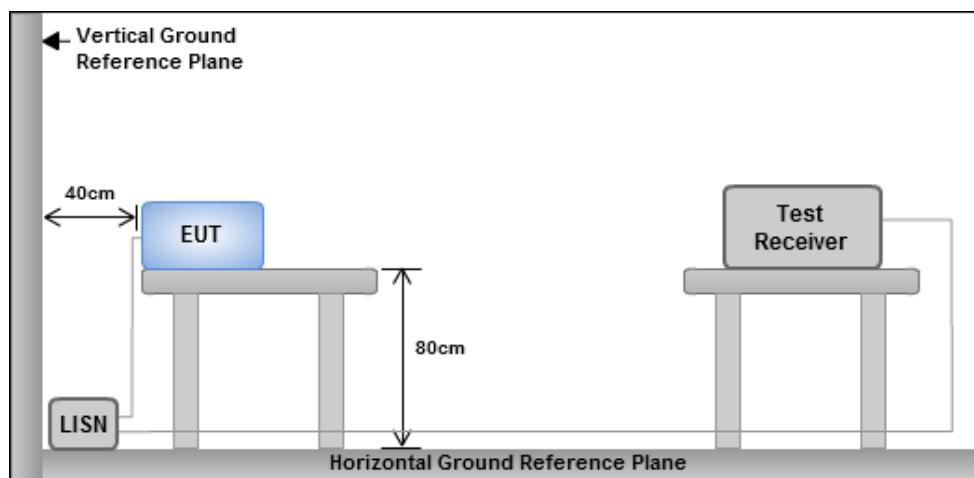

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions

Model Name: Kamai751Q

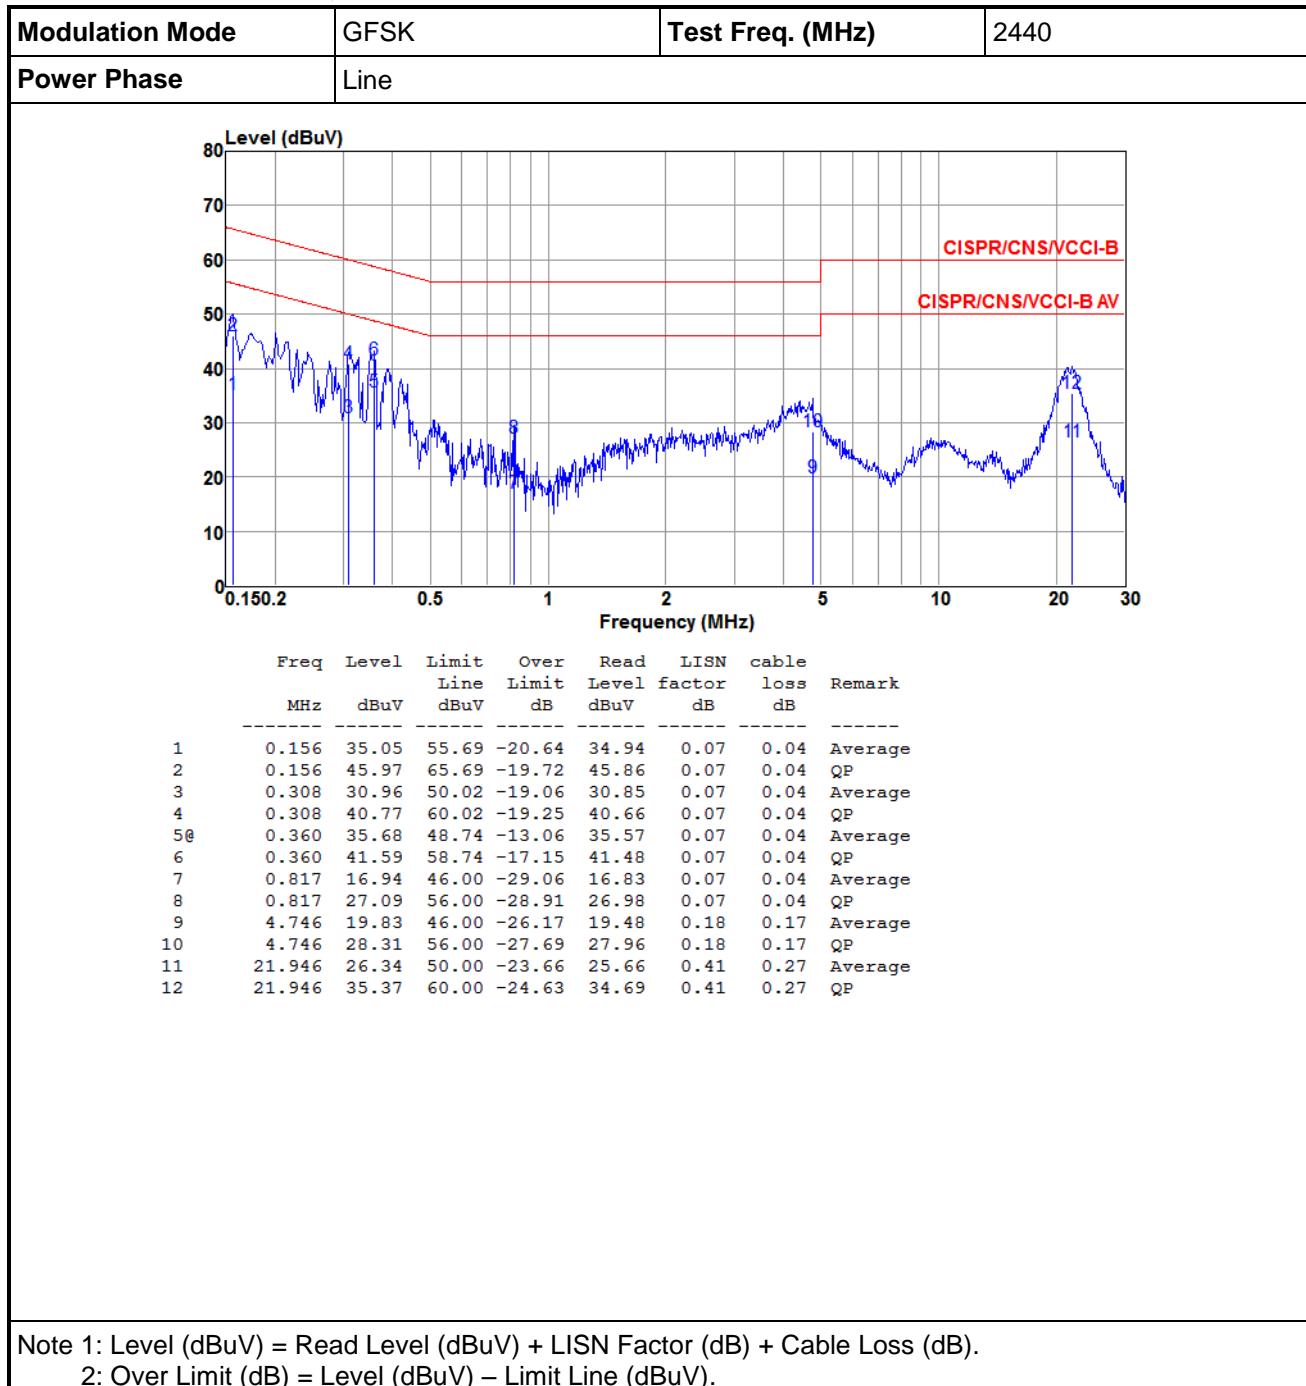


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

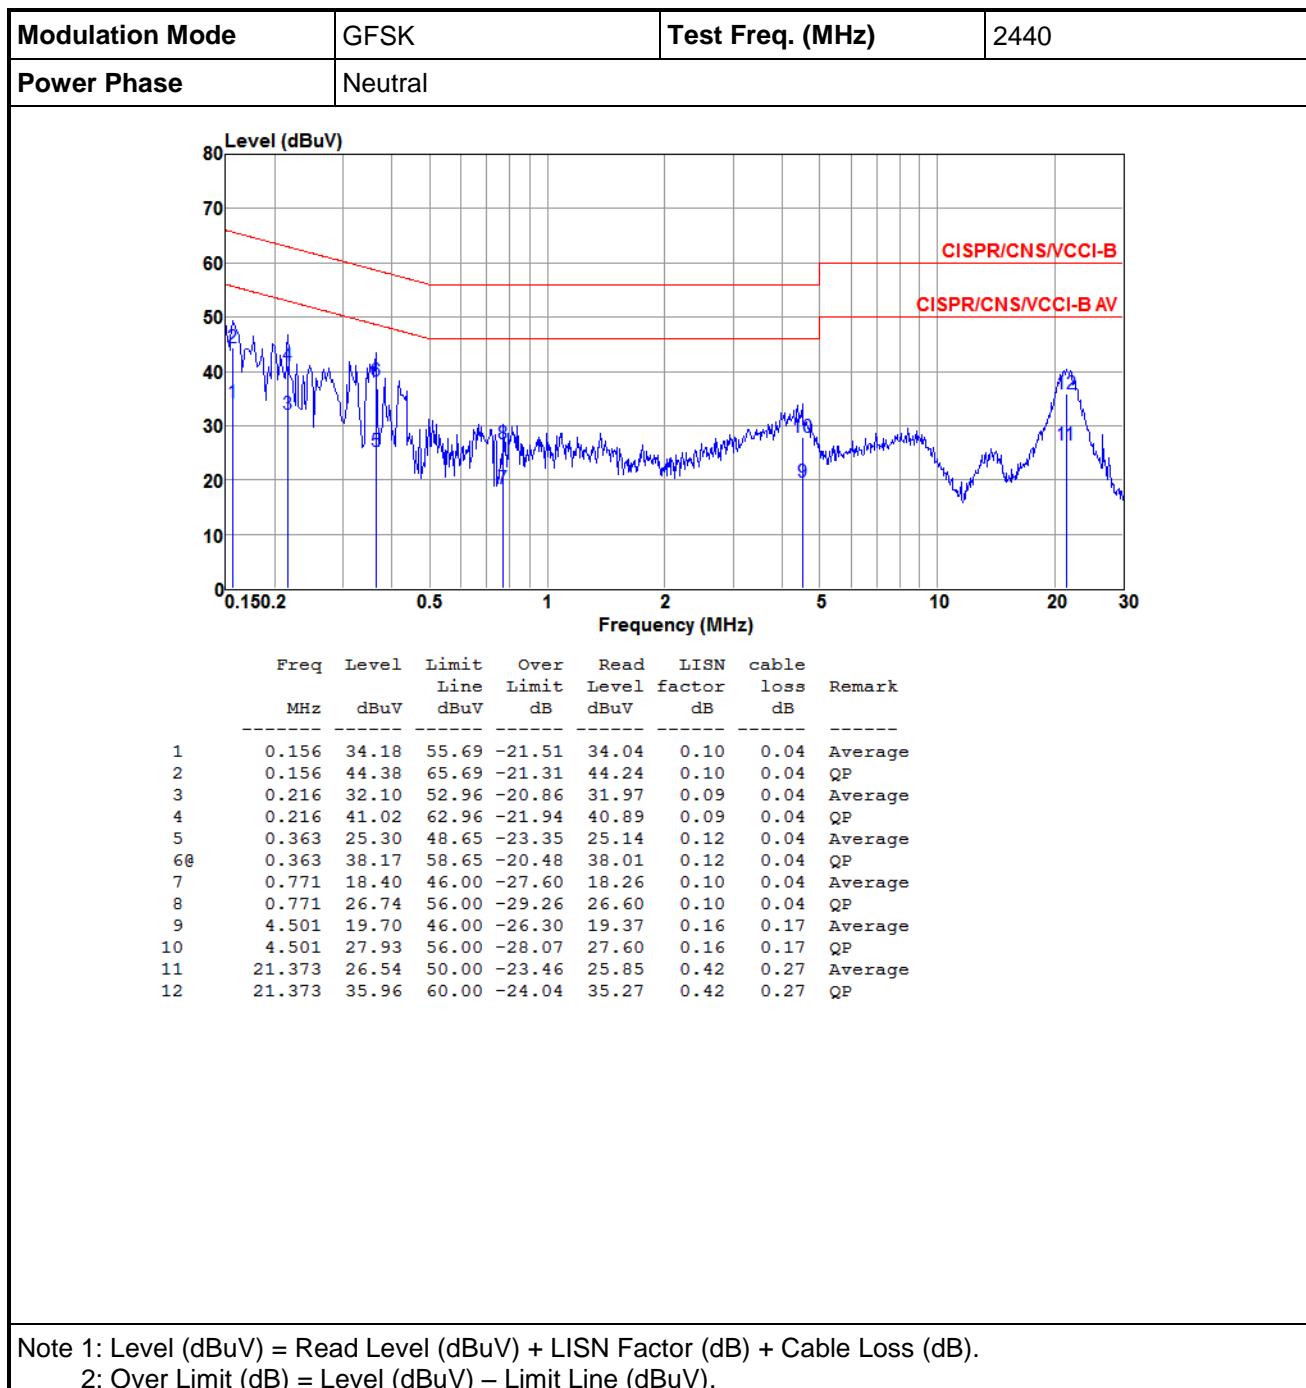


Model Name: Amulet 756Q

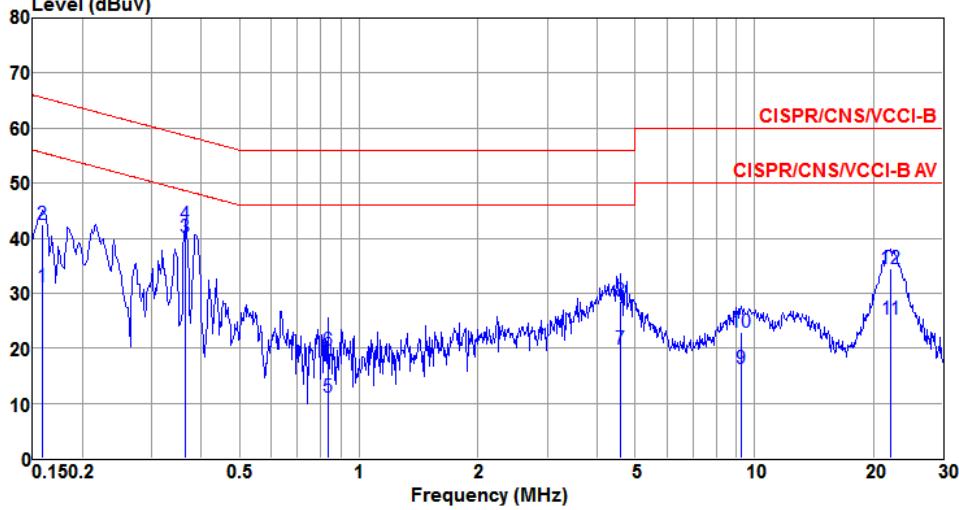Modulation Mode	GFSK	Test Freq. (MHz)	2440
Power Phase	Line		
			
Freq	Level	Limit	Over
MHz	dBuV	Line dBuV	Limit dB
Read	LISN Level dBuV	cable factor dB	loss dB
1	0.159	31.15	55.52 -24.37
2	0.159	42.51	65.52 -23.01
3@	0.365	40.23	48.61 -8.38
4	0.365	42.56	58.61 -16.05
5	0.835	11.11	46.00 -34.89
6	0.835	19.50	56.00 -36.50
7	4.598	19.76	46.00 -26.24
8	4.598	28.60	56.00 -27.40
9	9.253	16.26	50.00 -33.74
10	9.253	22.79	60.00 -37.21
11	22.180	25.23	50.00 -24.77
12	22.180	34.36	60.00 -25.64

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

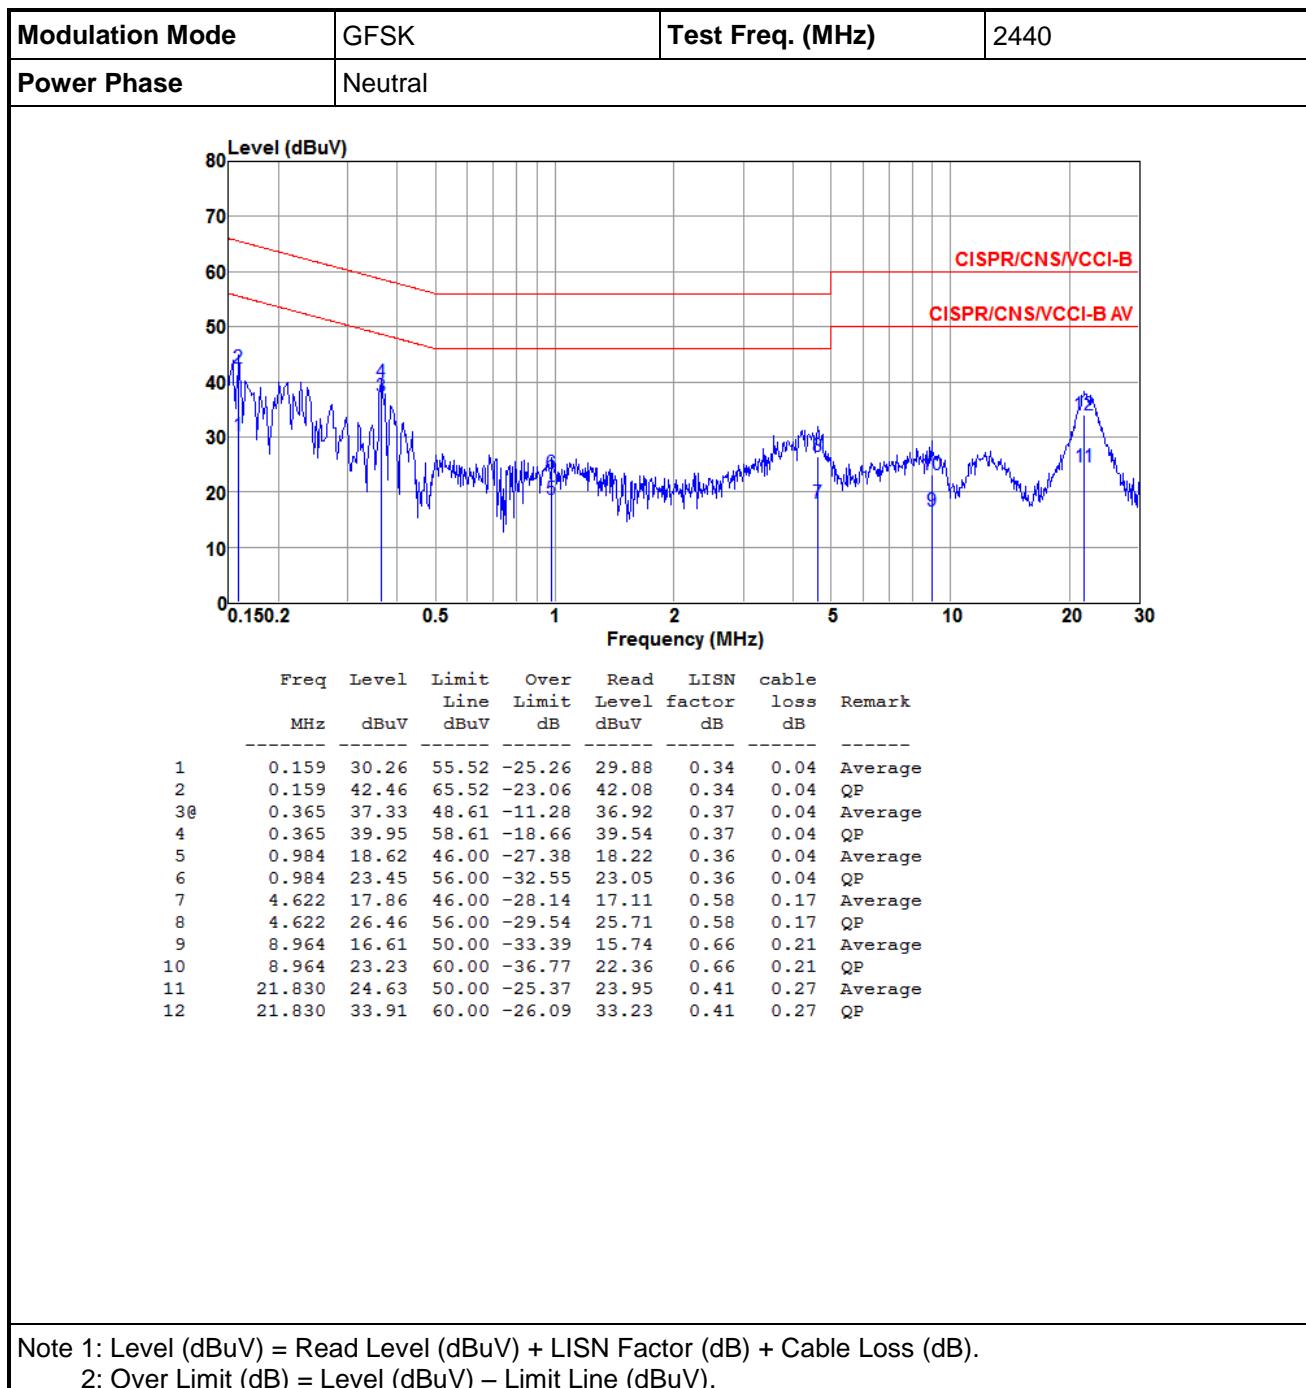

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 30 kHz, Video bandwidth = 100 kHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup

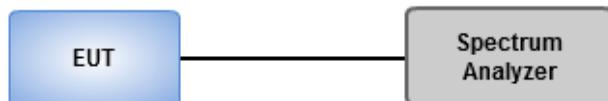

3.2.4 Test Result of 6dB and Occupied Bandwidth

Mode	Freq. (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit of 6dB Bandwidth (kHz)
BT LE	2402	0.722	1.04	500
BT LE	2440	0.717	1.03	500
BT LE	2480	0.726	1.04	500

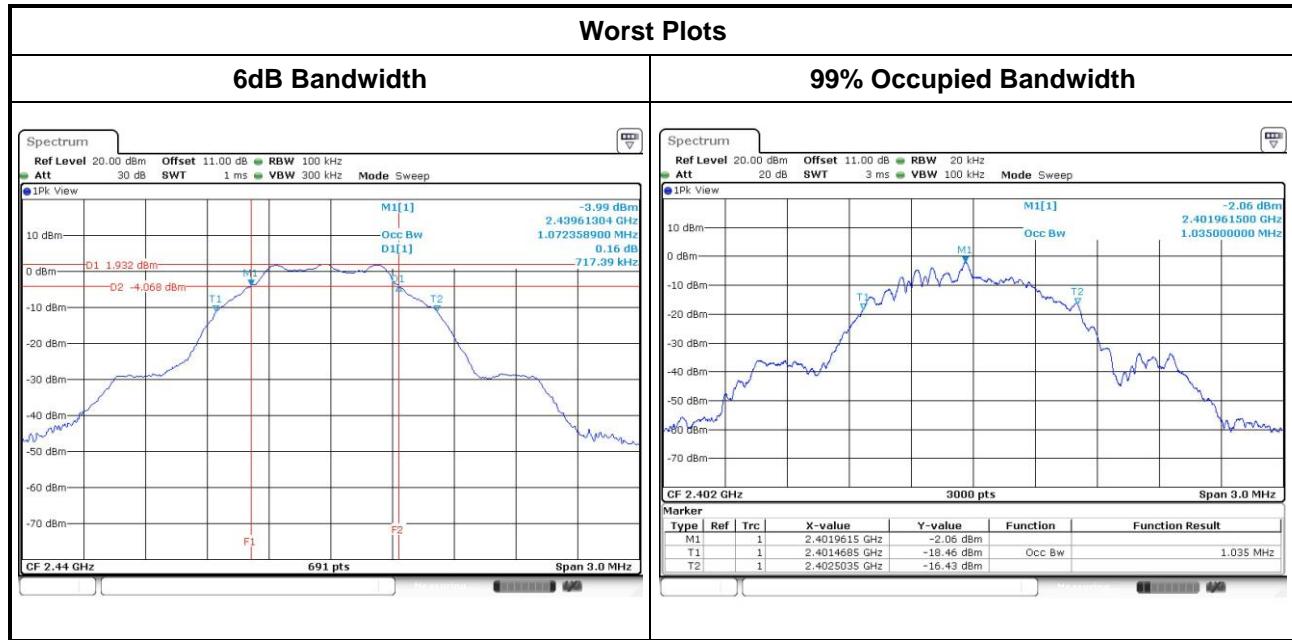

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain > 6dBi
 - Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Average Output Power (For reference only)
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Mode	Freq. (MHz)	Peak Power			Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
		Power (mW)	Power (dBm)	Limit (dBm)			
BT LE	2402	2.213095	3.45	30	1.8	5.25	36
BT LE	2440	2.449063	3.89	30	1.8	5.69	36
BT LE	2480	2.371374	3.75	30	1.8	5.55	36

Mode	Freq. (MHz)	AV Power (mW)	AV Power (dBm)	Limit (dBm)
BT LE	2402	2.070141	3.16	---
BT LE	2440	2.243882	3.51	---
BT LE	2480	2.228435	3.48	---

Note: Average power is for reference only

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures


- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 100kHz, VBW = 300 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 4. Perform the measurement over a single sweep.
 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup

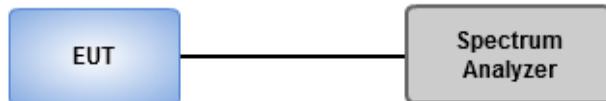

3.4.4 Test Result of Power Spectral Density

Mode	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BT LE	2402	-11.79	8
BT LE	2440	-11.46	8
BT LE	2480	-11.47	8

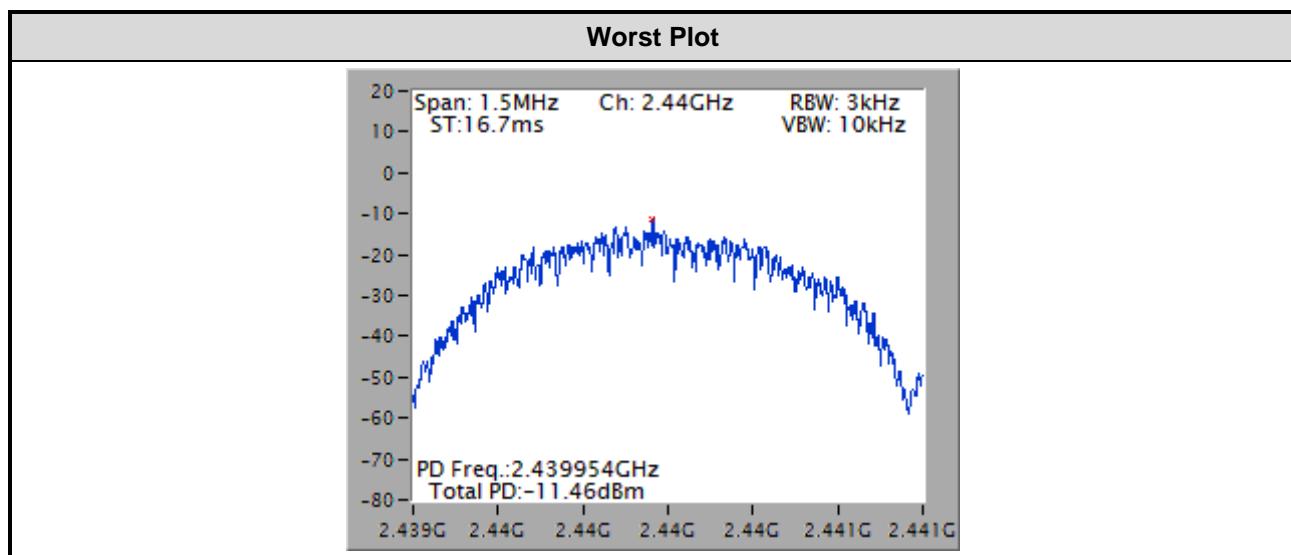

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

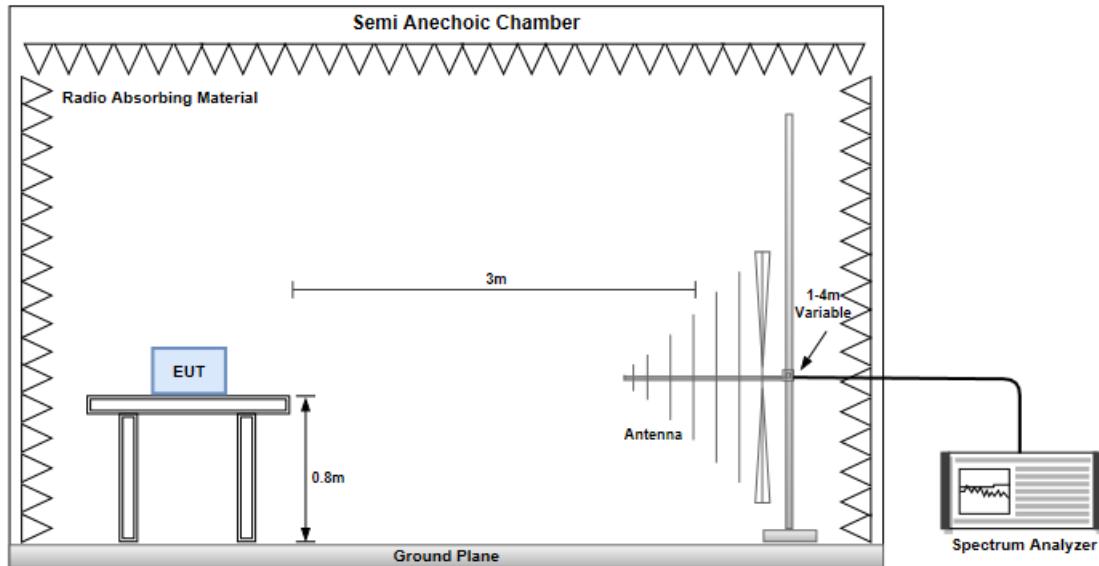



Radiated Emissions above 1 GHz

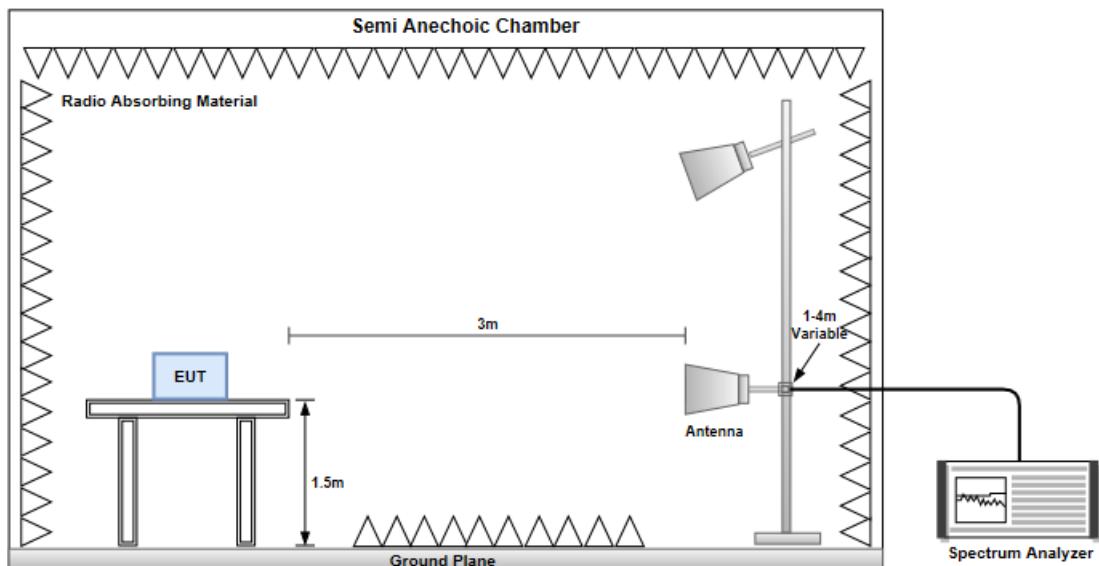

Model Name: Kamai751Q

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

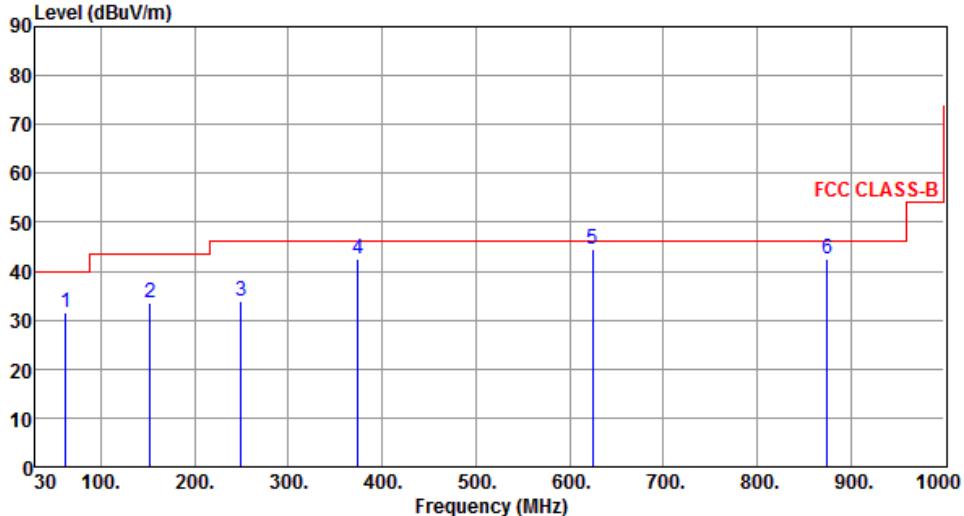Modulation	GFSK	Test Freq. (MHz)	2440																																																																								
Polarization	Horizontal																																																																										
																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>62.36</td> <td>31.55</td> <td>40.00</td> <td>-8.45</td> <td>40.88</td> <td>-9.33</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>152.08</td> <td>33.46</td> <td>43.50</td> <td>-10.04</td> <td>41.95</td> <td>-8.49</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>249.78</td> <td>33.83</td> <td>46.00</td> <td>-12.17</td> <td>43.24</td> <td>-9.41</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>374.64</td> <td>42.49</td> <td>46.00</td> <td>-3.51</td> <td>48.46</td> <td>-5.97</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>625.00</td> <td>44.56</td> <td>46.00</td> <td>-1.44</td> <td>45.18</td> <td>-0.62</td> <td>QP</td> <td>151 32</td> </tr> <tr> <td>6</td> <td>874.58</td> <td>42.38</td> <td>46.00</td> <td>-3.62</td> <td>38.85</td> <td>3.53</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB				1	62.36	31.55	40.00	-8.45	40.88	-9.33	Peak	---	2	152.08	33.46	43.50	-10.04	41.95	-8.49	Peak	---	3	249.78	33.83	46.00	-12.17	43.24	-9.41	Peak	---	4	374.64	42.49	46.00	-3.51	48.46	-5.97	Peak	---	5	625.00	44.56	46.00	-1.44	45.18	-0.62	QP	151 32	6	874.58	42.38	46.00	-3.62	38.85	3.53	Peak	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																			
MHz	level	dBuV/m	dB	reading	dB																																																																						
1	62.36	31.55	40.00	-8.45	40.88	-9.33	Peak	---																																																																			
2	152.08	33.46	43.50	-10.04	41.95	-8.49	Peak	---																																																																			
3	249.78	33.83	46.00	-12.17	43.24	-9.41	Peak	---																																																																			
4	374.64	42.49	46.00	-3.51	48.46	-5.97	Peak	---																																																																			
5	625.00	44.56	46.00	-1.44	45.18	-0.62	QP	151 32																																																																			
6	874.58	42.38	46.00	-3.62	38.85	3.53	Peak	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																											

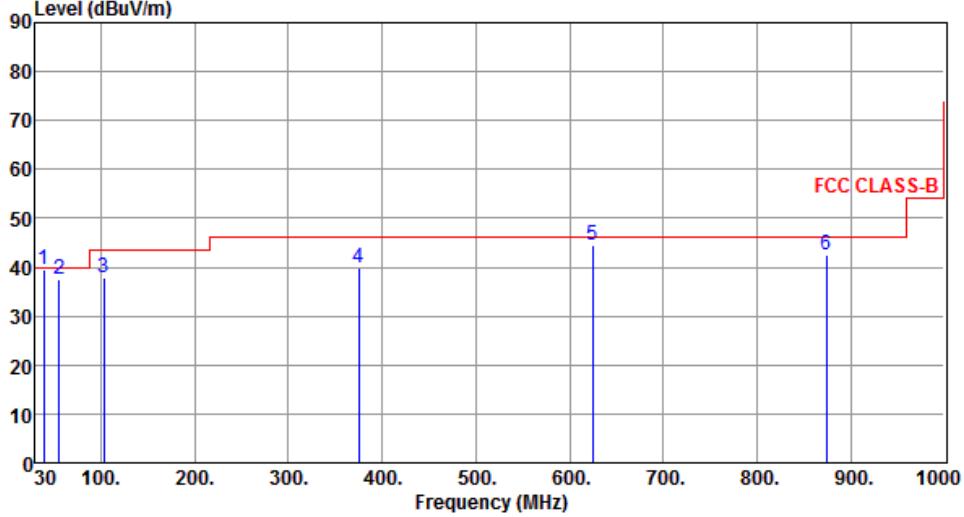Modulation	GFSK	Test Freq. (MHz)	2440																																																																																							
Polarization	Vertical																																																																																									
																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">level</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th style="text-align: left;"> </th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;"> </th> <th style="text-align: left;">dB</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;"> </th> <th style="text-align: left;"> </th> <th style="text-align: left;">cm</th> <th style="text-align: left;">deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>38.77</td> <td>39.39</td> <td>40.00</td> <td>-0.61</td> <td>48.23</td> <td>-8.84</td> <td>QP</td> <td>100</td> <td>77</td> </tr> <tr> <td>2</td> <td>55.59</td> <td>37.47</td> <td>40.00</td> <td>-2.53</td> <td>46.06</td> <td>-8.59</td> <td>QP</td> <td>100</td> <td>31</td> </tr> <tr> <td>3</td> <td>102.85</td> <td>37.82</td> <td>43.50</td> <td>-5.68</td> <td>50.88</td> <td>-13.06</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>374.96</td> <td>39.82</td> <td>46.00</td> <td>-6.18</td> <td>45.78</td> <td>-5.96</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>625.00</td> <td>44.38</td> <td>46.00</td> <td>-1.62</td> <td>45.00</td> <td>-0.62</td> <td>QP</td> <td>100</td> <td>334</td> </tr> <tr> <td>6</td> <td>874.25</td> <td>42.66</td> <td>46.00</td> <td>-3.34</td> <td>39.13</td> <td>3.53</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	level	level	dBuV/m	dBuV/m	reading	dB		High	Table	MHz	dBuV/m		dB	dBuV			cm	deg	1	38.77	39.39	40.00	-0.61	48.23	-8.84	QP	100	77	2	55.59	37.47	40.00	-2.53	46.06	-8.59	QP	100	31	3	102.85	37.82	43.50	-5.68	50.88	-13.06	Peak	---	---	4	374.96	39.82	46.00	-6.18	45.78	-5.96	Peak	---	---	5	625.00	44.38	46.00	-1.62	45.00	-0.62	QP	100	334	6	874.25	42.66	46.00	-3.34	39.13	3.53	Peak	---	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																		
level	level	dBuV/m	dBuV/m	reading	dB		High	Table																																																																																		
MHz	dBuV/m		dB	dBuV			cm	deg																																																																																		
1	38.77	39.39	40.00	-0.61	48.23	-8.84	QP	100	77																																																																																	
2	55.59	37.47	40.00	-2.53	46.06	-8.59	QP	100	31																																																																																	
3	102.85	37.82	43.50	-5.68	50.88	-13.06	Peak	---	---																																																																																	
4	374.96	39.82	46.00	-6.18	45.78	-5.96	Peak	---	---																																																																																	
5	625.00	44.38	46.00	-1.62	45.00	-0.62	QP	100	334																																																																																	
6	874.25	42.66	46.00	-3.34	39.13	3.53	Peak	---	---																																																																																	


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

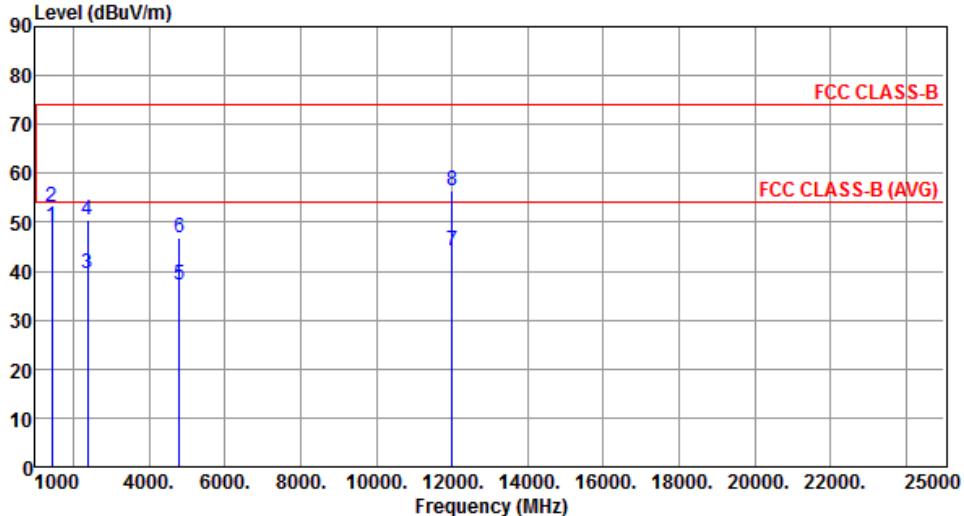
Modulation	GFSK	Test Freq. (MHz)	2402																																																																																																		
Polarization	Horizontal																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">49.13</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-4.87</td> <td style="text-align: left;">54.66</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">117</td> <td style="text-align: left;">298</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">53.03</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-20.97</td> <td style="text-align: left;">58.56</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">117</td> <td style="text-align: left;">298</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">39.57</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.43</td> <td style="text-align: left;">41.69</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">145</td> <td style="text-align: left;">336</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">50.60</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.40</td> <td style="text-align: left;">52.72</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">145</td> <td style="text-align: left;">336</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">4804.00</td> <td style="text-align: left;">37.30</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-16.70</td> <td style="text-align: left;">32.87</td> <td style="text-align: left;">4.43</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">259</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">4804.00</td> <td style="text-align: left;">46.69</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-27.31</td> <td style="text-align: left;">42.26</td> <td style="text-align: left;">4.43</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">259</td> </tr> <tr> <td style="text-align: left;">7</td> <td style="text-align: left;">12010.00</td> <td style="text-align: left;">44.25</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-9.75</td> <td style="text-align: left;">30.51</td> <td style="text-align: left;">13.74</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">157</td> </tr> <tr> <td style="text-align: left;">8</td> <td style="text-align: left;">12010.00</td> <td style="text-align: left;">56.44</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-17.56</td> <td style="text-align: left;">42.70</td> <td style="text-align: left;">13.74</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">157</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dBuV	Factor	High	Table	1	1445.00	49.13	54.00	-4.87	54.66	-5.53	Average	117	298	2	1445.00	53.03	74.00	-20.97	58.56	-5.53	Peak	117	298	3	2390.00	39.57	54.00	-14.43	41.69	-2.12	Average	145	336	4	2390.00	50.60	74.00	-23.40	52.72	-2.12	Peak	145	336	5	4804.00	37.30	54.00	-16.70	32.87	4.43	Average	100	259	6	4804.00	46.69	74.00	-27.31	42.26	4.43	Peak	100	259	7	12010.00	44.25	54.00	-9.75	30.51	13.74	Average	100	157	8	12010.00	56.44	74.00	-17.56	42.70	13.74	Peak	100	157
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dBuV	Factor	High	Table																																																																																													
1	1445.00	49.13	54.00	-4.87	54.66	-5.53	Average	117	298																																																																																												
2	1445.00	53.03	74.00	-20.97	58.56	-5.53	Peak	117	298																																																																																												
3	2390.00	39.57	54.00	-14.43	41.69	-2.12	Average	145	336																																																																																												
4	2390.00	50.60	74.00	-23.40	52.72	-2.12	Peak	145	336																																																																																												
5	4804.00	37.30	54.00	-16.70	32.87	4.43	Average	100	259																																																																																												
6	4804.00	46.69	74.00	-27.31	42.26	4.43	Peak	100	259																																																																																												
7	12010.00	44.25	54.00	-9.75	30.51	13.74	Average	100	157																																																																																												
8	12010.00	56.44	74.00	-17.56	42.70	13.74	Peak	100	157																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																					

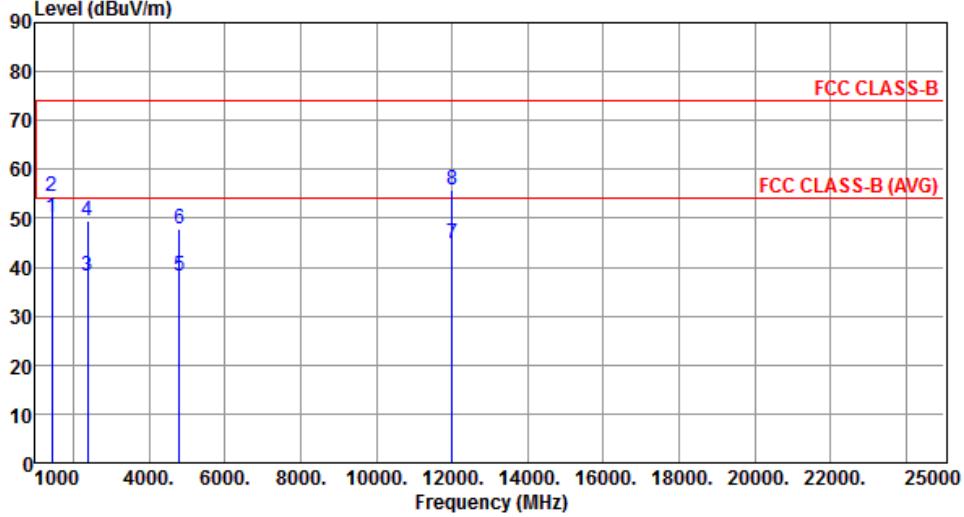Modulation	GFSK		Test Freq. (MHz)	2402																																																																																																			
Polarization	Vertical																																																																																																						
																																																																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>50.29</td> <td>54.00</td> <td>-3.71</td> <td>55.82</td> <td>-5.53</td> <td>Average</td> <td>100</td> <td>275</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>54.30</td> <td>74.00</td> <td>-19.70</td> <td>59.83</td> <td>-5.53</td> <td>Peak</td> <td>100</td> <td>275</td> </tr> <tr> <td>3</td> <td>2390.00</td> <td>38.16</td> <td>54.00</td> <td>-15.84</td> <td>40.28</td> <td>-2.12</td> <td>Average</td> <td>100</td> <td>130</td> </tr> <tr> <td>4</td> <td>2390.00</td> <td>49.54</td> <td>74.00</td> <td>-24.46</td> <td>51.66</td> <td>-2.12</td> <td>Peak</td> <td>100</td> <td>130</td> </tr> <tr> <td>5</td> <td>4804.00</td> <td>38.24</td> <td>54.00</td> <td>-15.76</td> <td>33.81</td> <td>4.43</td> <td>Average</td> <td>100</td> <td>336</td> </tr> <tr> <td>6</td> <td>4804.00</td> <td>47.69</td> <td>74.00</td> <td>-26.31</td> <td>43.26</td> <td>4.43</td> <td>Peak</td> <td>100</td> <td>336</td> </tr> <tr> <td>7</td> <td>12010.00</td> <td>44.98</td> <td>54.00</td> <td>-9.02</td> <td>31.24</td> <td>13.74</td> <td>Average</td> <td>100</td> <td>229</td> </tr> <tr> <td>8</td> <td>12010.00</td> <td>55.92</td> <td>74.00</td> <td>-18.08</td> <td>42.18</td> <td>13.74</td> <td>Peak</td> <td>100</td> <td>229</td> </tr> </tbody> </table>						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dBuV	dB	High	Table	1	1445.00	50.29	54.00	-3.71	55.82	-5.53	Average	100	275	2	1445.00	54.30	74.00	-19.70	59.83	-5.53	Peak	100	275	3	2390.00	38.16	54.00	-15.84	40.28	-2.12	Average	100	130	4	2390.00	49.54	74.00	-24.46	51.66	-2.12	Peak	100	130	5	4804.00	38.24	54.00	-15.76	33.81	4.43	Average	100	336	6	4804.00	47.69	74.00	-26.31	43.26	4.43	Peak	100	336	7	12010.00	44.98	54.00	-9.02	31.24	13.74	Average	100	229	8	12010.00	55.92	74.00	-18.08	42.18	13.74	Peak	100	229
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																															
MHz	level	dBuV/m	dB	reading	dBuV	dB	High	Table																																																																																															
1	1445.00	50.29	54.00	-3.71	55.82	-5.53	Average	100	275																																																																																														
2	1445.00	54.30	74.00	-19.70	59.83	-5.53	Peak	100	275																																																																																														
3	2390.00	38.16	54.00	-15.84	40.28	-2.12	Average	100	130																																																																																														
4	2390.00	49.54	74.00	-24.46	51.66	-2.12	Peak	100	130																																																																																														
5	4804.00	38.24	54.00	-15.76	33.81	4.43	Average	100	336																																																																																														
6	4804.00	47.69	74.00	-26.31	43.26	4.43	Peak	100	336																																																																																														
7	12010.00	44.98	54.00	-9.02	31.24	13.74	Average	100	229																																																																																														
8	12010.00	55.92	74.00	-18.08	42.18	13.74	Peak	100	229																																																																																														

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

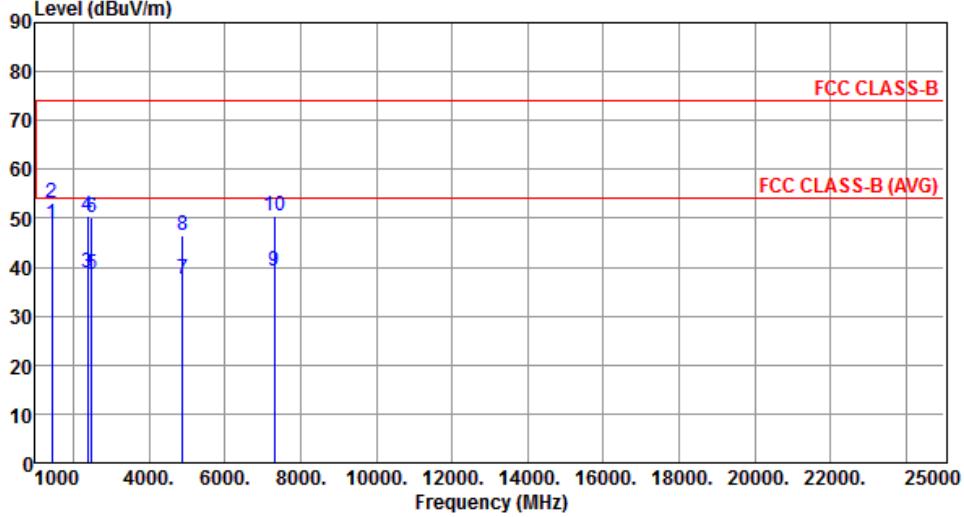Modulation	GFSK	Test Freq. (MHz)	2440																																																																																																																						
Polarization	Horizontal																																																																																																																								
																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>48.86</td> <td>54.00</td> <td>-5.14</td> <td>54.39</td> <td>-5.53</td> <td>Average</td> <td>115</td> <td>297</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>53.08</td> <td>74.00</td> <td>-20.92</td> <td>58.61</td> <td>-5.53</td> <td>Peak</td> <td>115</td> <td>297</td> </tr> <tr> <td>3</td> <td>2390.00</td> <td>38.85</td> <td>54.00</td> <td>-15.15</td> <td>40.97</td> <td>-2.12</td> <td>Average</td> <td>139</td> <td>337</td> </tr> <tr> <td>4</td> <td>2390.00</td> <td>50.38</td> <td>74.00</td> <td>-23.62</td> <td>52.50</td> <td>-2.12</td> <td>Peak</td> <td>139</td> <td>337</td> </tr> <tr> <td>5</td> <td>2483.50</td> <td>38.48</td> <td>54.00</td> <td>-15.52</td> <td>40.25</td> <td>-1.77</td> <td>Average</td> <td>139</td> <td>337</td> </tr> <tr> <td>6</td> <td>2483.50</td> <td>50.22</td> <td>74.00</td> <td>-23.78</td> <td>51.99</td> <td>-1.77</td> <td>Peak</td> <td>139</td> <td>337</td> </tr> <tr> <td>7</td> <td>4880.00</td> <td>37.45</td> <td>54.00</td> <td>-16.55</td> <td>32.86</td> <td>4.59</td> <td>Average</td> <td>100</td> <td>252</td> </tr> <tr> <td>8</td> <td>4880.00</td> <td>46.54</td> <td>74.00</td> <td>-27.46</td> <td>41.95</td> <td>4.59</td> <td>Peak</td> <td>100</td> <td>252</td> </tr> <tr> <td>9</td> <td>7320.00</td> <td>39.16</td> <td>54.00</td> <td>-14.84</td> <td>30.00</td> <td>9.16</td> <td>Average</td> <td>100</td> <td>141</td> </tr> <tr> <td>10</td> <td>7320.00</td> <td>50.56</td> <td>74.00</td> <td>-23.44</td> <td>41.40</td> <td>9.16</td> <td>Peak</td> <td>100</td> <td>141</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	1445.00	48.86	54.00	-5.14	54.39	-5.53	Average	115	297	2	1445.00	53.08	74.00	-20.92	58.61	-5.53	Peak	115	297	3	2390.00	38.85	54.00	-15.15	40.97	-2.12	Average	139	337	4	2390.00	50.38	74.00	-23.62	52.50	-2.12	Peak	139	337	5	2483.50	38.48	54.00	-15.52	40.25	-1.77	Average	139	337	6	2483.50	50.22	74.00	-23.78	51.99	-1.77	Peak	139	337	7	4880.00	37.45	54.00	-16.55	32.86	4.59	Average	100	252	8	4880.00	46.54	74.00	-27.46	41.95	4.59	Peak	100	252	9	7320.00	39.16	54.00	-14.84	30.00	9.16	Average	100	141	10	7320.00	50.56	74.00	-23.44	41.40	9.16	Peak	100	141
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																	
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																																																	
1	1445.00	48.86	54.00	-5.14	54.39	-5.53	Average	115	297																																																																																																																
2	1445.00	53.08	74.00	-20.92	58.61	-5.53	Peak	115	297																																																																																																																
3	2390.00	38.85	54.00	-15.15	40.97	-2.12	Average	139	337																																																																																																																
4	2390.00	50.38	74.00	-23.62	52.50	-2.12	Peak	139	337																																																																																																																
5	2483.50	38.48	54.00	-15.52	40.25	-1.77	Average	139	337																																																																																																																
6	2483.50	50.22	74.00	-23.78	51.99	-1.77	Peak	139	337																																																																																																																
7	4880.00	37.45	54.00	-16.55	32.86	4.59	Average	100	252																																																																																																																
8	4880.00	46.54	74.00	-27.46	41.95	4.59	Peak	100	252																																																																																																																
9	7320.00	39.16	54.00	-14.84	30.00	9.16	Average	100	141																																																																																																																
10	7320.00	50.56	74.00	-23.44	41.40	9.16	Peak	100	141																																																																																																																

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

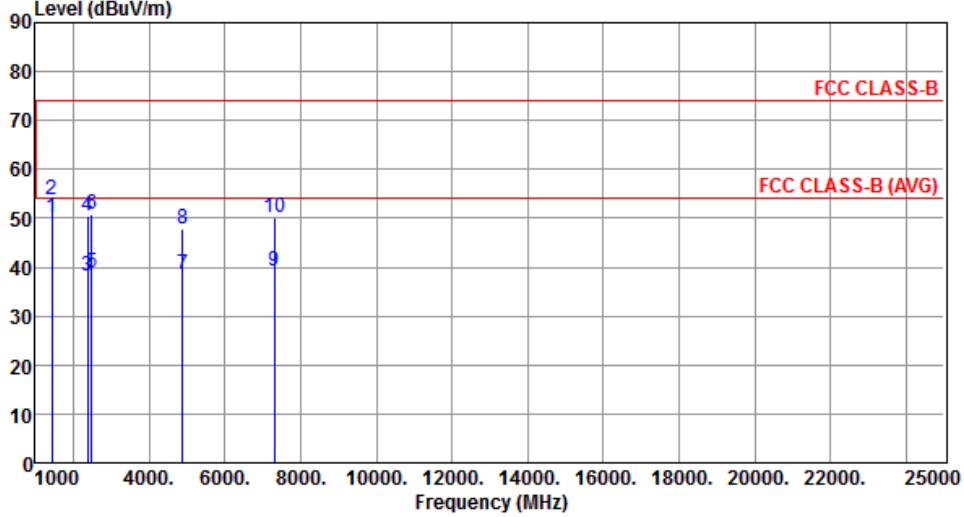
Modulation	GFSK		Test Freq. (MHz)	2440																																																																																																																							
Polarization	Vertical																																																																																																																										
																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBiV</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">50.17</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-3.83</td> <td style="text-align: left;">55.70</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">277</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">53.85</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-20.15</td> <td style="text-align: left;">59.38</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">277</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">38.29</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-15.71</td> <td style="text-align: left;">40.41</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">110</td> <td style="text-align: left;">144</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">50.41</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.59</td> <td style="text-align: left;">52.53</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">110</td> <td style="text-align: left;">144</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">38.91</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-15.09</td> <td style="text-align: left;">40.68</td> <td style="text-align: left;">-1.77</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">110</td> <td style="text-align: left;">144</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">50.82</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.18</td> <td style="text-align: left;">52.59</td> <td style="text-align: left;">-1.77</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">110</td> <td style="text-align: left;">144</td> </tr> <tr> <td style="text-align: left;">7</td> <td style="text-align: left;">4880.00</td> <td style="text-align: left;">38.42</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-15.58</td> <td style="text-align: left;">33.83</td> <td style="text-align: left;">4.59</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">331</td> </tr> <tr> <td style="text-align: left;">8</td> <td style="text-align: left;">4880.00</td> <td style="text-align: left;">47.83</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-26.17</td> <td style="text-align: left;">43.24</td> <td style="text-align: left;">4.59</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">331</td> </tr> <tr> <td style="text-align: left;">9</td> <td style="text-align: left;">7320.00</td> <td style="text-align: left;">39.24</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.76</td> <td style="text-align: left;">30.08</td> <td style="text-align: left;">9.16</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">215</td> </tr> <tr> <td style="text-align: left;">10</td> <td style="text-align: left;">7320.00</td> <td style="text-align: left;">50.15</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.85</td> <td style="text-align: left;">40.99</td> <td style="text-align: left;">9.16</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">215</td> </tr> </tbody> </table>						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	High	Table	1	1445.00	50.17	54.00	-3.83	55.70	-5.53	Average	100	277	2	1445.00	53.85	74.00	-20.15	59.38	-5.53	Peak	100	277	3	2390.00	38.29	54.00	-15.71	40.41	-2.12	Average	110	144	4	2390.00	50.41	74.00	-23.59	52.53	-2.12	Peak	110	144	5	2483.50	38.91	54.00	-15.09	40.68	-1.77	Average	110	144	6	2483.50	50.82	74.00	-23.18	52.59	-1.77	Peak	110	144	7	4880.00	38.42	54.00	-15.58	33.83	4.59	Average	100	331	8	4880.00	47.83	74.00	-26.17	43.24	4.59	Peak	100	331	9	7320.00	39.24	54.00	-14.76	30.08	9.16	Average	100	215	10	7320.00	50.15	74.00	-23.85	40.99	9.16	Peak	100	215
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																			
MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	High	Table																																																																																																																			
1	1445.00	50.17	54.00	-3.83	55.70	-5.53	Average	100	277																																																																																																																		
2	1445.00	53.85	74.00	-20.15	59.38	-5.53	Peak	100	277																																																																																																																		
3	2390.00	38.29	54.00	-15.71	40.41	-2.12	Average	110	144																																																																																																																		
4	2390.00	50.41	74.00	-23.59	52.53	-2.12	Peak	110	144																																																																																																																		
5	2483.50	38.91	54.00	-15.09	40.68	-1.77	Average	110	144																																																																																																																		
6	2483.50	50.82	74.00	-23.18	52.59	-1.77	Peak	110	144																																																																																																																		
7	4880.00	38.42	54.00	-15.58	33.83	4.59	Average	100	331																																																																																																																		
8	4880.00	47.83	74.00	-26.17	43.24	4.59	Peak	100	331																																																																																																																		
9	7320.00	39.24	54.00	-14.76	30.08	9.16	Average	100	215																																																																																																																		
10	7320.00	50.15	74.00	-23.85	40.99	9.16	Peak	100	215																																																																																																																		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

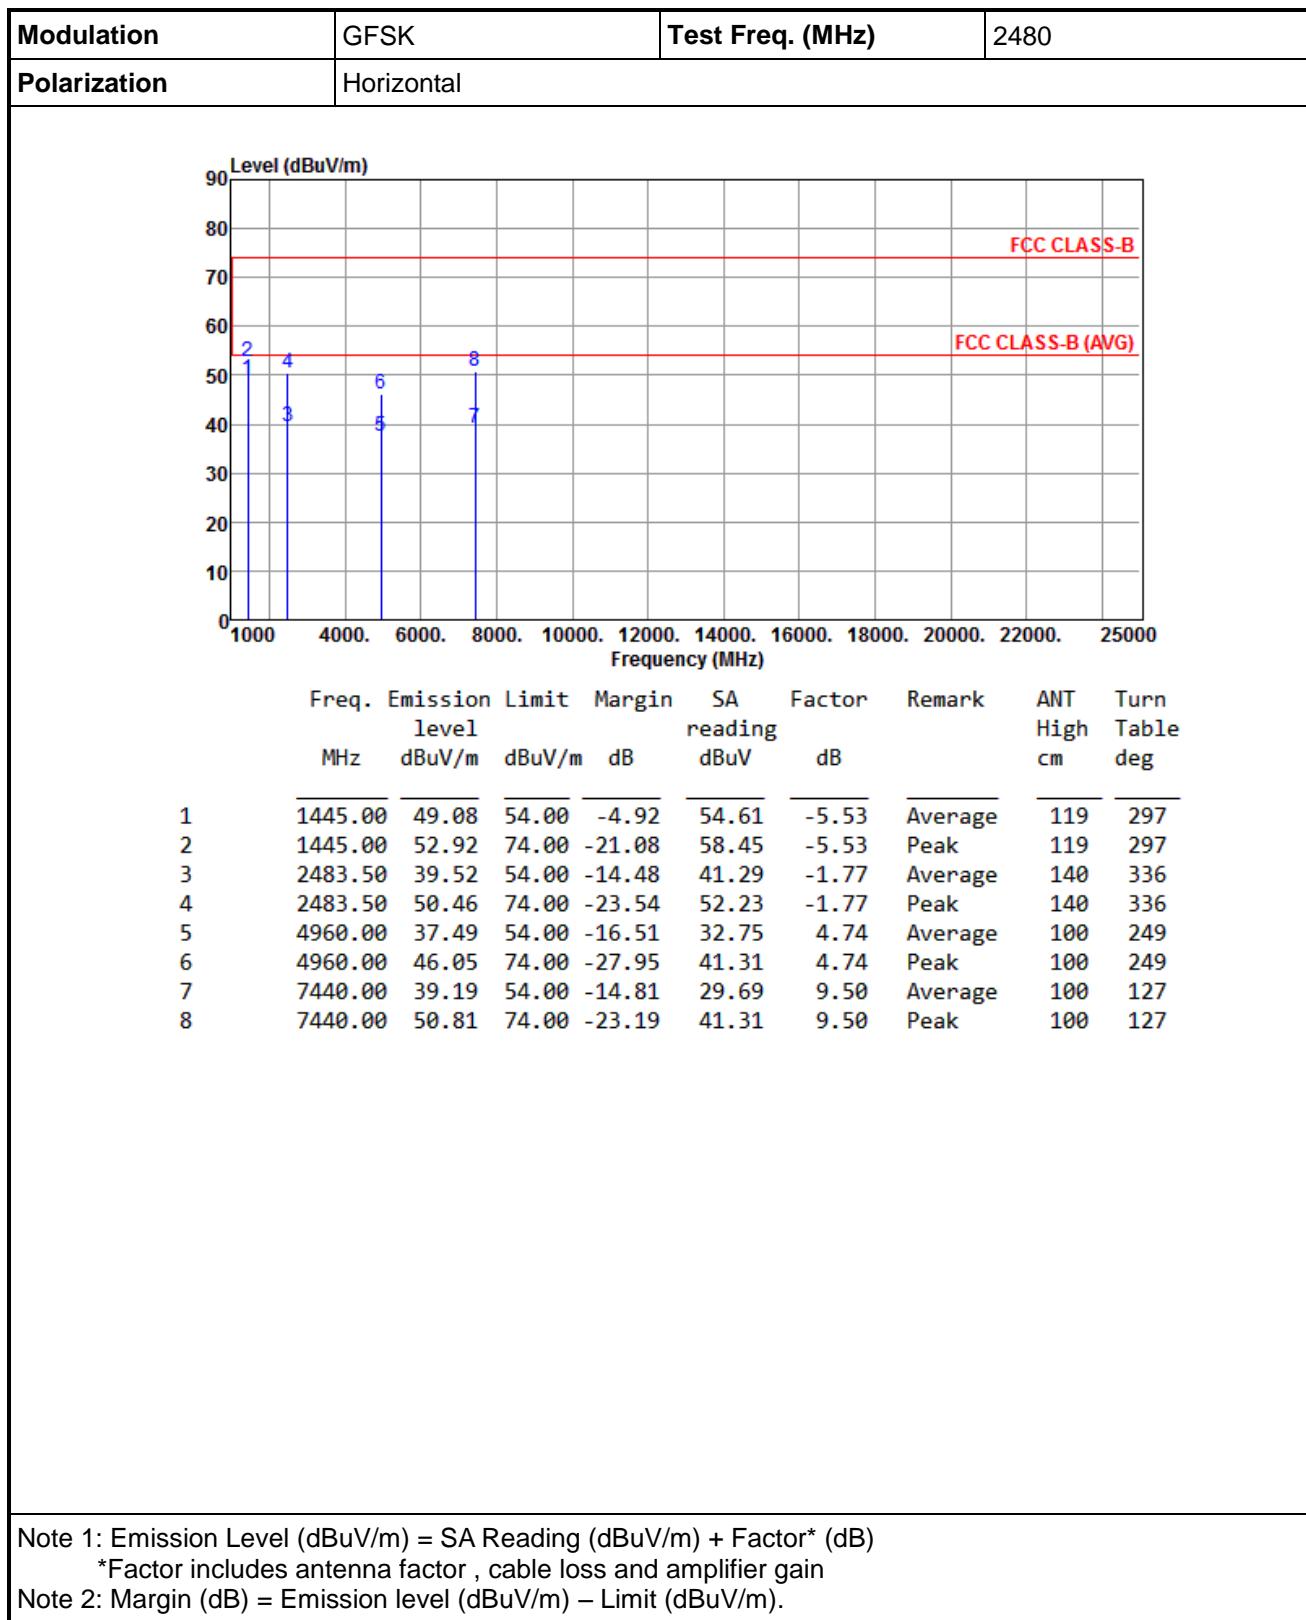

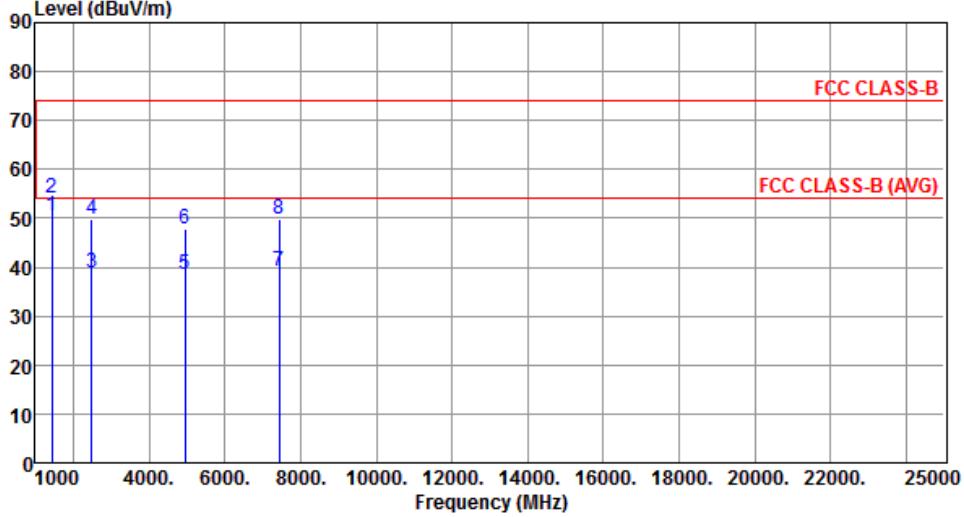
Modulation	GFSK	Test Freq. (MHz)	2480																																																																																																		
Polarization	Vertical																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>50.36</td> <td>54.00</td> <td>-3.64</td> <td>55.89</td> <td>-5.53</td> <td>Average</td> <td>100</td> <td>275</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>54.02</td> <td>74.00</td> <td>-19.98</td> <td>59.55</td> <td>-5.53</td> <td>Peak</td> <td>100</td> <td>275</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>38.77</td> <td>54.00</td> <td>-15.23</td> <td>40.54</td> <td>-1.77</td> <td>Average</td> <td>100</td> <td>146</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>51.58</td> <td>-1.77</td> <td>Peak</td> <td>100</td> <td>146</td> </tr> <tr> <td>5</td> <td>4960.00</td> <td>38.60</td> <td>54.00</td> <td>-15.40</td> <td>33.86</td> <td>4.74</td> <td>Average</td> <td>100</td> <td>342</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>47.78</td> <td>74.00</td> <td>-26.22</td> <td>43.04</td> <td>4.74</td> <td>Peak</td> <td>100</td> <td>342</td> </tr> <tr> <td>7</td> <td>7440.00</td> <td>39.14</td> <td>54.00</td> <td>-14.86</td> <td>29.64</td> <td>9.50</td> <td>Average</td> <td>100</td> <td>230</td> </tr> <tr> <td>8</td> <td>7440.00</td> <td>49.97</td> <td>74.00</td> <td>-24.03</td> <td>40.47</td> <td>9.50</td> <td>Peak</td> <td>100</td> <td>230</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	1445.00	50.36	54.00	-3.64	55.89	-5.53	Average	100	275	2	1445.00	54.02	74.00	-19.98	59.55	-5.53	Peak	100	275	3	2483.50	38.77	54.00	-15.23	40.54	-1.77	Average	100	146	4	2483.50	49.81	74.00	-24.19	51.58	-1.77	Peak	100	146	5	4960.00	38.60	54.00	-15.40	33.86	4.74	Average	100	342	6	4960.00	47.78	74.00	-26.22	43.04	4.74	Peak	100	342	7	7440.00	39.14	54.00	-14.86	29.64	9.50	Average	100	230	8	7440.00	49.97	74.00	-24.03	40.47	9.50	Peak	100	230
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																													
1	1445.00	50.36	54.00	-3.64	55.89	-5.53	Average	100	275																																																																																												
2	1445.00	54.02	74.00	-19.98	59.55	-5.53	Peak	100	275																																																																																												
3	2483.50	38.77	54.00	-15.23	40.54	-1.77	Average	100	146																																																																																												
4	2483.50	49.81	74.00	-24.19	51.58	-1.77	Peak	100	146																																																																																												
5	4960.00	38.60	54.00	-15.40	33.86	4.74	Average	100	342																																																																																												
6	4960.00	47.78	74.00	-26.22	43.04	4.74	Peak	100	342																																																																																												
7	7440.00	39.14	54.00	-14.86	29.64	9.50	Average	100	230																																																																																												
8	7440.00	49.97	74.00	-24.03	40.47	9.50	Peak	100	230																																																																																												


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Model Name: Amulet 756Q
3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

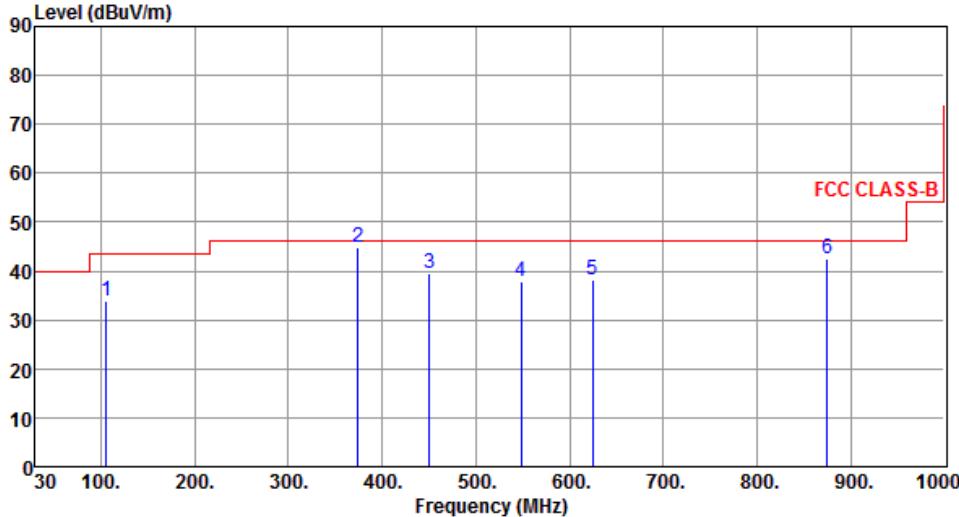Modulation	GFSK	Test Freq. (MHz)	2440																																																																								
Polarization	Horizontal																																																																										
																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBiV</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">105.51</td> <td style="text-align: left;">33.75</td> <td style="text-align: left;">43.50</td> <td style="text-align: left;">-9.75</td> <td style="text-align: left;">46.34</td> <td style="text-align: left;">-12.59</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">374.63</td> <td style="text-align: left;">44.97</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-1.03</td> <td style="text-align: left;">50.94</td> <td style="text-align: left;">-5.97</td> <td style="text-align: left;">QP</td> <td style="text-align: left;">100</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">450.71</td> <td style="text-align: left;">39.45</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-6.55</td> <td style="text-align: left;">43.39</td> <td style="text-align: left;">-3.94</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">548.33</td> <td style="text-align: left;">37.85</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-8.15</td> <td style="text-align: left;">40.10</td> <td style="text-align: left;">-2.25</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">624.66</td> <td style="text-align: left;">38.27</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-7.73</td> <td style="text-align: left;">38.89</td> <td style="text-align: left;">-0.62</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">874.52</td> <td style="text-align: left;">42.38</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-3.62</td> <td style="text-align: left;">38.85</td> <td style="text-align: left;">3.53</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dBiV	dB	High	Table	1	105.51	33.75	43.50	-9.75	46.34	-12.59	Peak	---	2	374.63	44.97	46.00	-1.03	50.94	-5.97	QP	100	3	450.71	39.45	46.00	-6.55	43.39	-3.94	Peak	---	4	548.33	37.85	46.00	-8.15	40.10	-2.25	Peak	---	5	624.66	38.27	46.00	-7.73	38.89	-0.62	Peak	---	6	874.52	42.38	46.00	-3.62	38.85	3.53	Peak	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																			
MHz	level	dBuV/m	dB	reading	dBiV	dB	High	Table																																																																			
1	105.51	33.75	43.50	-9.75	46.34	-12.59	Peak	---																																																																			
2	374.63	44.97	46.00	-1.03	50.94	-5.97	QP	100																																																																			
3	450.71	39.45	46.00	-6.55	43.39	-3.94	Peak	---																																																																			
4	548.33	37.85	46.00	-8.15	40.10	-2.25	Peak	---																																																																			
5	624.66	38.27	46.00	-7.73	38.89	-0.62	Peak	---																																																																			
6	874.52	42.38	46.00	-3.62	38.85	3.53	Peak	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																											

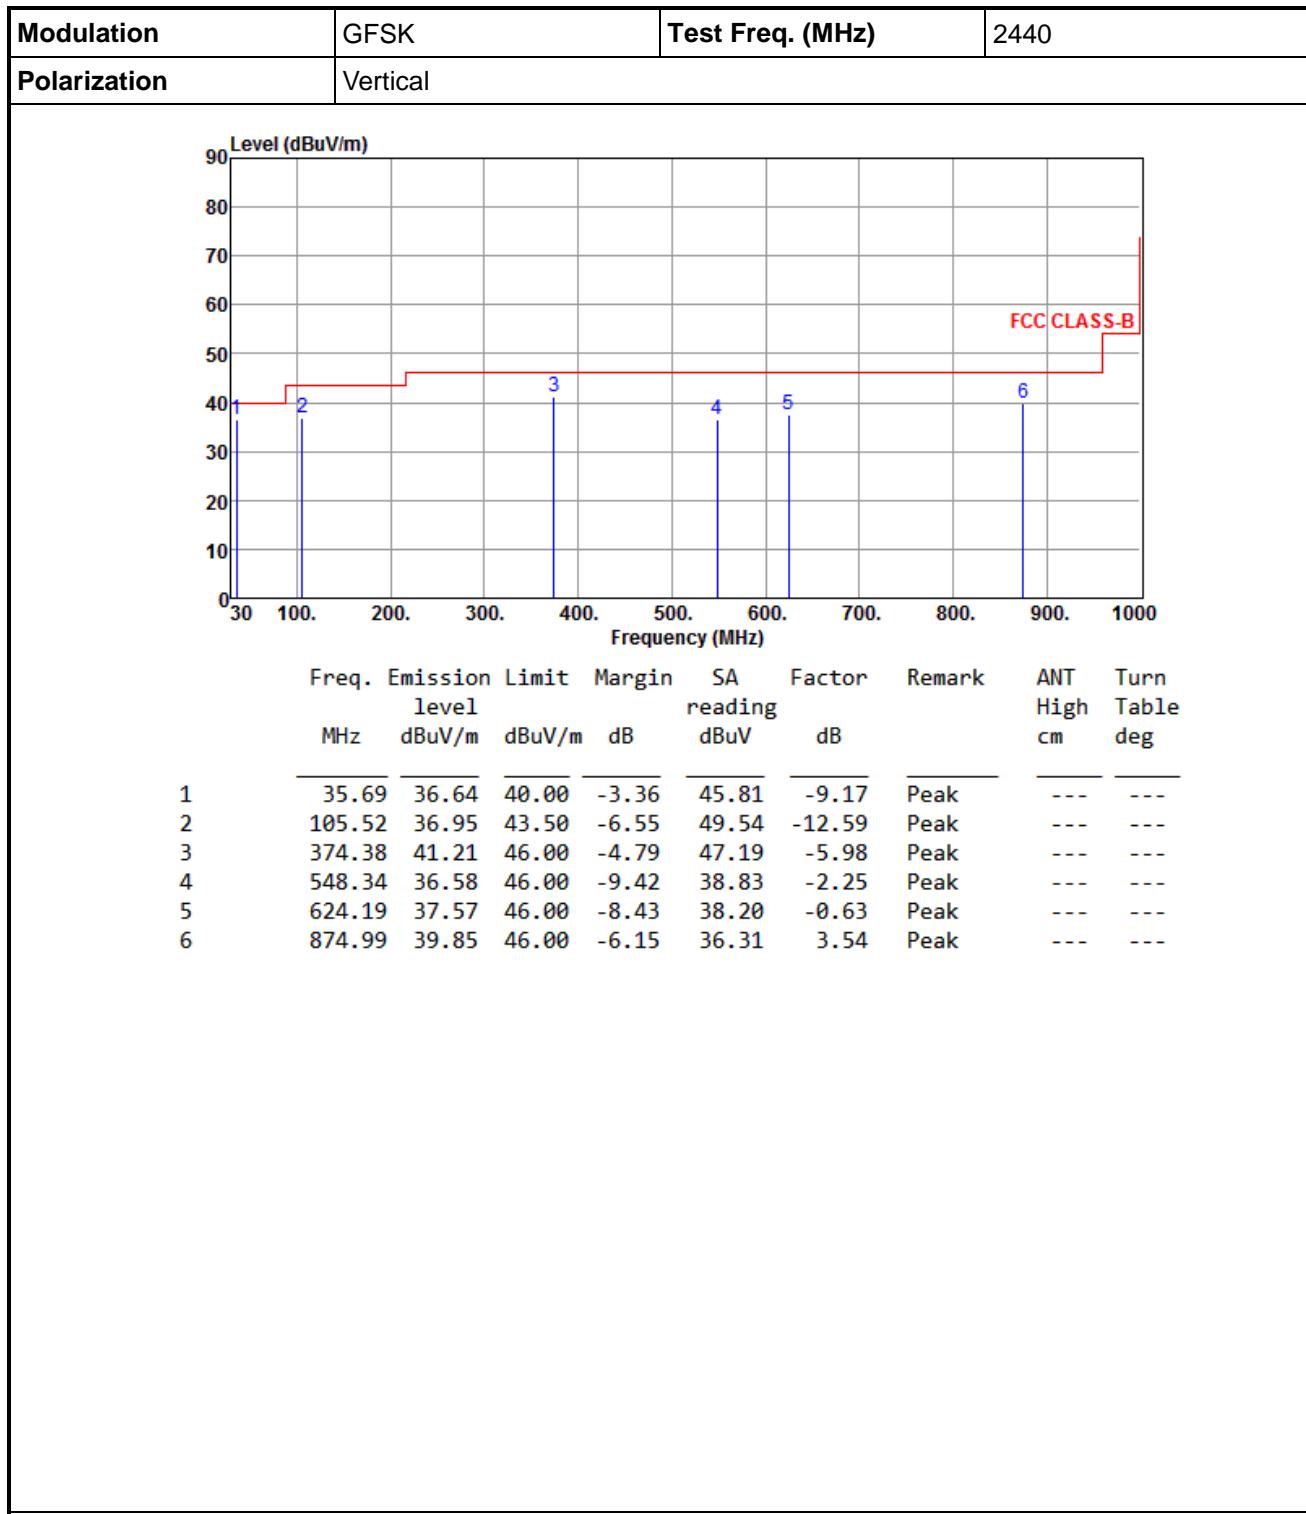


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

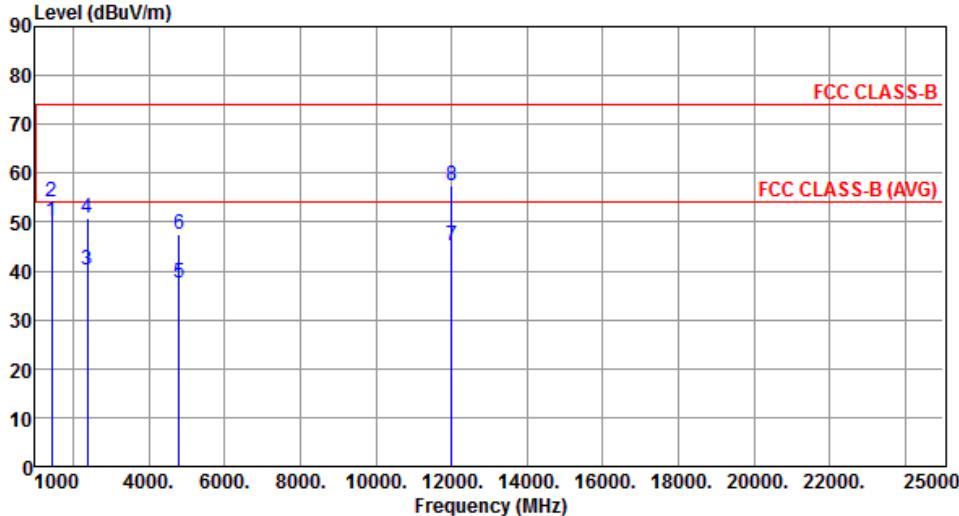
Modulation	GFSK	Test Freq. (MHz)	2402																																																																																																		
Polarization	Horizontal																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="padding-top: 2px;">1</td> <td style="padding-top: 2px;">1445.00</td> <td style="padding-top: 2px;">50.22</td> <td style="padding-top: 2px;">54.00</td> <td style="padding-top: 2px;">-3.78</td> <td style="padding-top: 2px;">55.75</td> <td style="padding-top: 2px;">-5.53</td> <td style="padding-top: 2px;">Average</td> <td style="padding-top: 2px;">119</td> <td style="padding-top: 2px;">300</td> </tr> <tr> <td style="padding-top: 2px;">2</td> <td style="padding-top: 2px;">1445.00</td> <td style="padding-top: 2px;">54.19</td> <td style="padding-top: 2px;">74.00</td> <td style="padding-top: 2px;">-19.81</td> <td style="padding-top: 2px;">59.72</td> <td style="padding-top: 2px;">-5.53</td> <td style="padding-top: 2px;">Peak</td> <td style="padding-top: 2px;">119</td> <td style="padding-top: 2px;">300</td> </tr> <tr> <td style="padding-top: 2px;">3</td> <td style="padding-top: 2px;">2390.00</td> <td style="padding-top: 2px;">40.06</td> <td style="padding-top: 2px;">54.00</td> <td style="padding-top: 2px;">-13.94</td> <td style="padding-top: 2px;">42.18</td> <td style="padding-top: 2px;">-2.12</td> <td style="padding-top: 2px;">Average</td> <td style="padding-top: 2px;">155</td> <td style="padding-top: 2px;">334</td> </tr> <tr> <td style="padding-top: 2px;">4</td> <td style="padding-top: 2px;">2390.00</td> <td style="padding-top: 2px;">50.89</td> <td style="padding-top: 2px;">74.00</td> <td style="padding-top: 2px;">-23.11</td> <td style="padding-top: 2px;">53.01</td> <td style="padding-top: 2px;">-2.12</td> <td style="padding-top: 2px;">Peak</td> <td style="padding-top: 2px;">155</td> <td style="padding-top: 2px;">334</td> </tr> <tr> <td style="padding-top: 2px;">5</td> <td style="padding-top: 2px;">4804.00</td> <td style="padding-top: 2px;">37.45</td> <td style="padding-top: 2px;">54.00</td> <td style="padding-top: 2px;">-16.55</td> <td style="padding-top: 2px;">33.02</td> <td style="padding-top: 2px;">4.43</td> <td style="padding-top: 2px;">Average</td> <td style="padding-top: 2px;">106</td> <td style="padding-top: 2px;">222</td> </tr> <tr> <td style="padding-top: 2px;">6</td> <td style="padding-top: 2px;">4804.00</td> <td style="padding-top: 2px;">47.52</td> <td style="padding-top: 2px;">74.00</td> <td style="padding-top: 2px;">-26.48</td> <td style="padding-top: 2px;">43.09</td> <td style="padding-top: 2px;">4.43</td> <td style="padding-top: 2px;">Peak</td> <td style="padding-top: 2px;">106</td> <td style="padding-top: 2px;">222</td> </tr> <tr> <td style="padding-top: 2px;">7</td> <td style="padding-top: 2px;">12010.00</td> <td style="padding-top: 2px;">45.11</td> <td style="padding-top: 2px;">54.00</td> <td style="padding-top: 2px;">-8.89</td> <td style="padding-top: 2px;">31.37</td> <td style="padding-top: 2px;">13.74</td> <td style="padding-top: 2px;">Average</td> <td style="padding-top: 2px;">106</td> <td style="padding-top: 2px;">111</td> </tr> <tr> <td style="padding-top: 2px;">8</td> <td style="padding-top: 2px;">12010.00</td> <td style="padding-top: 2px;">57.32</td> <td style="padding-top: 2px;">74.00</td> <td style="padding-top: 2px;">-16.68</td> <td style="padding-top: 2px;">43.58</td> <td style="padding-top: 2px;">13.74</td> <td style="padding-top: 2px;">Peak</td> <td style="padding-top: 2px;">106</td> <td style="padding-top: 2px;">111</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dBuV	Factor	High	Table	1	1445.00	50.22	54.00	-3.78	55.75	-5.53	Average	119	300	2	1445.00	54.19	74.00	-19.81	59.72	-5.53	Peak	119	300	3	2390.00	40.06	54.00	-13.94	42.18	-2.12	Average	155	334	4	2390.00	50.89	74.00	-23.11	53.01	-2.12	Peak	155	334	5	4804.00	37.45	54.00	-16.55	33.02	4.43	Average	106	222	6	4804.00	47.52	74.00	-26.48	43.09	4.43	Peak	106	222	7	12010.00	45.11	54.00	-8.89	31.37	13.74	Average	106	111	8	12010.00	57.32	74.00	-16.68	43.58	13.74	Peak	106	111
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dBuV	Factor	High	Table																																																																																													
1	1445.00	50.22	54.00	-3.78	55.75	-5.53	Average	119	300																																																																																												
2	1445.00	54.19	74.00	-19.81	59.72	-5.53	Peak	119	300																																																																																												
3	2390.00	40.06	54.00	-13.94	42.18	-2.12	Average	155	334																																																																																												
4	2390.00	50.89	74.00	-23.11	53.01	-2.12	Peak	155	334																																																																																												
5	4804.00	37.45	54.00	-16.55	33.02	4.43	Average	106	222																																																																																												
6	4804.00	47.52	74.00	-26.48	43.09	4.43	Peak	106	222																																																																																												
7	12010.00	45.11	54.00	-8.89	31.37	13.74	Average	106	111																																																																																												
8	12010.00	57.32	74.00	-16.68	43.58	13.74	Peak	106	111																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																					

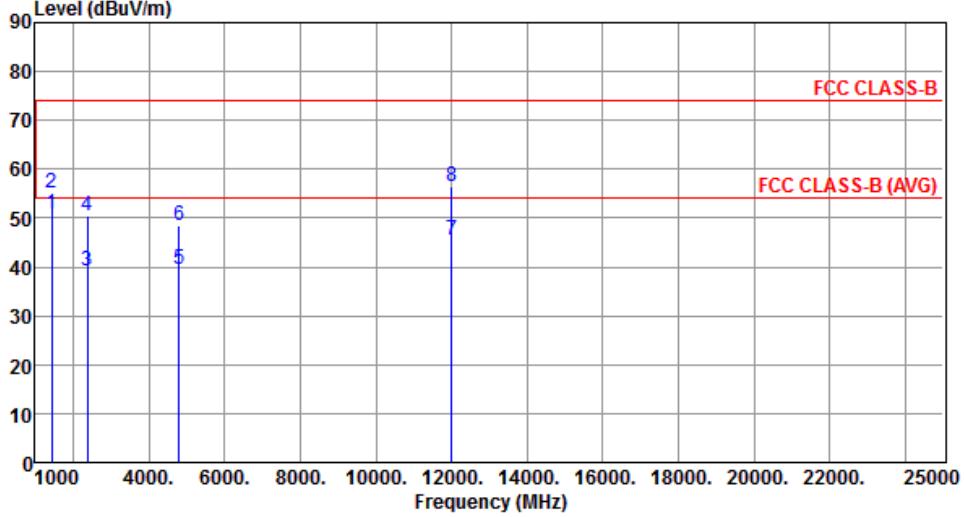
Modulation	GFSK	Test Freq. (MHz)	2402																																																																																																		
Polarization	Vertical																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>50.89</td> <td>54.00</td> <td>-3.11</td> <td>56.42</td> <td>-5.53</td> <td>Average</td> <td>111</td> <td>266</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>55.26</td> <td>74.00</td> <td>-18.74</td> <td>60.79</td> <td>-5.53</td> <td>Peak</td> <td>111</td> <td>266</td> </tr> <tr> <td>3</td> <td>2390.00</td> <td>39.25</td> <td>54.00</td> <td>-14.75</td> <td>41.37</td> <td>-2.12</td> <td>Average</td> <td>100</td> <td>133</td> </tr> <tr> <td>4</td> <td>2390.00</td> <td>50.35</td> <td>74.00</td> <td>-23.65</td> <td>52.47</td> <td>-2.12</td> <td>Peak</td> <td>100</td> <td>133</td> </tr> <tr> <td>5</td> <td>4804.00</td> <td>39.47</td> <td>54.00</td> <td>-14.53</td> <td>35.04</td> <td>4.43</td> <td>Average</td> <td>100</td> <td>329</td> </tr> <tr> <td>6</td> <td>4804.00</td> <td>48.59</td> <td>74.00</td> <td>-25.41</td> <td>44.16</td> <td>4.43</td> <td>Peak</td> <td>100</td> <td>329</td> </tr> <tr> <td>7</td> <td>12010.00</td> <td>45.57</td> <td>54.00</td> <td>-8.43</td> <td>31.83</td> <td>13.74</td> <td>Average</td> <td>111</td> <td>232</td> </tr> <tr> <td>8</td> <td>12010.00</td> <td>56.52</td> <td>74.00</td> <td>-17.48</td> <td>42.78</td> <td>13.74</td> <td>Peak</td> <td>111</td> <td>232</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	1445.00	50.89	54.00	-3.11	56.42	-5.53	Average	111	266	2	1445.00	55.26	74.00	-18.74	60.79	-5.53	Peak	111	266	3	2390.00	39.25	54.00	-14.75	41.37	-2.12	Average	100	133	4	2390.00	50.35	74.00	-23.65	52.47	-2.12	Peak	100	133	5	4804.00	39.47	54.00	-14.53	35.04	4.43	Average	100	329	6	4804.00	48.59	74.00	-25.41	44.16	4.43	Peak	100	329	7	12010.00	45.57	54.00	-8.43	31.83	13.74	Average	111	232	8	12010.00	56.52	74.00	-17.48	42.78	13.74	Peak	111	232
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																													
1	1445.00	50.89	54.00	-3.11	56.42	-5.53	Average	111	266																																																																																												
2	1445.00	55.26	74.00	-18.74	60.79	-5.53	Peak	111	266																																																																																												
3	2390.00	39.25	54.00	-14.75	41.37	-2.12	Average	100	133																																																																																												
4	2390.00	50.35	74.00	-23.65	52.47	-2.12	Peak	100	133																																																																																												
5	4804.00	39.47	54.00	-14.53	35.04	4.43	Average	100	329																																																																																												
6	4804.00	48.59	74.00	-25.41	44.16	4.43	Peak	100	329																																																																																												
7	12010.00	45.57	54.00	-8.43	31.83	13.74	Average	111	232																																																																																												
8	12010.00	56.52	74.00	-17.48	42.78	13.74	Peak	111	232																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

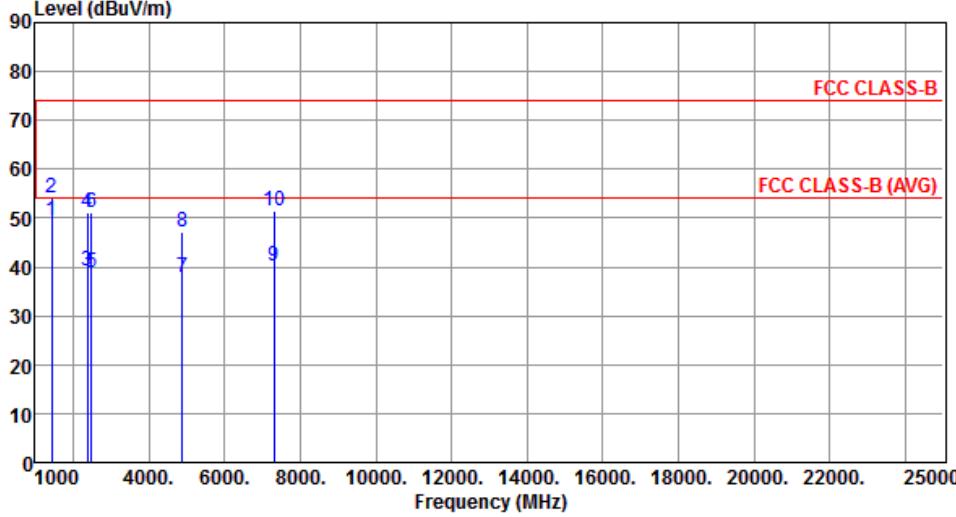
Modulation	GFSK		Test Freq. (MHz)	2440																																																																																																																															
Polarization	Horizontal																																																																																																																																		
																																																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th style="text-align: left;"> </th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th style="text-align: left;">dBuV</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>49.43</td> <td>54.00</td> <td>-4.57</td> <td>54.96</td> <td>-5.53</td> <td>Average</td> <td>111</td> <td>278</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>59.64</td> <td>-5.53</td> <td>Peak</td> <td>111</td> <td>278</td> </tr> <tr> <td>3</td> <td>2390.00</td> <td>39.16</td> <td>54.00</td> <td>-14.84</td> <td>41.28</td> <td>-2.12</td> <td>Average</td> <td>144</td> <td>322</td> </tr> <tr> <td>4</td> <td>2390.00</td> <td>51.06</td> <td>74.00</td> <td>-22.94</td> <td>53.18</td> <td>-2.12</td> <td>Peak</td> <td>144</td> <td>322</td> </tr> <tr> <td>5</td> <td>2483.50</td> <td>38.88</td> <td>54.00</td> <td>-15.12</td> <td>40.65</td> <td>-1.77</td> <td>Average</td> <td>144</td> <td>322</td> </tr> <tr> <td>6</td> <td>2483.50</td> <td>51.06</td> <td>74.00</td> <td>-22.94</td> <td>52.83</td> <td>-1.77</td> <td>Peak</td> <td>144</td> <td>322</td> </tr> <tr> <td>7</td> <td>4880.00</td> <td>37.88</td> <td>54.00</td> <td>-16.12</td> <td>33.29</td> <td>4.59</td> <td>Average</td> <td>106</td> <td>227</td> </tr> <tr> <td>8</td> <td>4880.00</td> <td>47.04</td> <td>74.00</td> <td>-26.96</td> <td>42.45</td> <td>4.59</td> <td>Peak</td> <td>106</td> <td>227</td> </tr> <tr> <td>9</td> <td>7320.00</td> <td>40.22</td> <td>54.00</td> <td>-13.78</td> <td>31.06</td> <td>9.16</td> <td>Average</td> <td>111</td> <td>152</td> </tr> <tr> <td>10</td> <td>7320.00</td> <td>51.46</td> <td>74.00</td> <td>-22.54</td> <td>42.30</td> <td>9.16</td> <td>Peak</td> <td>111</td> <td>152</td> </tr> </tbody> </table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table					dBuV			cm	deg	1	1445.00	49.43	54.00	-4.57	54.96	-5.53	Average	111	278	2	1445.00	54.11	74.00	-19.89	59.64	-5.53	Peak	111	278	3	2390.00	39.16	54.00	-14.84	41.28	-2.12	Average	144	322	4	2390.00	51.06	74.00	-22.94	53.18	-2.12	Peak	144	322	5	2483.50	38.88	54.00	-15.12	40.65	-1.77	Average	144	322	6	2483.50	51.06	74.00	-22.94	52.83	-1.77	Peak	144	322	7	4880.00	37.88	54.00	-16.12	33.29	4.59	Average	106	227	8	4880.00	47.04	74.00	-26.96	42.45	4.59	Peak	106	227	9	7320.00	40.22	54.00	-13.78	31.06	9.16	Average	111	152	10	7320.00	51.46	74.00	-22.54	42.30	9.16	Peak	111	152
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																											
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																																																											
				dBuV			cm	deg																																																																																																																											
1	1445.00	49.43	54.00	-4.57	54.96	-5.53	Average	111	278																																																																																																																										
2	1445.00	54.11	74.00	-19.89	59.64	-5.53	Peak	111	278																																																																																																																										
3	2390.00	39.16	54.00	-14.84	41.28	-2.12	Average	144	322																																																																																																																										
4	2390.00	51.06	74.00	-22.94	53.18	-2.12	Peak	144	322																																																																																																																										
5	2483.50	38.88	54.00	-15.12	40.65	-1.77	Average	144	322																																																																																																																										
6	2483.50	51.06	74.00	-22.94	52.83	-1.77	Peak	144	322																																																																																																																										
7	4880.00	37.88	54.00	-16.12	33.29	4.59	Average	106	227																																																																																																																										
8	4880.00	47.04	74.00	-26.96	42.45	4.59	Peak	106	227																																																																																																																										
9	7320.00	40.22	54.00	-13.78	31.06	9.16	Average	111	152																																																																																																																										
10	7320.00	51.46	74.00	-22.54	42.30	9.16	Peak	111	152																																																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																			

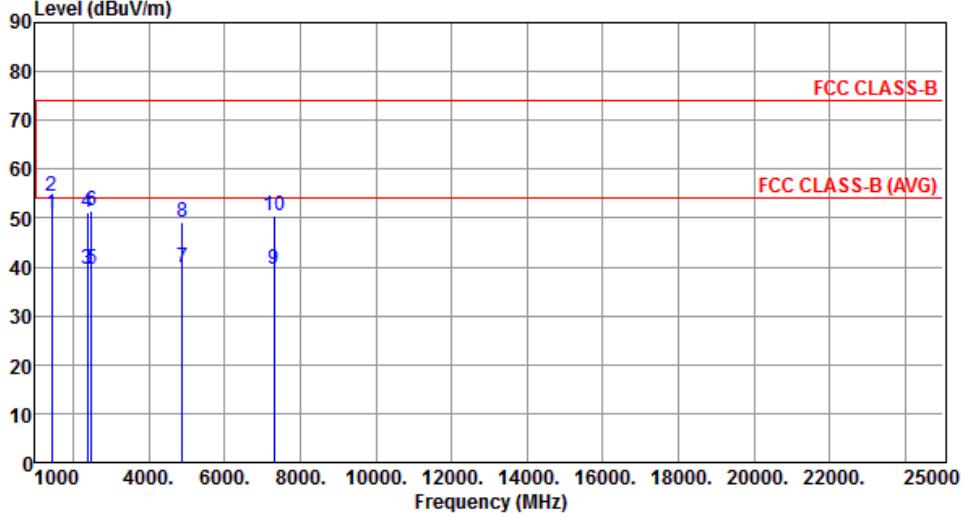Modulation	GFSK	Test Freq. (MHz)	2440																																																																																																																						
Polarization	Vertical																																																																																																																								
																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> <th style="text-align: left;">deg</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">50.95</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-3.05</td> <td style="text-align: left;">56.48</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">298</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">1445.00</td> <td style="text-align: left;">54.55</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-19.45</td> <td style="text-align: left;">60.08</td> <td style="text-align: left;">-5.53</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">298</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">39.56</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.44</td> <td style="text-align: left;">41.68</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">111</td> <td style="text-align: left;">123</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">2390.00</td> <td style="text-align: left;">50.98</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.02</td> <td style="text-align: left;">53.10</td> <td style="text-align: left;">-2.12</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">111</td> <td style="text-align: left;">123</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">39.65</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.35</td> <td style="text-align: left;">41.42</td> <td style="text-align: left;">-1.77</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">111</td> <td style="text-align: left;">123</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">51.55</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-22.45</td> <td style="text-align: left;">53.32</td> <td style="text-align: left;">-1.77</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">111</td> <td style="text-align: left;">123</td> </tr> <tr> <td style="text-align: left;">7</td> <td style="text-align: left;">4880.00</td> <td style="text-align: left;">39.87</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.13</td> <td style="text-align: left;">35.28</td> <td style="text-align: left;">4.59</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">106</td> <td style="text-align: left;">316</td> </tr> <tr> <td style="text-align: left;">8</td> <td style="text-align: left;">4880.00</td> <td style="text-align: left;">49.15</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-24.85</td> <td style="text-align: left;">44.56</td> <td style="text-align: left;">4.59</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">106</td> <td style="text-align: left;">316</td> </tr> <tr> <td style="text-align: left;">9</td> <td style="text-align: left;">7320.00</td> <td style="text-align: left;">39.59</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-14.41</td> <td style="text-align: left;">30.43</td> <td style="text-align: left;">9.16</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">106</td> <td style="text-align: left;">232</td> </tr> <tr> <td style="text-align: left;">10</td> <td style="text-align: left;">7320.00</td> <td style="text-align: left;">50.55</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-23.45</td> <td style="text-align: left;">41.39</td> <td style="text-align: left;">9.16</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">106</td> <td style="text-align: left;">232</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB	High	Table	deg	1	1445.00	50.95	54.00	-3.05	56.48	-5.53	Average	100	298	2	1445.00	54.55	74.00	-19.45	60.08	-5.53	Peak	100	298	3	2390.00	39.56	54.00	-14.44	41.68	-2.12	Average	111	123	4	2390.00	50.98	74.00	-23.02	53.10	-2.12	Peak	111	123	5	2483.50	39.65	54.00	-14.35	41.42	-1.77	Average	111	123	6	2483.50	51.55	74.00	-22.45	53.32	-1.77	Peak	111	123	7	4880.00	39.87	54.00	-14.13	35.28	4.59	Average	106	316	8	4880.00	49.15	74.00	-24.85	44.56	4.59	Peak	106	316	9	7320.00	39.59	54.00	-14.41	30.43	9.16	Average	106	232	10	7320.00	50.55	74.00	-23.45	41.39	9.16	Peak	106	232
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																	
MHz	level	dBuV/m	dB	reading	dB	High	Table	deg																																																																																																																	
1	1445.00	50.95	54.00	-3.05	56.48	-5.53	Average	100	298																																																																																																																
2	1445.00	54.55	74.00	-19.45	60.08	-5.53	Peak	100	298																																																																																																																
3	2390.00	39.56	54.00	-14.44	41.68	-2.12	Average	111	123																																																																																																																
4	2390.00	50.98	74.00	-23.02	53.10	-2.12	Peak	111	123																																																																																																																
5	2483.50	39.65	54.00	-14.35	41.42	-1.77	Average	111	123																																																																																																																
6	2483.50	51.55	74.00	-22.45	53.32	-1.77	Peak	111	123																																																																																																																
7	4880.00	39.87	54.00	-14.13	35.28	4.59	Average	106	316																																																																																																																
8	4880.00	49.15	74.00	-24.85	44.56	4.59	Peak	106	316																																																																																																																
9	7320.00	39.59	54.00	-14.41	30.43	9.16	Average	106	232																																																																																																																
10	7320.00	50.55	74.00	-23.45	41.39	9.16	Peak	106	232																																																																																																																

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

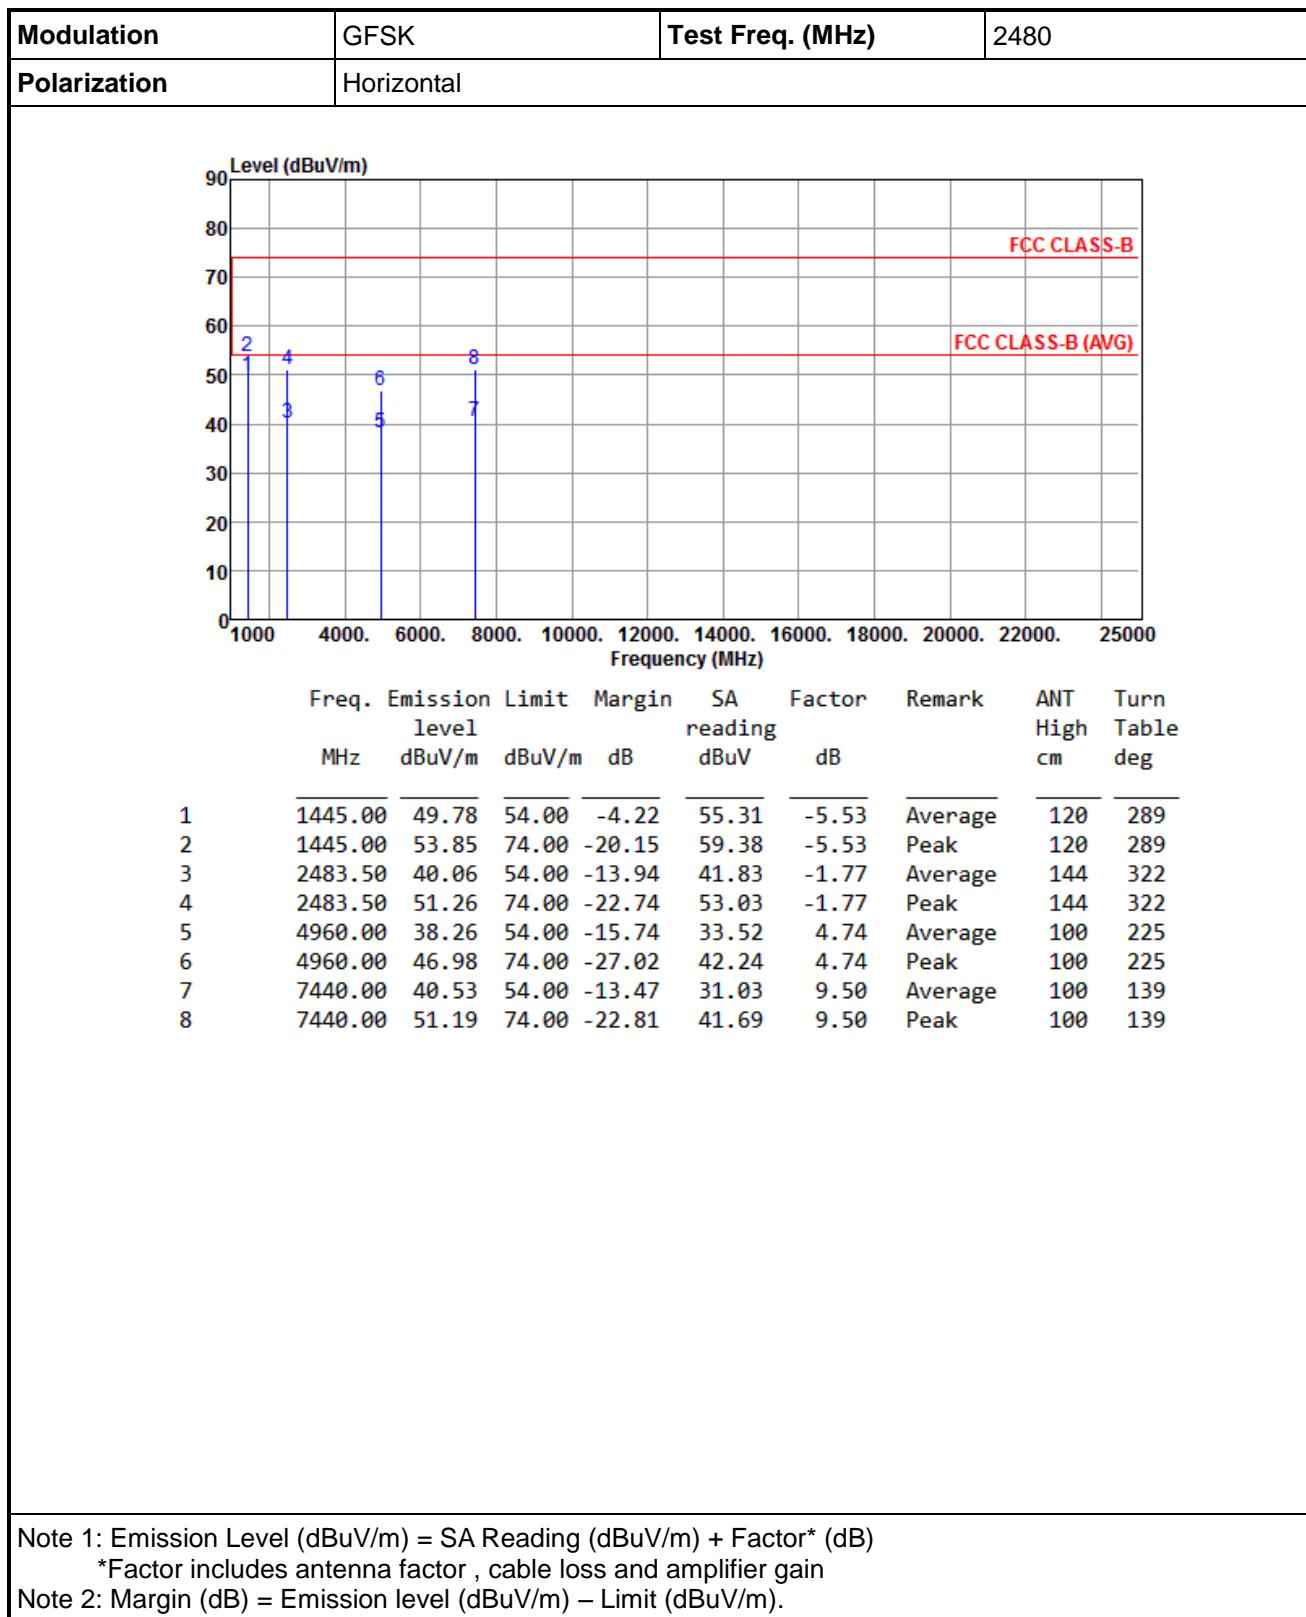

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

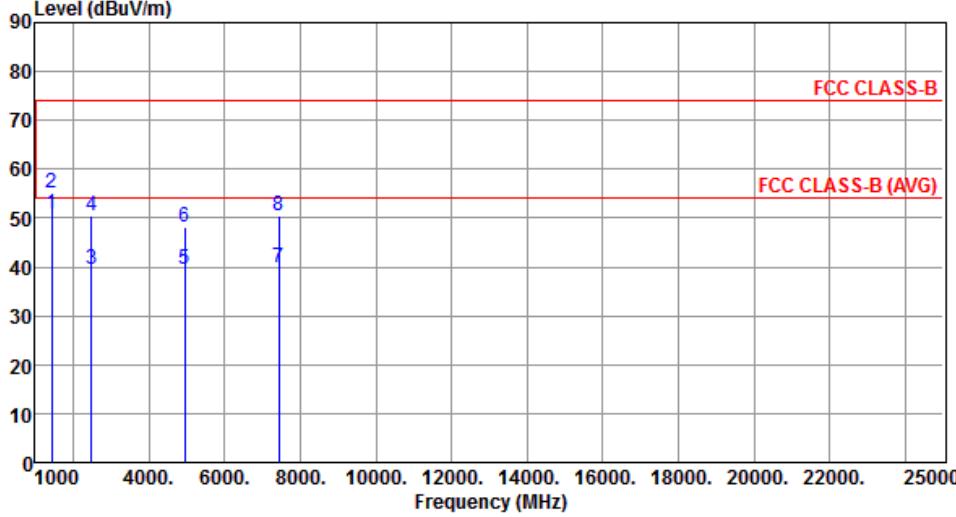Modulation	GFSK	Test Freq. (MHz)	2480																																																																																																		
Polarization	Vertical																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1445.00</td> <td>50.97</td> <td>54.00</td> <td>-3.03</td> <td>56.50</td> <td>-5.53</td> <td>Average</td> <td>100</td> <td>259</td> </tr> <tr> <td>2</td> <td>1445.00</td> <td>54.98</td> <td>74.00</td> <td>-19.02</td> <td>60.51</td> <td>-5.53</td> <td>Peak</td> <td>100</td> <td>259</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>39.52</td> <td>54.00</td> <td>-14.48</td> <td>41.29</td> <td>-1.77</td> <td>Average</td> <td>111</td> <td>151</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>50.53</td> <td>74.00</td> <td>-23.47</td> <td>52.30</td> <td>-1.77</td> <td>Peak</td> <td>111</td> <td>151</td> </tr> <tr> <td>5</td> <td>4960.00</td> <td>39.62</td> <td>54.00</td> <td>-14.38</td> <td>34.88</td> <td>4.74</td> <td>Average</td> <td>100</td> <td>311</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>48.11</td> <td>74.00</td> <td>-25.89</td> <td>43.37</td> <td>4.74</td> <td>Peak</td> <td>100</td> <td>311</td> </tr> <tr> <td>7</td> <td>7440.00</td> <td>39.87</td> <td>54.00</td> <td>-14.13</td> <td>30.37</td> <td>9.50</td> <td>Average</td> <td>100</td> <td>226</td> </tr> <tr> <td>8</td> <td>7440.00</td> <td>50.55</td> <td>74.00</td> <td>-23.45</td> <td>41.05</td> <td>9.50</td> <td>Peak</td> <td>100</td> <td>226</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	1445.00	50.97	54.00	-3.03	56.50	-5.53	Average	100	259	2	1445.00	54.98	74.00	-19.02	60.51	-5.53	Peak	100	259	3	2483.50	39.52	54.00	-14.48	41.29	-1.77	Average	111	151	4	2483.50	50.53	74.00	-23.47	52.30	-1.77	Peak	111	151	5	4960.00	39.62	54.00	-14.38	34.88	4.74	Average	100	311	6	4960.00	48.11	74.00	-25.89	43.37	4.74	Peak	100	311	7	7440.00	39.87	54.00	-14.13	30.37	9.50	Average	100	226	8	7440.00	50.55	74.00	-23.45	41.05	9.50	Peak	100	226
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																													
1	1445.00	50.97	54.00	-3.03	56.50	-5.53	Average	100	259																																																																																												
2	1445.00	54.98	74.00	-19.02	60.51	-5.53	Peak	100	259																																																																																												
3	2483.50	39.52	54.00	-14.48	41.29	-1.77	Average	111	151																																																																																												
4	2483.50	50.53	74.00	-23.47	52.30	-1.77	Peak	111	151																																																																																												
5	4960.00	39.62	54.00	-14.38	34.88	4.74	Average	100	311																																																																																												
6	4960.00	48.11	74.00	-25.89	43.37	4.74	Peak	100	311																																																																																												
7	7440.00	39.87	54.00	-14.13	30.37	9.50	Average	100	226																																																																																												
8	7440.00	50.55	74.00	-23.45	41.05	9.50	Peak	100	226																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Unwanted Emissions Level Measurement

1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.6.3 Test Setup

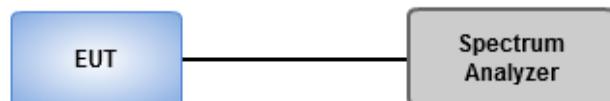

3.6.4 Test Result of Emissions in non-restricted Frequency Bands

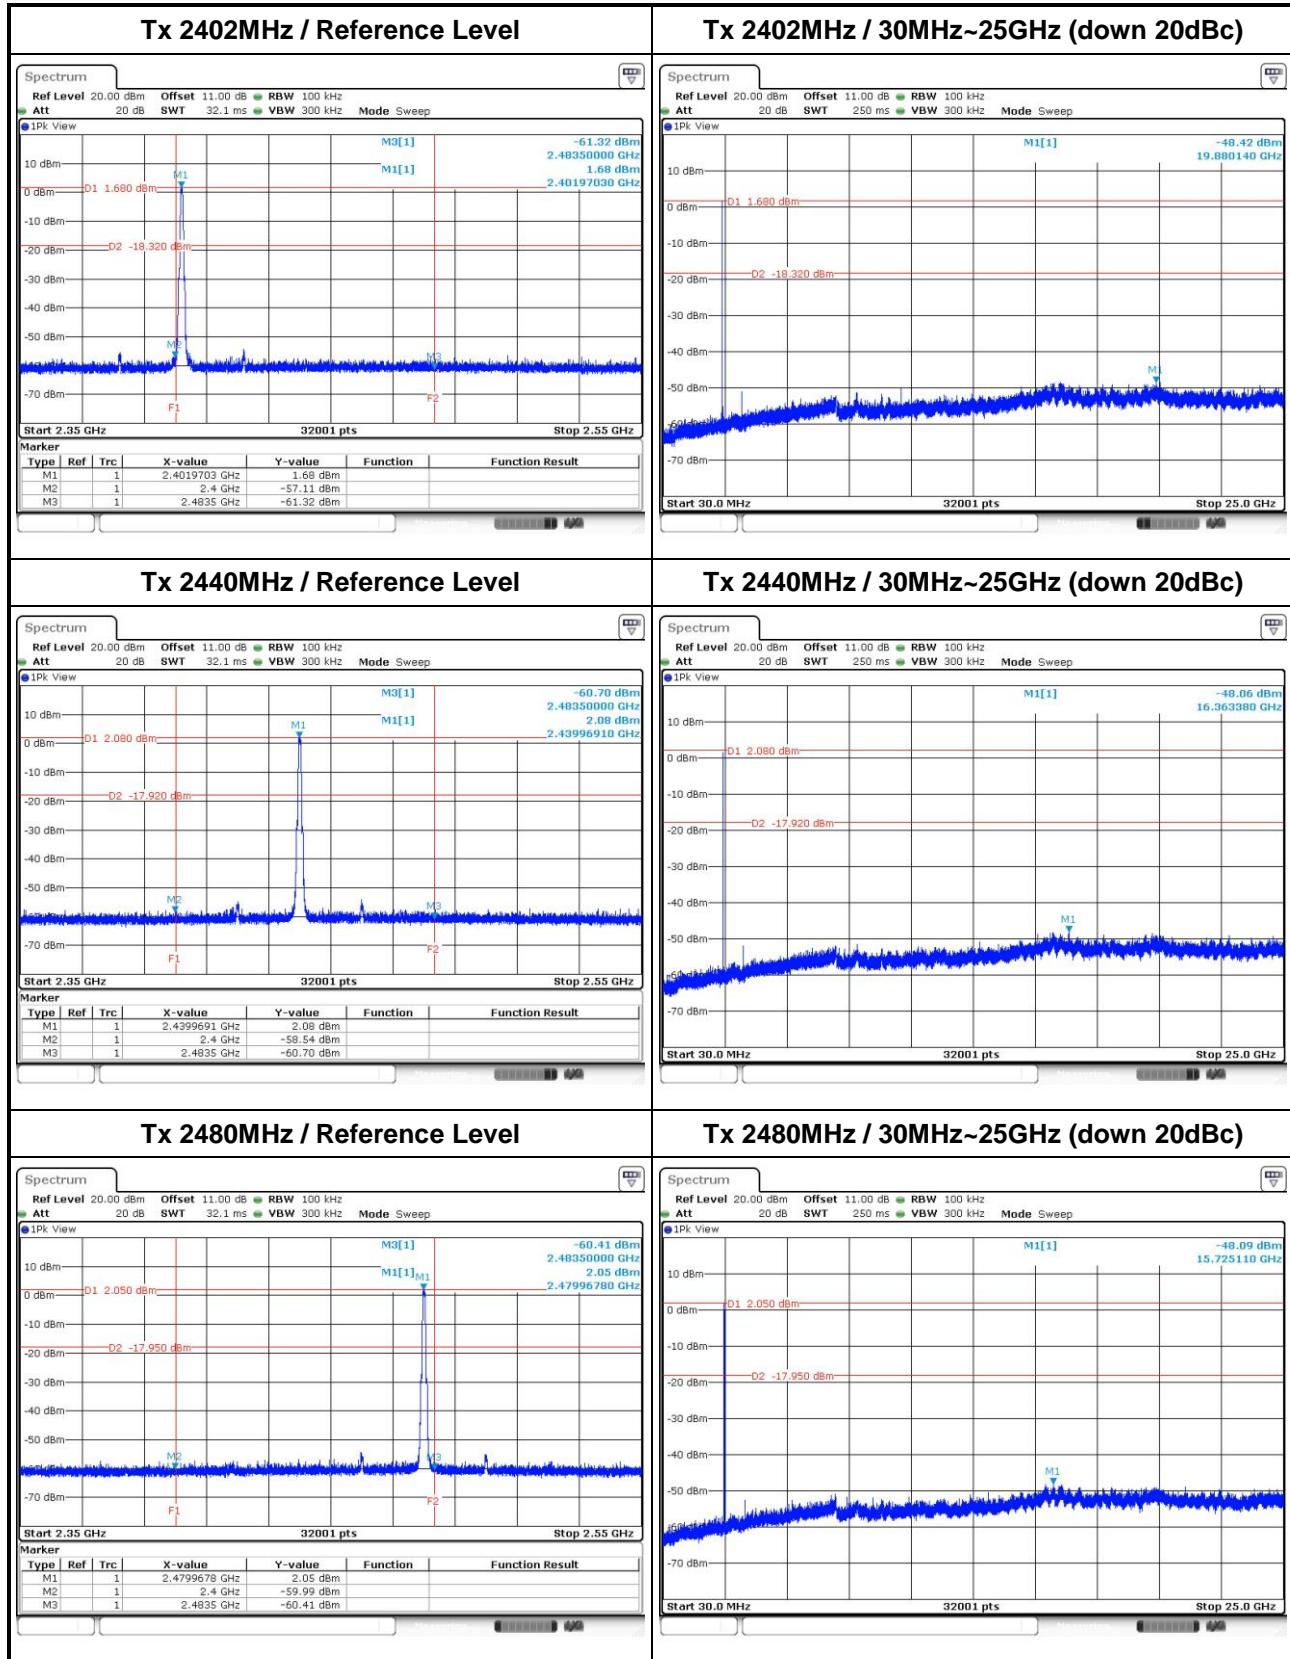

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

—END—