


Specifications of Quadrifilar Wideband Ant.

MESSRS. (주)아이디로

ITEM : Quadrifilar Wideband Antenna
PART NAME : MQWA60F55SM915-A
MODEL NAME :
FEATURES : UHF RFID Reader Circular Polarization Antenna
Low Weight, Compact Size
Provide highly stabilized performance
DATE : July 29, 2024
QUANTITY : 1 pcs

SUPPLIER : MAC technologies Inc.		
DRAWN	CHECKED	APPROVED
		

mac technologies

615, 530, Jikji-daero,

Heungdeok-gu, Cheongju-si, Chungbuk, KOREA, 28578

Tel : +82 43 275 2485 Fax : +82 43 275 2487

Halogen-Free


Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

1. Electrical Specifications.

NO.	Parameter	Spec.		Unit	Remark
		Cable Ass'y	Set Ass'y		
1	Center Frequency	915.0 $\pm$ 3		MHz	
2	Peak Gain	0.2 typ.	typ.	dBiL	
		3.0 typ.	typ.	dBiC	
3	Polarization	RHCP			
4	Beam Width	110 typ.	typ.	Deg.	
5	Band Width	250 typ.	typ.	MHz	
6	VSWR	2.0 : 1 max.	max.	Ratio	
7	Impedance	50		Ohm	


2. Mechanical Dimensions. (unit : mm)

2-1. Antenna Element

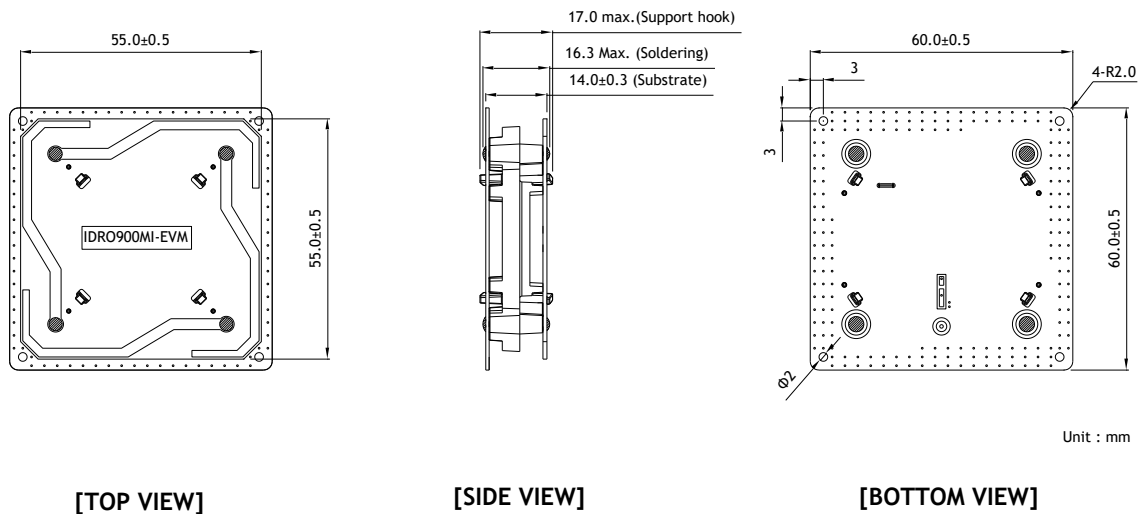


Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

2-2. Cable Ass'y (The color of cable outer sheath can be changed.)

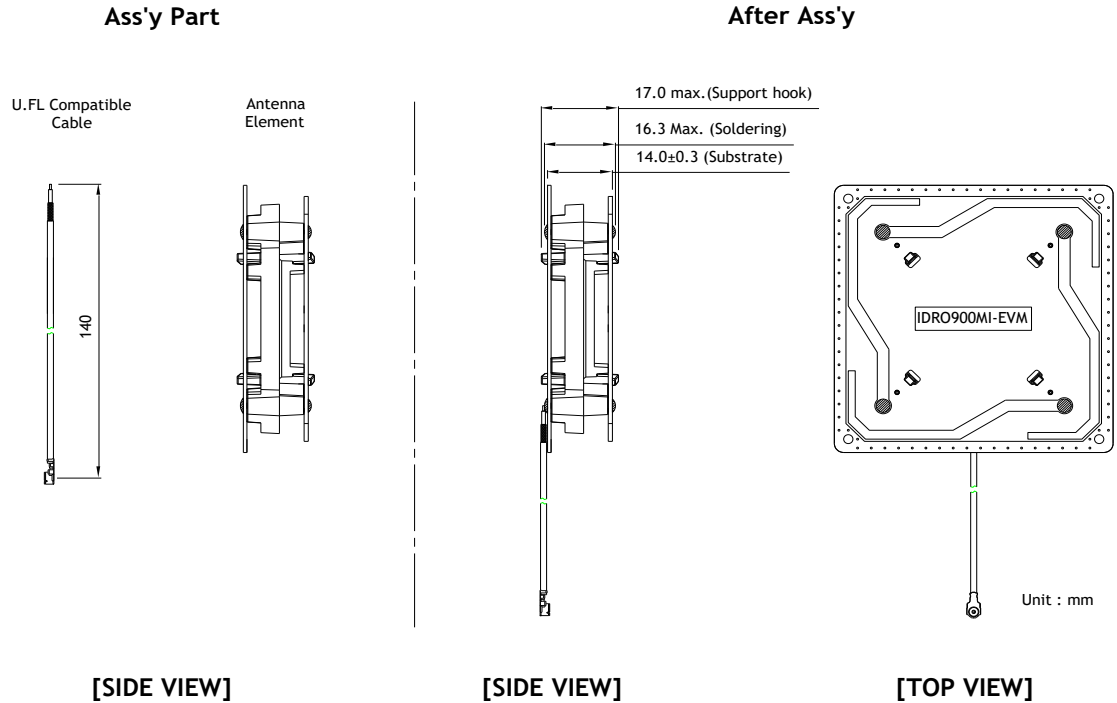


3. Test Fixture.

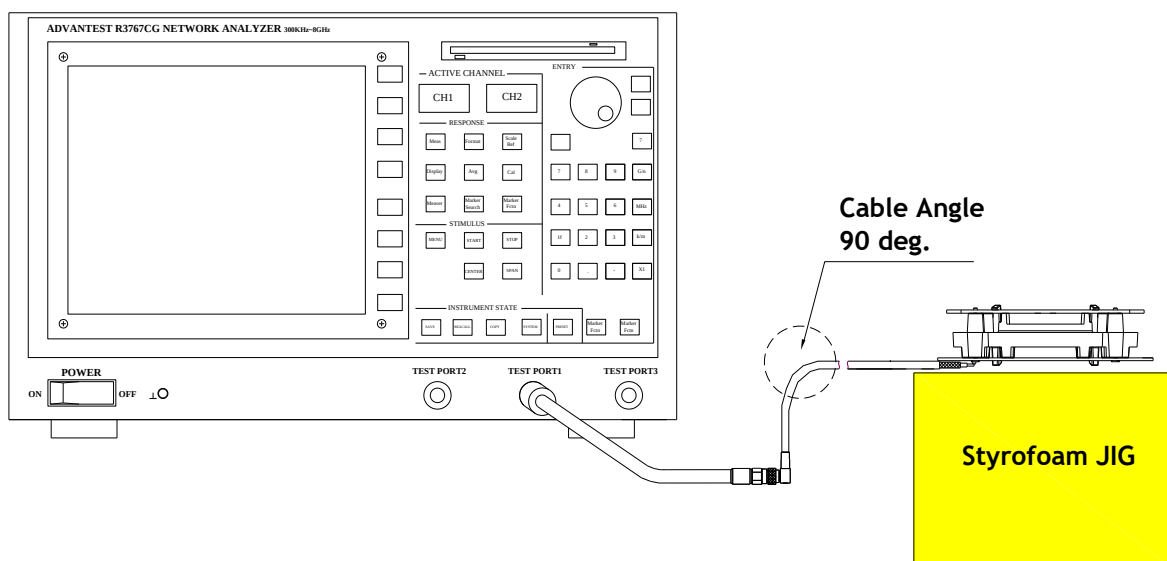

Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

4. S11 Measurement Data.


4-1. Cable Ass'y

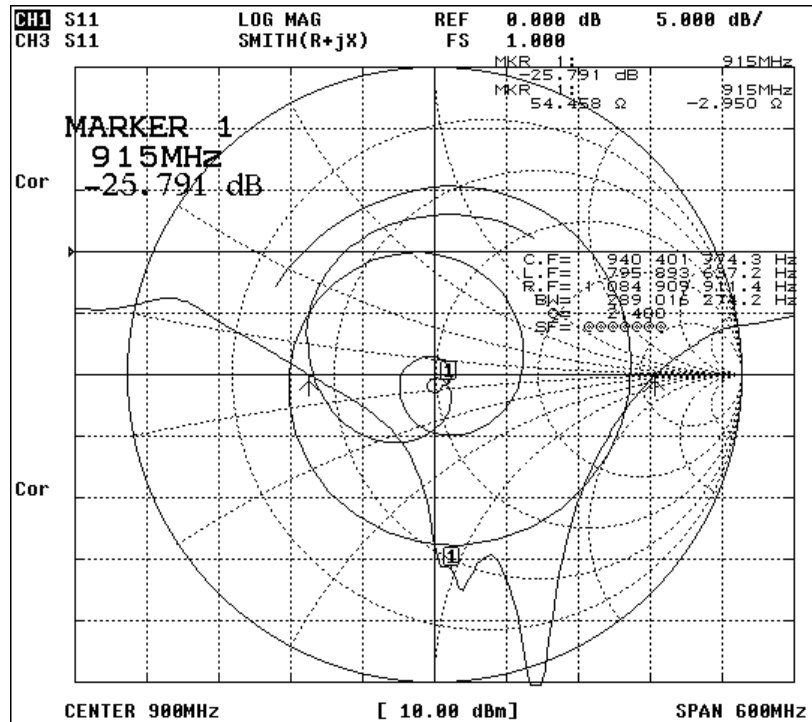


Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

5. Radiation Patterns.

5-1. H-pol. (Frequency 902.0, 907.0, 912.0, 915.0, 918.0, 923.0, 928.0 MHz)

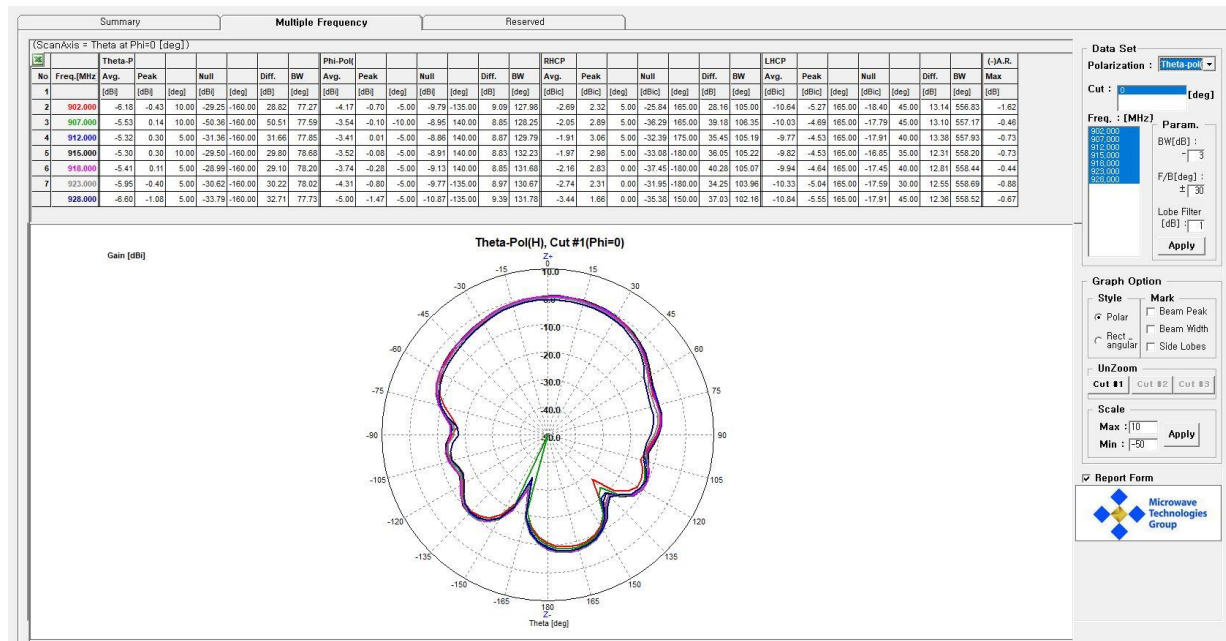

5-2. V-pol. (Frequency 902.0, 907.0, 912.0, 915.0, 918.0, 923.0, 928.0 MHz)

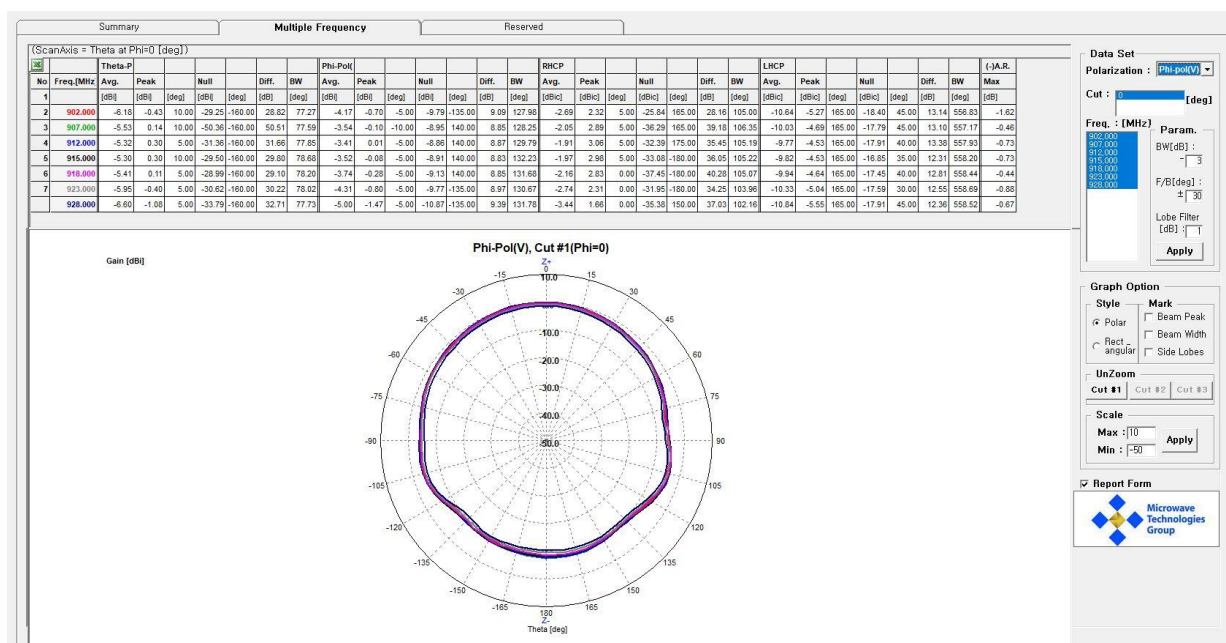

Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

5-3. Gain Test Data

Source Antenna Polarization	Frequency						
	902.0 MHz	907.0 MHz	912.0 MHz	915.0 MHz	918.0 MHz	923.0 MHz	928.0 MHz
H-pol. (dBiL)	-0.43	0.14	0.30	0.30	0.11	-0.40	-1.08
V-pol. (dBiL)	-0.70	-0.10	0.01	-0.08	-0.28	-0.80	-1.47
RHCP (dBiC)	2.32	2.89	3.06	2.98	2.83	2.31	1.66

Title	RFID Quadrifilar Wideband Ant. Sample Specification.
Document Number	MAC-08-02-04-24031
Date	July 29, 2024

5-5. List of Equipments (MAC technologies Inc.)

NO	Equipments	Maker	Model No.	S/N	Specification	Note
1	Anechoic Chamber	MTG	Mobile Chamber	-	4.0 m X 2.5 m X 2.5 m (0.4 ~ 3 GHz)	
2	Network Analyzer	Agilent	8753ES	US39173213	30 KHz ~ 6 GHz	
3	Dual-Polarization Horn Antenna with RF Switch	MTG	QRH-004060/ RSW-001060		0.4 GHz ~ 6 GHz	Source
4	Calibration Antenna	Schwarzbeck Mess - Elektronik	BBHA 9120 A	1201	0.8 GHz ~ 5 GHz	Reference
5	Absorber Installation	EMERSON & CUMING	SABS-003 18"		Reflectivity : -25 dB @ 0.8 GHz -30 dB @ 1.0 GHz	