

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT


**Test Report No.** : W16DR-D034  
**AGR No.** : A16DA-080  
**Applicant** : UNION COMMUNITY  
**Address** : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
**Manufacturer** : UNION COMMUNITY  
**Address** : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
**Type of Equipment** : Access controller  
**FCC ID** : XX2-AC-2000  
**Model Name** : AC-2000  
**Serial number** : N/A  
**Total page of Report** : 15 pages (including this page)  
**Date of Incoming** : December 08, 2016  
**Date of Issuing** : December 28, 2016

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 Subpart C Section 15.207 and 15.209**.

This test report only contains the result of a single test of the sample supplied for the examination. It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:

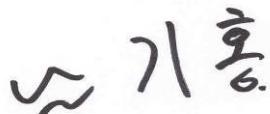

Ki-Hong, Nam / Asst, Chief Engineer  
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President  
ONETECH Corp.

## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION .....</b>	<b>5</b>
<b>2.2 MODEL DIFFERENCES:.....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>5</b>
<b>2.6 TEST FACILITY.....</b>	<b>6</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
<b>3.1 JUSTIFICATION.....</b>	<b>7</b>
<b>3.2 PERIPHERAL EQUIPMENT .....</b>	<b>7</b>
<b>3.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>7</b>
<b>3.4 EQUIPMENT MODIFICATIONS.....</b>	<b>7</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM.....</b>	<b>8</b>
<b>3.6 ANTENNA REQUIREMENT .....</b>	<b>8</b>
<b>4. PRELIMINARY TEST .....</b>	<b>8</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....</b>	<b>8</b>
<b>4.2 RADIATED EMISSIONS TESTS.....</b>	<b>8</b>
<b>5. FINAL RESULT OF 125 KHZ MEASUREMENT .....</b>	<b>9</b>
<b>5.1 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
<b>5.2 RADIATED EMISSION TEST BELOW 30 MHZ .....</b>	<b>11</b>
<b>5.3 RADIATED EMISSION TEST ABOVE 30 MHZ .....</b>	<b>12</b>
<b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>13</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>14</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>15</b>

**Revision History**

Issue Report No.	Issued Date	Revisions	Effect Section
W16DR-D034	December 28, 2016	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

- . APPLICANT : UNION COMMUNITY  
- . ADDRESS : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
- . CONTACT PERSON : KyungWook, Han / Manager  
- . TELEPHONE NO : +82-2-6488-3027  
- . FCC ID : XX2-AC-2000  
- . MODEL NO/NAME : AC-2000  
- . SERIAL NUMBER : N/A  
- . DATE : December 28, 2016

DEVICE TYPE	DCD – Part 15, Low Power Transmitter below 1 705 kHz
E.U.T. DESCRIPTION	Access controller
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m, Semi Anechoic Chamber

- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The UNION COMMUNITY, Model AC-2000 (referred to as the EUT in this report) is an Access controller, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Access controller
MODULATION	ASK
TRANSMITTING FREQUENCY	0.128 9 MHz
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1 MHz)	2 480 MHz, 400 MHz, 12 MHz, 25 MHz, 8 MHz, 32.768 kHz
ANTENNA TYPE	Copper Coil Antenna
USED AC/DC ADAPTER	Output: DC 12 V, 3.5 A Model No: DSA-42D-12 1 120350 Manufacturer: Dee Van Electronics(Longchuan)Co., Ltd.
EXTERNAL CONNECTOR	DC IN, LAN Port, Wiegand(1), Wiegand(2)

### 2.2 Model Differences:

- None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.207and 15.209.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	N/A	PF2200MA01 V12	N/A
FINGERPRINT BOARD	N/A	OPP06 Rev1.33	N/A
SUB BOARD	N/A	PF2000RF01 V11	N/A
USB BOARD	N/A	PF2000LD01 V11	N/A
ANTENNA	N/A	N/A	N/A
Bluetooth LE Module	PROCHILD INC.	PBLN51822m	2AEEY- PBLN51822M
ADAPTER	Dee Van Electronics(Longchuan)Co., Ltd.	DSA-42D-12 1 120350	N/A

#### 3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
AC-2000	UNION COMMUNITY	Access controller (EUT)	-
DSA-42D-12 1 120350	Dee Van Electronics(Longchuan)Co., Ltd.	AC ADAPTER	EUT
N/A	N/A	Door Open Switch	EUT
N/A	N/A	Door lock	EUT
Pavilion dv3	HP	Notebook PC	EUT
LA65NS2-01	LITE-ON TECHNOLOGY CORPORATION	AC ADAPTER	-

#### 3.3 Mode of operation during the test

- The EUT has 128.9 kHz RF boards for reading Card and program was used for making continuous transmission mode during the test.

#### 3.4 Equipment Modifications

- None

### 3.5 Configuration of Test System

**Line Conducted Test :**

The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test :**

Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.

For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The transmitter antenna of the EUT is a Copper Coil Antenna so there is no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Tx Mode	X

### 4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Tx Mode	X


## 5. FINAL RESULT OF 125 kHz MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

### 5.1 Conducted Emission Test


Humidity Level : (48 ~ 49) % R.H. Temperature: (24 ~ 25) °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)  
 Result : PASSED

EUT : Access controller Date: December 15, 2016  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)  
 Tested Line : HOT LINE

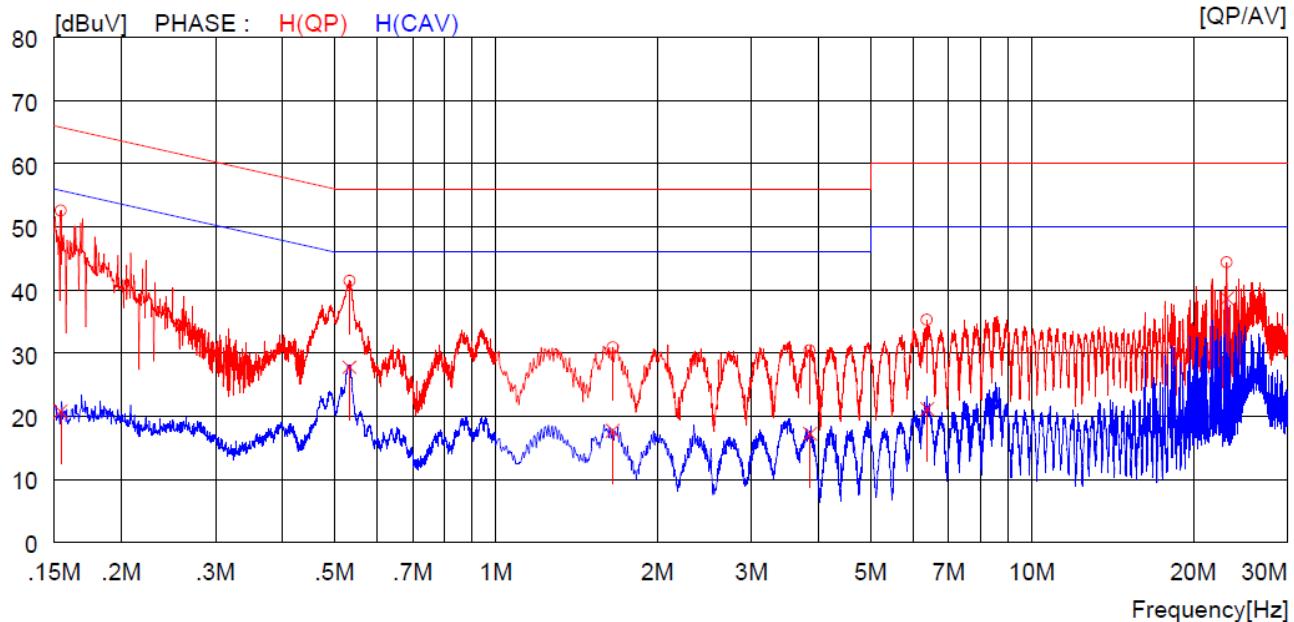

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	52.4	----	0.1	52.5	----	65.8	----	13.3	----	H (QP)
2	0.53300	41.3	----	0.1	41.4	----	56.0	----	14.6	----	H (QP)
3	1.65200	30.8	----	0.1	30.9	----	56.0	----	25.1	----	H (QP)
4	3.85200	30.2	----	0.2	30.4	----	56.0	----	25.6	----	H (QP)
5	6.37500	35.0	----	0.3	35.3	----	60.0	----	24.7	----	H (QP)
6	23.13000	43.7	----	0.7	44.4	----	60.0	----	15.6	----	H (QP)
7	0.15400	20.7	0.1	----	20.8	----	55.8	----	35.0	----	H (CAV)
8	0.53300	27.7	0.1	----	27.8	----	46.0	----	18.2	----	H (CAV)
9	1.65200	17.6	0.1	----	17.7	----	46.0	----	28.3	----	H (CAV)
10	3.85200	17.0	0.2	----	17.2	----	46.0	----	28.8	----	H (CAV)
11	6.37500	20.9	0.3	----	21.2	----	50.0	----	28.8	----	H (CAV)
12	23.13000	37.9	0.7	----	38.6	----	50.0	----	11.4	----	H (CAV)

Tested Line : NEUTRAL LINE

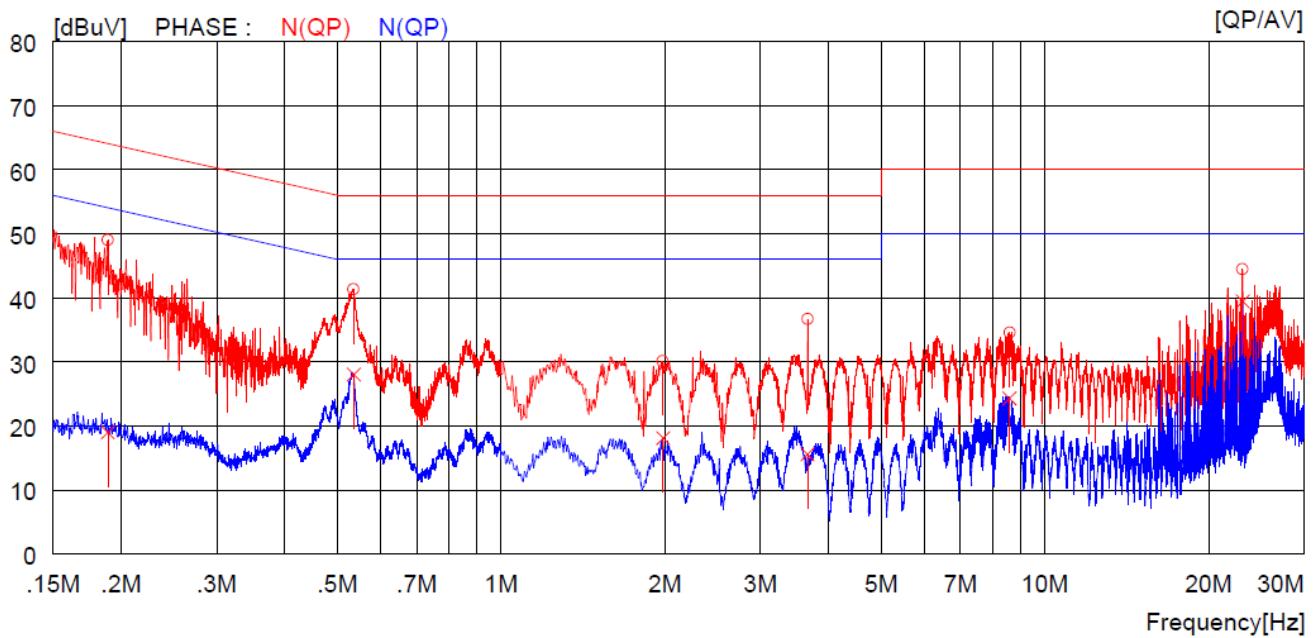

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18900	48.9	----	0.1	49.0	----	64.1	----	15.1	----	N (QP)
2	0.53500	41.2	----	0.1	41.3	----	56.0	----	14.7	----	N (QP)
3	1.98400	29.9	----	0.2	30.1	----	56.0	----	25.9	----	N (QP)
4	3.66000	36.5	----	0.2	36.7	----	56.0	----	19.3	----	N (QP)
5	8.62000	34.2	----	0.3	34.5	----	60.0	----	25.5	----	N (QP)
6	23.13000	43.8	----	0.7	44.5	----	60.0	----	15.5	----	N (QP)
7	0.18900	18.9	0.1	----	19.0	----	54.1	----	35.1	----	N (CAV)
8	0.53500	27.9	0.1	----	28.0	----	46.0	----	18.0	----	N (CAV)
9	1.98400	17.9	0.2	----	18.1	----	46.0	----	27.9	----	N (CAV)
10	3.66000	15.4	0.2	----	15.6	----	46.0	----	30.4	----	N (CAV)
11	8.62000	24.0	0.3	----	24.3	----	50.0	----	25.7	----	N (CAV)
12	23.13000	38.8	0.7	----	39.5	----	50.0	----	10.5	----	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.



Tested by: Seok-Jun, Lee / Engineer

## 5.2 Radiated Emission Test below 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>48 % R.H.</u>	Temperature: <u>23 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209</u>	
Type of Test	: <u>Low Power Transmitter below 1 705 kHz</u>	
Result	: <u>PASSED</u>	

EUT : Access controller Date: December 15, 2016  
 Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
0.015	49.52	H	1	180	19.26	0.05	68.83	124.1	55.27
0.043	53.21	V	1	360	19.27	0.06	72.54	114.9	42.36
0.059	48.69	H	1	360	19.28	0.05	68.02	112.1	44.08
0.128 9	75.14	H	1	180	19.35	0.05	94.54	105.4	10.86
0.278	51.62	H	1	360	19.57	0.06	71.25	98.7	27.45
0.421	53.12	H	1	180	19.62	0.07	72.81	95.1	22.29

### Radiated Emission Tabulated Data below 30 MHz

Note: According to the distance of measurements was reduced to 3 m, the limit was extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade) as follows.

Limit calculation: Limit at specified distance + 40log (300/3) = Limit + 80 dB for up to 0.49 MHz

Limit at specified distance + 40log (30/3) = Limit + 40 dB for above 0.49 MHz




Tested by: Seok-Jun, Lee / Engineer

### 5.3 Radiated Emission Test above 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>(48 ~ 49) % R.H.</u>	Temperature: <u>(24 ~ 25) °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209</u>	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Type of Test	: <u>Low Power Transmitter below 1 705 kHz</u>	

EUT : Access controller Date: December 15, 2016  
 Distance : 3 m

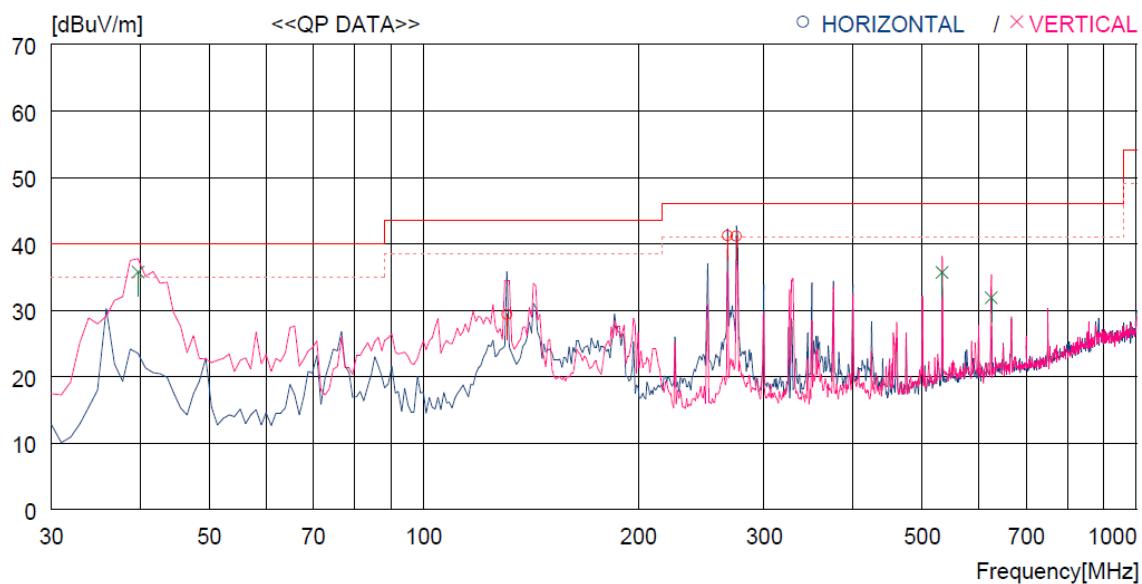

No.	FREQ QP	READING [MHz]	ANT FACTOR	LOSS [dB]	GAIN [dB]	RESULT [dB $\mu$ V/m]	LIMIT [dB $\mu$ V/m]	MARGIN [dB]	ANTENNA TABLE
----- Horizontal -----									
1	266.680	57.3	12.7	4.2	33.0	41.2	46.0	4.8	100
2	274.440	56.9	12.9	4.3	33.0	41.1	46.0	4.9	100
3	130.880	62.4	0.0	0.0	33.1	29.3	43.5	14.2	200
----- Vertical -----									
4	39.700	52.9	14.1	1.8	33.0	35.8	40.0	4.2	100
5	533.430	68.7	0.0	0.0	33.0	35.7	46.0	10.3	100
6	625.577	65.3	0.0	0.0	33.4	31.9	46.0	14.1	100

  
 Tested by: Seok-Jun, Lee / Engineer

### 5.4 Bandwidth of the operating frequency

Humidity Level : 47 % R.H. Temperature: 22°C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Transmitter below 1 705 kHz

EUT : Access controller Date: December 16, 2016


Resolution Bandwidth : 0.3 kHz

Video Bandwidth : 1.0 kHz


SPAN : 10.00 kHz

Carrier Freq. (kHz)	Bandwidth of the emission. (Hz)	Limit (kHz)	Remark
128.9	749	None	<u>The point 20 dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.

  
Tested by: Seok-Jun, Lee / Engineer

### Photo Data for bandwidth

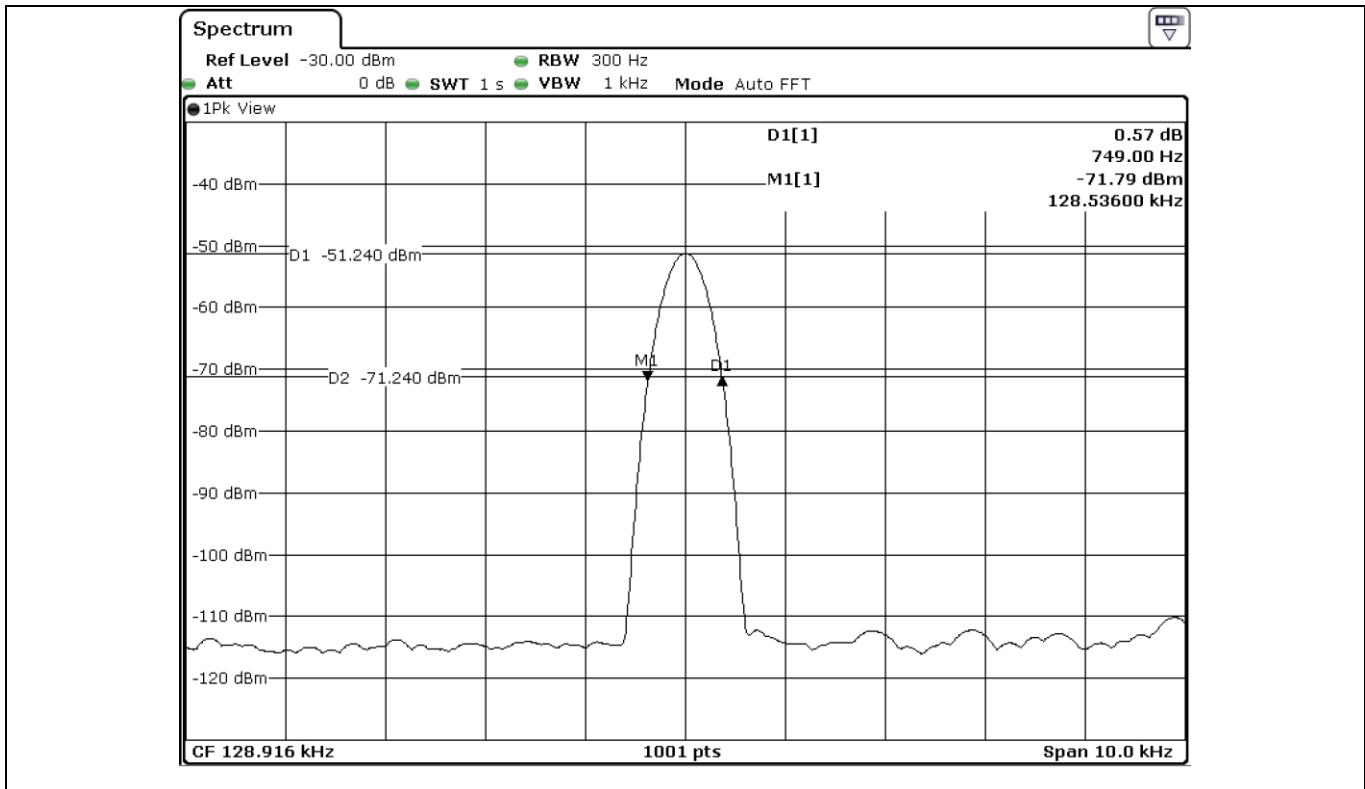

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

$$\begin{array}{rcl} + & \text{Meter reading} & (\text{dB}\mu\text{V}) \\ - & \text{Amplifier Gain} & (\text{dB}) \\ + & \text{Cable Loss} & (\text{dB}) \\ - & \text{Antenna Factor} & (\text{dB}/\text{m}) \\ \hline = & \text{Corrected Result} & (\text{dB}\mu\text{V}/\text{m}) \end{array}$$

$$\begin{array}{rcl} \text{Margin (dB)} \\ \hline & \text{Specification Limit} & (\text{dBuV}/\text{m}) \\ - & \text{Corrected Result} & (\text{dBuV}/\text{m}) \\ \hline = & \text{dB Relative to Spec} & (\pm \text{dB}) \end{array}$$

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESCI	101013	Apr. 05, 2016	One Year	■
2.		R/S	ESU	100261	Apr. 06, 2016	One Year	■
3.		R/S	ESPI	101278	Nov. 01, 2016	One Year	■
4.	Spectrum analyzer	R/S	FSV30	101372	Nov. 10, 2016	One Year	■
5.	Amplifier	Sonoma Instrument	310N	312544	Apr. 05, 2016	One Year	■
6.	Amplifier	Sonoma Instrument	310N	312545	Apr. 05, 2016	One Year	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-255	May 20, 2016	Two Year	■
8.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-419	Aug. 05, 2016	Two Year	■
9.	Controller	Innco System	CO3000	CO3000/904/ 37211215/L	N/A	N/A	■
10.	LISN	EMCO	3825/2	9109-1867	Apr. 06, 2016	One Year	-
				9109-1869	Apr. 06, 2016	One Year	■
		Schwarzbeck	NSLK8126	8126-404	Apr. 05, 2016	One Year	-
		Schwarzbeck	NSLK8128	8128-216	Apr. 06, 2016	One Year	■
11.	Turn Table	Innco System	DT3000	930611	N/A	N/A	■
12.	Antenna Master	Innco System	MA4000-EP	MA4000/332	N/A	N/A	■
13.	Antenna Master	Innco System	MA-4000XPET	MA4000/509	N/A	N/A	■
14.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-235	Jun. 10, 2016	Two Year	■
15.	Frequency Counter	HP	53152A	US39270295	Sep. 29, 2016	One Year	■
16.	Chamber	Samkun Tech	SSE-43CI-A	14009407	Apr. 11, 2016	One Year	■
17.	DC Power Supply	Digital Electronics	DRP-305DN	4030195	Sep. 02, 2016	One Year	■