


# RADIO PERFORMANCE TEST REPORT

**Test Report No.** : OT-22N-RWD-043  
**Reception No.** : 2209003084  
**Applicant** : UNION COMMUNITY  
**Address** : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea  
**Manufacturer** : UNION COMMUNITY  
**Address** : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea  
**Type of Equipment** : Access controller  
**FCC ID** : XX2-UBIO-X-PRO2  
**Model Name** : UBio-X Pro2  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 14 pages (including this page)  
**Date of Incoming** : October 06, 2022  
**Date of Issuing** : November 21, 2022

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 Subpart C Section 15.209 and 15.207**  
This test report only contains the result of a single test of the sample supplied for the examination.  
It is not a general valid assessment of the features of the respective products of the mass-production.  
This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.



---

Tested by  
Joon-Woo, Kim / Assistant Manager  
ONETECH Corp.

Reviewed by  
Tae-Ho, Kim / General Manager  
ONETECH Corp.

Approved by  
Ki-Hong, Nam / General Manager  
ONETECH Corp.

## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION.....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>5</b>
<b>2.2 MODEL DIFFERENCES.....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>5</b>
<b>2.6 TEST FACILITY.....</b>	<b>5</b>
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
<b>3.1 JUSTIFICATION .....</b>	<b>6</b>
<b>3.2 PERIPHERAL EQUIPMENT .....</b>	<b>6</b>
<b>3.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>6</b>
<b>3.4 EQUIPMENT MODIFICATIONS.....</b>	<b>6</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM.....</b>	<b>7</b>
<b>3.6 ANTENNA REQUIREMENT .....</b>	<b>7</b>
<b>4. PRELIMINARY TEST .....</b>	<b>7</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>7</b>
<b>4.2 RADIATED EMISSIONS TESTS.....</b>	<b>7</b>
<b>5. FINAL RESULT OF MEASUREMENT .....</b>	<b>8</b>
<b>5.1 CONDUCTED EMISSION TEST.....</b>	<b>8</b>
<b>5.2 RADIATED EMISSION TEST BELOW 30 MHZ.....</b>	<b>10</b>
<b>5.3 RADIATED EMISSION TEST ABOVE 30 MHZ .....</b>	<b>11</b>
<b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY.....</b>	<b>12</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>13</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>14</b>

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-22N-RWD-043	November 21, 2022	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

- . APPLICANT : UNION COMMUNITY  
- . ADDRESS : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea  
- . CONTACT PERSON : Dong Ho, Lee  
- . TELEPHONE NO : +82-2-6488-3054  
- . FCC ID : XX2-UBIO-X-PRO2  
- . MODEL NO/NAME : UBio-X Pro2  
- . SERIAL NUMBER : N/A  
- . DATE : November 21, 2022

DEVICE TYPE	DCD – Part 15, Low Power Transmitter below 1 705 kHz
E.U.T. DESCRIPTION	Access controller
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m, Semi Anechoic Chamber

- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The UNION COMMUNITY, Model UBio-X Pro2 (referred to as the EUT in this report) is an Access controller, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Access controller
TRANSMITTING FREQUENCY	125 kHz, 13.56 MHz, 2 402 MHz ~ 2 480 MHz
MODULATION	ASK
ANTENNA TYPE	Coil Antenna, PCB Antenna
LIST OF EACH OSC. or CRY. FREQ.(FREQ. >= 1 MHz)	8 MHz, 24 MHz, 27.12 MHz
USED AC/DC ADAPTER	Output : DC 15 V, 4.0 A Model No : KPL-060H-VI Manufacturer : Channel Well Technology (Guangzhou)Co., LTD.

### 2.2 Model Differences

- None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.209 and 15.207.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	N/A	PUBXP2MA01 V14	N/A
FINGERPRINT BOARD(1)	N/A	RFAS06MA01 V20	N/A
FINGERPRINT BOARD(2)	N/A	RFAS06SE01 V10	N/A
CAMERA BOARD	N/A	M20	N/A
DISPLAY	N/A	BL500P10-1409-V1	N/A
TOUNCH BOARD	N/A	PAC7000PLC01 V11	N/A
SD CARD BOARD	N/A	PAC7000SD01 V10	N/A
125 kHz RF BOARD	N/A	PAC7000RF01 V10	N/A
13.56 MHz ANTENNA BOARD	N/A	PAC7000SA01 NJA24	N/A
Speaker	N/A	N/A	N/A
Bluetooth LE Module	Union Community	F1DC2706-A	XX2- F1DC2706-A
ADAPTER	Channel Well Technology (Guangzhou)Co., LTD.	KPL-060H-VI	N/A

#### 3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
UBio-X Pro2	UNION COMMUNITY	Access controller (EUT)	-
KPL-060H-VI	Channel Well Technology (Guangzhou)Co., LTD.	ADAPTER	EUT
N/A	N/A	Door Open Switch	EUT
BHL-700C	ELECTRIC BOLT	Door lock	EUT
N/A	N/A	125 kHz Card	EUT

#### 3.3 Mode of operation during the test

- The EUT has 125 kHz RF boards for reading Card and program was used for making continuous transmission mode during the test.

#### 3.4 Equipment Modifications

- None

### 3.5 Configuration of Test System

**Line Conducted Test :** The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test :** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber. For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna. The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The transmitter antenna of the EUT is a Coil Antenna, PCB Antenna so there is no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

### 5.1 Conducted Emission Test


Humidity Level : 52.6 % R.H. Temperature: 22.5 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)  
 Result : PASSED

EUT : Access controller Date: October 06, 2022  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)  
 Tested Line : HOT LINE

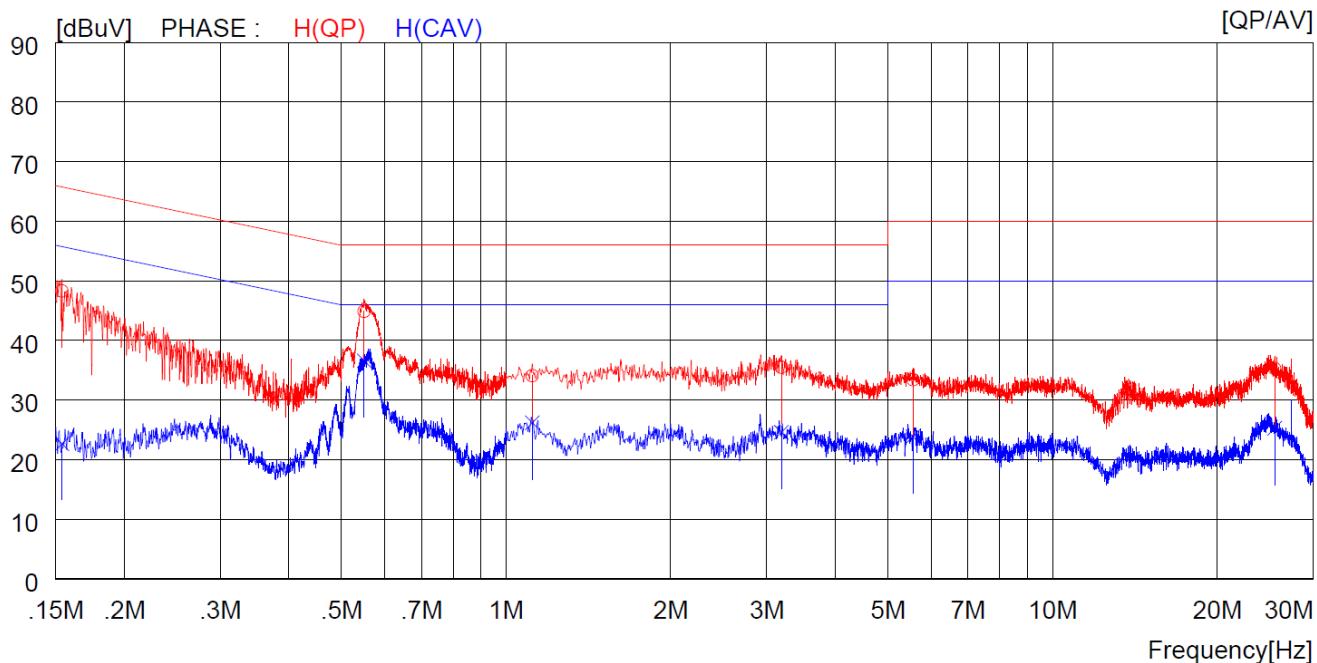

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	38.3	---	10.0	48.3	---	65.8	---	17.5	---	H (QP)
2	0.55000	34.9	---	10.0	44.9	---	56.0	---	11.1	---	H (QP)
3	1.11600	24.0	---	10.1	34.1	---	56.0	---	21.9	---	H (QP)
4	3.18800	25.4	---	10.1	35.5	---	56.0	---	20.5	---	H (QP)
5	5.55500	23.2	---	10.2	33.4	---	60.0	---	26.6	---	H (QP)
6	25.48000	24.7	---	10.6	35.3	---	60.0	---	24.7	---	H (QP)
7	0.15400	---	12.7	10.0	---	22.7	---	55.8	---	33.1	H (CAV)
8	0.55000	---	26.6	10.0	---	36.6	---	46.0	---	9.4	H (CAV)
9	1.11600	---	16.1	10.1	---	26.2	---	46.0	---	19.8	H (CAV)
10	3.18800	---	14.5	10.1	---	24.6	---	46.0	---	21.4	H (CAV)
11	5.55500	---	13.7	10.2	---	23.9	---	50.0	---	26.1	H (CAV)
12	25.48000	---	14.7	10.6	---	25.3	---	50.0	---	24.7	H (CAV)

Tested Line : NEUTRAL LINE

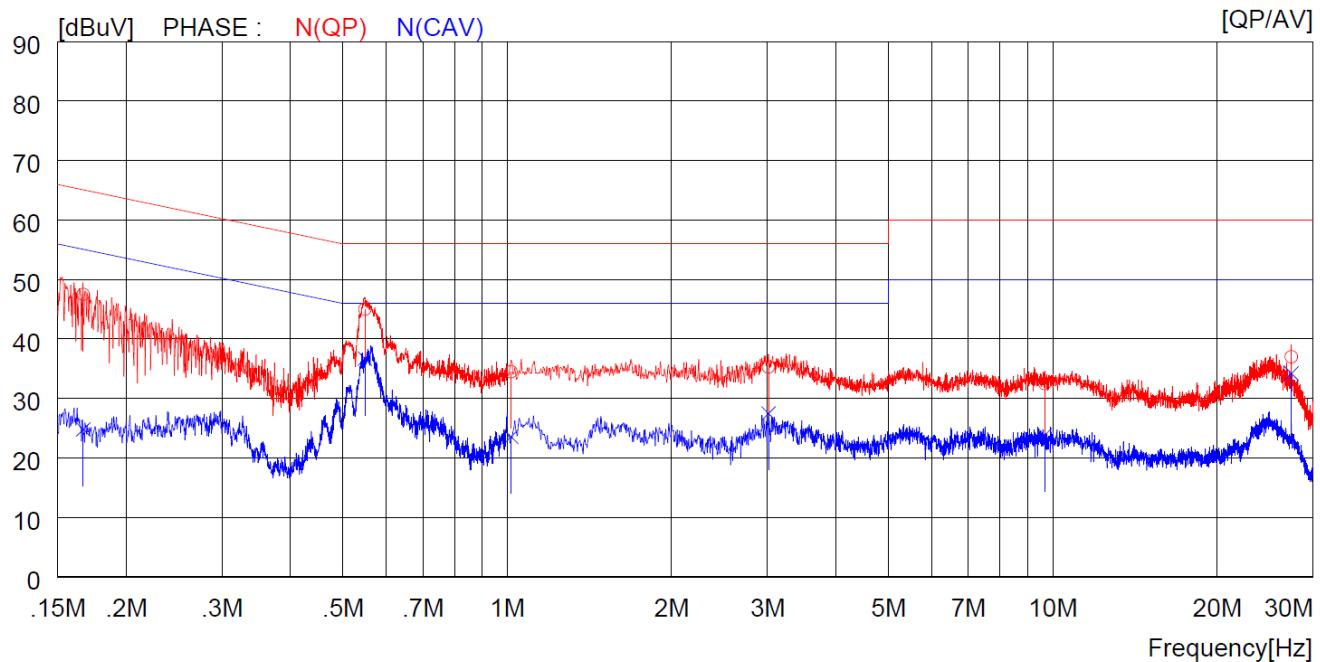

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16700	37.5	----	10.0	47.5	----	65.1	----	17.6	----	N (QP)
2	0.54800	35.0	----	10.0	45.0	----	56.0	----	11.0	----	N (QP)
3	1.01600	24.4	----	10.1	34.5	----	56.0	----	21.5	----	N (QP)
4	3.01200	25.2	----	10.1	35.3	----	56.0	----	20.7	----	N (QP)
5	9.66500	22.3	----	10.2	32.5	----	60.0	----	27.5	----	N (QP)
6	27.37000	26.4	----	10.6	37.0	----	60.0	----	23.0	----	N (QP)
7	0.16700	----	14.8	10.0	----	24.8	----	55.1	----	30.3	N (CAV)
8	0.54800	----	26.7	10.0	----	36.7	----	46.0	----	9.3	N (CAV)
9	1.01600	----	13.5	10.1	----	23.6	----	46.0	----	22.4	N (CAV)
10	3.01200	----	17.4	10.1	----	27.5	----	46.0	----	18.5	N (CAV)
11	9.66500	----	13.6	10.2	----	23.8	----	50.0	----	26.2	N (CAV)
12	27.37000	----	23.6	10.6	----	34.2	----	50.0	----	15.8	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

## 5.2 Radiated Emission Test below 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>48 % R.H.</u>	Temperature: <u>22 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209</u>	
Type of Test	: <u>Low Power Transmitter below 1 705 kHz</u>	
Result	: <u>PASSED</u>	

EUT : Access controller Date: October 06, 2022 ~ October 12, 2022

Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
0.009	40.46	V	0	20.1	0.2	60.76	128.52	67.76
0.031	34.79	H	0	21	0.2	55.99	117.78	61.79
0.122	26.37	H	170	21.1	0.3	47.77	105.88	58.11
0.203	30.01	H	340	21.1	0.3	51.41	101.45	50.04
0.249	25.91	V	125	21.1	0.3	47.31	99.68	52.37
1.246	17.57	H	180	21.2	0.5	39.27	65.69	26.42

### Radiated Emission Tabulated Data below 30 MHz

Note: According to the distance of measurements was reduced to 3 m, the limit was extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade) as follows.

Limit calculation: Limit at specified distance +  $40\log(300/3) = \text{Limit} + 80 \text{ dB}$  for up to 0.49 MHz


Limit at specified distance +  $40\log(30/3) = \text{Limit} + 40 \text{ dB}$  for above 0.49 MHz

### 5.3 Radiated Emission Test above 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 58.3 % R.H. Temperature: 23.4 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209  
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)  
Type of Test : Low Power Transmitter below 1 705 kHz  
Result : PASSED

EUT : Access controller Date: October 07, 2022  
Distance : 3 m

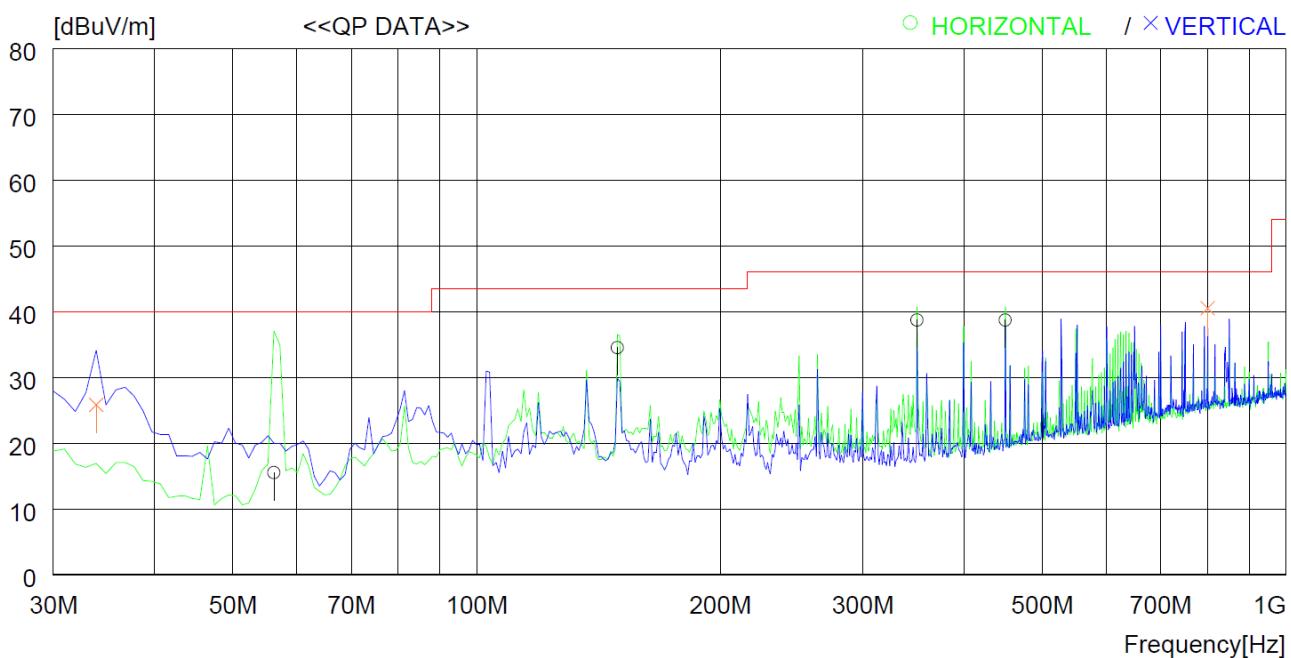

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
		QP	FACTOR	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]
<b>----- Horizontal -----</b>										
1	56.190	34.1	12.4	1.0	32.0	15.5	40.0	24.5	400	359
2	149.310	46.5	18.5	1.6	32.1	34.5	43.5	9.0	200	345
3	350.100	48.6	19.9	2.4	32.2	38.7	46.0	7.3	100	49
4	450.011	46.4	21.9	2.7	32.3	38.7	46.0	7.3	100	65
<b>----- Vertical -----</b>										
5	33.880	37.5	19.7	0.7	32.1	25.8	40.0	14.2	300	359
6	800.172	42.1	27.0	3.7	32.3	40.5	46.0	5.5	100	48

#### 5.4 Bandwidth of the operating frequency


Humidity Level : 48 % R.H. Temperature: 22 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209  
 Type of Test : Low Power Transmitter below 1 705 kHz  
 Result : PASSED

EUT : Access controller Date: October 06, 2022 ~ October 12, 2022  
 Resolution Bandwidth : 0.3 kHz  
 Video Bandwidth : 1.0 kHz  
 SPAN : 5.00 kHz

Carrier Freq. (kHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
122.07	0.754 2	None	The point 20 dB down from the modulated carrier

Remark: Please refer to Photo Data for bandwidth for test data.

#### Photo Data for bandwidth

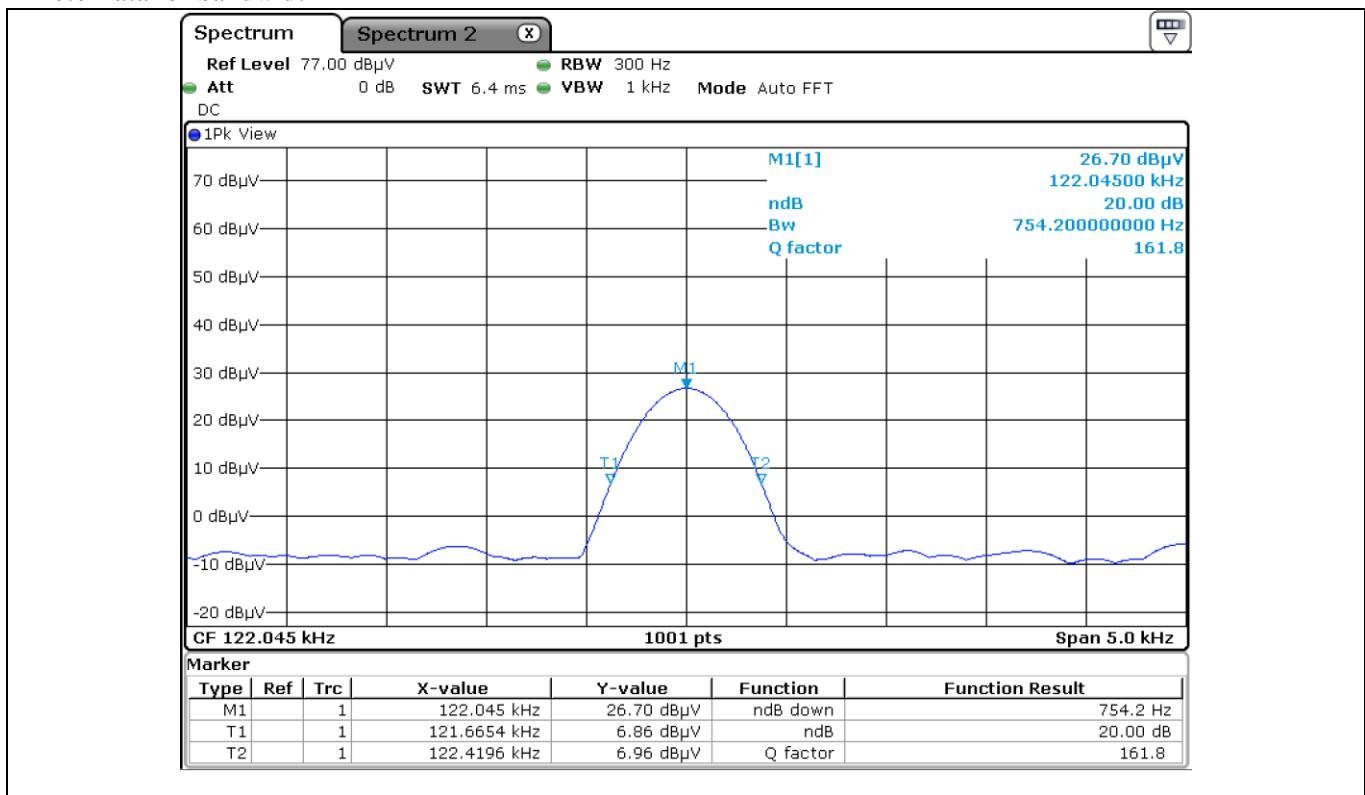

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

+ Meter reading	(dB $\mu$ V)
- Amplifier Gain	(dB)
+ Cable Loss	(dB)
- Antenna Factor	(dB/m)
= Corrected Result	(dB $\mu$ V/m)

Margin (dB)	
Specification Limit	(dB $\mu$ V/m)
- Corrected Result	(dB $\mu$ V/m)
= dB Relative to Spec	( $\pm$ dB)

## 7. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
FSV40-N	Rohde & Schwarz	SIGNAL ANALYZER	101372	Jul. 14, 2022 (1Y)
ESR	Rohde & Schwarz	EMI Test Receiver	101615	Fed. 24, 2022 (1Y)
310N	Sonoma Instrument	AMPLIFIER	392756	Oct. 14, 2022 (1Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 07, 2022 (2Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
MA-4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/652/ 43100318/P/-	N/A
HLA 6121	TESEQ	Loop Antenna	50841	Apr. 13, 2022 (2Y)
ESCI	Rohde & Schwarz	Test Receiver	101012	Fed. 24, 2022 (1Y)
NSLK8128	Schwarzbeck	V - LISN ( 4*32/50A)	8128216	Mar. 14, 2022 (1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 14, 2022 (1Y)
SH-242	ESPEC	Temperature & Humidity Chamber	00931001589	Jan. 18, 2022 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	5071069	Jan. 03, 2022 (1Y)