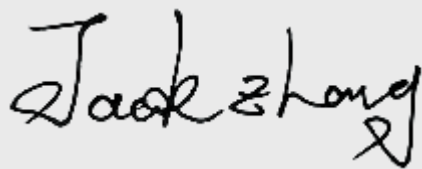


Test report No:
22A0568R-RF-US-P06V02

FCC& ISED TEST REPORT

Product Name	SC2021
Trademark	Sepura
Model and /or type reference	SC2021
FCC ID	XX6SC2021M
IC	8739A-SC2021M
Applicant's name / address	Sepura Limited 9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 /RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Feng Jiao/ Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2023-04-03
Report Version	V1.0
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information	11
1.3 Channel List	12
1.4 Power Setting.....	12
1.5 Test Matrix	12
2 Description of Test Setup	13
2.1 Operating mode(s) used for tests.....	13
2.2 Accessories Information	13
2.3 Auxiliary equipment / Test software for the EUT.....	13
2.4 Test Configuration / Block diagram used for tests	14
2.5 Testing process	16
3 Verdict summary section	17
3.1 Standards.....	17
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	17
3.3 Overview of results.....	18
3.4 Test Facility.....	19
4 Test Results.....	20
4.1 AC Power Line Conducted Emission	20
4.1.1 Limit.....	20
4.1.2 Test Setup.....	20
4.1.3 Test Procedure.....	20
4.1.4 Test Data	21
4.2 Emissions in restricted frequency bands	23
4.2.1 Limit.....	23
4.2.2 Test Setup.....	25

4.2.3	Test Procedure.....	26
4.2.4	Test Data	27
4.3	Emissions in non-restricted frequency band.....	35
4.3.1	Limit	35
4.3.2	Test Setup.....	35
4.3.3	Test Procedure.....	35
4.3.4	Test Data	36
4.4	Duty cycle	38
4.4.1	Limit	38
4.4.2	Test Setup.....	38
4.4.3	Test Procedure.....	38
4.4.4	Test Data	39
4.5	Band Edge	40
4.5.1	Limit	40
4.5.2	Test Setup.....	40
4.5.3	Test Procedure.....	40
4.5.4	Test Data	41
4.6	DTS Bandwidth	49
4.6.1	Limit	49
4.6.2	Test Setup.....	49
4.6.3	Test Procedure.....	49
4.6.4	Test Data	50
4.7	Fundamental emission output power	51
4.7.1	Limit	51
4.7.2	Test Setup.....	51
4.7.3	Test Procedure.....	52
4.7.4	Test Data	53
4.8	Power Density	54
4.8.1	Limit:	54
4.8.2	Test Setup.....	54
4.8.3	Test Procedure.....	54
4.8.4	Test Data	55
4.9	Antenna Requirement.....	56
4.9.1	Limit:	56
4.9.2	Antenna Connector Construction:	56
5	Test setup photo and EUT Photo.....	57

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Nov. 08, 2022
Date (start test)	Nov. 09, 2022
Date (finish test)	Nov. 25, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
22A0568R-RF-US-P06V02	V1.0	Initial issue of report.	2023-04-03

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, it is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 Power Setting.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.09.17	2023.09.16
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
Current Probe	R&S	EZ-17	100678	2021.12.31	2022.12.30
50ohm Termination	SHX	TF2	07081403	2022.09.04	2023.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06
Coaxial Cable	Suhner	RG 223	TR1-C2	2022.03.21	2023.03.20
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MAX Signal Analyzer	Agilent	N9020A	MY49100159	2022.09.18	2023.09.17
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2022.07.14	2023.07.13
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.08.23	2023.08.22
Tonscend test software	Tonscend	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.09.17	2023.09.16
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2021.12.03	2022.12.02
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2022.07.09	2023.07.08
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2022.03.30	2023.03.29
Dekra test software	Dekra	-	-	-	-

Radiated Emission(1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2022.08.12	2023.08.11
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2021.12.13	2022.12.12
Preamplifier	CHENGYI	EMC184045SE	980263	2022.05.21	2023.05.20
DRG Horn	ETS-Lindgren	3117	00123988	2022.11.01	2023.10.31
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2022.05.19	2023.05.18
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2022.07.07	2023.07.06
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2022.07.07	2023.07.06
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2022.03.21	2023.03.20
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.21	2023.03.20
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2022.03.21	2023.03.20
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	SC2021
Model No. :	SC2021
FCC ID :	XX6SC2021M
IC..... :	8739A-SC2021M
Hardware Version :	Pre-production
Software Version..... :	1807 009 07367
Manufacturer..... :	Sepura Limited
Manufacturer Address..... :	9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK
Factory :	Plexus (Oradea) Manufacturing Solutions
Factory Address..... :	Strada Eugeniu Carada, nr. 2 – 4, Oradea, Bihor
Model difference :	The SC2021 is a TETRA portable radio in the SC20 series of radios, operating in the VHF band, with operating frequencies 136-174 MHz. The SC20 is a TETRA hand-portable radio with a class 3 high power RF transmission, providing 2 Watts of audio and IP 66, 67 and 68 ratings. The SC20 has a range of options including Bluetooth, Wi-Fi and GNSS functionality. All these functions are controlled by licence.

Wireless specification..... :	Bluetooth V4.2					
Operating frequency range(s)..... :	2400~2483.5MHz					
Type of Modulation..... :	GFSK					
PHYs :	☒	LE 1M	☐	LE 2M	☐	LE Coded S=2/8
Data Rate :	☒	1Mbit/s	☐	2Mbit/s	☐	500/125 Kbit/s
Number of channel..... :	40					

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	DC: 7.4V
	☒	Adapter: INPUT : 100~240V 50/60Hz 0.55A OUTPUT: 10V----2400mA
	☐	Battery:
Brand of adapter	SWITCHIGN POWER SUPPLY	
Adapter model	ABSP024100240-1	
Mounting position..... :	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Head-mounted equipment
	☐	Other: Module

1.2 Antenna Information

Antenna model / type number.....:	N/A		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology.....:	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type.....:	☐	External	☐ Dipole
			☐ Sectorized
			☐ PCB
	☒	Internal	☐ PIFA
			☒ PCB
			☐ Dipole
			☐ Others:.....
Antenna Gain	2.5 dBi		

1.3 Channel List

Bluetooth Working Frequency of Each Channel (LE):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.4 Power Setting

Mode	Channel	Test Frequency (MHz)	Power Setting
LE_1Mbps	00	2402	Default
	19	2440	Default
	39	2480	Default

Note: The general description of the Item(s), antenna information, channel list and Power Setting in clause 1 are provided and confirmed by the client.

1.5 Test Matrix

Test item	Model / Type		
	1PR002226GK58ED	1PR002226GK58DN	1PR002226GK58E3
DTS Bandwidth	☒	☐	☐
Maximum conducted output power	☒	☐	☐
Maximum power spectral density	☒	☐	☐
Band edge measurements	☐	☒	☐
Conducted Spurious Emission	☒	☐	☐
Duty cycle	☒	☐	☐
Emissions in Restricted Bands	☐	☒	☐
AC Power Line Conducted Emission	☐	☒	☐
Antenna Requirement	☐	☒	☐

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode1: Transmit by LE_1Mbps
-------------------------	-----------------------------

Note : For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case Z axis on this report.

2.2 Accessories Information

Accessories Information	Brand/model name	Cable		
		Length used during test [m]	Attached during test	Shielded
USB Cable	N/A	10	☒	☒
USB Cable	N/A	0.5	☒	☒


2.3 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	2526	Think Pad	N/A
Software	Type / Version	Manufacturer	Supplied by
Putty	N/A	N/A	N/A


2.4 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:


Test setup Diagram- AC Line Conducted Emission Test

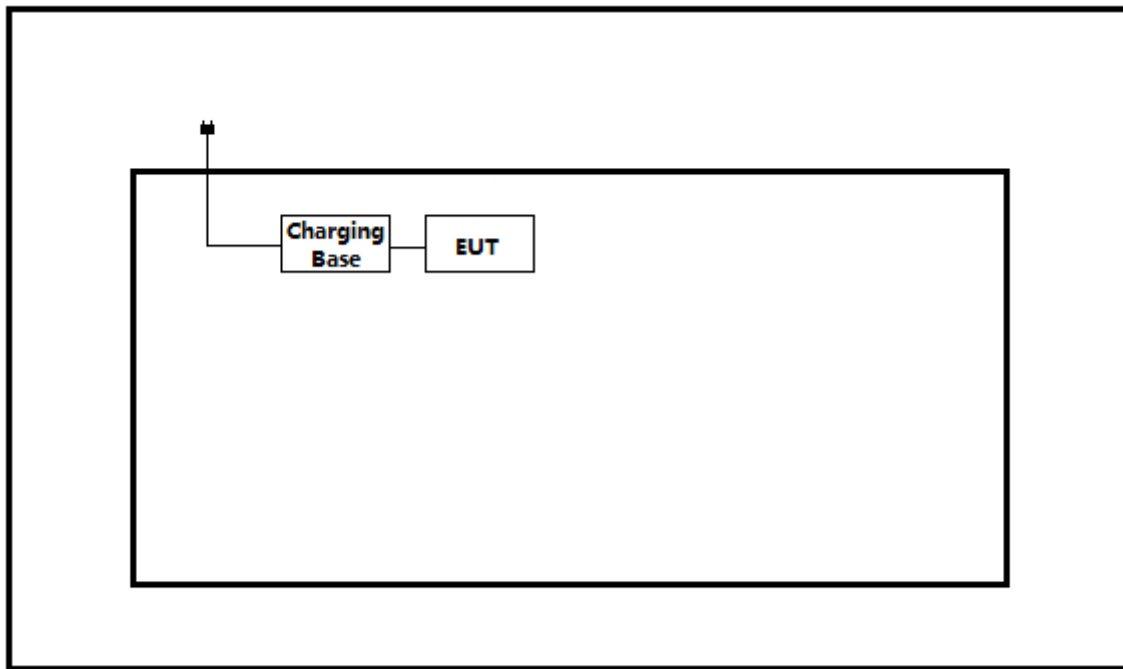

Test setup Diagram- Conducted test

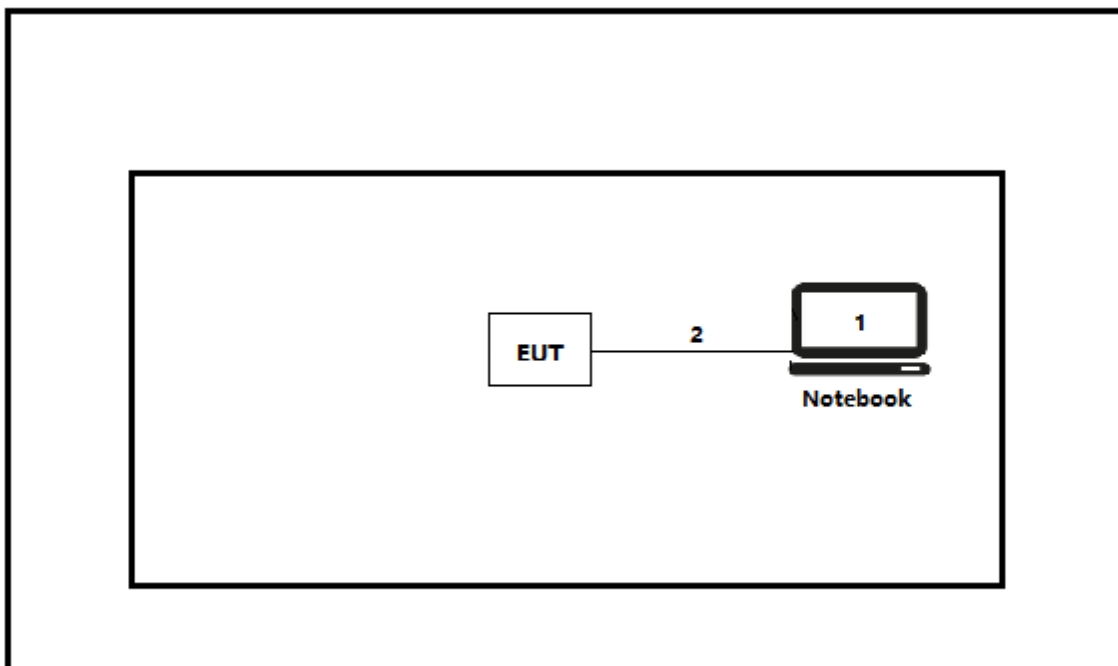

Test setup Diagram- Radiated test

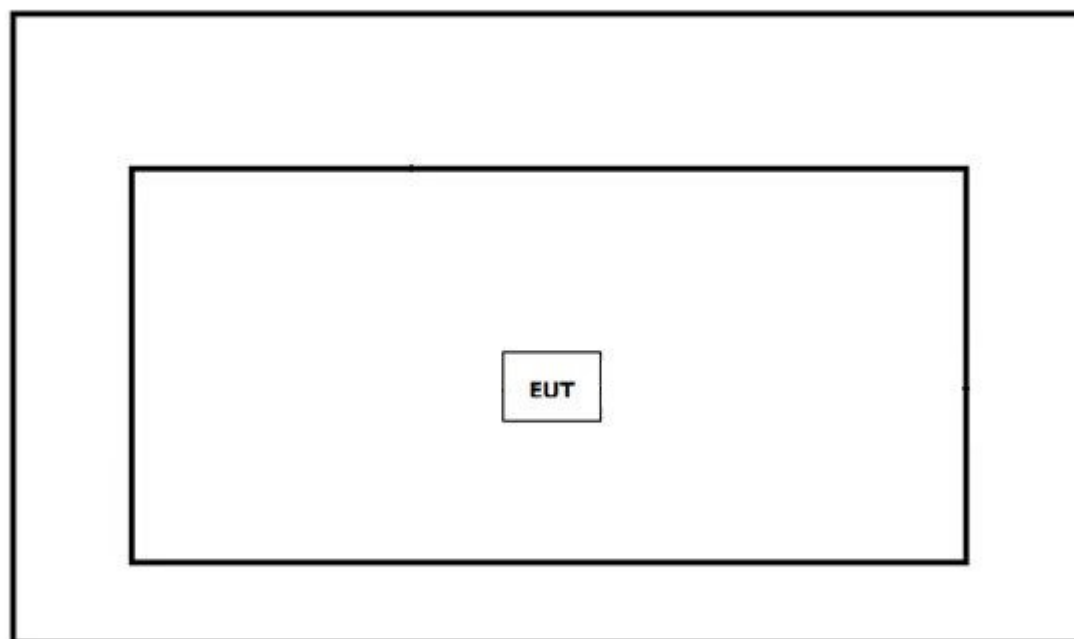

2.5 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Run the software "PUTTY" and enter the corresponding instructions on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

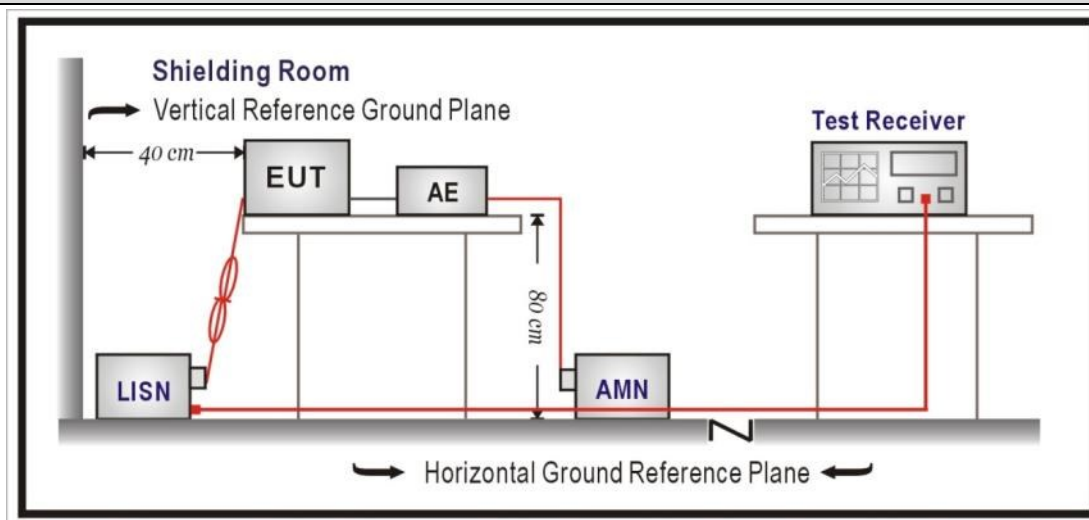


4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 22A0568R	Page No.: 99
Engineer: Yu Liu	
Site: TR1	Time: 2022/11/21 - 20:56
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: SC2021	Power: AC 120V/60Hz
Note: Mode1:Transmit at 2402MHz by BLE	

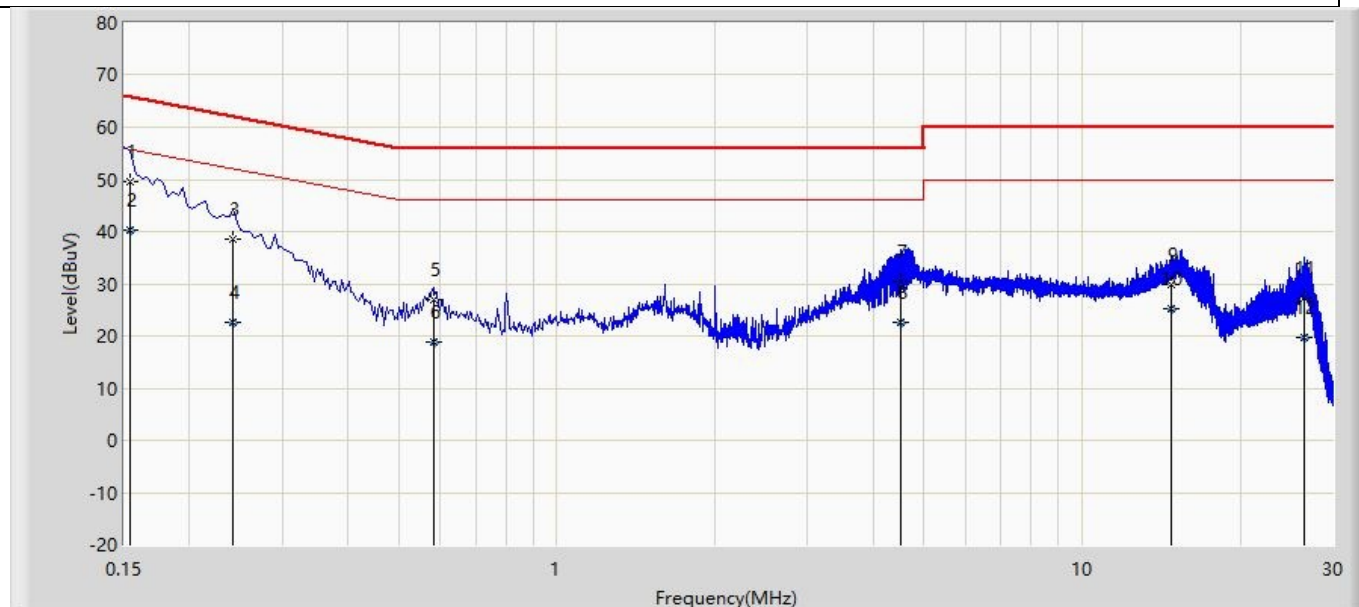

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.154	49.550	39.982	-16.231	65.781	9.568	QP
2	*	0.154	40.360	30.792	-15.421	55.781	9.568	AV
3		0.242	38.684	29.099	-23.343	62.027	9.585	QP
4		0.242	22.649	13.064	-29.378	52.027	9.585	AV
5		0.582	27.087	17.455	-28.913	56.000	9.632	QP
6		0.582	18.821	9.189	-27.179	46.000	9.632	AV
7		4.514	30.456	20.671	-25.544	56.000	9.785	QP
8		4.514	22.556	12.771	-23.444	46.000	9.785	AV
9		14.722	29.775	19.633	-30.225	60.000	10.142	QP
10		14.722	25.177	15.034	-24.823	50.000	10.142	AV
11		26.474	27.277	16.820	-32.723	60.000	10.456	QP
12		26.474	19.771	9.315	-30.229	50.000	10.456	AV

Profile: 22A0568R	Page No.: 100
Engineer: Yu Liu	
Site: TR1	Time: 2022/11/21 - 21:01
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: SC2021	Power: AC 120V/60Hz
Note: Mode1:Transmit at 2402MHz by BLE	

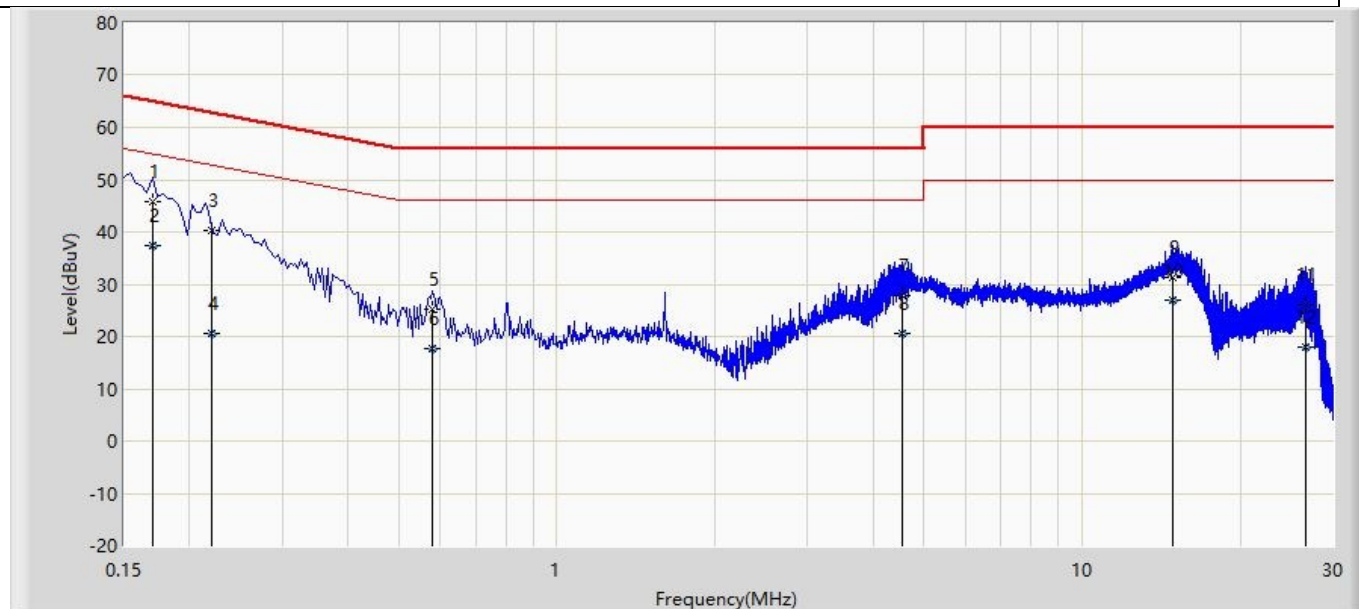

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.170	45.810	36.227	-19.150	64.960	9.583	QP
2	*	0.170	37.290	27.707	-17.670	54.960	9.583	AV
3		0.220	40.295	30.706	-22.537	62.832	9.589	QP
4		0.220	20.669	11.080	-32.163	52.832	9.589	AV
5		0.578	25.123	15.487	-30.877	56.000	9.636	QP
6		0.578	17.685	8.049	-28.315	46.000	9.636	AV
7		4.530	27.832	18.041	-28.168	56.000	9.792	QP
8		4.530	20.598	10.807	-25.402	46.000	9.792	AV
9		14.862	31.381	21.254	-28.619	60.000	10.127	QP
10		14.862	26.914	16.786	-23.086	50.000	10.127	AV
11		26.546	26.121	15.727	-33.879	60.000	10.394	QP
12		26.546	17.845	7.451	-32.155	50.000	10.394	AV

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.209	
Restricted Bands of operationfor FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			
Restricted Bands of operationfor IC			
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 -88	100	40	3 _(Note 2)
88-216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

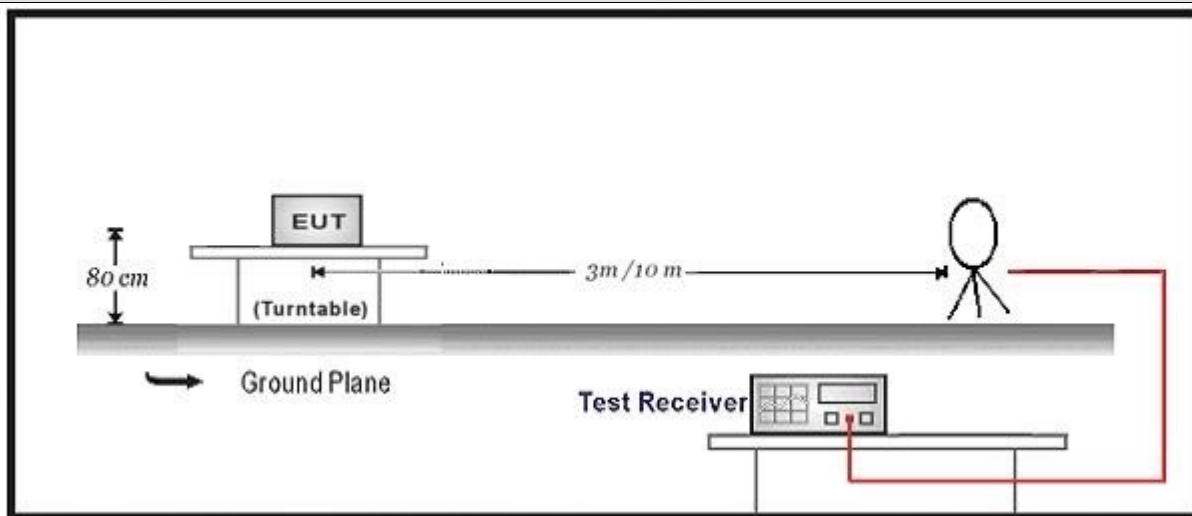

30MHz-1GHz Test Setup:

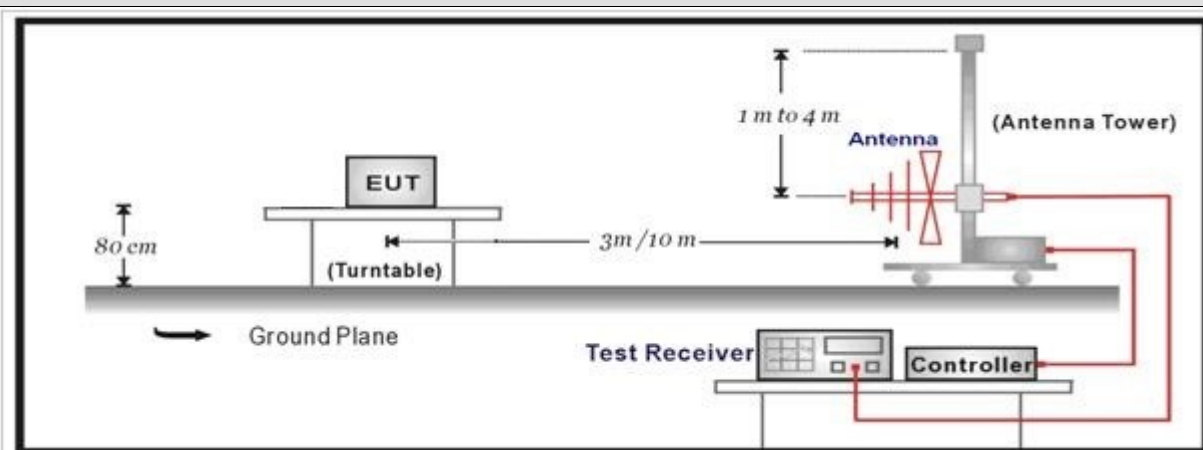

Above 1GHz Test Setup:

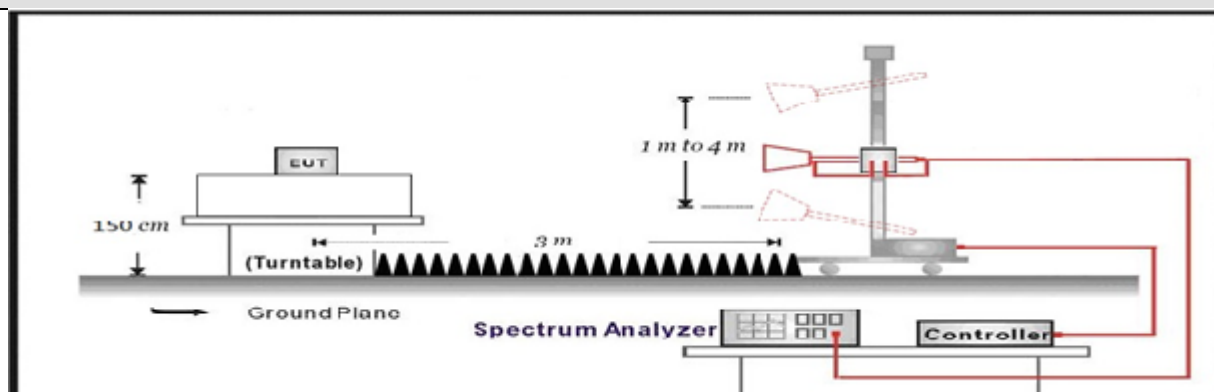


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 22A0568R	Page No.: 15
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2402MHz by BLE	

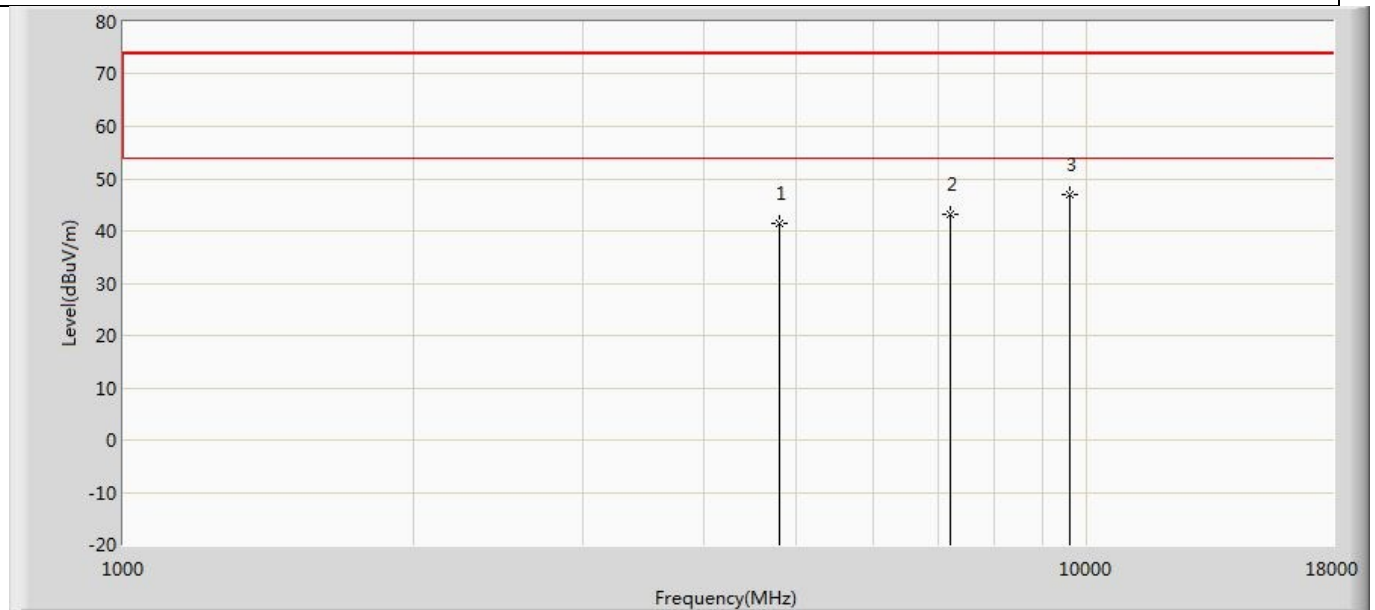


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.561	56.541	-32.439	74.000	-14.981	PK
2		7206.000	43.264	54.084	-30.736	74.000	-10.820	PK
3	*	9608.000	47.058	55.152	-26.942	74.000	-8.094	PK

Profile: 22A0568R	Page No.: 16
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2402MHz by BLE	

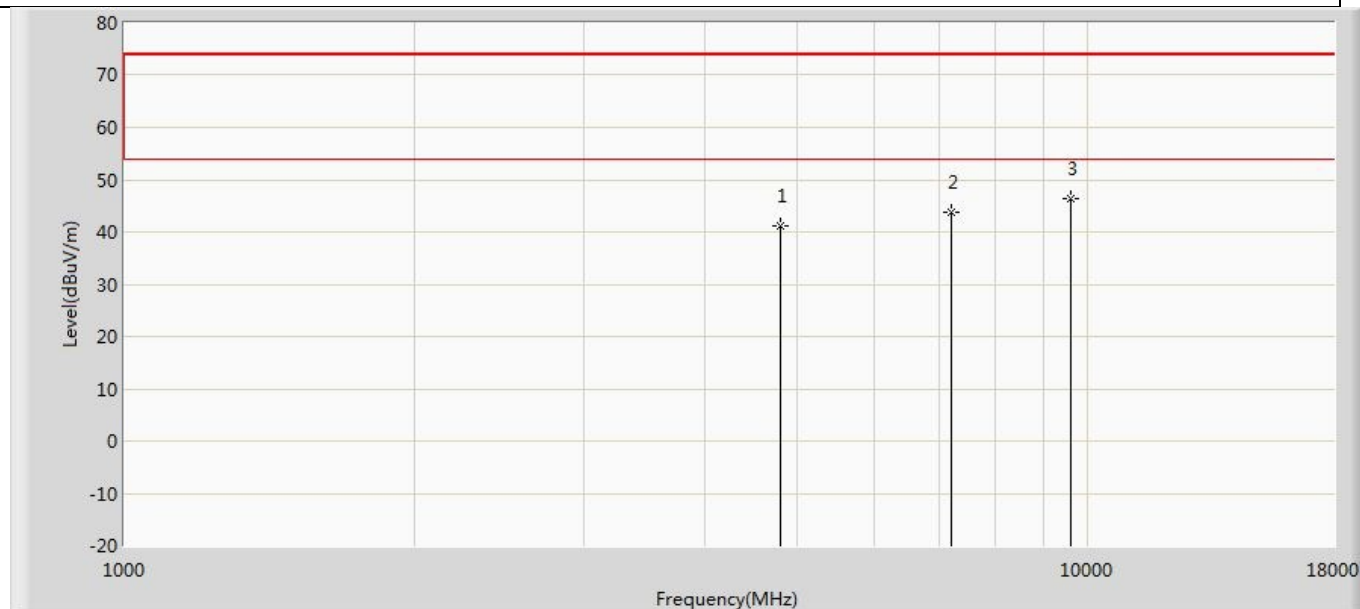


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.057	56.037	-32.943	74.000	-14.981	PK
2		7206.000	43.898	54.718	-30.102	74.000	-10.820	PK
3	*	9608.000	46.456	54.550	-27.544	74.000	-8.094	PK

Profile: 22A0568R	Page No.: 17
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2440MHz by BLE	

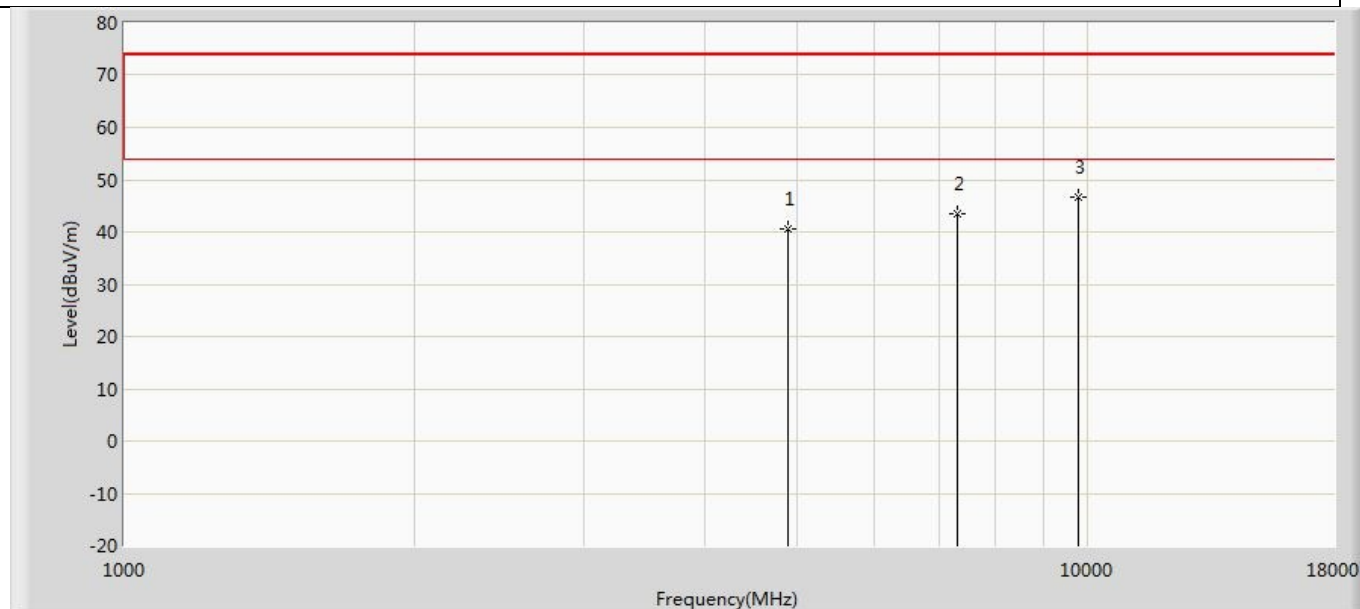


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.711	55.311	-33.289	74.000	-14.600	PK
2		7320.000	43.510	54.378	-30.490	74.000	-10.868	PK
3	*	9760.000	46.609	54.406	-27.391	74.000	-7.797	PK

Profile: 22A0568R	Page No.: 18
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2440MHz by BLE	

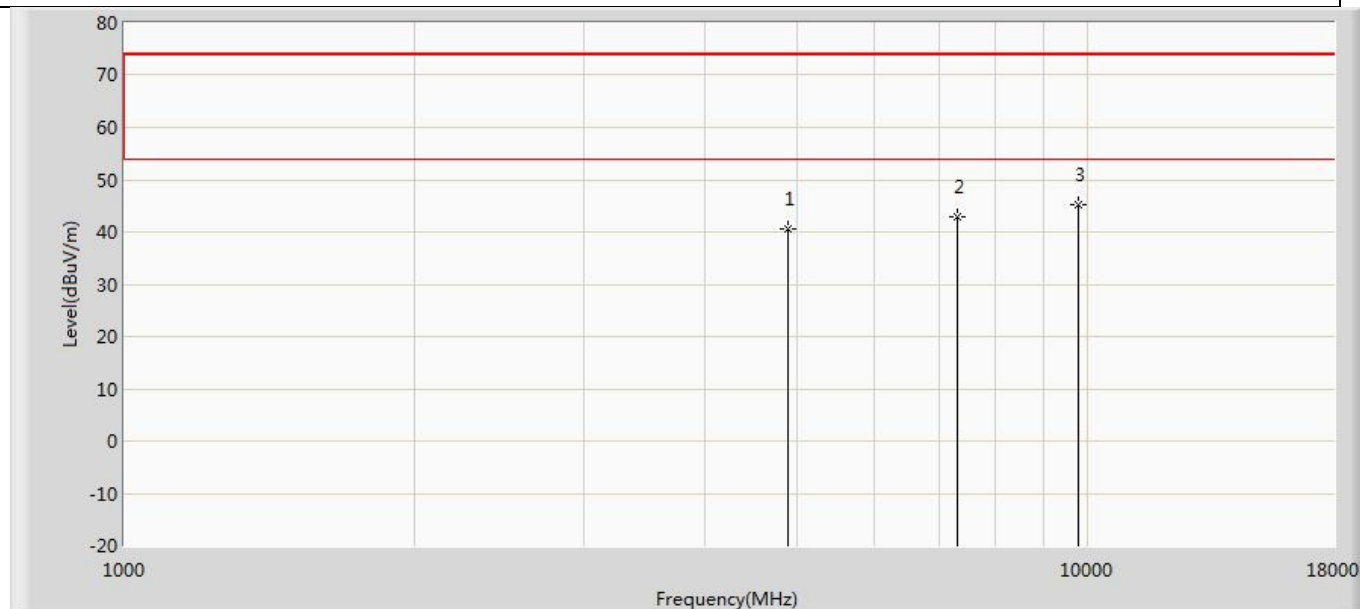


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.493	55.093	-33.507	74.000	-14.600	PK
2		7320.000	42.914	53.782	-31.086	74.000	-10.868	PK
3	*	9760.000	45.218	53.015	-28.782	74.000	-7.797	PK

Profile: 22A0568R	Page No.: 19
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2480MHz by BLE	

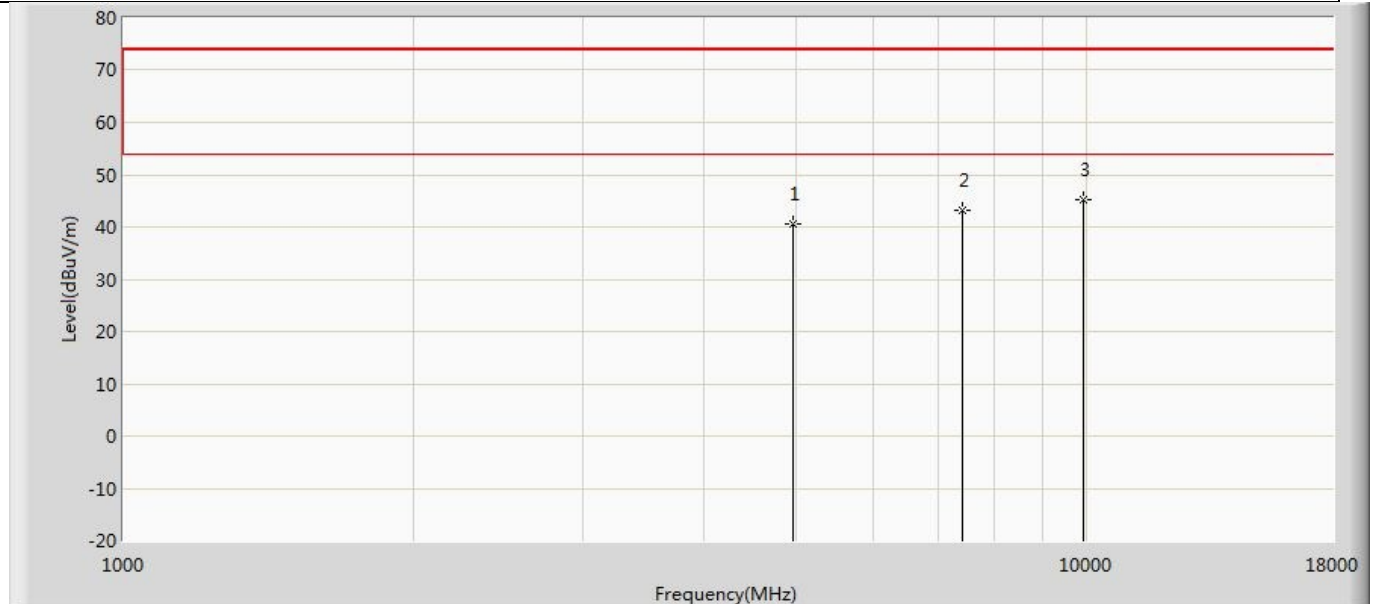

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.548	55.112	-33.452	74.000	-14.565	PK
2		7440.000	43.085	53.816	-30.915	74.000	-10.731	PK
3	*	9920.000	45.341	52.918	-28.659	74.000	-7.578	PK

Profile: 22A0568R	Page No.: 20
Engineer: Noah	
Site: AC5	Time: 2022/11/20 - 22:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2480MHz by BLE	

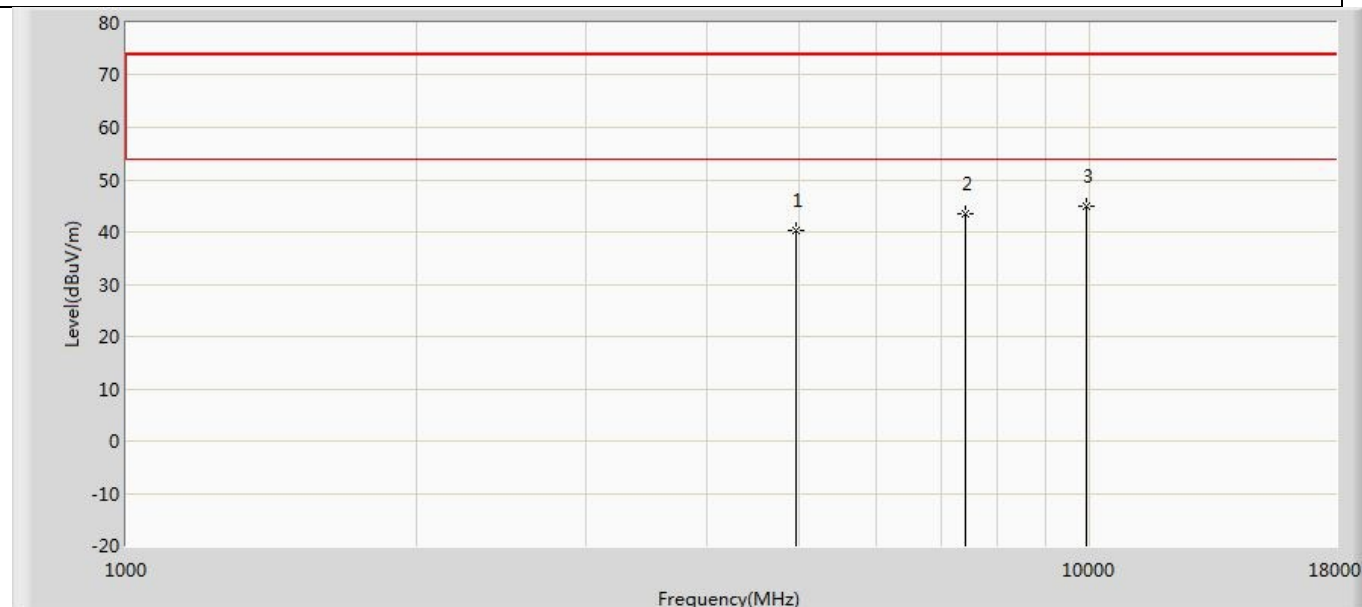


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.181	54.745	-33.819	74.000	-14.565	PK
2		7440.000	43.563	54.294	-30.437	74.000	-10.731	PK
3	*	9920.000	44.910	52.487	-29.090	74.000	-7.578	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for both peak and average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. The points in graph are the highest data in test frequency range.
5. We use band filter 2400-2483.5Mhz, starting frequency 1GHz, ending frequency 6GHz, we also use high pass filter 3Ghz-18Ghz, the plots in the report is composite.


The worst case of Radiated Emission below 1GHz:

Profile: 22A0568R	Page No.: 44
Engineer: Yu Liu	
Site: AC3	Time: 2022/11/21 - 20:27
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode 1: Transmit at 2440MHz by BLE	

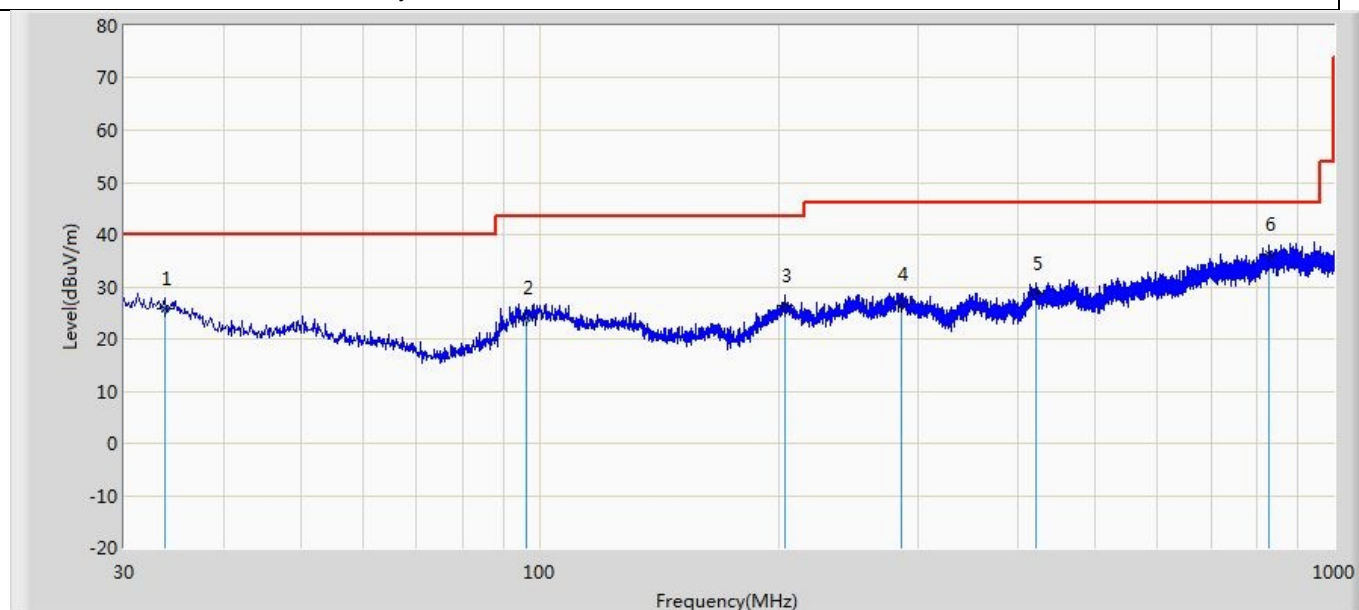

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		33.759	25.800	2.875	-14.200	40.000	22.925	QP
2		96.081	24.086	3.827	-19.414	43.500	20.258	QP
3		203.994	26.518	3.037	-16.982	43.500	23.481	QP
4		286.080	26.672	1.572	-19.328	46.000	25.100	QP
5		422.122	28.748	2.235	-17.252	46.000	26.513	QP
6	*	828.674	36.087	3.390	-9.913	46.000	32.697	QP

Profile: 22A0568R	Page No.: 45
Engineer: Yu Liu	
Site: AC3	Time: 2022/11/21 - 20:30
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode 1: Transmit at 2440MHz by BLE	

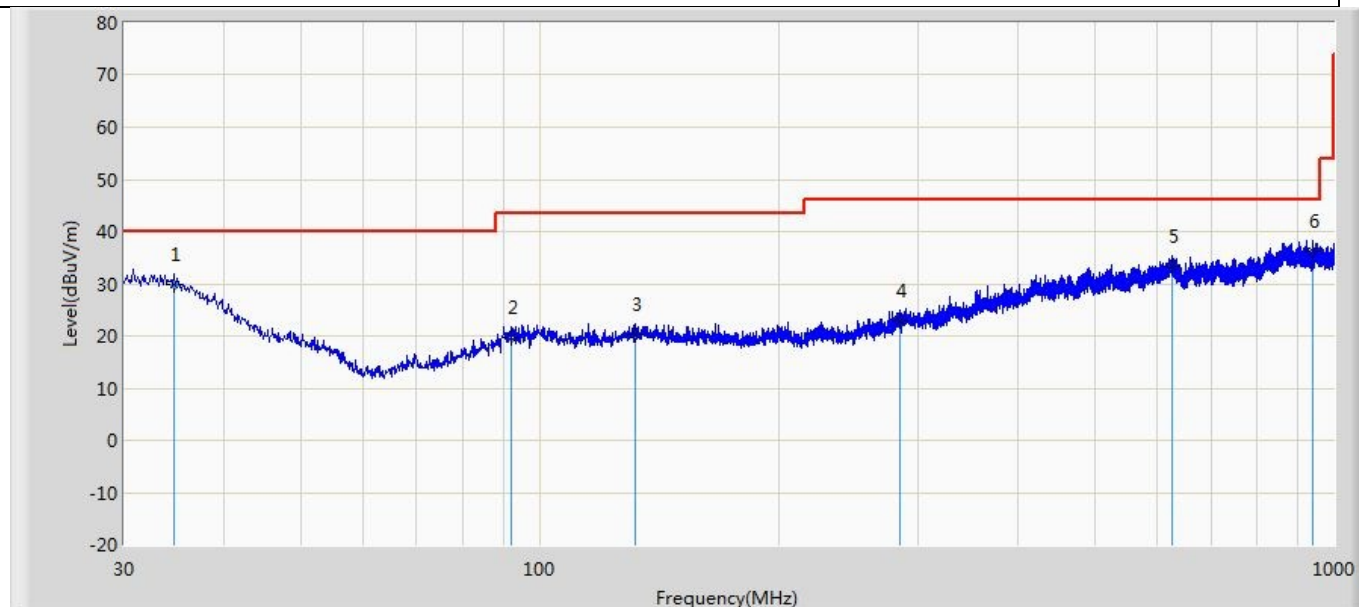

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		34.607	29.850	2.800	-10.150	40.000	27.050	QP
2		92.201	19.829	5.746	-23.671	43.500	14.083	QP
3		131.971	20.296	2.669	-23.204	43.500	17.626	QP
4		284.261	22.920	2.557	-23.080	46.000	20.363	QP
5		625.459	33.357	2.732	-12.643	46.000	30.625	QP
6	*	940.466	36.335	4.325	-9.665	46.000	32.010	QP

Note:


1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

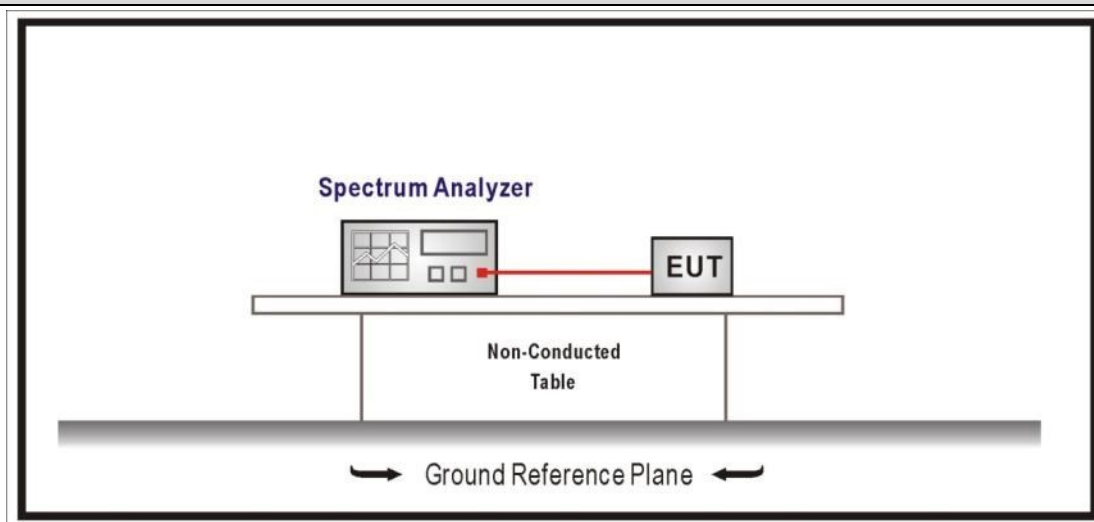
4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒	ANSI C63.10	11.11.1	General
☒	ANSI C63.10	11.11.2	Reference level measurement
☒	ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data


Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	3.44	2400	-55.12	58.56	≥20	Pass
	39	2480	4.09	2500	-56.25	60.34	≥20	Pass

Note: The emissions in non-restricted frequency bands as below:

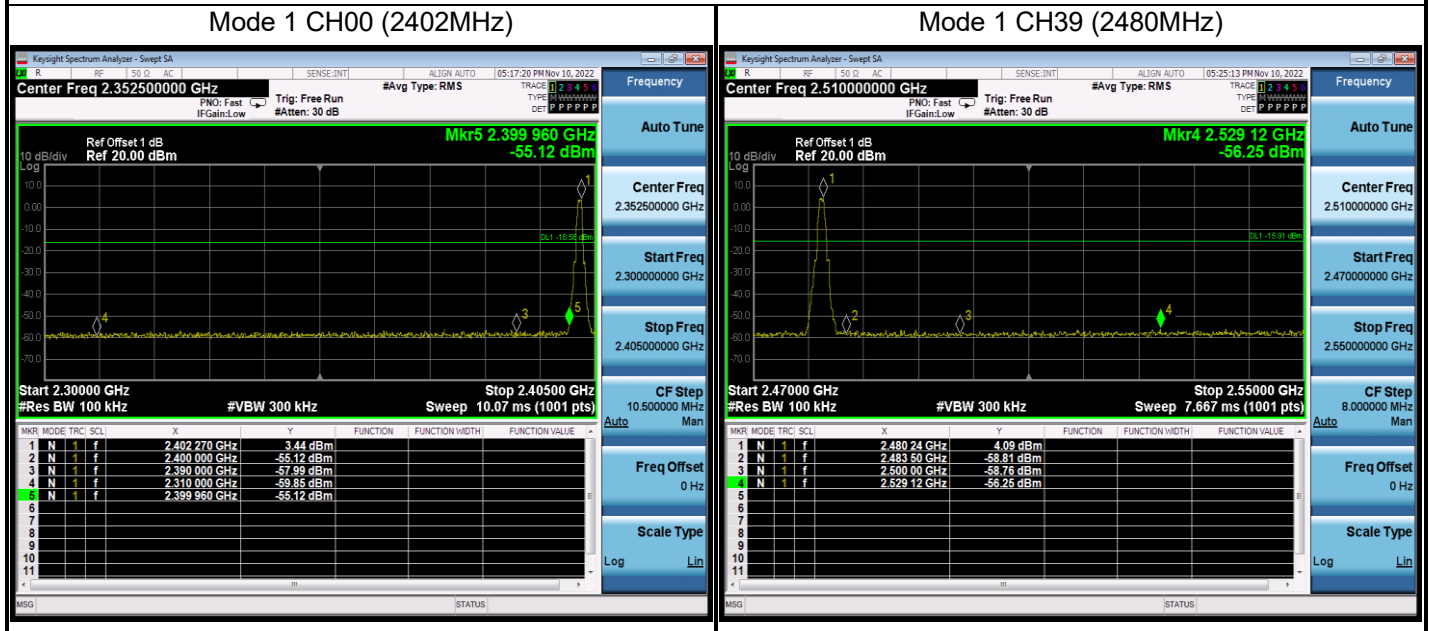


The data of entire corresponding spectrum:


Mode 1 CH00 (2402MHz)

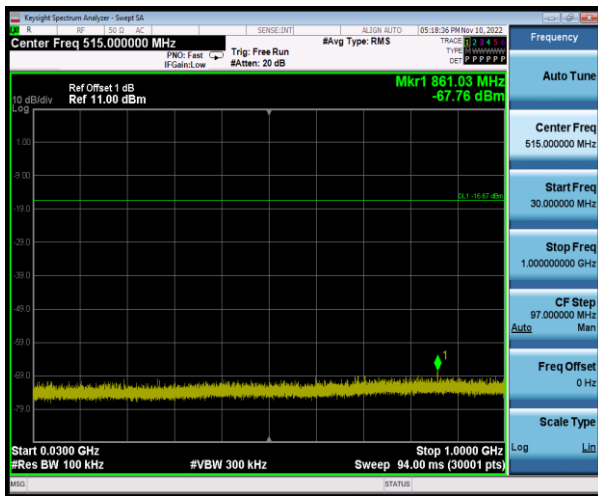


Mode 1 CH00 (2402MHz)

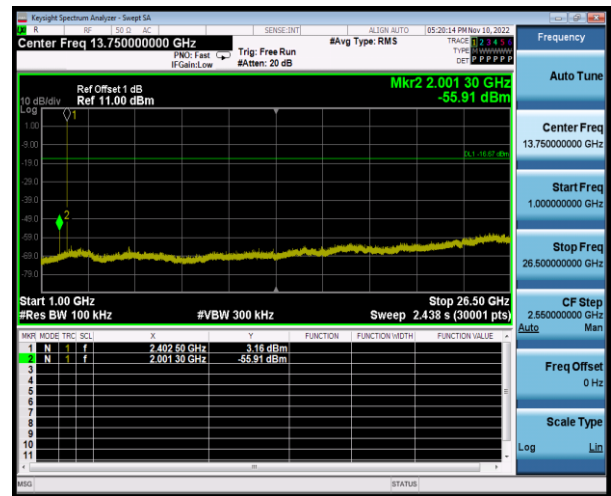


Mode 1 CH19 (2440MHz)

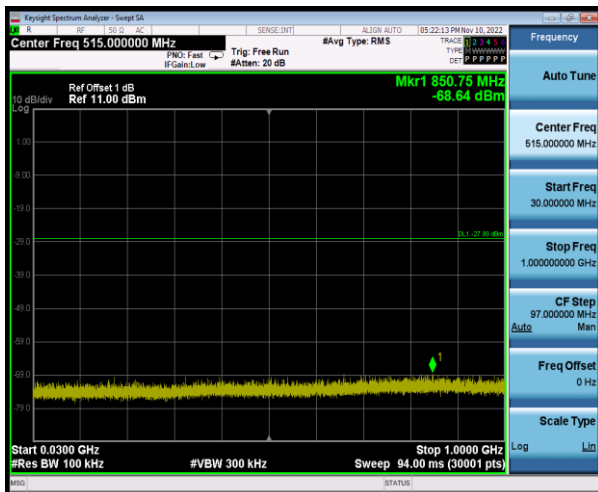


Mode 1 CH19 (2440MHz)

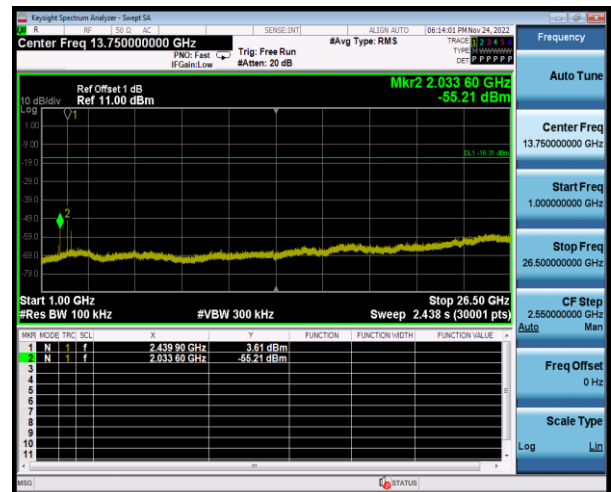

Mode 1 CH39 (2480MHz)

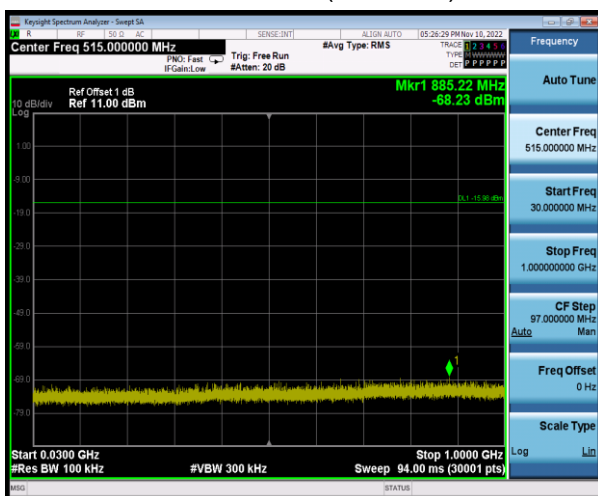


Mode 1 CH39 (2440MHz)

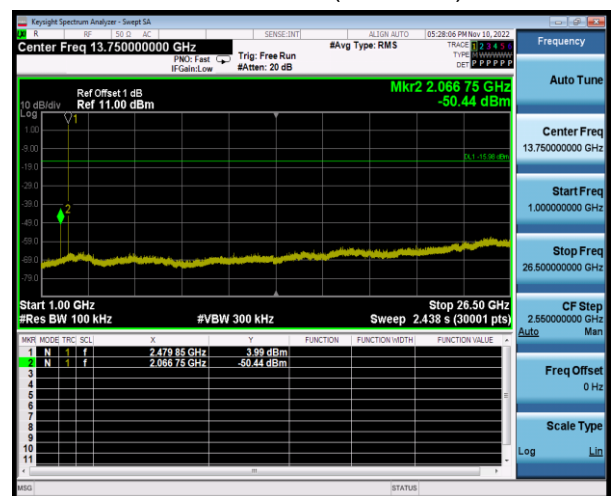

4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

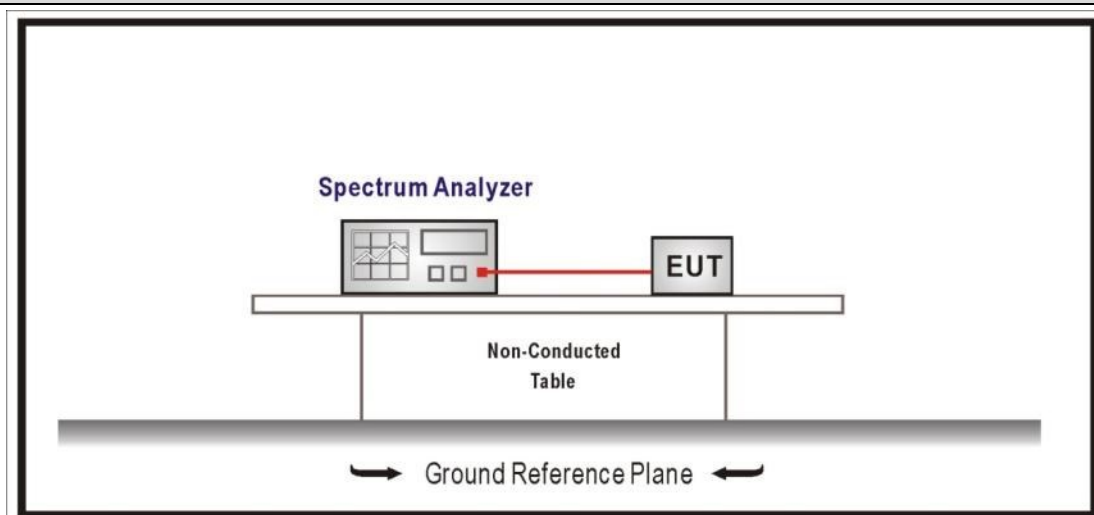4.4.2 Test Setup**4.4.3 Test Procedure**


References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.4.4 Test Data

Test Mode	Tx On (us)	Tx Off (us)	Tx On + Tx Off (us)	Duty Cycle (%)
Mode 1	390	240	630	61.9

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Mode 1 CH19 2440MHz

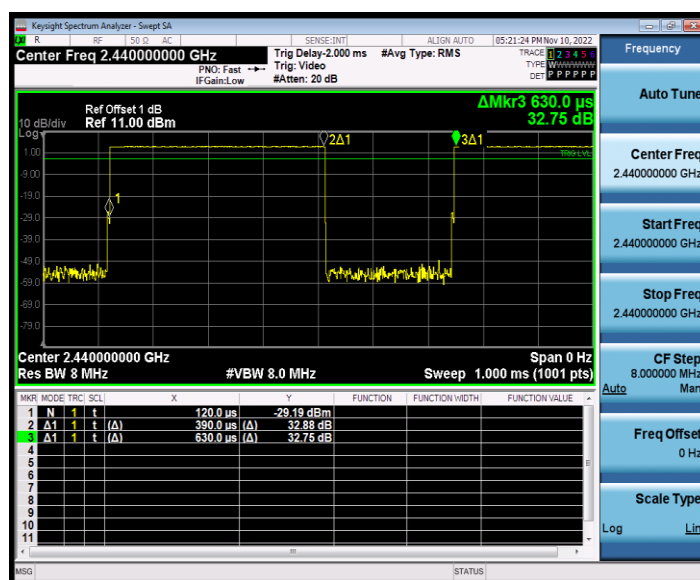

4.5 Band Edge


VERDICT: PASS

4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

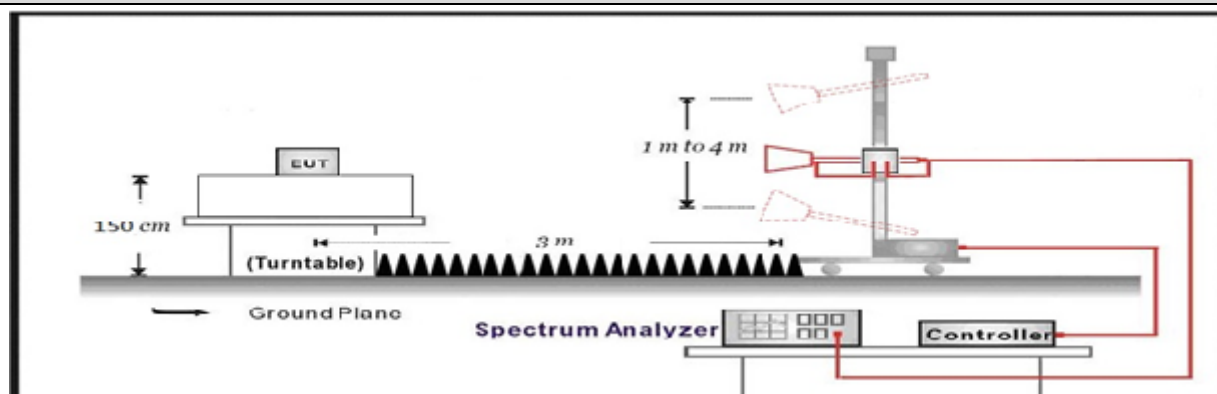


4.5.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.2	Antenna-port conducted measurements
☐	☐ ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
☒	☒ ANSI C63.10	11.12.2.4	Peak power measurement procedure
☒	☒ ANSI C63.10	11.12.2.5	Average power measurement procedures


4.5.4 Test Data

Profile: 22A0568R	Page No.: 1
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1:Transmit at 2402MHz by BLE	

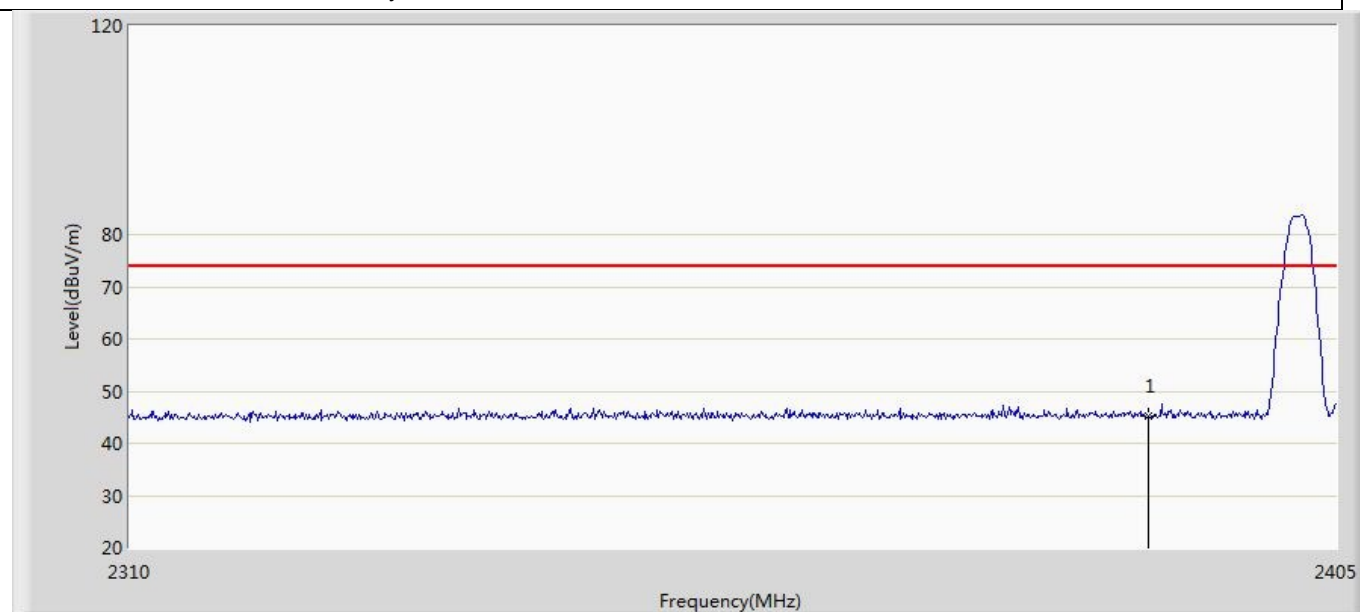


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.233	11.149	-28.767	74.000	34.084	PK

Profile: 22A0568R	Page No.: 2
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2402MHz by BLE	

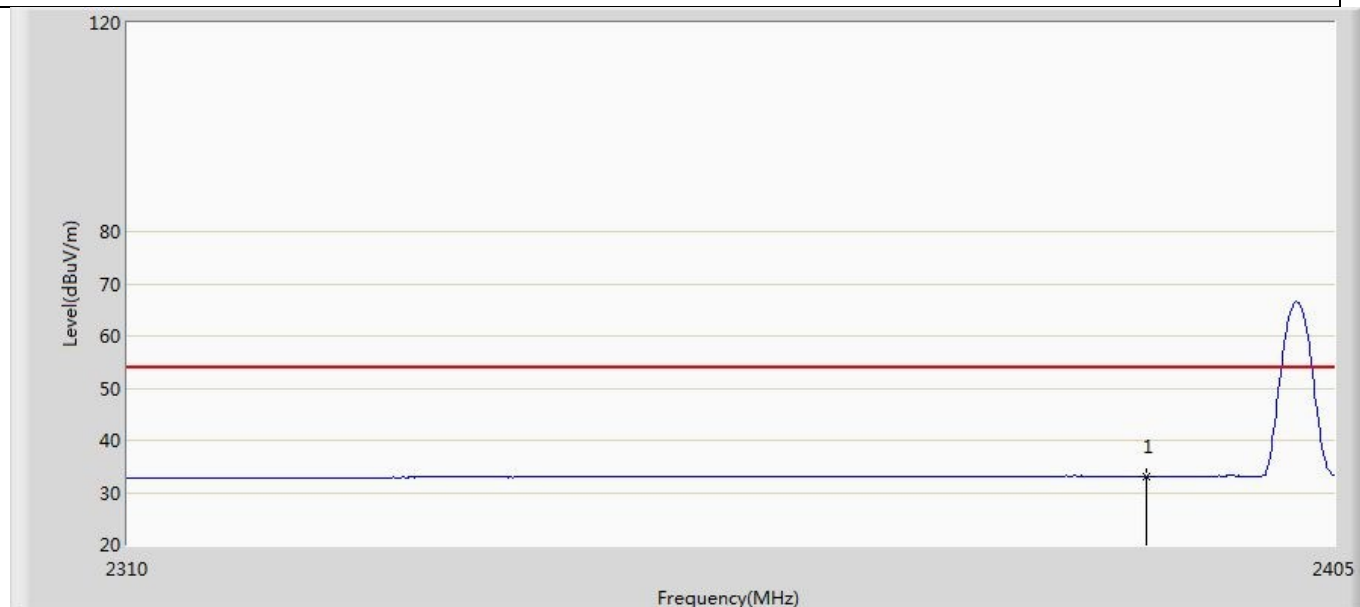


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.118	-0.966	-20.882	54.000	34.084	AV

Profile: 22A0568R	Page No.: 3
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2402MHz by BLE	

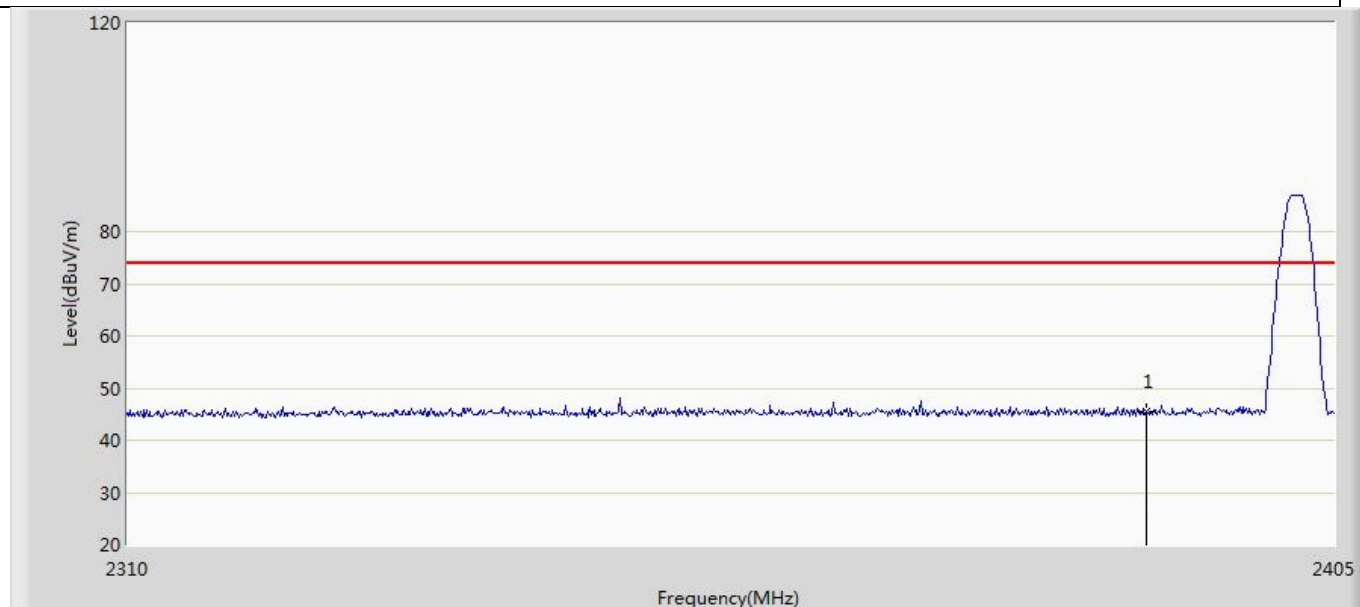


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.530	11.446	-28.470	74.000	34.084	PK

Profile: 22A0568R	Page No.: 4
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2402MHz by BLE	

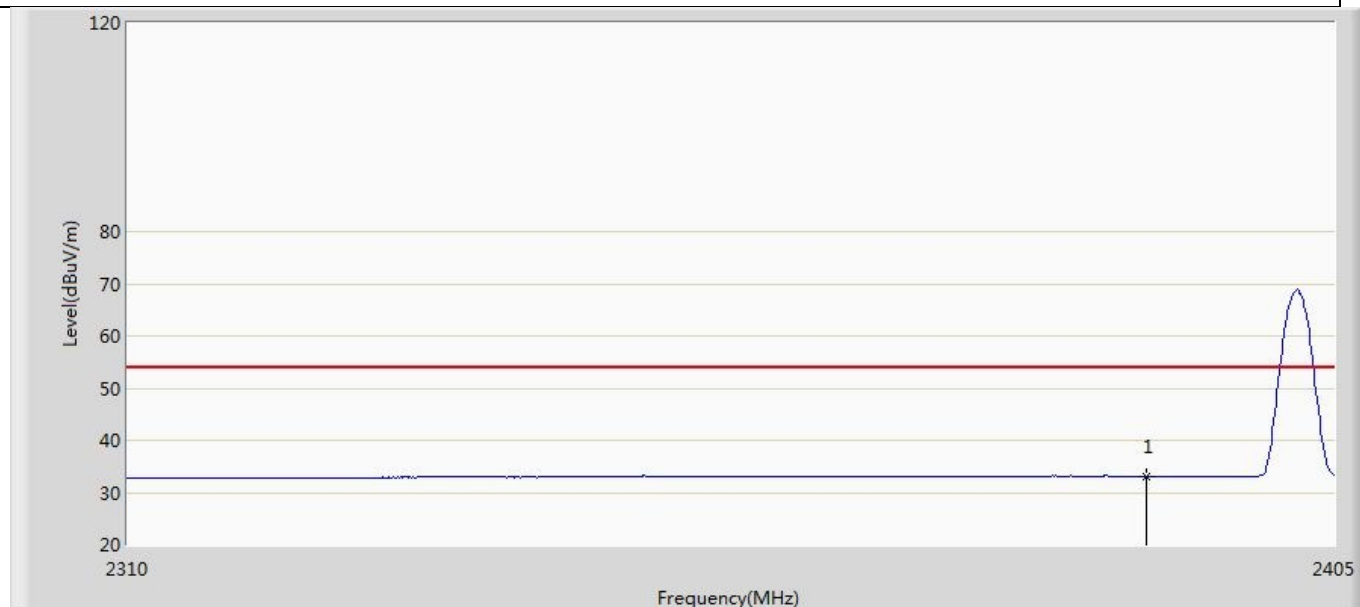


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.074	-1.010	-20.926	54.000	34.084	AV

Profile: 22A0568R	Page No.: 5
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2480MHz by BLE	

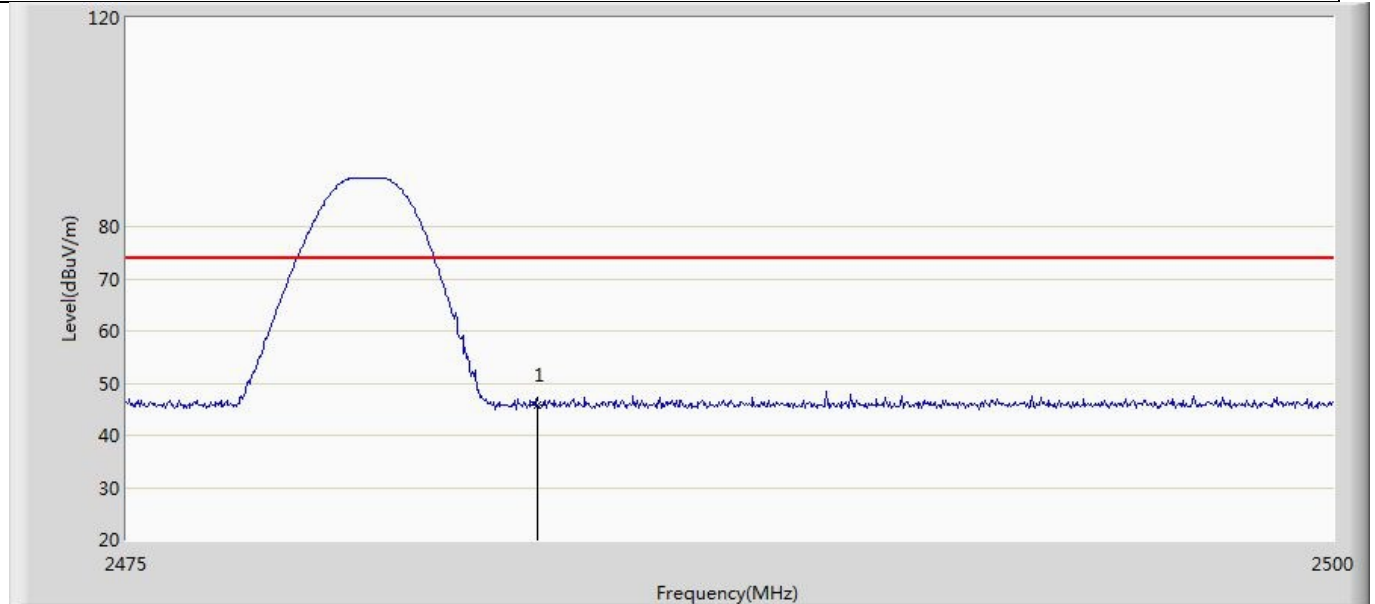


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.851	11.360	-28.149	74.000	34.491	PK

Profile: 22A0568R	Page No.: 6
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2480MHz by BLE	

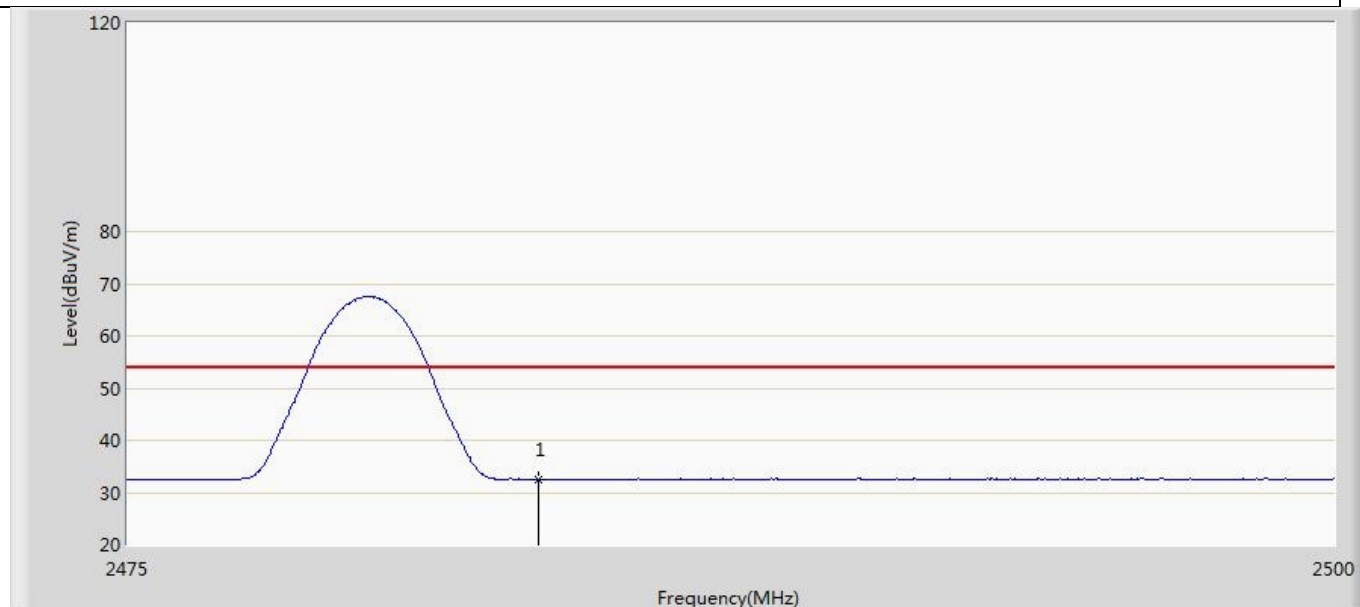


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	32.525	-1.966	-21.475	54.000	34.491	AV

Profile: 22A0568R	Page No.: 7
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2480MHz by BLE	

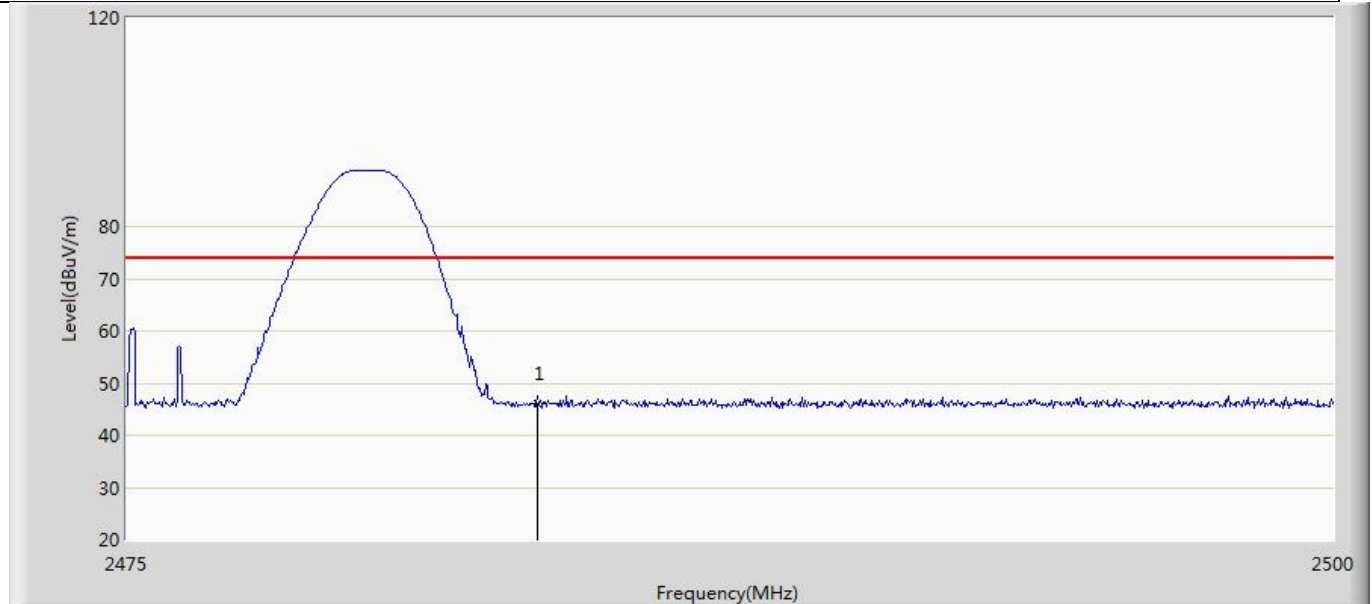

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.074	11.583	-27.926	74.000	34.491	PK

Profile: 22A0568R	Page No.: 8
Engineer: Yu Liu	
Site: AC5	Time: 2022/11/20 - 22:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2021	Power: AC 120V/60HZ
Note: Mode1: Transmit at 2480MHz by BLE	

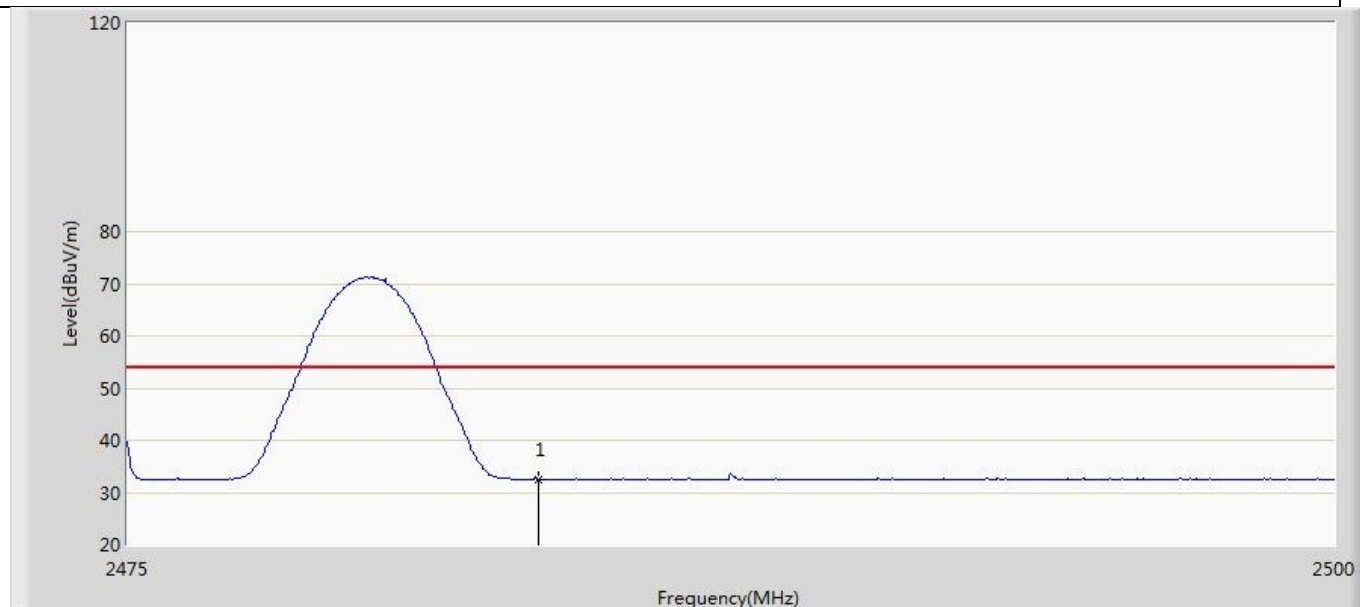

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	32.521	-1.970	-21.479	54.000	34.491	AV


Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

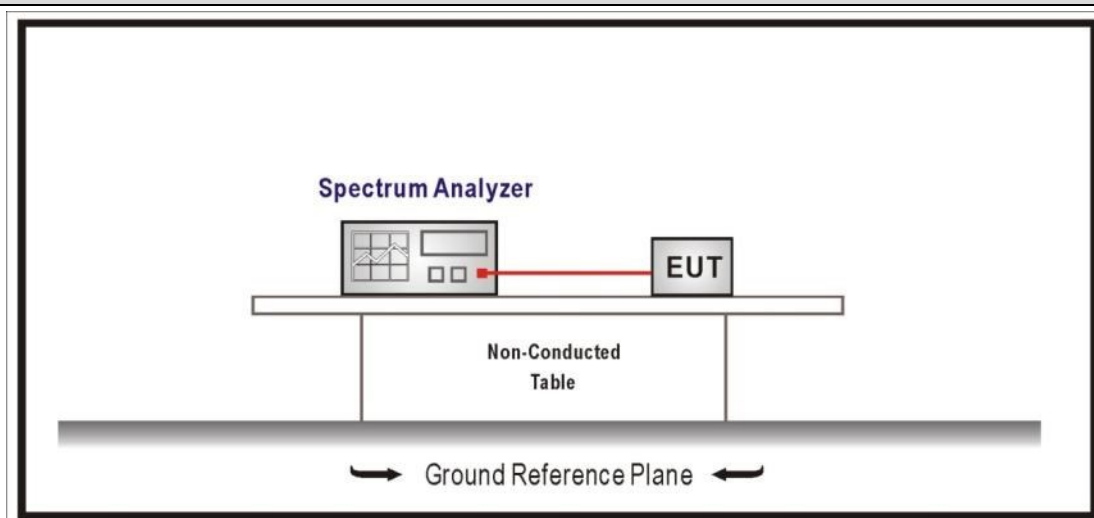4.6.2 Test Setup**4.6.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2

4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (KHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	00	2402	704	1.0628	>500	Pass
	19	2440	676	1.0611	>500	Pass
	39	2480	696	1.0596	>500	Pass

Note : The worst case of Occupied Bandwidth as below:


99% Occupied Bandwidth

Mode 1 CH39 (2480MHz)



6dB Occupied Bandwidth

Mode 1 CH19 (2440MHz)

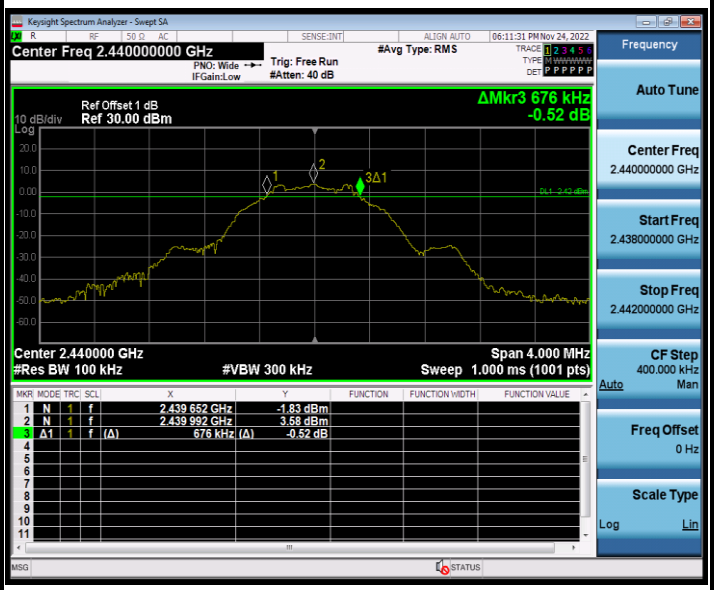


4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	Pout ≤ 30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)
☐	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3
☐	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)
☐	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

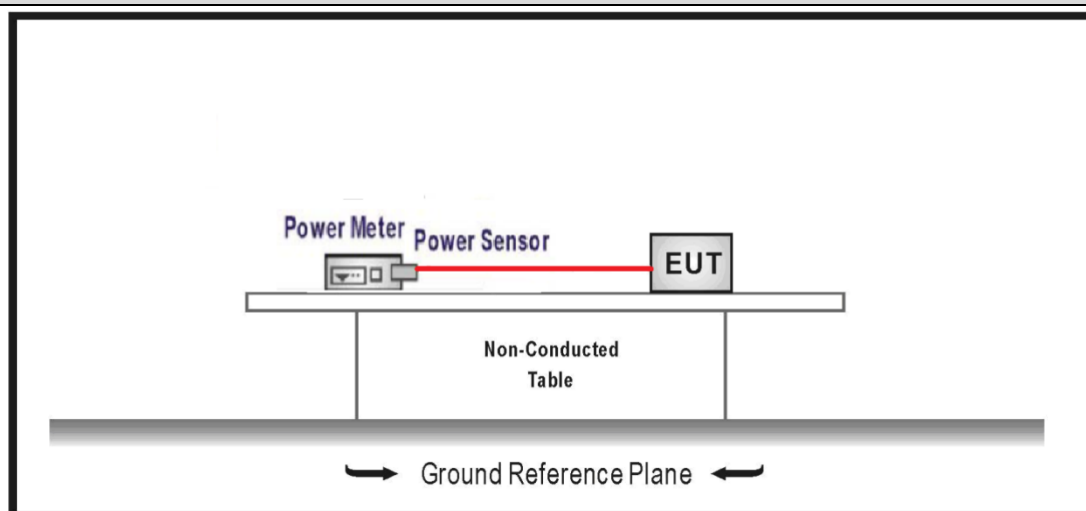4.7.2 Test Setup

4.7.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
	☒	ANSI C63.10		11.9.1 Maximum peak conducted output power
		☒	ANSI C63.10	11.9.1.1 RBW $\geq$ DTS bandwidth
		☐	ANSI C63.10	11.9.1.2 Integrated band power method
		☐	ANSI C63.10	11.9.1.3 PKPM1 Peak power meter method
	☐	ANSI C63.10		11.9.2 Maximum conducted (average) output power
		☐	ANSI C63.10	11.9.2.2 Measurement using a spectrum analyzer (SA)
		☐	ANSI C63.10	11.9.2.2.2 Method AVGSA-1(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.3 Method AVGSA-1A(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-2(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-2A(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-3
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-3A
		☐	ANSI C63.10	11.9.2.3 Measurement using a power meter (PM)
		☐	ANSI C63.10	11.9.2.3.1 Method AVGPM
		☐	ANSI C63.10	11.9.2.3.2 Method AVGPM-G

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	00	2402	4.17	6.67	≤30	≤36	Pass
	19	2440	4.51	7.01	≤30	≤36	Pass
	39	2480	4.86	7.36	≤30	≤36	Pass

4.8 Power Density**VERDICT: PASS****4.8.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
-----------------	---

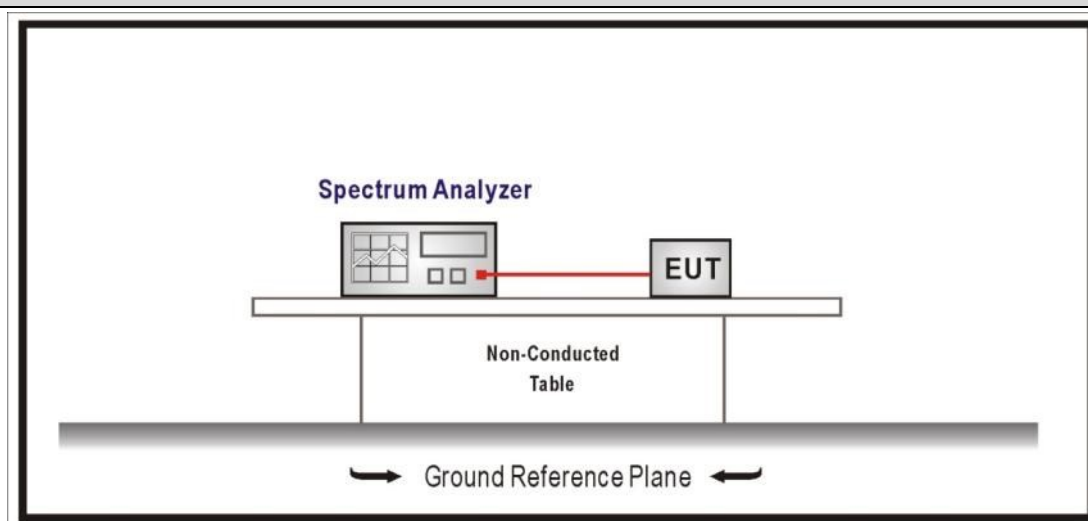Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.8.2 Test Setup****4.8.3 Test Procedure**


	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-10.41	≤8	Pass
	19	2440	-10.03	≤8	Pass
	39	2480	-9.69	≤8	Pass

Note : The worst case of PSD as below:

Mode1 CH39(2480MHz)

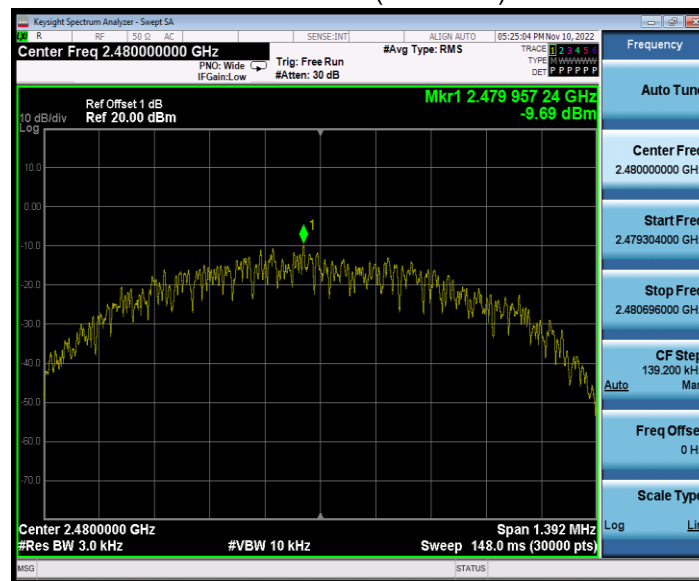

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____