

TEST REPORT

Report No. : CHTEW21060156 **Report verification:** 

Project No. : SHT2106044801EW

FCC ID : XX6SC2128W

Applicant's name : Sepura Limited

Address : 9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK

Manufacturer : Plexus

Address : Oradea, Eugeniu Carada Street, No. 2-4, Oradea 410610 Bihor, Romania

Test item description : SC21 Series Hand-portable radio

Trade Mark : Sepura

Model/Type reference : SC2128

Listed Model(s) : SC2128

Standard : FCC 47 CFR Part2.1093
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Nov.13, 2020

Date of testing : Nov.14, 2020- Jun.15, 2021

Date of issue : Jun.16, 2021

Result : PASS

Compiled by
(position+printed name+signature) : File administrators: Patrick Qiu



Supervised by
(position+printed name+signature) : Test Engineer: Patrick Qiu



Approved by
(position+printed name+signature) : Manager: Hans Hu



Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1. Test Standards and Report version</u>	3
1.1. Test Standards	3
1.2. Report version	3
<u>2. Summary</u>	4
2.1. Client Information	4
2.2. Product Description	4
2.3. Accessory Equipment information	5
2.4. Test frequency list	6
2.5. Test Configuration and Modes of Operation	7
<u>3. Test Environment</u>	8
3.1. Test laboratory	8
3.2. Test Facility	8
3.3. Environmental conditions	8
<u>4. Equipments Used during the Test</u>	9
<u>5. Measurement Uncertainty</u>	11
<u>6. SAR Measurements System Configuration</u>	12
6.1. SAR Measurement Set-up	12
6.2. DASY5 E-field Probe System	13
6.3. Phantoms	14
6.4. Device Holder	14
<u>7. SAR Test Procedure</u>	15
7.1. Scanning Procedure	15
7.2. Data Storage and Evaluation	17
<u>8. Position of the wireless device in relation to the phantom</u>	19
8.1. Head Position	19
8.2. Front-of-face	20
8.3. Body Position	20
<u>9. System Check</u>	21
9.1. Tissue Dielectric Parameters	21
9.2. SAR System Check	22
<u>10. SAR Exposure Limits</u>	26
<u>11. Conducted Power Measurement Results</u>	27
<u>12. Maximum Tune-up Limit</u>	29
<u>13. SAR Measurement Results</u>	30
<u>14. Simultaneous Transmission analysis</u>	36
<u>15. Test Setup Photos</u>	37
<u>16. External Photos of the EUT</u>	44

1 . **Test Standards and Report version**

1.1. **Test Standards**

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency Radiation Exposure Evaluation:Portable Devices

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB 865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 643646 D01:SAR Test for PTT Radios v01r03](#): SAR Test Reduction Considerations for Occupational PTT Radios

[KDB 248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

1.2. **Report version**

Revision No.	Date of issue	Description
N/A	2021-06-16	Original

2. Summary

2.1. Client Information

Applicant:	Sepura Limited
Address:	9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK
Manufacturer:	Plexus
Address:	Oradea, Eugeniu Carada Street, No. 2-4, Oradea 410610 Bihor, Romania

2.2. Product Description

Name of EUT:	SC21 Series Hand-portable radio				
Trade mark:	Sepura				
Model/Type reference:	SC2128				
Listed model(s):	SC2128				
Accessories	300-01923, 300-01922, 300-01915, 300-01916, 300-01917,				
Device Category:	Portable				
RF Exposure Environment:	TETRA	Occupational/Controlled			
	WIFI&BT	General Population/Uncontrolled			
Power supply:	DC 7.4V				
HTW test sample No.:	1PR001826GMY4JX, 1PR001826GMY4QT				
Hardware version:	Production Unit				
Software version:	200171707367				
Device Dimension:	Overall (Length x Width x Thickness): 120x60x20mm Antenna(Length):50mm				

Maximum SAR Value

Separation Distance:	Front-of-face:	25mm		
	Body-worn:	0mm		
Maximum SAR Value(1g):	Test location:	TETRA	WiFi	Ratios
	Head:	3.407 W/kg	0.206 W/kg	0.555
	Front-of-face:	1.375 W/kg	0.033 W/kg	0.193
	Body-worn:	2.855 W/kg	0.102 W/kg	0.421

TETRA specification

Operation Frequency Range:	806~870MHz
Rated Output Power:	35dBm
Modulation Type:	$\pi/4$ DQPSK
Channel Separation:	25kHz
Antenna Type:	350-00007 Extended Helical Antenna 806-870MHz

WIFI 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Antenna Type:	Ceramic Chip
Bluetooth-EDR	
Modulation:	GFSK $\pi/4$ QPSK 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Ceramic Chip
<i>Remark:</i>	
1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.	
2. EUT supports duplex, with duty cycle calculated at 100%.	

2.3. Accessory Equipment information

Battery 1	
Model No. :	300-01853
Capacity:	1880mAh
Power supply:	DC 7.4V
Battery 2	
Model No. :	300-01852
Capacity:	1160mAh
Power supply:	DC 7.4V

2.4. Test frequency list

When the frequency channels required for SAR testing are not specified, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.

$$N_c = \text{Round} \left\{ \left[100 \left(f_{\text{high}} - f_{\text{low}} \right) / f_c \right]^{0.5} \times \left(f_c / 100 \right)^{0.2} \right\},$$

N_c is the number of test channels, rounded to the nearest integer,
 f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
 f_c is the mid-band channel frequency,
all frequencies are in MHz.

Operation Frequency		Test Frequency number
Start Frequency	Stop Frequency	
806	825	3
851	870	3

Mode	Operation Frequency	Test Channel	Test Frequency (MHz)
			TX
TETRA	806~870MHz	CH1	806.0
		CH2	815.5
		CH3	825.0
		CH4	851.0
		CH5	860.5
		CH6	870.0

2.5. Test Configuration and Modes of Operation

The testing was performed with two battery variants (1160 mAh and 1880 mAh) which were supplied and manufactured by Sepura Limited. The batteries were fully charged before each measurement and there were no external connections.

For head SAR assessment, Tetra testing was performed with the EUT in the declared normal position of operation for the 806 MHz – 825 MHz and 851 MHz – 870 MHz frequency bands at the maximum specified power level on the channels which yielded the highest measured output power. The EUT was placed against a Specific Anthropomorphic Mannequin phantom. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified in KDB 865665. Testing was performed at both the left and right ear of the phantom at both handset positions stated in the applied specification using the 1880mAh battery. For the position and antenna which yielded the highest SAR level, a repeated scan was performed using the 1160mAh battery.

For front of face SAR assessment, Tetra testing was performed with the device in the intended normal position of operation for the 806 MHz – 825 MHz and 851 MHz – 870 MHz frequency bands at maximum power on the channels which yielded the highest measured output power. The handset was placed at a distance of 25 mm from the bottom of the flat phantom for all front of face testing. The phantom was filled to a depth of 150 mm with the appropriate head simulant liquid. The dielectric properties were in accordance with the requirements specified in KDB 865664 D01. Testing was performed using the both battery variants For body SAR assessment, Tetra testing was performed for the 806 MHz – 825 MHz and 851 MHz – 870 MHz frequency bands at the maximum specified power levels on the channels which yielded the highest measured output power, using various body worn accessories, of which all contain metal components. Body SAR testing was carried out with the device inside the holsters or with a belt clip attached at 0 mm separation distance between the accessory and the Elliptical Flat Phantom The separation distances caused by each accessory configuration is tabulated below.

Body Accessory	Battery	Separation distance EUT to phantom (mm)	Separation distance antenna to phantom (mm)
300-01923(Large Belt Clip)	300-01853(1880mAh)	20.0	25
300-01922(Shirt/Pocket Clip)	300-01853(1880mAh)	15.0	20.0
300-01915(Lightweight Leather Case with Belt Clip)	300-01853(1880mAh)	15.0	20
300-01916(Nylon Holster with Belt Loop)	300-01853(1880mAh)	5.0	10
300-01917(Leather Case with Klick Fast Stud)	300-01853(1880mAh)	15.0	20
300-01923(Large Belt Clip)	300-01852(1160mAh)	20.0	25
300-01922(Shirt/Pocket Clip)	300-01852(1160mAh)	15.0	20.0
300-01915(Lightweight Leather Case with Belt Clip)	300-01852(1160mAh)	15.0	20
300-01916(Nylon Holster with Belt Loop)	300-01852(1160mAh)	5.0	10
300-01917(Leather Case with Klick Fast Stud)	300-01852(1160mAh)	15.0	20

For the 806 MHz – 825 MHz and 851 MHz – 870 MHz frequency bands additional body SAR tests were performed in the worst-case configurations with the Remote Speaker Microphone (RSM) attached. The RSM is of the non-radiating type, part number 300-00389.

The Elliptical Flat Phantom dimensions are 600 mm major axis and 400 mm minor axis with a shell thickness of 2.00 mm. The phantom was filled to a minimum depth of 150 mm with the appropriate Body simulant liquid. The dielectric properties were measured and found to be in accordance with the requirements specified in KDB 865664 D01.

For each scan, the EUT was configured into a continuous transmission test mode using software provided by Sepura Limited.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position

3. Test Environment

3.1. Test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

3.2. Test Facility

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	<p>Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn</p>	
Qualifications	Type	Accreditation Number
	FCC	762235

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEEx	SPEAG	DAE4	1549	2020/04/04	2021/04/03
●	E-field Probe	SPEAG	EX3DV4	7494	2020/04/01	2021/03/31
○	Universal Radio Communication Tester	R&S	CMW500	137681	2020/06/18	2021/06/17
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2020/10/15	2021/10/14
○ System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2018/02/21	2021/02/20
○	System Validation Dipole	SPEAG	D450V3	1102	2018/02/23	2021/02/22
○	System Validation Dipole	SPEAG	D750V3	1180	2018/02/07	2021/02/06
●	System Validation Dipole	SPEAG	D835V2	4d238	2018/02/19	2021/02/18
○	System Validation Dipole	SPEAG	D1750V2	1164	2018/02/06	2021/02/05
○	System Validation Dipole	SPEAG	D1900V2	5d226	2018/02/22	2021/02/21
○	System Validation Dipole	SPEAG	D2450V2	1009	2018/02/05	2021/02/04
○	System Validation Dipole	SPEAG	D2600V2	1150	2018/02/05	2021/02/04
○	System Validation Dipole	SPEAG	D5GHzV2	1273	2018/02/21	2021/02/20
●	Signal Generator	R&S	SMB100A	114360	2020/08/11	2021/08/10
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2020/08/11	2021/08/10
●	Power sensor	R&S	NRP18A	101386	2020/06/08	2021/06/07
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2020/11/12	2021/11/11
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2020/11/12	2021/11/11

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2020/06/18	2021/06/17
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2020/10/15	2021/10/14
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
○	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
○	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
○	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
○	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2020/08/11	2021/08/10
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2020/08/11	2021/08/10
●	Power sensor	R&S	NRP18A	101386	2020/06/08	2021/06/07
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2020/11/12	2021/11/11
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2020/11/12	2021/11/11

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

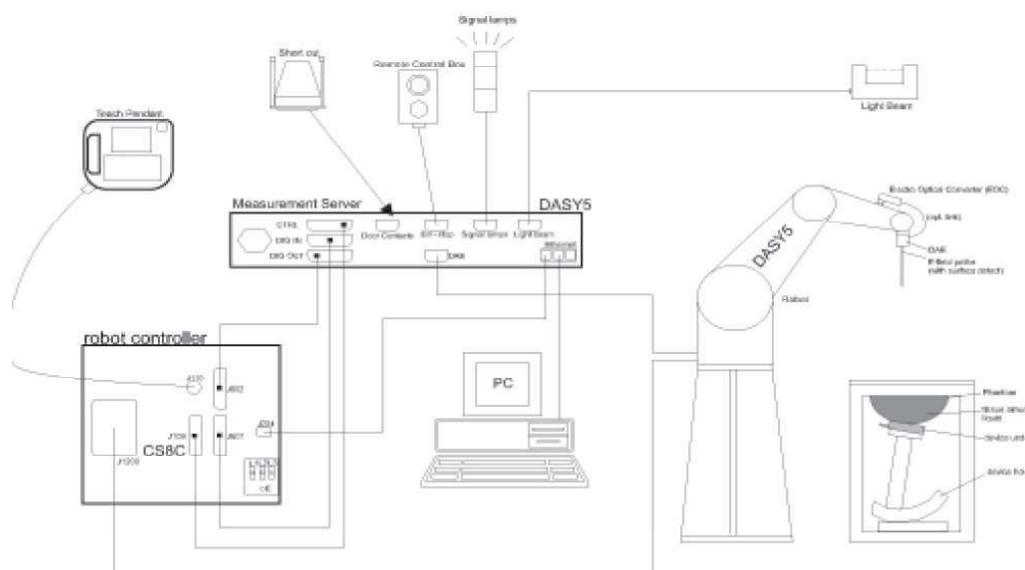

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification

Construction: Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration: ISO/IEC 17025 calibration service available.


Frequency	10 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 10 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



● Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

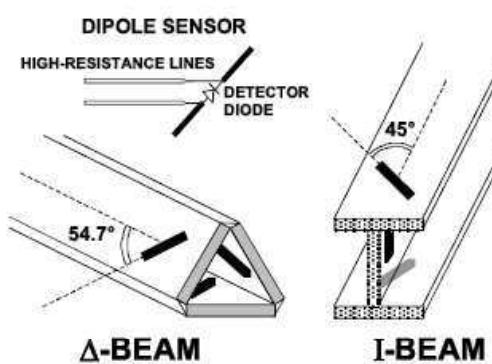

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm). System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.

The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1):$ between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1):$ between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcp <i>i</i>
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V_i: compensated signal of channel (*i* = x, y, z)

U_i: input signal of channel (*i* = x, y, z)

cf: crest factor of exciting field (DASY parameter)

dcp_i: diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : \quad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes} : \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

V_i: compensated signal of channel (*i* = x, y, z)

Norm_i: sensor sensitivity of channel (*i* = x, y, z),
[mV/(V/m)²] for E-field Probes

ConvF: sensitivity enhancement in solution

aij: sensor sensitivity factors for H-field probes

f: carrier frequency [GHz]

E_i: electric field strength of channel *i* in V/m

H_i: magnetic field strength of channel *i* in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in mW/g

Etot: total field strength in V/m

σ : conductivity in [mho/m] or [Siemens/m]

ρ : equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom


8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

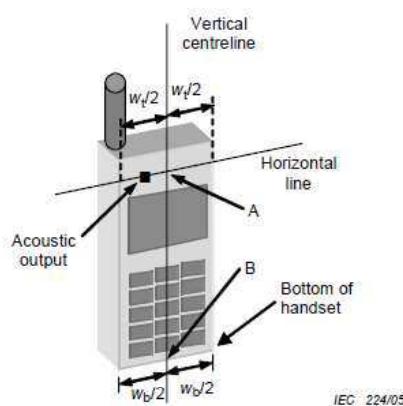


Figures 5a

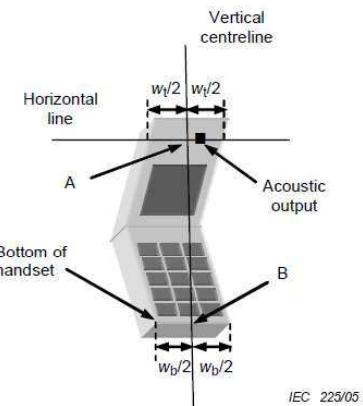

Figures 5b


W_t	Width of the handset at the level of the acoustic output
W_b	Width of the bottom of the handset
A	Midpoint of the width W_t of the handset at the level of the acoustic output
B	Midpoint of the width W_b of the bottom of the handset

Cheek position

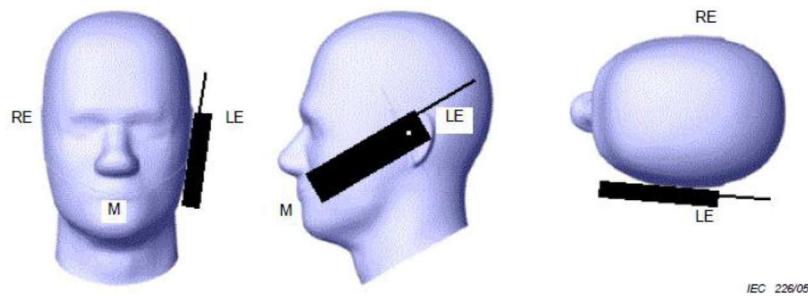

Cheek position of the wireless device on the left side of SAM


Tilt position

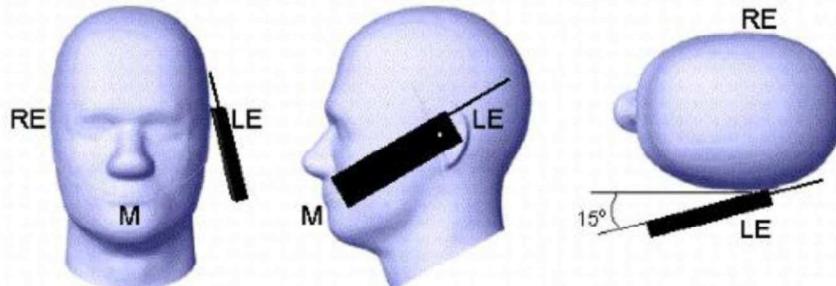

Tilt position of the wireless device on the left side of SAM


8.2. Front-of-face

A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions. If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

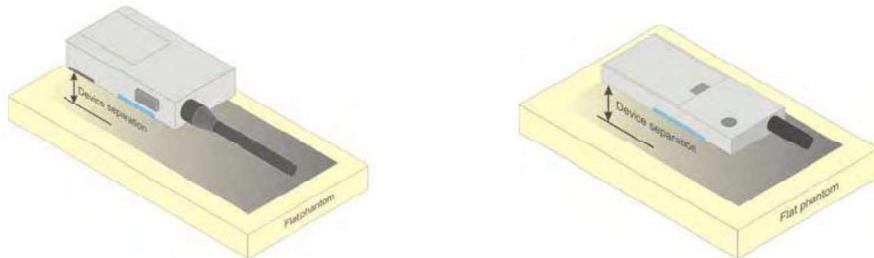

8.3. Body Position

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

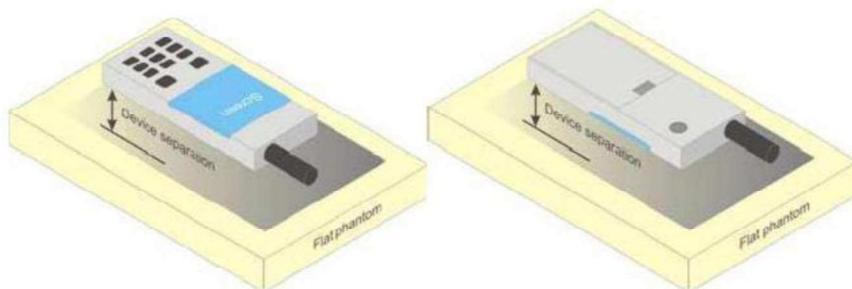

9. System Check

9.1. Tissue Dielectric Parameters

It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664 D01.
Targets for tissue simulating liquid

Tissue dielectric parameters for head and body				
Target Frequency		Head		Body
(MHz)		ϵ_r	σ (s/m)	ϵ_r
835		41.5	0.90	55.2
				0.97

CheckResult:

Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
835	41.50	43.19	0.900	0.941	4.07%	4.56%	±5%	22.2	2020-11-17


Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
2450	39.20	38.07	1.800	1.799	-2.88%	-0.06%	±5%	22.2	2021/6/11

9.2. SAR System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

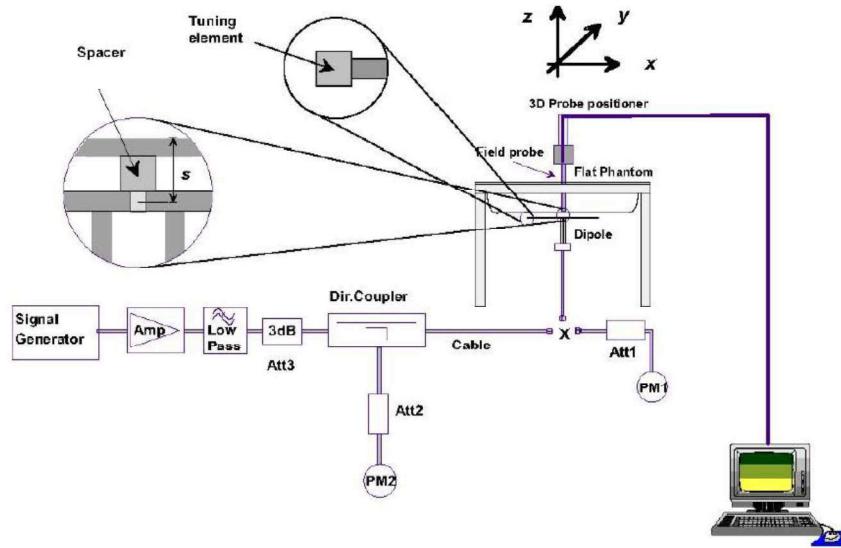

Check Result:

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
835	9.51	10.28	2.57	6.15	6.72	1.68	8.10%	9.27%	±10%	22.2	2020-11-17

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
2450	52.00	55.60	13.90	23.90	25.52	6.38	6.92%	6.78%	±10%	22.2	2021/6/11

Note:

1. the graph results see follow.

System Performance Check-Head 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2020-11-17

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 43.19$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C; Liquid Temperature: 22.5°C;

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.46, 10.46, 10.46) @ 835 MHz; Calibrated: 4/1/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/4/2020
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.52W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.70 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.04W/kg

SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 3.51 W/kg

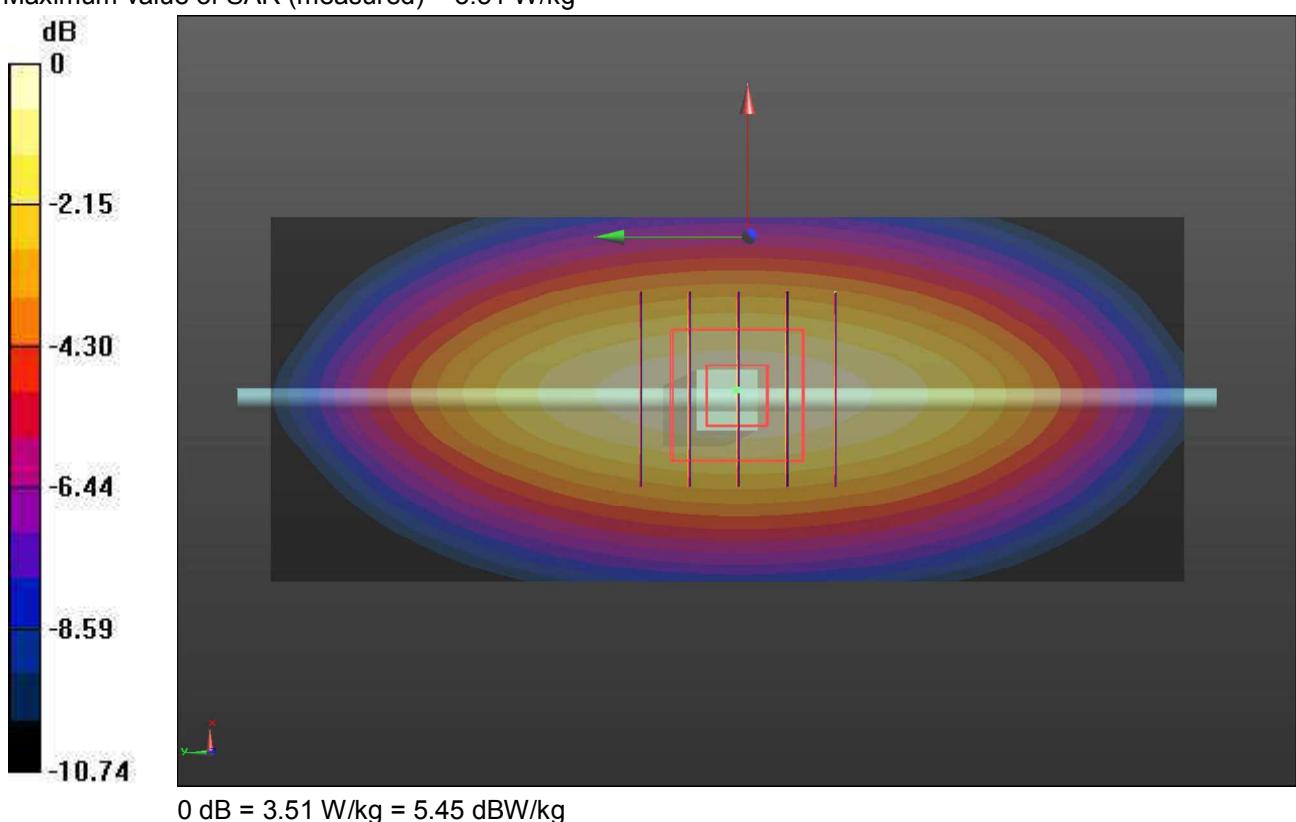

System Performance Check-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-06-11

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 38.073$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.5 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.38 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

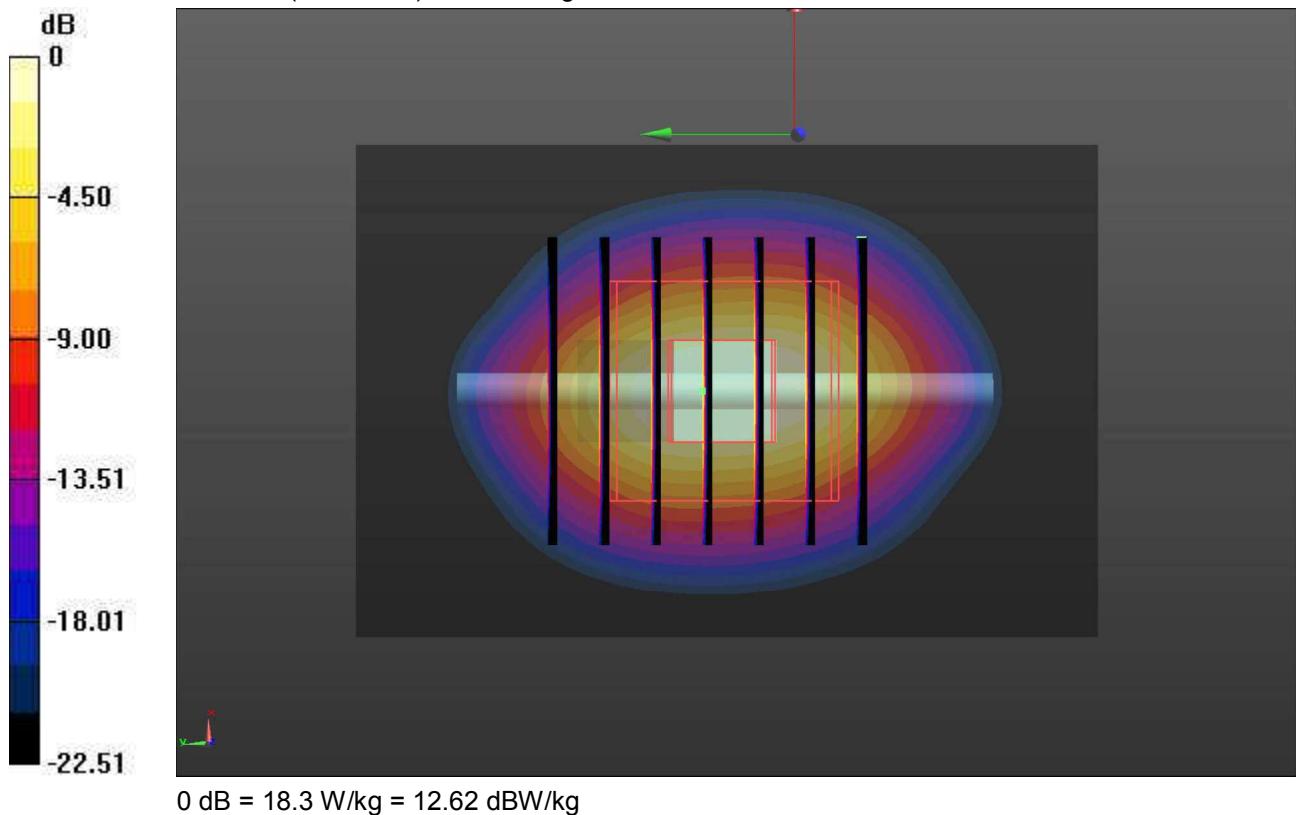

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population / Uncontrolled Exposure Environment	Occupational / Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).


11. Conducted Power Measurement Results

TETRA				
Mode	Operation Frequency	Frequency		Conducted Power (dBm)
		Channel	MHz	
DMO	806~870MHz	CH1	806.0	34.10
		CH2	815.5	34.10
		CH3	825.0	34.30
		CH4	851.0	34.00
		CH5	860.5	34.00
		CH6	870.0	34.20

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
Digital	4FSK	12.6	56.6	22.26%	4.4921

Duty Cycle plot

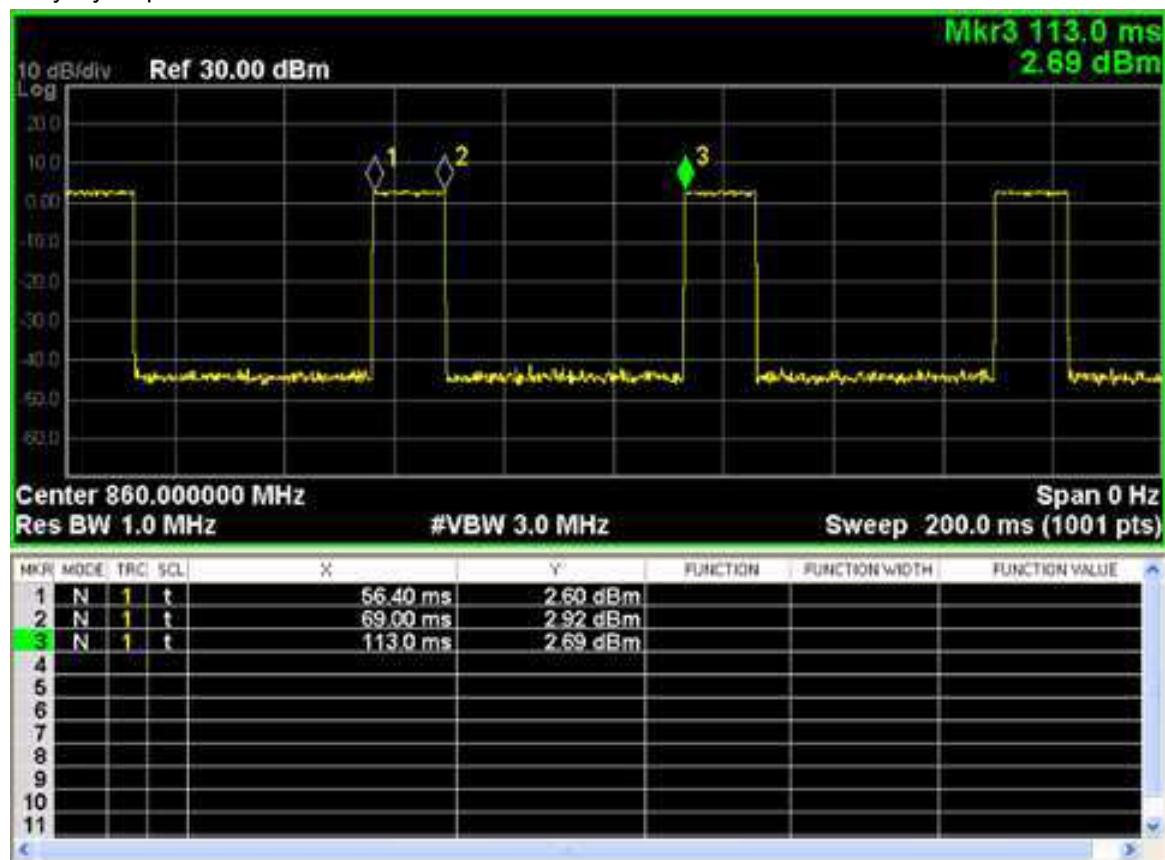

For 2.4GHz WiFi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

WiFi 2.4G			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11b	1	2412	12.07
	6	2437	13.19
	11	2462	14.14
802.11g	1	2412	15.78
	6	2437	16.56
	11	2462	17.72
802.11n (HT20)	1	2412	14.77
	6	2437	15.85
	11	2462	16.81
802.11n (HT40)	3	2422	13.91
	6	2437	14.63
	9	2452	15.04

Bluetooth		
Mode	Frequency (MHz)	Conducted Power(dBm)
GFSK	2402~2480	5.38
$\pi/4$ QPSK	2402~2480	3.16
8DPSK	2402~2480	3.51

12. Maximum Tune-up Limit

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01.

TETRA			
Mode	Channel Separation (KHz)	Operation Frequency Range (MHz)	Maximum tune-up power (dBm)
DMO	25	806~870	35.00dBm

WiFi 2.4G			
Mode	Channel	Frequency (MHz)	Maximum Tune-up (dBm) Conducted Average Power
802.11b	1	2412	12.50
	6	2437	13.50
	11	2462	14.50
802.11g	1	2412	16.00
	6	2437	17.00
	11	2462	18.00
802.11n (HT20)	1	2412	15.00
	6	2437	16.00
	11	2462	17.00
802.11n (HT40)	3	2422	14.00
	6	2437	15.00
	9	2452	15.50

Bluetooth		
Mode	Frequency (MHz)	Maximum tune-up power (dBm)
GFSK	2402~2480	5.50
$\pi/4$ QPSK	2402~2480	3.50
8DPSK	2402~2480	4.00

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances \leq 50mm are determined by:

$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.45	Head	0	0.3	Yes
		Front-of-face	25	0.1	Yes
		Body	0	0.3	Yes

Per KDB 447498 D01, when the minimum test separation distance is <5 mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. SAR Measurement Results

TETRA

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	100% Duty factor SAR	Test Plot
		CH	MHz					(W/kg)	(W/kg)	(W/kg)	
TETRA(1 880mAh)	Left Cheek (300-01922)	CH3	825.0	34.30	35.00	1.175	-0.13	2.900	3.407	3.407	1
		CH6	870.0	34.20	35.00	1.202	-0.16	2.640	3.174	3.174	-
	Left Tilt 15 (300-01922)	CH3	825.0	34.30	35.00	1.175	0.10	2.380	2.796	2.796	-
		CH6	870.0	34.20	35.00	1.202	0.08	2.540	3.054	3.054	-
	Right Cheek (300-01922)	CH3	825.0	34.30	35.00	1.175	0.09	2.730	3.207	3.207	-
		CH6	870.0	34.20	35.00	1.202	-0.11	2.560	3.078	3.078	-
	Right Tilt 15 (300-01922)	CH3	825.0	34.30	35.00	1.175	-0.13	2.210	2.597	2.597	-
		CH6	870.0	34.20	35.00	1.202	-0.09	2.390	2.873	2.873	-

worse case(1880mAh)											
TETRA	Left (300-01923)	CH3	825.0	34.30	35.00	1.175	-0.06	2.820	3.313	3.313	-
	Left (300-01915)	CH3	825.0	34.30	35.00	1.175	0.08	2.560	3.008	3.008	-
	Left (300-01916)	CH3	825.0	34.30	35.00	1.175	0.03	2.600	3.055	3.055	-
	Left (300-01917)	CH3	825.0	34.30	35.00	1.175	0.05	2.500	2.937	2.937	-

worse case(1160mAh)

TETRA	Left (300-01922)	CH3	825.0	34.30	35.00	1.175	-0.16	2.780	3.266	3.266	-
	Left (300-01923)	CH3	825.0	34.30	35.00	1.175	-0.15	2.700	3.172	3.172	-
	Left (300-01915)	CH3	825.0	34.30	35.00	1.175	-0.10	2.470	2.902	2.902	-
	Left (300-01916)	CH3	825.0	34.30	35.00	1.175	0.08	2.530	2.972	2.972	-
	Left (300-01917)	CH3	825.0	34.30	35.00	1.175	0.06	2.410	2.832	2.832	-

Note:

1. Batteries are fully charged at the beginning of the SAR measurements.
2. When the SAR for all antennas tested using the default battery is ≤ 3.5 W/kg (100% PTT duty factor), testing of all other required channels is not necessary.

Front-of-face										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	100% Duty factor SAR
		CH	MHz					(W/kg)	(W/kg)	(W/kg)
TETRA(1 880mAh)	Front (300-01922)	CH3	825.0	34.30	35.00	1.175	0.07	1.170	1.375	1.375
		CH6	870.0	34.20	35.00	1.202	0.12	1.150	1.383	1.383

worse case(1880mAh)										
TETRA	Front (300-01923)	CH3	825.0	34.30	35.00	1.175	0.06	1.150	1.351	1.351
	Front (300-01915)	CH3	825.0	34.30	35.00	1.175	-0.13	1.120	1.316	1.316
	Front (300-01916)	CH3	825.0	34.30	35.00	1.175	0.18	1.140	1.339	1.339
	Front (300-01917)	CH3	825.0	34.30	35.00	1.175	0.11	1.100	1.292	1.292
	Front (300-01918)	CH3	825.0	34.30	35.00	1.175	0.10	1.110	1.304	1.304

worse case(1160mAh)										
TETRA	Front (300-01922)	CH3	825.0	34.30	35.00	1.175	0.08	1.160	1.363	1.363
	Front (300-01923)	CH3	825.0	34.30	35.00	1.175	-0.09	1.140	1.339	1.339
	Front (300-01915)	CH3	825.0	34.30	35.00	1.175	0.14	1.090	1.281	1.281
	Front (300-01916)	CH3	825.0	34.30	35.00	1.175	0.15	1.110	1.304	1.304
	Front (300-01917)	CH3	825.0	34.30	35.00	1.175	-0.02	1.060	1.245	1.245

Body-worn										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	100% Duty factor SAR (W/kg)
		CH	MHz							
TETRA(1 880mAh)	Rear (300-01916)	CH3	825.0	34.30	35.00	1.175	0.10	2.430	2.855	2.855
		CH6	870.0	34.20	35.00	1.202	0.01	2.360	2.837	2.837

worse case(1880mAh)										
TETRA	Rear (300-01922)	CH3	825.0	34.30	35.00	1.175	0.06	2.380	2.796	2.796
	Rear (300-01923)	CH3	825.0	34.30	35.00	1.175	-0.09	2.160	2.538	2.538
	Rear (300-01915)	CH3	825.0	34.30	35.00	1.175	-0.14	2.330	2.738	2.738
	Rear (300-01917)	CH3	825.0	34.30	35.00	1.175	-0.13	2.310	2.714	2.714

worse case(1160mAh)										
TETRA	Rear (300-01922)	CH3	825.0	34.30	35.00	1.175	0.10	2.320	2.726	2.726
	Rear (300-01923)	CH3	825.0	34.30	35.00	1.175	-0.14	2.140	2.514	2.514
	Rear (300-01915)	CH3	825.0	34.30	35.00	1.175	-0.03	2.300	2.702	2.702
	Rear (300-01916)	CH3	825.0	34.30	35.00	1.175	0.17	2.400	2.820	2.820
	Rear (300-01917)	CH3	825.0	34.30	35.00	1.175	0.05	2.270	2.667	2.667

Note:

1. *Batteries are fully charged at the beginning of the SAR measurements.*
2. *The distance of the body test is 0mm, the distance of the face test is 25mm.*
3. *The Body-worn SAR evaluation was performed with the Leather Case body-worn accessory attached to the DUT and touching the outer surface of the planar phantom.*
4. *When the SAR for all antennas tested using the default battery is ≤ 3.5 W/kg (100% PTT duty factor), testing of all other required channels is not necessary.*

WIFI 2.4G

Head										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Test Plot
		CH	MHz					(W/kg)	(W/kg)	
802.11b 1Mbps(18 80mAh)	Left Cheek (300-01922)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.11	0.190	0.206	4
	Left Tilt 15 (300-01922)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.13	0.032	0.035	-
	Right Cheek (300-01922)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.08	0.117	0.127	-
	Right Tilt 15 (300-01922)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.17	0.024	0.026	-

worse case(1880mAh)										
802.11b 1Mbps	Left (300-01915)	11	2462	14.14	14.50	1.086	0.09	0.195	0.212	
	Left (300-01916)	11	2462	14.14	14.50	1.086	-0.05	0.202	0.219	
	Left (300-01917)	11	2462	14.14	14.50	1.086	0.08	0.191	0.208	
	Left (300-01923)	11	2462	14.14	14.50	1.086	-0.16	0.205	0.223	

worse case(1160mAh)										
802.11b 1Mbps	Left (300-01915)	11	2462	14.14	14.50	1.086	0.07	0.190	0.206	-
	Left (300-01916)	11	2462	14.14	14.50	1.086	-0.14	0.192	0.209	-
	Left (300-01917)	11	2462	14.14	14.50	1.086	0.06	0.186	0.202	-
	Left (300-01922)	11	2462	14.14	14.50	1.086	-0.12	0.208	0.226	-
	Left (300-01923)	11	2462	14.14	14.50	1.086	-0.10	0.206	0.224	-

Front-of-face										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps(18 80mAh)	Front (300- 01922)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.13	0.030	0.033	5

worse case(1880mAh)										
802.11b 1Mbps	Front (300- 01915)	11	2462	14.14	14.50	1.086	-0.08	0.026	0.028	-
	Front (300- 01916)	11	2462	14.14	14.50	1.086	0.12	0.028	0.030	-
	Front (300- 01917)	11	2462	14.14	14.50	1.086	-0.13	0.023	0.025	-
	Front (300- 01923)	11	2462	14.14	14.50	1.086	-0.10	0.030	0.033	-
	worse case(1160mAh)									
802.11b 1Mbps	Front (300- 01915)	11	2462	14.14	14.50	1.086	0.05	0.022	0.024	-
	Front (300- 01916)	11	2462	14.14	14.50	1.086	-0.06	0.026	0.028	-
	Front (300- 01917)	11	2462	14.14	14.50	1.086	0.12	0.020	0.022	-
	Front (300- 01922)	11	2462	14.14	14.50	1.086	-0.09	0.029	0.032	-
	Front (300- 01923)	11	2462	14.14	14.50	1.086	0.08	0.028	0.030	-

Body-worn										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Test Plot
		CH	MHz					(W/kg)	(W/kg)	
802.11b 1Mbps(18 80mAh)	Rear (300-01916)	1	2412	12.07	12.50	1.104	-	-	-	-
		6	2437	13.19	13.50	1.074	-	-	-	-
		11	2462	14.14	14.50	1.086	-0.13	0.094	0.102	6

worse case(1880mAh)										
802.11b 1Mbps	Rear (300-01923)	11	2462	14.14	14.50	1.086	-0.10	0.069	0.075	-
	Rear (300-01922)	11	2462	14.14	14.50	1.086	-0.05	0.102	0.111	-
	Rear (300-01915)	11	2462	14.14	14.50	1.086	-0.14	0.091	0.099	-
	Rear (300-01917)	11	2462	14.14	14.50	1.086	-0.12	0.087	0.095	-

worse case(1160mAh)										
802.11b 1Mbps	Rear (300-01915)	11	2462	14.14	14.50	1.086	-0.11	0.092	0.100	-
	Rear (300-01916)	11	2462	14.14	14.50	1.086	-0.09	0.097	0.105	-
	Rear (300-01917)	11	2462	14.14	14.50	1.086	-0.15	0.085	0.092	-
	Rear (300-01922)	11	2462	14.14	14.50	1.086	0.12	0.093	0.101	-
	Rear (300-01923)	11	2462	14.14	14.50	1.086	0.06	0.060	0.065	-

Note:

1. Batteries are fully charged at the beginning of the SAR measurements.
2. The distance of the body and head test is 0mm, the distance of the face test is 25mm.
3. The Body-worn SAR evaluation was performed with the Leather Case body-worn accessory attached to the DUT and touching the outer surface of the planar phantom.

SAR Test Data Plots to the Appendix A.

14. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Head	Front-of-face	Body-worn
1	TETRA + Bluetooth(data)	Yes	Yes	Yes
2	TETRA + WIFI(data)	Yes	Yes	Yes

General note:

1. The reported SAR summation is calculated based on the same configuration and test position.
2. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})/x}] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $> 50\text{mm}$.

Mode	Max power	Exposure position	Head	Front-of-face	Body-worn
		Test separation	0mm	25mm	0mm
Bluetooth	5.50 dBm	Estimated SAR (W/kg)	0.148	0.030	0.148





According to KDB 447498 Section 7.2,


The $[\sum \text{ (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 W/kg}] + [\sum \text{ of MPE ratios}] \leq 1.0$.


Exposure Position	Max SAR (W/kg)		Ratios
	TETRA	Bluetooth	
Head	3.407	0.148	0.518
Front-of-face	1.375	0.030	0.191
Body-worn	2.855	0.148	0.449

Exposure Position	Max SAR (W/kg)		Ratios
	TETRA	WIFI	
Head	3.407	0.206	0.555
Front-of-face	1.375	0.033	0.193
Body-worn	2.855	0.102	0.421

15. Test Setup Photos

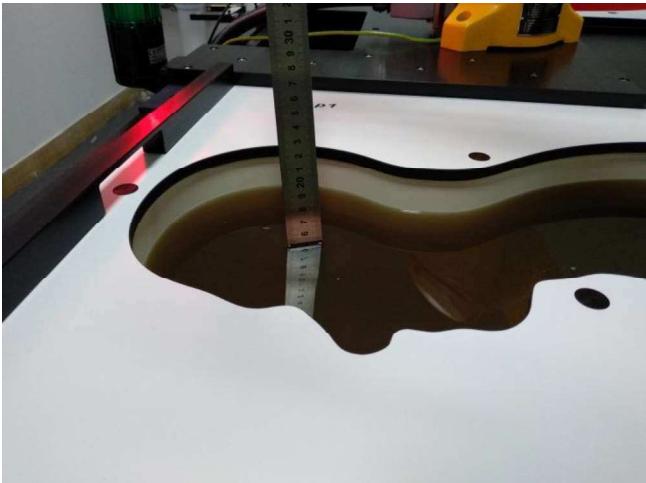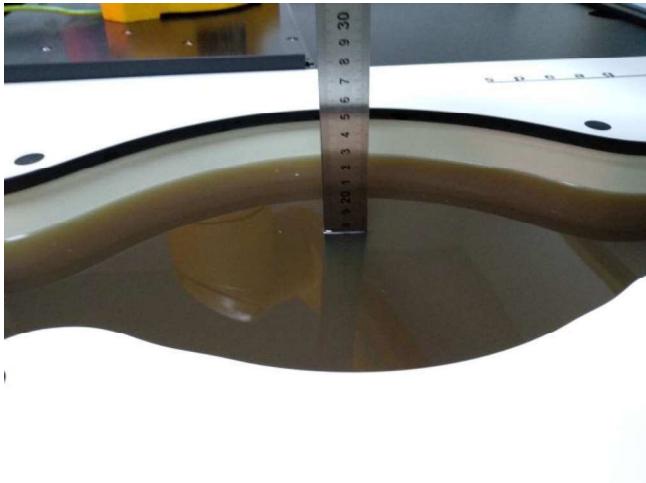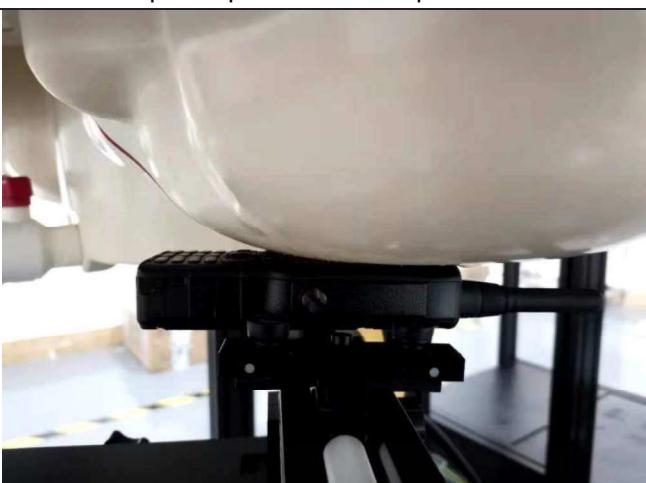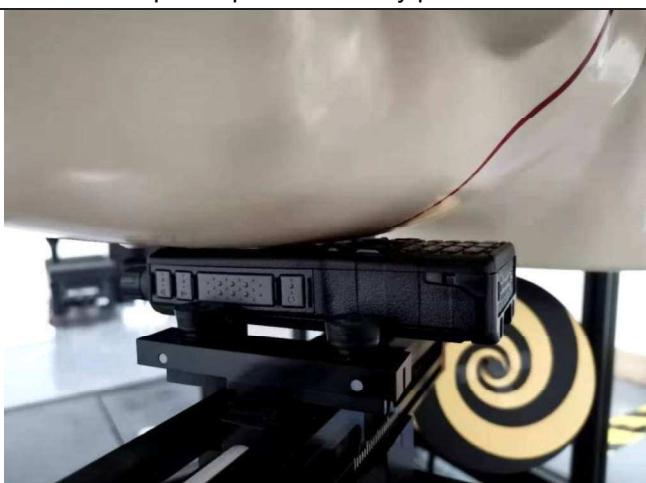
	
Liquid depth in the Head phantom	Liquid depth in the Body phantom
	
large clip (1160mAh) Left Cheek Touch	large clip (1160mAh) Right Cheek Touch
	
large clip (1160mAh) Rear 0mm	pocket clip (1160mAh) Left Cheek Touch

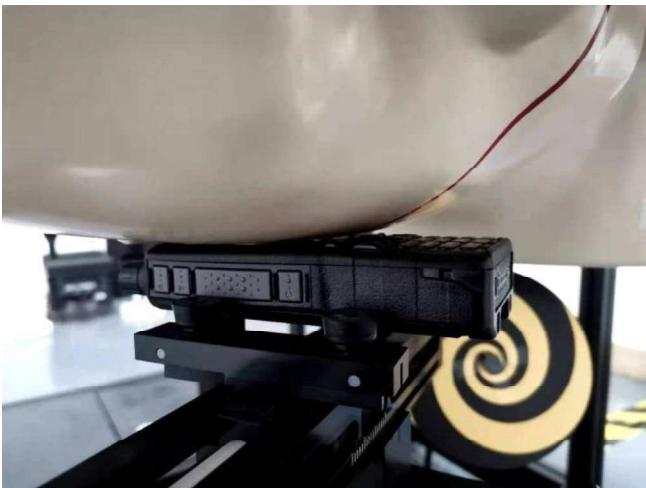	
pocket clip (1160mAh) Right Cheek Touch	pocket clip (1160mAh) Rear 0mm
	
leather 1 (1160mAh) Left Cheek Touch	leather 1 (1160mAh) Right Cheek Touch
	
leather 1 (1160mAh) Rear 0mm	leather 2 (1160mAh) Front of face 25mm

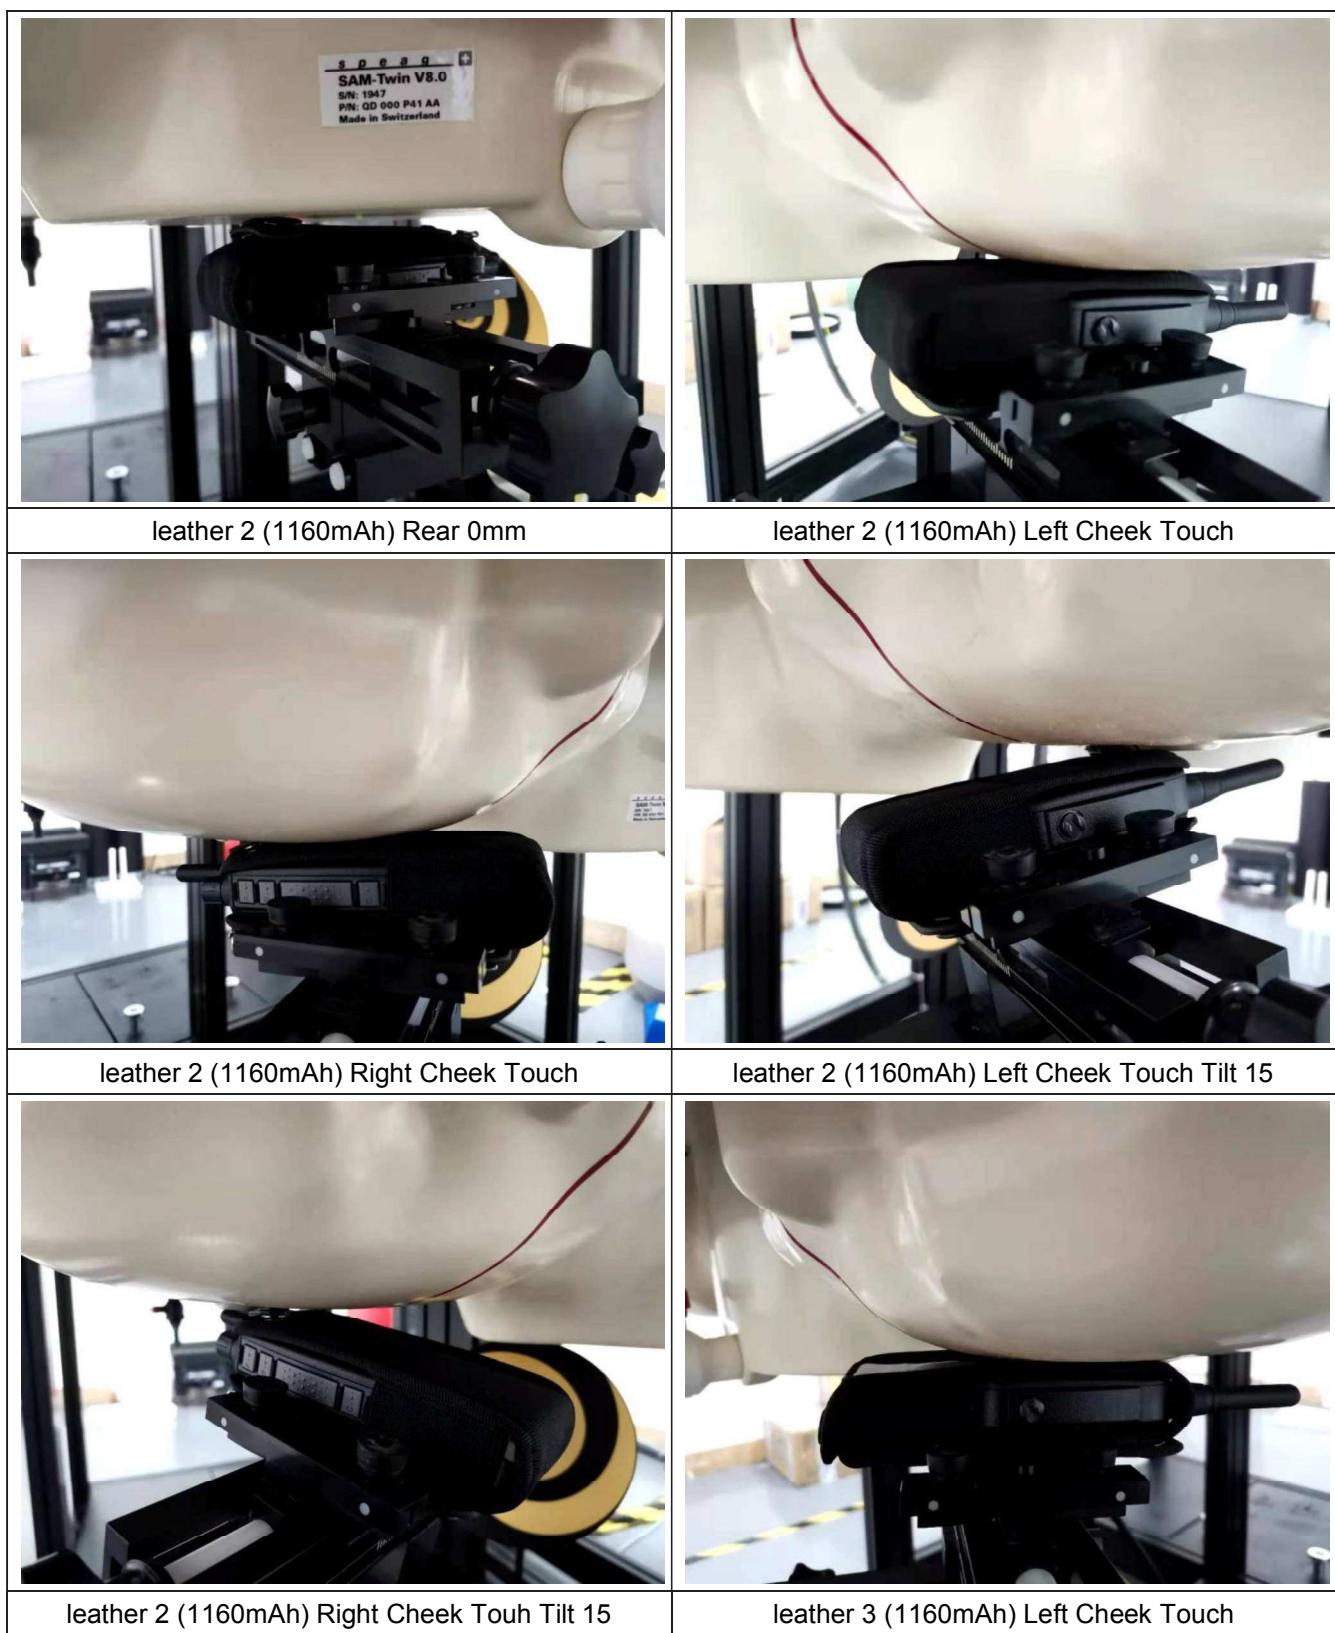

	
leather 3 (1160mAh) Right Cheek Touch	leather 3 (1160mAh) Rear 0mm
	
Rear face - 1160 mAh battery with Nylon Holster and RSM	large clip (1880mAh) Left Cheek Touch
	
large clip (1880mAh) Right Cheek Touch	large clip (1880mAh) Rear 0mm

pocket clip (1880mAh) Left Cheek Touch	pocket clip (1880mAh) Right Cheek Touch
pocket clip (1880mAh) Rear 0mm	leather 1 (1880mAh) Left Cheek Touch
leather 1 (1880mAh) Right Cheek Touch	leather 1 (1880mAh) Rear 0mm

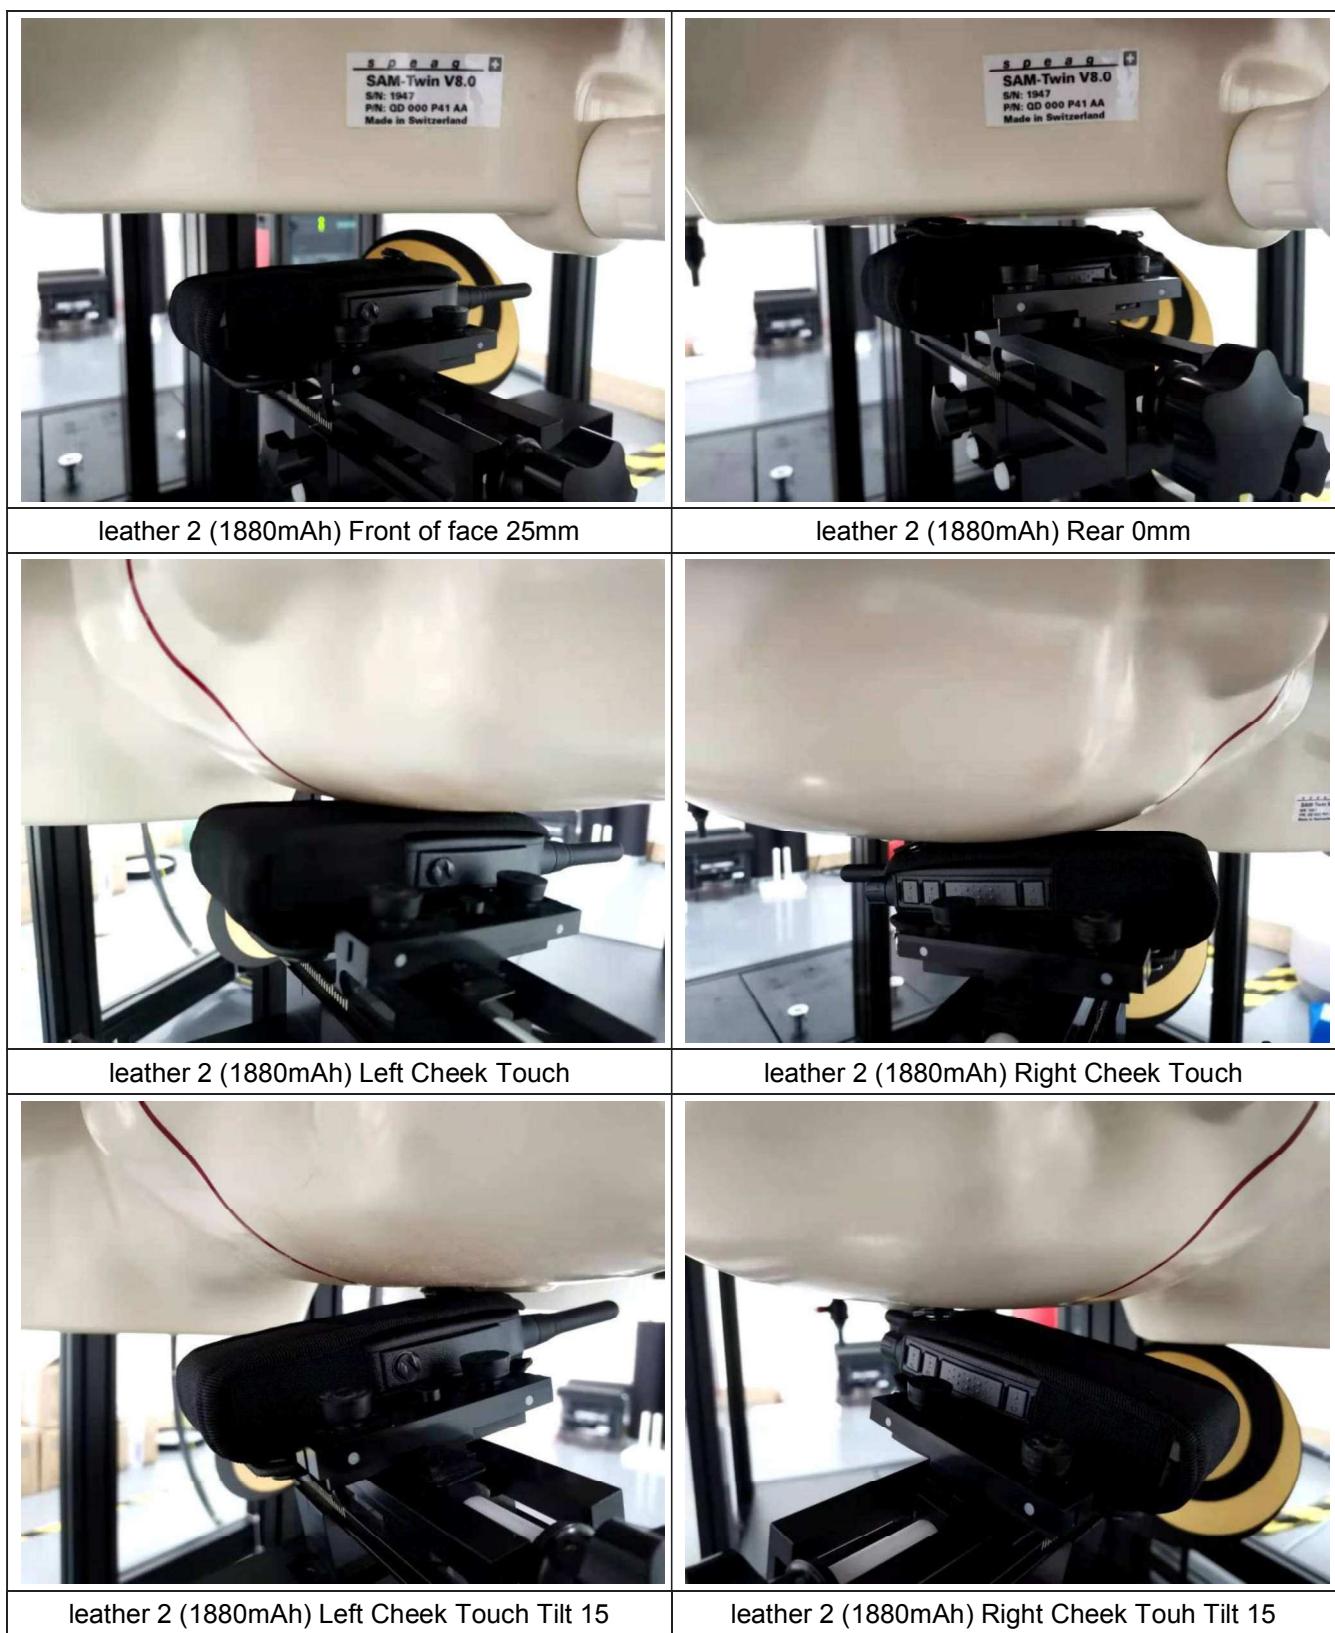

	
leather 3 (1880mAh) Left Cheek Touch	leather 3 (1880mAh) Right Cheek Touch
	
leather 3 (1880mAh) Rear 0mm	

16. External Photos of the EUT

