

Test report No:  
NIE: 73396RAN.004A1

## Test report

### IEEE Std 1528™-2013

(*) Identification of item tested	TETRA portable radio
(*) Trademark	Sepura
(*) Model and /or type reference tested	SC2024
(*) Other identification of the product	FCC ID: XX6SC2024M IC: 8739A-SC2024M HW version: PLX-2116545-01 (mod state 11) SW version: 000193453124400
(*) Features	TETRA, BT, Wi-Fi, GNSS
Manufacturer	Sepura Limited 9000 Cambridge Research Park, Waterbeach, Cambridge CB25 9TL, UK
Test method requested, standard	1. IEEE Std 1528™-2013. 2. FCC 47 CFR Part 2.1093.
Summary	Considering the results of the performed test, the item under test is IN COMPLIANCE with FCC 47CFR Part 2.1093 exposure limits.  The maximum 1g volume averaged SAR found during this test have been 3.522 W/kg, for TETRA mode.
Approved by (name / position & signature)	Miguel Lacave Antennas Lab Manager
Date of issue	2023-06-23
Report template No	FAN44_00 <small>(*) "Data provided by the client"</small>



## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	3
Data provided by the client.....	4
Usage of samples .....	4
Test sample description .....	5
Identification of the client.....	6
Testing period and place.....	6
Document history .....	6
Environmental conditions .....	6
Remarks and comments .....	6
Testing verdicts.....	8
Summary .....	8
Appendix A: Test configuration .....	9
Appendix B: Test results .....	24
Appendix C: Measurement report .....	34
Appendix D: System Validation Report .....	53
Appendix E: Calibration data.....	60
Appendix F: Photographs.....	96

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the following documents:

1. DEKRA Testing and Certification S.A.U. internal document PODT000.
2. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested", "Other identification of the product", "Features" and "Test sample description").
2. Maximum output power, normal use conditions and testing distance information.
3. The SC2024 is identical to the SC2021 except for the external TETRA antennas.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: the client

Samples are composed of the following elements:

Sample	Control Nº	Description	Model	Serial Nº	Date of reception
S/01	73396/002	Communicator Telephone	SC2024	1PR002235GK694T	2023-01-16
S/01	74230B/026	Battery Communicator Telephone	300-01853	34000000D3DBE93D	2022-12-23
S/02	73291/014	Stud	300-00718	N/A	2022-09-28
S/02	73291/016	Belt Clip	300-00323	N/A	2022-09-28
S/02	73291/048	Heavy Duty Case with Klick Fast Stud	300-01386	261445	2022-09-30
S/02	73291/049	Extended Belt Loop	300-00912	262246	2022-09-30
S/02	73291/050	Lightweight Leather Case with Belt Clip	300-01385	262240	2022-09-30
S/02	73291/051	Nylon Holster	300-01387	165542	2022-09-30
S/02	73396/011	Antenna	300-01032	--	2023-01-16
S/02	73396/016	Antenna	300-00499	--	2023-01-16
S/02	73396/021	Antenna	300-00663	--	2023-01-16
S/02	73396/002	Communicator Telephone	SC2024	1PR002235GK694T	2023-01-16
S/02	74230B/022	Battery Communicator Telephone	300-01175	99000000A2A9B43D	2022-12-23
S/02	74230B/024	Battery Communicator Telephone	300-01852	15000000BFFF9D3D	2022-12-23
S/02	74230B/025	Battery Communicator Telephone	300-01852	BB000000C098993D	2022-12-23
S/02	74230B/026	Battery Communicator Telephone	300-01853	34000000D3DBE93D	2022-12-23

1. Sample S/01 has undergone the test(s) specified in subclause "Test method requested": Conducted average output power.
2. Sample S/02 has undergone the test(s) specified in subclause "Test method requested": SAR evaluation for TETRA mode.

## Test sample description

Description of product ...:	TETRA portable radio		
Software version.....:	000193453124400		
Hardware version.....:	PLX-2116545-01 ( mod state 11)		
Mounting position .....	[ ]	Table top equipment	
	[ ]	Wall/Ceiling mounted equipment	
	[X]	Equipment used next to the ear	
	[X]	Hand-held equipment	
	[X]	Other: Body worn	
Accessories (not part of the test item) .....	Description	Type	Model
	14 Wh Battery	Battery	300-01853
	8.6 Wh Battery	Battery	300-01852
	UHF ¼ wave whip Antenna	Antenna	300-00499
	UHF ¼ wave whip Antenna	Antenna	300-00663
	UHF ¼ wave whip Antenna	Antenna	300-01032
	Extended Belt Loop	Carrying accessory	300-00912
	Lightweight Leather Case with Belt Clip	Carrying accessory	300-01385
	Heavy Duty Case with Klick Fast Stud	Carrying accessory	300-01386
	Nylon Holster	Carrying accessory	300-01387
	Belt Clip	Carrying accessory	300-01589
	Klickfast Stud	Carrying accessory	300-00718
	Klickfast Belt Dock (50 cm)	Carrying accessory	300-00322
	Klickfast Belt Dock (60 cm)	Carrying accessory	300-00323
	Standard Remote Speaker Microphone (RSM)	Audio Accessory	300-00389
	Advanced Remote Speaker Microphone (RSM) (37 cm Lead)	Audio Accessory	300-00734
	Advanced Remote Speaker Microphone (RSM) (60 cm Lead)	Audio Accessory	300-00733
	IP67 sRSM Speaker Microphone (Standard Lead Length)	Audio Accessory	300-01169
	IP67 sRSM Speaker Microphone (Short Lead Length)	Audio Accessory	300-01982
	IP67 Ultra CSM (with Heavy Duty Large Clip)	Audio Accessory	300-01123
	IP67 Ultra CSM Peltor Interface (with Heavy Duty Large Clip)	Audio Accessory	300-01152
	IP67 Ultra RSM (with Heavy Duty Large Clip)	Audio Accessory	300-01124
	IP67 Ultra RSM Peltor Interface (with Heavy Duty Large Clip)	Audio Accessory	300-01153
	m-RSM – Mini Remote Speaker Microphone	Audio Accessory	300-01979
	EM2 Ear Hanger, RAC (50 cm)	Audio Accessory	300-00579
	EM2 Ear Hanger, RAC (90 cm)	Audio Accessory	300-00580
	EM2 Ear Hanger, RSM (50 cm)	Audio Accessory	300-00581
	EH6 Ear Hanger, RAC (50 cm)	Audio Accessory	300-00562
	EH6 Ear Hanger, RAC (90 cm)	Audio Accessory	300-00563
	EH6 Ear Hanger, RSM	Audio Accessory	300-00564
	STP In-Ear Tactical Headset (RAC)	Audio Accessory	300-00746
	STP Genesis II Headset (RAC)	Audio Accessory	300-00747
	RAC Two-Wire Kit: G-Type Ear Hanger	Audio Accessory	300-01626
	RAC Two-Wire Kit: Acoustic Tube Ear Hanger	Audio Accessory	300-01628
	STP/SC2 RAC One-Wire Kit, Acoustic Tube Ear Hanger	Audio Accessory	300-02017

	Heavy-Duty Headset	Audio Accessory	300-00852
	Heavy-Duty Helmut Headset	Audio Accessory	300-00850
	GSM-Style In-Line Hands-Free Kit (RAC)	Audio Accessory	300-00428
	Two-Wire Kit (RAC)	Audio Accessory	300-00755

## Identification of the client

Sepura Limited  
9000 Cambridge Research Park, Waterbeach, Cambridge CB25 9TL, UK

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2023-02-02
Date (finish)	2023-02-17

## Document history

Report number	Date	Description
73396RAN.004	2023-04-27	First release
73396RAN.004A1	2023-06-23	Second release. Bluetooth maximum output power value has been updated. This modification test report cancels and replaces the test report 73396RAN.004.

## Environmental conditions

Date	Max. Temp. °C	Min. Temp. °C	Max. Hum. %	Min. Hum. %	Limit
					18-25 °C, 30-70%
From 2023-02-02 to 2023-02-17	24.69	20.09	52.17	34.50	18-25 °C, 30-70%

## Remarks and comments

1. Zoom scan is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance 06, paragraph "4.4.2. Area scan based 1-g estimation".
2. Only the plots of the highest SAR for each test position and mode/band are included in appendix C.
3. The SC2024 is identical to the SC2021 except for the external TETRA antennas. The SAR values for 802.11b/g/n 2400 MHz band have been reused from the SAR test report number 73291RAN.002.
4. The tests have been performed by the technical personnel: Ismael Gamarro.
5. The instrumentation utilized to perform the tests covered in this test report is listed in the following table:

DEKRA Control Number	Equipment	S/N
1084	Dual directional coupler, HP model 778D	15821
3485	Power amplifier, MITEQ model AMF-4D-00400600-50-30P	1456425
4482	Vector Network Analyzer, Agilent Technologies model N9923A FieldFox	US49470126
3436	Robot controller, Stäubli model CS7MB	F04/50P5A1/C/01
2402	20 dB Attenuator, WEINSCHEL model 75A-20-11	902
3420	Robot, Stäubli model RX60BL	F04/SOP5A1/A/01
3438	Head Tissue Equivalent Liquid for 450 MHz band, SPEAG model HSL450V2	391
5580	Head Dipole Validation kit 450MHz, SPEAG model D450V3	D450V3-SN:1092
3430	Data acquisition device, SPEAG model DAE4	669
4393	Dual Power meter, Agilent model E4419B	MY45103349
9513	Dosimetric E-field Probe, SPEAG model EX3DV4	7766
5581	Head Tissue Equivalent Liquid for 450 MHz band, SPEAG model HSL450V2	-
3424	Mounting Device for Hand-held devices, SPEAG model SD000 HD1 HA	-
4164	Power Sensor 50 MHz-18GHz, R&S model NRP-Z81	100527
4391	Power sensor, Agilent model E9300A	SG41491203
4392	Power sensor, Agilent model E9300A	SG41491189
3847	Measurement server, SPEAG model DASY5 SE UMS 011 BS	1227
3346	Signal RF Generator, R&S model SMU200A	102234
3422	SAM head-body simulator, SPEAG model TWIN SAM V4.0	-
4859	DAK software, SPEAG model DAK V1.10.325.10	-
3423	SAR measurement software, SPEAG model DASY52	-
3453	Temperature and humidity probe, Pico Technology model HUMIDIPROBE	UAL02/077
4170	Digital thermometer, LKM Electronics model DTM3000-Spezial	2989
3267	Vector Network Analyzer, Agilent Technologies model E5071C	MY46104904

## 6. References

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093 and the following FCC Published RF exposure KDB procedures:

- FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015).
- FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).
- FCC OET KDB 643646 D01: SAR test for PTT Radios v01r03

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

## Summary

Council Recommendation 1999/519/EC. Annex II h	VERDICT			
	N/A	P	F	N/M
TETRA 450-470 MHz		P		
802.11b/g/n		P <sup>1</sup>		
Bluetooth		P <sup>2</sup>		
1: Remarks and comments 3.				
2: Technology not subject to testing. Verdict has been determined through RF Exposure assessment (see Appendix B, 2.2 of this document for more details).				

## Appendix A: Test configuration

# Index

1.	GENERAL INTRODUCTION .....	11
1.1.	Application Standard.....	11
1.2.	General requirements .....	11
1.3.	Measurement system requirements .....	11
1.4.	Phantom requirements.....	11
1.5.	Measurement Liquids requirements .....	12
2.	MEASUREMENT SYSTEM .....	13
2.1.	Measurement System.....	13
2.2.	Device Holder .....	16
2.3.	Test Positions of device relative to head.....	16
2.4.	Test Positions of device relative to body .....	18
2.5.	Test to be performed.....	18
2.6.	Description of interpolation/extrapolation scheme .....	19
2.7.	Determination of the largest peak spatial-average SAR .....	19
2.8.	System Check.....	19
3.	UNCERTAINTY .....	20
4.	SAR LIMIT .....	21
5.	DEVICE UNDER TEST.....	21
5.1.	Dimensions.....	21
5.2.	Wireless Technology.....	21
5.3.	Simultaneous Transmission.....	21
5.4.	Antenna Location.....	22
5.5.	Accessories .....	22

## 1. GENERAL INTRODUCTION

### 1.1. Application Standard

The Federal Communications Commission (FCC) sets the limits for General Population/Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the body of the user under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

### 1.2. General requirements

The SAR measurement has been performed continuing the following considerations and environment conditions:

The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/-2°C during the test.

The ambient humidity shall be in the range of and 30% - 70%.


The device battery shall be fully charged before each measurement.

### 1.3. Measurement system requirements

The measurement system used for SAR tests fulfills the procedural and technical requirements described at the reference standards used.


### 1.4. Phantom requirements

The phantom model for head measurements is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body. The human model has the following proportions:




**Figure 1:** Proportions of Phantom

The shell model is a shaped container and it has the representation shown in the following figure:

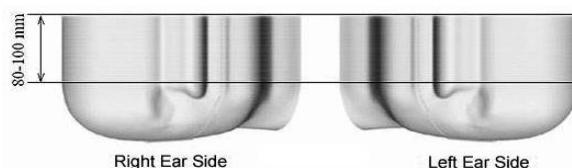

**Figure 2:** Proportions and shape of Phantom shell

The phantom model for body measurements is an elliptical open-top container with a flat bottom, with the following shape and dimensions:

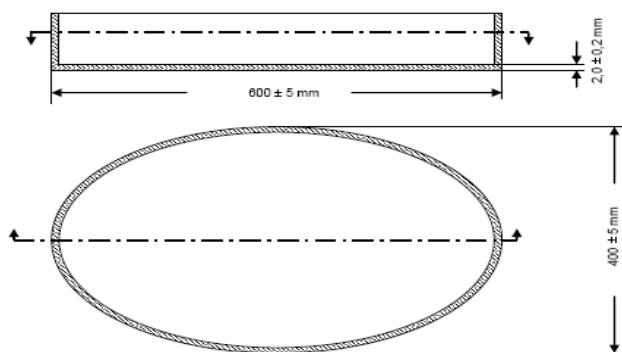

**Figure 3:** Proportions and shape of Phantom shell

## 1.5. Measurement Liquids requirements

The liquids used to simulate the human tissues, must fulfill the requirements of the dielectric properties required. These target dielectric properties are indicated into FCC OET KDB 865664 D01 Appendix A.

Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

**Table 1:** Liquid material requirements


To minimize the effect of reflections on peak spatial-average SAR values, from the upper surface of the tissue equivalent liquid, the depth of the liquid should be at least 15 cm.

Dielectric porperties values of the Tissue Simulant Liquids used for SAR measurements are included in Appendix B, Section 3, of this document.

## 2. MEASUREMENT SYSTEM


### 2.1. Measurement System

The DASY5 system for performing compliance tests consists of the following items:

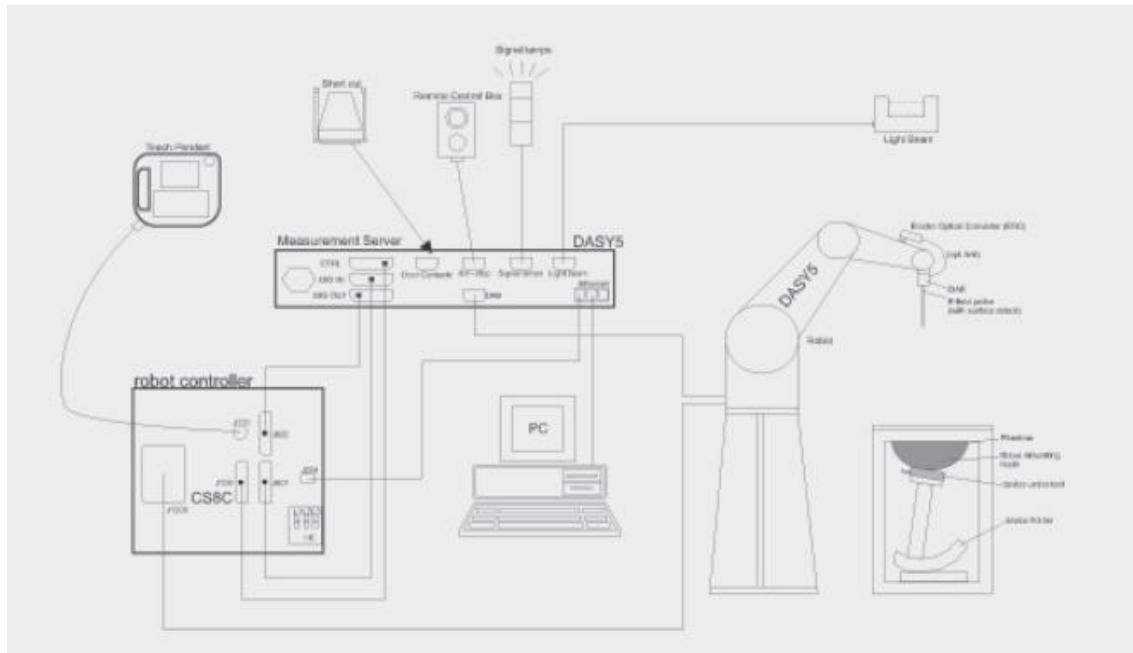

**Figure 4: SAR Measurement system**

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

	<b>Model</b>	<b>EX3DV4</b>
	<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
	<b>Frequency</b>	10 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
	<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
	<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
	<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm

	<b>Model</b>	<b>DAE4</b>
	<b>Construction</b>	Signal amplifier, multiplexer, A/D converter, and control logic. Serial optical link communication with DASY4/5 embedded system (fully remote controlled). Two-step probe touch detector for mechanical surface detection and emergency robot stop.
	<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
	<b>Input Offset Voltage</b>	< 5 $\mu$ V (with auto zero)
	<b>Input Resistance</b>	200 M $\Omega$
	<b>Input Bias Current</b>	< 50 fA

	<b>Model</b>	<b>Twin SAM</b>
	<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
	<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)
	<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
	<b>Shell Thickness</b>	$2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)
	<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet
	<b>Filling Volume</b>	Approx. 25 liters
	<b>Wooden Support</b>	SPEAG standard phantom table

		<b>Model</b>	<b>Mounting Device for Hand-Held Transmitters</b>
		<b>Construction</b>	In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).
		<b>Material</b>	Polyoxymethylene (POM)

		<b>Model</b>	<b>System Validations Kits 450 MHz – 6 GHz</b>		
		<b>Construction</b>	Symmetrical dipole with I/4 balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.		
		<b>Frequency</b>	450 MHz to 5800 MHz		
		<b>Return Loss</b>	20 dB at specified validation position		
		<b>Dimensions (length and overall height in mm)</b>	<b>Product</b>	<b>Dipole length</b>	<b>Overall height</b>
			D450V3	290.0	330.0
			D750V3	179.0	330.0
			D900V2	148.5	340.0
			D1800V2	72.5	300.0
			D2000V2	65.0	300.0
			D2300V2	56.3	290.0
			D2450V2	52.0	290.0
			D2600V2	49.2	290.0
			D3300V2	38.0	285.0
			D3500V2	37.0	285.0
			D3700V2	34.7	285.0
			D3900V2	32.0	280.0
			D4200V2	30.1	280.0
			D4600V2	27.0	280.0
			D4900V2	25.0	280.0
			D5GHzV2	20.6	300.0

## 2.2. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centre for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

## 2.3. Test Positions of device relative to head

The reference standard requires two test positions for the handset in the head. These positions are the "cheek" position and the "tilted" position. The test positions used are described below. The handset should be tested in both positions (left and right sides) in the SAM phantom.

The DUT shall be placed in the Phantom in such way that the main point of the mobile terminal (acoustic output) coincides with the reference point located at the Phantom's ear.

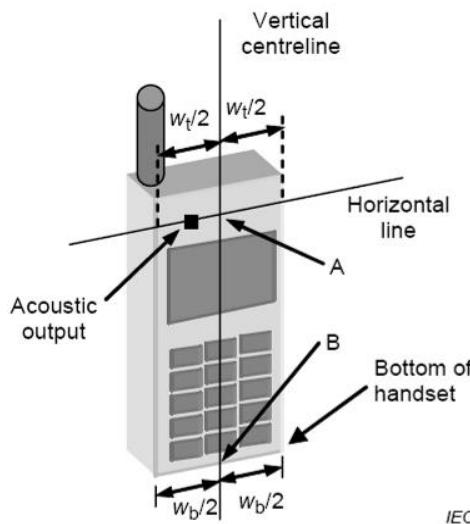


Figure 5: DUT's basic scheme

SAR measurements will be performed for the following configurations as indicated in the reference standard:


- Right side of Phantom, Cheek position.
- Right side of Phantom,  $15^\circ$  Tilted position.
- Left side of Phantom, Cheek position.
- Left side of Phantom,  $15^\circ$  Tilted position.

### Definition of the "cheek" position

The "cheek" position relative to Phantom is described as follows:

1. - Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the Phantom. While maintaining the device in this plane, align the centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE).

2. - Translate the mobile phone box towards the Phantom until the ear-piece touches the ear reference point (RE or LE). While maintaining the device in the reference plane, move the bottom of the box until any point of the front side is in contact with the cheek of the Phantom.

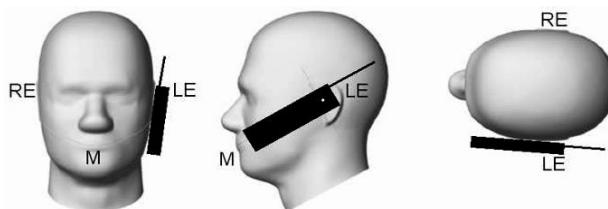


**Figure 6:** "Cheek" position of DUT

**Definition of the tilted position:**

The "15° tilted" position relative to Phantom is described as follows:

1. - Position the device in the "cheek" position described above.
2. - While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees.

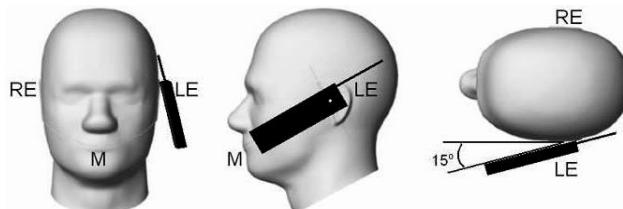

**Figure 7:** "Tilted" position of DUT

If the mobile phone is also designed to transmit with other configurations (antenna fully extended/retracted, keypad cover opened/closed...), all tests described above shall be performed for each configuration. When considering multi-mode and multi-band mobile phones, all of the above tests shall be performed at each transmitting mode/band with the corresponding maximum peak power level

If the device under test is a two-way radio the device shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions. If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used for SAR measurements.

## 2.4. Test Positions of device relative to body

Handheld PTT two-ways radios shall be tested for body-worn accessory exposure conditions according to KDB 643646 D01.

The device has been tested in the following test positions to be in compliance with this possible body-worn device operation at a minimum test distance of 5 mm:

- Back Face: DUT placed at the centre of flat phantom with its back side against the flat phantom surface.
- Front Face: DUT placed at the centre of flat phantom with its front side against the flat phantom surface.

As the device under test may be used with several types of accessories, antennas, audio Accessory and carrying accessories, Body-worn exposure conditions has been tested for each worst combination of accessories at 0mm distance to the flat phantom.

## 2.5. Test to be performed

Test shall be performed at the device positions previously described, on each side of the head (left and right side) and the flat phantom, using the channel frequency producing the highest rated output power of each operating band.

Additionally, the configuration giving to the maximum mass averaged SAR shall be used to test the rest of the applicable test frequency channels of each transmitting band. Thus, the tests to be performed are as follows:

- Measurements at the channel frequency producing the highest rated output power of the application band for head exposure condition:
  - SAR measurement at the left side of the Phantom in cheek and tilted 15° positions of the DUT.
  - SAR measurement at the right side of the Phantom in cheek and tilted 15° positions of the DUT.
  - SAR measurement at the center side of the Phantom at 25 mm for the front-of-face use.
- Measurements at the channel frequency producing the highest rated output power of the application band for body exposure condition:
  - SAR measurement with back and front faces of the DUT against the phantom.
  - SAR measurement in a body-worn accessory, positioned against the flat phantom, representative of the normal operating conditions expected by users.
- Measurements at the rest of the applicable test frequency channels of the application band: SAR measurement at the side and position where the maximum SAR level, measured at the channel frequency producing the highest rated output power, was found.
- All body-worn accessories containing metallic components, positioned against the flat phantom, using the frequency channel where the maximum SAR was found.

If the device under test is also designed to transmit with other configurations (antenna fully extended/retracted, keypad cover opened/closed...), all tests described above shall be performed for each configuration. When considering multi-mode and multi-band mobile phones, all of the above tests shall be performed at each transmitting mode/band with the corresponding maximum peak power level.

## 2.6. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantoms surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with approx. 15 mm spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning within a 1mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5 mm steps in both directions. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

## 2.7. Determination of the largest peak spatial-average SAR

To determine the maximum value of the peak spatial-average SAR of a DUT, all device positions, configurations and operational modes should be tested for each frequency band.

The averaging volume shall be chosen as 1gr. of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the DUT will be the maximum level obtained of the performed measurements indicated in the previous points.

## 2.8. System Check

Prior to the SAR measurements, system verification is done to verify the system accuracy. As IEEE 1528-2013, Annex paragraph 8.2.1 "System Check - Purpose" specifies, a complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 10% of this channel, whichever is greater.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

### 3. UNCERTAINTY

According to FCC OET KDB 865664 D01, if the highest measured 1-g SAR is < 1.5 W/kg, SAR measurement uncertainty analysis is not required to be included into SAR report, but it has been included for ISO 17025 accreditation.

#### Uncertainty for 300 MHz – 3 GHz

ERROR SOURCES (source of uncertainty)	Uncertainty value (%)	Prob. Dist.	Div.	<i>ci</i> (1g)	<i>ci</i> (10g)	Standard uncertainty (1g) (%)	Standard uncertainty (10g) (%)
<b>Measurement Equipment</b>							
Probe Calibration	13.30%	N	2	1	1	6.65%	6.65%
Probe calibration drift	1.70%	R	$\sqrt{3}$	1	1	0.98%	0.98%
Axial Isotropy	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%
Hemispherical Isotropy	9.60%	R	$\sqrt{3}$	0.7	0.7	3.88%	3.88%
Boundary effect	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%
Linearity	4.70%	R	$\sqrt{3}$	1	1	2.71%	2.71%
System Detection limits	0.25%	R	$\sqrt{3}$	1	1	0.14%	0.14%
Probe modulation response	4.80%	N	1	1	1	4.80%	4.80%
Readout electronics	0.30%	N	1	1	1	0.30%	0.30%
Response time	1.01%	R	$\sqrt{3}$	1	1	0.58%	0.58%
Integration time	2.60%	R	$\sqrt{3}$	1	1	1.50%	1.50%
RF Ambient noise	3.00%	R	$\sqrt{3}$	1	1	1.73%	1.73%
RF Ambient reflections	3.00%	R	$\sqrt{3}$	1	1	1.73%	1.73%
Probe positioner mech. restrictions	0.40%	R	$\sqrt{3}$	1	1	0.23%	0.23%
Probe positioning with respect to phantom shell	2.90%	R	$\sqrt{3}$	1	1	1.67%	1.67%
Max. SAR Eval.	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%
<b>Test Sample Related</b>							
Device holder uncertainty	3.60%	N	1	1	1	3.60%	3.60%
Test sample positioning	2.90%	N	1	1	1	2.90%	2.90%
Drift of output power	2.50%	N	1	1	1	2.50%	2.50%
<b>System Validation source (dipole)</b>							
Deviation of experimental dipole from numerical dipole	0.00%	N	1	0	0	0.00%	0.00%
Input power and SAR drift measurement	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%
Dipole axis to liquid distance	3.40%	R	$\sqrt{3}$	1	1	1.96%	1.96%
<b>Phantom and Setup</b>							
Phantom uncertainty (shape and thickness tolerances)	6.10%	R	$\sqrt{3}$	1	1	3.52%	3.52%
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.90%	N	1	1	0.84	1.90%	1.60%
Liquid conductivity (meas.)	3.57%	N	1	0.78	0.71	2.79%	2.54%
Liquid permittivity (meas.)	3.57%	N	1	0.26	0.26	0.93%	0.93%
Liquid conductivity – temperature uncertainty	2.30%	R	$\sqrt{3}$	0.78	0.71	1.04%	0.94%
Liquid permittivity – temperature uncertainty	0.36%	R	$\sqrt{3}$	0.23	0.26	0.05%	0.05%
<b>Combined standard uncertainty (Validation antenna)</b>	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					9.88%	9.75%
<b>Expanded uncertainty (confidence interval of 95%)</b>	$ue = 2.00 u_c$					19.77%	19.51%
<b>Combined standard uncertainty (DUT)</b>	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					12.68%	12.58%
<b>Expanded uncertainty (confidence interval of 95%)</b>	$ue = 2.00 u_c$					25.36%	25.16%

Table 2: Uncertainty Assessment for 300 MHz - 3 GHz.

## 4. SAR LIMIT

Having a worst-case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR 1 gr.) with the shape of a cube and averaged over a mass of 10 gr (Extremity SAR 10 gr). These levels could not exceed the values indicated in the application Standard:

Standard	Exposure	SAR	SAR Limit (W/kg)
FCC 47 CFR Part 1.1310, Paragraph (c)	Occupational/Controlled	SAR 1-g.	8.0
FCC 47 CFR Part 1.1310, Paragraph (c)	Occupational/Controlled Extremity	SAR 10-g.	20.0

Table 3: SAR limit

## 5. DEVICE UNDER TEST

### 5.1. Dimensions

Dimensions	Millimetres
Width x Height x Depth	Width: 61mm, Height: 139mm (excluding antenna and rotary) and Depth: 75mm (standard battery)
Overall Diagonal:	145.0
Display Diagonal:	75.0

Table 4: DUT dimensions

### 5.2. Wireless Technology

Wireless Technology	Frequency Bands	Modes	Duty Cycle used for SAR testing
TETRA	450-470 MHz	TETRA	22.69 %
Wi-Fi	2.4 GHz	802.11b/g/n (20MHz)	*See remarks and comments 3
Bluetooth	2.4 GHz	Bluetooth	SAR Low-Power Exclusion compliant

Table 5: Supported modes

### 5.3. Simultaneous Transmission

Simultaneous transmission evaluation was performed according to EN 62209-1:2016. & EN 62209-2:2010/A1:2019. The detailed simultaneous transmission combination is:

RF Exposure Condition	Capable Transmit Configurations
Head	TETRA 450-470MHz + WiFi 2.4GHz or Bluetooth
In front of face	TETRA 450-470MHz + WiFi 2.4GHz or Bluetooth
Body-worn	TETRA 450-470MHz + WiFi 2.4GHz or Bluetooth

Notes:  
 1. Wi-Fi cannot transmit simultaneously with Bluetooth Radio.

Table 6: DUT simultaneous transmission

## 5.4. Antenna Location

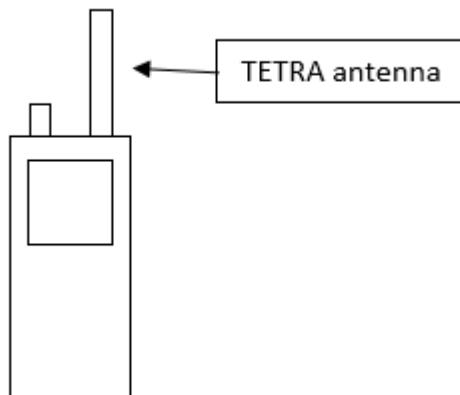


Figure 8: Antenna location sketch.

## 5.5. Accessories

- Battery

There are two different battery models with different capacities. The battery with the maximum capacity has been used to perform head and in front of face exposure conditions measurements and the other one, the thinnest one, has been used to perform body worn exposure condition measurements.

In order to perform a battery check, a measurement with the thinnest battery has been performed in head exposure condition, and with the maximum capacity battery in body-worn exposure condition.

- Carrying Accessories

In order to reduce SAR testing for the carrying accessories available for the device, into the following table there are stated the worst-cases accessories which have been selected taking into account similar operating and exposure characteristics and being representative of groups of similar ones:

Carrying Accessory	Control Nº	Type	Metallic parts	Test Distance	Comments
1	73291/014	Belt Clip	Yes	0mm	None
2	73291/051	Nylon Holster	Yes	0mm	None
3	73291/016/048	Heavy Duty Case with Klick Fast Stud	Yes	0mm	+ Acc.6
4	73291/049	Extended Belt Loop	Yes	0mm	None
5	73291/050	Lightweight Leather Case with Belt Clip	Yes	0mm	None
6	73291/016	Klickfast Dock (60 cm)	No	0mm	None

Table 7: DUT carrying accessories

All body-worn accessories containing metallic components were tested individually.

For the body-worn accessories that do not contain metallic or conductive components the one which provided the smallest test separation distance was also tested.

- **RSM (Remote Speaker Microphones)**

All supported RSM accessories do not contain any radiating antennas.

- **Antennas**

The device can use three TETRA external antennas with the following dimension and frequency transmission band:

Antenna	Frequency band (MHz)	Length (mm)
300-00499	403-470	67
300-00663	450-470	66
300-01032	450-470	112

**Table 8:** Antenna information.

See “Appendix F – Photographs” of this document for further information.

## Appendix B: Test results

## Index

1. TEST CONDITIONS.....	26
1.1. Power supply (V): .....	26
1.2. Temperature (°C): .....	26
1.3. DUT information and test-site configurations .....	26
1.4. Test signal, Output Power and Frequencies .....	26
2. CONDUCTED AVERAGE POWER MEASUREMENTS .....	27
2.1. TETRA.....	27
2.2. BLUETOOTH.....	27
3. TISSUE PARAMETERS MEASUREMENTS .....	28
4. SYSTEM CHECK MEASUREMENTS .....	28
5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) .....	29
5.1. Summary maximum results for head measurements. .....	29
5.2. Summary maximum results for body measurements.....	29
5.3. Result for head simultaneous multi-band transmission .....	30
5.4. Result for front of face simultaneous multi-band transmission.....	30
5.5. Result for body simultaneous multi-band transmission.....	30
5.6. Results for 802.11 2400 MHz Band. .....	30
5.7. TETRA.....	31

## 1. TEST CONDITIONS

### 1.1. Power supply (V):

$V_n$  = 7.4 V rechargeable battery

Type of power supply = DC Voltage from rechargeable 7.4 V battery.

### 1.2. Temperature (°C):

$T_n$  = +20.00 to +25.00

The subscript n indicates normal test conditions.

### 1.3. DUT information and test-site configurations

The DUT was tested over head and body exposure conditions:

- For head tests, the DUT was placed into cheek and tilt position on the right/left side of the SAM phantom.
- For in-front-of face test, the DUT was placed with the front face against the flat side of the SAM phantom, with a testing distance of 25 mm.
- For body tests, the DUT was placed at 5 mm for body-worn measurements, and with each carry accessory, with its back face in direct contact with the flat phantom surface, as its intended use.

### 1.4. Test signal, Output Power and Frequencies

For the TETRA mode, the device was put into operation by using a proprietary test mode supplied by the manufacturer, setting the maximum output power for each mode.

In all operating bands and test positions, the measurements were performed using the channel producing the highest rated output power.

In each band, for those positions where the maximum averaged SAR was found, measurements were performed on the other applicable test frequency channels except those with applicable test reductions.

A fully charged battery was used for every test sequence. In all operating bands and test positions, the measurements were performed on the middle channel. In each band, for those positions where the maximum averaged SAR was found, measurements were performed on the remaining required channels except those with applicable test reductions.

The maximum conducted time-averaged power of the device for each mode was measured with a power sensor R&S NRP-Z81.

The target power alignments, including tune-up tolerance, for RF components declared by the manufacturer for each supported technology are:

Band	TETRA	
	Maximum Burst Output Power (dBm)	Maximum Average Output Power (dBm)
450-470 MHz	34.31	28.3

The maximum conducted peak output power declared by the manufacturer, including tune-up tolerance, for the device is 34.31 dBm, which corresponds to a maximum average output power of 28.3 dBm, according to its 22.69 % transmitting duty cycle value.

## 2. CONDUCTED AVERAGE POWER MEASUREMENTS

### 2.1. TETRA

Mode	Channel	Frequency (MHz)	Modulation	Average Output Power (dBm)
TETRA 450 - 470 MHz	Low	450.00	TETRA	28.06
	Mid	460.00	TETRA	28.08
	High	470.00	TETRA	28.05

### 2.2. BLUETOOTH

Based on paragraph “4.3.1 Standalone SAR test exclusion considerations” of the KDB 447498 D01 - General RF Exposure Guidance:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Protocol	Max. Declared Output Power		Min. Test separation distance (mm)	Frequency (GHz)	Result	Test Exclusion
	(dBm)	(mW)				
Bluetooth LE	9.5	8.91	5.0	2.402 - 2.480	2.806	✓

The computed value for Bluetooth is < 3.0, so Bluetooth mode qualifies for Standalone SAR test exclusion for 1-g SAR and 10-g SAR.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg for test separation distances } \leq 50 \text{ mm; where } x = 7.5 \text{ for 1-g SAR and } x = 18,75 \text{ for 10-g extremity SAR}$$

Estimated SAR					
Protocol	Max. Output Power		Min. Test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR
	(dBm)	(mW)			
Bluetooth LE	9.5	8.91	5.0	2.48	0.37

### 3. TISSUE PARAMETERS MEASUREMENTS

frequency (MHz)	Target Head Tissue		Measured Head Tissue		Deviation %		Measured Date
	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	
450	43.50	0.87	44.91	0.85	3.25	-2.66	2023-02-02
450	43.50	0.87	45.52	0.88	4.65	0.97	2023-02-06
450	43.5	0.87	46.94	0.86	7.92	-0.8	2023-02-08
450	43.5	0.87	46.84	0.88	7.69	0.65	2023-02-13
450	43.5	0.87	45.75	0.9	5.17	3.56	2023-02-15
450	43.5	0.87	44.03	0.85	1.22	-2.23	2023-02-17

Note: The dielectric properties have been measured by the contact probe method at 22° C.

DASY5 and DASY6 measurement systems have a SAR error compensation algorithm to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, so the tolerance for  $\epsilon$  and  $\sigma$  may be relaxed to  $\pm 10\%$ .

#### - Composition / Information on ingredients

##### Head and Muscle Tissue Simulation Liquids HSL450V2/MSL450V2

Water	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyyl-3(2H)-isothiazolone, 0.1 – 0.7%

### 4. SYSTEM CHECK MEASUREMENTS

Execution Date	Frequency (MHz)	Exposure Conditions	SAR over	Fast SAR (W/Kg)	SAR (W/Kg)	1 W Target SAR (W/Kg)	1 W Nor. SAR (W/Kg)	Drift (%)
2023-02-02	450	Head	1-g	1.15	1.18	4.63	4.72	1.94
2023-02-02	450	Head	10-g	0.81	0.81	3.08	3.22	4.55
2023-02-06	450	Head	1-g	1.14	1.16	4.63	4.64	0.22
2023-02-06	450	Head	10-g	0.80	0.80	3.08	3.18	3.25
2023-02-08	450	Head	1-g	1.13	1.11	4.63	4.44	-4.10
2023-02-08	450	Head	10-g	0.79	0.74	3.08	2.96	-4.03
2023-02-13	450	Head	1-g	1.15	1.13	4.63	4.52	-2.38
2023-02-13	450	Head	10-g	0.81	0.76	3.08	3.04	-1.17
2023-02-15	450	Head	1-g	1.15	1.16	4.63	4.64	0.22
2023-02-15	450	Head	10-g	0.81	0.77	3.08	3.08	0.13
2023-02-17	450	Head	1-g	1.06	1.08	4.63	4.32	-6.70
2023-02-17	450	Head	10-g	0.74	0.72	3.08	2.90	-5.84

## 5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

### 5.1. Summary maximum results for head measurements.

Antenna	Mode	Side / Position	Channel (Frequency)	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)
300-00499	TETRA 450 – 470MHz	Left / Cheek	450 MHz	2.969	8.000
300-00663	TETRA 450 - 470MHz	Left / Cheek	450 MHz	3.522	8.000
300-01032	TETRA 450 - 470MHz	Left / Tilt	470 MHz	2.828	8.000
300-00499	TETRA 450 – 470MHz	Front of face	450 MHz	1.019	8.000
300-00663	TETRA 450 - 470MHz	Front of face	450 MHz	1.218	8.000
300-01032	TETRA 450 - 470MHz	Front of face	470 MHz	0.941	8.000

### 5.2. Summary maximum results for body measurements.

Antenna	Mode	Side / Position	Channel (Frequency)	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)
300-00499	TETRA 450 – 470MHz	Front Face	460 MHz	1.186	8.000
300-00663	TETRA 450 - 470MHz	Front Face	450 MHz	2.224	8.000
300-01032	TETRA 450 - 470MHz	Front Face	460 MHz	2.118	8.000

### 5.3. Result for head simultaneous multi-band transmission

Transmission Mode	Band	Max. SAR 1-g (W/kg)	$\Sigma$ SAR <sub>i</sub> (W/kg)	Limit SAR 1-g (W/kg)	Verdict
TETRA	450-470MHz	3.522	3.575	8.000	Pass
802.11 b/g/n	2.4GHz	0.053 <sup>3</sup>			
TETRA	450-470MHz	3.522	3.892	8.000	Pass
Bluetooth (Estimated)	2.4GHz	0.37			

3: See Remarks and comments.

### 5.4. Result for front of face simultaneous multi-band transmission

Transmission Mode	Band	Max. SAR 1-g (W/kg)	$\Sigma$ SAR <sub>i</sub> (W/kg)	Limit SAR 1-g (W/kg)	Verdict
TETRA	450-470MHz	1.218	1.224	8.000	Pass
802.11 b/g/n	2.4GHz	0.006 <sup>3</sup>			
TETRA	450-470MHz	1.218	1.588	8.000	Pass
Bluetooth (Estimated)	2.4GHz	0.37			

3: See Remarks and comments.

### 5.5. Result for body simultaneous multi-band transmission

Transmission Mode	Band	Max. SAR 1-g (W/kg)	$\Sigma$ SAR <sub>i</sub> (W/kg)	Limit SAR 1-g (W/kg)	Verdict
TETRA	450-470MHz	2.224	2.469	8.000	Pass
802.11 b/g/n	2.4GHz	0.245 <sup>3</sup>			
TETRA	450-470MHz	2.224	2.594	8.000	Pass
Bluetooth (Estimated)	2.4GHz	0.37			

3: See Remarks and comments.

### 5.6. Results for 802.11 2400 MHz Band.

See Remarks and comments 3.

## 5.7. TETRA

Ant.	Expos Cond.	Pos.	Dist (mm)	Ch.	Freq. (MHz)	Duty Cycle (%)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)	Verdict	Plot No.
300-00499	Head	Left Cheek	0	Mid	460.00	100.00	2.140	2.260	-0.459	1.059	2.393	8.000	P	
		Left Tilt	0	Mid	460.00	100.00	1.510	N/M	1.391	1.059	N/A	8.000	P	
		Right Cheek	0	Mid	460.00	100.00	2.010	N/M	-0.230	1.059	N/A	8.000	P	
		Right Tilt	0	Mid	460.00	100.00	1.610	N/M	0.925	1.059	N/A	8.000	P	
		Left Cheek	0	Low	450.00	100.00	2.710	2.790	1.508	1.064	2.969	8.000	P	1
		Left Cheek	0	High	470.00	100.00	1.750	1.790	-1.599	1.067	1.910	8.000	P	
		HEAD - Battery check	0	Low	450.00	100.00	2.520	2.550	-2.164	1.059	2.700	8.000	P	2
		Front of face	25	Low	450.00	100.00	0.976	0.962	0.693	1.059	1.019	8.000	P	3
	Body	Front Face	5	Mid	460.00	100.00	1.130	1.120	1.859	1.059	1.186	8.000	P	4
		Back Face	5	Mid	460.00	100.00	0.991	N/M	-0.688	1.059	N/A	8.000	P	
		Front Face	0	Low	450.00	100.00	0.985	0.965	0.925	1.064	1.027	8.000	P	
		Front Face	0	High	470.00	100.00	0.629	0.606	0.346	1.067	0.647	8.000	P	
		Acc1	0	Mid	460.00	100.00	0.847	0.831	0.012	1.059	0.880	8.000	P	
		Acc2 - Front face	0	Mid	460.00	100.00	1.090	1.070	3.753	1.059	1.133	8.000	P	5
		Acc2- Back face	0	Mid	460.00	100.00	0.965	0.970	-0.574	1.059	1.027	8.000	P	
		Acc3	0	Mid	460.00	100.00	0.543	0.548	-0.115	1.059	0.580	8.000	P	
		Acc4	0	Mid	460.00	100.00	1.030	0.987	-1.599	1.059	1.045	8.000	P	
		Acc5	0	Mid	460.00	100.00	0.063	0.590	5.439	1.059	0.625	8.000	P	
		Acc6	0	Mid	460.00	100.00	0.785	0.793	1.625	1.059	0.840	8.000	P	
		BODY - Battery check	5	Mid	460.00	100.00	1.070	1.050	0.925	1.059	1.112	8.000	P	6



Ant.	Expos Cond.	Pos.	Dist (mm)	Ch.	Freq. (MHz)	Duty Cycle (%)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)	Verdict	Plot No.
300-00663	Head	Left Cheek	0	Mid	460.00	100.00	3.150	3.260	-0.345	1.059	3.452	8.000	P	
		Left Tilt	0	Mid	460.00	100.00	2.140	N/M	1.158	1.059	N/A	8.000	P	
		Right Cheek	0	Mid	460.00	100.00	2.650	N/M	2.094	1.059	N/A	8.000	P	
		Right Tilt	0	Mid	460.00	100.00	2.440	N/M	-0.459	1.059	N/A	8.000	P	
		Left Cheek	0	Low	450.00	100.00	3.250	3.310	-0.230	1.064	3.522	8.000	P	7
		Left Cheek	0	High	470.00	100.00	2.760	2.940	-4.060	1.067	3.137	8.000	P	
		HEAD - Battery check	0	Low	450.00	100.00	3.180	3.210	-0.688	1.059	3.399	8.000	P	8
		Front of face	25	Low	450.00	100.00	1.120	1.150	1.859	1.059	1.218	8.000	P	9
	Body	Front Face	5	Mid	460.00	100.00	1.750	1.800	1.508	1.059	1.906	8.000	P	
		Back Face	5	Mid	460.00	100.00	1.640	N/M	-1.599	1.059	N/A	8.000	P	
		Front Face	5	Low	450.00	100.00	1.980	2.090	3.157	1.064	2.224	8.000	P	10
		Front Face	5	High	470.00	100.00	1.490	1.480	2.447	1.067	1.579	8.000	P	
		Acc1	0	Low	450.00	100.00	1.270	1.250	-0.688	1.059	1.324	8.000	P	
		Acc2 - Front face	0	Low	450.00	100.00	1.940	1.910	-3.061	1.059	2.023	8.000	P	11
		Acc2- Back face	0	Low	450.00	100.00	1.700	1.790	0.809	1.059	1.896	8.000	P	
		Acc3	0	Low	450.00	100.00	0.773	0.831	-0.574	1.059	0.880	8.000	P	
		Acc4	0	Low	450.00	100.00	1.490	1.580	0.809	1.059	1.673	8.000	P	
		Acc5	0	Low	450.00	100.00	0.872	0.908	0.000	1.059	0.962	8.000	P	
		Acc6	0	Low	450.00	100.00	1.120	1.180	3.039	1.059	1.250	8.000	P	
		BODY - Battery check	5	Low	450.00	100.00	1.910	1.900	0.693	1.059	2.012	8.000	P	12

Ant.	Expos Cond.	Pos.	Dist (mm)	Ch.	Freq. (MHz)	Duty Cycle (%)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)	Verdict	Plot No.
300-01032	Head	Left Cheek	0	Mid	460.00	100.00	1.890	N/M	-0.459	1.059	N/A	8.000	P	
		Left Tilt	0	Mid	460.00	100.00	2.340	2.460	0.693	1.059	2.605	8.000	P	
		Right Cheek	0	Mid	460.00	100.00	1.540	N/M	0.000	1.059	N/A	8.000	P	
		Right Tilt	0	Mid	460.00	100.00	1.960	N/M	-2.051	1.059	N/A	8.000	P	
		Left Tilt	0	Low	450.00	100.00	2.160	2.190	-0.917	1.064	2.330	8.000	P	
		Left Tilt	0	High	470.00	100.00	2.720	2.650	0.925	1.067	2.828	8.000	P	13
		HEAD - Battery check	0	High	470.00	100.00	2.590	2.670	2.683	1.059	2.828	8.000	P	14
		Front of face	25	High	470.00	100.00	0.894	0.889	0.346	1.059	0.941	8.000	P	15
	Body	Front Face	5	Mid	460.00	100.00	2.040	2.000	0.925	1.059	2.118	8.000	P	16
		Back Face	5	Mid	460.00	100.00	1.280	N/M	0.577	1.059	N/A	8.000	P	
		Front Face	5	Low	450.00	100.00	1.600	1.580	1.391	1.064	1.681	8.000	P	
		Front Face	5	High	470.00	100.00	1.800	1.780	0.346	1.067	1.899	8.000	P	
		Acc1	0	Mid	460.00	100.00	0.835	0.857	-0.688	1.059	0.908	8.000	P	
		Acc2 - Front face	0	Mid	460.00	100.00	1.320	1.340	2.683	1.059	1.419	8.000	P	17
		Acc2- Back face	0	Mid	460.00	100.00	1.310	1.330	-1.258	1.059	1.408	8.000	P	
		Acc3	0	Mid	460.00	100.00	0.555	0.550	0.000	1.059	0.582	8.000	P	
		Acc4	0	Mid	460.00	100.00	1.090	1.110	-0.803	1.059	1.175	8.000	P	
		Acc5	0	Mid	460.00	100.00	0.581	0.548	-1.825	1.059	0.580	8.000	P	
		Acc6	0	Mid	460.00	100.00	0.744	0.741	-0.115	1.059	0.785	8.000	P	
		BODY - Battery check	5	Mid	460.00	100.00	1.450	1.440	-0.115	1.059	1.525	8.000	P	18

N/M: Not Measured (See Remarks and comments.1.)

N/A: Not Applicable

## Appendix C: Measurement report

## Plot N°1

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 03/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 44.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Left Hand Side\_ant 300-00499/FCC/ISED TETRA, 450 MHz, Cheek/Area Scan (71x181x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.24 W/kg

**Left Hand Side\_ant 300-00499/FCC/ISED TETRA, 450 MHz, Cheek/Zoom Scan (5x5x5)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.06 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 4.16 W/kg

**SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.9 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 22.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.8%

Maximum value of SAR (measured) = 3.33 W/kg

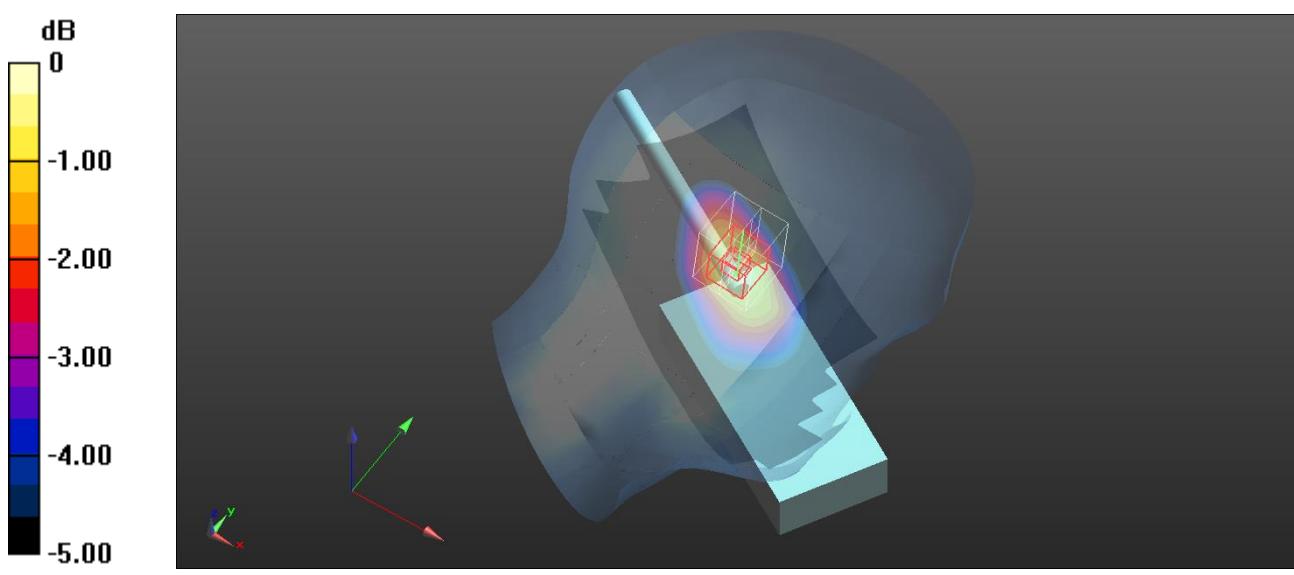

## Plot Nº2

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 08/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 46.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Battery Check/Ant\_300-00499, FCC/ISED TETRA, 450 MHz, Cheek/Area Scan (71x181x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.01 W/kg

**Battery Check/Ant\_300-00499, FCC/ISED TETRA, 450 MHz, Cheek/Zoom Scan (5x5x5)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.34 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 3.71 W/kg

**SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.7 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 3.12 W/kg

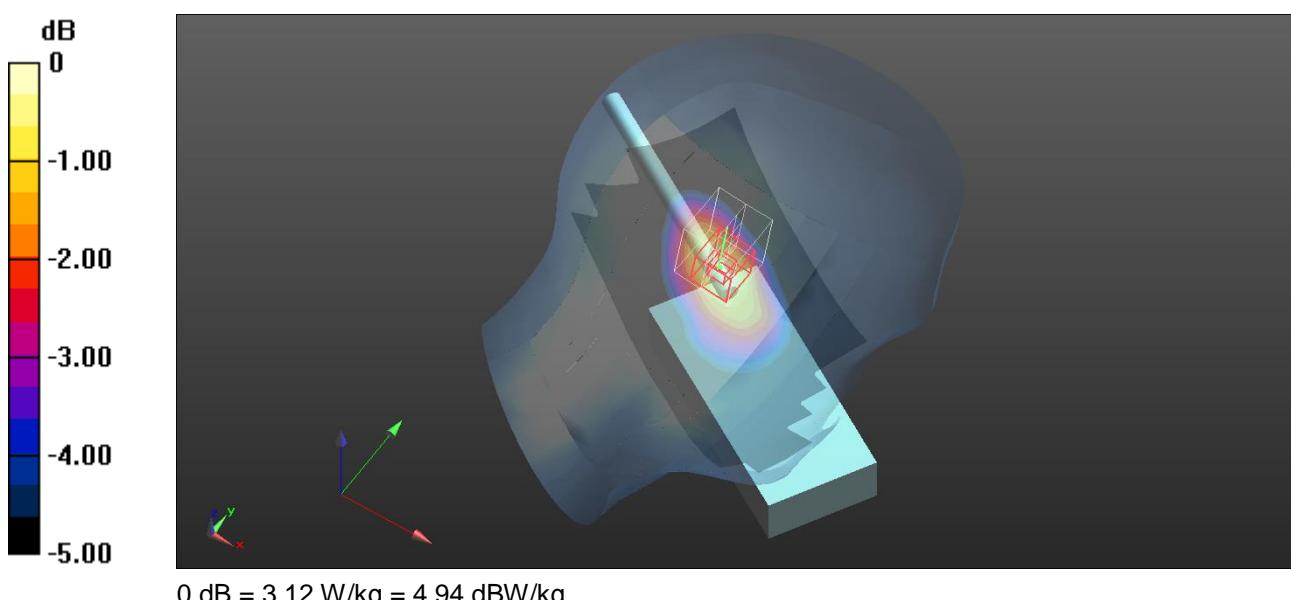

### Plot N°3

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 09/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 46.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front of Face, d=25mm/Ant\_300-00499, FCC/ISED TETRA, 450 MHz, Front of face/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg

**Flat Phantom, Front of Face, d=25mm/Ant\_300-00499, FCC/ISED TETRA, 450 MHz, Front of face/Zoom Scan (6x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.22 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.711 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 1.15 W/kg

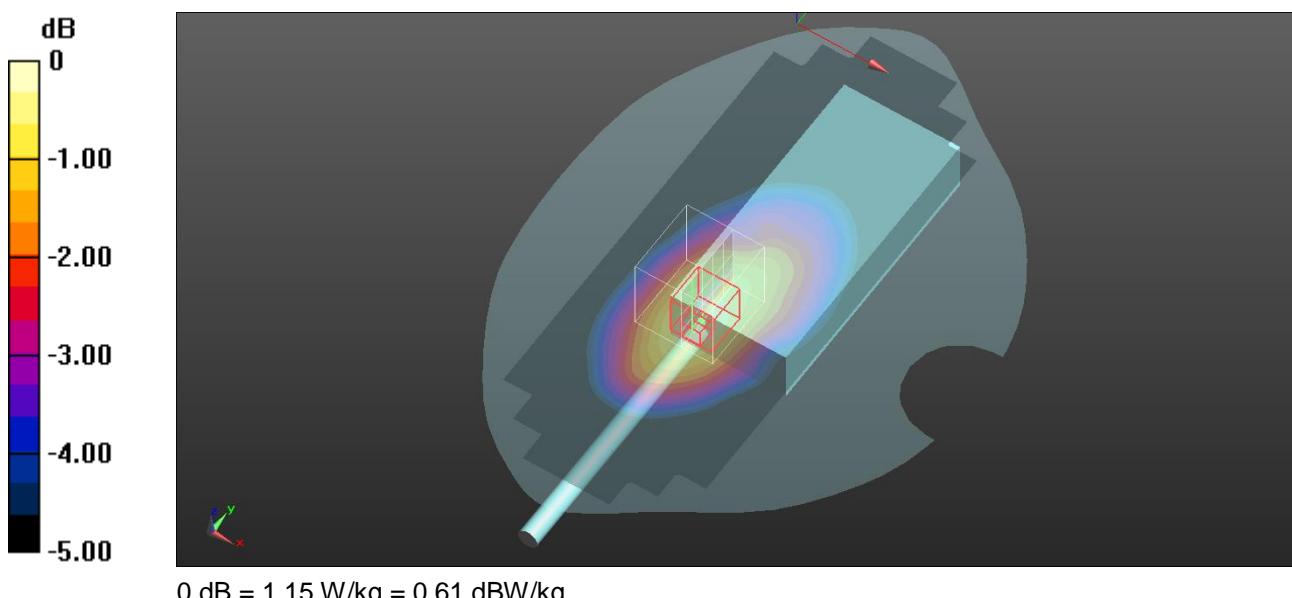

#### Plot Nº4

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 13/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 46.64$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm/Ant\_300-00499, FCC/ISED TETRA, 460 MHz/Area Scan**

(71x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

**Flat Phantom, Front Face, d=5mm/Ant\_300-00499, FCC/ISED TETRA, 460 MHz/Zoom Scan (5x5x5)/Cube**

**0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.34 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.748 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 1.40 W/kg

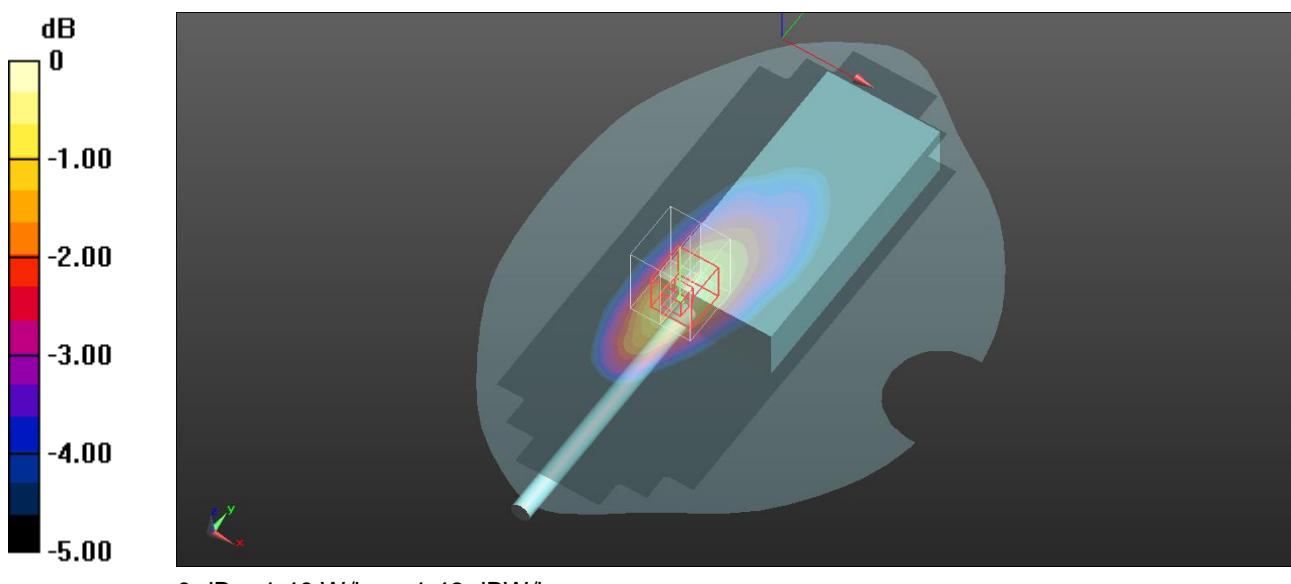

## Plot N°5

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 16/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 45.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Accessories, d=0mm - ANT 300-00499/ACC2 - Front Face, FCC/ISED TETRA, 460 MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

**Flat Phantom, Accessories, d=0mm - ANT 300-00499/ACC2 - Front Face, FCC/ISED TETRA, 460 MHz/Zoom Scan (6x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.00 V/m; Power Drift = 0.32 dB


Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.767 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 25 mm

Ratio of SAR at M2 to SAR at M1 = 70.3%

Maximum value of SAR (measured) = 1.33 W/kg

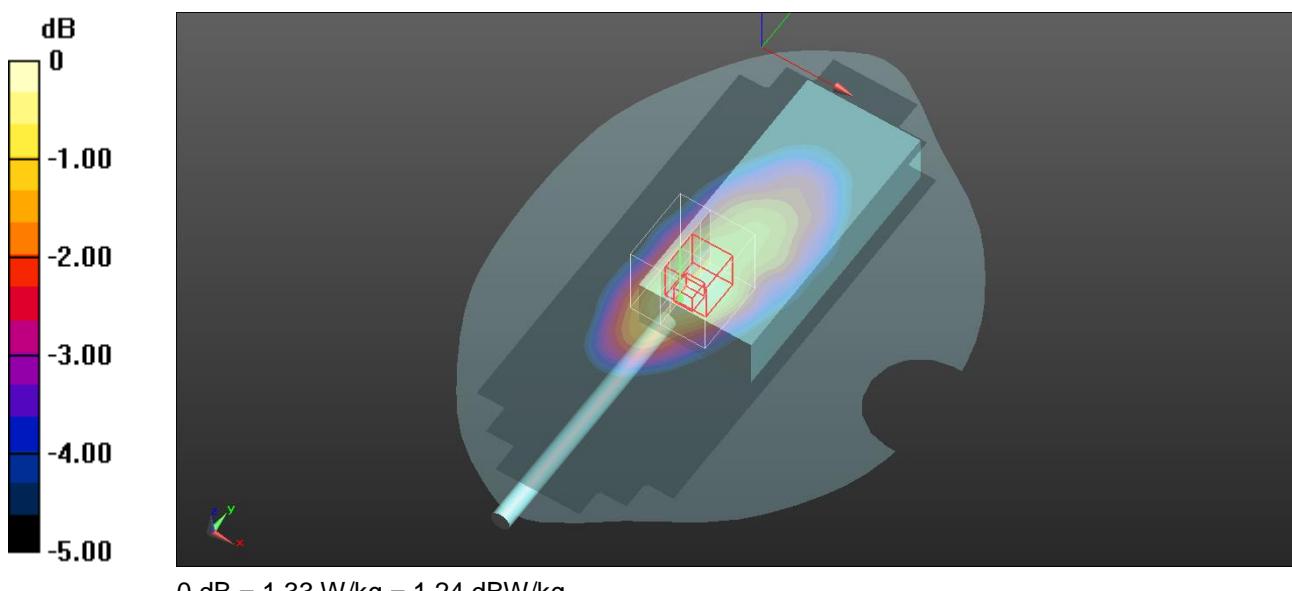

## Plot N°6

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 17/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 43.79$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-00499, FCC/ISED TETRA, 460 MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-00499, FCC/ISED TETRA, 460 MHz/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.59 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.738 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 1.28 W/kg

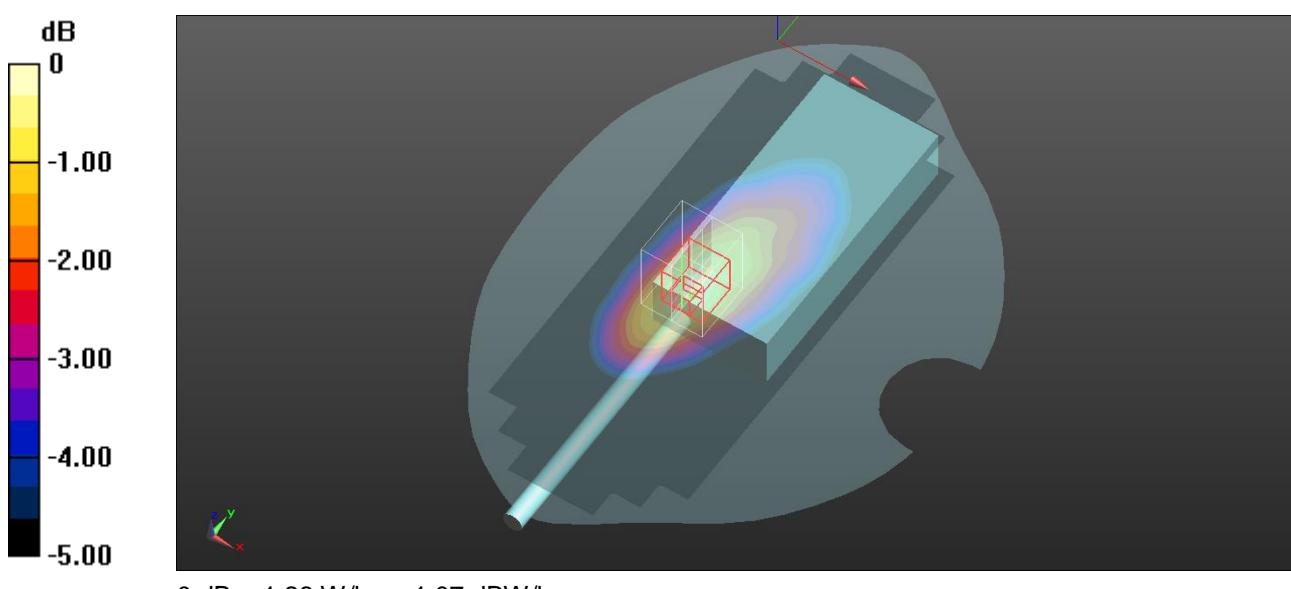

## Plot N°7

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 07/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 45.52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Left Hand Side\_ant 300-00663/EU/FCC/ISED TETRA, 450 MHz, Cheek 2/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.01 W/kg

**Left Hand Side\_ant 300-00663/EU/FCC/ISED TETRA, 450 MHz, Cheek 2/Zoom Scan (6x6x5)/Cube**

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.28 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.01 W/kg

**SAR(1 g) = 3.31 W/kg; SAR(10 g) = 2.26 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 19.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.6%

Maximum value of SAR (measured) = 4.20 W/kg

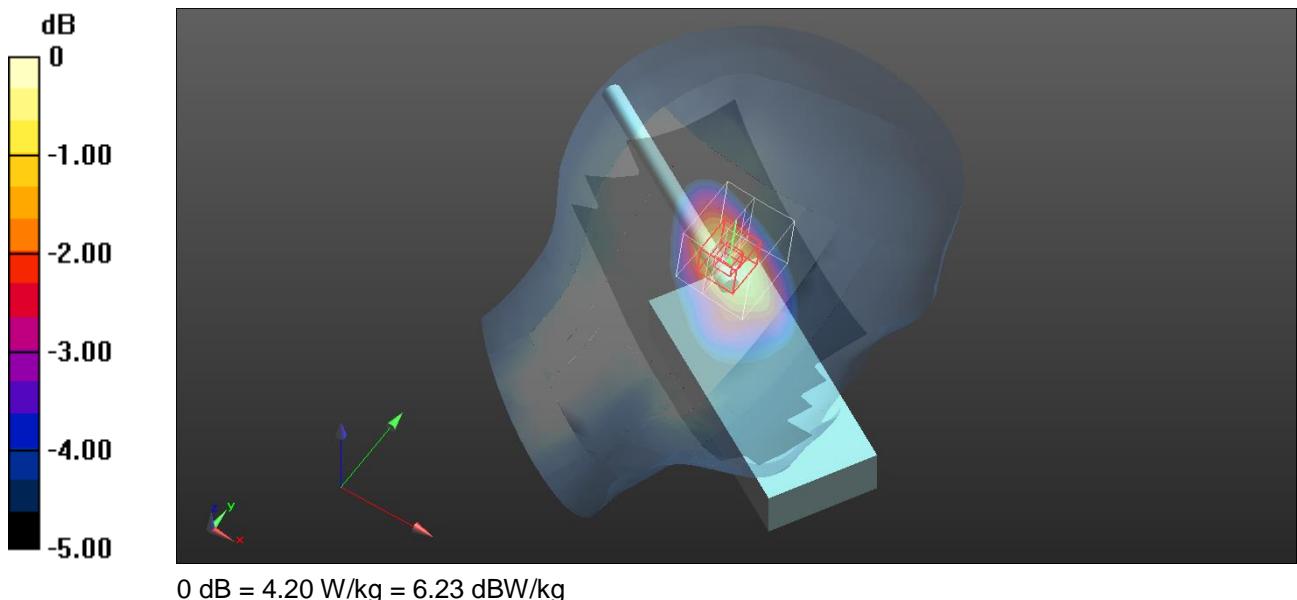

## Plot N°8

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 08/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 46.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Battery Check/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz, Cheek/Area Scan (71x181x1):**

Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 3.84 W/kg

**Battery Check/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz, Cheek/Zoom Scan (6x6x5)/Cube**

0: Measurement grid:  $dx=8$  mm,  $dy=8$  mm,  $dz=5$  mm

Reference Value = 57.13 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 4.72 W/kg

**SAR(1 g) = 3.21 W/kg; SAR(10 g) = 2.19 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 22.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 3.85 W/kg

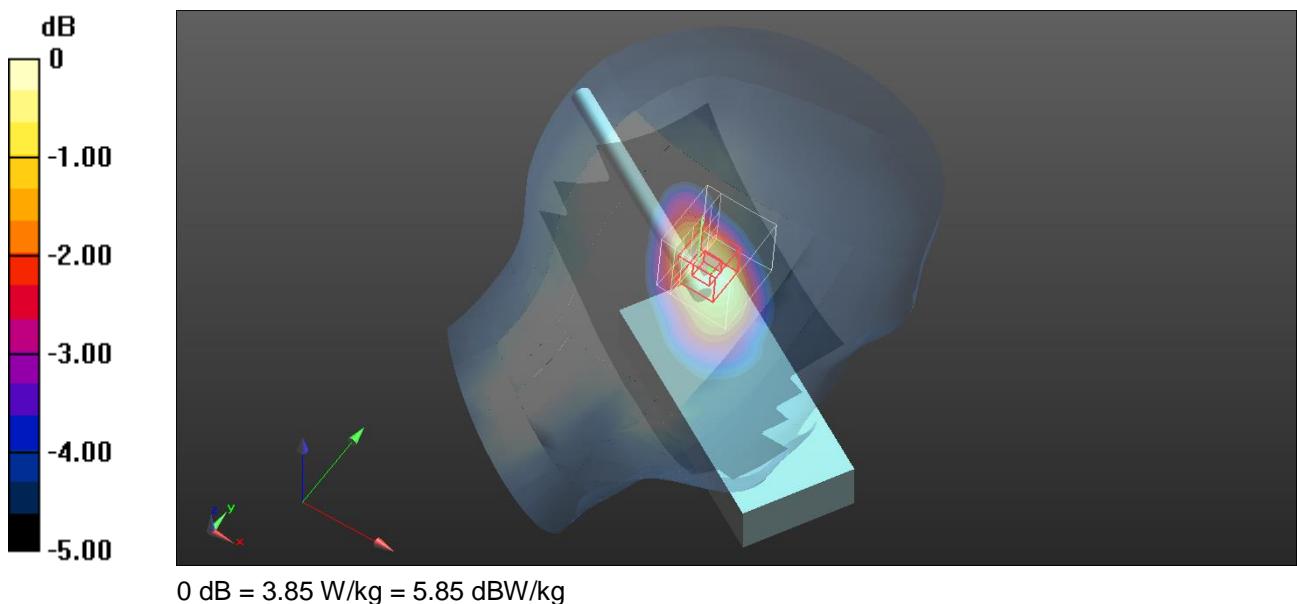

## Plot N°9

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 09/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 46.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front of Face, d=25mm/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz, Front of face/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg

**Flat Phantom, Front of Face, d=25mm/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz, Front of face/Zoom Scan (6x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.00 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.841 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 1.35 W/kg

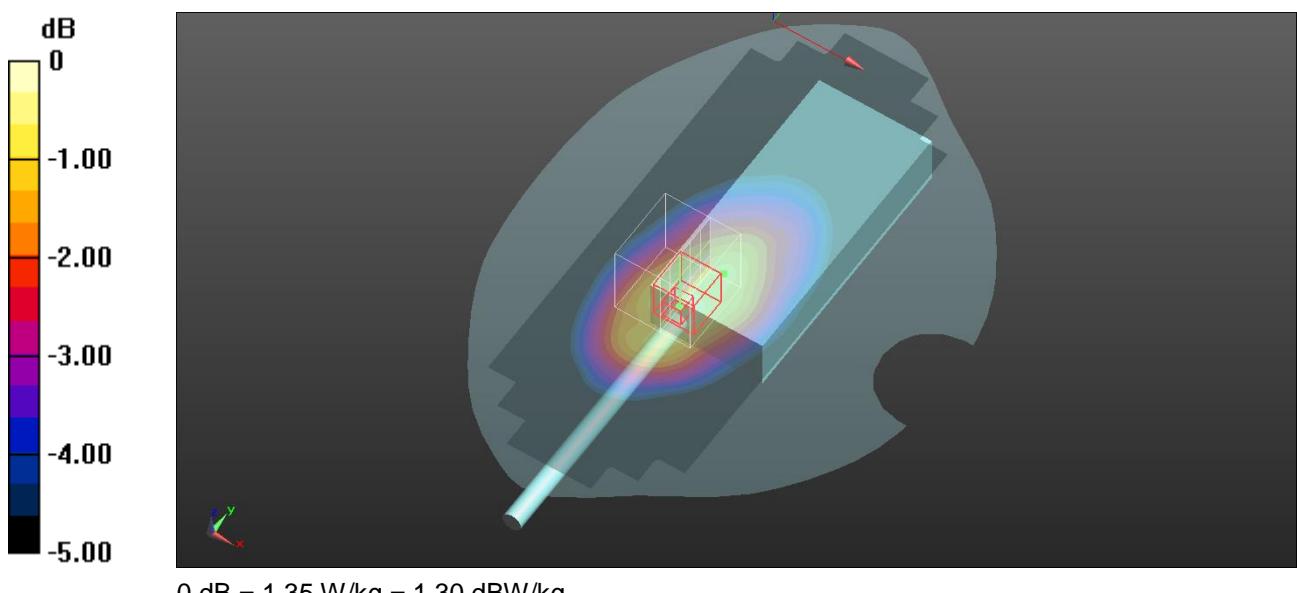

## Plot Nº10

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 14/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 46.84$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz/Area Scan**

(71x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.20 W/kg

**Flat Phantom, Front Face, d=5mm/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz/Zoom Scan (5x6x5)/Cube**

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.87 V/m; Power Drift = 0.27 dB


Peak SAR (extrapolated) = 3.09 W/kg

**SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.43 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 2.61 W/kg

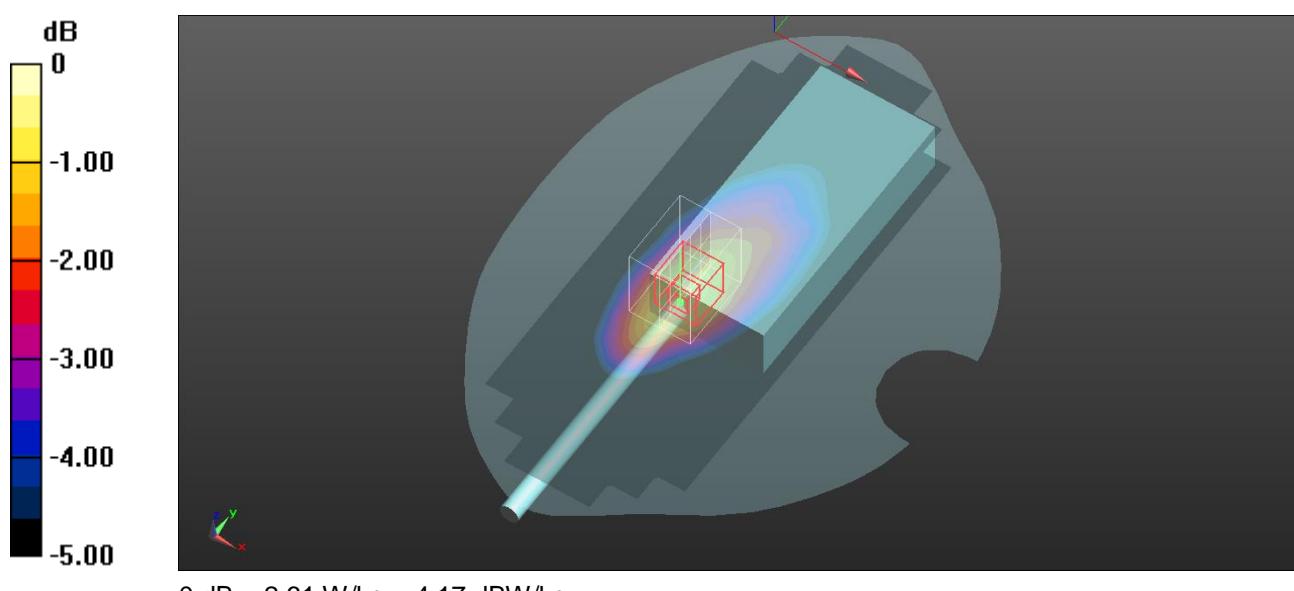

## Plot N°11

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 16/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 45.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Accessories, d=0mm - ANT 300-00663/ACC2 - Front Face, EU/FCC/ISED TETRA, 450**

**MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.21 W/kg

**Flat Phantom, Accessories, d=0mm - ANT 300-00663/ACC2 - Front Face, EU/FCC/ISED TETRA, 450**

**MHz/Zoom Scan (6x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.74 V/m; Power Drift = -0.27 dB


Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 1.91 W/kg; SAR(10 g) = 1.37 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 28.3 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 2.36 W/kg

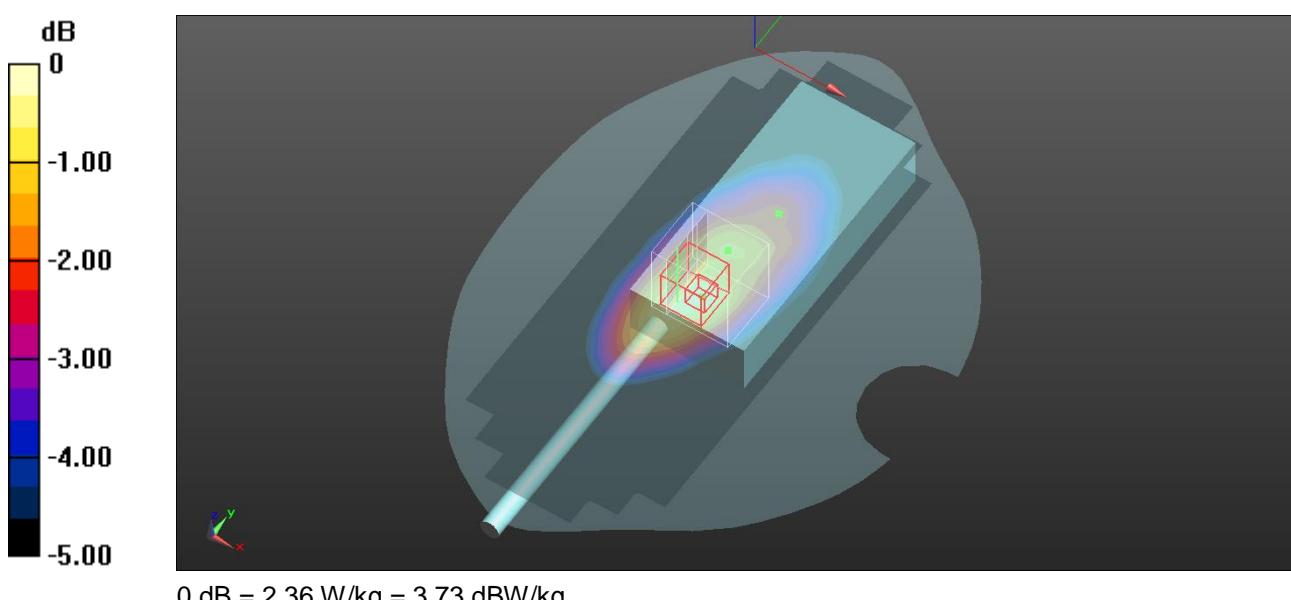

## Plot Nº12

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 17/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 450 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 44.03$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.11 W/kg

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-00663, EU/FCC/ISED TETRA, 450 MHz/Zoom Scan (5x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.51 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 1.9 W/kg; SAR(10 g) = 1.34 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 2.29 W/kg

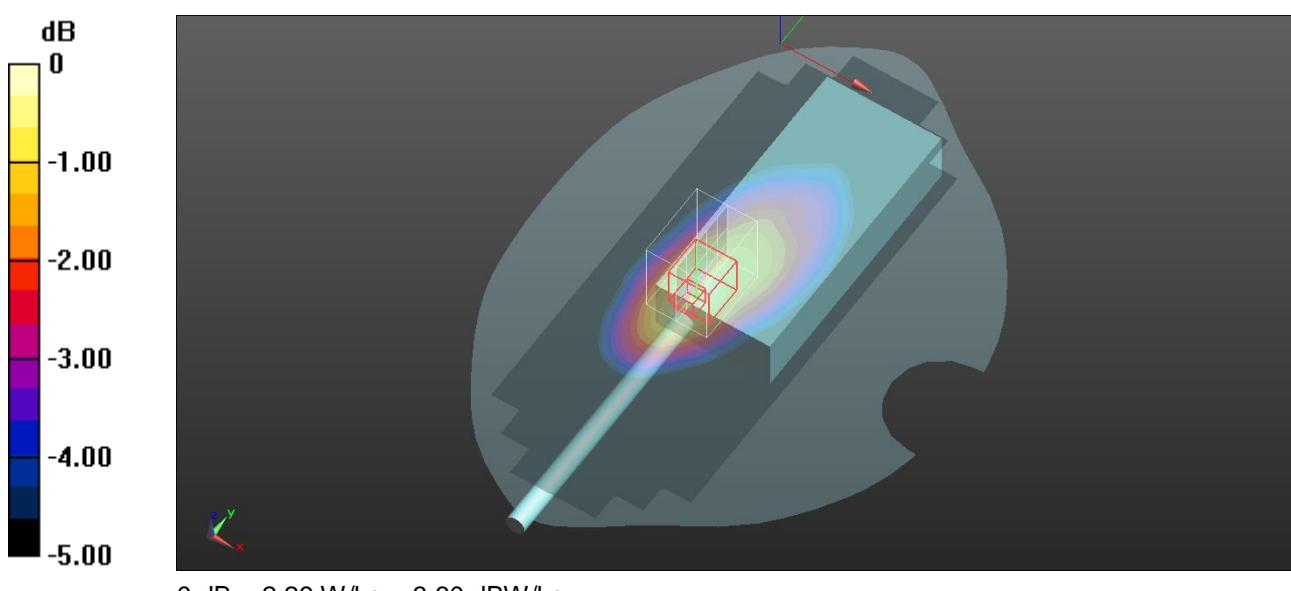

### Plot Nº13

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 07/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 470 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 470$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 45.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 470 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Left Hand Side\_ant 300-01032/EU/FCC/ISED TETRA, 470 MHz, Tilt/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.44 W/kg

**Left Hand Side\_ant 300-01032/EU/FCC/ISED TETRA, 470 MHz, Tilt/Zoom Scan (6x6x5)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.13 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 4.23 W/kg

**SAR(1 g) = 2.65 W/kg; SAR(10 g) = 1.75 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 3.36 W/kg

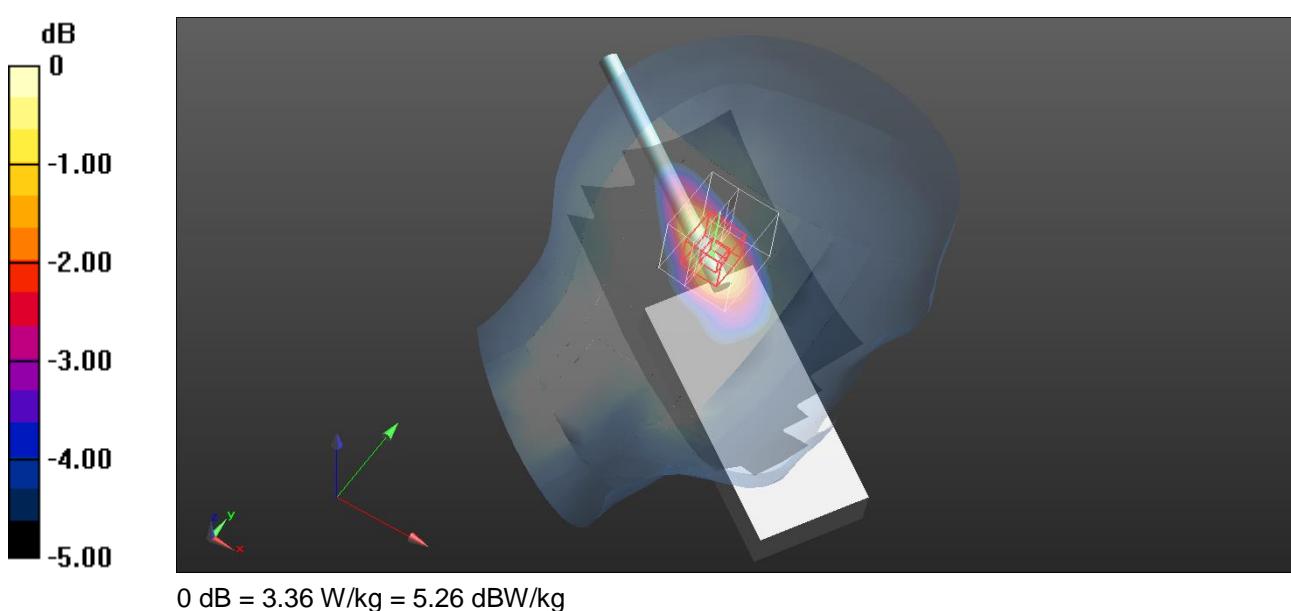

## Plot Nº14

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 08/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 470 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 470$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 46.62$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 470 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Battery Check/Ant\_300-01032, EU/FCC/ISED TETRA, 470 MHz, Tilt/Area Scan (71x181x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.18 W/kg

**Battery Check/Ant\_300-01032, EU/FCC/ISED TETRA, 470 MHz, Tilt/Zoom Scan (6x6x5)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.59 V/m; Power Drift = 0.23 dB


Peak SAR (extrapolated) = 4.15 W/kg

**SAR(1 g) = 2.67 W/kg; SAR(10 g) = 1.71 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 3.37 W/kg

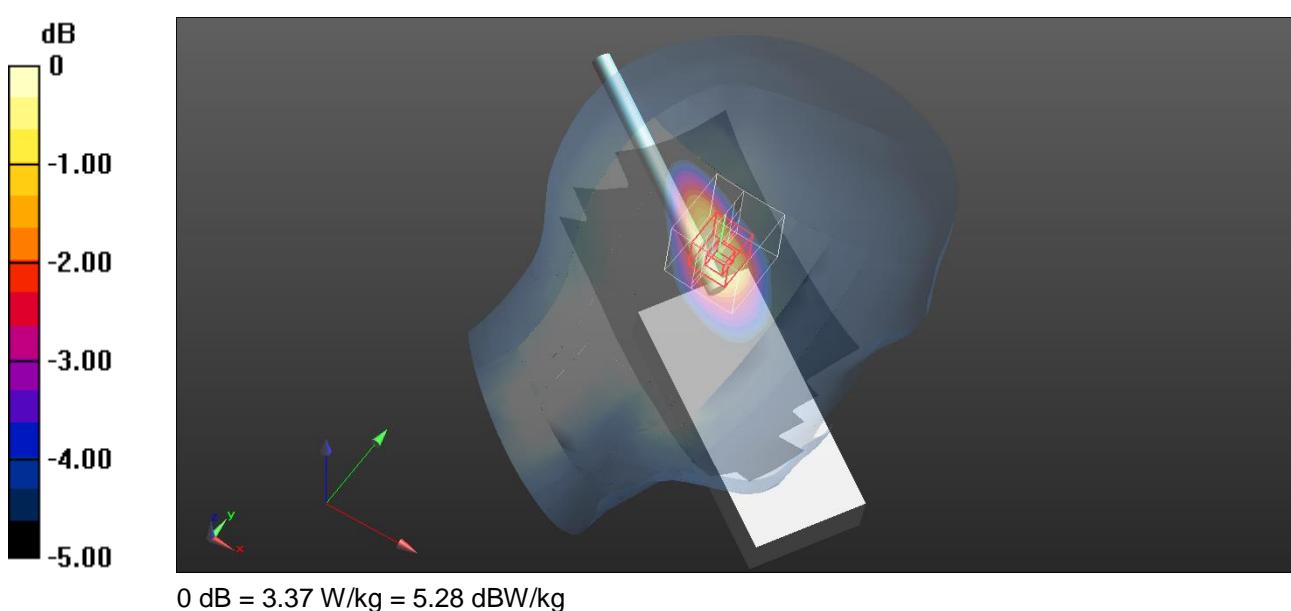

## Plot N<sup>o</sup>15

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 09/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 470 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 470$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 46.62$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 470 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front of Face, d=25mm/Ant\_300-01032, EU/FCC/ISED TETRA, 470 MHz, Front of face/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.995 W/kg

**Flat Phantom, Front of Face, d=25mm/Ant\_300-01032, EU/FCC/ISED TETRA, 470 MHz, Front of face/Zoom Scan (6x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.98 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.654 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.7%

Maximum value of SAR (measured) = 1.06 W/kg

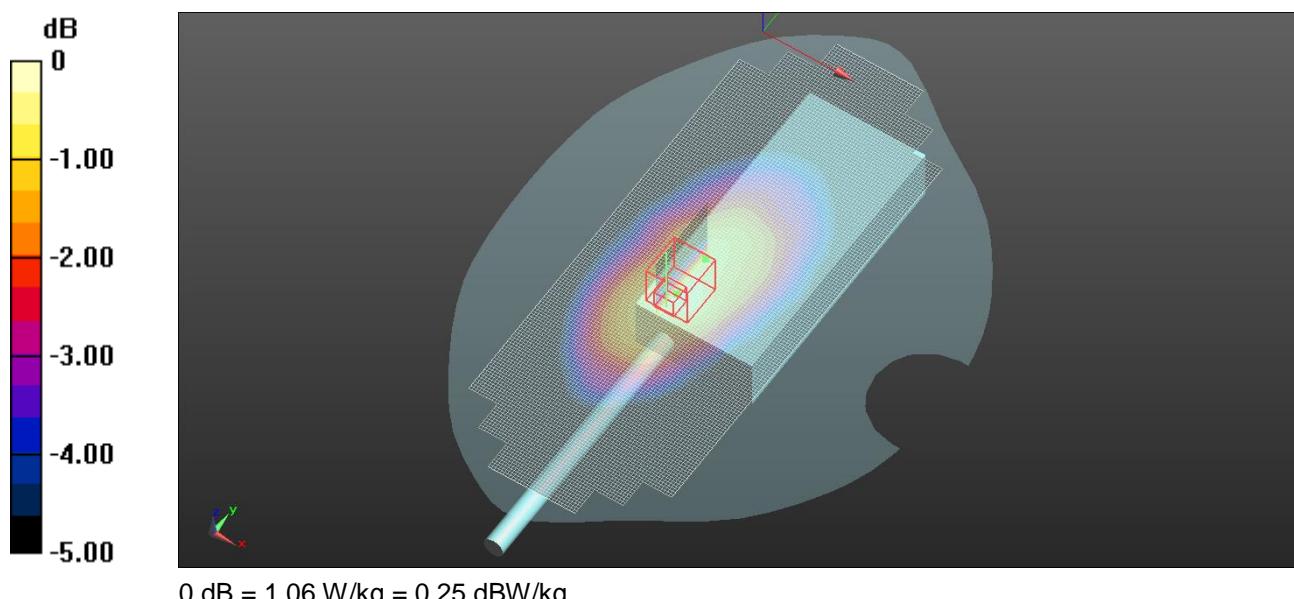

## Plot Nº16

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 13/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 46.64$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm/Ant\_300-01032, EU/FCC/ISED TETRA, 460 MHz/Area Scan**

(71x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.30 W/kg

**Flat Phantom, Front Face, d=5mm/Ant\_300-01032, EU/FCC/ISED TETRA, 460 MHz/Zoom Scan (5x5x5)/Cube**

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.67 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.09 W/kg

**SAR(1 g) = 2 W/kg; SAR(10 g) = 1.35 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 2.53 W/kg

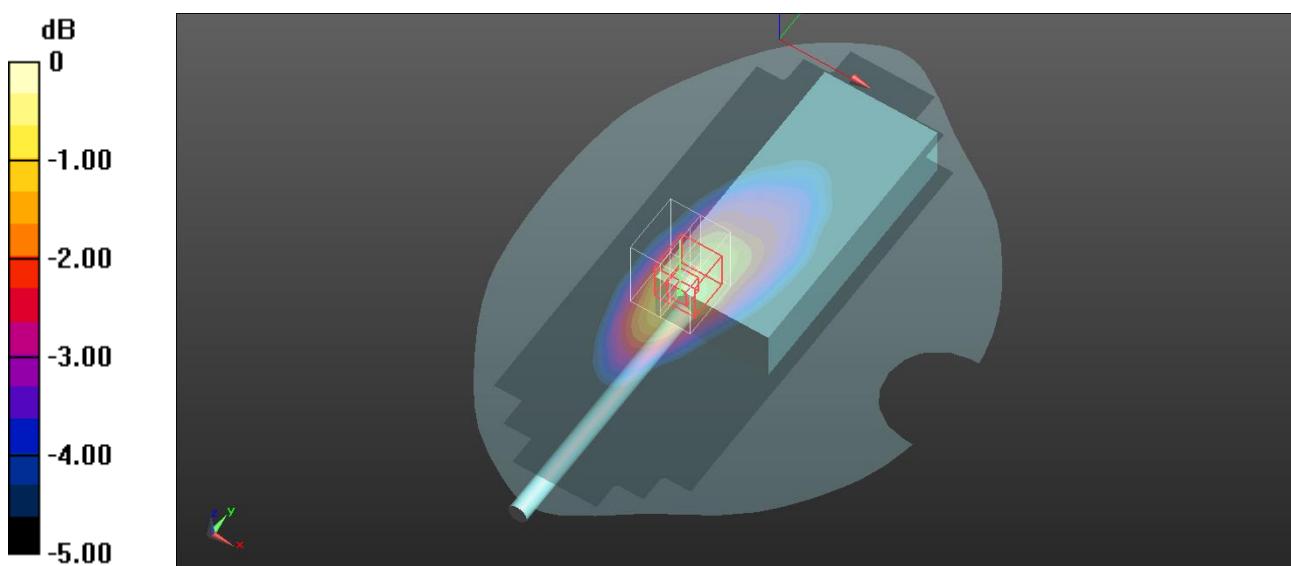

## Plot Nº17

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 16/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 45.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Flat Phantom, Accessories, d=0mm - ANT 300-01032/ACC2 - Front Face, EU/FCC/ISED TETRA, 460

MHz/Area Scan (71x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Flat Phantom, Accessories, d=0mm - ANT 300-01032/ACC2 - Front Face, EU/FCC/ISED TETRA, 460

MHz/Zoom Scan (7x6x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.65 V/m; Power Drift = 0.23 dB


Peak SAR (extrapolated) = 2.00 W/kg

**SAR(1 g) = 1.34 W/kg; SAR(10 g) = 0.950 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 19.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 1.70 W/kg

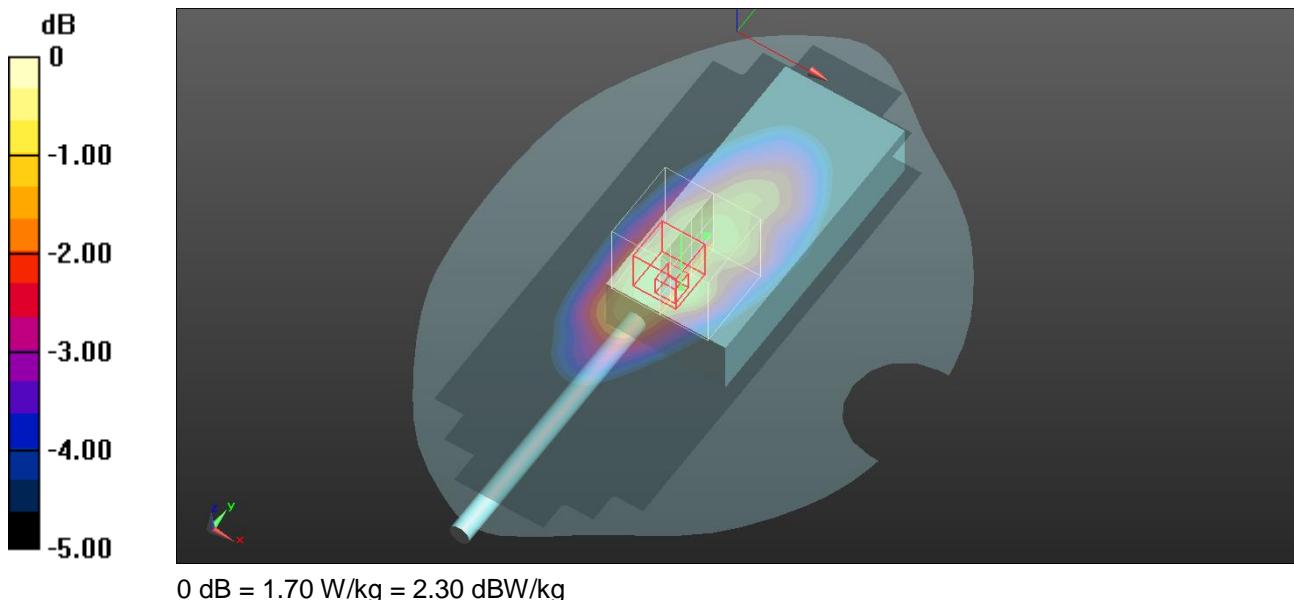

## Plot N°18

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 17/02/2023

DUT: SC2024; Type: PTT Radio; Serial: 1PR002235GK694T

Communication System: UID 0, TETRA (0); Frequency: 460 MHz; Duty Cycle: 1:4.00037

Medium parameters used:  $f = 460$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 43.79$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 460 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-01032, EU/FCC/ISED TETRA, 460 MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-01032, EU/FCC/ISED TETRA, 460 MHz/Zoom Scan (6x6x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 1.44 W/kg; SAR(10 g) = 1.01 W/kg** (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 25.3 mm

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 1.76 W/kg

**Flat Phantom, Front Face, d=5mm, Batteries check/Ant\_300-01032, EU/FCC/ISED TETRA, 460 MHz/Area Scan (71x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

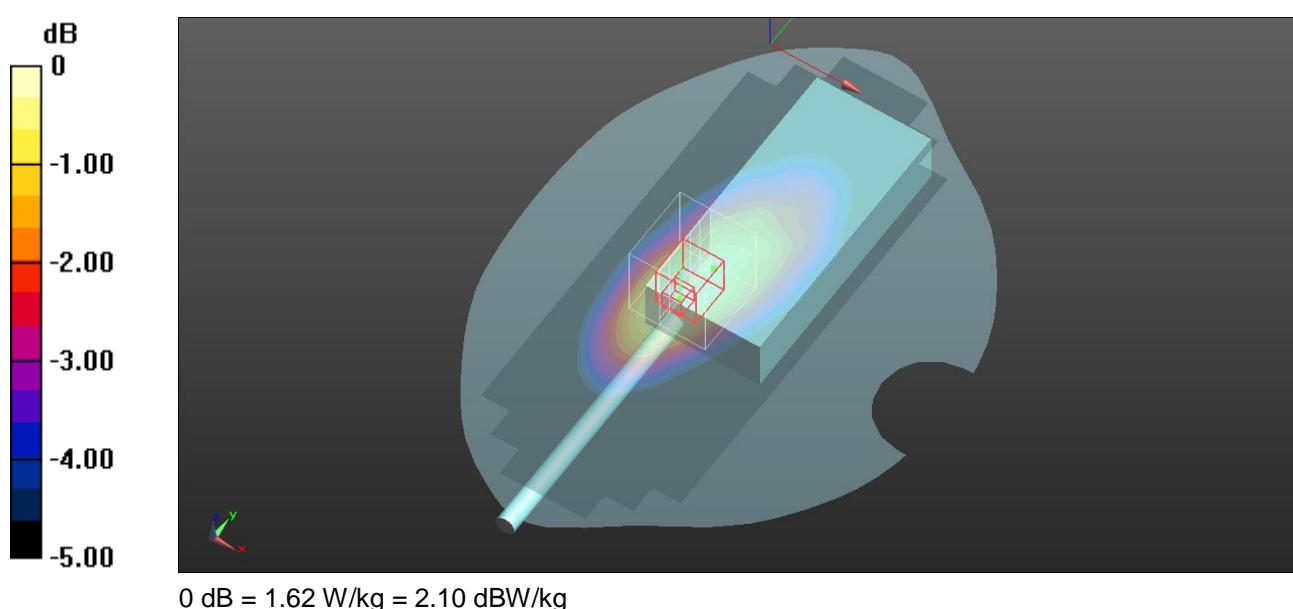

## Appendix D: System Validation Report

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 02/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 44.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 450MHz, 2023-02-02/d=15mm, Pin=250 mW 2/Area Scan (61x131x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

**Configuration 450MHz, 2023-02-02/d=15mm, Pin=250 mW 2/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.14 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.805 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 1.44 W/kg

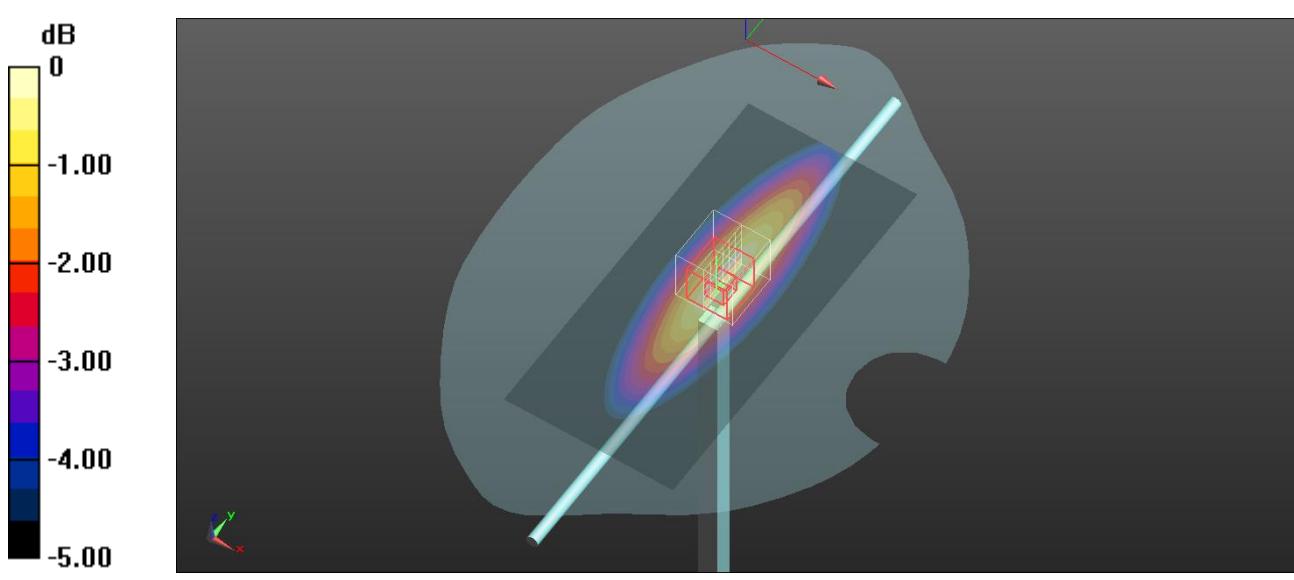

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 06/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 45.52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 450MHz, 2023-02-06/d=15mm, Pin=250 mW/Area Scan (61x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

**Configuration 450MHz, 2023-02-06/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.37 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.795 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.9%

Maximum value of SAR (measured) = 1.44 W/kg

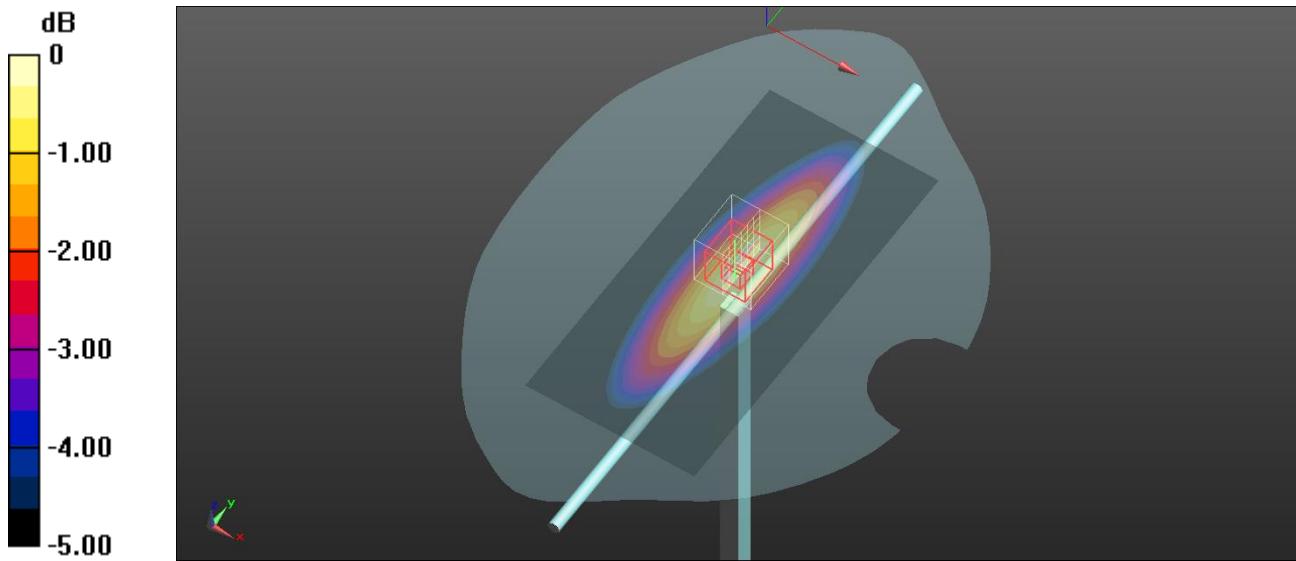

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 08/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 46.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### **Configuration 450MHz, 2023-02-08/d=15mm, Pin=250 mW/Area Scan (61x131x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

#### **Configuration 450MHz, 2023-02-08/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.79 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.739 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 1.36 W/kg

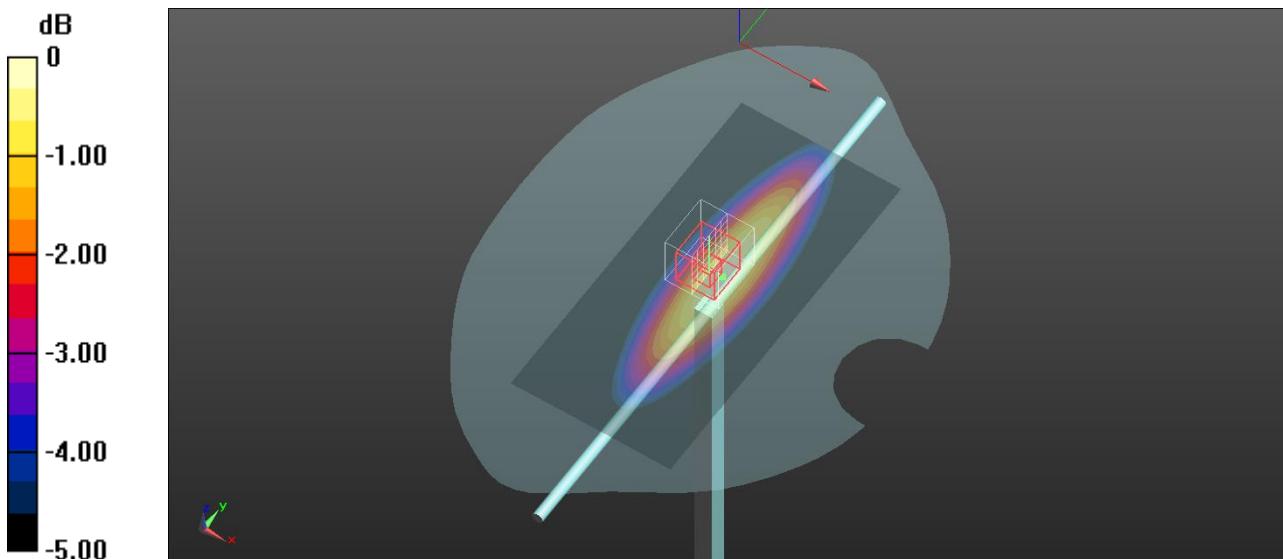

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 13/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 46.84$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 450MHz, 2023-02-13/d=15mm, Pin=250 mW/Area Scan (61x131x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

**Configuration 450MHz, 2023-02-13/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.05 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.761 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 1.42 W/kg

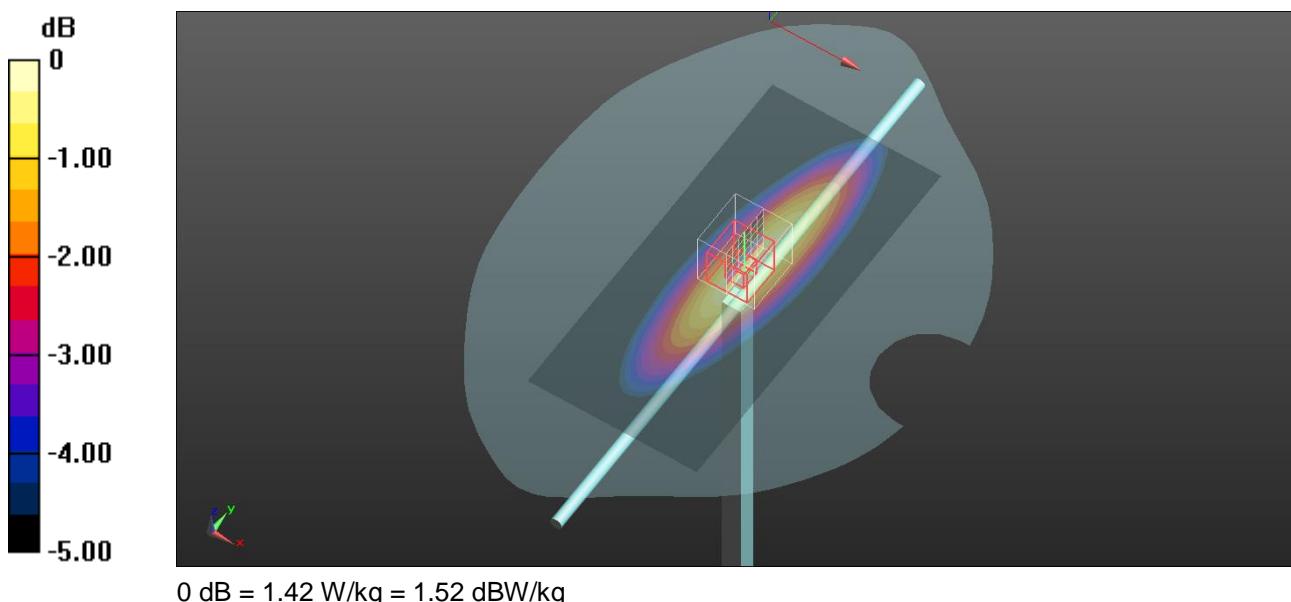

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 15/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 45.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 450MHz, 2023-02-15/d=15mm, Pin=250 mW/Area Scan (61x131x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

**Configuration 450MHz, 2023-02-15/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.32 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.771 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 1.46 W/kg

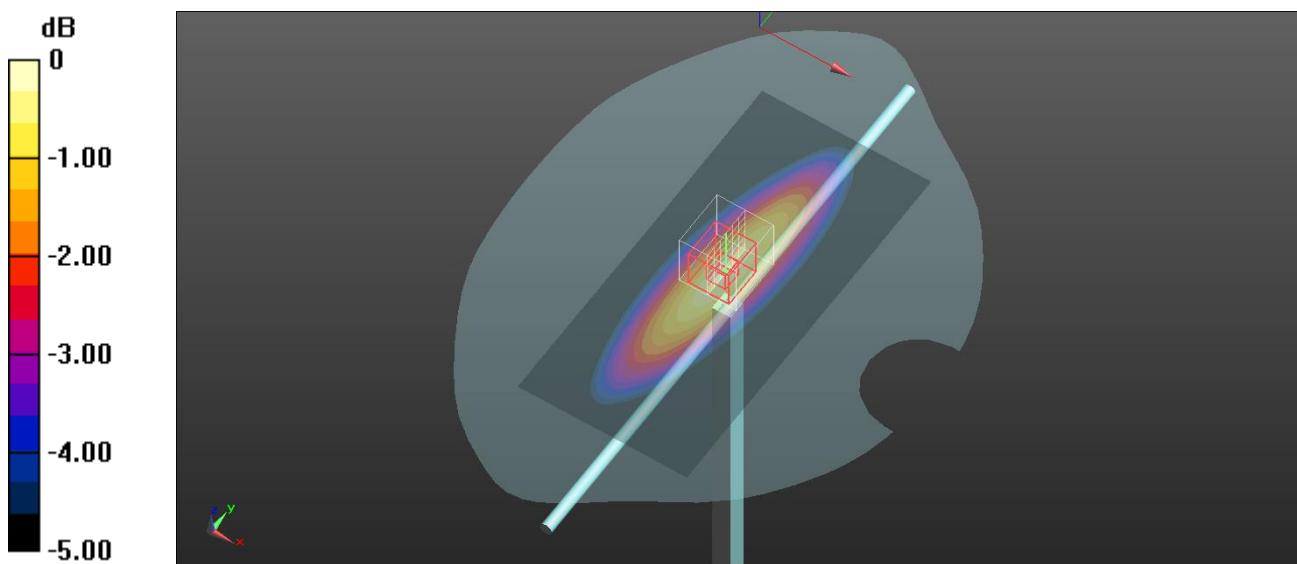

### Validation results in 450 MHz Band for Head TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 17/02/2023

DUT: D450V3 - SN1092; Type: D450V3; Serial: SN1092

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 44.03$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(11.05, 11.05, 11.05) @ 450 MHz; Calibrated: 25/08/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 16/08/2022
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 450MHz, 2023-02-17/d=15mm, Pin=250 mW/Area Scan (61x131x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

**Configuration 450MHz, 2023-02-17/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.71 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.725 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.4%

Maximum value of SAR (measured) = 1.34 W/kg

