

Panel mount GPS Antenna



Electrical Data

Frequency Range (MHz)	1575
VSWR	<2.0:1 $\pm$ 4MHz
Gain: LNA	26dB
Polarisation	Right Hand Circular
Operating Voltage	3 - 7V DC (fed via coax)
Impedance	50 Ohms
Current	Typical 14mA

Mechanical Data


Weight (g)		
Operating Temp (°C)		-40° / +80°C
Dimensions (mm)	Length	60
	Width	50
	Height	18.5
Material		Engineering Plastic
Colour		Black

Mounting Data

Fixing	Panel Mount
Hole Diameter (mm)	15
Hole Depth (mm)	8

Cable Data

Type	Coaxial Cable
Length (m)	6
Thickness (mm)	3
Termination	FME Socket

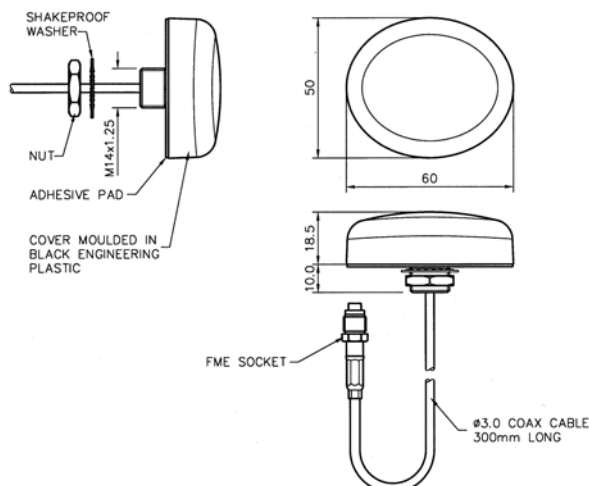

GPS

