FCC Test Report

Report No.: AGC151111201-1F2

FCC ID : XX8BB4

PRODUCT DESIGNATION: BlueBuds Bluetooth Headphones

BRAND NAME : JayBird

TEST MODEL : BB4

CLIENT : JayBird Gear LLC

DATE OF ISSUE : Dec.21, 2011

STANDARD(S) : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 41

VERIFICATION OF COMPLIANCE

Annihand	JayBird Gear LLC	
Applicant	2825 East Cottonwood Parkway #500 Salt Lake City, UT 84121	
NA	JayBird Gear LLC	
Manufacturer	2825 East Cottonwood Parkway #500 Salt Lake City, UT 84121	
Product Designation	BlueBuds Bluetooth Headphones	
Brand Name JayBird		
Model Name	BB4	
FCC ID	XX8BB4	
Report Number	AGC151111201-1F2	
Date of Test	Dec.15 to Dec.21, 2011	

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By:

Angela Li

Dec.21, 2011

Forrest Lei

Dec.21, 2011

Authorized By:

Solger Zhang

Dec.21, 2011

Page 2 of 41

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	
2. SYSTEM TEST CONFIGURATION	7
2.1 CONFIGURATION OF EUT SYSTEM2. EQUIPMENT USED IN EUT SYSTEM	
3. SUMMARY OF TEST RESULTS	e
4. DESCRIPTION OF TEST MODES	8
4.1 THE FOLLOWING OPERATING MODES WERE APPLIED FOR THE RELATED TEST ITEMS	8
5. PEAK OUTPUT POWER	g
5.1 MEASUREMENT PROCEDURE	9 10
6 20 DB BANDWIDTH	11
6.1 MEASUREMENT PROCEDURE	11 11
7 CONDUCTED SPURIOUS EMISSION	13
7.1 MEASUREMENT PROCEDURE	13 13
8 CONDUCTED EMISSION	17
8.1 .LIMITS OF LINE CONDUCTED EMISSION TEST	17 18
9 RADIATED EMISSION	19
9.1 MEASUREMENT PROCEDURE9.2 TEST SETUP9.3 TEST EQUIMENT LIST9.4 TEST RESULT9.4 TEST RESULT9.4 TEST RESULT9.4 TEST RESULT9.4 TEST RESULT	20 21

Report No.: AGC151111201-1F2 Page 3 of 41

10 BAND EDGE EMISSION	
10.1 MEASUREMENT PROCEDURE 10.2 TEST SET-UP 10.3 TEST RESULT	26
11 NUMBER OF HOPPING FREQUENCY	
11.1 MEASUREMENT PROCEDURE	
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	30
11.3 MEASUREMENT EQUIPMENT USED	
11.4 LIMITS AND MEASUREMENT RESULT	30
12 TIME OF OCCUPANCY (DWELL TIME)	31
12.1 MEASUREMENT PROCEDURE	31
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	31
12.3 MEASUREMENT EQUIPMENT USED	
12.4 LIMITS AND MEASUREMENT RESULT	31
13. FREQUENCY SEPARATION	34
13.1 MEASUREMENT PROCEDURE	34
13.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3 MEASUREMENT EQUIPMENT USED	
13.4 LIMITS AND MEASUREMENT RESULT	
APPENDIX I	35
PHOTOGRAPHS OF THE EUT	35
APPENDIX II	41
PHOTOGRAPHS OF THE TEST SETUP	41

Page 4 of 41

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a BlueBuds Bluetooth Headphones designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
Rated Output Power	3.81dBm	
Bluetooth Version:	V2.0 without EDR	
Modulation	GFSK	
Number of channels	79	
Antenna Designation	Integrated Antenna	
Antenna Gain	2dBi	
Hardware Version	JBG-1441-0005-H-BB4	
Software Version	BB4111212	
Power Supply	DC3.7V by battery	
**note: it can't communicate information with PC through USB port.		

1.2 TABLE OF CARRIER FREQUENCYS

TABLE OF CARRIER FREQUENCES			
Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
2400~2483.5MHZ	:	:	
2400~2463.5WITZ	38	2440 MHZ	
	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single of multisport packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Page 5 of 41

1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01,51,03,55,05,04

1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1 LAP/UAP of the master of the connection
- 2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and Is never turned off. For synchronization with other units only offset are used. It has no relation to the time Of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: XX8BB4** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Page 6 of 41

1.8 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance Co., Ltd.

1&2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, XiXiang, Baoan District, Shenzhen The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

1.9 SPECIAL ACCESSORIES

Refer to section 2.2.

1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 7 of 41


2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM

Configure 1(Normal Hopping mode)



Configure 2(Charging by USB mode or control continuous TX through PC)



2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	BlueBuds Bluetooth Headphones	JayBird	BB4	EUT
2	Mobile Phone	iPhone	iPhone4	A.E

Page 8 of 41

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

4. DESCRIPTION OF TEST MODES

4.1 THE FOLLOWING OPERATING MODES WERE APPLIED FOR THE RELATED TEST ITEMS.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Hopping

Note: All test modes were performed during the testing, all of which were tested on full of electricity, and only recording the worst mode test data in the test report.


Page 9 of 41

5. PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

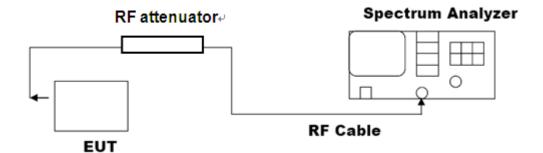

Page 10 of 41

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

5.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.402	3.81	30	Pass	
2.441	3.67	30	Pass	
2.480	3.73	30	Pass	

Page 11 of 41

6 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in Section 5.2

6.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3

6.4 LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT				
Applicable Limite		Measurement Res	sult	
Applicable Limits	Test Data (MHz)		Criteria	
	Low Channel	0.8485	PASS	
N/A	Middle Channel	0.8332	PASS	
	High Channel	0.8670	PASS	





Page 12 of 41

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Page 13 of 41

7 CONDUCTED SPURIOUS EMISSION

7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 5.2

7.3 MEASUREMENT EQUIPMENT USED


The same as described in section 5.3


7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Page 14 of 41




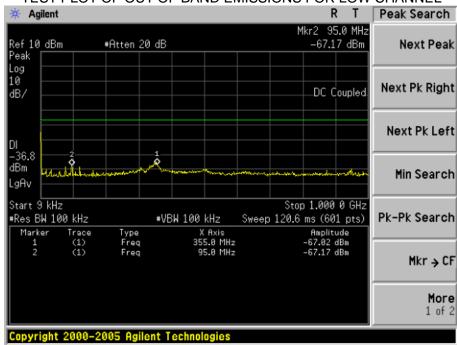


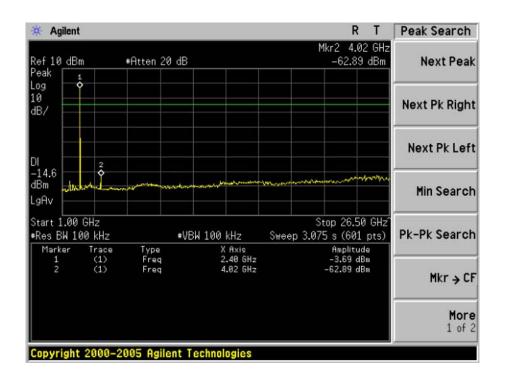

Page 15 of 41




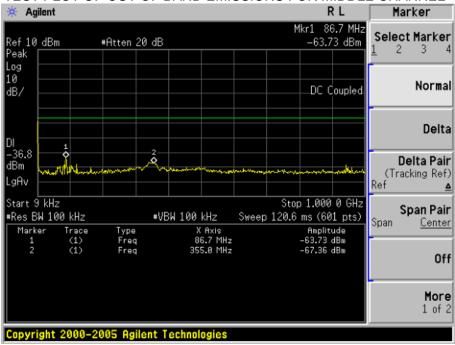


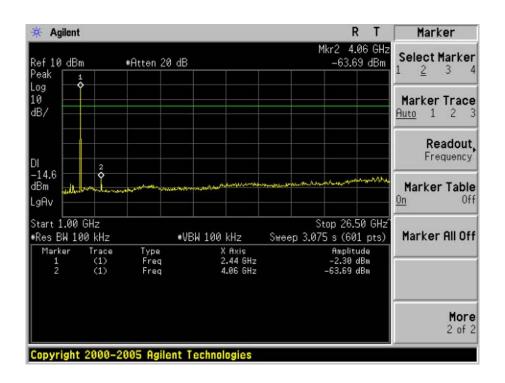

Page 16 of 41

TEST PLOT OF OUT OF BAND EMISSIONS FOR HIGH CHANNEL

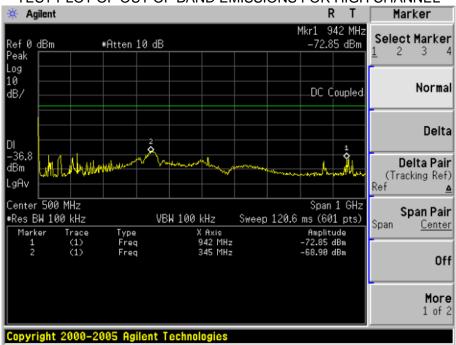

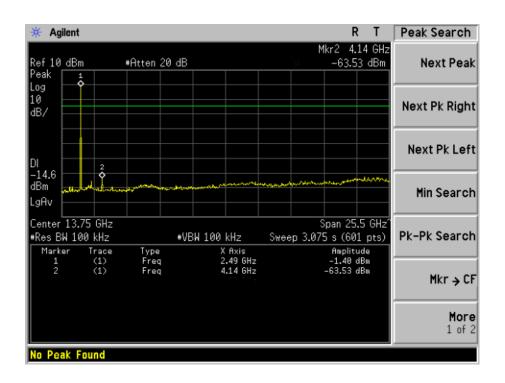


Page 17 of 41

8 CONDUCTED EMISSION

8.1 .LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

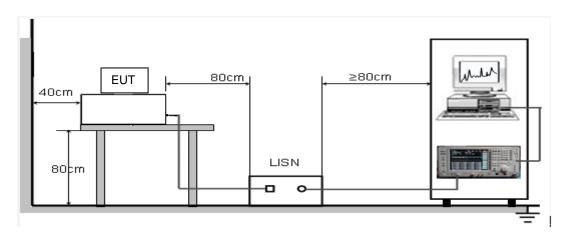

^{**}Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 18 of 41

8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received DC 5V power by PC which received 120V/60Hz power from socket under the turntable through a LISN.
- 5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 7) During the above scans, the emissions were maximized by cable manipulation.
- 8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- 9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition(s) was reported on the Summary Data page.

8.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST(N/A)

Page 19 of 41

9 RADIATED EMISSION

9.1 MEASUREMENT PROCEDURE

 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.


Page 20 of 41

The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


9.2 TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

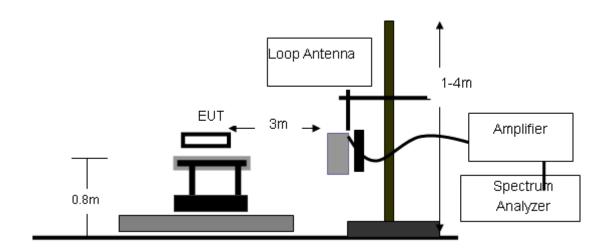


Page 21 of 41

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

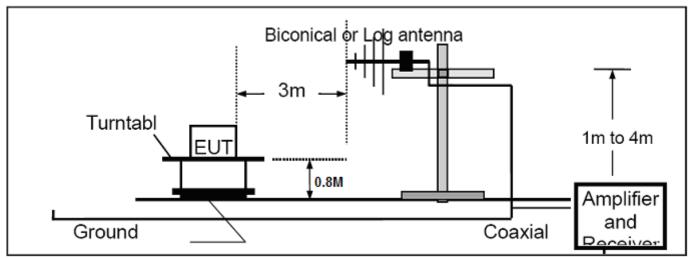

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

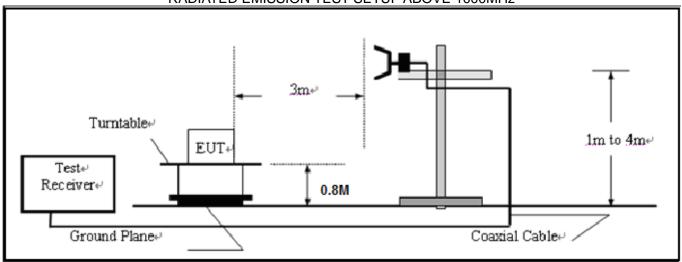

9.3 TEST EQUIMENT LIST

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	0607030	06/27/2011	06/26/2012
Horn Antenna	EM	EM-AH-10180	N/A	06/27/2011	06/26/2012
Horn Antenna	A.H. Systems Inc.	SAS-574		06/27/2011	06/26/2012
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	N/A	06/27/2011	06/26/2012
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/27/2011	06/26/2012
Loop Antenna	Daze	ZN30900N	SEL0097	06/27/2011	06/26/2012
Isolation Transformer	LETEAC	LTBK		06/27/2011	06/26/2012


Page 22 of 41

9.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.



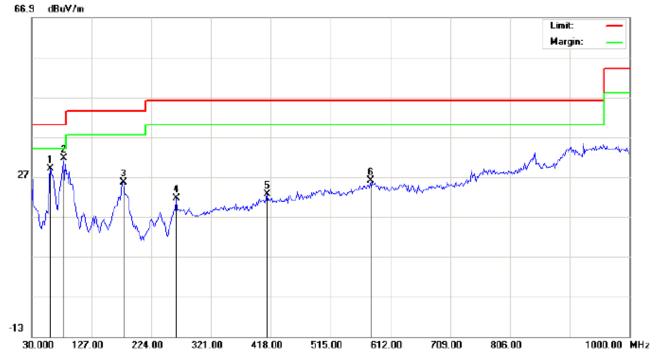

Site: site#1

Limit: FCC Class B 3M Radiation

EUT: BlueBuds Bluetooth Headphones

M/N: BB4

Mode: normal opping


Note:

Polarization:	Horizontal	Temperature:	26
Power:		Humidity: 60	%

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		60.7167	24.89	4.06	28.95	40.00	-11.05	peak			
2	*	81.7333	19.12	12.57	31.69	40.00	-8.31	peak			
3		178.7333	7.73	17.91	25.64	43.50	-17.86	peak			
4		264.4167	4.58	16.94	21.52	46.00	-24.48	peak			
5		411.5333	1.34	21.18	22.52	46.00	-23.48	peak			
6		579.6667	1.35	24.65	26.00	46.00	-20.00	peak			

Page 23 of 41

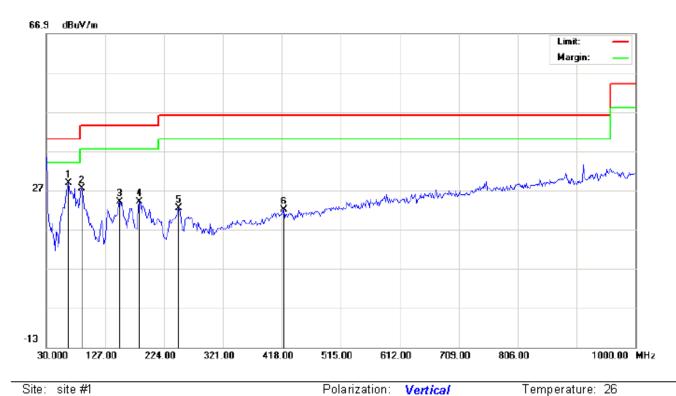

Site: site#1

Limit: FCC Class B 3M Radiation

EUT: BlueBuds Bluetooth Headphones

M/N: BB4


Mode: normal hopping

Power:		Humidity:	60 %
Distance:	3m		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1	*	67.1833	25.56	3.21	28.77	40.00	-11.23	peak			
2		88.2000	20.48	6.91	27.39	43.50	-16.11	peak			
3		151.2500	5.52	18.55	24.07	43.50	-19.43	peak			
4		183.5833	8.87	15.22	24.09	43.50	-19.41	peak			
5		248.2500	5.17	17.23	22.40	46.00	-23.60	peak			
6		421.2333	0.61	21.44	22.05	46.00	-23.95	peak			

Page 24 of 41

RADIATED EMISSION ABOVE 1GHZ(1-10th Harmonics)

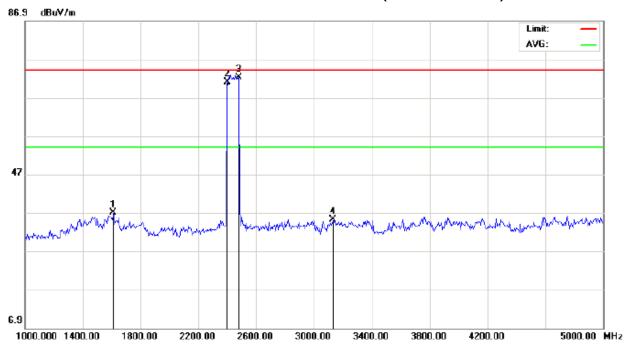

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %


EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4

Mode: Normal Hopping

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		1613.333	41.28	-4.19	37.09	74.00	-36.91	peak			
2		2402.000	70.65	0.32	70.97	74.00	-3.03	peak			
3	*	2480.000	71.76	0.41	72.17	74.00	-1.83	peak			
4		3133.333	33.39	1.77	35.16	74.00	-38.84	peak			

Page 25 of 41

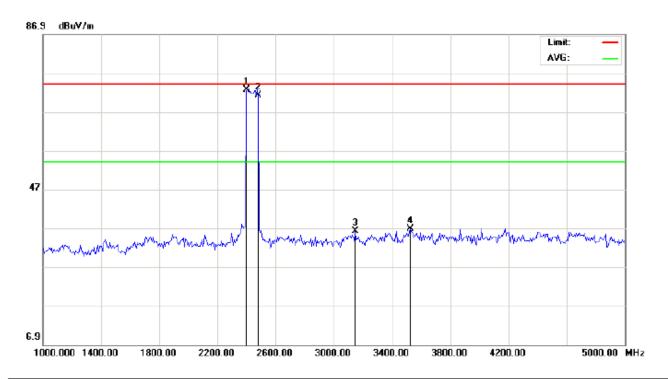

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ (PK) Power: Humidity: 60 %

EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4

Mode: normal hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1	*	2402.000	72.37	0.32	72.69	74.00	-1.31	peak			
2		2480.000	70.71	0.41	71.12	74.00	-2.88	peak			
3		3146.667	34.42	1.78	36.20	74.00	-37.80	peak			
4		3526.667	34.48	2.27	36.75	74.00	-37.25	peak			

Note: 5~25GHz at least have 20dB margin. no recording in the test report. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 26 of 41

10 BAND EDGE EMISSION


10.1 MEASUREMENT PROCEDURE

- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>1%Span, VBW>= RBW.
- 3. The band edges was measured and recorded.

10.2 TEST SET-UP

Radiated same as 9.2

10.3 TEST RESULT

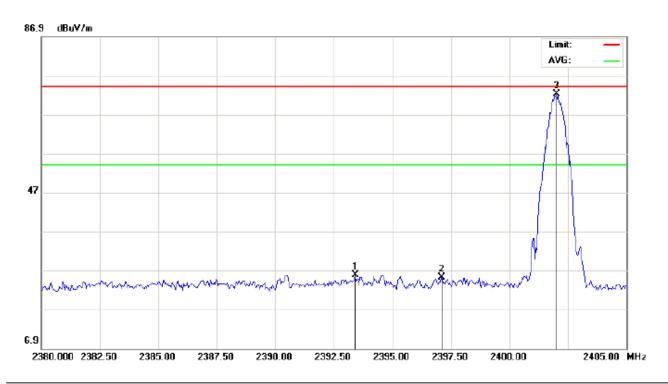


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2393.417	25.56	0.31	25.87	74.00	-48.13	peak			
2		2397.125	24.95	0.32	25.27	74.00	-48.73	peak			
3	*	2402.000	71.89	0.32	72.21	74.00	-1.79	peak			

Page 27 of 41

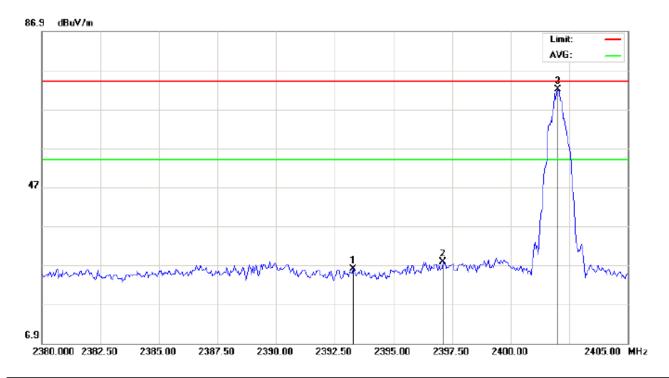


Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1		2393.292	25.79	0.31	26.10	74.00	-47.90	peak			
2		2397.125	27.58	0.32	27.90	74.00	-46.10	peak			
3	*	2402.000	71.71	0.32	72.03	74.00	-1.97	peak			

Page 28 of 41

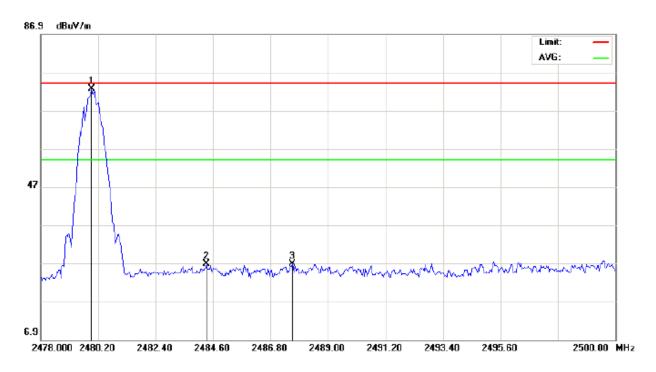


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ (PK) Power: Humidity: 60 %

EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	.	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2479.943	72.21	0.41	72.62	74.00	-1.38	peak			
2		2484.343	26.44	0.41	26.85	74.00	-47.15	peak			
3		2487.643	26.35	0.42	26.77	74.00	-47.23	peak			

Page 29 of 41

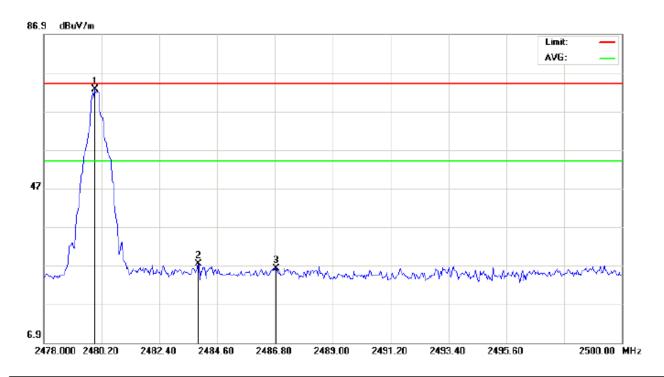

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: BlueBuds Bluetooth Headphones Distance: 3m

M/N: BB4 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2479.943	72.15	0.41	72.56	74.00	-1.44	peak			
2		2483.867	27.06	0.41	27.47	74.00	-46.53	peak			
3		2486.837	25.88	0.42	26.30	74.00	-47.70	peak			

Page 30 of 41

11 NUMBER OF HOPPING FREQUENCY

11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW >=1%Span,VBW=RBW

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2


11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

11.4 LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS



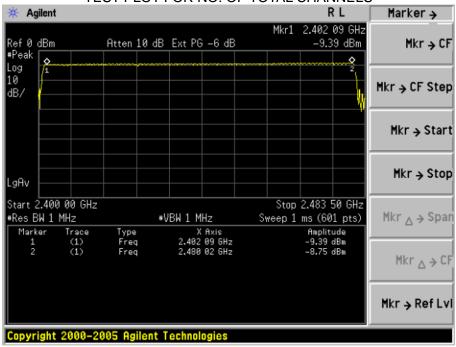

Page 31 of 41

12 TIME OF OCCUPANCY (DWELL TIME)

12.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set center frequency of spectrum analyzer = Operating frequency
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3


12.4 LIMITS AND MEASUREMENT RESULT

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.85	31.6	304	400
Middle	2.857	31.6	304.74	400
High	2.886	31.6	308.283	400


Low Channel Time 2.85*(1600/6)/79*31.6=304ms Middle Channel Time 2.857*(1600/6)/79*31.6=304.74ms High Channel Time 2.886*(1600/6)/79*31.6=308.283ms

Page 32 of 41

TEST PLOT OF LOW CHANNEL

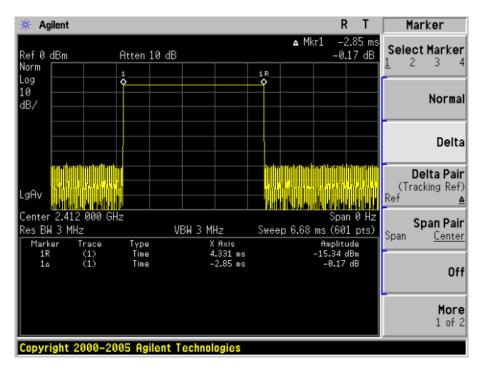


TEST PLOT OF MIDDLE CHANNEL

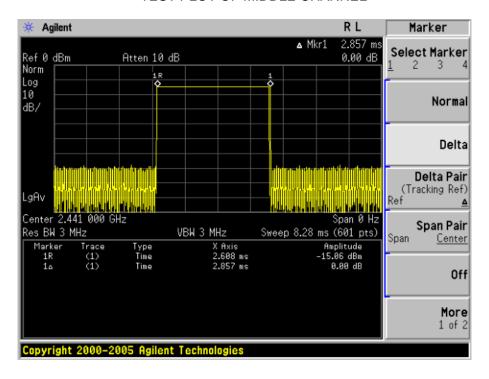

Page 33 of 41

TEST PLOT OF HIGH CHANNEL

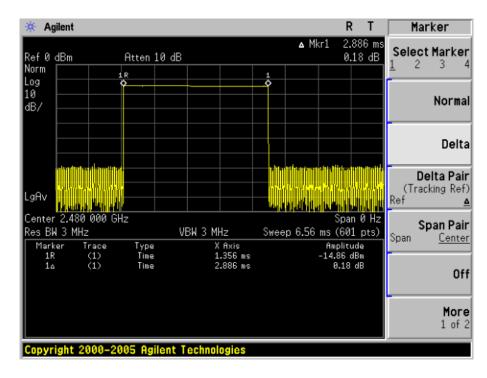

Page 34 of 41

13. FREQUENCY SEPARATION 13.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set center frequency of spectrum analyzer = Middle of Operating frequency
- 4. Set the spectrum analyzer as RBW>=1%Span, VBW=RBW

13.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 5.2


13.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

13.4 LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
OHANNEL	KHz	KHz	
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass



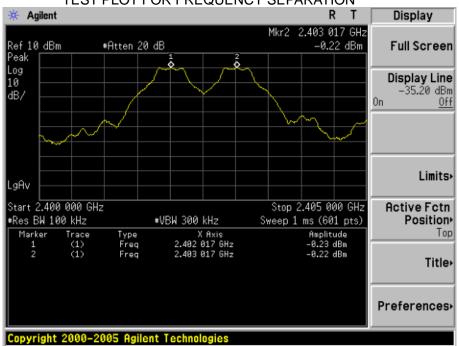

Page 35 of 41

APPENDIX I
PHOTOGRAPHS OF THE EUT
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



Page 36 of 41





BACK VIEW OF EUT



Page 37 of 41





LEFT VIEW OF EUT



Page 38 of 41






OPEN VIEW OF EUT-2




Page 39 of 41



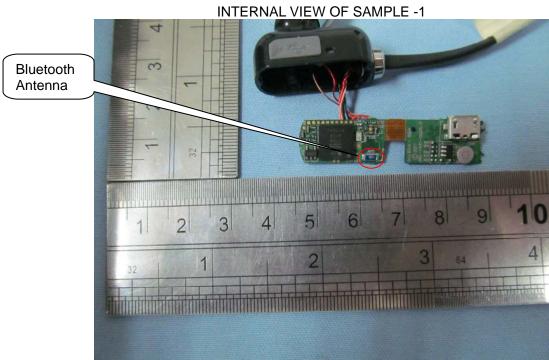


Page 40 of 41

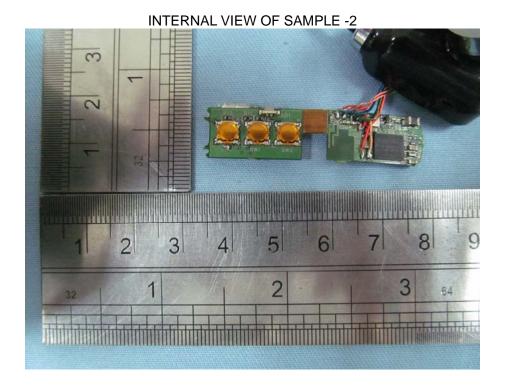

Page 41 of 41

APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP

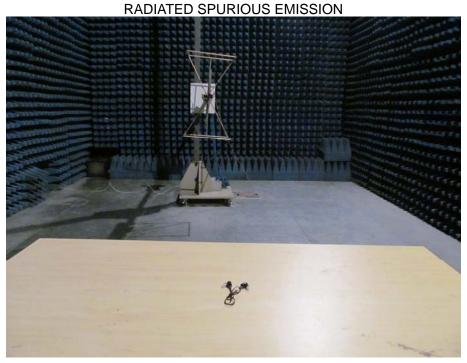

----END OF REPORT----