



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM171201302801

Page: 1 of 44

TEST REPORT

Application No.: SZEM1712013028CR (SHEM1710006834CR)
FCC ID XXMMCIMX8M-EVK
Applicant: NXP SEMICONDUCTORS(SHANGHAI) CO., LTD.
Address of Applicant: No. 192 Liangjing Rd., Pudong New Area, Shanghai 201303, P.R. China
Manufacturer: NXP Semiconductor
Address of Manufacturer: No. 192 Liangjing Rd., Pudong New Area, Shanghai 201303, P.R. China
Factory: Trivo (Taicang) Technologies Co., Ltd.
Address of Factory: Building No. 9, YuSheng Industry Park, No. 33 North Changsheng Road, Taicang, Jiangsu, China

Equipment Under Test (EUT):

EUT Name: MCIMX8M-EVK
Model No.: MCIMX8M-EVK
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2017-10-12
Date of Test: 2017-12-08
Date of Issue: 2018-01-24

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM171201302801

Page: 2 of 44

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-01-24		Original

Authorized for issue by:				
		 Foray Chen /Project Engineer		
		 Eric Fu /Reviewer		



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 Class B	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T. (MCIMX8M-EVK)	6
4.2 DESCRIPTION OF SUPPORT UNITS	6
4.3 MEASUREMENT UNCERTAINTY	6
4.4 TEST LOCATION	7
4.5 TEST FACILITY	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST	8
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	9
6.1 ANTENNA REQUIREMENT	9
6.1.1 <i>Test Requirement:</i>	9
6.1.2 <i>Conclusion</i>	9
6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE	10
6.2.1 <i>Test Requirement:</i>	10
6.2.2 <i>Conclusion</i>	10
7 RADIO SPECTRUM MATTER TEST RESULTS	11
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHz)	11
7.1.1 <i>E.U.T. Operation</i>	11
7.1.2 <i>Test Setup Diagram</i>	11
7.1.3 <i>Measurement Procedure and Data</i>	12
7.1.4 <i>Conclusion</i>	12
7.2 CONDUCTED PEAK OUTPUT POWER	15
7.2.1 <i>E.U.T. Operation</i>	15
7.2.2 <i>Test Setup Diagram</i>	15
7.2.3 <i>Measurement Procedure and Data</i>	15
7.2.4 <i>Conclusion</i>	15
7.3 20dB BANDWIDTH	16
7.3.1 <i>E.U.T. Operation</i>	16
7.3.2 <i>Test Setup Diagram</i>	16
7.3.3 <i>Measurement Procedure and Data</i>	16
7.3.4 <i>Conclusion</i>	16
7.4 CARRIER FREQUENCIES SEPARATION	17
7.4.1 <i>E.U.T. Operation</i>	17
7.4.2 <i>Test Setup Diagram</i>	17
7.4.3 <i>Measurement Procedure and Data</i>	17
7.4.4 <i>Conclusion</i>	17
7.5 HOPPING CHANNEL NUMBER	18
7.5.1 <i>E.U.T. Operation</i>	18
7.5.2 <i>Test Setup Diagram</i>	18
7.5.3 <i>Measurement Procedure and Data</i>	18



7.5.4 Conclusion	18
7.6 DWELL TIME	19
7.6.1 E.U.T. Operation	19
7.6.2 Test Setup Diagram	19
7.6.3 Measurement Procedure and Data	19
7.6.4 Conclusion	19
7.7 CONDUCTED BAND EDGES MEASUREMENT	20
7.7.1 E.U.T. Operation	20
7.7.2 Test Setup Diagram	20
7.7.3 Measurement Procedure and Data	20
7.7.4 Conclusion	20
7.8 CONDUCTED SPURIOUS EMISSIONS	21
7.8.1 E.U.T. Operation	21
7.8.2 Test Setup Diagram	21
7.8.3 Measurement Procedure and Data	21
7.8.4 Conclusion	21
7.9 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	22
7.9.1 E.U.T. Operation	23
7.9.2 Test Setup Diagram	24
7.9.3 Measurement Procedure and Data	25
7.9.4 Conclusion	25
7.10 RADIATED SPURIOUS EMISSIONS	32
7.10.1 E.U.T. Operation	33
7.10.2 Test Setup Diagram	34
7.10.3 Measurement Procedure and Data	35
7.10.4 Conclusion	35
8 TEST SETUP PHOTOGRAPHS	41
8.1 RADIATED EMISSION TEST SETUP	41
8.2 CONDUCTED EMISSION TEST SETUP	42
9 EUT CONSTRUCTIONAL DETAILS	43



4 General Information

4.1 Details of E.U.T. (MCIMX8M-EVK)

Power supply:	AC Adapter
	Manufacturer: EDAC POWER ELECTRONICS CO.,LTD
Test voltage:	Model NO.: EA10682N-120
Cable:	Input: AC100-240V 2.0A, 50-60Hz
	Output: DC 12V 5A
Channel Spacing	AC 120V/60Hz
Modulation Type	AC Cable: 180cm
Number of Channels	DC Cable: 120cm
Operation Frequency	Type C to USB cable: 15cm
Spectrum Spread Technology	1MHz
Antenna Type	GFSK, π/4DQPSK, 8DPSK
	79
	2402MHz to 2480MHz
	Frequency Hopping Spread Spectrum(FHSS)
	Ceramic Antenna 3dBi

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Fixed Frequency Software	/	/	QRCT3
Laptop	Lenovo	ThinkPad X100e	
Micro USB Cable	/	/	

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10-8
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.75dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	4.5dB (Below 1GHz) 4.8dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz) 4.4dB (30MHz-1GHz) 4.6dB (1GHz-18GHz) 5.2dB (Above 18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%



13	Time	3%
----	------	----

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Conducted Emission at AC Power Line					
EMI test receiver	R&S	ESR7	SHEM162-1	2016-12-29	2017-12-28
LISN	Schwarzbeck	NSLK8127	SHEM061-1	2016-12-29	2017-12-28
LISN	EMCO	3816/2	SHEM019-1	2016-12-29	2017-12-28
Pulse limiter	R&S	ESH3-Z2	SHEM029-1	2016-12-29	2017-12-28
CE test Cable	/	CE01	/	2016-12-29	2017-12-28
Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2016-12-29	2017-12-28
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2017-09-26	2018-09-25
Power meter	R&S	NRP	SHEM057-1	2016-12-29	2017-12-28
Power Sensor	R&S	NRP-Z22	SHEM136-1	2017-07-22	2018-07-21
Power Sensor	R&S	NRP-Z91	SHEM057-2	2016-12-29	2017-12-28
Signal Generator	R&S	SMR40	SHEM058-1	2017-07-03	2018-07-02
Signal Generator	Agilent	N5182A	SHEM182-1	2017-09-26	2018-09-25
Communication Tester	R&S	CMW270	SHEM183-1	2017-10-22	2018-10-21
Switcher	Tonscend	JS0806	SHEM184-1	2017-09-26	2018-09-25
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2017-09-26	2018-09-25
AC Power Stabilizer	WOCEN	6100	SHEM045-1	2016-12-29	2017-12-28
DC Power Supply	QJE	QJ30003SII	SHEM046-1	2016-12-29	2017-12-28
Conducted test Cable	/	RF01, RF 02	/	2016-12-29	2017-12-28
Radiated Test					
EMI test receiver	R&S	ESU40	SHEM051-1	2016-12-29	2017-12-28
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2016-12-29	2017-12-28
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2017-04-10	2020-04-09
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Antenna (25MHz-3GHz)	Schwarzbeck	HL562	SHEM010-1	2017-02-28	2020-02-27
Horn Antenna (1-8GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-02-13	2018-01-15
Pre-amplifier (9KHz-2GHz)	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2017-08-22	2018-08-21
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118-352810	SHEM050-2	2017-08-22	2018-08-21
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2017-02-13	2018-01-15
Band filter	LORCH	9BRX-875/X150-SR	SHEM156-1	/	/
Band filter	LORCH	13BRX-1950/X500-SR	SHEM083-2	/	/
Band filter	LORCH	5BRX-2400/X200-SR	SHEM155-1	/	/
Band filter	LORCH	5BRX-5500/X1000-SR	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G-100SS	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700-3SS	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
RE test Cable	/	RE01, RE02, RE06	/	2016-12-29	2017-12-28

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.1.2 Conclusion

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.



EUT complies with FCC part 15.203 & 15.247(c) requirement.



6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

6.2.2 Conclusion

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- > Number of shift register stages: 9
- > Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- > Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band s

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode b:TX_non-Hop mode _Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

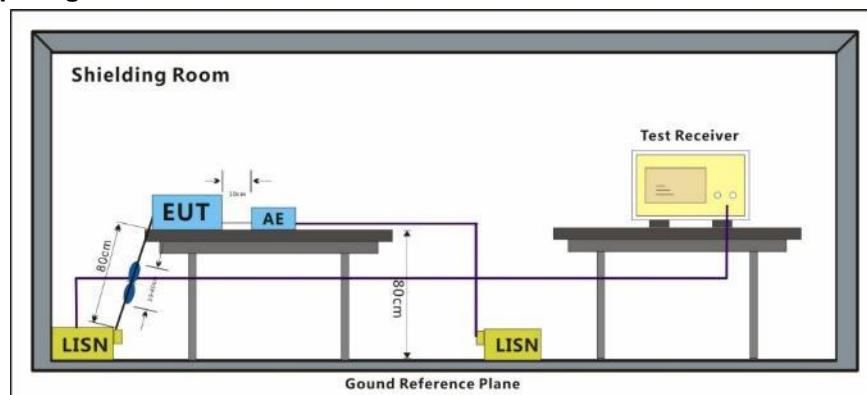



7.1.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

7.1.4 Conclusion

EUT complies with FCC class B limit.


Mode:b; Line:Live Line

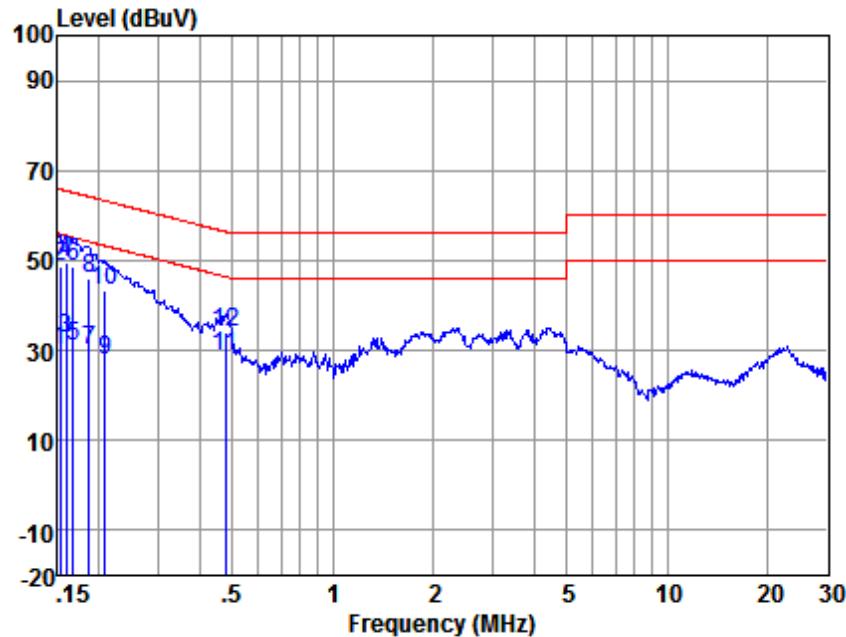

Site : chamber
Condition : LISN-L-2017
Project No: 6834CR
Test mode : b

	Read Freq	LISN Level	Cable Loss	Limit Level	Line dBuV	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.152	20.02	0.11	9.81	29.94	55.87	-25.93 Average
2	0.152	38.79	0.11	9.81	48.71	65.87	-17.16 QP
3	0.159	22.83	0.11	9.81	32.75	55.52	-22.77 Average
4	0.159	39.51	0.11	9.81	49.43	65.52	-16.09 QP
5	0.168	21.09	0.11	9.81	31.01	55.08	-24.07 Average
6	0.168	38.59	0.11	9.81	48.51	65.08	-16.57 QP
7	0.186	20.25	0.11	9.81	30.17	54.20	-24.03 Average
8	0.186	36.16	0.11	9.81	46.08	64.20	-18.12 QP
9	0.208	18.00	0.11	9.81	27.92	53.27	-25.35 Average
10	0.208	33.39	0.11	9.81	43.31	63.27	-19.96 QP
11	0.476	18.76	0.11	9.82	28.69	46.41	-17.72 Average
12	0.476	23.91	0.11	9.82	33.84	56.41	-22.57 QP

Mode:b; Line:Neutral Line

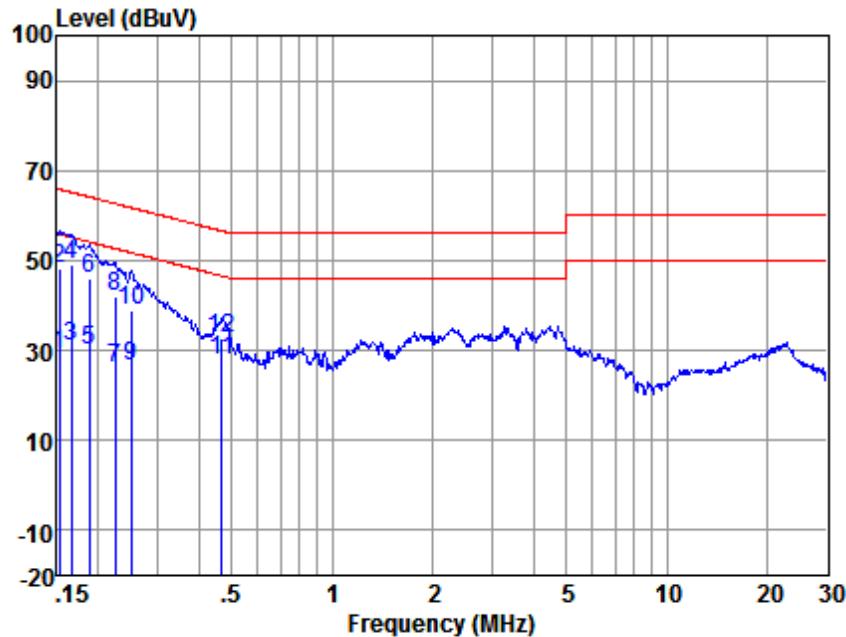

Site : chamber
Condition : LISN-N-2017
Project No: 6834CR
Test mode : b

	Read Freq	LISN Level	Cable Factor	Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	19.17	0.12	9.81	29.10	55.87	-26.77	Average
2	0.152	38.47	0.12	9.81	48.40	65.87	-17.47	QP
3	0.166	20.80	0.12	9.81	30.73	55.16	-24.43	Average
4	0.166	38.95	0.12	9.81	48.88	65.16	-16.28	QP
5	0.188	19.99	0.12	9.81	29.92	54.11	-24.19	Average
6	0.188	35.97	0.12	9.81	45.90	64.11	-18.21	QP
7	0.224	16.07	0.11	9.81	25.99	52.66	-26.67	Average
8	0.224	31.89	0.11	9.81	41.81	62.66	-20.85	QP
9	0.251	16.75	0.11	9.81	26.67	51.73	-25.06	Average
10	0.251	28.97	0.11	9.81	38.89	61.73	-22.84	QP
11	0.469	17.72	0.11	9.82	27.65	46.54	-18.89	Average
12	0.469	22.69	0.11	9.82	32.62	56.54	-23.92	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation.

7.2.2 Test Setup Diagram

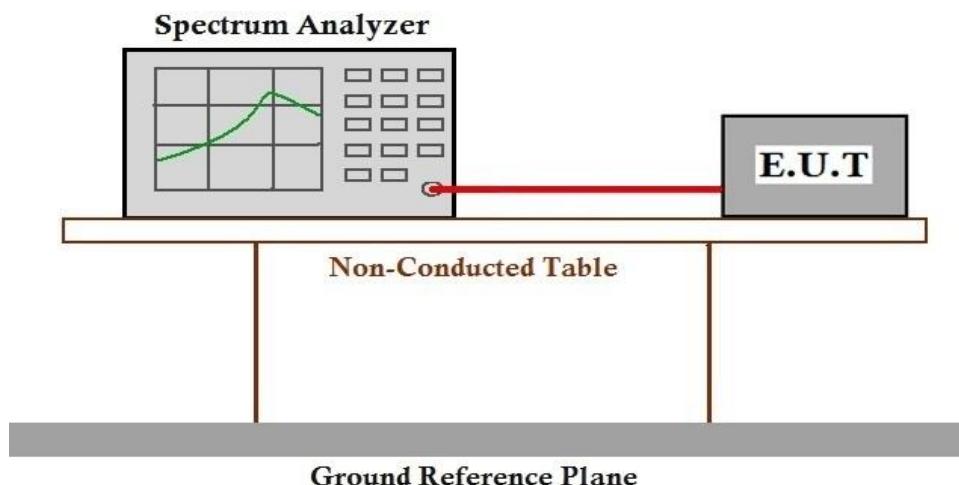

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.2.4 Conclusion

EUT complies with FCC Part 15.247 (b)(1) limit.

7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation.

7.3.2 Test Setup Diagram

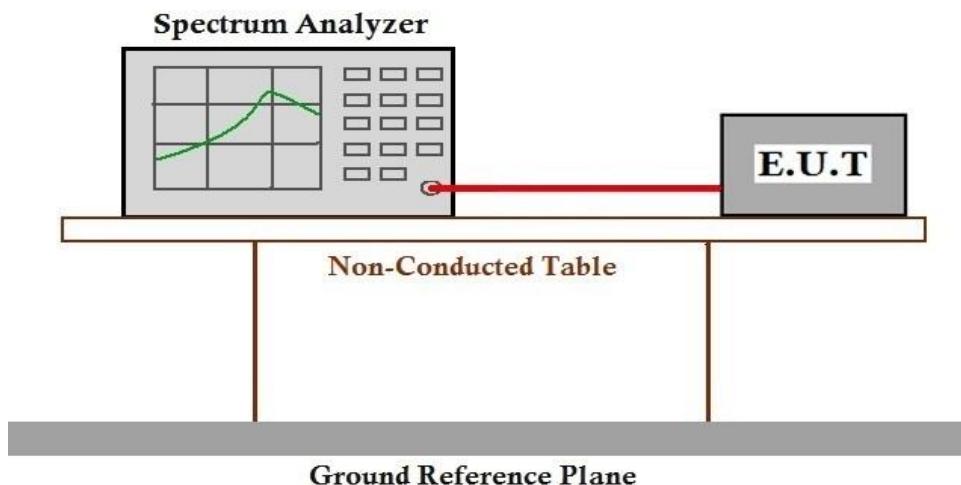

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.3.4 Conclusion

EUT complies with FCC Part 15.247 (a)(1) limit.


7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)
Test Method: ANSI C63.10 (2013) Section 7.8.2
Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar
Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation.

7.4.2 Test Setup Diagram

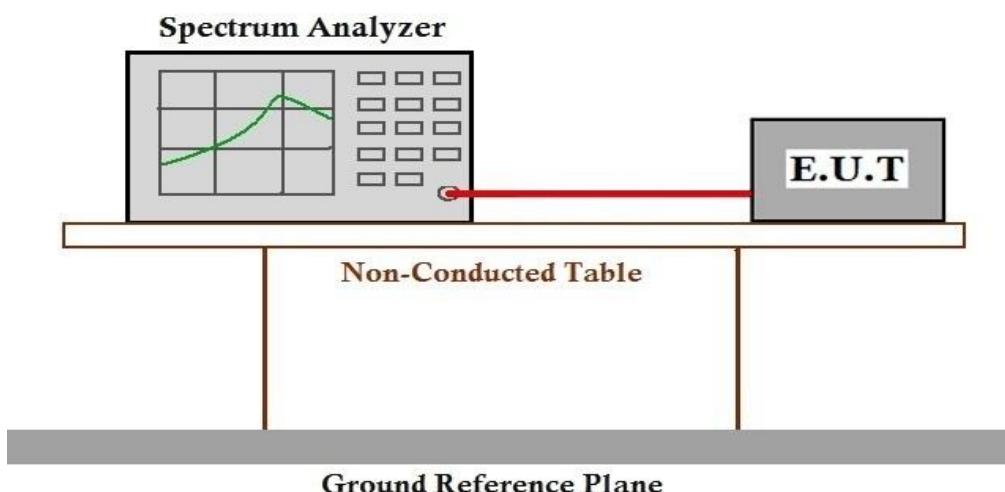

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.4.4 Conclusion

EUT complies with FCC Part 15.247 (a)(1) limit.

7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation.

7.5.2 Test Setup Diagram

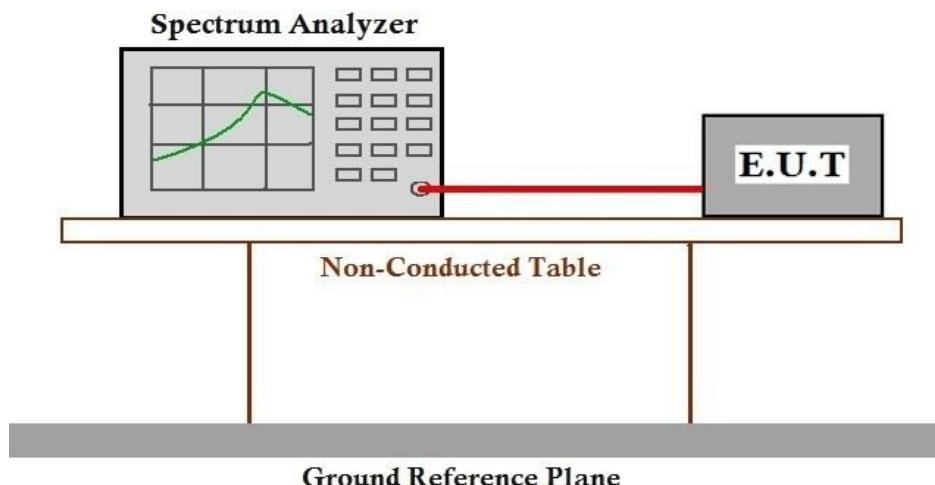

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.5.4 Conclusion

EUT complies with FCC Part 15.247 (a)(1)(iii) limit.

7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation..

7.6.2 Test Setup Diagram

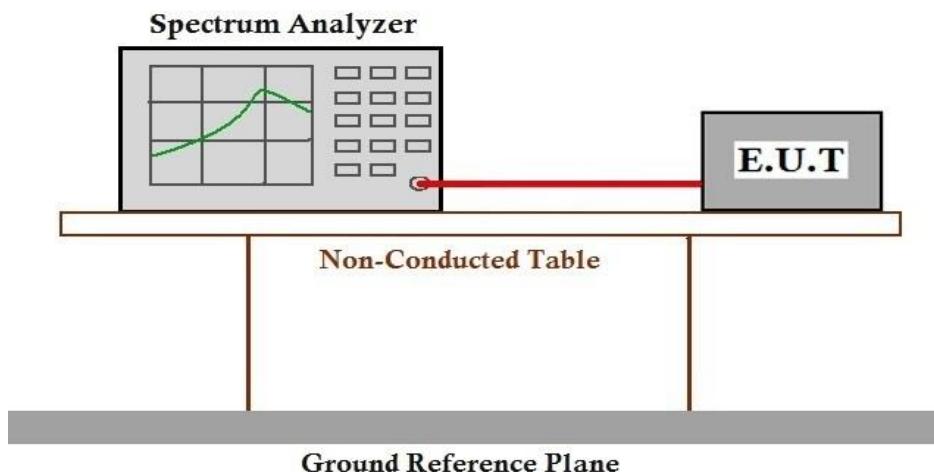

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.6.4 Conclusion

EUT complies with FCC Part 15.247 (a)(1)(iii) limit.

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.6
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation.

7.7.2 Test Setup Diagram

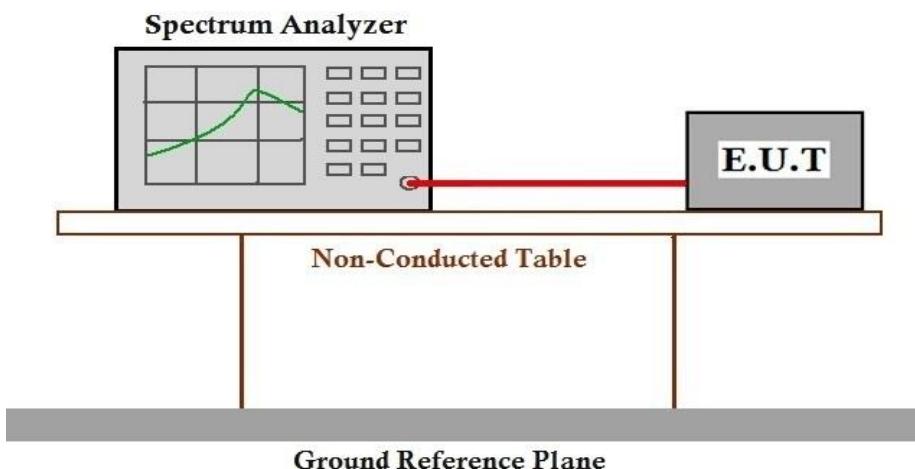

7.7.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.7.4 Conclusion

EUT complies with FCC Part 15.247 (d) limit.

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.8
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation..

7.8.2 Test Setup Diagram

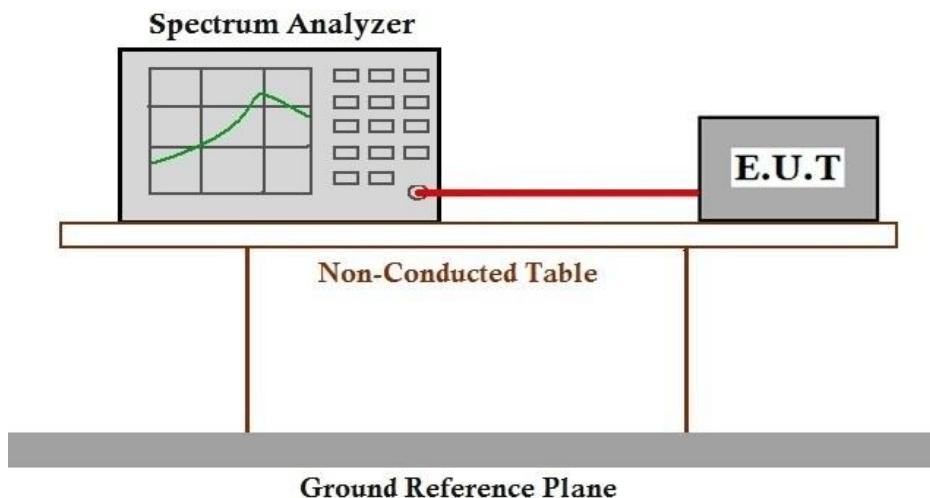

7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix SZEM171201302801 BT(Class)

7.8.4 Conclusion

EUT complies with FCC Part 15.247 (d) limit.



7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation.

7.9.2 Test Setup Diagram

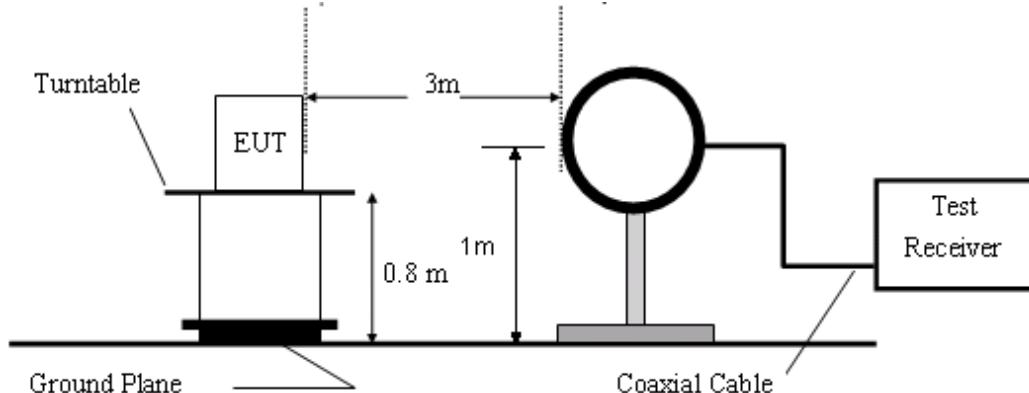


Figure1. Below 30MHz radiated emissions test configuration

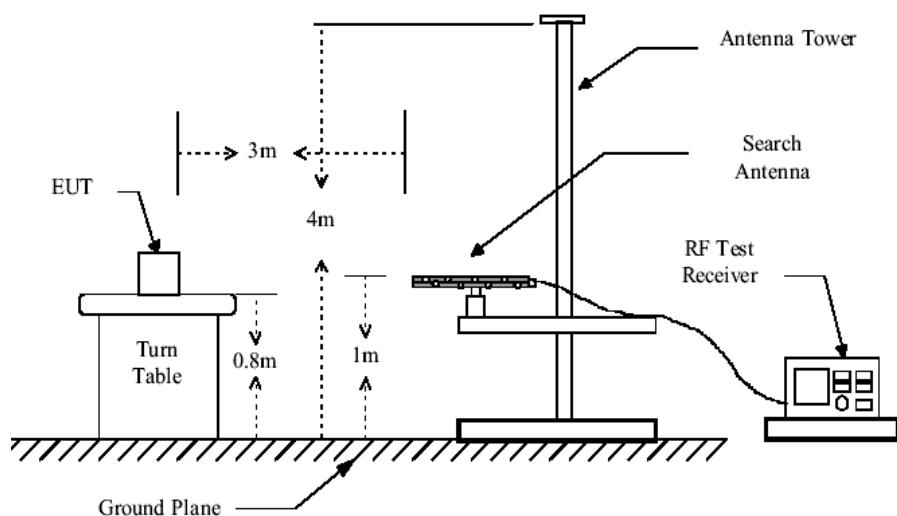


Figure2. 30MHz to 1GHz radiated emissions test configuration

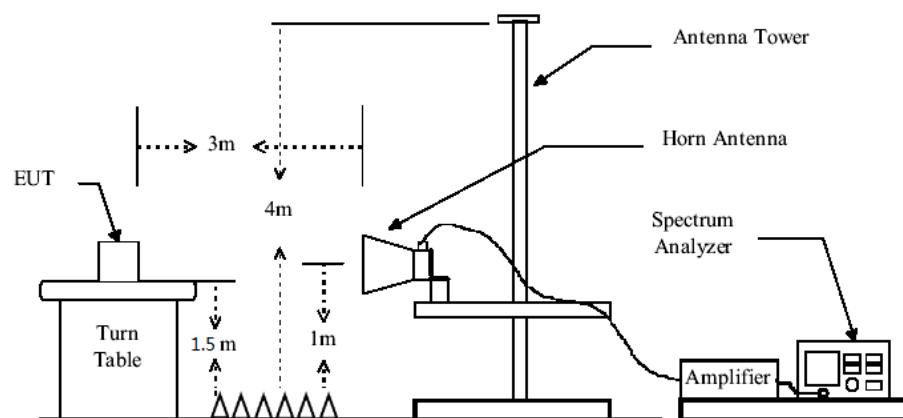


Figure3. Above 1GHz radiated emissions test configuration



7.9.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

7.9.4 Conclusion

EUT complies with FCC Part 15.209 & 15.247(d) limit.

Lowest Channel(2402MHz)
Modulation: GFSK


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2339.7	45.69	-3.74	41.95	54	-12.05	Peak	Vertical
2	2390	42.52	-3.89	38.63	54	-15.37	Peak	Vertical
3	2402.2	79.42	-3.92	75.5	54	21.5	Peak	Vertical
1	2359.2	45.67	-3.79	41.88	54	-12.12	Peak	Horizontal
2	2390	42.62	-3.89	38.73	54	-15.27	Peak	Horizontal
3	2402.2	81.84	-3.92	77.92	54	23.92	Peak	Horizontal

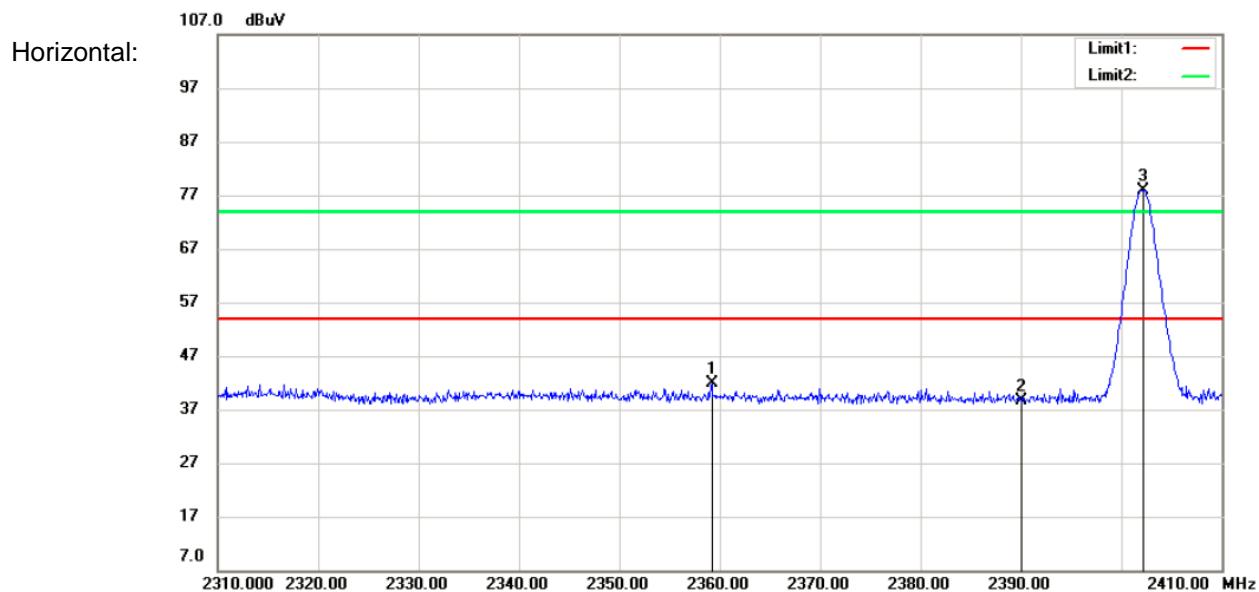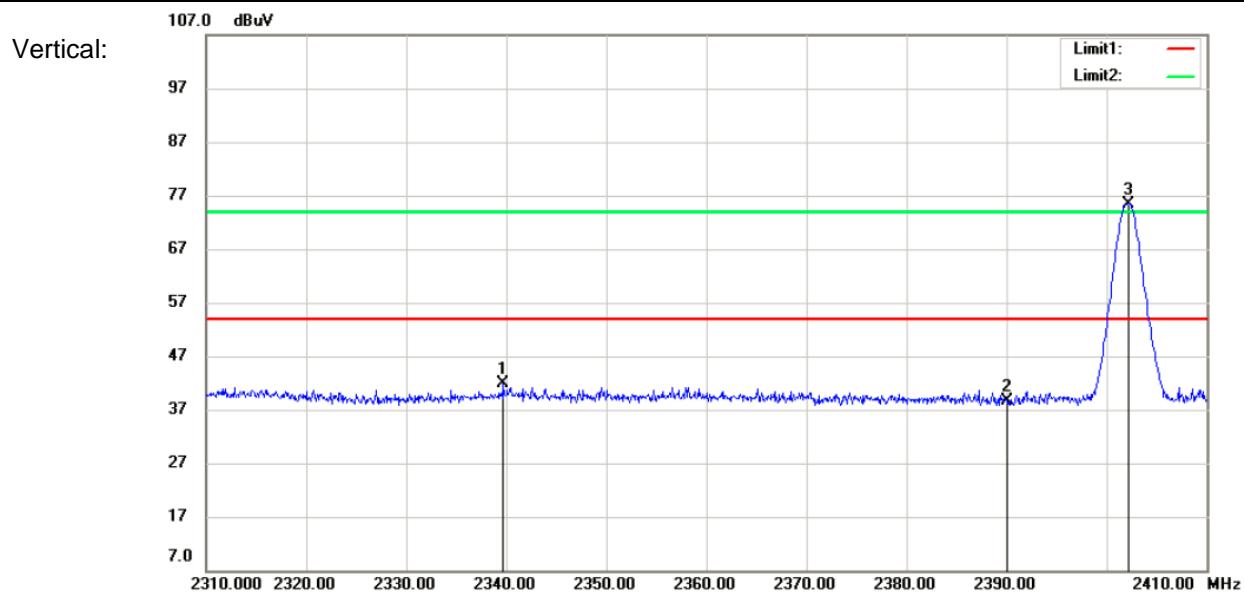


Highest Channel(2480MHz)
Modulation: GFSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2480.1	86.75	-4	82.75	54	28.75	Peak	Vertical
2	2483.5	49.8	-4.01	45.79	54	-8.21	Peak	Vertical
3	2499.975	45.47	-4.03	41.44	54	-12.56	Peak	Vertical
1	2480.175	88.94	-4	84.94	54	30.94	Peak	Horizontal
2	2483.5	51.68	-4.01	47.67	54	-6.33	Peak	Horizontal
3	2497.875	44.55	-4.03	40.52	54	-13.48	Peak	Horizontal

Vertical:


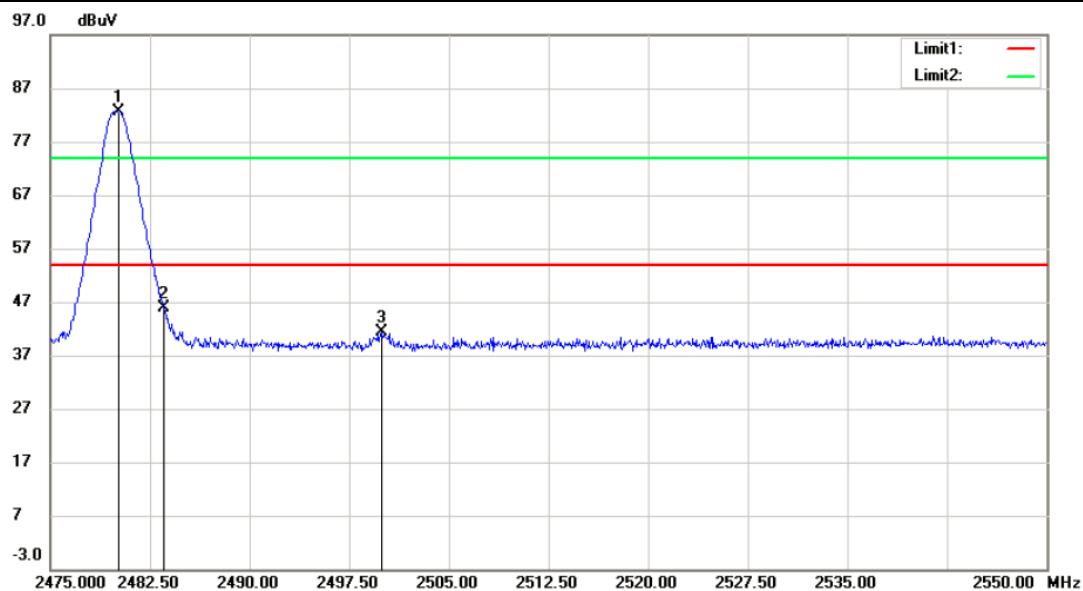


Horizontal:

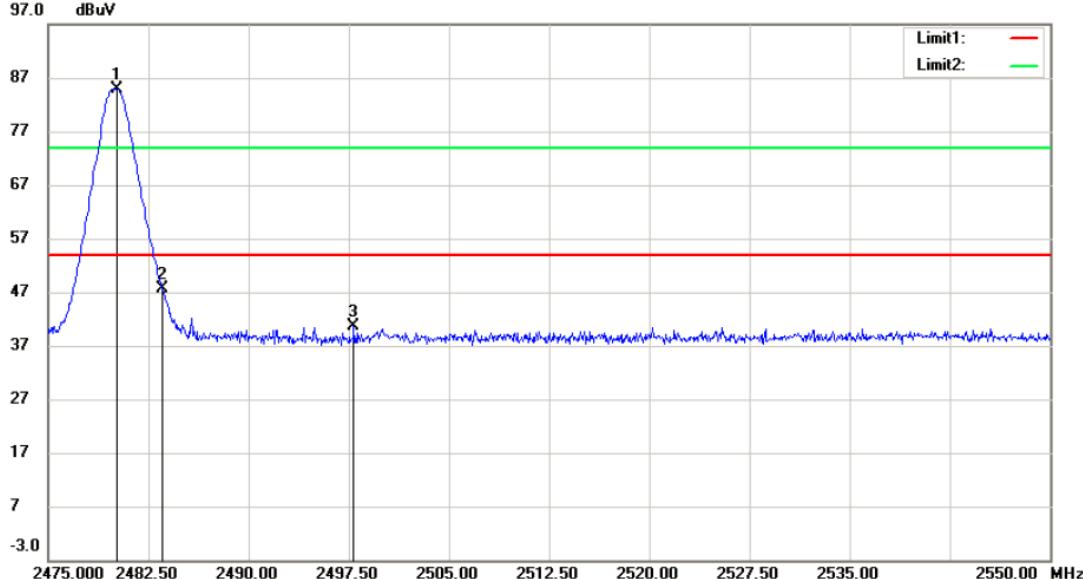



Lowest Channel(2402MHz)
Modulation: $\pi/4$ DQPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2351.7	44.51	-3.78	40.73	54	-13.27	Peak	Vertical
2	2390	42.9	-3.89	39.01	54	-14.99	Peak	Vertical
3	2402.2	77.52	-3.92	73.6	54	19.6	Peak	Vertical
1	2359.3	45.56	-3.79	41.77	54	-12.23	Peak	Horizontal
2	2390	42.64	-3.89	38.75	54	-15.25	Peak	Horizontal
3	2402.2	79.58	-3.92	75.66	54	21.66	Peak	Horizontal

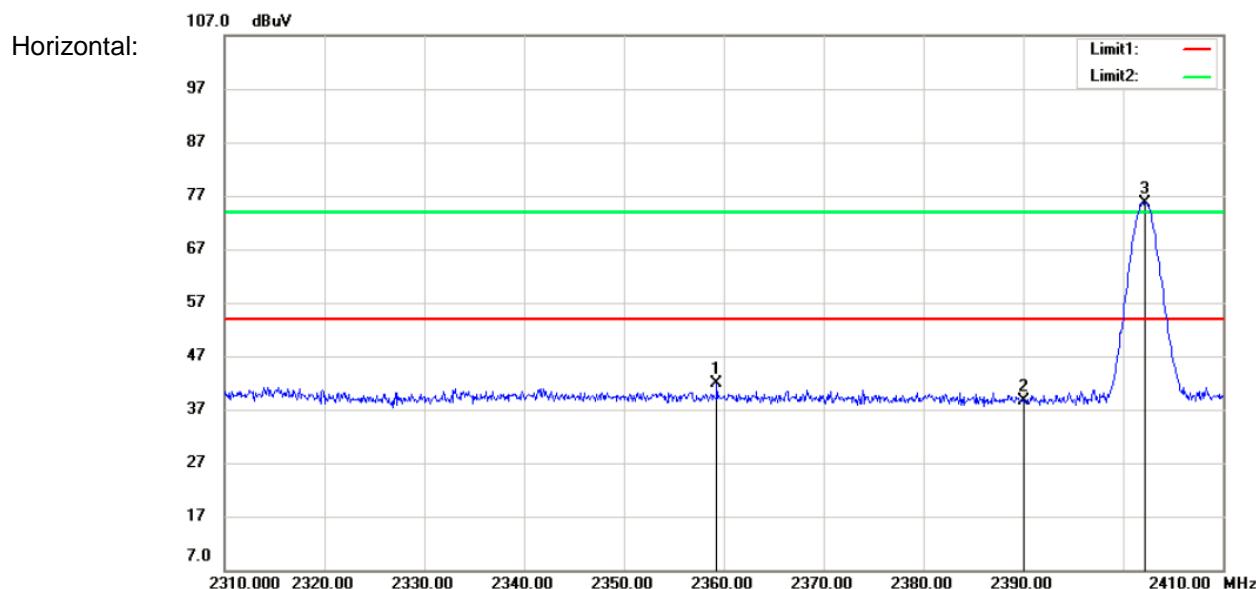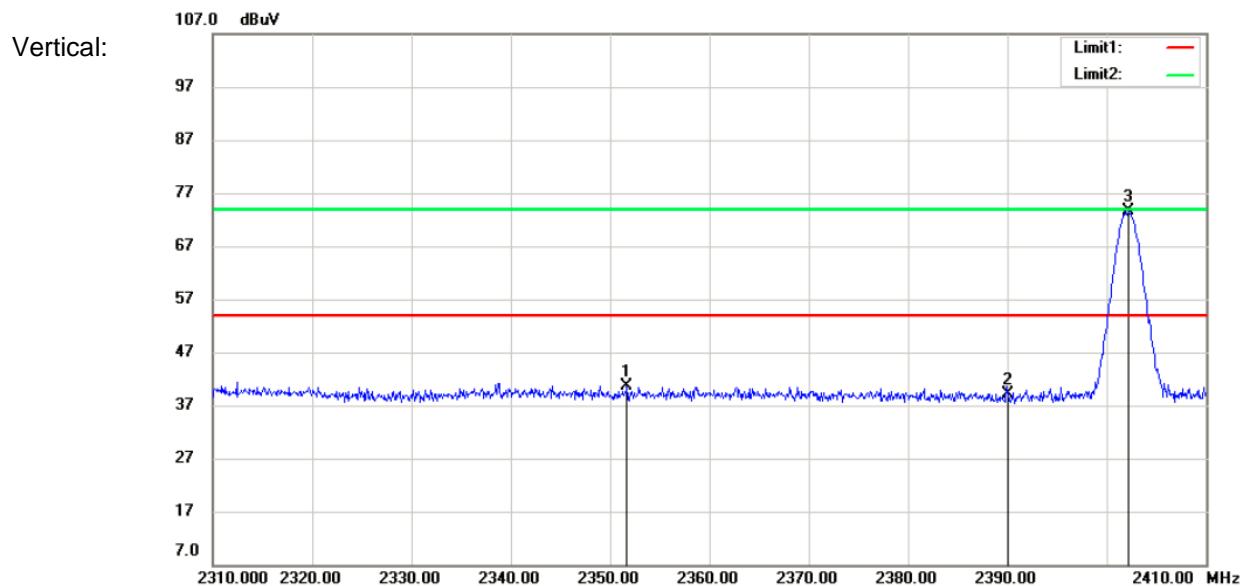



Highest Channel(2480MHz)
Modulation: $\pi/4$ DQPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2480.1	85.76	-4	81.76	54	27.76	Peak	Vertical
2	2483.5	49.34	-4.01	45.33	54	-8.67	Peak	Vertical
3	2499.675	45.54	-4.03	41.51	54	-12.49	Peak	Vertical
1	2480.1	87.63	-4	83.63	54	29.63	Peak	Horizontal
2	2483.5	51.21	-4.01	47.2	54	-6.8	Peak	Horizontal
3	2515.35	44.72	-3.85	40.87	54	-13.13	Peak	Horizontal

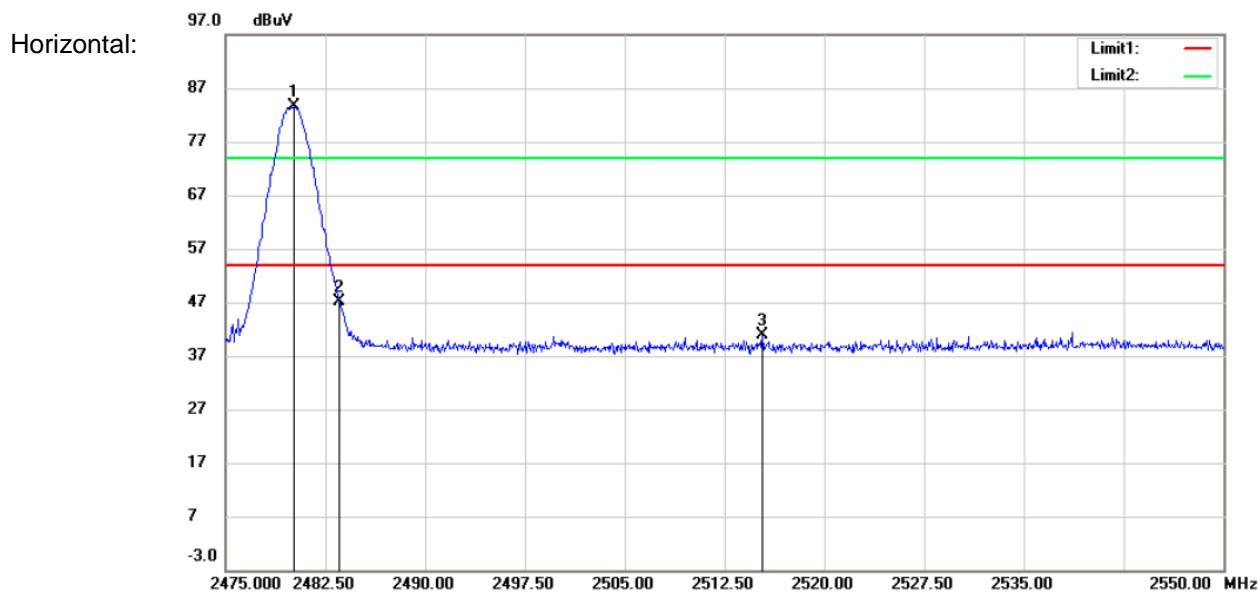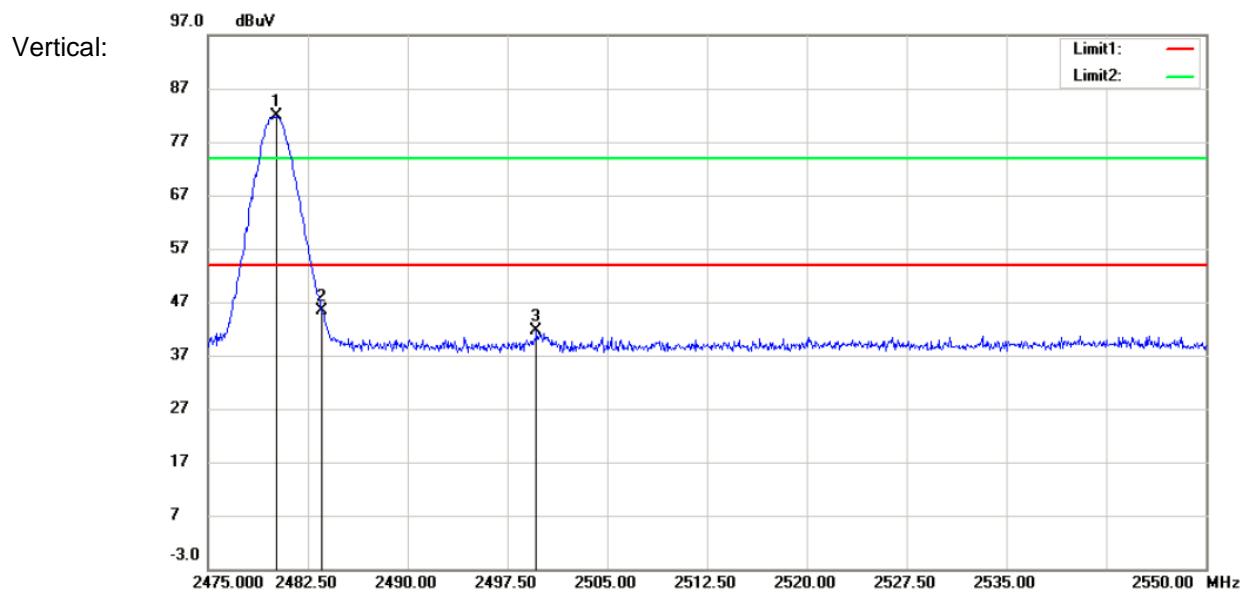



Lowest Channel(2402MHz)
Modulation: 8DPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2353.1	44.15	-3.78	40.37	54	-13.63	Peak	Vertical
2	2390	42.59	-3.89	38.7	54	-15.3	Peak	Vertical
3	2402.1	77.1	-3.92	73.18	54	19.18	Peak	Vertical
1	2378.9	44.6	-3.86	40.74	54	-13.26	Peak	Horizontal
2	2390	43.45	-3.89	39.56	54	-14.44	Peak	Horizontal
3	2402	80.13	-3.91	76.22	54	22.22	Peak	Horizontal

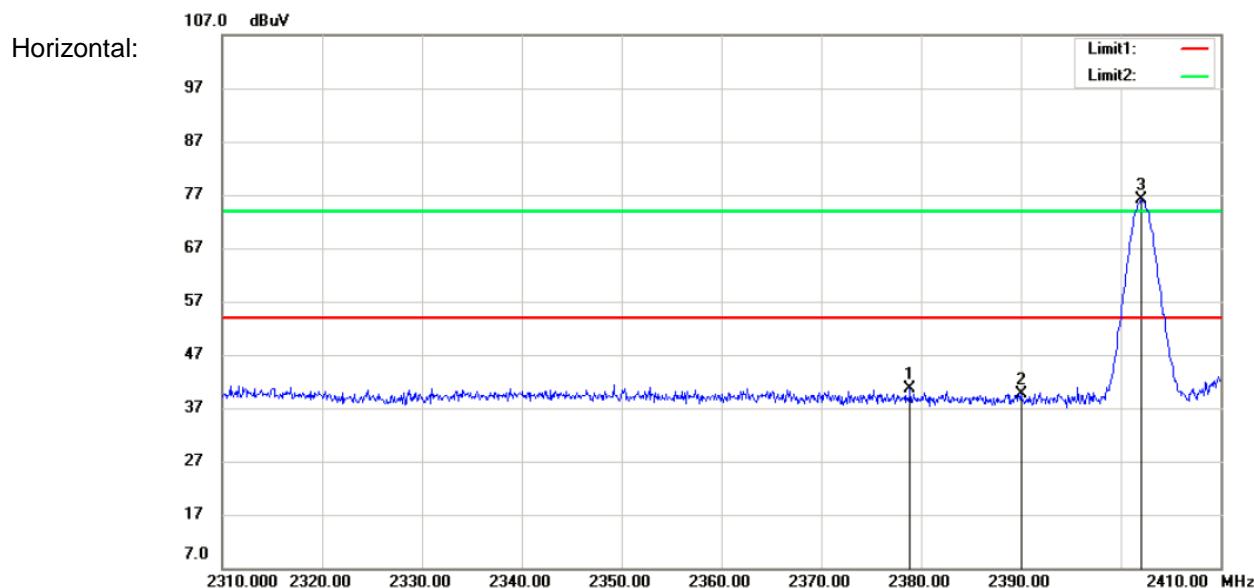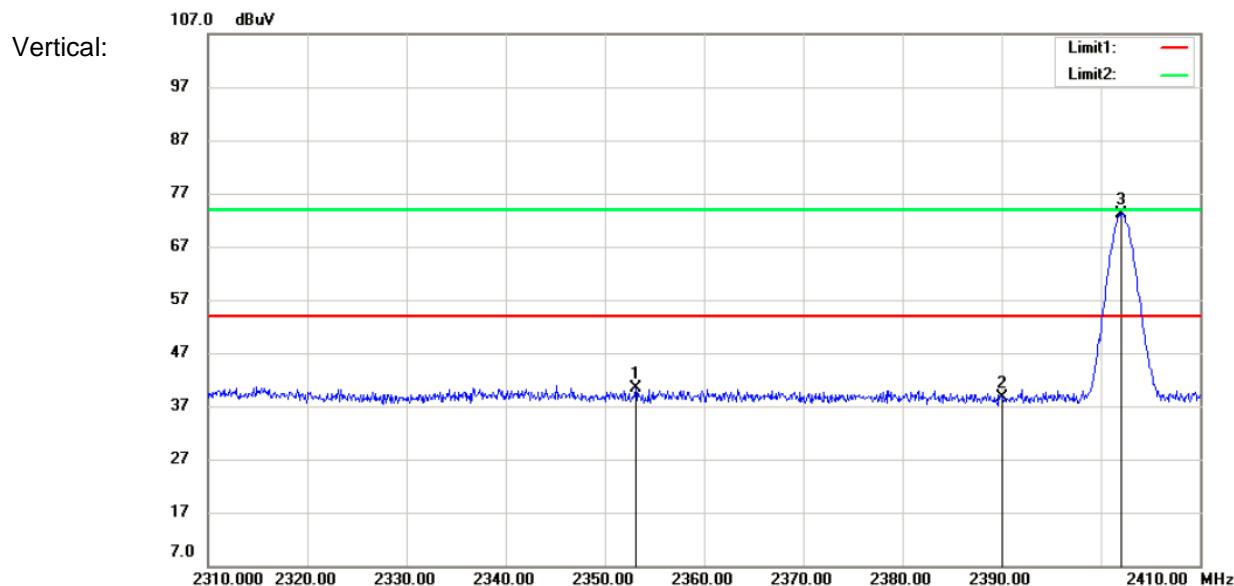

Highest Channel(2480MHz)
Modulation: 8DPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2479.95	85.68	-4	81.68	54	27.68	Peak	Vertical
2	2483.5	49.43	-4.01	45.42	54	-8.58	Peak	Vertical
3	2500.2	45.44	-4.03	41.41	54	-12.59	Peak	Vertical
1	2480.025	88.06	-4	84.06	54	30.06	Peak	Horizontal
2	2483.5	51.59	-4.01	47.58	54	-6.42	Peak	Horizontal
3	2499.9	44.23	-4.03	40.2	54	-13.8	Peak	Horizontal

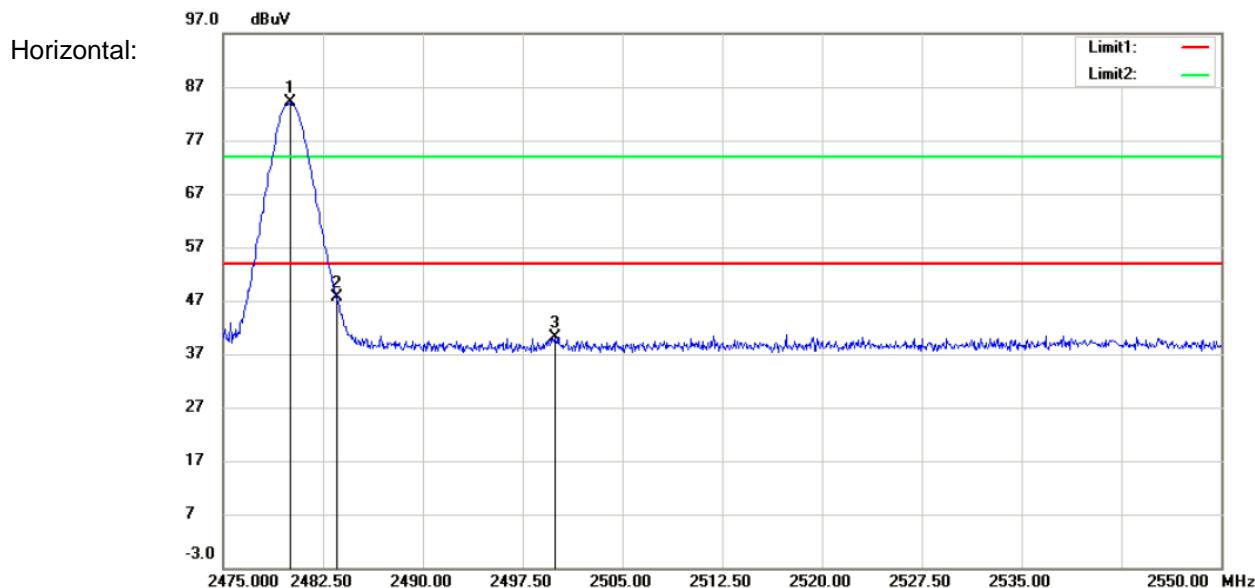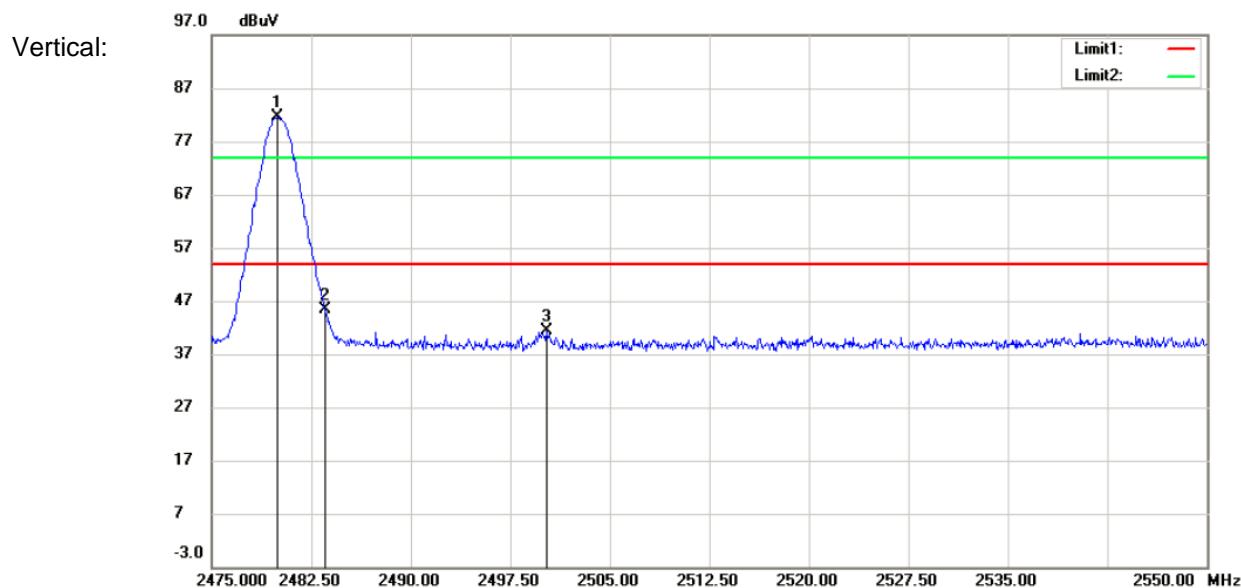



7.10 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation.

7.10.2 Test Setup Diagram

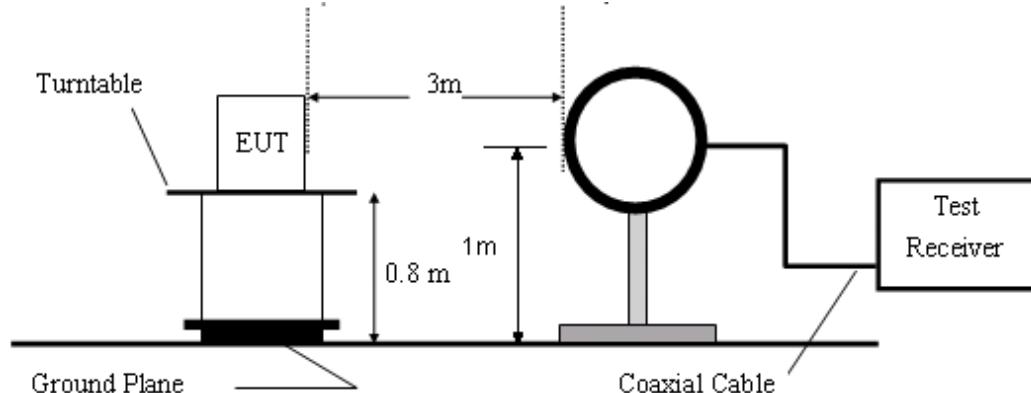


Figure1. Below 30MHz radiated emissions test configuration

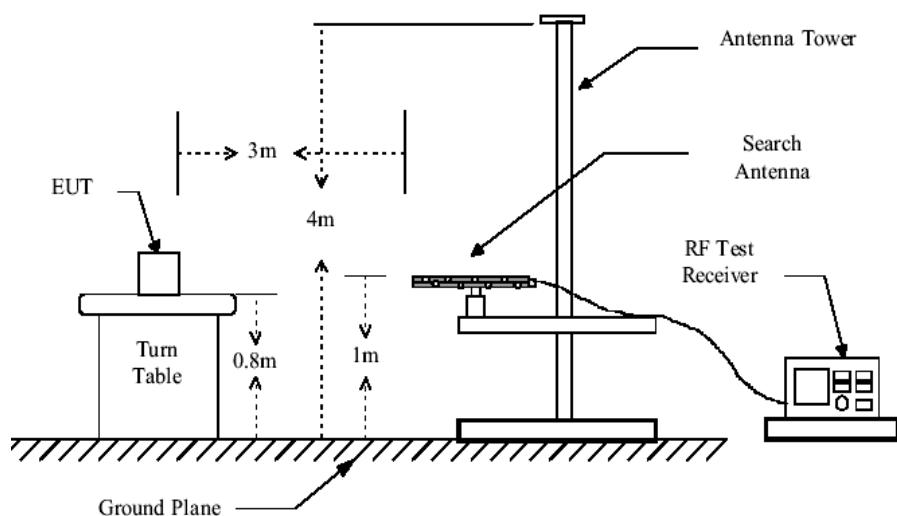


Figure2. 30MHz to 1GHz radiated emissions test configuration

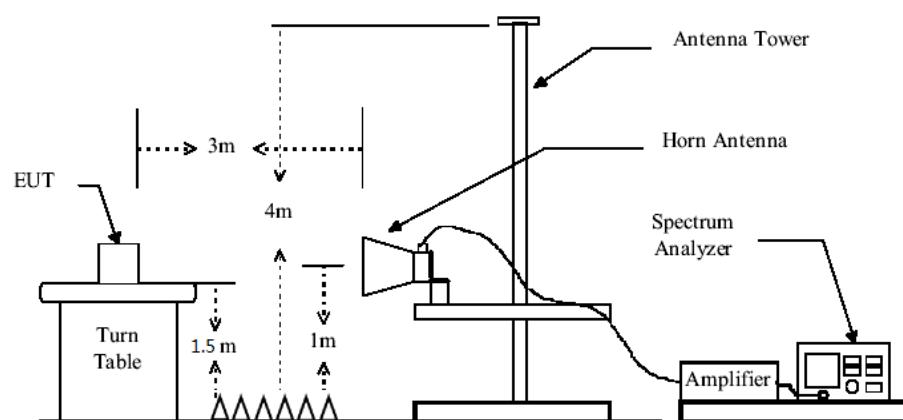


Figure3. Above 1GHz radiated emissions test configuration



7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

2. Pretest under all modes below 1GHz; choose the worst case mode (GFSK) record on the report

7.10.4 Conclusion

EUT complies with FCC Part 15.209 & 15.247(d) limit.

30MHz-1GHz:

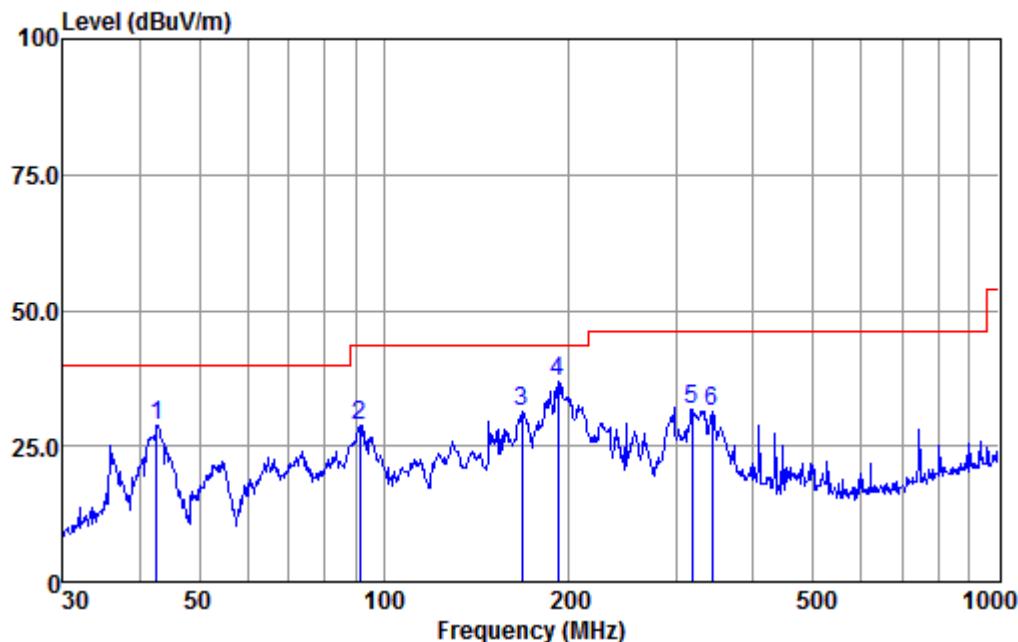


Condition : HORIZONTAL

EUT/Project: 6834CR

Test Mode : b

Freq	ReadAntenna	Cable	Preamp	Limit	Over				
	Level	Factor	Loss			Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	42.60	56.61	14.70	0.23	42.63	28.91	40.00	-11.09	QP
2	91.17	62.81	8.29	0.42	42.68	28.84	43.50	-14.66	QP
3	167.82	61.18	11.93	0.65	42.58	31.18	43.50	-12.32	QP
4 q	191.75	68.61	10.12	0.68	42.54	36.87	43.50	-6.63	QP
5	317.70	59.58	13.57	0.87	42.34	31.68	46.00	-14.32	QP
6	341.98	58.61	14.06	0.91	42.26	31.32	46.00	-14.68	QP

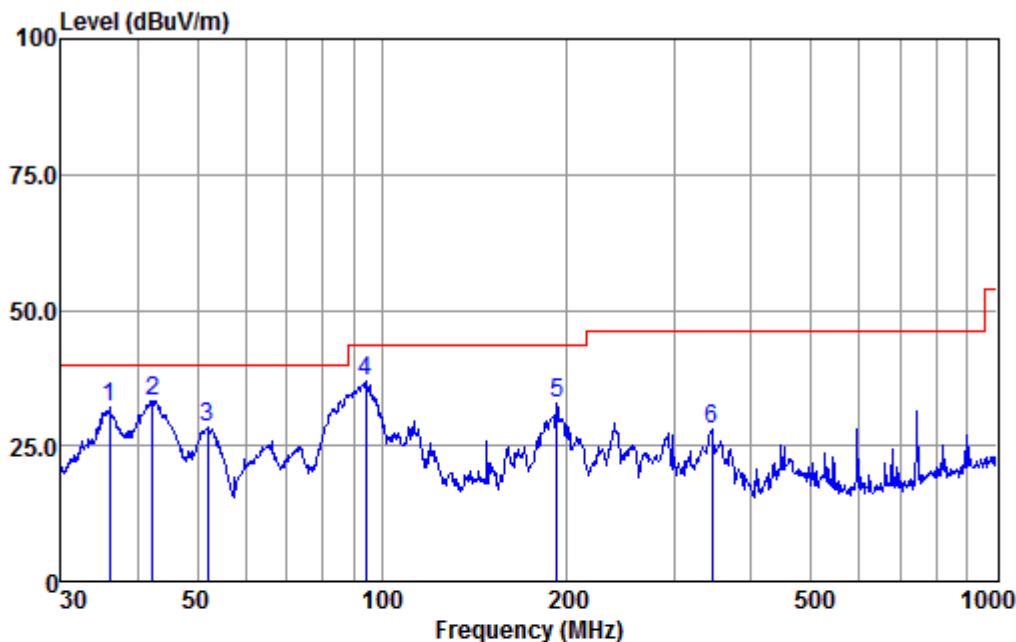

Condition : VERTICAL

EUT/Project: 6834CR

Test Mode : b

Freq	Read	Antenna	Cable	Preamplifier	Limit	Over	Over	
	MHz	Level	Factor	Loss				Remark
1	36.00	58.74	15.93	0.21	42.61	32.27	40.00	-7.73 QP
2	42.30	60.89	14.88	0.23	42.63	33.37	40.00	-6.63 QP
3	52.03	59.82	11.02	0.27	42.64	28.47	40.00	-11.53 QP
4 q	94.10	70.62	8.71	0.43	42.69	37.07	43.50	-6.43 QP
5	192.42	64.49	10.06	0.68	42.54	32.69	43.50	-10.81 QP
6	344.39	55.37	14.10	0.91	42.25	28.13	46.00	-17.87 QP



Above 1GHz:

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	39.51	6.18	45.69	54	-8.31	peak
	7206	36.16	10.63	46.79	54	-7.21	peak
*	9608	36.93	14.38	51.31	54	-2.69	peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	36.36	6.18	42.54	54	-11.46	peak
	7206	38.71	10.63	49.34	54	-4.66	peak
*	9608	33.04	14.38	47.42	54	-6.58	peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	35.45	7.00	42.45	54	-11.55	peak
	7323	37.93	11.13	49.06	54	-4.94	peak
*	9764	32.76	14.36	47.12	54	-6.88	peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	34.13	7.00	41.13	54	-12.87	peak
*	7323	33.10	11.13	44.23	54	-9.77	peak
	9764	32.03	14.36	46.39	54	-7.61	peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	37.60	7.49	45.09	54	-8.91	peak
	7440	36.78	11.65	48.43	54	-5.57	peak
*	9920	33.13	14.40	47.53	54	-6.47	peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	34.99	7.49	42.48	54	-11.52	peak
*	7440	35.17	11.65	46.82	54	-7.18	peak
	9920	31.90	14.40	46.30	54	-7.70	peak



Mode:b; Polarization:Horizontal; Modulation: $\pi/4$ DQPSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	36.26	6.18	42.44	54	-11.56	peak
	7206	40.57	10.63	51.20	54	-2.80	peak
*	9608	31.40	14.38	45.78	54	-8.22	peak

Mode:b; Polarization:Vertical; Modulation: $\pi/4$ DQPSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	36.20	6.18	42.38	54	-11.62	peak
	7206	34.68	10.63	45.31	54	-8.69	peak
*	9608	34.13	14.38	48.51	54	-5.49	peak

Mode:b; Polarization:Horizontal; Modulation: $\pi/4$ DQPSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	41.40	7.00	48.40	54	-5.60	peak
	7323	37.33	11.13	48.46	54	-5.54	peak
*	9764	32.93	14.36	47.29	54	-6.71	peak

Mode:b; Polarization:Vertical; Modulation: $\pi/4$ DQPSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	36.80	7.00	43.80	54	-10.20	peak
*	7323	37.39	11.13	48.52	54	-5.48	peak
	9764	32.10	14.36	46.46	54	-7.54	peak

Mode:b; Polarization:Horizontal; Modulation: $\pi/4$ DQPSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	33.26	7.49	40.75	54	-13.25	peak
	7440	37.53	11.65	49.18	54	-4.82	peak
*	9920	30.72	14.40	45.12	54	-8.88	peak

Mode:b; Polarization:Vertical; Modulation: $\pi/4$ DQPSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	36.22	7.49	43.71	54	-10.29	peak
*	7440	37.73	11.65	49.38	54	-4.62	peak
	9920	33.55	14.40	47.95	54	-6.05	peak



Mode:b; Polarization:Horizontal; Modulation:8DPSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	36.91	6.18	43.09	54	-10.91	peak
	7206	36.19	10.63	46.82	54	-7.18	peak
*	9608	33.19	14.38	47.57	54	-6.43	peak

Mode:b; Polarization:Vertical; Modulation:8DPSK; ; Channel:Low

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4804	33.36	6.18	39.54	54	-14.46	peak
	7206	34.10	10.63	44.73	54	-9.27	peak
*	9608	33.46	14.38	47.84	54	-6.16	peak

Mode:b; Polarization:Horizontal; Modulation:8DPSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	36.43	7.00	43.43	54	-10.57	peak
	7323	40.14	11.13	51.27	54	-2.73	peak
*	9764	38.20	14.36	52.56	54	-1.44	peak

Mode:b; Polarization:Vertical; Modulation:8DPSK; ; Channel:middle

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4882	36.29	7.00	43.29	54	-10.71	peak
*	7323	36.83	11.13	47.96	54	-6.04	peak
	9764	34.70	14.36	49.06	54	-4.94	peak

Mode:b; Polarization:Horizontal; Modulation:8DPSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	34.01	7.49	41.50	54	-12.50	peak
*	7440	35.84	11.65	47.49	54	-6.51	peak
	9920	33.72	14.40	48.12	54	-5.88	peak

Mode:b; Polarization:Vertical; Modulation:8DPSK; ; Channel:High

Mark	Frequency	RX_R	Factor	Emission	Limit	Margin	Ant.Pos
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm
	4960	37.51	7.49	45.00	54	-9.00	peak
*	7440	38.05	11.65	49.70	54	-4.30	peak
	9920	30.87	14.40	45.27	54	-8.73	peak

8 Test Setup Photographs

8.1 Radiated Emission Test Setup

Below 30MHz



30MHz to 1GHz




Above 1GHz



8.2 Conducted Emission Test Setup



9 EUT Constructional Details

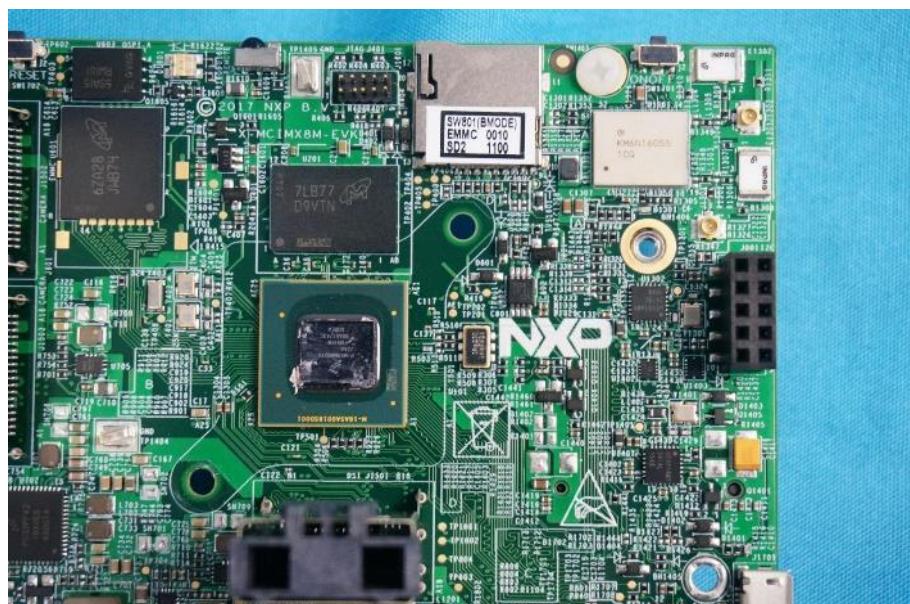



- End of the Report -