



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

FrSky Electronic Co., Ltd.

F-4, Building C, Zhongxiu Technology Park, No.3 Yuanxi Road, Wuxi, 214125, Jiangsu, China

FCC ID: XYF-TDX20HDSP


Report Type: Original Report	Product Type: Digital telemetry radio system
Project Engineer:	<u>Tyrone Wang</u> 
Report Number:	<u>RSHD201102004-00A</u>
Report Date:	<u>2021-04-13</u>
Reviewed By:	<u>Oscar Ye</u> EMC Manager 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
FACTOR & OVER LIMIT CALCULATION - BELOW 1 GHZ.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION - ABOVE 1 GHZ.....	19
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	44
FCC §15.247(d) – BAND EDGE.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48

FCC §15.247(e) - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST DATA	51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	FrSky Electronic Co., Ltd.
Tested Model:	TANDEM X20
Series Model:	TANDEM X20S, TANDEM X20 HD, TANDEM X20 PRO, TANDEM X20E, TANDEM XE
Model Difference:	See Declaration Letter
Product Type:	Digital telemetry radio system
Power Supply:	DC 7.4V from battery
RF Function:	BLE (1Mbps), BLE (2Mbps)
Operating Band/Frequency:	2402-2480MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	Patch antenna
*Maximum Antenna Gain:	2 dBi
Maximum Output Power:	1.53 dBm

Note: The antenna gain was provided by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: RSHD201102004-1.(Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2020-11-02.*

Objective

This report is prepared on behalf of *FrSky Electronic Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software


RF test software: Smart Studio 7

*Power Level Setting: BLE (1Mbps): 5 BLE (2Mbps): 5

Note: The power level setting was declared by the applicant.

Duty Cycle:

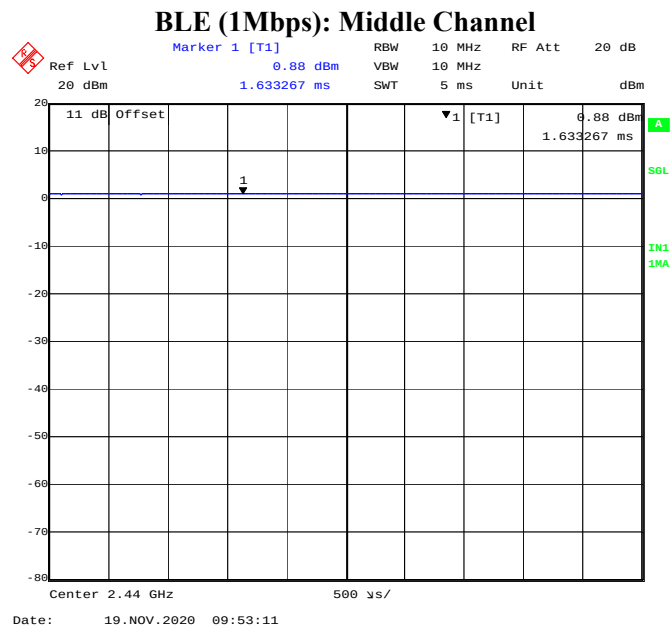

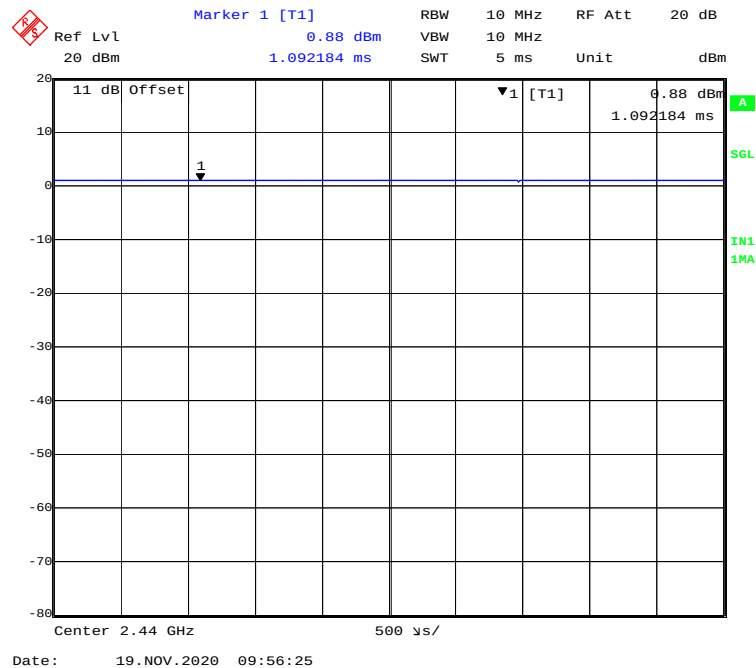BLE (2Mbps): Middle Channel

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
BLE (1Mbps)	100.00	0	0	0
BLE (2Mbps)	100.00	0	0	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Adapter	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN

Block Diagram of Test Setup

For Conducted Emissions:

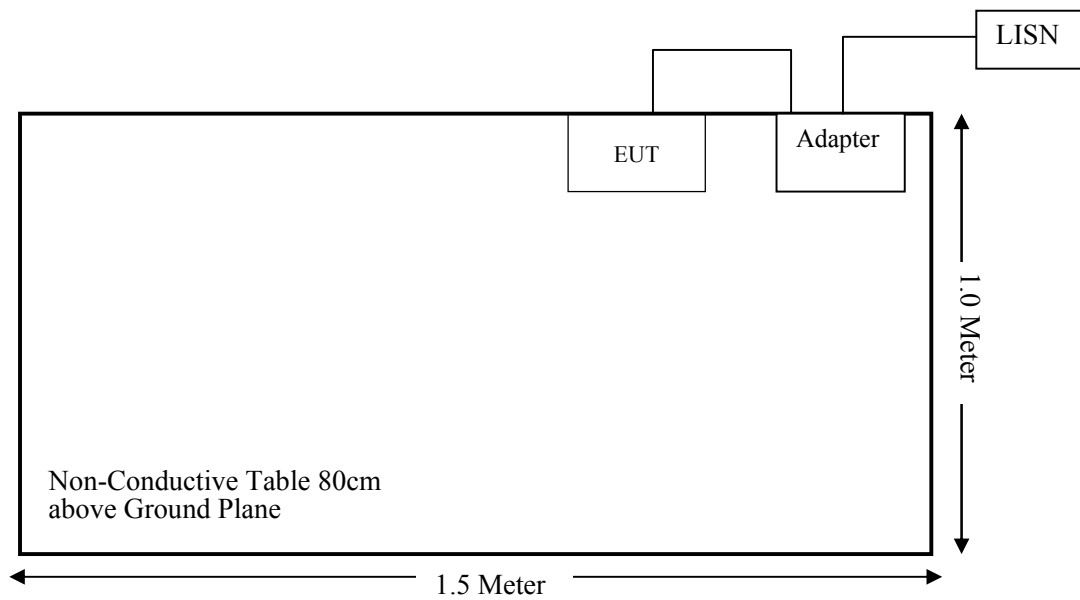


For Radiated Emissions (Below 1GHz):

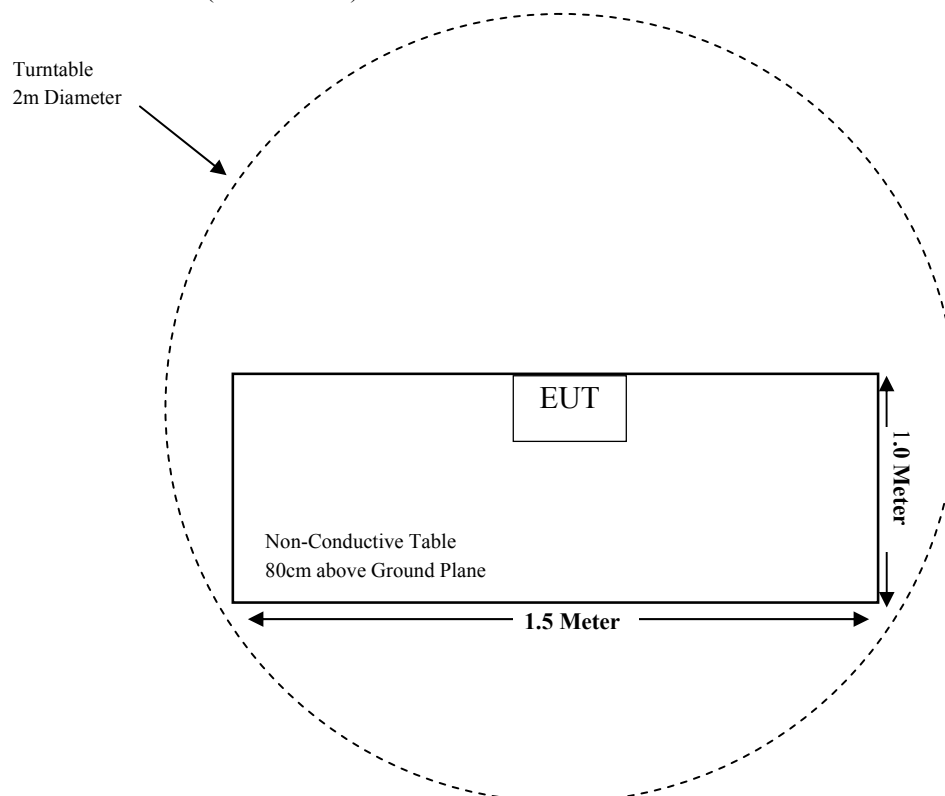

For Radiated Emissions (Above 1GHz):

Turntable
2m Diameter

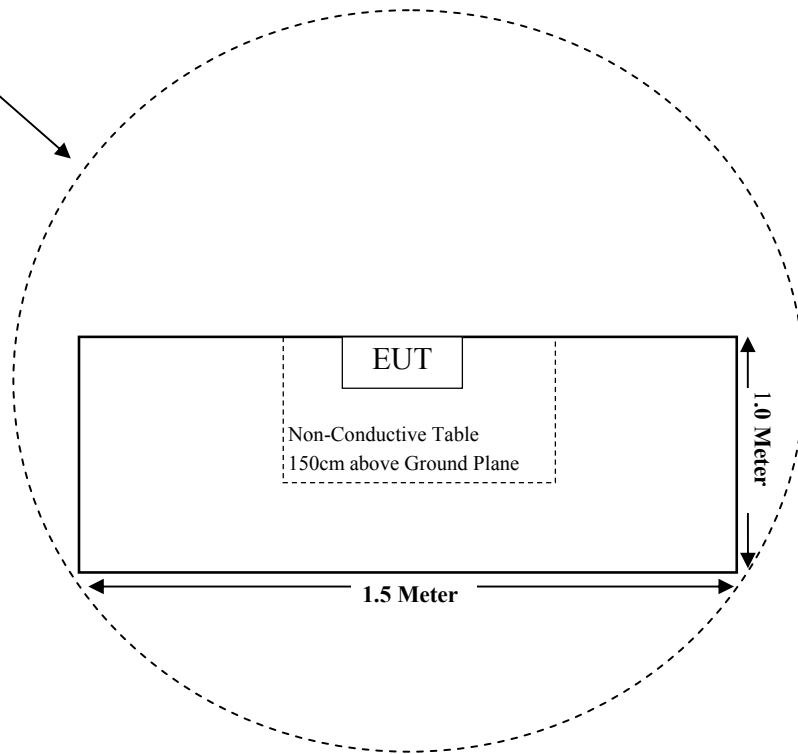

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Sunol Sciences	Hybrid Antenna	JB3	A090314-2	2020-01-07	2023-01-06
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Audix	Test Software	e3	V9	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2020-01-17	2023-01-16
A.H. Systems,inc.	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
SELECTOR	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-12-14	2021-12-13
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2020-07-23	2021-07-22
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
FrSky Electronic Co., Ltd.	RF Cable	FrSky Electronic Co., Ltd. C01	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Calculated Data (worst case)

For BLE:

Mode	Frequency Range (MHz)	Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (10-g extremity SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BLE(1Mbps)	2402-2480	2.00	1.58	5	0.5	7.5	Yes
BLE(2Mbps)	2402-2480	1.50	1.41	5	0.4	7.5	Yes

Result: So the stand-alone SAR evaluation is not necessary.

For 900MHz LORA & 2.4G SRD: (Contains FCC ID: XYFTDMR2409 , Grant on :3/15/2021)

Compliance, please refer to SAR Report:RSHD201102004-20A.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a Patch antenna for BLE, which the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

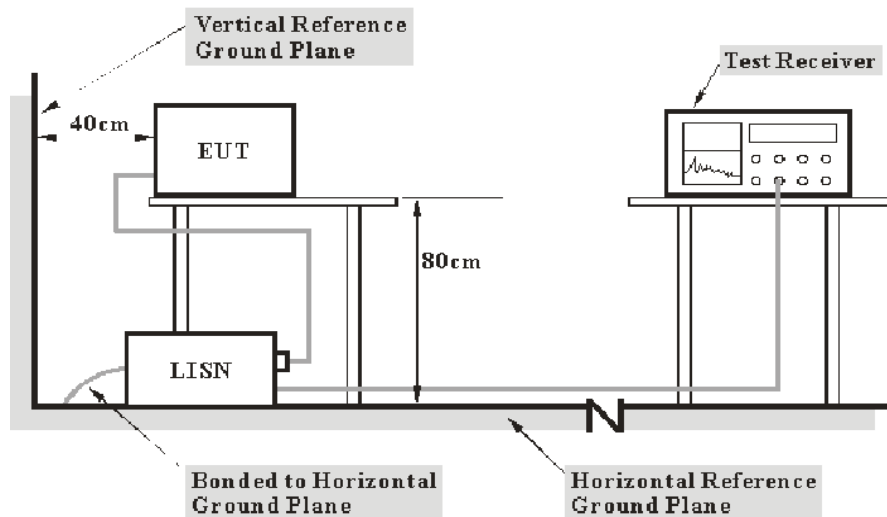

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter of EUT connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25.5°C
Relative Humidity:	51.2 %
ATM Pressure:	101.3 kPa

The testing was performed by Tyrone Wang on 2020-11-20.

EUT operation mode: Charging mode


AC 120V/60 Hz, Line

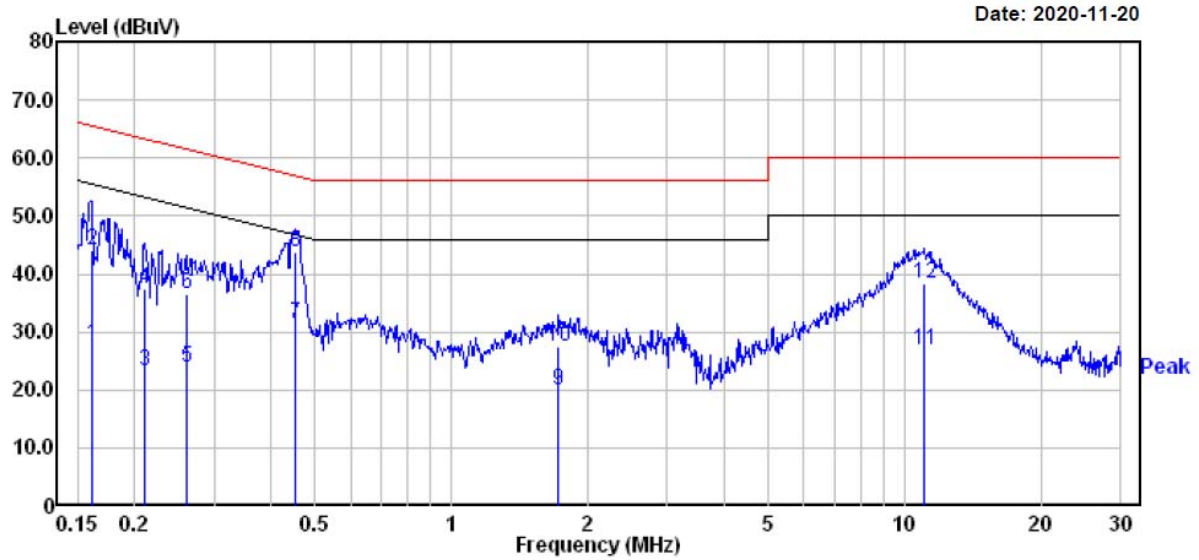

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.161	7.80	19.83	27.63	55.43	-27.80	Average
2	0.161	24.20	19.83	44.03	65.43	-21.40	QP
3	0.211	3.50	19.82	23.32	53.18	-29.86	Average
4	0.211	17.50	19.82	37.32	63.18	-25.86	QP
5	0.260	4.00	19.82	23.82	51.42	-27.60	Average
6	0.260	16.70	19.82	36.52	61.42	-24.90	QP
7	0.454	11.60	19.75	31.35	46.80	-15.45	Average
8	0.454	24.10	19.75	43.85	56.80	-12.95	QP
9	1.725	0.10	19.84	19.94	46.00	-26.06	Average
10	1.725	7.50	19.84	27.34	56.00	-28.66	QP
11	11.080	7.30	19.57	26.87	50.00	-23.13	Average
12	11.080	18.80	19.57	38.37	60.00	-21.63	QP

AC 120V/60 Hz, Neutral

Date: 2020-11-20

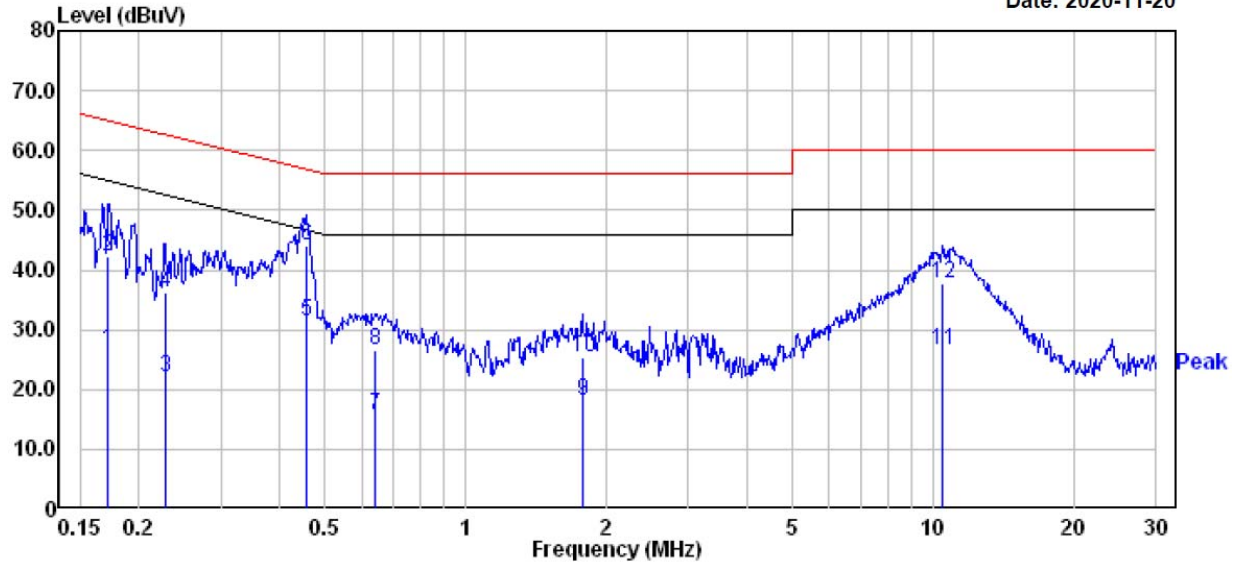

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.172	6.60	19.83	26.43	54.86	-28.43 Average
2	0.172	22.40	19.83	42.23	64.86	-22.63 QP
3	0.228	2.30	19.82	22.12	52.52	-30.40 Average
4	0.228	16.50	19.82	36.32	62.52	-26.20 QP
5	0.456	11.70	19.75	31.45	46.76	-15.31 Average
6	0.456	24.30	19.75	44.05	56.76	-12.71 QP
7	0.641	-4.20	19.75	15.55	46.00	-30.45 Average
8	0.641	6.90	19.75	26.65	56.00	-29.35 QP
9	1.781	-1.60	19.84	18.24	46.00	-27.76 Average
10	1.781	5.60	19.84	25.44	56.00	-30.56 QP
11	10.508	7.00	19.56	26.56	50.00	-23.44 Average
12	10.508	18.10	19.56	37.66	60.00	-22.34 QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

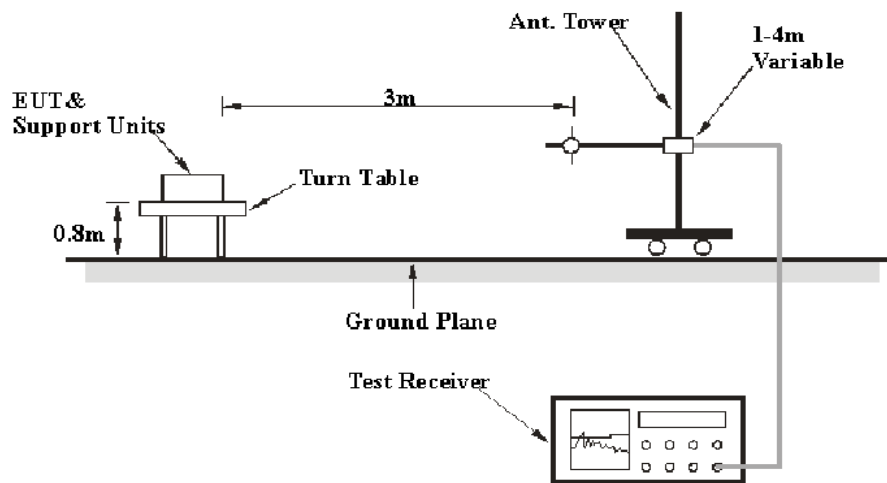

Above 1GHz:

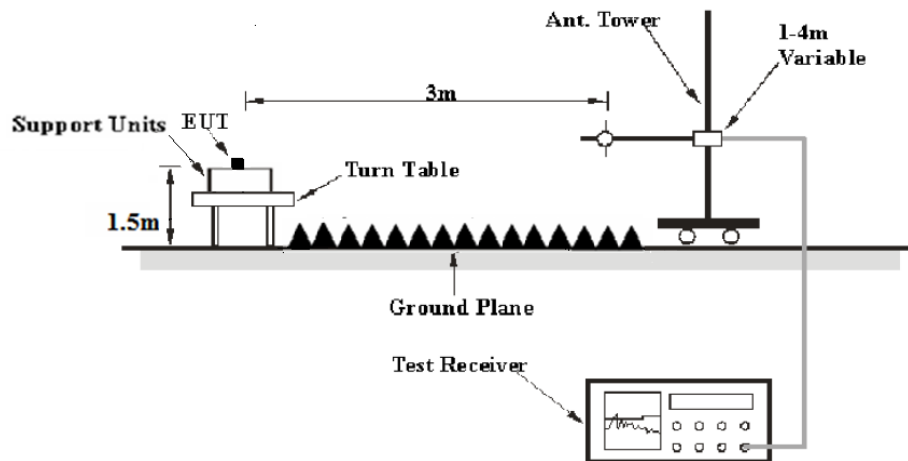

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Factor & Over Limit Calculation - Below 1 GHz

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation - Above 1 GHz

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	23.6~25.3℃
Relative Humidity:	50~52%
ATM Pressure:	101.1~101.3 kPa


The testing was performed by Tyrone Wang from 2020-11-18 to 2021-03-19.

Test Result: Compliant.

EUT operation mode: Transmitting

Spurious Emission Test:**BLE (1Mbps)****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in the **Z** axis of orientation was recorded)

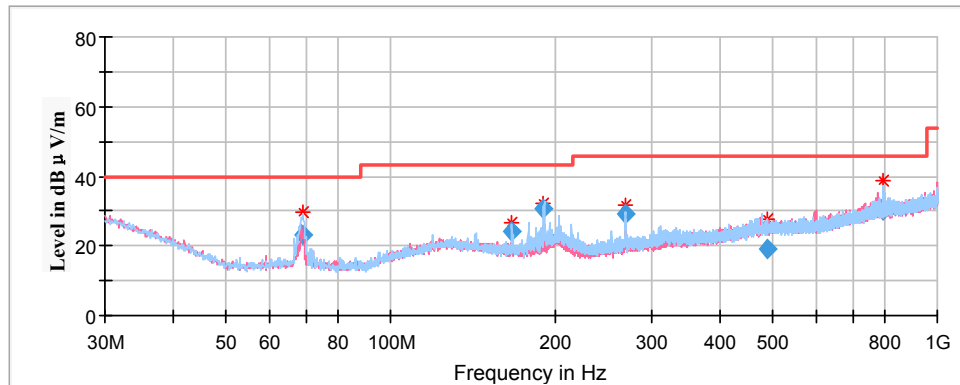

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
69.104000	23.34	200.0	H	0.0	-17.1	40.00	16.66
166.761900	24.23	200.0	H	301.0	-13.1	43.50	19.27
190.618500	30.60	200.0	H	307.0	-12.2	43.50	12.90
268.343350	29.06	100.0	H	269.0	-12.4	46.00	16.94
488.349250	19.04	200.0	H	83.0	-6.6	46.00	26.96
797.241150	30.07	100.0	H	269.0	-1.5	46.00	15.93

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

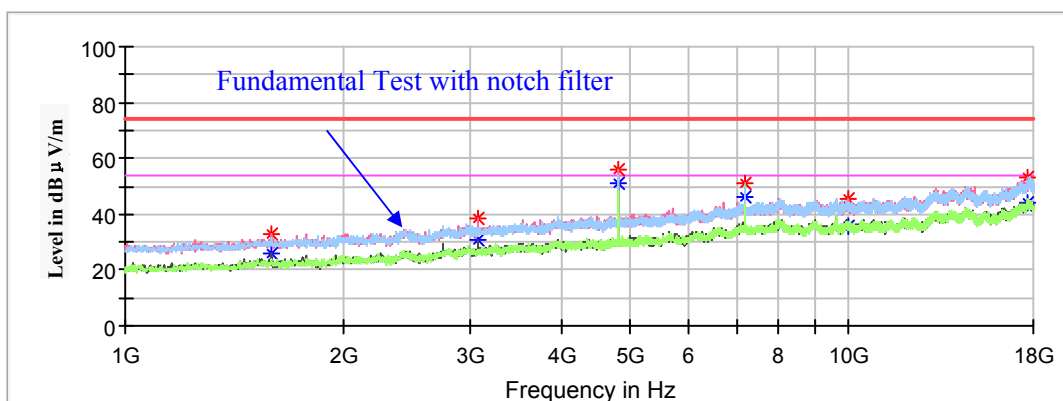

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1593.300000	---	25.64	200.0	V	297.0	-16.0	54.00	28.36
1593.300000	32.55	---	200.0	V	297.0	-16.0	74.00	41.45
3070.600000	---	31.03	200.0	V	170.0	-9.9	54.00	22.97
3070.600000	38.64	---	200.0	V	170.0	-9.9	74.00	35.36
4804.000000	---	50.72	200.0	V	0.0	-5.6	54.00	3.28
4804.000000	56.19	---	200.0	V	0.0	-5.6	74.00	17.81
7205.000000	---	46.20	200.0	V	51.0	0.4	54.00	7.80
7205.000000	51.34	---	200.0	V	51.0	0.4	74.00	22.66
9984.500000	---	35.40	200.0	V	297.0	1.9	54.00	18.60
9984.500000	45.62	---	200.0	V	297.0	1.9	74.00	28.38
17700.800000	---	44.40	200.0	H	83.0	8.9	54.00	9.60
17700.800000	52.86	---	200.0	H	83.0	8.9	74.00	21.14

Middle Channel: 2440MHz


Full Spectrum

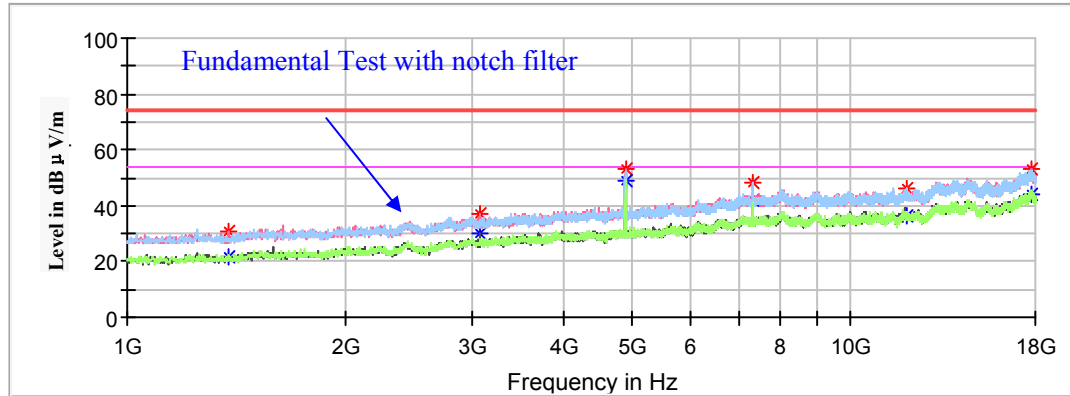

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1379.100000	---	21.99	150.0	H	251.0	-17.0	54.00	32.01
1379.100000	31.03	---	150.0	H	251.0	-17.0	74.00	42.97
3070.600000	---	30.35	200.0	V	175.0	-9.9	54.00	23.65
3070.600000	36.87	---	200.0	V	175.0	-9.9	74.00	37.13
4880.000000	---	49.13	200.0	V	2.0	-5.4	54.00	4.87
4880.000000	52.88	---	200.0	V	2.0	-5.4	74.00	21.12
7320.600000	---	41.63	200.0	V	51.0	0.6	54.00	12.37
7320.600000	48.54	---	200.0	V	51.0	0.6	74.00	25.46
11959.900000	---	36.40	200.0	H	1.0	3.7	54.00	17.60
11959.900000	46.29	---	200.0	H	1.0	3.7	74.00	27.71
17830.000000	---	43.71	200.0	V	15.0	8.8	54.00	10.29
17830.000000	52.83	---	200.0	V	15.0	8.8	74.00	21.17

High Channel: 2480MHz

Full Spectrum

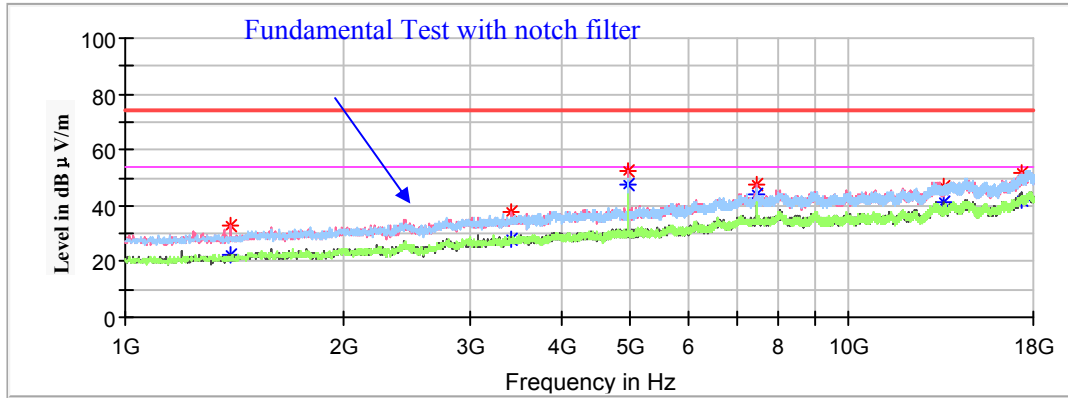


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1397.800000	---	22.66	200.0	V	323.0	-16.9	54.00	31.34
1397.800000	32.59	---	200.0	V	323.0	-16.9	74.00	41.41
3424.200000	---	28.30	200.0	V	0.0	-9.0	54.00	25.70
3424.200000	37.96	---	200.0	V	0.0	-9.0	74.00	36.04
4960.000000	---	47.69	150.0	V	1.0	-5.3	54.00	6.31
4960.000000	52.38	---	150.0	V	1.0	-5.3	74.00	21.62
7439.600000	---	43.75	200.0	V	51.0	0.9	54.00	10.25
7439.600000	47.46	---	200.0	V	51.0	0.9	74.00	26.54
13559.600000	---	41.48	150.0	V	357.0	5.7	54.00	12.52
13559.600000	46.59	---	150.0	V	357.0	5.7	74.00	27.41
17340.400000	---	42.10	200.0	H	0.0	8.3	54.00	11.90
17340.400000	51.79	---	200.0	H	0.0	8.3	74.00	22.21

18GHz-25GHz:


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in Z-axis of orientation was recorded)

Horizontal

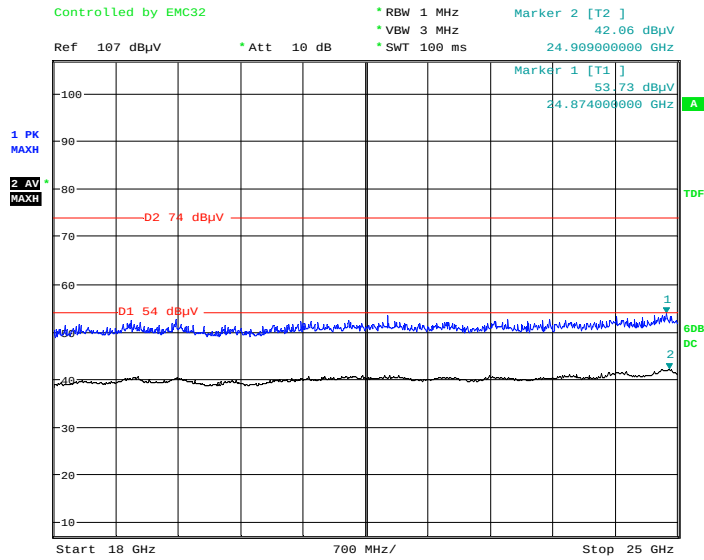

Date: 19.MAR.2021 16:26:14


Vertical

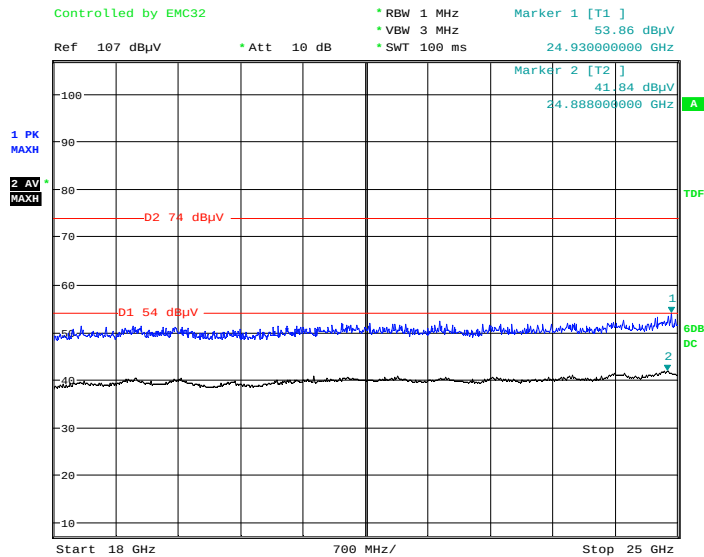

Date: 19.MAR.2021 16:27:11

BLE (2Mbps)**30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in the Z axis of orientation was recorded)

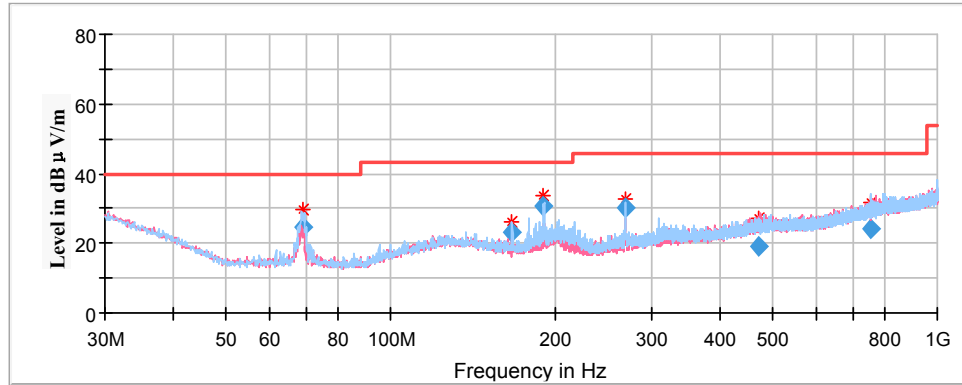

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
69.166900	24.89	200.0	H	351.0	-17.1	40.00	15.11
166.707350	23.10	200.0	H	127.0	-13.1	43.50	20.40
190.539250	30.71	100.0	H	295.0	-12.2	43.50	12.79
268.294400	30.00	100.0	H	307.0	-12.4	46.00	16.00
472.610000	19.27	100.0	V	17.0	-6.7	46.00	26.73
756.526850	24.02	100.0	H	83.0	-2.1	46.00	21.98

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz


Full Spectrum

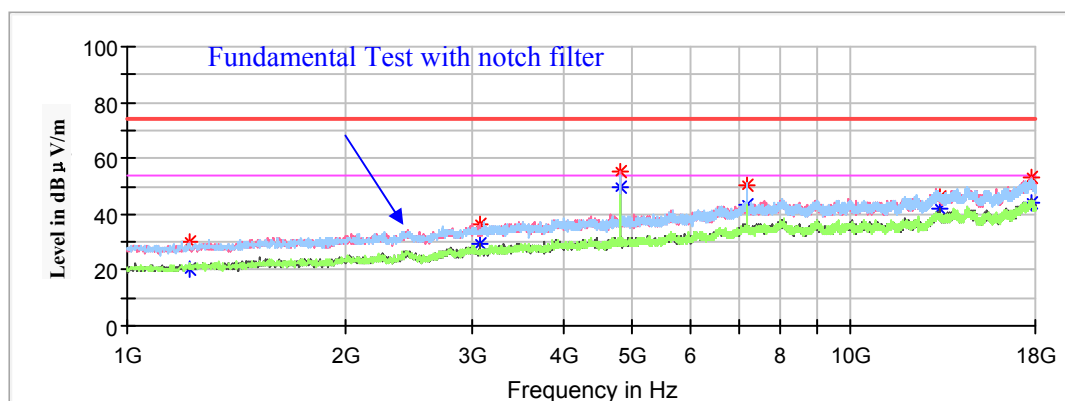

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1215.900000	---	20.45	200.0	V	336.0	-17.9	54.00	33.55
1215.900000	29.88	---	200.0	V	336.0	-17.9	74.00	44.12
3070.600000	---	29.39	150.0	V	184.0	-9.9	54.00	24.61
3070.600000	36.58	---	150.0	V	184.0	-9.9	74.00	37.42
4804.000000	---	49.74	200.0	V	0.0	-5.6	54.00	4.26
4804.000000	55.41	---	200.0	V	0.0	-5.6	74.00	18.59
7206.700000	50.10	---	200.0	H	95.0	0.4	74.00	23.90
7206.700000	---	43.62	200.0	H	95.0	0.4	54.00	10.38
13251.900000	---	41.78	150.0	V	0.0	5.5	54.00	12.22
13251.900000	46.09	---	150.0	V	0.0	5.5	74.00	27.91
17758.600000	---	43.71	150.0	H	55.0	8.8	54.00	10.29
17758.600000	52.97	---	150.0	H	55.0	8.8	74.00	21.03

Middle Channel: 2440MHz


Full Spectrum

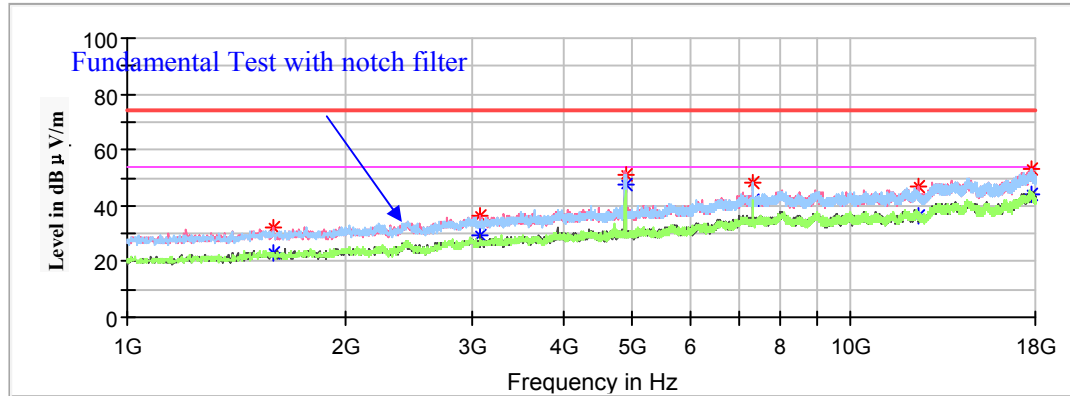

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	22.91	150.0	V	278.0	-16.0	54.00	31.09
1595.000000	32.45	---	150.0	V	278.0	-16.0	74.00	41.55
3070.600000	36.29	---	200.0	V	233.0	-9.9	74.00	37.71
3070.600000	---	29.04	200.0	V	233.0	-9.9	54.00	24.96
4880.000000	---	47.72	200.0	V	37.0	-5.4	54.00	6.28
4880.000000	50.91	---	200.0	V	37.0	-5.4	74.00	23.09
7320.600000	---	42.14	150.0	V	59.0	0.6	54.00	11.86
7320.600000	48.51	---	150.0	V	59.0	0.6	74.00	25.49
12398.500000	---	36.60	150.0	H	0.0	3.1	54.00	17.40
12398.500000	46.93	---	150.0	H	0.0	3.1	74.00	27.07
17768.800000	---	43.75	200.0	V	335.0	8.8	54.00	10.25
17768.800000	53.41	---	200.0	V	335.0	8.8	74.00	20.59

High Channel: 2480MHz

Full Spectrum

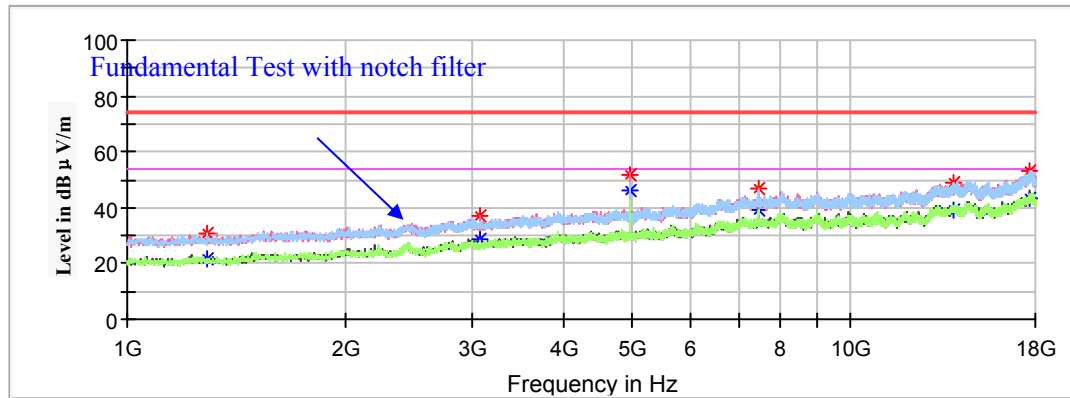


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1290.700000	---	21.83	200.0	V	285.0	-17.5	54.00	32.17
1290.700000	30.56	---	200.0	V	285.0	-17.5	74.00	43.44
3070.600000	---	28.82	200.0	V	170.0	-9.9	54.00	25.18
3070.600000	36.81	---	200.0	V	170.0	-9.9	74.00	37.19
4960.000000	---	45.84	200.0	V	37.0	-5.3	54.00	8.16
4960.000000	51.54	---	200.0	V	37.0	-5.3	74.00	22.46
7441.300000	---	39.46	200.0	V	157.0	0.9	54.00	14.54
7441.300000	46.98	---	200.0	V	157.0	0.9	74.00	27.02
13860.500000	---	39.13	200.0	V	157.0	6.0	54.00	14.87
13860.500000	49.00	---	200.0	V	157.0	6.0	74.00	25.00
17711.000000	---	43.44	150.0	H	200.0	8.9	54.00	10.56
17711.000000	53.47	---	150.0	H	200.0	8.9	74.00	20.53

18GHz-25GHz:


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in Z-axis of orientation was recorded)

Horizontal

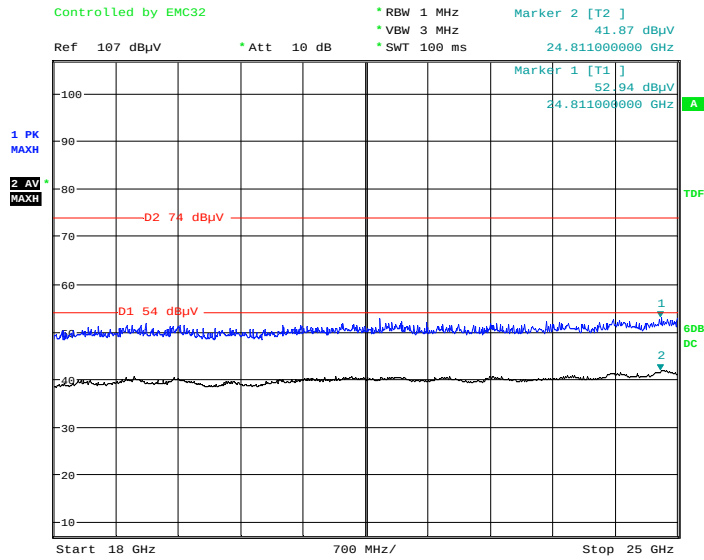

Date: 19.MAR.2021 16:28:51

Vertical

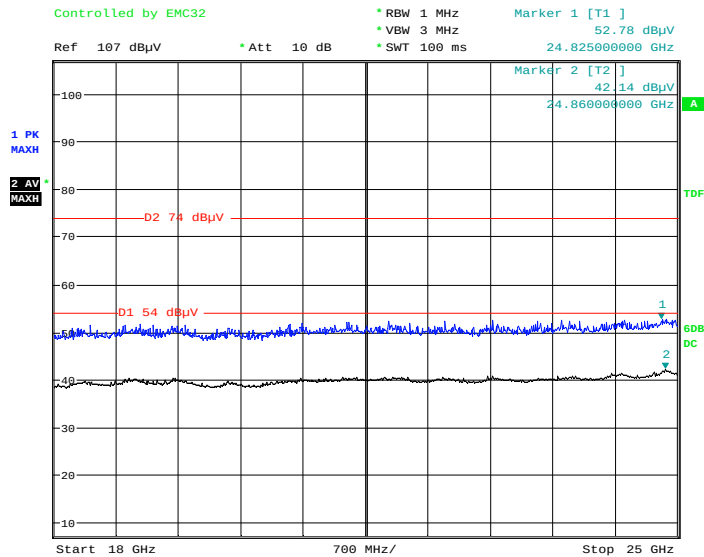

Date: 19.MAR.2021 16:28:02

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

1. The test is performed with a 10dB Attenuator.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

BLE (1Mbps)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	48.82	---	200.0	V	358.0	-2.9	74.00	25.18
2390.00	---	43.35	200.0	V	358.0	-2.9	54.00	10.65
High Channel: 2480MHz								
2483.50	45.18	---	150.0	V	305.0	-2.5	74.00	28.82
2483.50	---	42.31	150.0	V	305.0	-2.5	54.00	11.69

BLE (2Mbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	44.34	---	150.0	V	118.0	-2.9	74.00	29.66
2390.00	---	41.82	150.0	V	118.0	-2.9	54.00	12.18
High Channel: 2480MHz								
2483.50	46.49	---	150.0	V	10.0	-2.4	74.00	27.51
2483.50	---	43.45	150.0	V	10.0	-2.4	54.00	10.55

Transmitting simultaneously test:**30MHz-1GHz**

(The worst case 900MHz LORA, 2.4G SRD and BLE mode transmitting simultaneously in Z-axis of orientation was recorded)

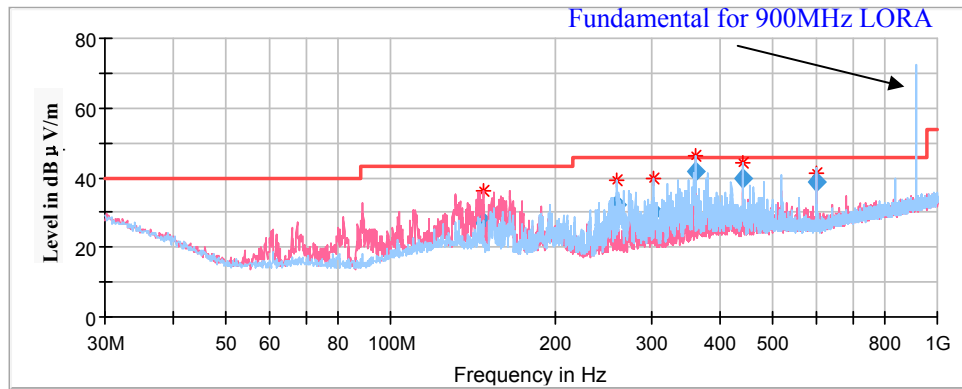


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
146.857000	27.43	101.0	V	49.0	-11.4	43.50	16.07
259.113800	32.20	100.0	H	40.0	-12.2	46.00	13.80
302.562600	30.41	100.0	H	46.0	-10.4	46.00	15.59
359.995050	41.71	100.0	H	197.0	-9.0	46.00	4.29
439.994250	39.89	100.0	H	227.0	-7.0	46.00	6.11
600.003450	38.70	199.0	H	231.0	-5.0	46.00	7.30

1GHz-18GHz:

(The worst case 900MHz LORA, 2.4G SRD and BLE mode transmitting simultaneously in Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

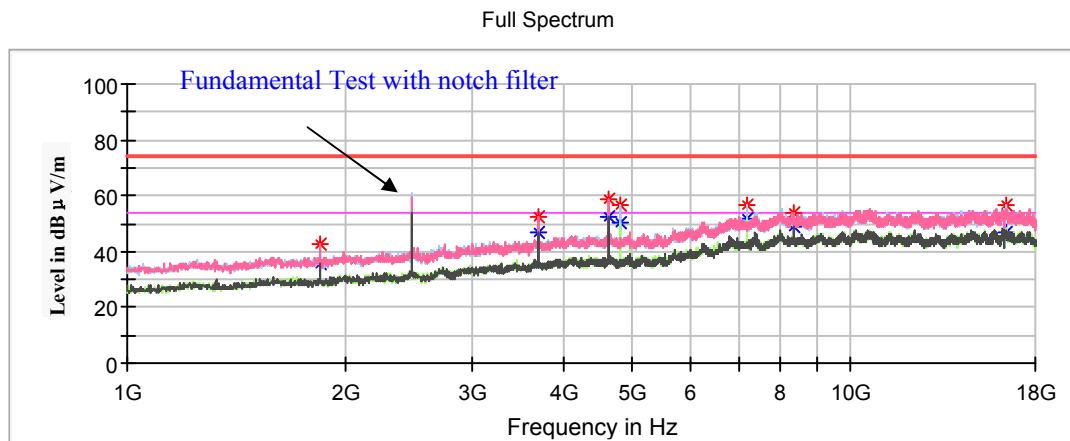


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1848.300000	---	35.33	150.0	V	191.0	-8.2	54.00	18.67
1848.300000	42.55	---	150.0	V	191.0	-8.2	74.00	31.45
3699.600000	---	47.16	150.0	V	328.0	-0.9	54.00	6.84
3699.600000	52.70	---	150.0	V	328.0	-0.9	74.00	21.30
4624.400000	---	52.33	150.0	V	313.0	1.0	54.00	1.67
4624.400000	58.49	---	150.0	V	313.0	1.0	74.00	15.51
4802.900000	---	50.30	200.0	H	15.0	1.0	54.00	3.70
4802.900000	56.98	---	200.0	H	15.0	1.0	74.00	17.02
7205.000000	---	51.83	150.0	H	93.0	9.0	54.00	2.17
7205.000000	56.84	---	150.0	H	93.0	9.0	74.00	17.16
8325.300000	---	49.21	200.0	V	264.0	10.8	54.00	4.79
8327.000000	54.19	---	200.0	V	264.0	10.8	74.00	19.81
16408.800000	---	47.06	200.0	H	176.0	12.0	54.00	6.94
16408.800000	56.69	---	200.0	H	176.0	12.0	74.00	17.31

18GHz-25GHz:


(The worst case 900MHz LORA, 2.4G SRD and BLE mode transmitting simultaneously in Z-axis of orientation was recorded)

Horizontal


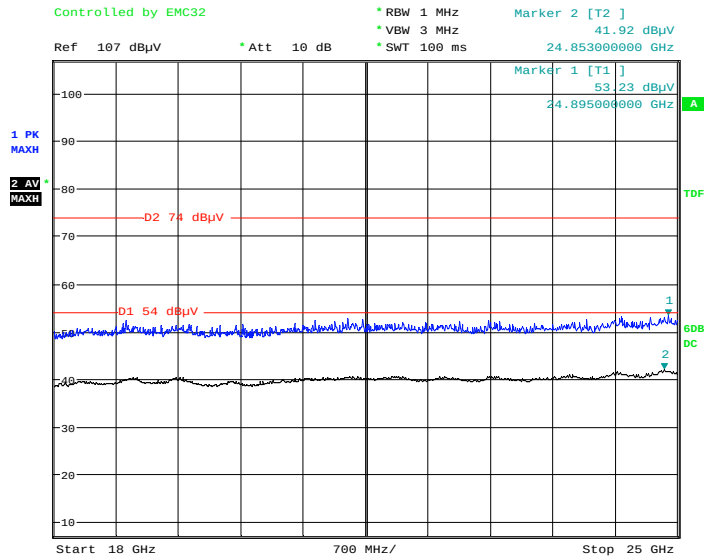


Date: 19.MAR.2021 16:17:16


Vertical

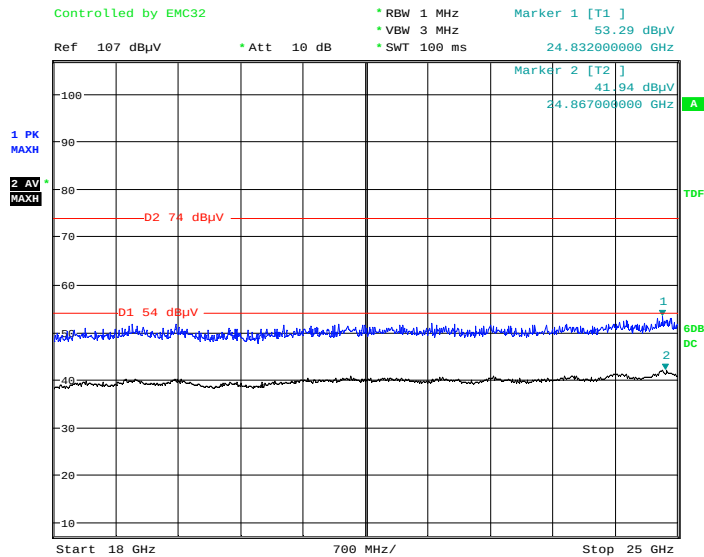

Date: 19.MAR.2021 16:15:45

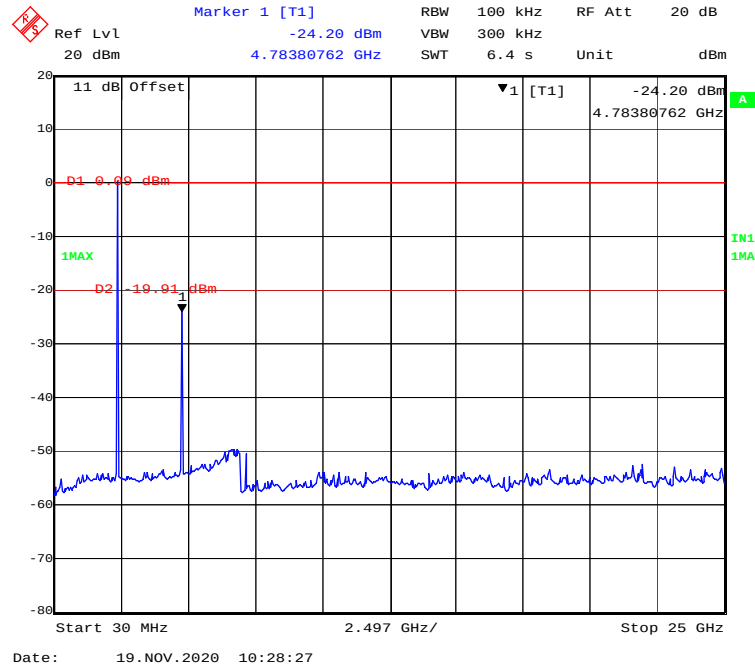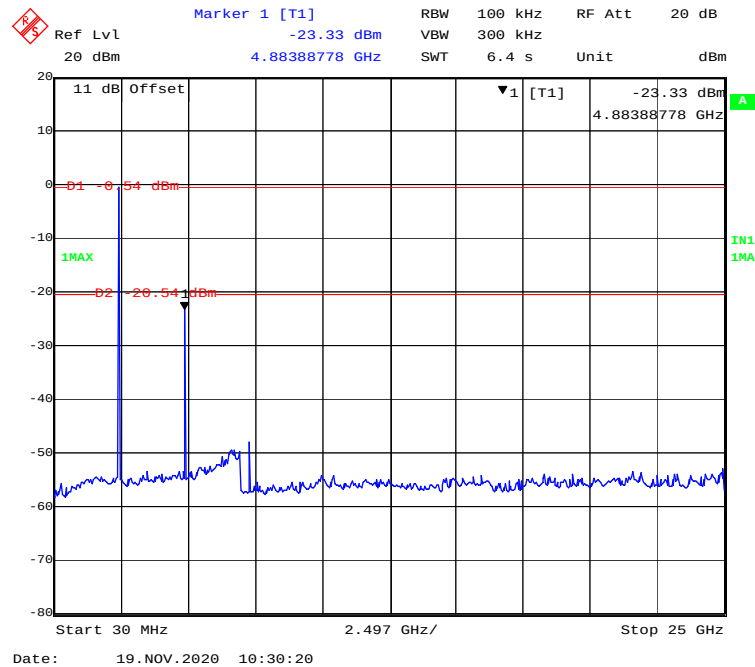
Conducted Spurious Emissions at Antenna Port:**BLE (1Mbps)****Low Channel****Middle Channel**

High Channel

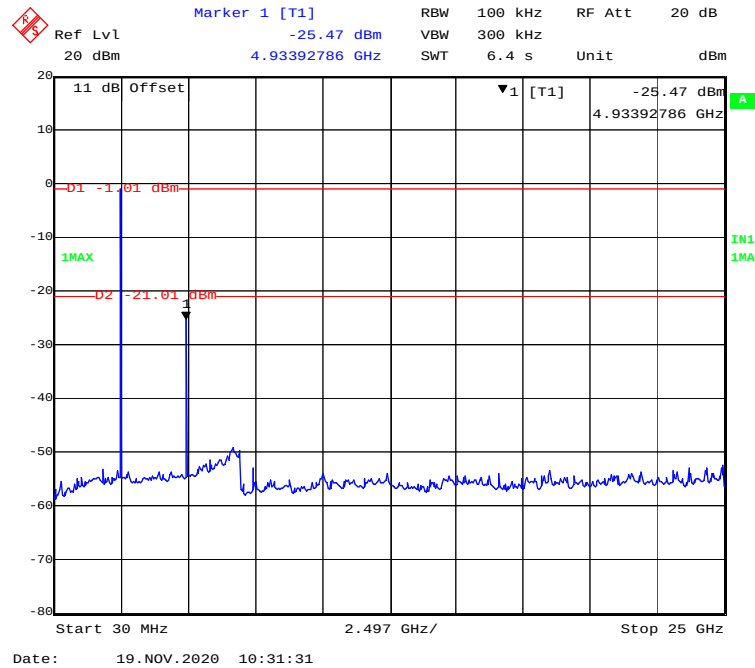


BLE (2Mbps)


Low Channel

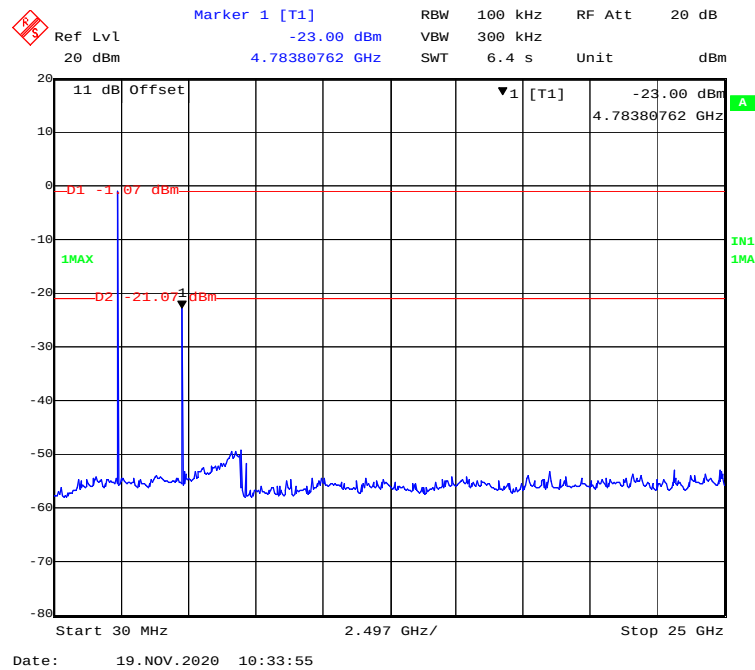

Middle Channel

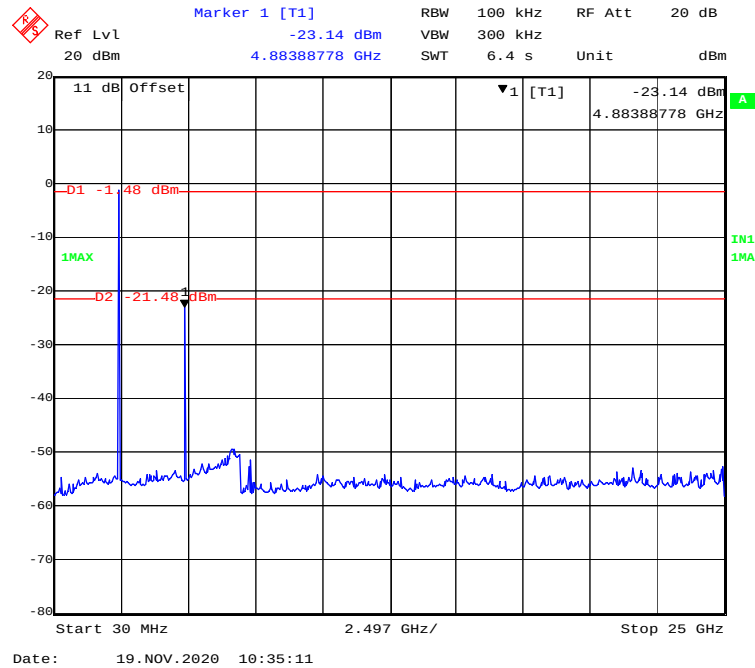

High Channel

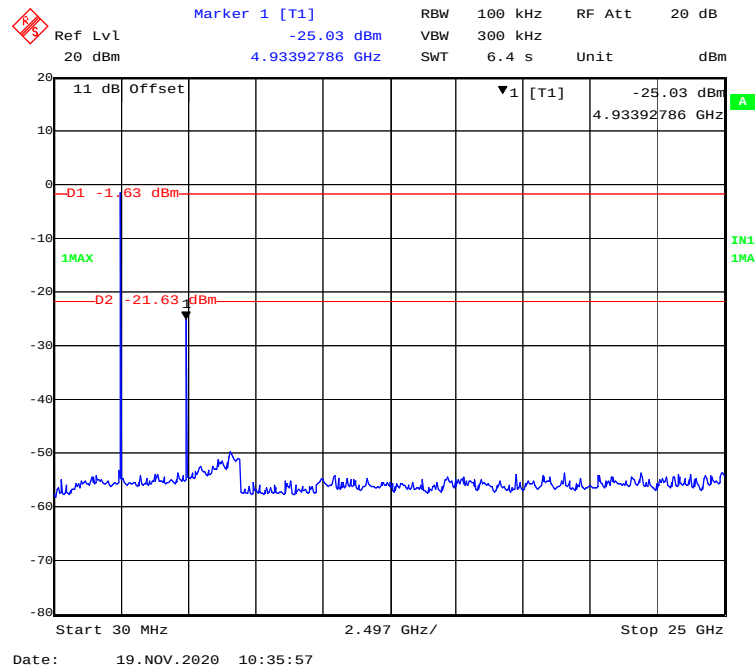

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	48 %
ATM Pressure:	101.2kPa


The testing was performed by Tyrone Wang on 2020-11-19.

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (1Mbps)


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.739	≥ 0.5
Middle	2440	0.739	≥ 0.5
High	2480	0.763	≥ 0.5

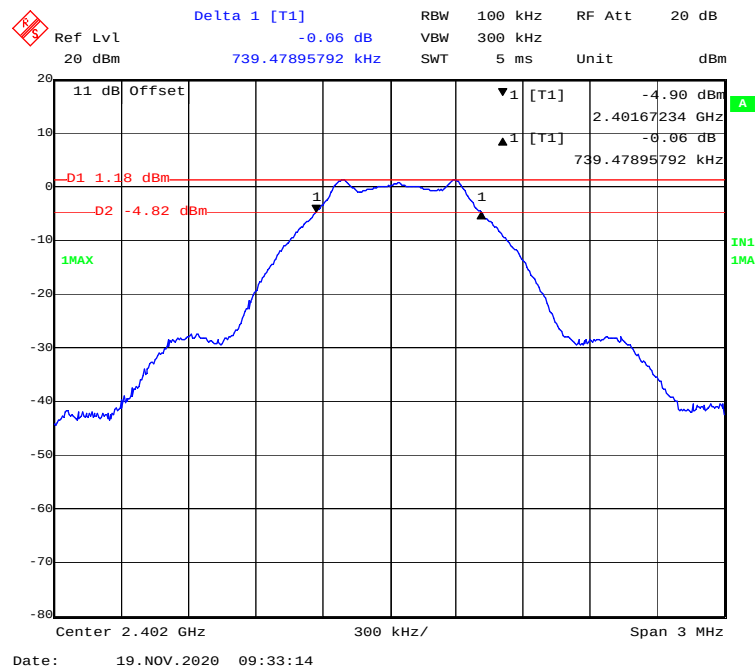Low Channel

Middle Channel

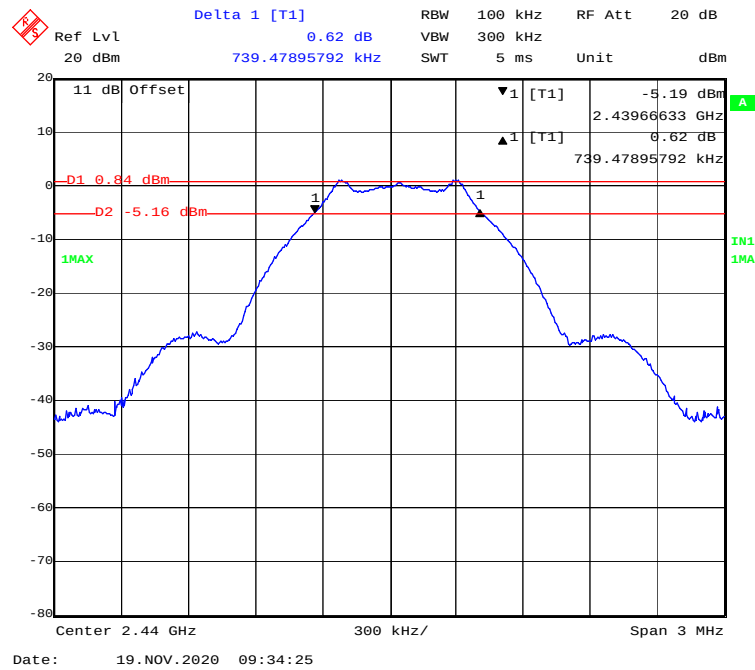


High Channel

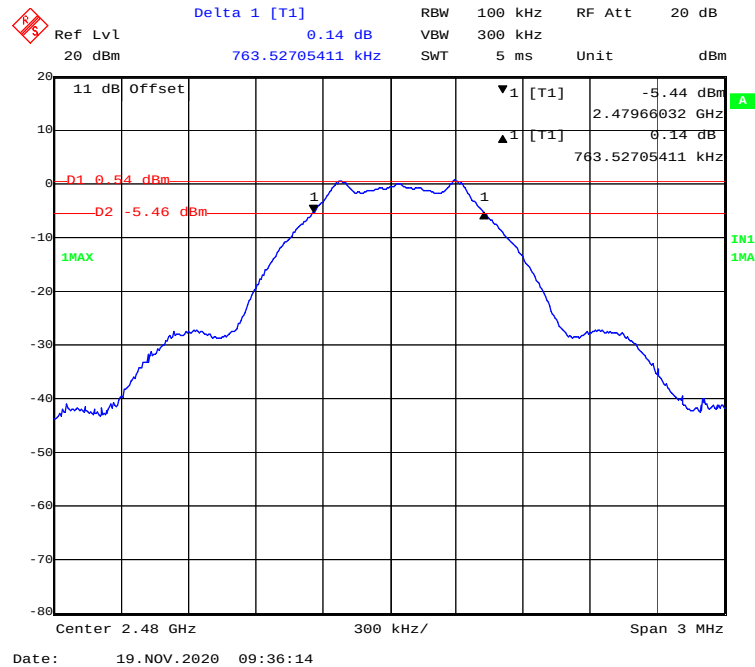


BLE (2Mbps)


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	1.403	≥ 0.5
Middle	2440	1.373	≥ 0.5
High	2480	1.433	≥ 0.5

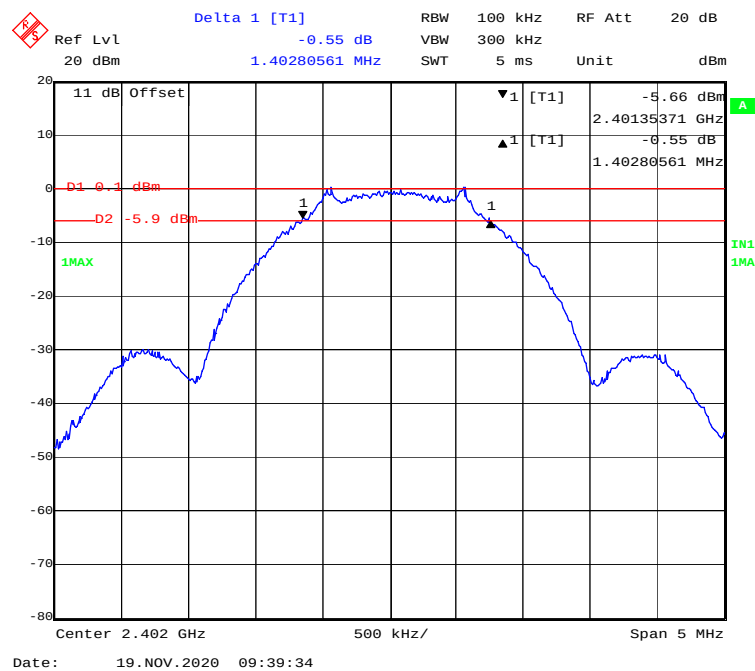Low Channel

Middle Channel

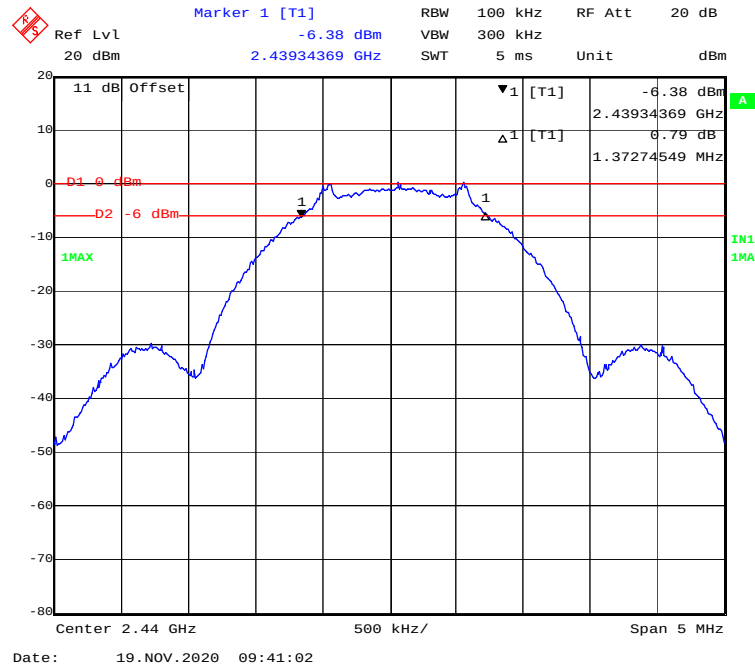

High Channel

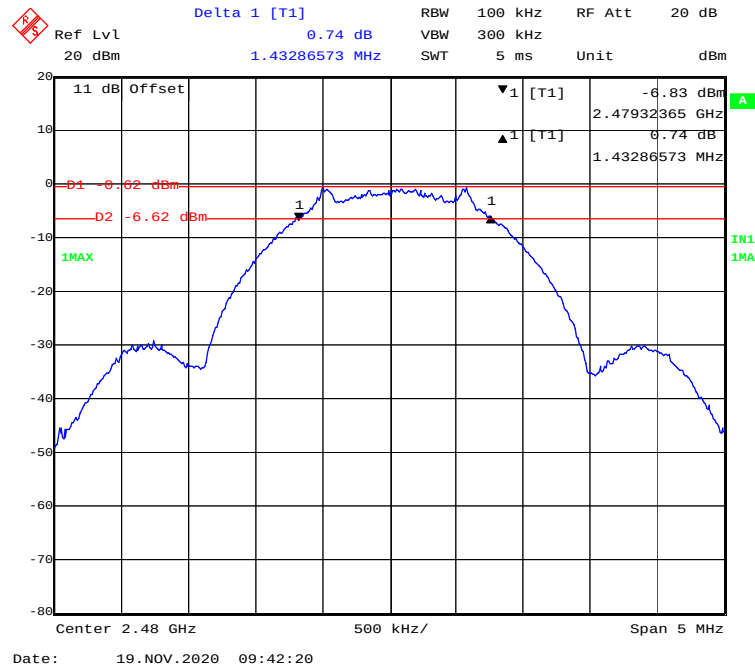

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	48 %
ATM Pressure:	101.2kPa


The testing was performed by Tyrone Wang on 2020-11-19.

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (1Mbps)


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	1.53	30	Pass
Middle	2440	1.26	30	Pass
High	2480	0.85	30	Pass

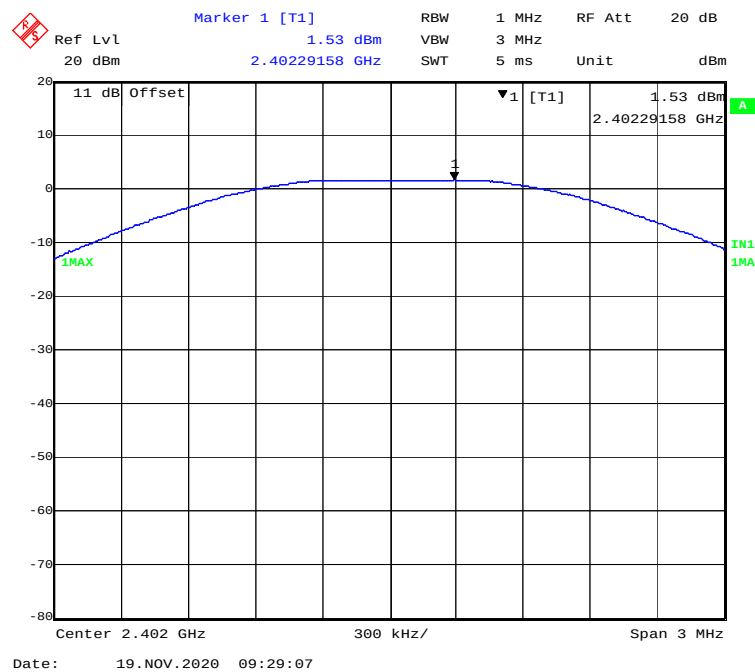Low Channel

Middle Channel

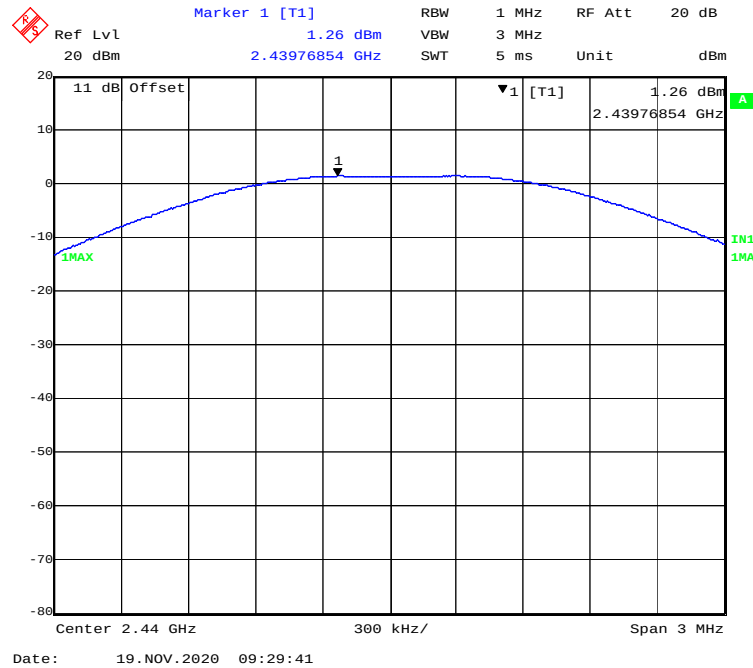


High Channel

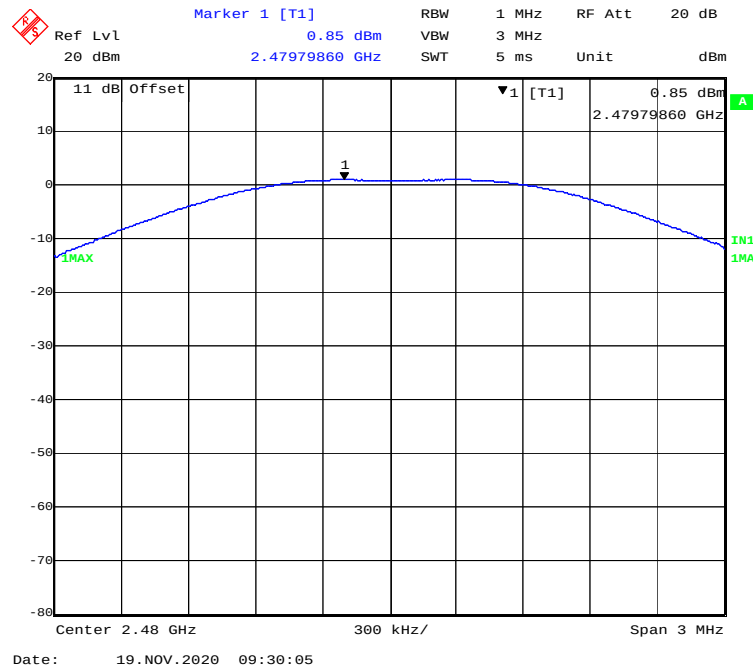


BLE (2Mbps)

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	1.28	30	Pass
Middle	2440	1.15	30	Pass
High	2480	0.74	30	Pass


Low Channel

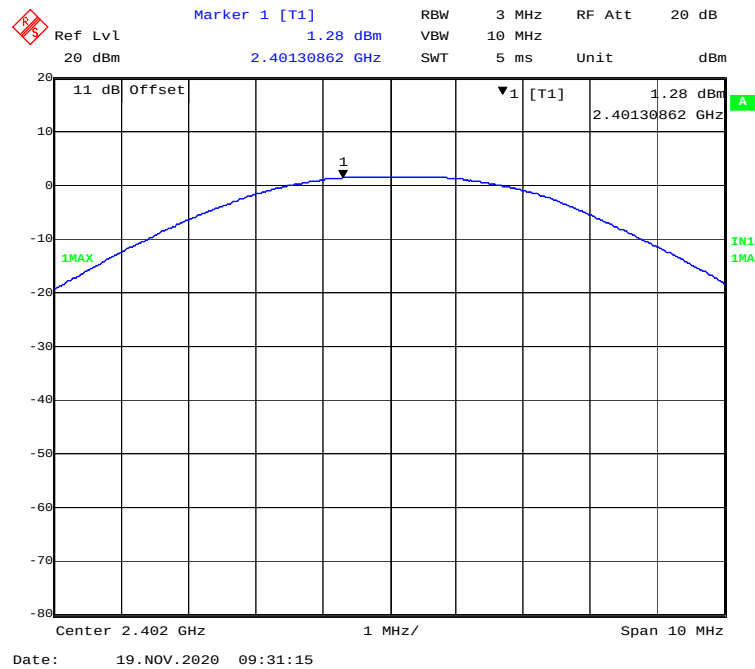

Middle Channel

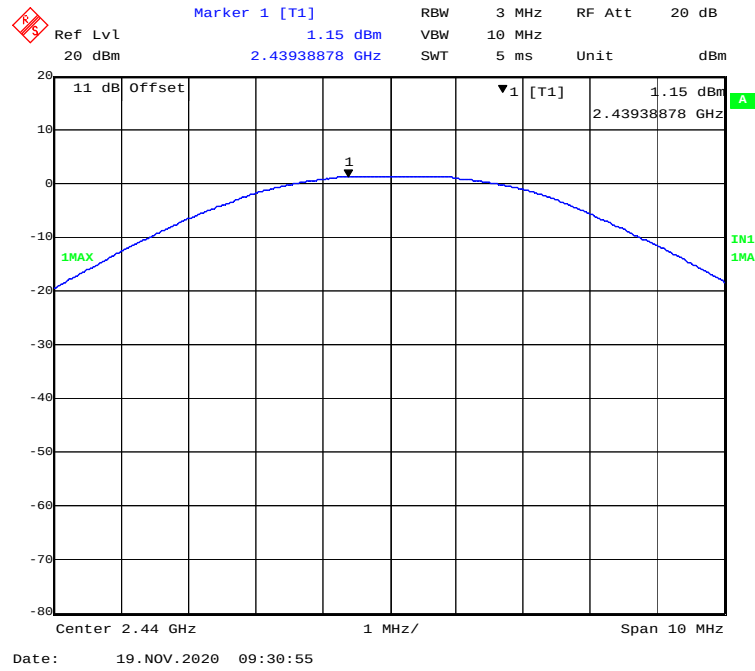

High Channel

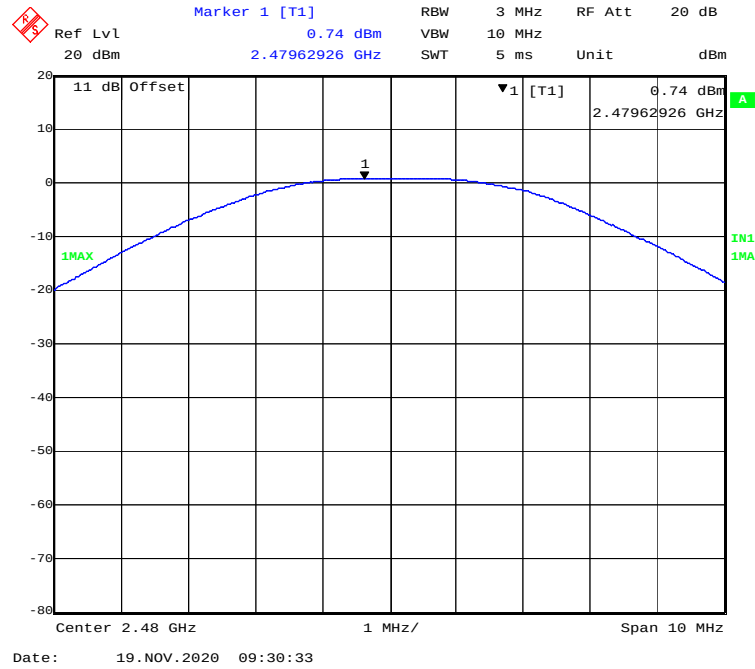

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	48 %
ATM Pressure:	101.2kPa


The testing was performed by Tyrone Wang on 2020-11-19.

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (1Mbps)

Left Side

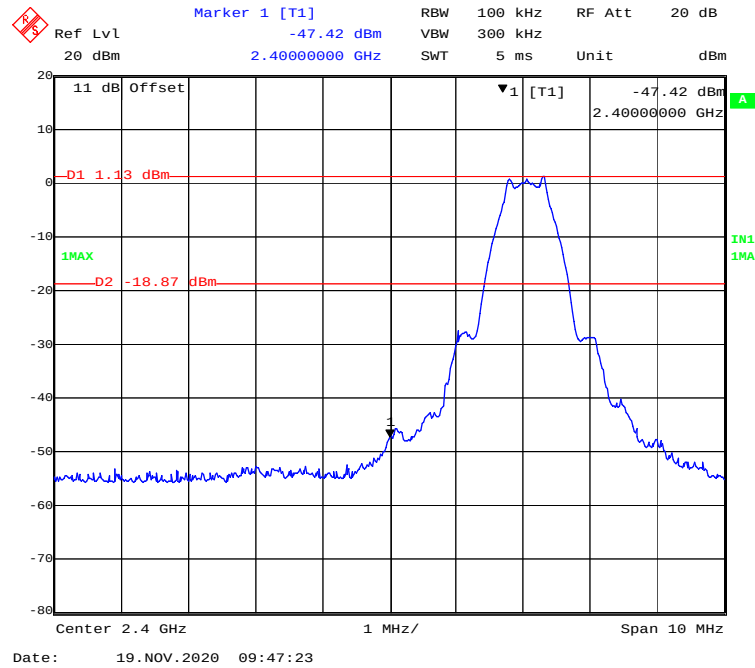


Right Side

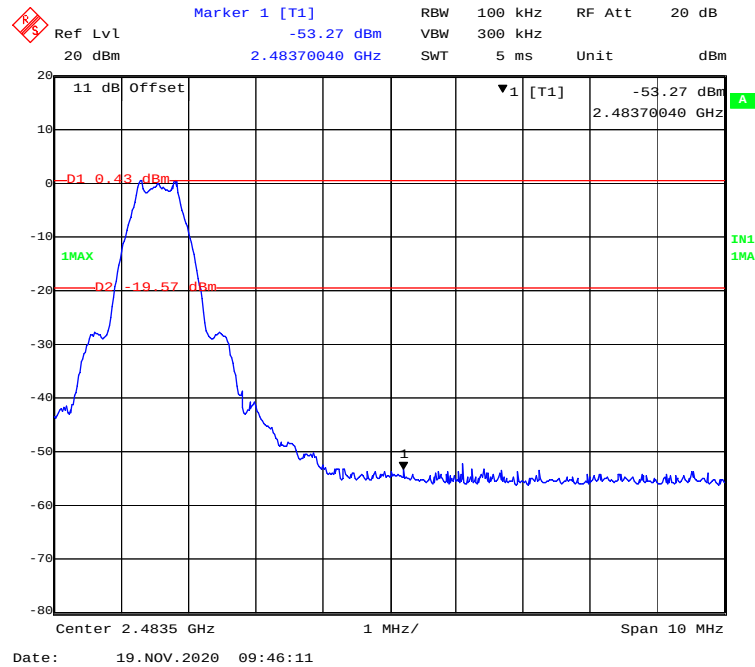


BLE (2Mbps)

Left Side

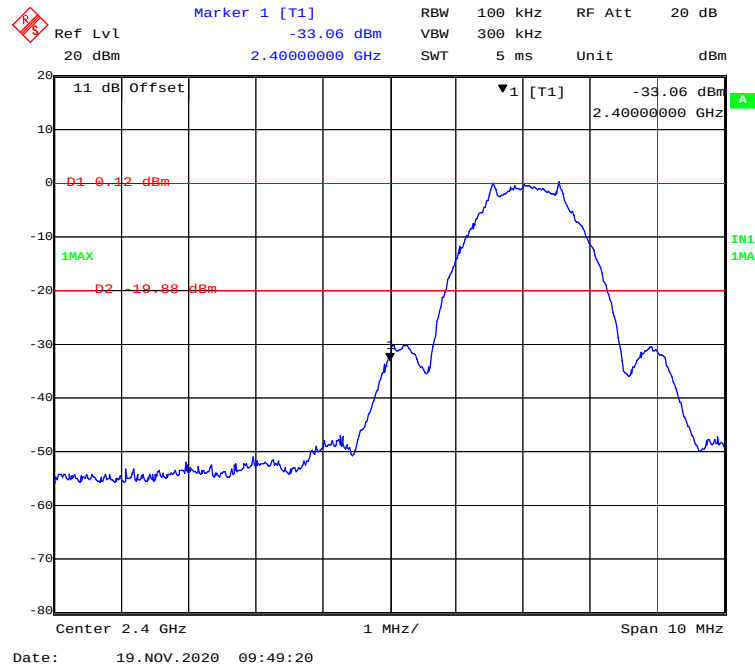

Right Side

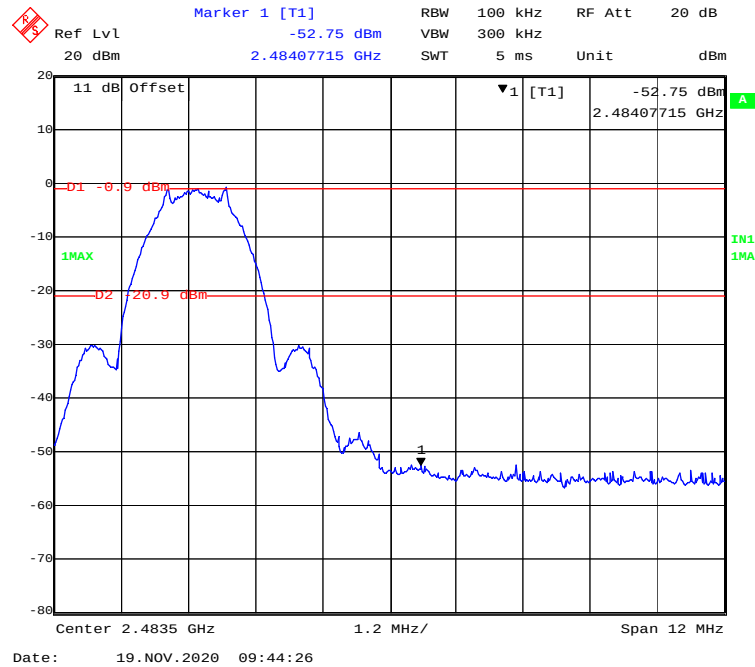

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.8°C~25.2 °C
Relative Humidity:	46%~48 %
ATM Pressure:	101.0kPa~101.2kPa


The testing was performed by Tyrone Wang from 2020-11-19 to 2021-04-12 .

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (1Mbps)


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-7.61	≤ 8
Middle	2440	-8.14	≤ 8
High	2480	-8.62	≤ 8

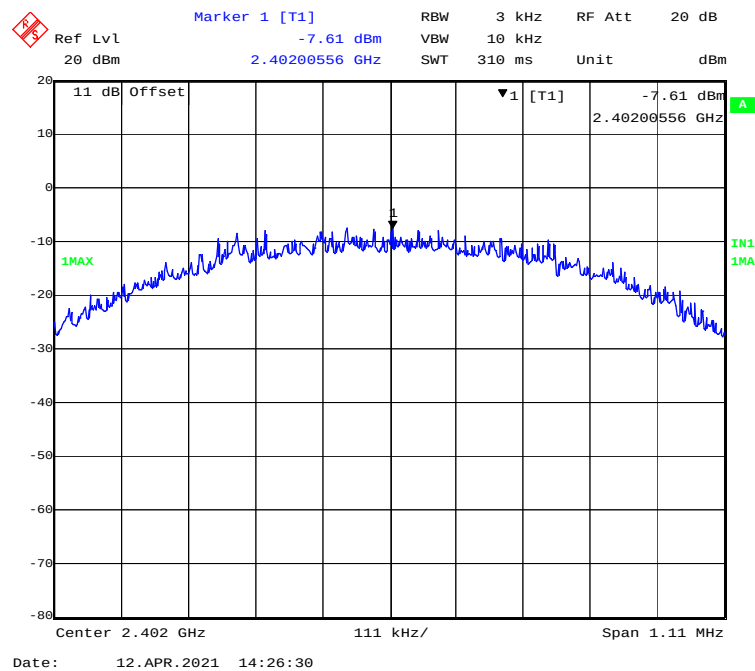Low Channel

Middle Channel

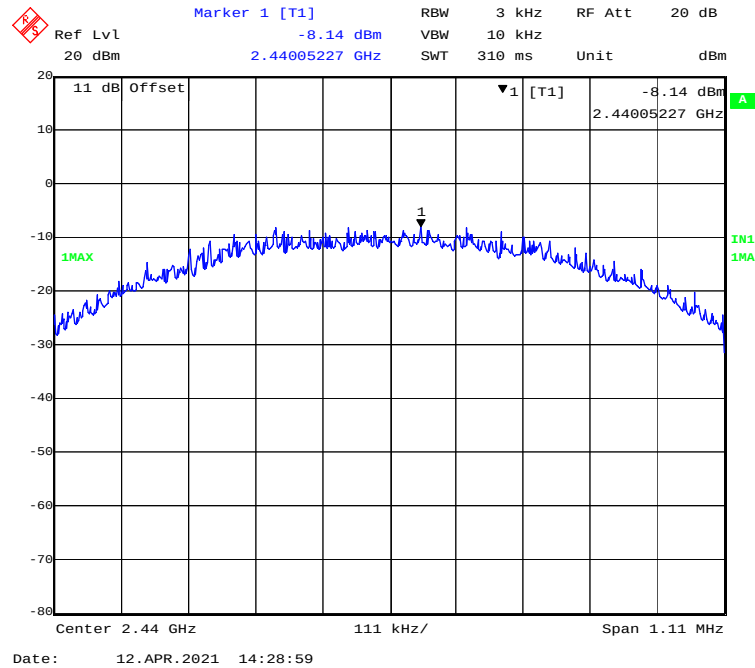


High Channel

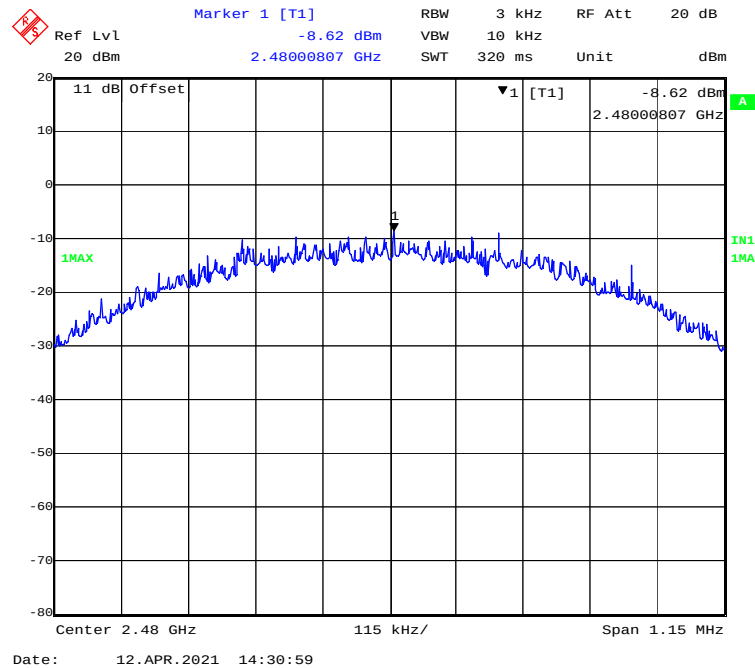


BLE (2Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-13.73	≤8
Middle	2440	-14.29	≤8
High	2480	-14.18	≤8


Low Channel

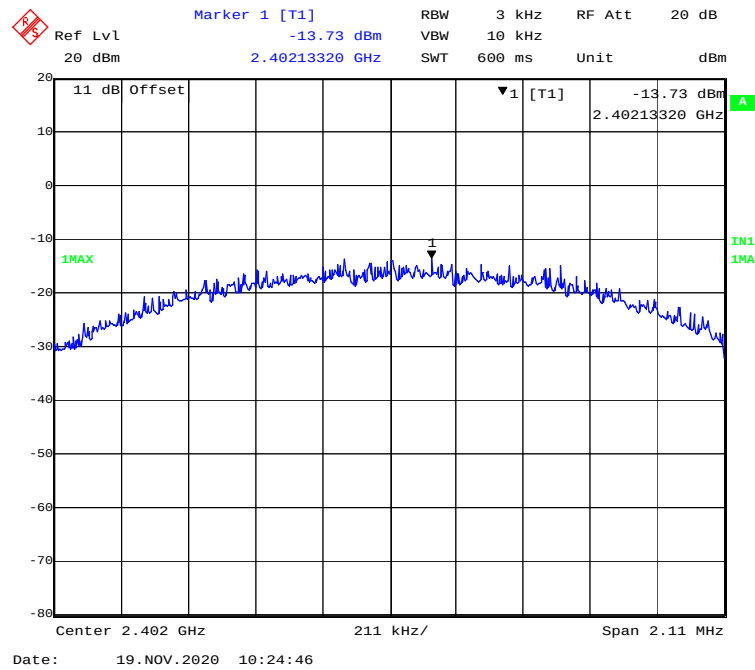

Middle Channel

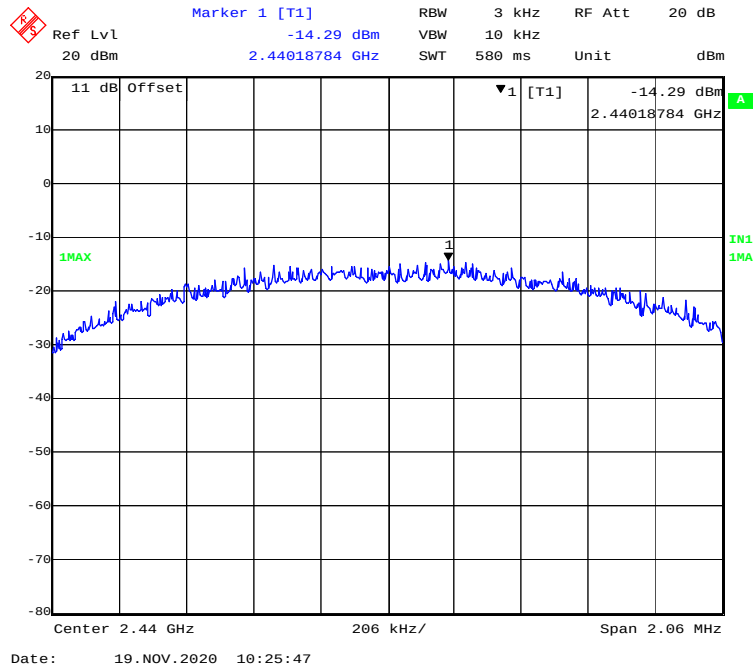

High Channel

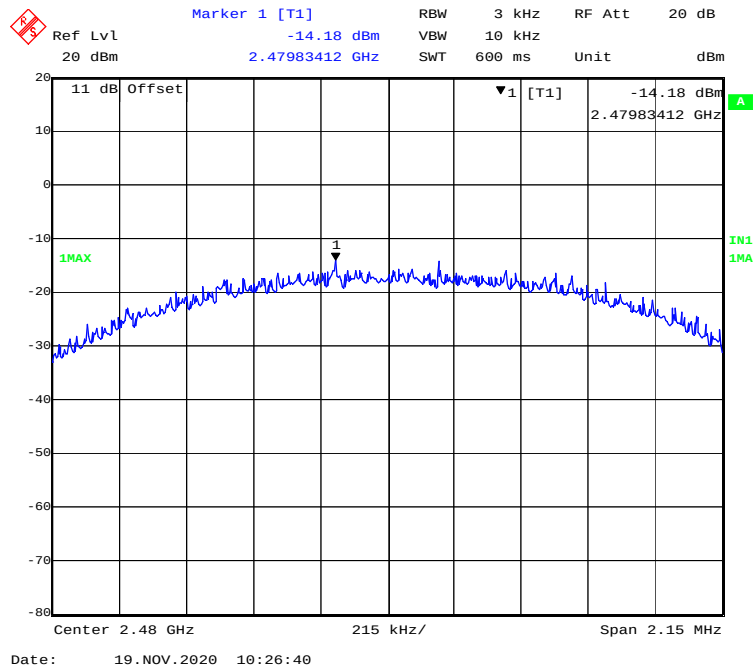

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******