

# **FCC Test Report**

#### FOR:

Model Name: WC0G1M01 Wellcore Activity Monitor

FCC ID: XYG-1

47 CFR Part 15.247 for DSSS Systems

TEST REPORT #: EMC\_WELLC\_001\_15.247Zig\_XYG-1 DATE: 2010-06-14







(BQTF)



FCC listed
A2LA Accredited

IC recognized # 3462B

#### CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Date of Report : 2010-06-14 Page 2 of 49



# TABLE OF CONTENTS

1	Asse	essment	4
2	Adn	ninistrative Data	5
	2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
	2.2	Identification of the Client	
	2.3	Identification of the Manufacturer	
3			
J	_	sipment under Test (EUT)	
	3.1	Specification of the Equipment under Test	
	3.2	Identification of the Equipment Under Test (EUT)	
4	Subj	ject Of Investigation	7
5	Mea	asurements	8
	5.1	Radiated Measurement Procedure	8
	5.2	Conducted Measurement Procedure	10
	5.3	Maximum Peak Output Power §15.247 (b)(3)	11
	5.3.1		
	5.3.2 5.3.3		
	5.4	Restricted Band Edge Compliance	18
	5.4.1	Limits: §15.247/15.205	18
	5.4.2	1	
	5.5	Spectrum Bandwidth/ 20dB Bandwidth § 15.247 (a)(2)	<b>23</b>
	5.5.1 5.5.2		23
	5.5.3	Test Data/plots:	24
	5.6	Power Spectral Density	27
	5.6.1	Limits: § 15.247 (e)	27
	5.6.2 5.6.3		27 28
		1	
	<b>5.7</b> 5.7.1	Transmitter Spurious Emissions- Conducted § 15.247 (c) Limits: § 15.247 (d)	
	5.7.1	-	
	5.7.3		
	5.7.4		
	<b>5.8</b>	Transmitter Spurious Emissions- Radiated	35
	5.8.1		35
	5.8.2 5.8.3	9	35 36
	5.8.3 5.8.4	• —————————————————————————————————————	
	5.8.5	Test data/ plots:	37
	5.9	Receiver Spurious Emissions- Radiated	42
	5.9.1		

Test Report #: EMC\_WELLC\_001\_15.247Zig\_XYG-1 **CETECOM** Page 3 of 49 Date of Report: 2010-06-14 5.9.2 Test Conditions: 5.9.3 Test Result: 42 \_43 5.9.4 Test data/ plots: 5.10 AC Power Line Conducted Emissions 45 Limits: §15.107/15.207 \_\_\_\_\_ 5.10.1 45 5.10.2 Test Result: \_\_45 Test Equipment and Ancillaries used for tests\_\_\_\_\_ 6 46 BLOCK DIAGRAMS \_\_\_\_\_\_47 7

Revision History \_\_\_\_\_

49

8

Test Report #:

EMC\_WELLC\_001\_15.247Zig\_XYG-1

Date of Report:

2010-06-14

Page 4 of 49



#### 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations.

Company	Description	Model #
Wellcore Corporation	Accelerometer based motion detector	WC0G1M01

#### **Responsible for Testing Laboratory:**

Heiko Strehlow

2010-06-14	Compliance	(Director)	
Date	Section	Name	Signature

### **Responsible for the Report:**

Marc Douat

2010-06-14	Compliance	(Test Lab Manager)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

Date of Report: 2010-06-14 Page 5 of 49



# 2 Administrative Data

# 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.	
Department:	Compliance	
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.	
Telephone:	+1 (408) 586 6200	
Fax:	+1 (408) 586 6299	
<b>Responsible Test Lab Manager:</b>	Heiko Strehlow	
Responsible Project Leader:	Marc Douat	

#### 2.2 Identification of the Client

Applicant's Name:	Wellcore Corporation
Street Address:	2870 Zanker Road Suite 130
City/Zip Code	San Jose, CA 95134
Country	USA
<b>Contact Person:</b>	Van Krueger
Phone No.	+1 408 216 8362
e-mail:	van@wellcore.com

### 2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as above
Manufacturers Address:	
City/Zip Code	
Country	

Date of Report: 2010-06-14 Page 6 of 49



# 3 Equipment under Test (EUT)

# 3.1 Specification of the Equipment under Test

Marketing Name:	Wellcore Activity Monitor	
Model No:	WC0G1M01	
<b>Product Type:</b>	Accelerometer based motion detector	
Hardware Revision :	Ver. 3	
<b>Software Revision:</b>	Version 31	
FCC-ID:	XYG-1	
Frequency:	ISM Band 2400-2483.5 MHz	
Type(s) of Modulation:	OQPSK	
Number of channels:	16	
Antenna Type:	Integral	
Equipment Classification:	□Fixed □Vehicular ■Portable □Module	
Power Supply:	3.5 to 4.2 VDC battery	

# 3.2 Identification of the Equipment Under Test (EUT)

EUT#	Model	HW Version	SW Version
1	WC0G1M01	Ver. 3	Version 31

Date of Report: 2010-06-14 Page 7 of 49



### 4 Subject Of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 7.

This test report is to support a request for new equipment authorization under the FCC ID **XYG-1** All testing was performed on the product referred to in Section 3 as EUT. This test report contains conducted and radiated testing results as per FCC15.247.

During the testing process the EUT was tested on low, mid and high channels. For radiated measurements, all data in this report shows the worst case between horizontal and vertical polarization measurements.

Date of Report: 2010-06-14 Page 8 of 49



### 5 Measurements

#### 5.1 Radiated Measurement Procedure

#### ANSI C63.4 Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

Date of Report : 2010-06-14 Page 9 of 49



#### ANSI C63.4 Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the "cone of radiation" from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT's size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.


#### **NOTES**

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Date of Report: 2010-06-14 Page 10 of 49



### **5.2** Conducted Measurement Procedure



- 1. Connect the equipment as shown in the above diagram.
- 2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
- 3. Measurements are to be performed with the EUT set to the low, middle and high channels.

Date of Report: 2010-06-14 Page 11 of 49



# 5.3 Maximum Peak Output Power §15.247 (b)(3)

# 5.3.1 Limits: §15.247 (b)(1)

Nominal Peak Output Power < 30 dBm (1W)

EIRP < 36dBm

### **5.3.2** Test Conditions:

Tnom: 21°C; RBW: 5 MHz VBW: 10 MHz

### 5.3.3 Test Result:

Max Peak Output Power- EIRP (dBm)				
	Frequency (MHz)			
Mode	2405	2440	2480	
802.15.4	5.76	5.44	5.28	
Measurement Uncertainty: ±3dB				


Max Peak Output Power- Conducted (dBm)				
		Frequency (MHz)		
Mode	2405	2440	2480	
802.15.4	4.02	4.02	4.17	
Measurement Uncertainty: ±0.5dB				

Date of Report: 2010-06-14 Page 12 of 49



# Test Data/plots:

### **Conducted Peak Power 2405 MHz**

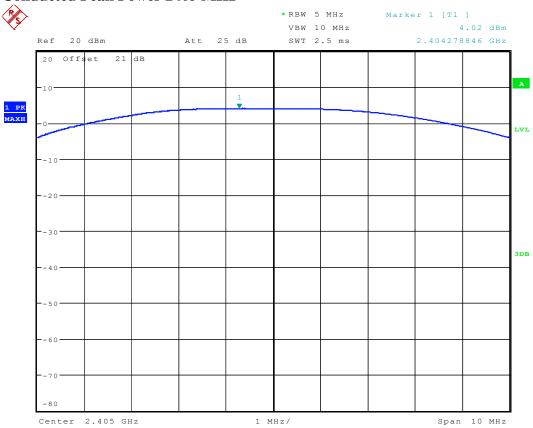


Date: 23.APR.2010 09:03:54

Date of Report: 2010-06-14 Page 13 of 49



# **Conducted Peak Power 2440 MHz**

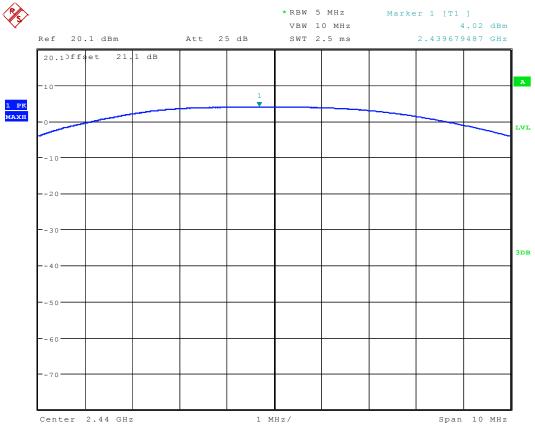


Date: 23.APR.2010 09:13:34

Date of Report: 2010-06-14 Page 14 of 49



#### **Conducted Peak Power 2480 MHz**

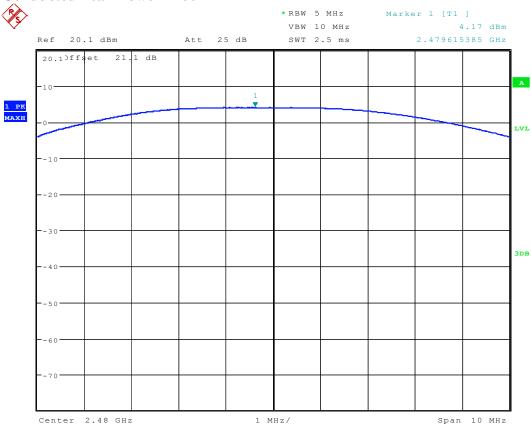


Date: 23.APR.2010 09:18:56

Date of Report : 2010-06-14 Page 15 of 49



#### **EIRP 2405 MHz**

EIRPBT L

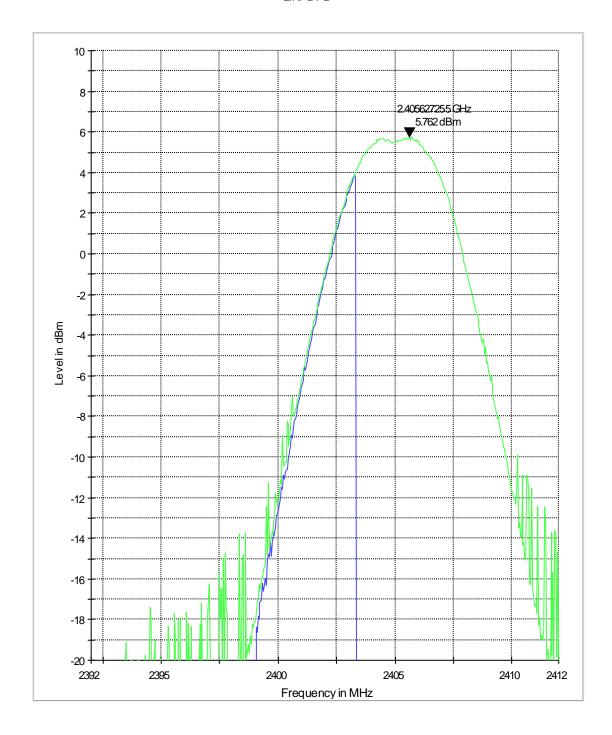


Date of Report : 2010-06-14 Page 16 of 49



# EIRP 2440 MHz

#### EIRPBT M

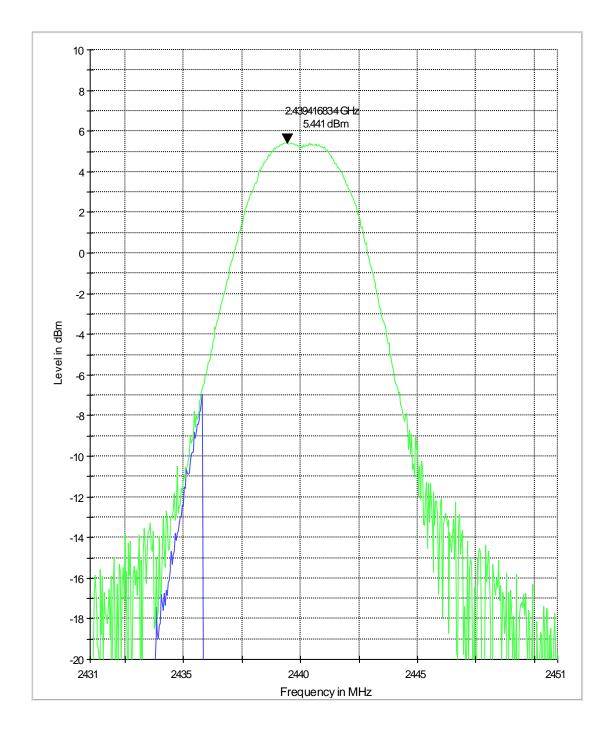


Date of Report : 2010-06-14 Page 17 of 49



### EIRP 2480 MHz

#### EIRPBT H

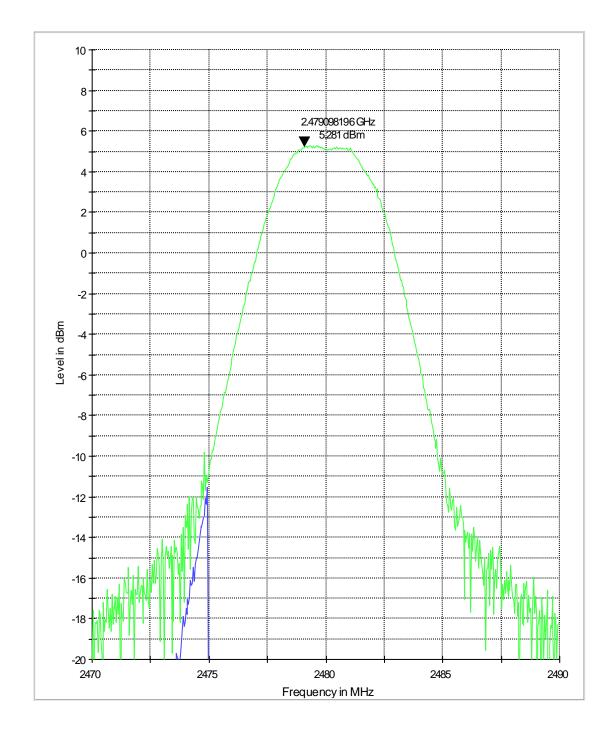

Date of Report: 2010-06-14 Page 18 of 49



### **5.4** Restricted Band Edge Compliance

#### 5.4.1 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

<sup>\*</sup>PEAK LIMIT=  $74dB\mu V/m$ 

<sup>\*</sup>AVG. LIMIT= 54dBµV/m


Date of Report : 2010-06-14 Page 19 of 49



# 5.4.2 Test Data/plots:

# Lower band edge peak

FCC 15.247 LBE Pk 3m

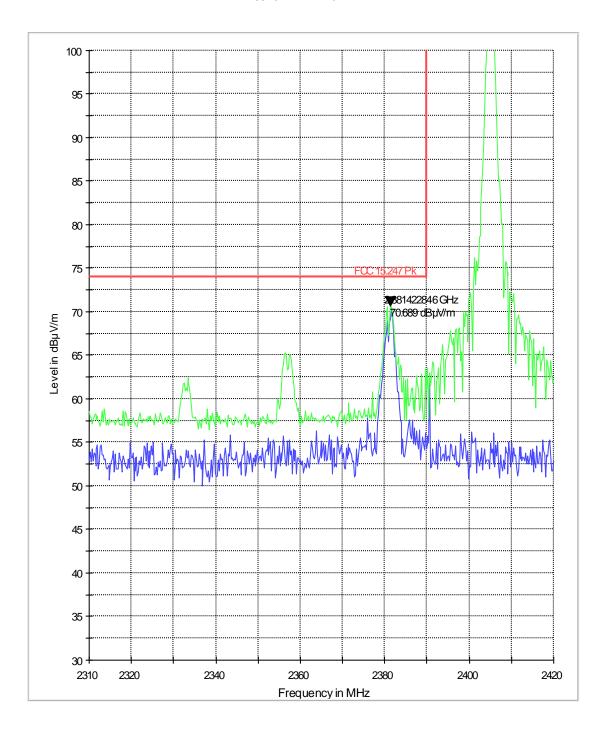


Date of Report : 2010-06-14 Page 20 of 49



# Lower band edge average

FCC 15.247 LBE Avg 3m

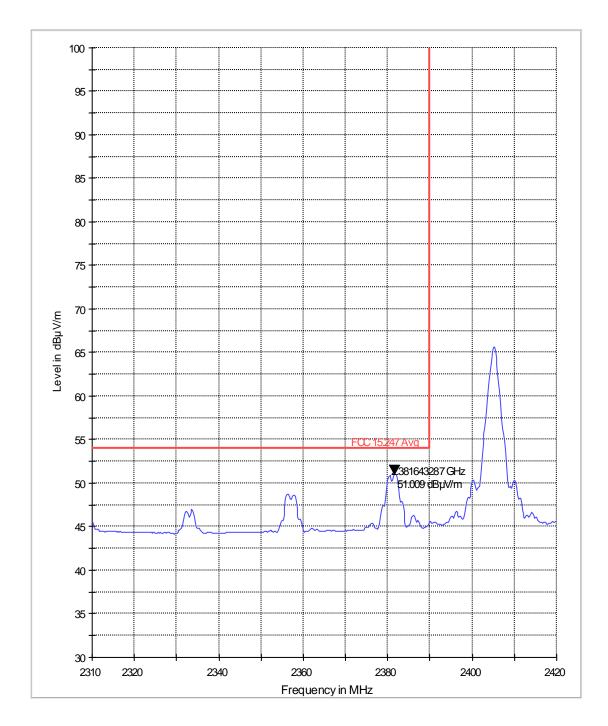


Date of Report : 2010-06-14 Page 21 of 49



# Higher band edge peak

FCC 15.247 HBE Pk 3m

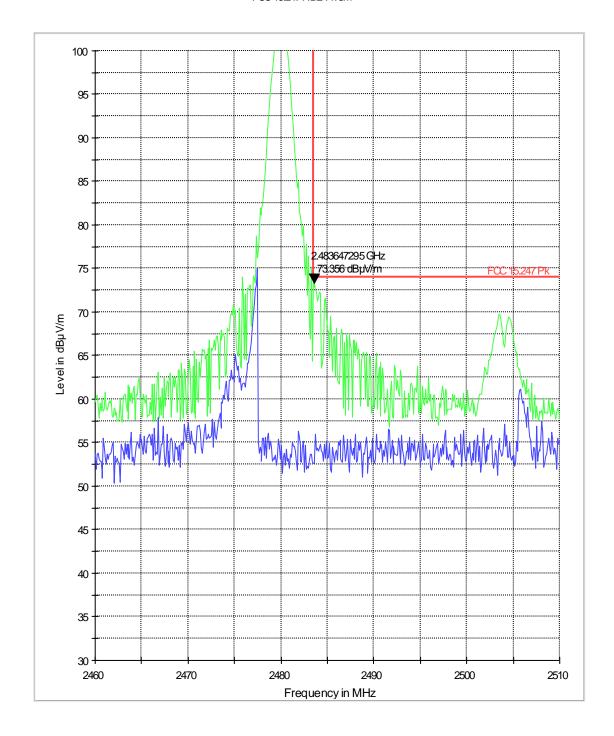


Date of Report : 2010-06-14 Page 22 of 49



# Higher band edge average

FCC 15.247 HBE Avg 3m

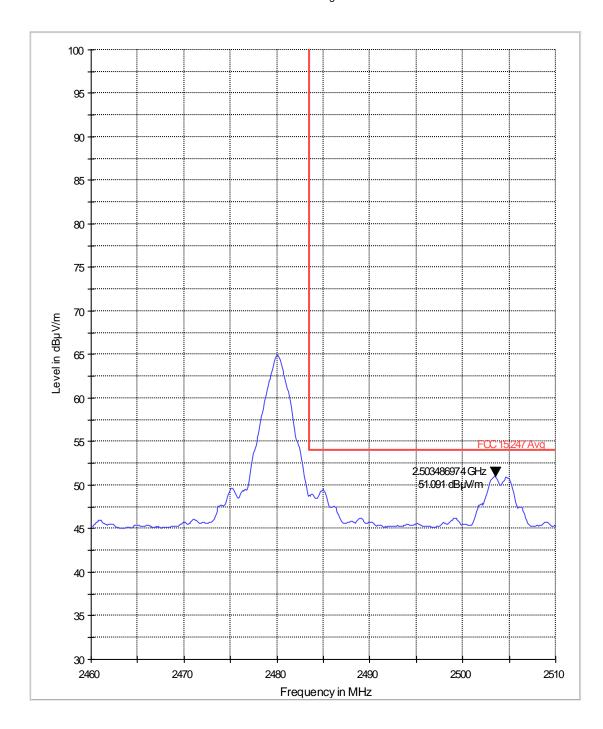

Date of Report: 2010-06-14 Page 23 of 49



# 5.5 Spectrum Bandwidth/ 20dB Bandwidth § 15.247 (a)(2)

**5.5.1** Limits: § **15.247** (a)(1) Spectrum Bandwidth > 500 kHz

### 5.5.2 Test Result:

Occupied Bandwidth (MHz)						
Mal	Frequency (MHz)					
Mode	2405		2440		2480	
	6dB	99%	6dB	99%	6dB	99%
802.15.4	1.218	2.788	1.474	2.853	1.346	2.821
Measurement Uncertainty: ±100 kHz						


RBW: 50 kHz VBW: 200 kHz

Date of Report: 2010-06-14 Page 24 of 49



# 5.5.3 Test Data/plots:

### Bandwidth 2405 MHz

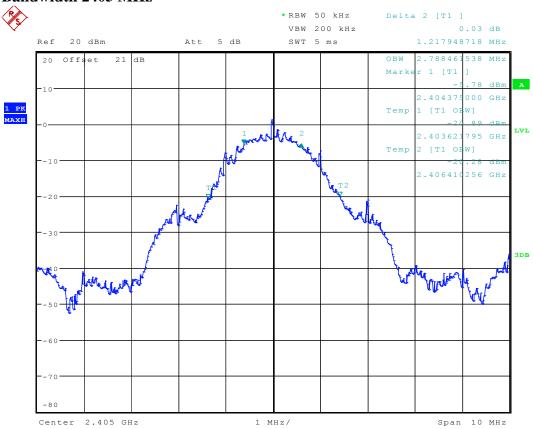


Date: 23.APR.2010 09:06:45

Date of Report: 2010-06-14 Page 25 of 49



### Bandwidth 2440 MHz

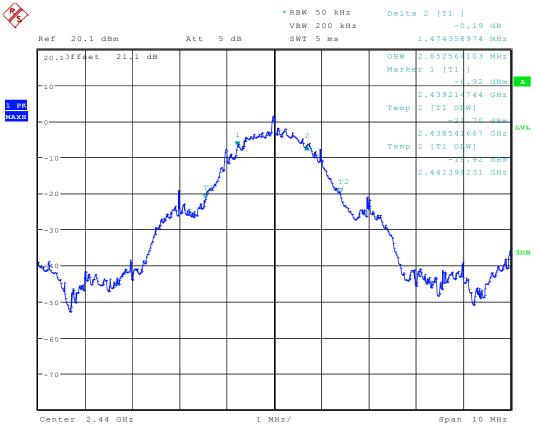


Date: 23.APR.2010 09:14:55

Date of Report: 2010-06-14 Page 26 of 49



### Bandwidth 2480 MHz

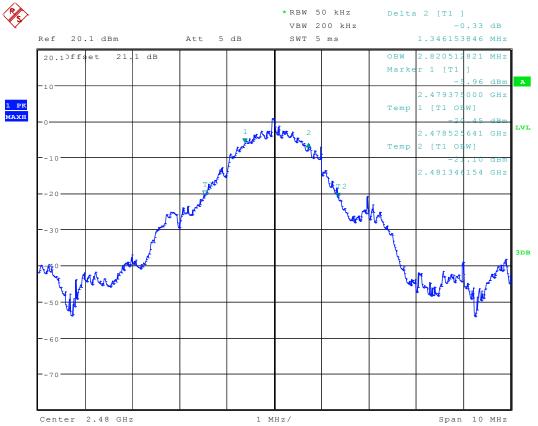

Date: 23.APR.2010 09:19:47

Date of Report: 2010-06-14 Page 27 of 49



# **5.6** Power Spectral Density

# 5.6.1 Limits: § 15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.6.2 Test results:


Power Spectral Density (dBm)				
Mada	Frequency (MHz)			
Mode	2405	2440	2480	
802.15.4	-9.86	-9.46	-9.26	
Measurement Uncertainty: ±0.5dB				

Date of Report: 2010-06-14 Page 28 of 49



# 5.6.3 Test Data/plots:

# **Power Spectral Density 2405 MHz**

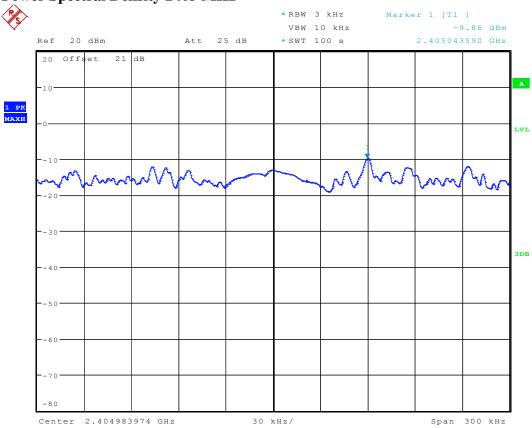


Date: 23.APR.2010 09:09:25

Date of Report: 2010-06-14 Page 29 of 49



# **Power Spectral Density 2440 MHz**

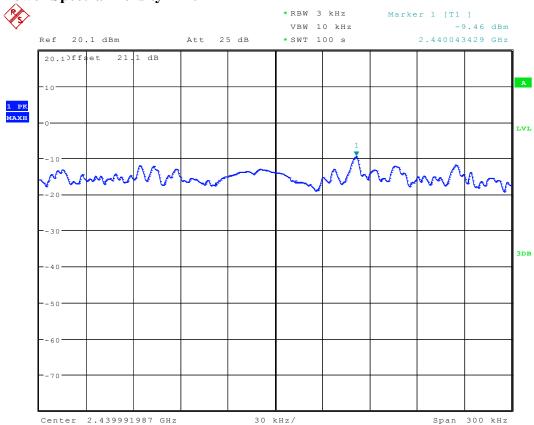


Date: 23.APR.2010 09:17:30

Date of Report: 2010-06-14 Page 30 of 49



# **Power Spectral Density 2480 MHz**

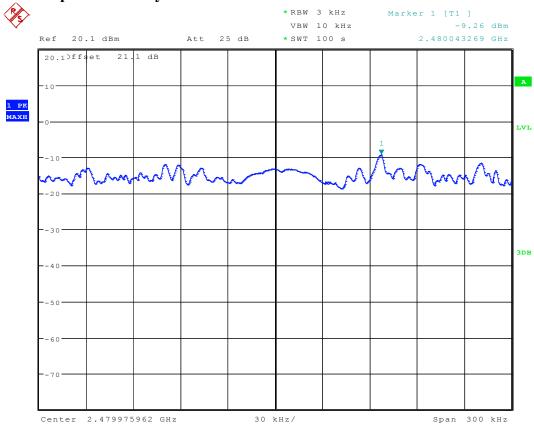

Date: 23.APR.2010 09:22:01

Date of Report: 2010-06-14 Page 31 of 49



# 5.7 Transmitter Spurious Emissions- Conducted § 15.247 (c)

# 5.7.1 Limits: § 15.247 (d)

30dBm for the transmitter.

-20dBc in the frequency range 30MHz- 25GHz.

### **5.7.2** Test Conditions:

RBW: 100 kHz VBW: 300 kHz

# 5.7.3 Test data/ plots:


Conducted Spurious Emissions			
Channel	Frequency (MHz) Amplitude (dBm)		Limits
Low	2412	-1.66	30dBm
	No critic	20.40	
		-20dBc	
Mid	<b>2437</b> -2.29		30 dBm
	No critic	-20dBc	
			-20dBC
High	2462	-0.94	30 dBm
	No critic	-20dBc	
			-20 <b>ub</b> c
Measurement Uncertainty: ±1 dB			

Date of Report: 2010-06-14 Page 32 of 49



# 5.7.4 Test data/ plots:

# **Conducted Spurious Emission 2405 MHz**

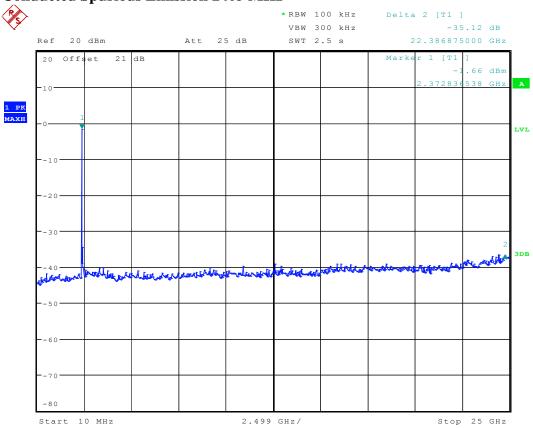


Date: 23.APR.2010 09:10:25

Date of Report: 2010-06-14 Page 33 of 49



# **Conducted Spurious Emission 2440 MHz**

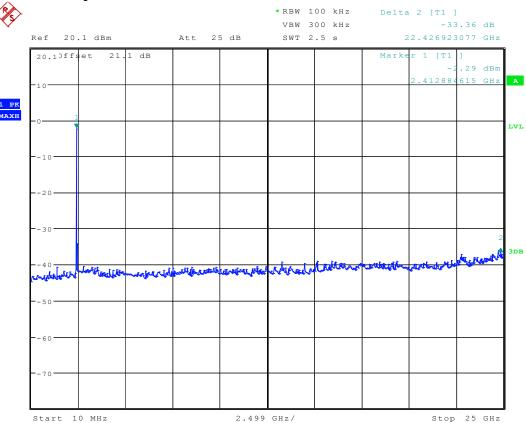


Date: 23.APR.2010 09:18:02

Date of Report: 2010-06-14 Page 34 of 49



# **Conducted Spurious Emission 2480 MHz**

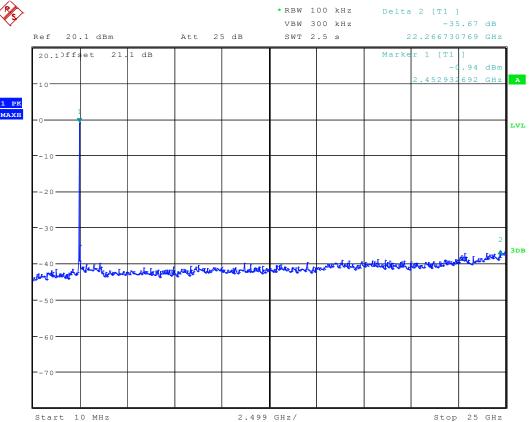

Date: 23.APR.2010 09:22:37

Date of Report: 2010-06-14 Page 35 of 49



### 5.8 Transmitter Spurious Emissions- Radiated

### 5.8.1 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 5.8.2 Limits: §15.209

(For measurement distance of 3m)

Frequency of emission (MHz)	Field strength (μV/m)
30–88	100 (40dBμV/m)
88–216	$150 (43.5 \text{ dB}\mu\text{V/m})$
216–960	200 (46 dBμV/m)
Above 960	500 (54 dBμV/m)

<sup>\*</sup>PEAK LIMIT=  $74dB\mu V/m$ 

<sup>\*</sup>AVG. LIMIT=  $54dB\mu V/m$ 

Date of Report: 2010-06-14 Page 36 of 49



#### **NOTE**:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in Peak mode using an Average limit, unless specified within the plots.

#### 5.8.3 Limits: §15.209

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)	
0.009-0.490	2400/F(kHz)	300	
0.490–1.705	24000/F(kHz)	30	
1.705–30.0	30	30	

#### **5.8.4** Test Result:

No significant emissions measurable. Plots reported here represent the worse case emissions.


Date of Report: 2010-06-14 Page 37 of 49



## 5.8.5 Test data/ plots:

### Transmitter Radiated Spurious Emission- 30M-1GHz

FOC 1530-1000MHz

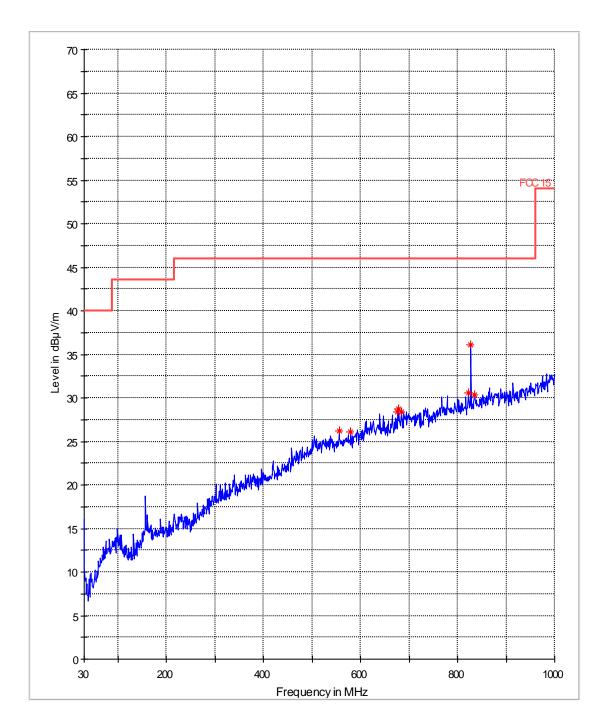


Date of Report: 2010-06-14 Page 38 of 49



# Transmitter Radiated Spurious Emission- (2405 MHz)- 1G-18GHz

FCC 15 1-18GHz

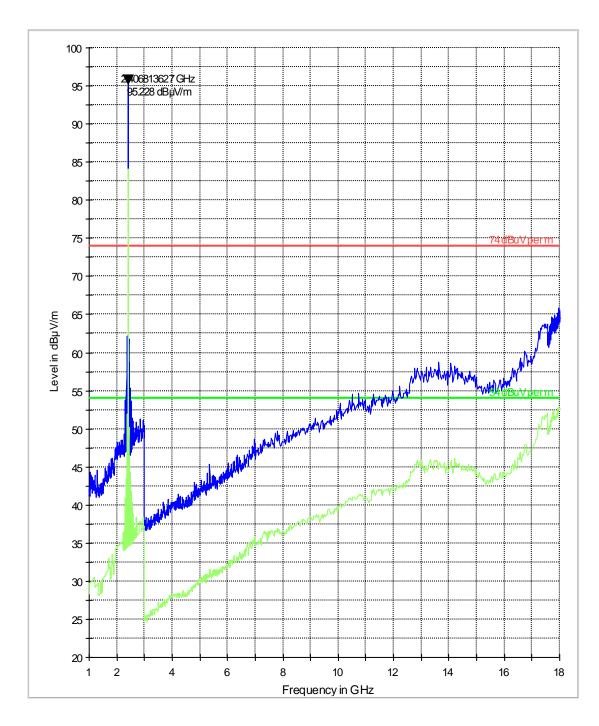


Date of Report : 2010-06-14 Page 39 of 49



# Transmitter Radiated Spurious Emission- (2440 MHz)- 1G-18GHz

FCC 15 1-18GHz

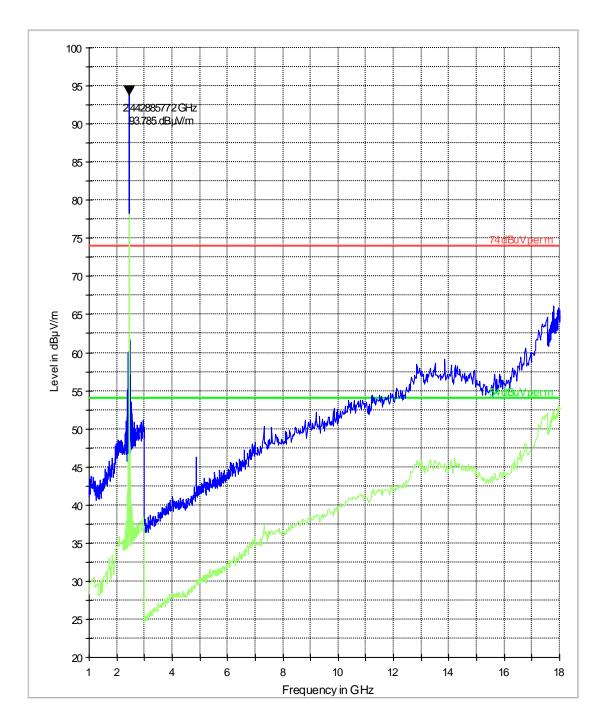


Date of Report: 2010-06-14 Page 40 of 49



## Transmitter Radiated Spurious Emission- (2480 MHz)- 1G-18GHz

FCC 15 1-18GHz

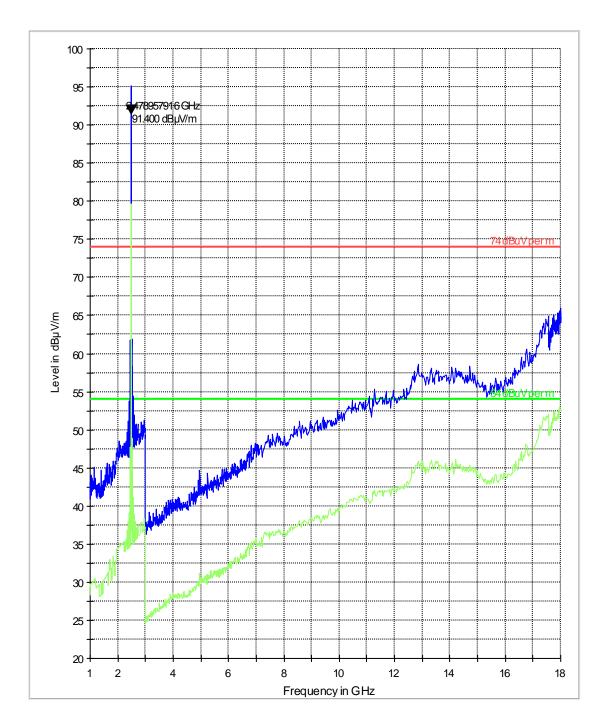


Date of Report: 2010-06-14 Page 41 of 49



## Transmitter Radiated Spurious Emission- 18G-26GHz

FCC 15 18-26GHz

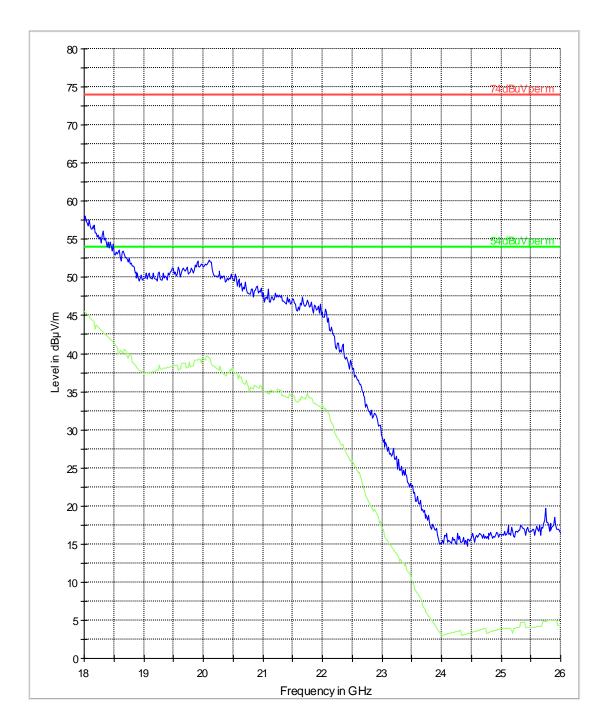

Date of Report : 2010-06-14 Page 42 of 49



### 5.9 Receiver Spurious Emissions- Radiated

### 5.9.1 Limits: §15.109

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)		
0.009-0.490	2400/F(kHz)	300		
0.490–1.705	24000/F(kHz)	30		
1.705–30.0	30	30		
30–88	100 (40dBμV/m)	3		
88–216	150 (43.5 dBμV/m)	3		
216–960	200 (46 dBμV/m)	3		
Above 960	500 (54 dBμV/m)	3		

#### **5.9.2** Test Conditions:

Mode: Receive mode

#### **5.9.3** Test Result:

No significant emissions measurable. Plots reported here represent the worse case emissions.


Date of Report: 2010-06-14 Page 43 of 49



## 5.9.4 Test data/ plots:

Receive Mode: 30MHz-1GHz

FCC 1530-1000MHz

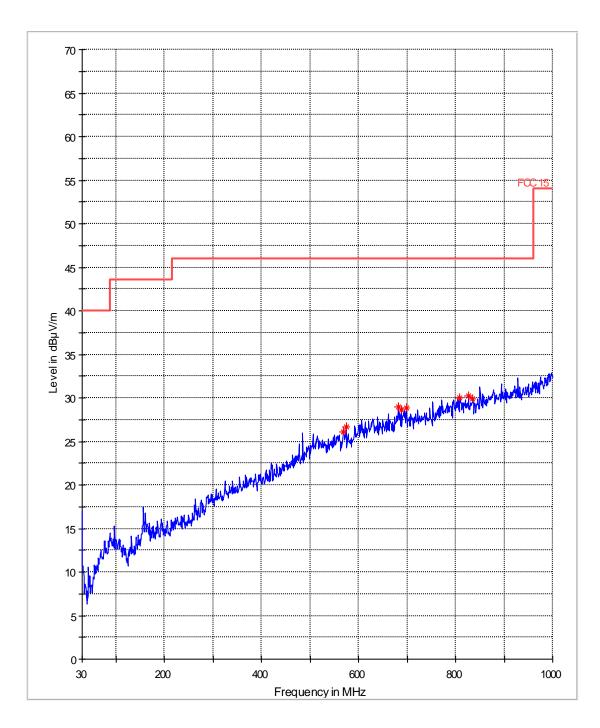


Date of Report: 2010-06-14 Page 44 of 49



**Receive Mode: 1GHz-18GHz** 

FCC 151-18GHz

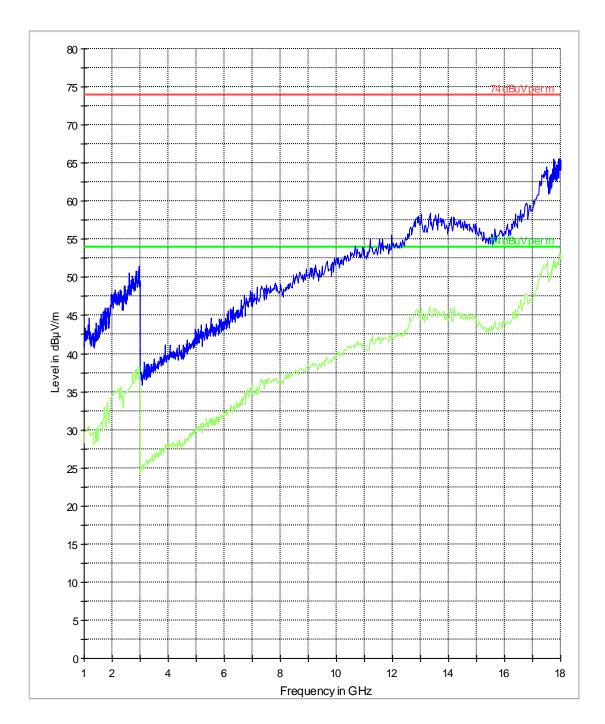

Date of Report: 2010-06-14 Page 45 of 49



#### **5.10** AC Power Line Conducted Emissions

#### 5.10.1 Limits: §15.107/15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a  $50 \,\mu\text{H}/50$  ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

	Conducted limit (dBμV)		
Frequency of emission (MHz)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5–5	56	46	
5–30	60	50	

<sup>\*</sup>Decreases with the logarithm of the frequency.

Analyzer Settings: RBW = 10KHz; VBW = 10KHz

#### 5.10.2 Test Result:

Not applicable

Date of Report: 2010-06-14 Page 46 of 49



#### 6 Test Equipment and Ancillaries used for tests

Instrument/Ancillary	Model	Manufacturer	Serial No.	Cal Date	Cal Interval
EMI Receiver/Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
Spectrum Analyzer	FSU	Rohde & Schwarz	200302	Dec 2009	1 year
Loop Antenna	6512	EMCO	00049838	July 2008	2 years
Biconilog Antenna	3141	EMCO	0005-1186	June 2009	2 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Jan 2009	3 years
Horn Antenna (18-40GHz)	3116	ETS	00070497	Jan 2009	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
6GHz High Pass Filter	HPM50106	Microtronics	001	n/a	n/a
Pre-Amplifier	JS4-00102600	Miteq	00616	n/a	n/a
Power Smart Sensor	R&S	NRP-Z22	100223	May 2010	1 Year
10dB attenuator	ATT-0298-10	MidwestMicrowav	n/a	n/a	n/a
Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
DC Power Supply	E3610A	Hewlett Packard	KR83021224	n/a	n/a
DC Power Supply	E3610A	Hewlett Packard	KR83023316	n/a	n/a
DC Power Supply	6632A	Hewlett Packard	3524A-12822	n/a	n/a
DC Power Supply	6655A	Hewlett Packard	3403A-00487	n/a	n/a
Multimeter	179	Fluke	N/A	Feb 2010	1 Year
Temp Hum Logger	TM320	Dickson	03280063	Feb 2010	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Feb 2010	1 Year
Climatic Chamber	VT4004	Votsch	G1115	May 2010	1 year

#### Note:

Equipment calibration is performed by an accredited calibration lab according to ISO 17025 requirements.


Calibration intervals are determined from manufacturer recommendation and/or lab discretion.

Cetecom Inc takes all measures to calibrate equipment before the due date; for instances when the equipment has to be used beyond the calibration due date, necessary steps are taken for calibration verification and documented until accredited calibration can be performed- to meet the Quality System requirements.

Date of Report: 2010-06-14 Page 47 of 49



### 7 BLOCK DIAGRAMS

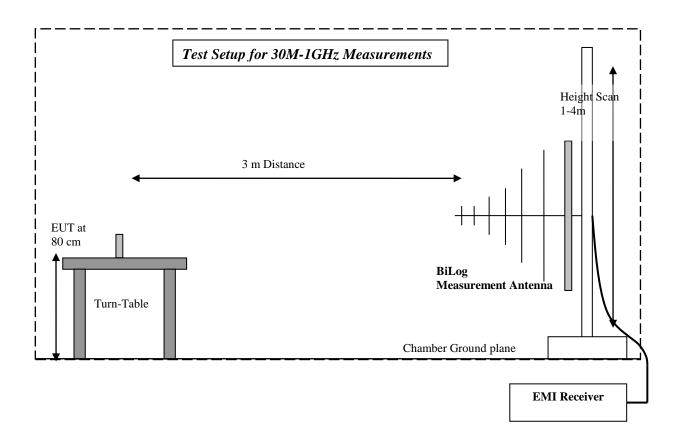

Test Report #:


# EMC\_WELLC\_001\_15.247Zig\_XYG-1

Date of Report: 2010

2010-06-14





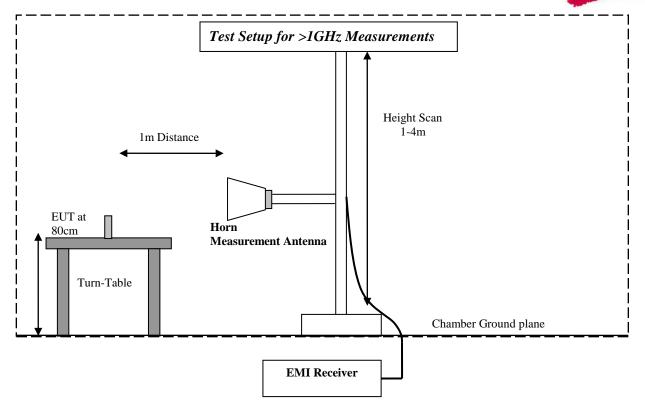

Date of Report : 2010-06-14 Page 49 of 49



## 8 Revision History

Date	Report Name	Changes to report	Prepared by
2010-06-14	EMC_WELLC_001_15.247Zig_XYG-1	Original	Marc