

FCC Test Report

FOR:

Model Name: WCGTWY01 Wellcore Base Unit FCC ID: XYG-2

47 CFR Part 15.247 for DSSS Systems

TEST REPORT #: EMC_WELLC_001_15.247Zig_XYG-2 DATE: 2010-06-14







(BQTF)



FCC listed
A2LA Accredited

IC recognized # 3462B

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Date of Report: 2010-06-14 Page 2 of 52



TABLE OF CONTENTS

| 1 | Asse | essment | 4 |
|---|----------------|--|----|
| 2 | Adm | ninistrative Data | 5 |
| | 2.1 | Identification of the Testing Laboratory Issuing the EMC Test Report | 5 |
| | 2.2 | Identification of the Client | |
| | 2.3 | Identification of the Manufacturer | |
| 3 | | ipment under Test (EUT) | |
| J | 3.1 | | |
| | | Specification of the Equipment under Test | |
| | 3.2 | Identification of the Equipment under Test (EUT) | |
| | 3.3 | Identification of Accessory equipment | |
| 4 | Subj | iect Of Investigation | 7 |
| 5 | Mea | surements | 8 |
| | 5.1 | Radiated Measurement Procedure | 8 |
| | 5.2 | Conducted Measurement Procedure | 11 |
| | 5.3 | Maximum Peak Output Power §15.247 (b)(3) | 12 |
| | 5.3.1 | Limits: §15.247 (b)(1) | |
| | 5.3.2 | | |
| | 5.3.3 | Test Result: | 12 |
| | Condu | cted Peak Power 2440 MHz | 14 |
| | 5.4 | Restricted Band Edge Compliance | 19 |
| | 5.4.1 | Limits: §15.247/15.205 | 19 |
| | 5.4.2 | Test Data/plots: | 20 |
| | 5.5 | Spectrum Bandwidth/ 20dB Bandwidth § 15.247 (a)(2) | |
| | 5.5.1 | | |
| | 5.5.2 | | 24 |
| | 5.5.3 | Test Data/plots: | 25 |
| | 5.6 | Power Spectral Density | 28 |
| | 5.6.1 | | 28 |
| | 5.6.2 | | |
| | 5.6.3 | | |
| | 5.7 | Transmitter Spurious Emissions- Conducted § 15.247 (c) | |
| | 5.7.1 5.7.2 | Limits: § 15.247 (d) | |
| | 5.7.2 | | 32 |
| | 5.7.4 | <u> </u> | |
| | 5.8 | Transmitter Spurious Emissions- Radiated | |
| | 5.8.1 | Limits: §15.247/15.205 | |
| | 5.8.2 | Limits: §15.209 | 36 |
| | 5.8.3 | Limits: §15.209 | 37 |
| | 5.8.4 | Test Result: | 37 |
| | | | |

Date of Report: 2010-06-14 Page 3 of 52



| 5.9 R | eceiver Spurious Emissions- Radiated | 43 |
|---------|--|-----------------------|
| 5.9.1 | Limits: §15.109 | 43 |
| 5.9.2 | Test Result: | 43 |
| 5.9.3 | Test data/ plots: | 44 |
| 5.10 A | C Power Line Conducted Emissions | 46 |
| | | |
| 5.10.2 | Test Result: | 46 |
| 5.10.3 | Test data/ plots: | 47 |
| Test E | quipment and Ancillaries used for tests | 49 |
| BLOC | K DIAGRAMS | 50 |
| Revisio | on History | 52 |
| | 5.9.1 5.9.2 5.9.3 5.10 A 5.10.1 5.10.2 5.10.3 Test Ed BLOC | 5.9.1 Limits: §15.109 |

Test Report #:

EMC_WELLC_001_15.247Zig_XYG-2

Date of Report:

2010-06-14

Page 4 of 52



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations.

| Company | Description | Model # |
|----------------------|---------------------------------|----------|
| Wellcore Corporation | Motion detector processing unit | WCGTWY01 |

Responsible for Testing Laboratory:

Heiko Strehlow

| 2010-06-14 | Compliance | (Director) | |
|------------|------------|------------|-----------|
| Date | Section | Name | Signature |

Responsible for the Report:

Marc Douat

| Date | Section | Name | Signature |
|------|---------|------|-----------|

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

Date of Report: 2010-06-14 Page 5 of 52



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

| Company Name: | CETECOM Inc. | |
|--------------------------------------|--|--|
| Department: | Compliance | |
| Address: | 411 Dixon Landing Road Milpitas, CA 95035 U.S.A. | |
| Telephone: | +1 (408) 586 6200 | |
| Fax: | +1 (408) 586 6299 | |
| Responsible Test Lab Manager: | Heiko Strehlow | |
| Responsible Project Leader: | Marc Douat | |

2.2 Identification of the Client

| Applicant's Name: | Wellcore Corporation |
|------------------------|----------------------------|
| Street Address: | 2870 Zanker Road Suite 130 |
| City/Zip Code | San Jose, CA 95134 |
| Country | USA |
| Contact Person: | Van Krueger |
| Phone No. | +1 408 216 8362 |
| e-mail: | van@wellcore.com |

2.3 Identification of the Manufacturer

| Manufacturer's Name: | Same as above |
|------------------------|---------------|
| Manufacturers Address: | |
| City/Zip Code | |
| Country | |

Date of Report: 2010-06-14 Page 6 of 52



3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

| Marketing Name: | Wellcore Base Unit | |
|-------------------------------|---------------------------------|--|
| Model No: | WCGTWY01 | |
| Product Type: | Motion detector processing unit | |
| Hardware Revision: | Ver. 3 | |
| Software Revision : | Ver. 46-a | |
| FCC-ID: | XYG-2 | |
| Frequency: | ISM Band 2400-2483.5 MHz | |
| Type(s) of Modulation: | OQPSK | |
| Number of channels: | 16 | |
| Antenna Type: | Integral | |
| Equipment | □Fixed □Vehicular ■Portable | |
| Classification: | □Module | |
| Power Supply: | 3.5 to 4.2 VDC battery | |

3.2 Identification of the Equipment under Test (EUT)

| EUT# | Model | HW Version | SW Version |
|------|----------|------------|------------|
| 1 | WCGTWY01 | Ver. 3 | Ver. 46-a |

3.3 Identification of Accessory equipment

| AE # | Type | Manufacturer | Model | Serial Number |
|-------------|------------|--------------------------------|-------------------|---------------|
| 1 | AC Adapter | Mitra Electronics Co., Ltd. | MPBS- 12020000 | N/A |

Date of Report: 2010-06-14 Page 7 of 52



4 Subject Of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 7.

This test report is to support a request for new equipment authorization under the FCC ID **XYG-2** All testing was performed on the product referred to in Section 3 as EUT. This test report contains full radiated and conducted testing results as per FCC15.247.

During the testing process the EUT was tested on low, mid and high channels. For radiated measurements, all data in this report shows the worst case between horizontal and vertical polarization measurements.

Date of Report: 2010-06-14 Page 8 of 52



5 Measurements

5.1 Radiated Measurement Procedure

ANSI C63.4 Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

Date of Report : 2010-06-14 Page 9 of 52



ANSI C63.4 Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the "cone of radiation" from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT's size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.


NOTES

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Date of Report: 2010-06-14 Page 10 of 52



Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

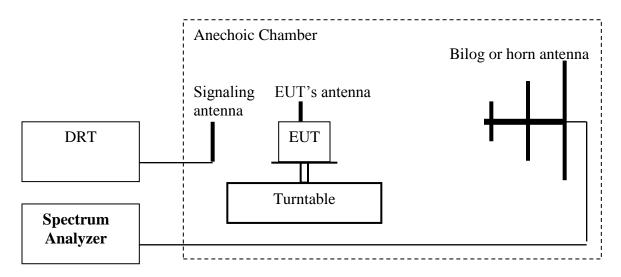


- Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical 1. orientation.
- 2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
- 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
- Rotate the EUT 360°. Record the peak level in dBm (LVL). 4.
- Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The 5. center of the antenna should be at the same location as the center of the EUT's antenna.
- Connect the antenna to a signal generator with known output power and record the path loss 6. in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
- 7. Determine the ERP using the following equation:
 - ERP (dBm) = LVL (dBm) + LOSS (dB)
- Determine the EIRP using the following equation: 8. EIRP (dBm) = ERP (dBm) + 2.14 (dB)
- Measurements are to be performed with the EUT set to the low, middle and high channels. 9.

Spectrum analyzer settings: RBW=VBW=3MHz

Date of Report: 2010-06-14 Page 11 of 52



5.2 Conducted Measurement Procedure



- 1. Connect the equipment as shown in the above diagram.
- 2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
- 3. Measurements are to be performed with the EUT set to the low, middle and high channels.

Date of Report : 2010-06-14 Page 12 of 52



5.3 Maximum Peak Output Power §15.247 (b)(3)

5.3.1 Limits: §15.247 (b)(1)

Nominal Peak Output Power < 30 dBm (1W)

EIRP < 36dBm

5.3.2 Test Conditions:

Tnom: 21°C

5.3.3 Test Result:

| Max Peak Output Power- Radiated (dBm) | | | | | |
|---------------------------------------|-----------------|------|------|--|--|
| Mada | Frequency (MHz) | | | | |
| Mode | 2405 | 2440 | 2480 | | |
| 802.15.4 | 3.87 | 4.95 | 3.94 | | |
| Measurement Uncertainty: ±3dB | | | | | |


| Max Peak Output Power- Conducted (dBm) | | | |
|--|-----------------|------|------|
| Mada | Frequency (MHz) | | |
| Mode | 2405 | 2440 | 2480 |
| 802.15.4 | 4.52 | 4.65 | 4.87 |
| Measurement Uncertainty: ±0.5dB | | | |

Date of Report : 2010-06-14 Page 13 of 52



Test Data/plots:

Conducted Peak Power 2405 MHz

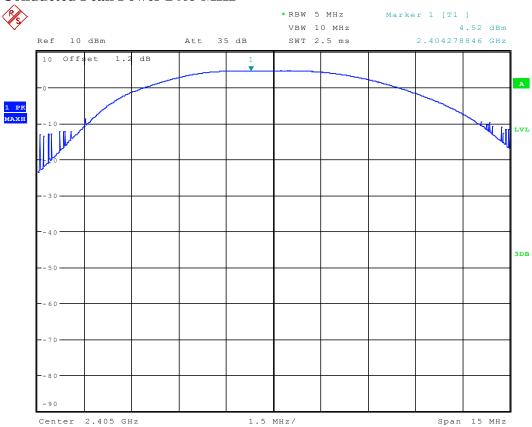


Date: 23.FEB.2010 12:55:18

Date of Report: 2010-06-14 Page 14 of 52



Conducted Peak Power 2440 MHz

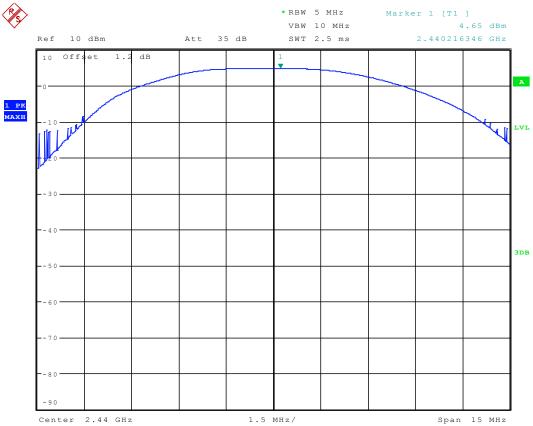


Date: 23.FEB.2010 12:58:20

Date of Report: 2010-06-14 Page 15 of 52



Conducted Peak Power 2480 MHz

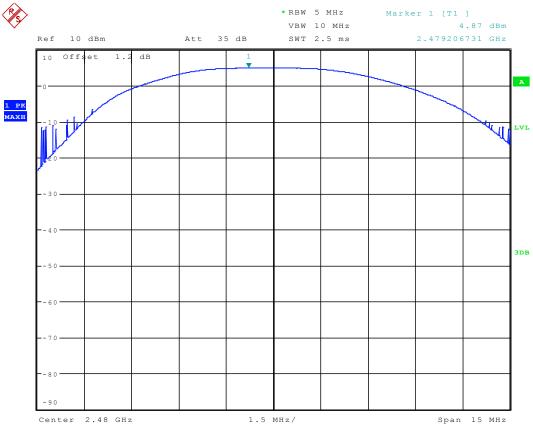


Date: 23.FEB.2010 15:14:51

Date of Report : 2010-06-14 Page 16 of 52



EIRP 2405 MHz

EIRPBT L

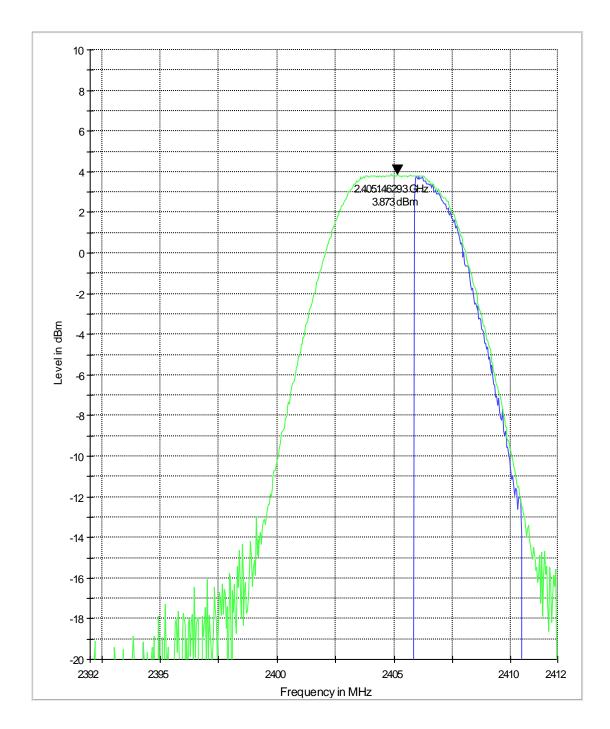


Date of Report : 2010-06-14 Page 17 of 52



EIRP 2440 MHz

EIRPBT M

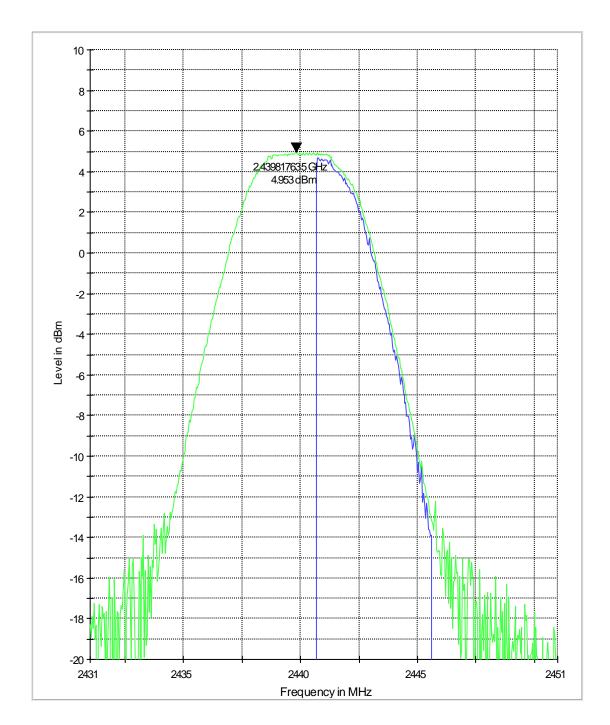


Date of Report : 2010-06-14 Page 18 of 52



EIRP 2480 MHz

EIRPBT H

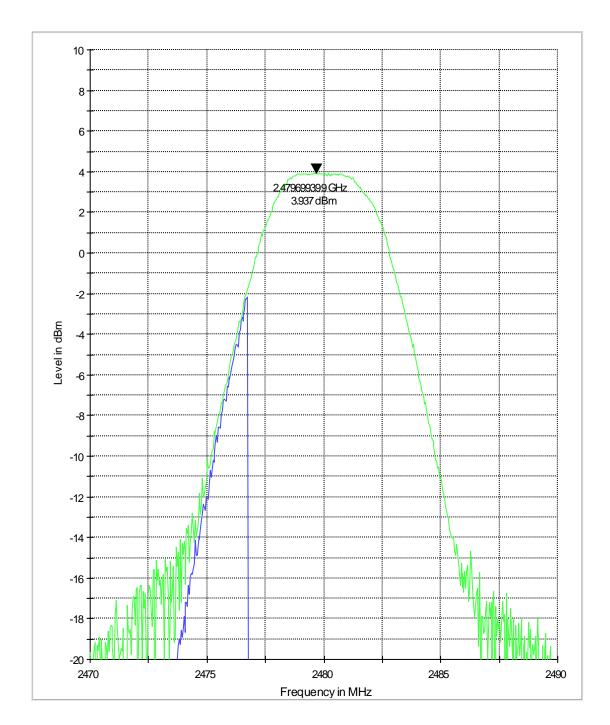

Date of Report: 2010-06-14 Page 19 of 52



5.4 Restricted Band Edge Compliance

5.4.1 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz MHz GI | | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= $74dB\mu V/m$

*AVG. LIMIT= 54dBµV/m


Date of Report: 2010-06-14 Page 20 of 52



5.4.2 Test Data/plots:

Lower band edge peak

FCC 15.247 LBE Pk 3m

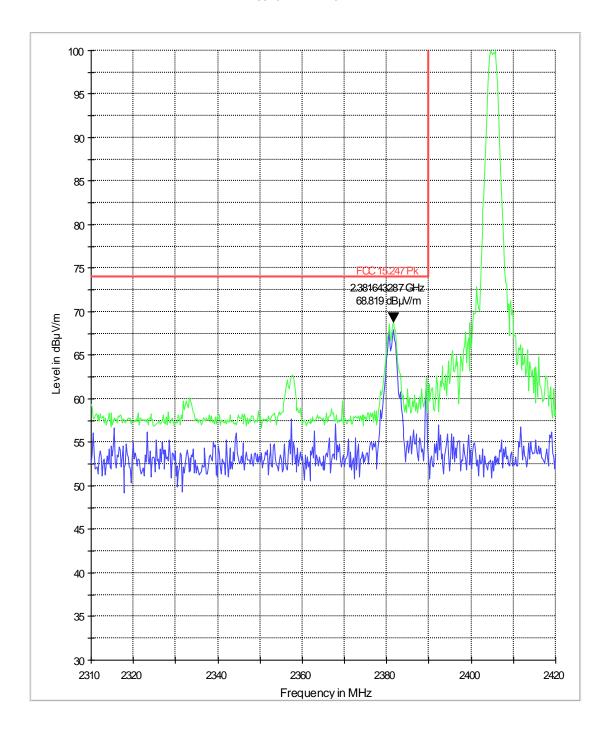


Date of Report : 2010-06-14 Page 21 of 52



Lower band edge average

FCC 15.247 LBE Avg 3m

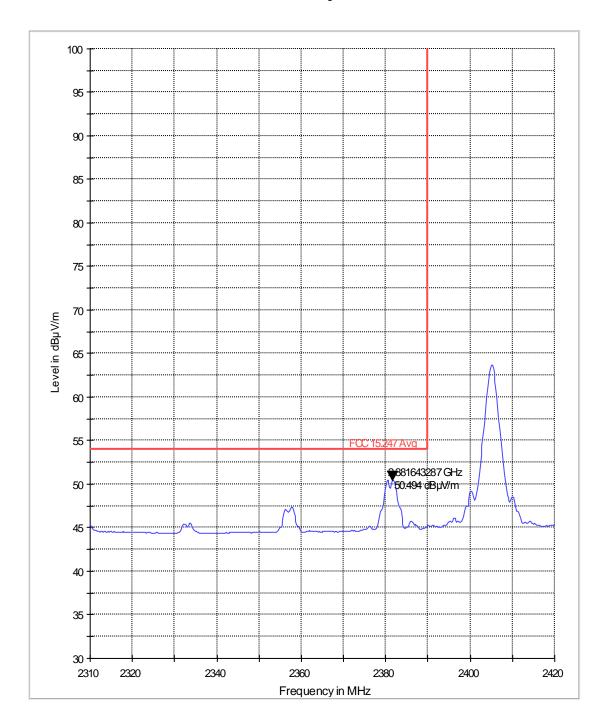


Date of Report : 2010-06-14 Page 22 of 52



Higher band edge peak

FCC 15.247 HBE Pk 3m

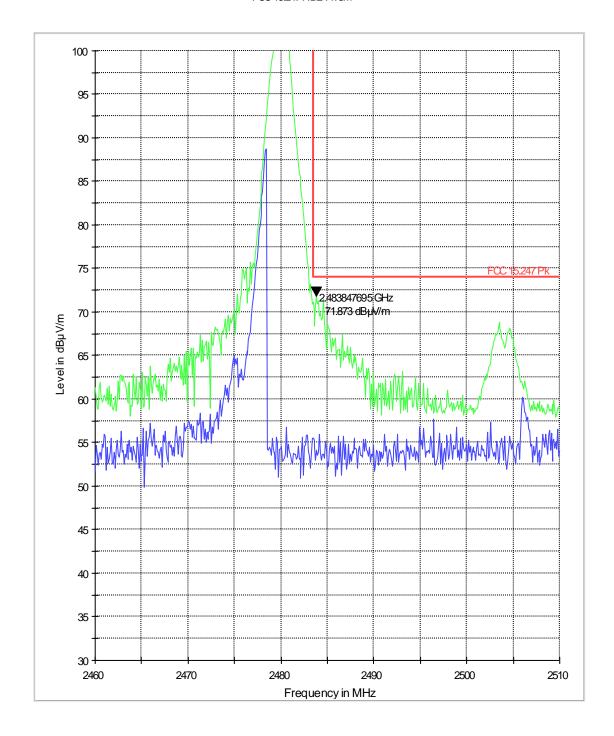


Date of Report : 2010-06-14 Page 23 of 52



Higher band edge average

FCC 15.247 HBE Avg 3m

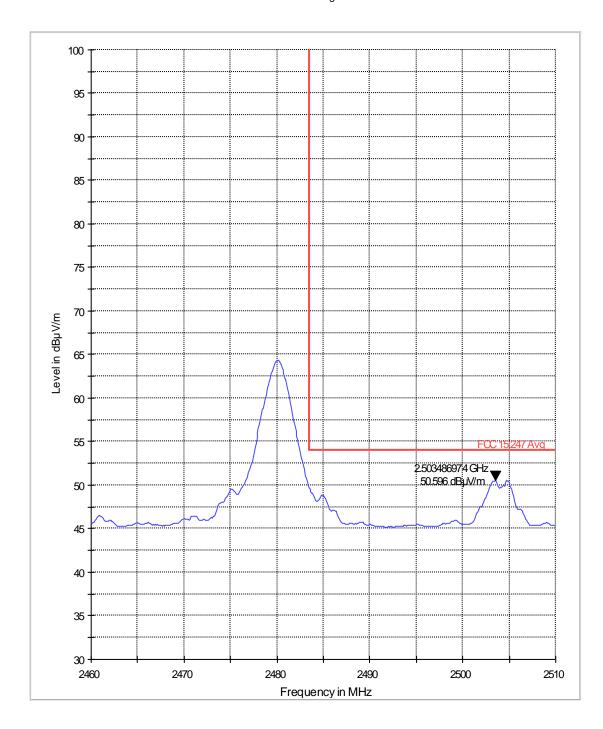

Date of Report: 2010-06-14 Page 24 of 52



5.5 Spectrum Bandwidth/ 20dB Bandwidth § 15.247 (a)(2)

5.5.1 Limits: § 15.247 (a)(1) Spectrum Bandwidth > 500 kHz

5.5.2 Test Result:

| Occupied Bandwidth (MHz) | | | | | | |
|-----------------------------------|-----------------|--------------|------|--------------|------|--------------|
| Mada | Frequency (MHz) | | | | | |
| Mode | 2405 | | 2440 | | 2480 | |
| | 6dB | 20dB/ 99% | 6dB | 20dB/ 99% | 6dB | 20dB/ 99% |
| 802.15.4 | 1.46 | 3.09 | 1.65 | 3.11 | 1.62 | 3.21 |
| Measurement Uncertainty: ±100 kHz | | | | | | |

RBW = 50kHz


 $VBW \ge RBW$

Date of Report: 2010-06-14 Page 25 of 52



5.5.3 Test Data/plots:

Bandwidth 2405 MHz

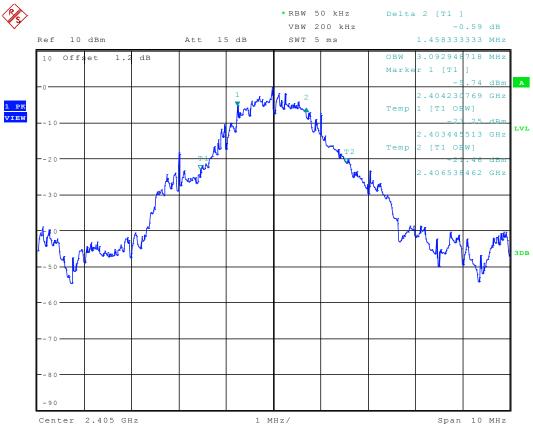


Date: 23.FEB.2010 12:44:43

Date of Report: 2010-06-14 Page 26 of 52



Bandwidth 2440 MHz

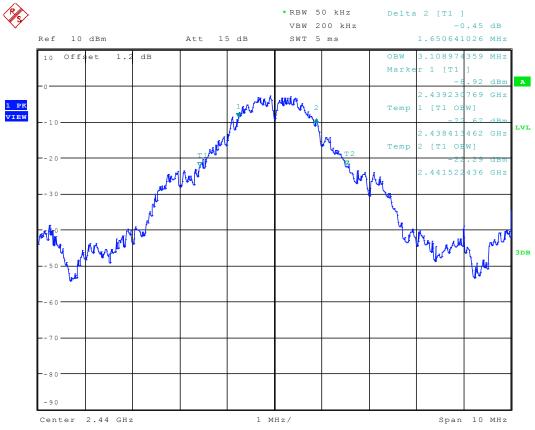


Date: 23.FEB.2010 13:01:04

Date of Report: 2010-06-14 Page 27 of 52



Bandwidth 2480 MHz

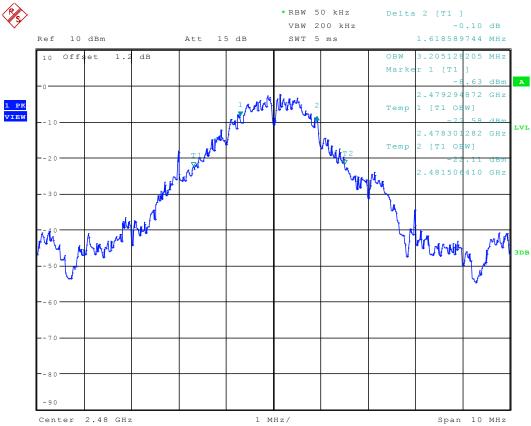

Date: 23.FEB.2010 15:13:49

Date of Report: 2010-06-14 Page 28 of 52



5.6 Power Spectral Density

5.6.1 Limits: § 15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.6.2 Test results:


| Power Spectral Density (dBm) | | | |
|---------------------------------|-----------------|-------|-------|
| Mada | Frequency (MHz) | | |
| Mode | 2405 | 2440 | 2480 |
| 802.15.4 | -8.91 | -8.67 | -8.45 |
| Measurement Uncertainty: ±0.5dB | | | |

Date of Report: 2010-06-14 Page 29 of 52



5.6.3 Test Data/plots:

Power Spectral Density 2405 MHz

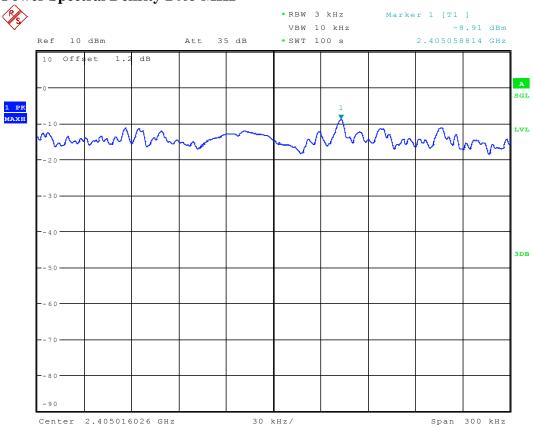


Date: 23.FEB.2010 12:48:43

Date of Report: 2010-06-14 Page 30 of 52



Power Spectral Density 2440 MHz

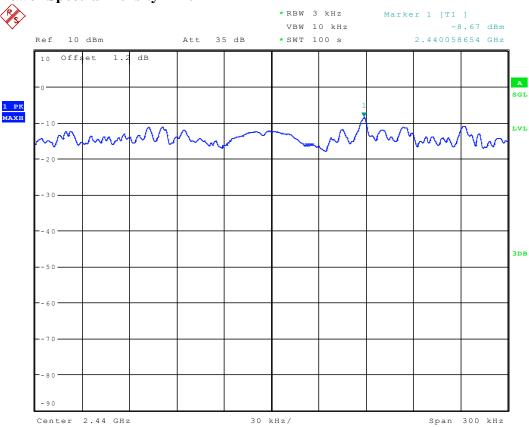


Date: 23.FEB.2010 13:03:57

Date of Report: 2010-06-14 Page 31 of 52



Power Spectral Density 2480 MHz

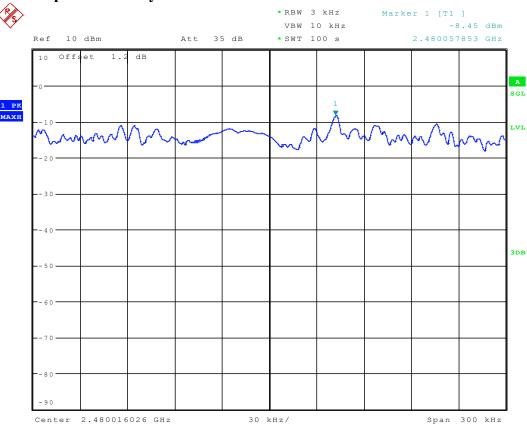

Date: 23.FEB.2010 15:11:39

Date of Report: 2010-06-14 Page 32 of 52



5.7 Transmitter Spurious Emissions- Conducted § 15.247 (c)

5.7.1 Limits: § 15.247 (d)

30dBm for the transmitter.

-20dBc in the frequency range 30MHz- 25GHz.

5.7.2 Test Conditions:

Analyzer settings: RBW=VBW=100 kHz

5.7.3 Test data/ plots:


| Conducted Spurious Emissions | | | | |
|--------------------------------|---------------------------------|-------|-----------------|--|
| Channel | Frequency (MHz) Amplitude (dBm) | | Limits | |
| | 2412 | -1.04 | 30dBm | |
| Low | No critical peaks | | 20.15 | |
| | | | -20dBc | |
| | 2437 | -0.19 | 30 dBm | |
| Mid | No critical peaks | | -20dBc | |
| | | | -20dBc | |
| | 2462 | -0.49 | 30 dBm | |
| High | No critical peaks | | -20dBc | |
| | | | -20 ub C | |
| Measurement Uncertainty: ±1 dB | | | | |

Date of Report: 2010-06-14 Page 33 of 52



5.7.4 Test data/ plots:

Conducted Spurious Emission 2405 MHz

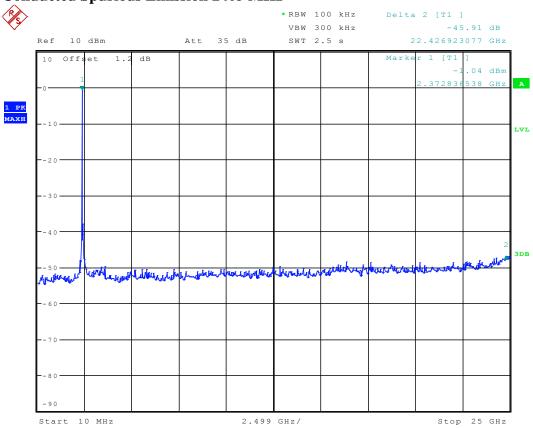


Date: 23.FEB.2010 12:52:43

Date of Report: 2010-06-14 Page 34 of 52



Conducted Spurious Emission 2440 MHz

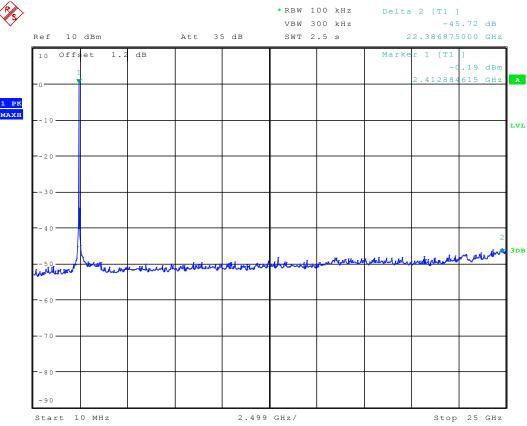


Date: 23.FEB.2010 13:07:51

Date of Report: 2010-06-14 Page 35 of 52



Conducted Spurious Emission 2480 MHz

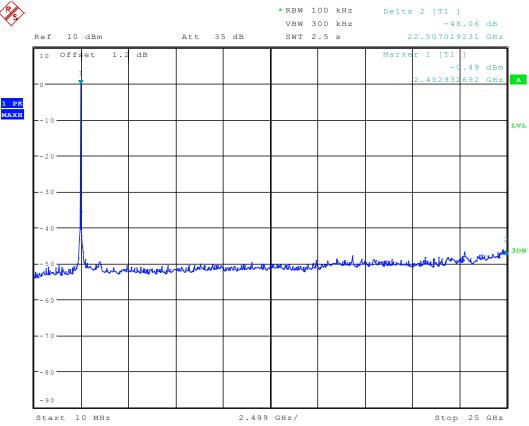

Date: 23.FEB.2010 15:08:32

Date of Report : 2010-06-14 Page 36 of 52



5.8 Transmitter Spurious Emissions- Radiated

5.8.1 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz MHz MHz | | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Limits: §15.209

(For measurement distance of 3m)

| Frequency of emission (MHz) | Field strength (μV/m) |
|-----------------------------|--------------------------------------|
| 30–88 | $100 (40 dB \mu V/m)$ |
| 88–216 | $150 (43.5 \text{ dB}\mu\text{V/m})$ |
| 216–960 | 200 (46 dBμV/m) |
| Above 960 | 500 (54 dBμV/m) |

^{*}PEAK LIMIT= 74dBµV/m

^{*}AVG. LIMIT= $54dB\mu V/m$

Date of Report: 2010-06-14 Page 37 of 52



NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in Peak mode using an Average limit, unless specified within the plots.

5.8.3 Limits: §15.209

| Frequency of emission (MHz) | Field strength (μV/m) | Measurement Distance (m) | | |
|-----------------------------|-----------------------|--------------------------|--|--|
| 0.009-0.490 | 2400/F(kHz) | 300 | | |
| 0.490–1.705 | 24000/F(kHz) | 30 | | |
| 1.705–30.0 | 30 | 30 | | |

5.8.4 Test Result:

No significant emissions measurable. Plots reported here represent the worse case emissions.

Date of Report : 2010-06-14 Page 38 of 52




Test data/ plots:

Transmitter Radiated Spurious Emission- 30M-1GHz

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|--------------------|-----------------------|-----------------------|--------------------|----------------|--------------|---------------|---------------|----------------|-------------------|
| 199.868979 | 39.8 | 20.0 | 120.000 | 167.0 | Н | 45.0 | 11.4 | 3.7 | 43.5 |
| 399.698433 | 44.3 | 20.0 | 120.000 | 121.0 | ٧ | 68.0 | 17.7 | 1.7 | 46.0 |
| 399.699215 | 44.0 | 20.0 | 120.000 | 121.0 | ٧ | 70.0 | 17.7 | 2.0 | 46.0 |
| 405.258043 | 36.4 | 20.0 | 120.000 | 121.0 | ٧ | 69.0 | 17.9 | 9.6 | 46.0 |
| 500.000000 | 41.0 | 20.0 | 120.000 | 121.0 | ٧ | 213.0 | 21.3 | 5.0 | 46.0 |
| 599.588658 | 41.7 | 20.0 | 120.000 | 121.0 | Н | 23.0 | 22.6 | 4.3 | 46.0 |
| 699.784239 | 40.7 | 20.0 | 120.000 | 121.0 | Н | 158.0 | 24.8 | 5.3 | 46.0 |
| 899.664359 | 41.6 | 20.0 | 120.000 | 121.0 | ٧ | 69.0 | 26.1 | 4.4 | 46.0 |

FCC 1530-1000MHz

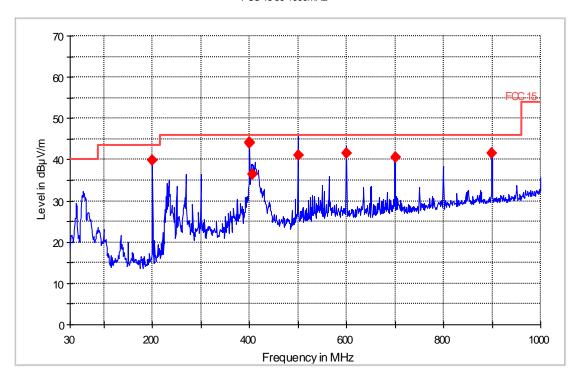


Date of Report : 2010-06-14 Page 39 of 52



Transmitter Radiated Spurious Emission- Ch1 (2412 MHz)- 1G-18GHz

FCC 15 1-18GHz

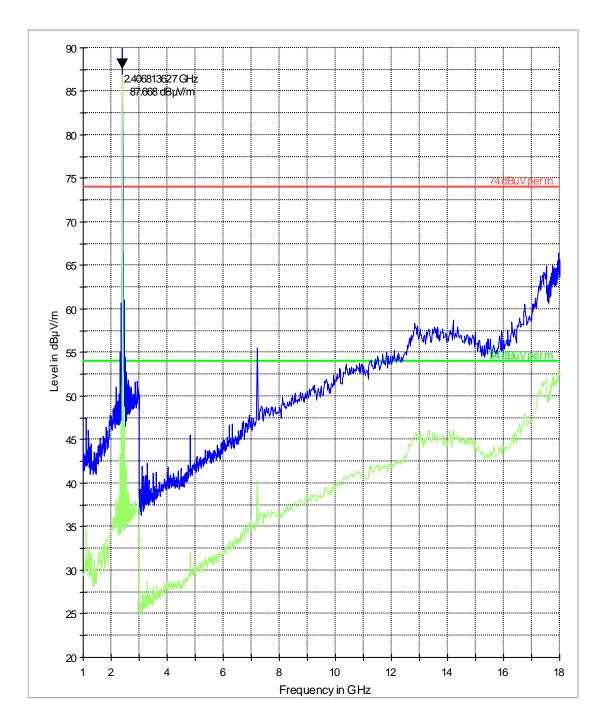


Date of Report : 2010-06-14 Page 40 of 52



Transmitter Radiated Spurious Emission- Ch6 (2437 MHz)- 1G-18GHz

FCC 15 1-18GHz

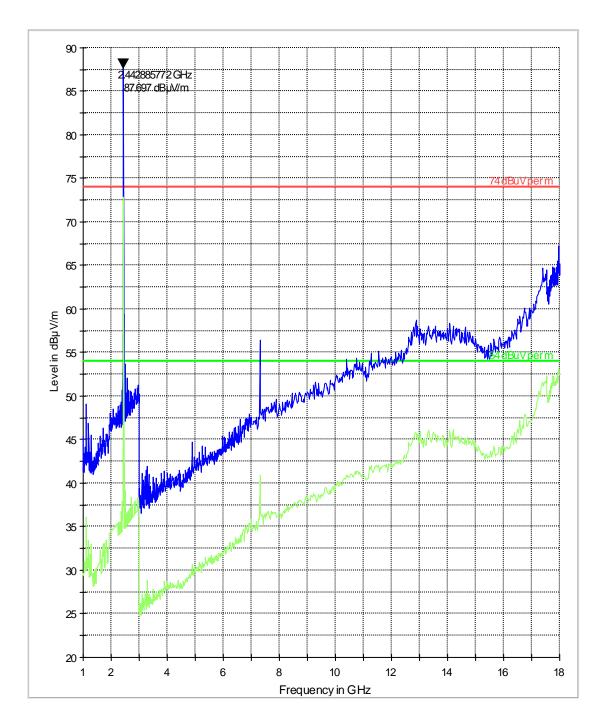


Date of Report : 2010-06-14 Page 41 of 52



Transmitter Radiated Spurious Emission- Ch11 (2462 MHz)- 1G-18GHz

FCC 15 1-18GHz

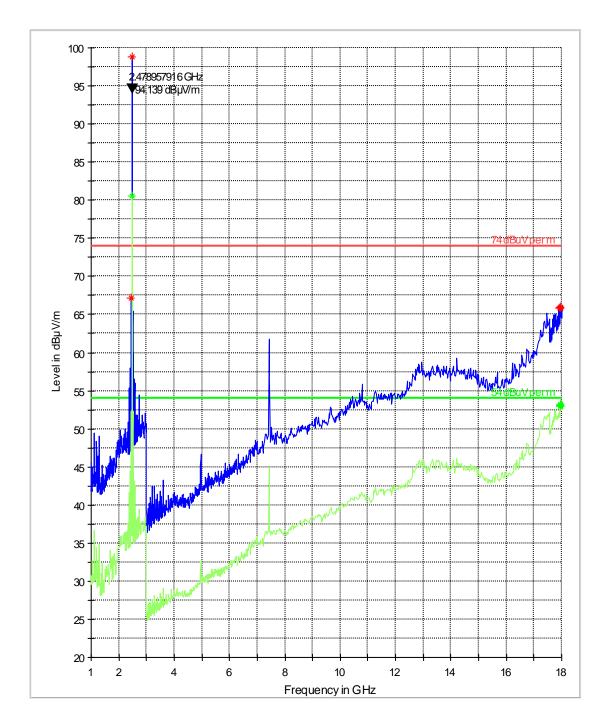


Date of Report : 2010-06-14 Page 42 of 52



Transmitter Radiated Spurious Emission- 18G-26GHz

FCC 15 18-26GHz

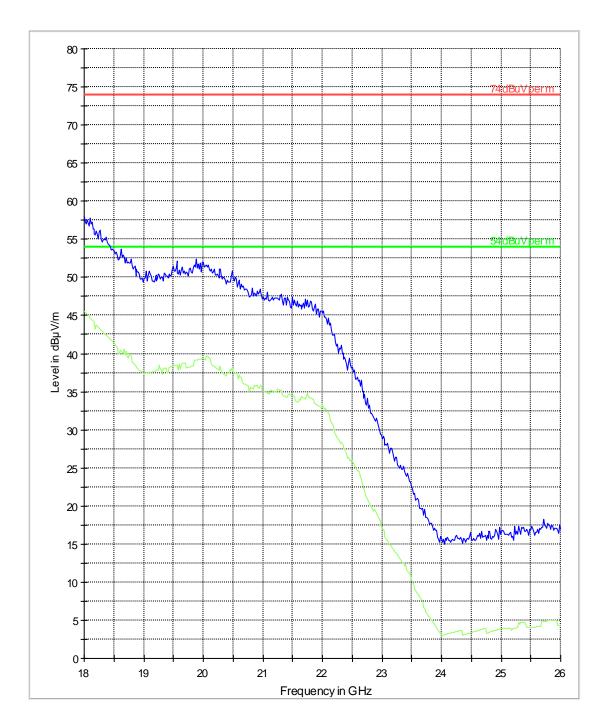

Date of Report: 2010-06-14 Page 43 of 52



5.9 Receiver Spurious Emissions- Radiated

5.9.1 Limits: §15.109

| Frequency of emission (MHz) | Field strength (μV/m) | Measurement Distance (m) |
|-----------------------------|-----------------------|--------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100 (40dBμV/m) | 3 |
| 88–216 | 150 (43.5 dBμV/m) | 3 |
| 216–960 | 200 (46 dBμV/m) | 3 |
| Above 960 | 500 (54 dBμV/m) | 3 |

5.9.2 Test Result:

No significant emissions measurable. Plots reported here represent the worse case emissions.

Date of Report: 2010-06-14 Page 44 of 52




5.9.3 Test data/ plots:

Receive Mode: 30MHz-1GHz

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|--------------------|-----------------------|-----------------------|--------------------|----------------|--------------|------------------|---------------|----------------|-------------------|
| 199.988943 | 39.8 | 20.0 | 120.000 | 120.0 | Н | 45.0 | 11.4 | 3.7 | 43.5 |
| 399.739311 | 42.8 | 20.0 | 120.000 | 120.0 | ٧ | 79.0 | 17.7 | 3.2 | 46.0 |
| 408.900852 | 33.8 | 20.0 | 120.000 | 120.0 | ٧ | 45.0 | 18.0 | 12.2 | 46.0 |
| 413.832351 | 33.5 | 20.0 | 120.000 | 120.0 | ٧ | 45.0 | 18.1 | 12.5 | 46.0 |
| 500.000000 | 43.2 | 20.0 | 120.000 | 120.0 | ٧ | 69.0 | 21.3 | 2.8 | 46.0 |
| 599.768778 | 43.4 | 20.0 | 120.000 | 120.0 | Н | 0.0 | 22.6 | 2.6 | 46.0 |
| 699.503918 | 35.8 | 20.0 | 120.000 | 120.0 | Н | 159.0 | 24.8 | 10.2 | 46.0 |
| 899.393878 | 40.1 | 20.0 | 120.000 | 120.0 | V | 68.0 | 26.1 | 5.9 | 46.0 |

FCC 1530-1000MHz

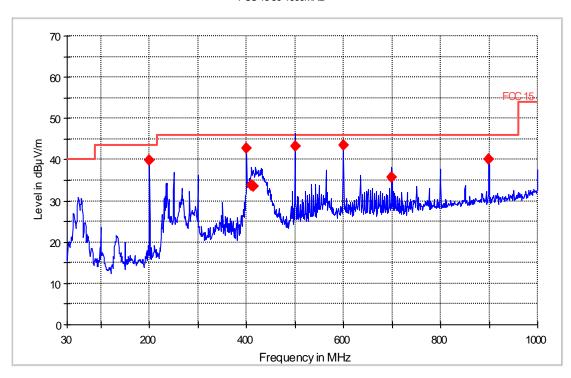


Date of Report : 2010-06-14 Page 45 of 52



Receive Mode: 1GHz-18GHz

FCC 151-18GHz

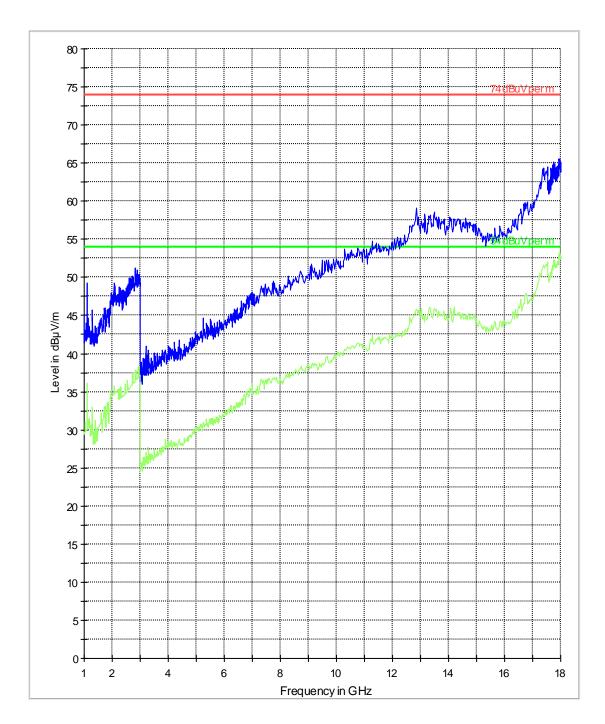

Date of Report: 2010-06-14 Page 46 of 52



5.10 AC Power Line Conducted Emissions

5.10.1 Limits: §15.107/15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a $50 \,\mu\text{H}/50$ ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| | Conducted limit (dBμV) | | | | |
|-----------------------------|------------------------|-----------|--|--|--|
| Frequency of emission (MHz) | Quasi-peak | Average | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | |
| 0.5–5 | 56 | 46 | | | |
| 5–30 | 60 | 50 | | | |

^{*}Decreases with the logarithm of the frequency.

Analyzer Settings: RBW = 10KHz; VBW = 10KHz

5.10.2 Test Result:


Plots reported here represent the worse case emissions.

Date of Report: 2010-06-14 Page 47 of 52



5.10.3 Test data/ plots:


TX Mode: Line and Neutral

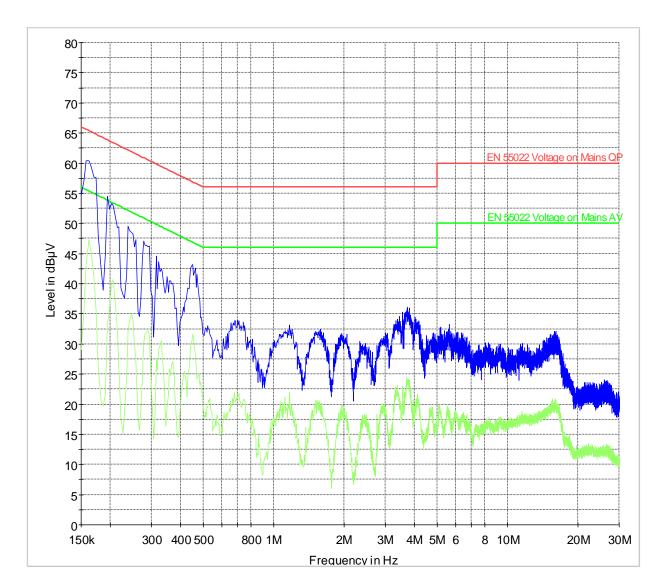

Date of Report : 2010-06-14 Page 48 of 52



RX Mode: Line and Neutral

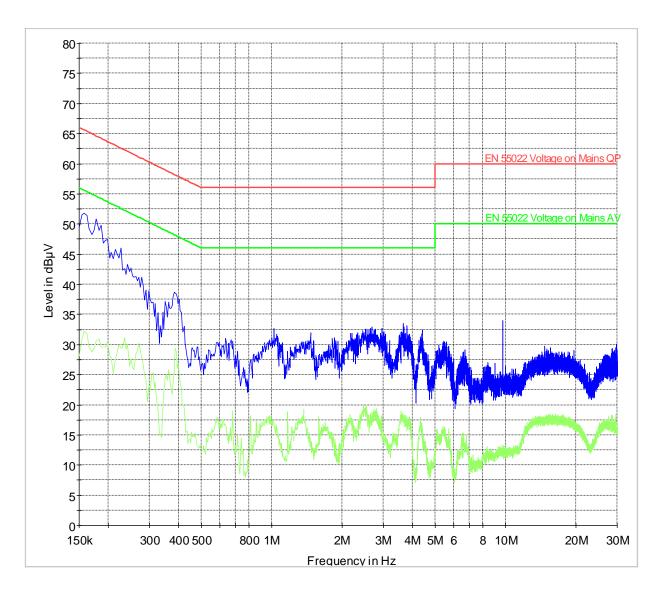

Date of Report: 2010-06-14 Page 49 of 52



6 Test Equipment and Ancillaries used for tests

| Instrument/Ancillary | Model | Manufacturer | Serial No. | Cal Date | Cal Interval |
|-------------------------|---------------|-----------------|-------------|-----------|-----------------|
| EMI Receiver/Analyzer | ESIB 40 | Rohde & Schwarz | 100107 | May 2010 | 1 year |
| Spectrum Analyzer | FSU | Rohde & Schwarz | 200302 | Dec 2009 | 1 year |
| Loop Antenna | 6512 | EMCO | 00049838 | July 2008 | 2 years |
| Biconilog Antenna | 3141 | EMCO | 0005-1186 | June 2009 | 2 years |
| Horn Antenna (1-18GHz) | 3115 | ETS | 00035111 | Jan 2009 | 3 years |
| Horn Antenna (18-40GHz) | 3116 | ETS | 00070497 | Jan 2009 | 3 years |
| Communication Antenna | IBP5-900/1940 | Kathrein | n/a | n/a | n/a |
| High Pass Filter | 5HC2700 | Trilithic Inc. | 9926013 | n/a | n/a |
| High Pass Filter | 4HC1600 | Trilithic Inc. | 9922307 | n/a | n/a |
| 6GHz High Pass Filter | HPM50106 | Microtronics | 001 | n/a | n/a |
| Pre-Amplifier | JS4-00102600 | Miteq | 00616 | n/a | n/a |
| Power Smart Sensor | R&S | NRP-Z22 | 100223 | May 2010 | 1 Year |
| 10dB attenuator | ATT-0298-10 | MidwestMicrowav | n/a | n/a | n/a |
| Power Splitter | 11667B | Hewlett Packard | 645348 | n/a | n/a |
| DC Power Supply | E3610A | Hewlett Packard | KR83021224 | n/a | n/a |
| DC Power Supply | E3610A | Hewlett Packard | KR83023316 | n/a | n/a |
| DC Power Supply | 6632A | Hewlett Packard | 3524A-12822 | n/a | n/a |
| DC Power Supply | 6655A | Hewlett Packard | 3403A-00487 | n/a | n/a |
| Multimeter | 179 | Fluke | N/A | Feb 2010 | 1 Year |
| Temp Hum Logger | TM320 | Dickson | 03280063 | Feb 2010 | 1 Year |
| Temp Hum Logger | TM325 | Dickson | 5285354 | Feb 2010 | 1 Year |
| Climatic Chamber | VT4004 | Votsch | G1115 | May 2010 | 1 year |

Note:

Equipment calibration is performed by an accredited calibration lab according to ISO 17025 requirements.


Calibration intervals are determined from manufacturer recommendation and/or lab discretion.

Cetecom Inc takes all measures to calibrate equipment before the due date; for instances when the equipment has to be used beyond the calibration due date, necessary steps are taken for calibration verification and documented until accredited calibration can be performed- to meet the Quality System requirements.

Date of Report: 2010-06-14 Page 50 of 52



7 BLOCK DIAGRAMS

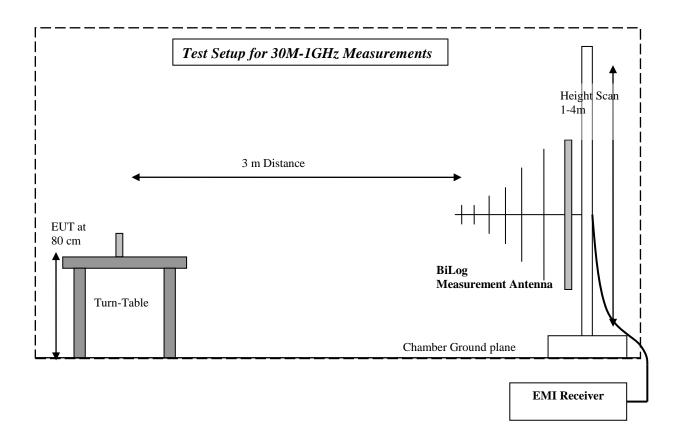

Test Report #:


EMC_WELLC_001_15.247Zig_XYG-2

Date of Report:

2010-06-14

Page 51 of 52



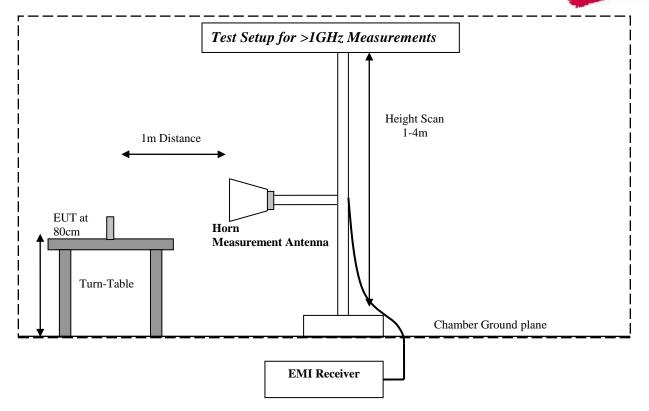

Date of Report : 2010-06-14 Page 52 of 52



8 Revision History

| Date | Report Name | Changes to report | Prepared by |
|------------|-------------------------------|-------------------|-------------|
| 2010-06-14 | EMC_WELLC_001_15.247Zig_XYG-2 | Original | Marc |
| | | | |