



TEST REPORT

No. I20D00149-SRD03

For

Client: Asiatelco Technologies Co.

Production: Home Phone Connect

Model Name: V810T/V810TD/V810V/

V810VD/ V810A/ V810AD

Brand Name: ATEL

FCC ID: XYO-V810

Hardware Version: V1.0

Software Version: QC25_V8100_1.0.4.802

Issued date: 2020-12-16

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I20D00149-SRD03	00	2020-12-01	Initial creation of test report
I20D00149-SRD03	01	2020-12-16	First modification of test report

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	11
6. TEST EQUIPMENTS UTILIZED	12
6.1. CONDUCTED TEST SYSTEM	12
6.2. RADIATED EMISSION TEST SYSTEM	12
7. MEASUREMENT UNCERTAINTY	13
8. TEST ENVIRONMENT	14
ANNEX A. DETAILED TEST RESULTS	15
ANNEX A.1. MEASUREMENT METHOD	15

ANNEX A.2.	MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED.....	16
ANNEX A.3.	PEAK POWER SPECTRAL DENSITY (CONDUCTED)	17
ANNEX A.4.	OCCUPIED 6DB BANDWIDTH(CONDUCTED).....	21
ANNEX A.5.	99% OCCUPIED BANDWIDTH(CONDUCTED).....	25
ANNEX A.6.	TRANSMITTER SPURIOUS EMISSION	29
ANNEX A.7.	BAND EDGES COMPLIANCE	51
ANNEX A.8.	AC POWERLINE CONDUCTED EMISSION	56
ANNEX B.	ACCREDITATION CERTIFICATE	58

1. Test Laboratory

1.1. Testing Location

Company Name	East China Institute of Telecommunications
Address	Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	+86 21 63843300
FCC registration No	CN1177

1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	20%-75%

1.3. Project Data

Project Leader	Chen Minfei
Testing Start Date	2020-11-03
Testing End Date	2020-12-15

1.4. Signature



Liu Yan
(Prepared this test report)



Fan Songyan
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Asiatelco Technologies Co.
Address	#289 Bisheng Road, Building-8, 3F, Zhang jiang Hi-Tech Park, Pudong, Shanghai 201204, China
Telephone	/
Postcode	/

2.2. Manufacturer Information

Company Name	Asiatelco Technologies Co.
Address	#289 Bisheng Road, Building-8, 3F, Zhang jiang Hi-Tech Park, Pudong, Shanghai 201204, China
Telephone	/
Postcode	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1.About EUT

Production	Home Phone Connect
Model name	V810T/V810TD/V810V/V810VD/ V810A/ V810AD
Occupied Channel Bandwidth	20 MHz: 802.11 a/n/ac 40 MHz: 802.11 n/ac 80 MHz: 802.11 ac
WLAN Frequency	UNII 3: 5725MHz-5850MHz
WLAN type of modulation	OFDM
Extreme Temperature	-20/+60°C
Nominal Voltage	4.75V
Extreme High Voltage	5.00 V
Extreme Low Voltage	5.25V
Maximum of Antenna Gain	WiFi 5.8GHz: 5.2dBi

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2.Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N01	/	V1.0	QC25_V8100_1.0.4.802	2020-10-21
N04	/	V1.0	QC25_V8100_1.0.4.802	2020-10-21
N05	/	V1.0	QC25_V8100_1.0.4.802	2020-10-21

*EUT ID: is used to identify the test sample in the lab internally.

3.3.Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	RF cable	/	AE1

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

All technical documents are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; Subpart E—Unlicensed National Information Infrastructure Devices	2018-10-01
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
KDB 789033	Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2017

5. Test Results

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15	Verdict
Maximum Output Power	15.407	P
Power Spectral Density	15.407	P
Occupied 6dB Bandwidth	15.403	P
Band edge compliance	15.407	P
Transmitter Spurious Emission - Conducted	15.407	P
Transmitter Spurious Emission - Radiated	15.407	P
AC Powerline Conducted Emission	15.407	P

Note: Please refer to section 6 for detail; please refer to Annex A in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	5V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

5.2.Statements

The V810T/V810TD/V810V/V810VD/ V810A/ V810AD is a parent model for testing.
ECIT only performed test cases which identified with P/NP/NA/F results in Annex A.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Test Equipments Utilized

6.1. Conducted Test System

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ40	200063	R&S	2020-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z0 06-0007	TDL-Lambda	2020-05-10	1 year

6.2. Radiated Emission Test System

Item	Instrument Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2020-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2020-05-10	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2020-05-10	1 year
6	Loop Antenna	AL-130R	121083	COM-POWER	2019-12-26	3 years

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Climate chamber	UT333 BT	C191995461	UNI-T	2020-05-10	1 year

Anechoic chamber

Fully anechoic chamber by ETS.

7. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty is defined in ECIT documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Peak Power Spectral Density	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Occupied 6dB Bandwidth	5100MHz-5850MHz	95%	$\pm 62.04\text{Hz}$
Frequency Band Edges-Conducted	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Conducted Emission	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Conducted Emission	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Conducted Emission	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Conducted Emission	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Conducted Emission	20GHz-22GHz	95%	$\pm 0.88\text{dB}$
Conducted Emission	22GHz-26GHz	95%	$\pm 0.86\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
AC Power line Conducted Emission	0.15MHz-30MHz	95%	$\pm 3.66\text{ dB}$

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:


Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Detailed Test Results

ANNEX A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

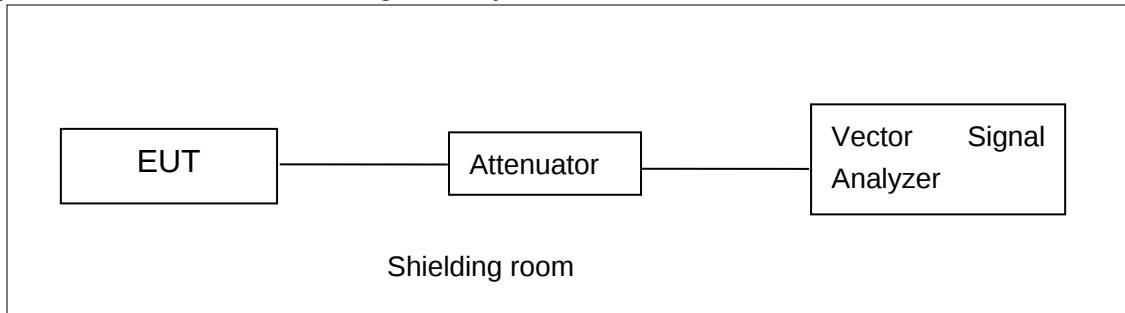


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

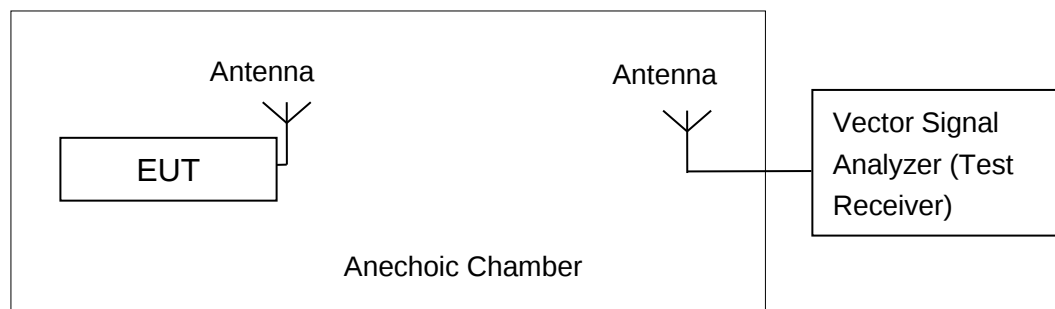

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

ANNEX A.2. Maximum Average Output Power-Conducted

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

Set the spectrum analyzer in the following:

Detector: RMS.

RBW=1MHz.

VBW=3MHz.

Sweep time = AUTO.

Span: 30MHz (for 20MHz); 60MHz (for 40MHz); 120MHz (for 80MHz).

Measurement Results:

U-NII-3:

Mode	Data Rate	Test Result(dBm)		
		5745MHz	5785MHz	5825MHz
802.11a	6Mbps	16.61	17.01	16.71
Duty Cycle Factor (dB)		0.13	0.13	0.13
802.11n(20MHz)	MCS0	16.65	17.01	16.69
Duty Cycle Factor (dB)		0.15	0.15	0.15
802.11ac(20MHz)	MCS0	16.67	17.03	16.93
Duty Cycle Factor (dB)		0.14	0.14	0.14
Mode	Data Rate	5755MHz	/	5795MHz
802.11n(40MHz)	MCS0	17.18	/	17.36
Duty Cycle Factor (dB)		0.35	/	0.35
802.11ac(40MHz)	MCS0	17.18	/	17.43
Duty Cycle Factor (dB)		0.43	/	0.43
Mode	Data Rate	/	5775MHz	/
802.11ac(80MHz)	MCS0	/	17.74	/
Duty Cycle Factor (dB)		/	1.06	/

The data rate 6Mbps or MCS0 are selected as worse condition, and the following cases are performed with this condition.





ANNEX A.3. Peak Power Spectral Density (conducted)


Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz


The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Results:

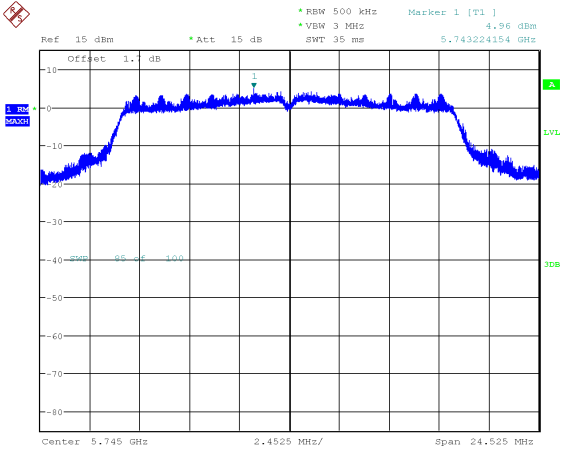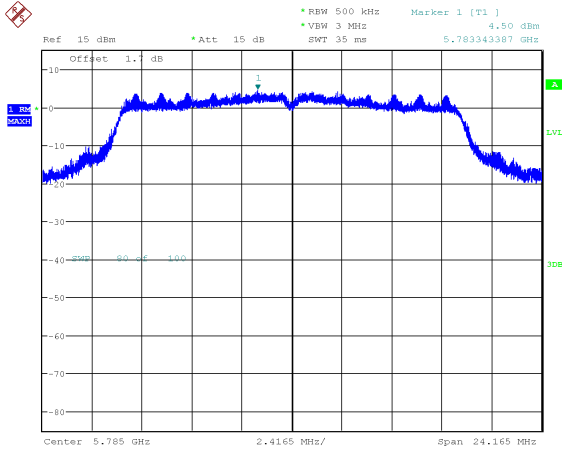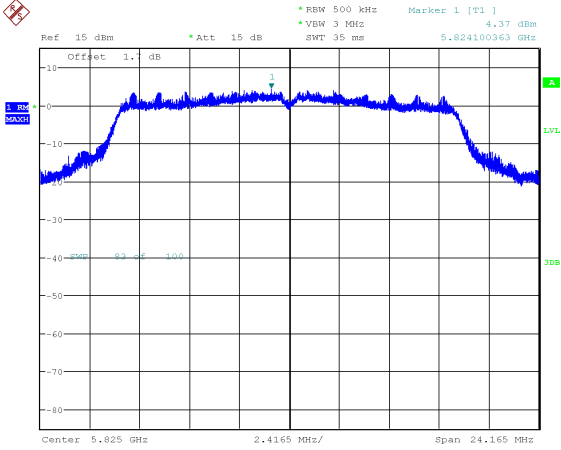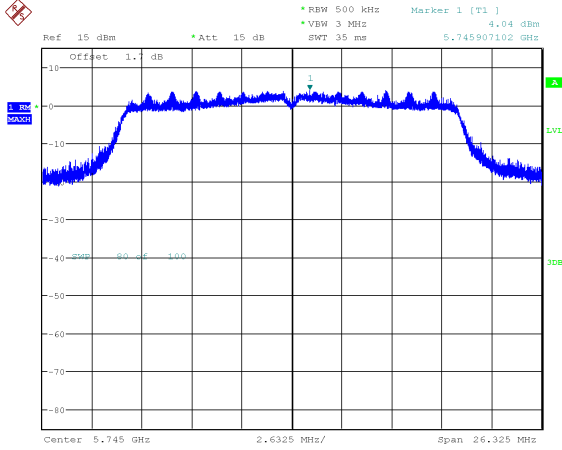Power Spectral Density(dBm/MHz) (802.11a, 5745MHz)	5.090	Power Spectral Density(dBm/MHz) (802.11a, 5785MHz)	4.629
 Date: 3.NOV.2020 12:30:45		 Date: 3.NOV.2020 12:31:37	
Power Spectral Density (dBm/MHz) (802.11a, 5825MHz)	4.496	Power Spectral Density(dBm/MHz) (802.11n-HT20, 5745MHz)	4.187
 Date: 3.NOV.2020 12:32:30		 Date: 3.NOV.2020 12:34:08	

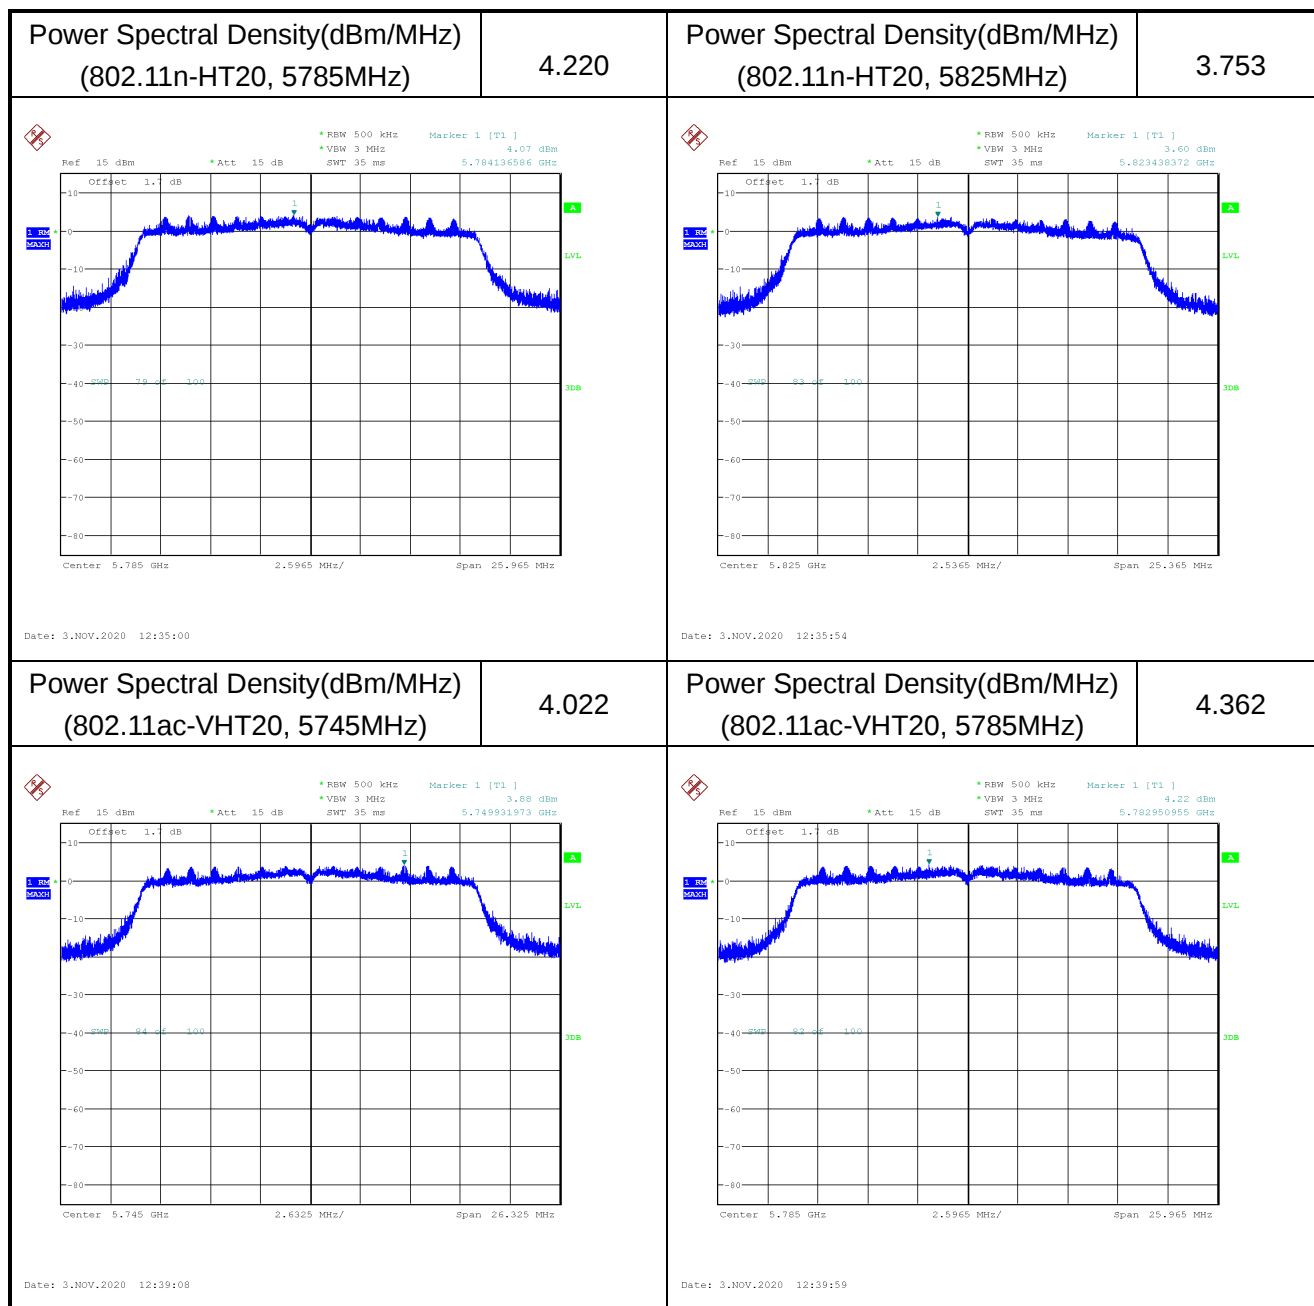

Power Spectral Density(dBm/MHz) (802.11ac-VHT20, 5825MHz)	3.735	Power Spectral Density(dBm/MHz) (802.11n-HT40, 5755MHz)	2.036
Power Spectral Density(dBm/MHz) (802.11n-HT40, 5795MHz)	2.251	Power Spectral Density(dBm/MHz) (802.11ac-VHT40, 5755MHz)	2.370

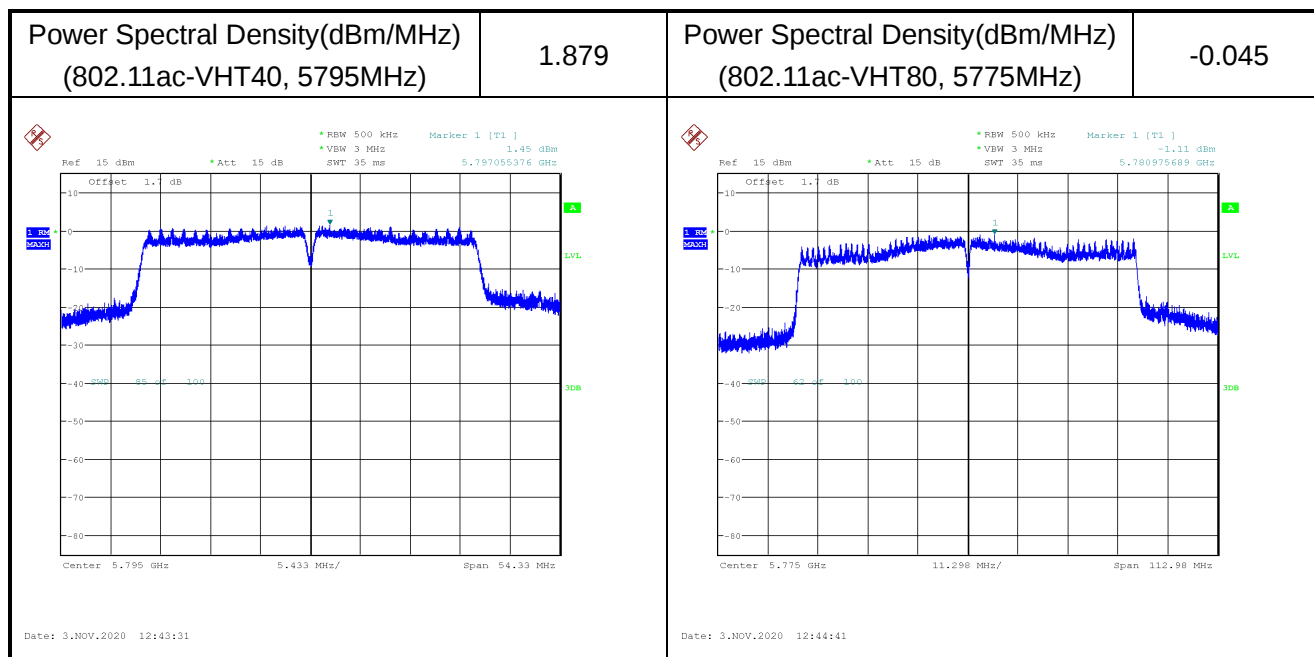

ANNEX A.4. Occupied 6dB Bandwidth(conducted)

Measurement Limit:


Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Result:

Occupied 6dB Bandwidth (MHz) (802.11a, 5745MHz) Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 3.NOV.2020 11:45:54	16.35	Occupied 6dB Bandwidth (MHz) (802.11a, 5785MHz) Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 3.NOV.2020 11:47:06	16.11
Occupied 6dB Bandwidth (MHz) (802.11a, 5825MHz) Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 3.NOV.2020 11:48:08	16.11	Occupied 6dB Bandwidth (MHz) (802.11n-HT20, 5745MHz) Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 3.NOV.2020 11:49:28	17.55

Occupied 6dB Bandwidth (MHz) (802.11n-HT20, 5785MHz)	17.31	Occupied 6dB Bandwidth (MHz) (802.11n-HT20, 5825MHz)	16.91
Ref: 20 dBm, Att: 15 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Marker 3 [T1]: -3.16 dBm, 5.793493590 GHz Marker 1 [T1]: 2.66 dBm, 5.785000000 GHz Marker 2 [T1]: -1.10 dBm, 5.785000000 GHz Center: 5.785 GHz, Span: 50 MHz Date: 3.NOV.2020 11:50:40		Ref: 20 dBm, Att: 15 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Marker 3 [T1]: -3.44 dBm, 5.833092949 GHz Marker 1 [T1]: 2.24 dBm, 5.825000000 GHz Marker 2 [T1]: -1.59 dBm, 5.825000000 GHz Center: 5.825 GHz, Span: 50 MHz Date: 3.NOV.2020 11:52:20	
Occupied 6dB Bandwidth (MHz) (802.11ac-VHT20, 5745MHz)	17.55	Occupied 6dB Bandwidth (MHz) (802.11ac-VHT20, 5785MHz)	17.31
Ref: 20 dBm, Att: 15 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Marker 3 [T1]: -2.63 dBm, 5.753733974 GHz Marker 1 [T1]: 2.59 dBm, 5.745000000 GHz Marker 2 [T1]: -3.41 dBm, 5.745000000 GHz Center: 5.745 GHz, Span: 50 MHz Date: 3.NOV.2020 11:59:33		Ref: 20 dBm, Att: 15 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Marker 3 [T1]: -3.16 dBm, 5.793493590 GHz Marker 1 [T1]: 2.64 dBm, 5.785000000 GHz Marker 2 [T1]: -2.83 dBm, 5.785000000 GHz Center: 5.785 GHz, Span: 50 MHz Date: 3.NOV.2020 12:00:38	

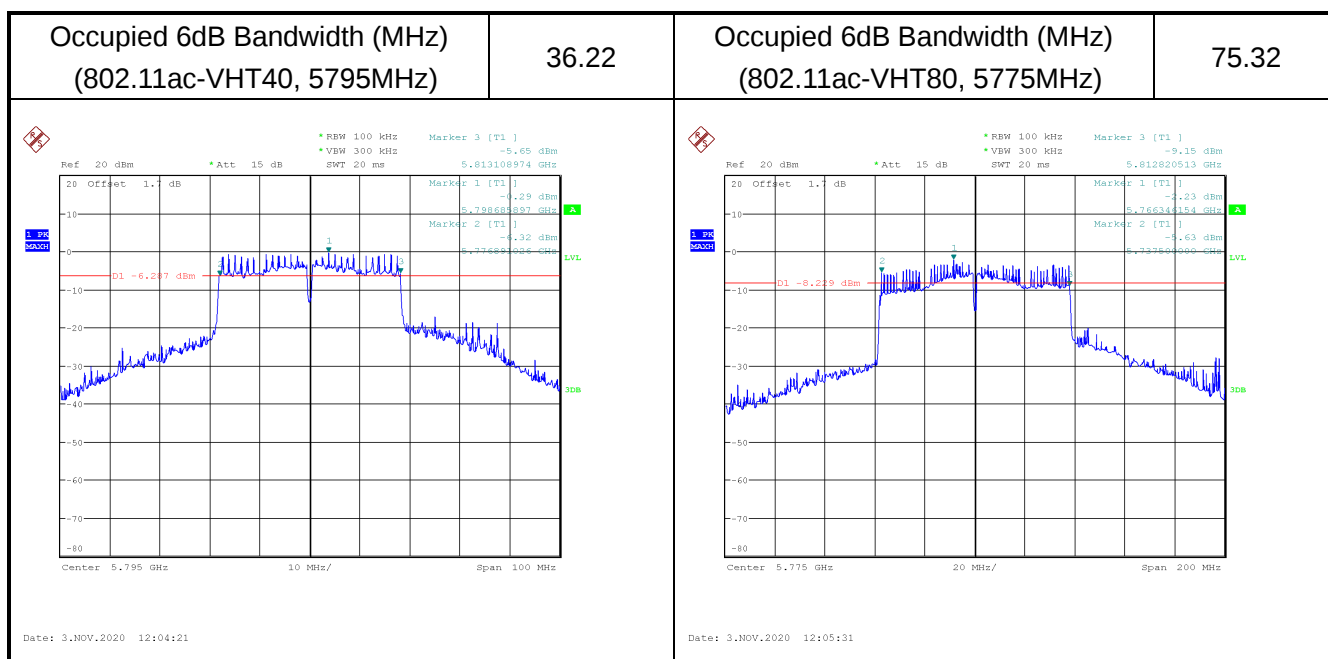

ANNEX A.5. 99% Occupied Bandwidth(conducted)


Measurement Limit:


Standard	Limit (MHz)
FCC 47 CFR Part 15.407 (e)	/


The measurement is made according to KDB 789033

Measurement Result:

99% Occupied Bandwidth(MHz) (802.11a, 5745MHz)	21.474	99% Occupied Bandwidth(MHz) (802.11a, 5785MHz)	20.433
Ref: 20 dBm, Att: 15 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.743317308 GHz, 7.77 dBm, 1.474358774 MHz, -11.86 dBm, 5.734263821 GHz, 5.75573179 GHz, LVL, 30dB, Center: 5.745 GHz, 5 MHz/, Span: 50 MHz, Date: 2.DEC.2020 10:54:35		Ref: 20 dBm, Att: 15 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.760000000 GHz, -26.10 dBm, 0.432631308 MHz, -11.10 dBm, 5.774661462 GHz, 5.795091154 GHz, LVL, 30dB, Center: 5.785 GHz, 5 MHz/, Span: 50 MHz, Date: 2.DEC.2020 10:55:48	
99% Occupied Bandwidth(MHz) (802.11a, 5825MHz)	20.353	99% Occupied Bandwidth(MHz) (802.11n-HT20, 5745MHz)	21.554
Ref: 20 dBm, Att: 15 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.800000000 GHz, -27.11 dBm, 0.352564103 MHz, -11.86 dBm, 5.814501205 GHz, 5.834855769 GHz, LVL, 30dB, Center: 5.825 GHz, 5 MHz/, Span: 50 MHz, Date: 2.DEC.2020 10:56:58		Ref: 20 dBm, Att: 15 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.770000000 GHz, -27.13 dBm, 1.554481179 MHz, -11.18 dBm, 5.734661462 GHz, 5.756217949 GHz, LVL, 30dB, Center: 5.745 GHz, 5 MHz/, Span: 50 MHz, Date: 2.DEC.2020 10:58:42	

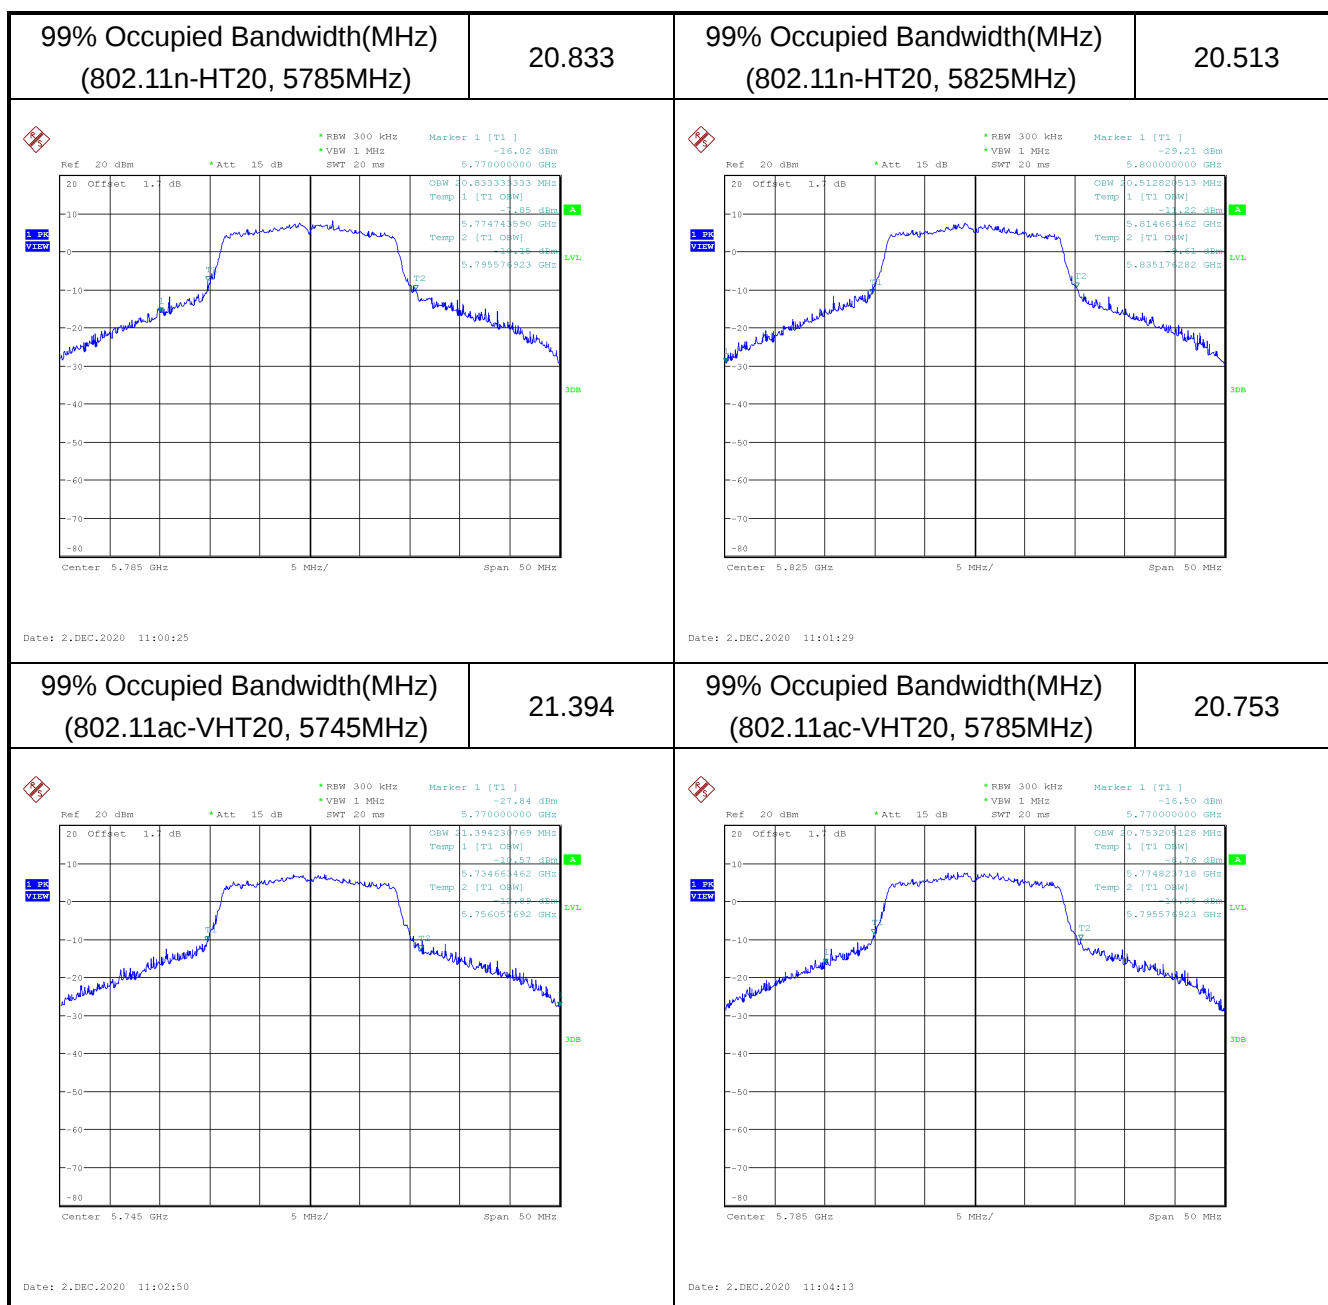

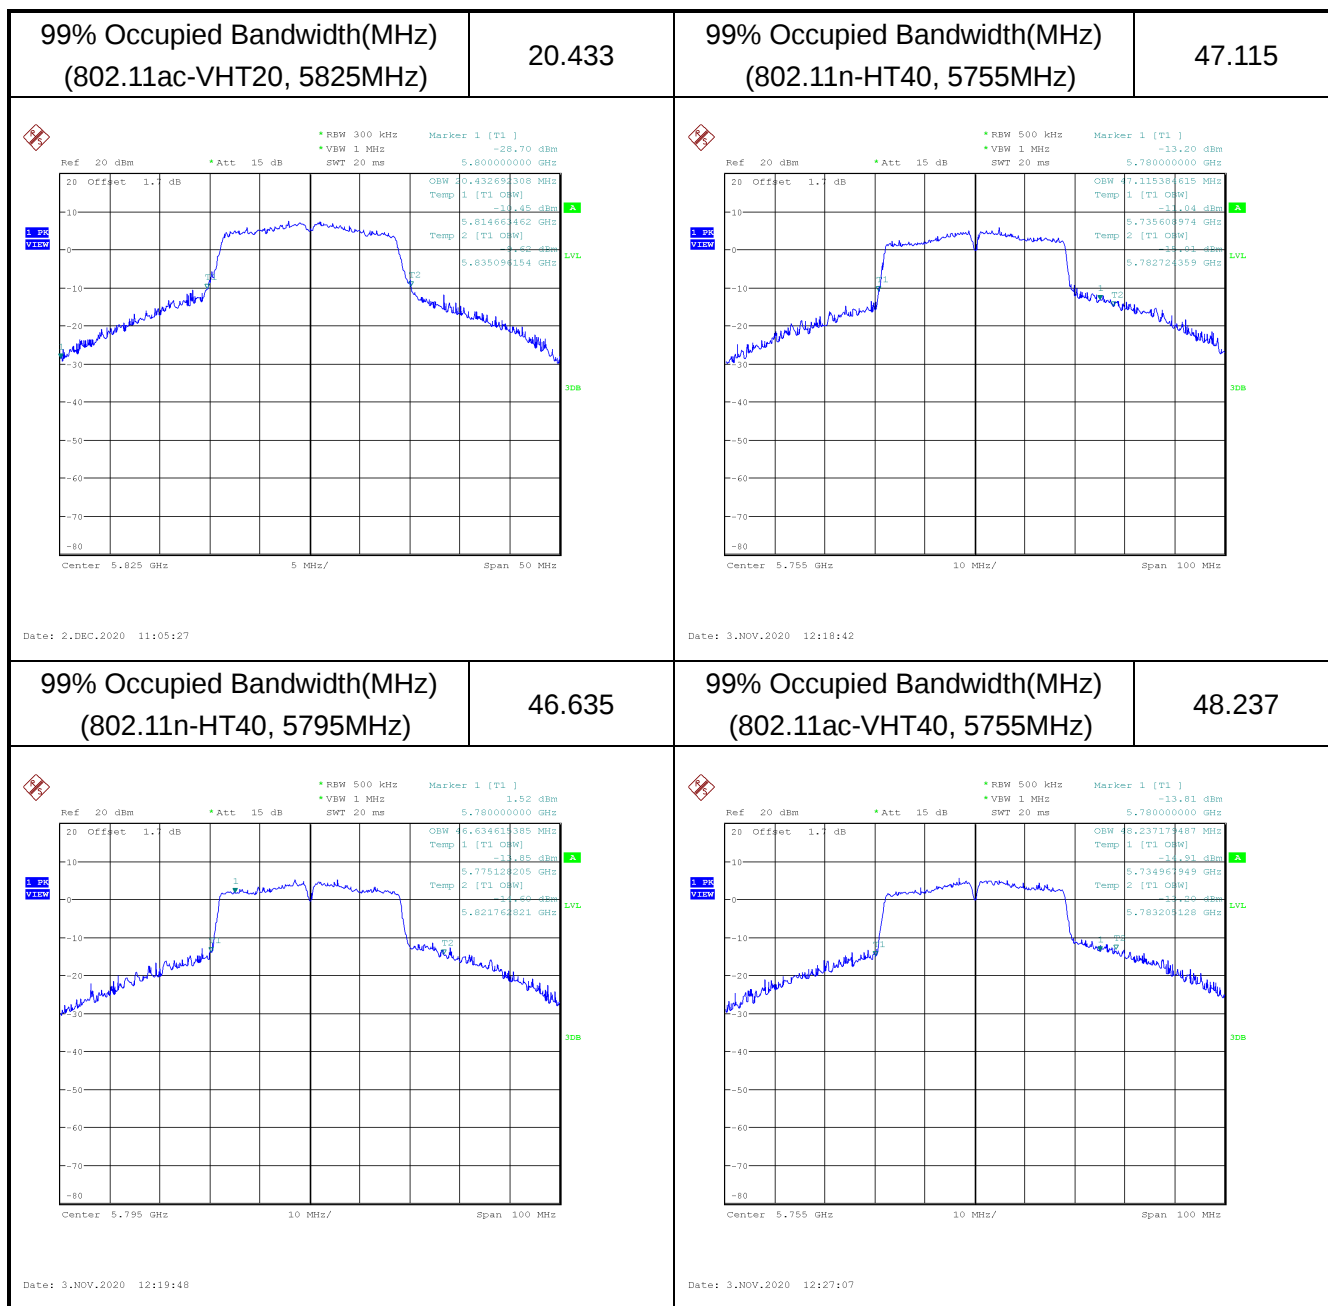

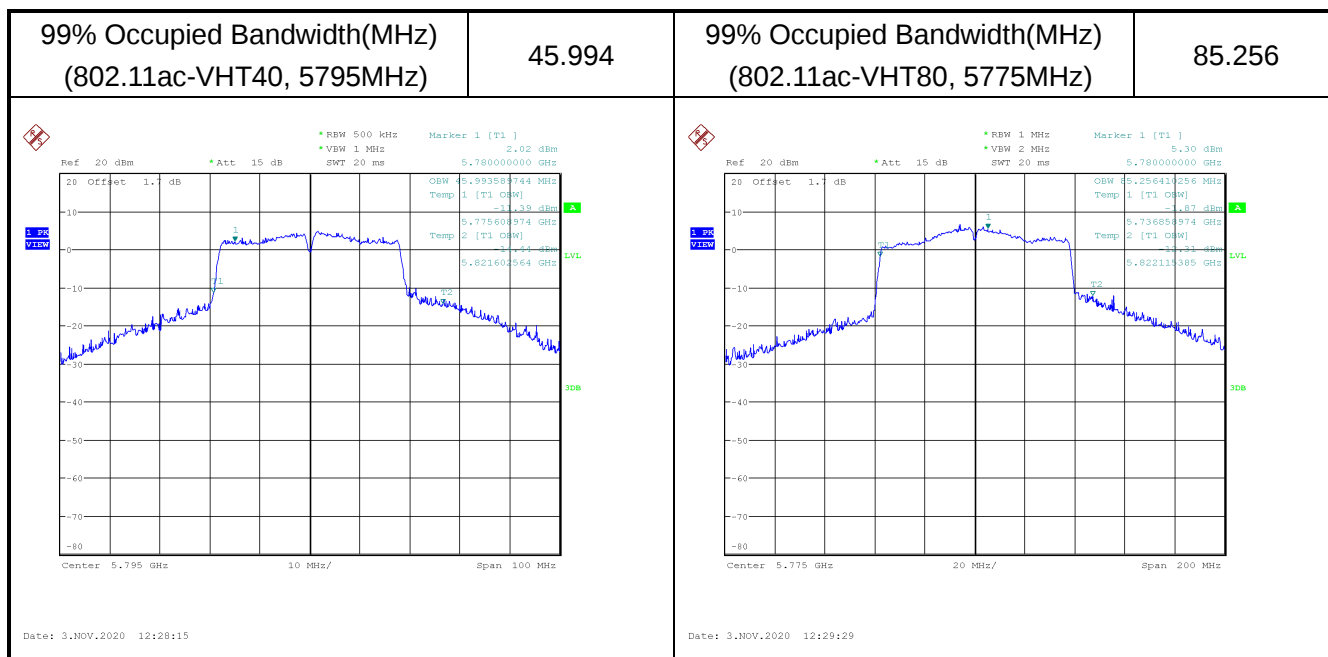

ANNEX A.6. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009-0.490	2400/F(kHz)	/
0.490-1.705	24000/F(kHz)	/
1.705-30	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

A.5.1 Transmitter Spurious Emission – Conducted


Modulation type and data rate tested (Only worst case result is given below):

Mode	Data rate	Channel
802.11a	6Mbps	149(5745MHz)
802.11n-HT20	MCS0	149(5745MHz)
802.11n-HT40	MCS0	151(5755MHz)
802.11ac-VHT20	MCS0	149(5745MHz)
802.11ac-VHT40	MCS0	151(5755MHz)
802.11ac-VHT80	MCS0	155(5775MHz)

Measurement Results:

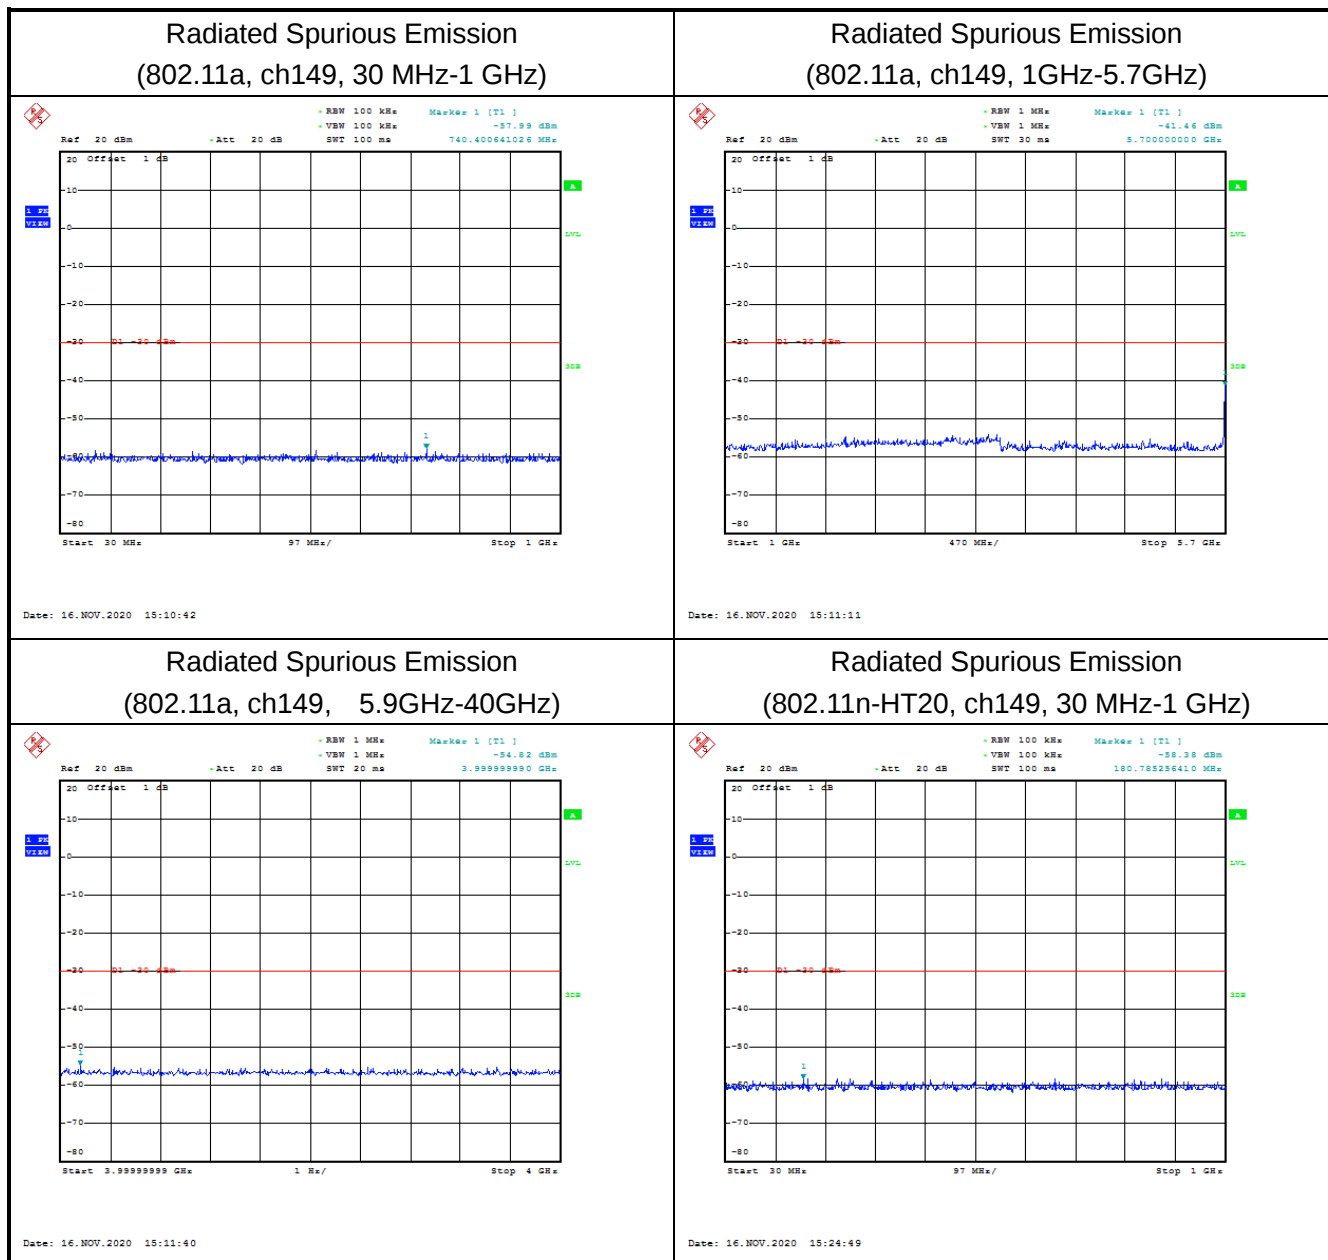


Radiated Spurious Emission (802.11n-HT20, ch149, 1GHz-5.7GHz)

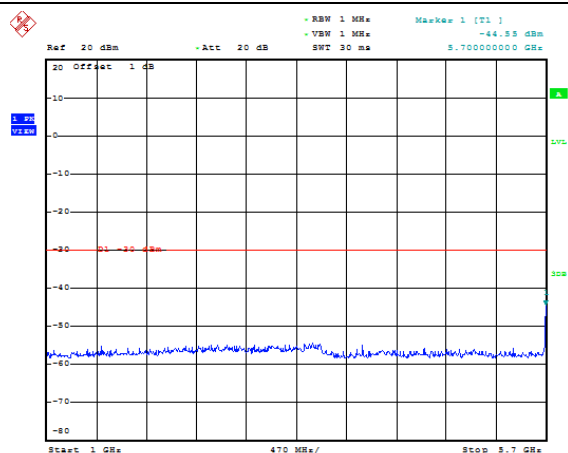


Date: 16.NOV.2020 15:25:18

Radiated Spurious Emission (802.11n-HT20, ch149, 5.9GHz-40GHz)

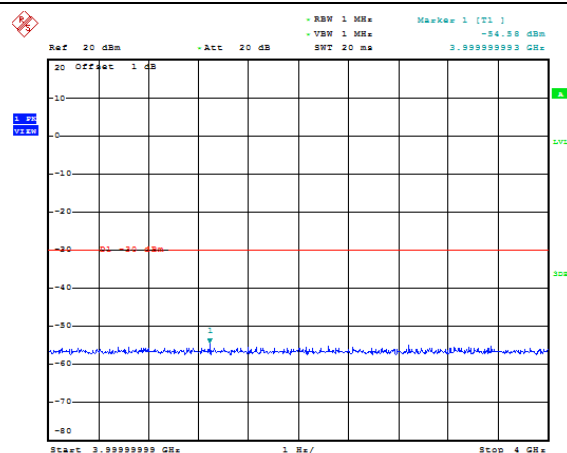


Date: 16.NOV.2020 15:25:47

Radiated Spurious Emission (802.11ac-VHT20, ch149, 30 MHz-1 GHz)

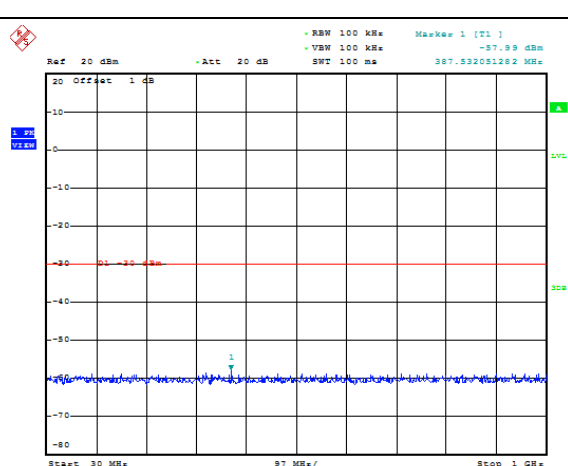


Date: 16.NOV.2020 15:40:18


Radiated Spurious Emission (802.11ac-VHT20, ch149, 1GHz-5.7GHz)

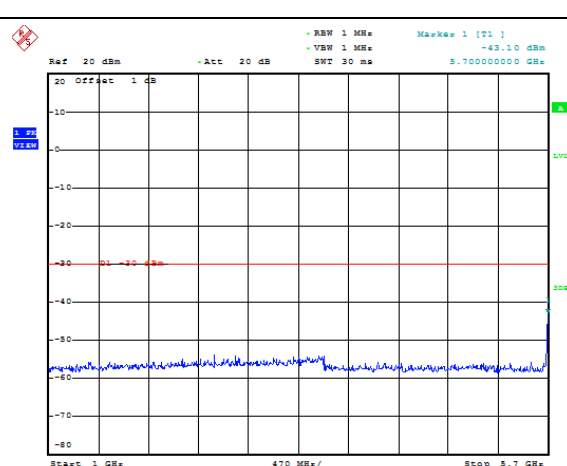

Date: 16.NOV.2020 15:40:48

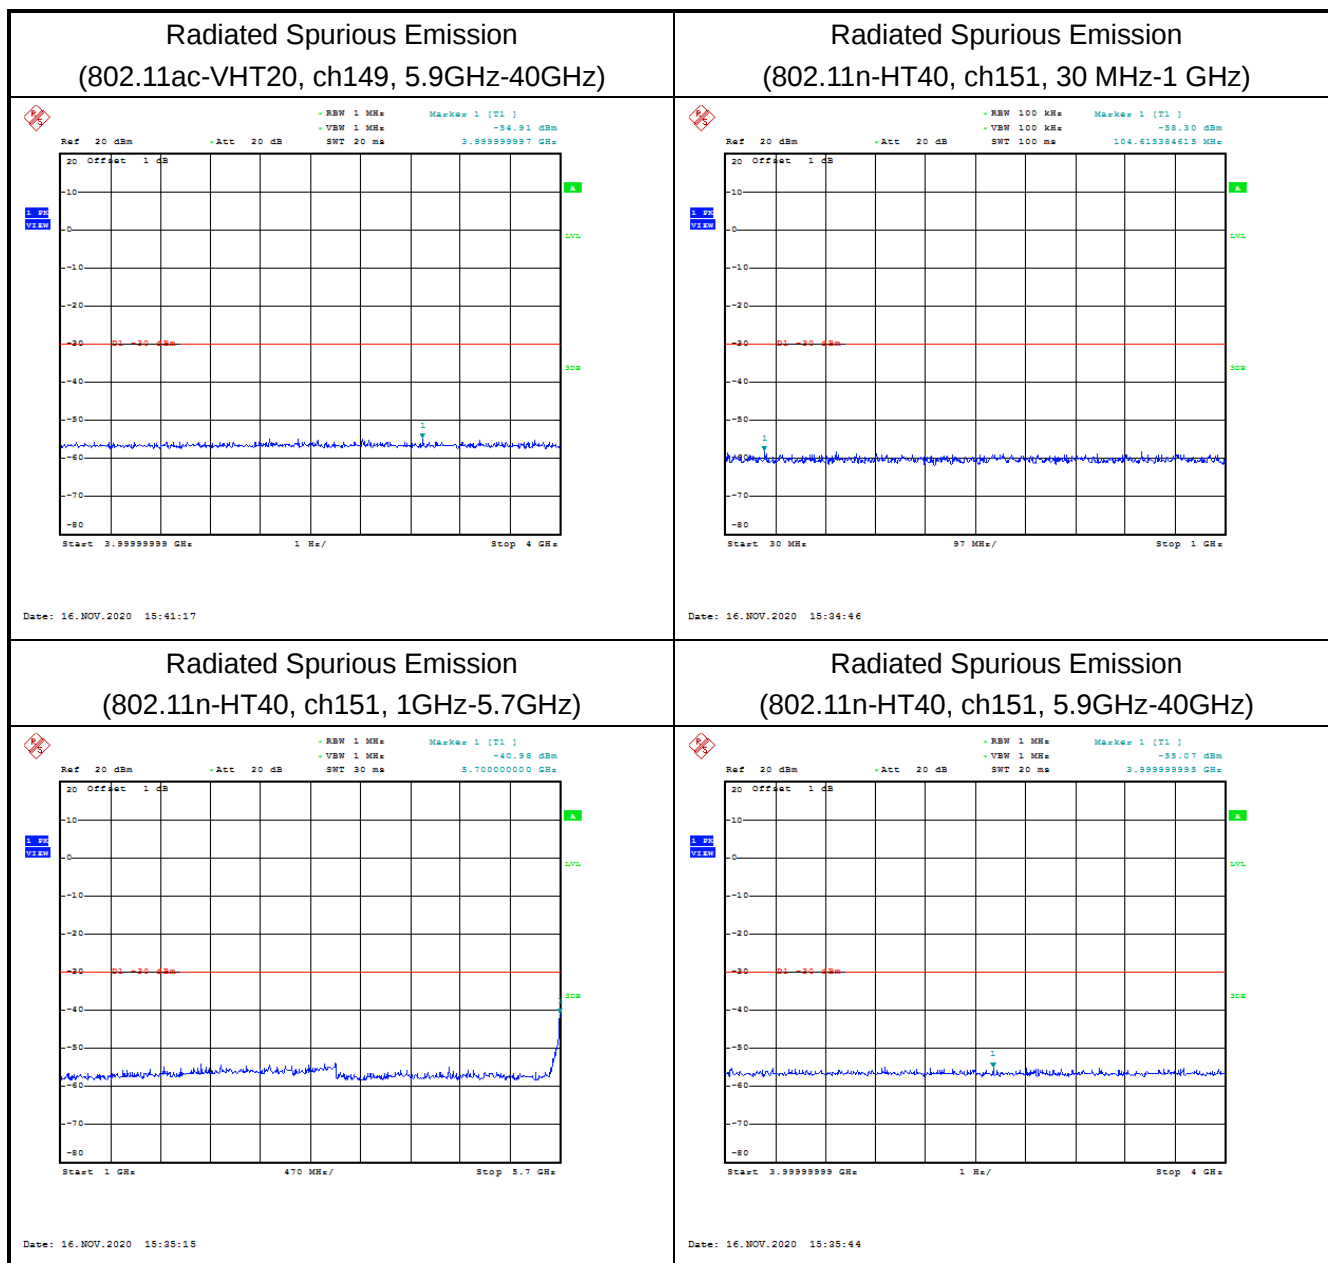


Radiated Spurious Emission (802.11ac-VHT40, ch151, 30 MHz-1 GHz)

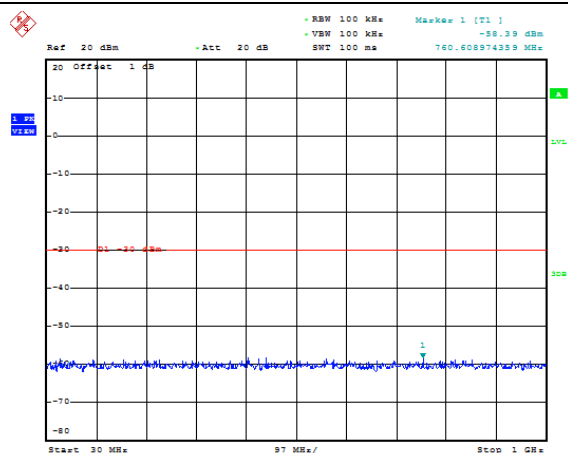


Date: 16.NOV.2020 15:48:42

Radiated Spurious Emission (802.11ac-VHT40, ch151, 1GHz-5.7GHz)

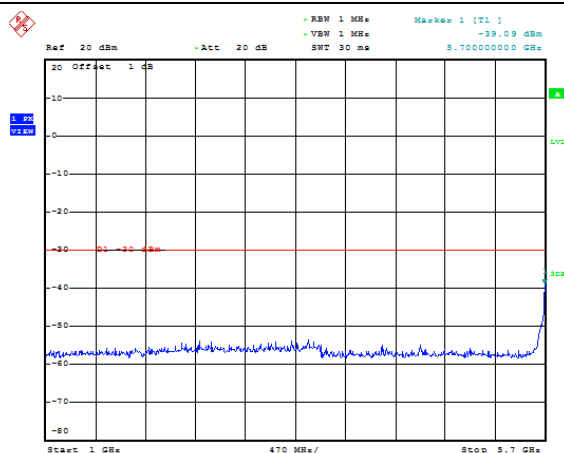


Date: 16.NOV.2020 15:49:11

Radiated Spurious Emission (802.11ac-VHT40, ch151, 5.9GHz-40GHz)

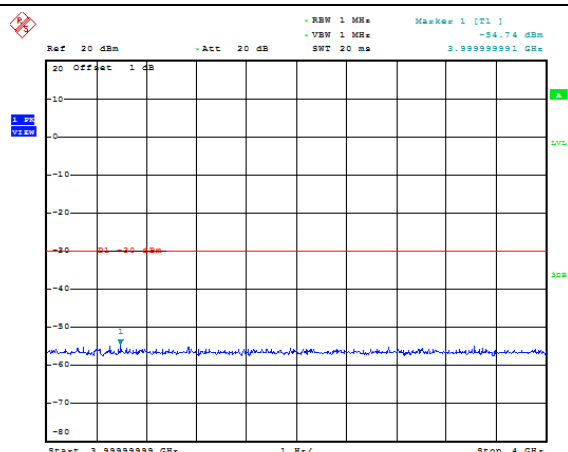


Date: 16.NOV.2020 15:49:41

Radiated Spurious Emission (802.11ac-VHT80, ch155, 30 MHz-1 GHz)

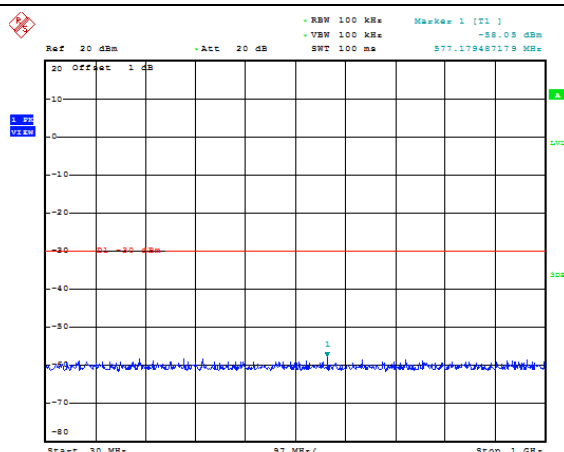


Date: 16.NOV.2020 15:55:02

Radiated Spurious Emission (802.11ac-VHT80, ch155, 1GHz-5.7GHz)

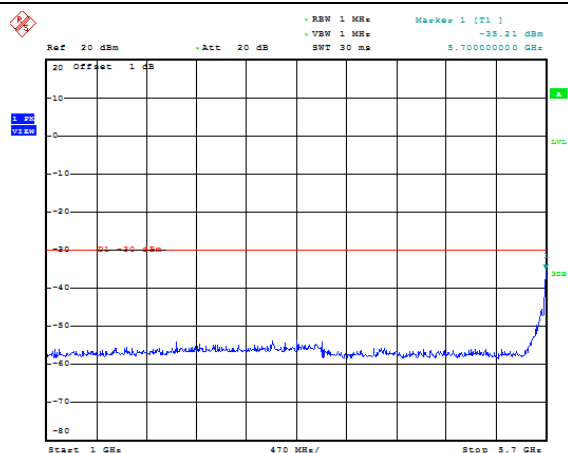

Date: 16.NOV.2020 15:55:22

Radiated Spurious Emission (802.11ac-VHT80, ch155, 5.9GHz-40GHz)

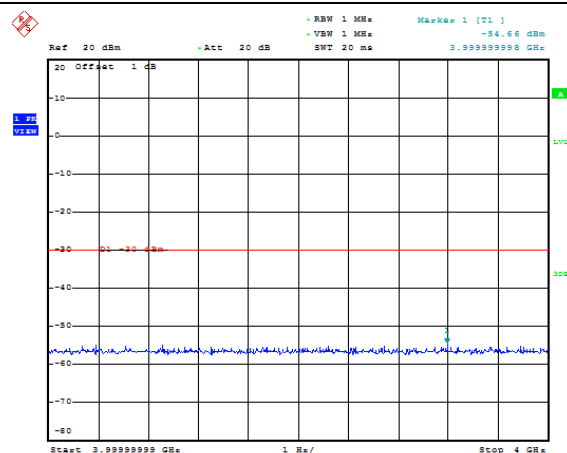

Date: 16.NOV.2020 15:56:01

A.5.2 Transmitter Spurious Emission - Radiated


Modulation type and data rate tested (Only worst case result is given below):

Mode	Data rate	Channel
802.11a	6Mbps	149(5745MHz)
802.11n-HT20	MCS0	149(5745MHz)
802.11n-HT40	MCS0	151(5755MHz)
802.11ac-VHT20	MCS0	149(5745MHz)
802.11ac-VHT40	MCS0	151(5755MHz)
802.11ac-VHT80	MCS0	155(5775MHz)


Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
$f \leq 1\text{GHz}$	3.9
$f > 1\text{GHz}$	4.3


Measurement Results:

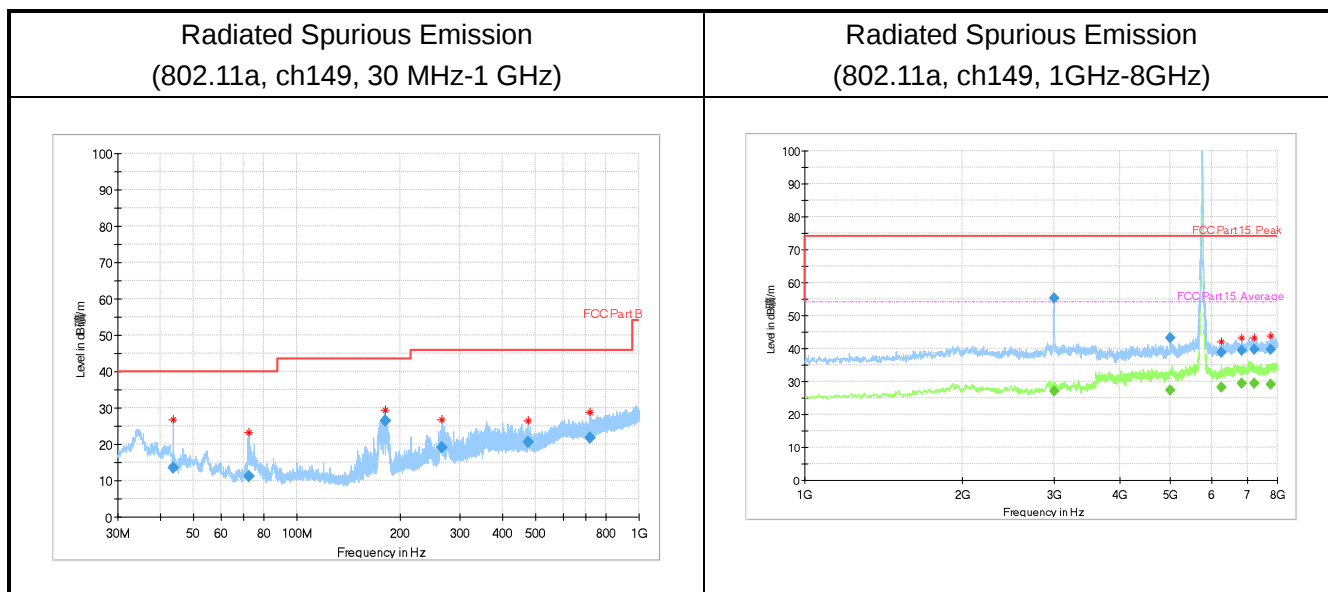


Radiated Spurious Emission
(802.11a, ch149, 8GHz-18GHz)

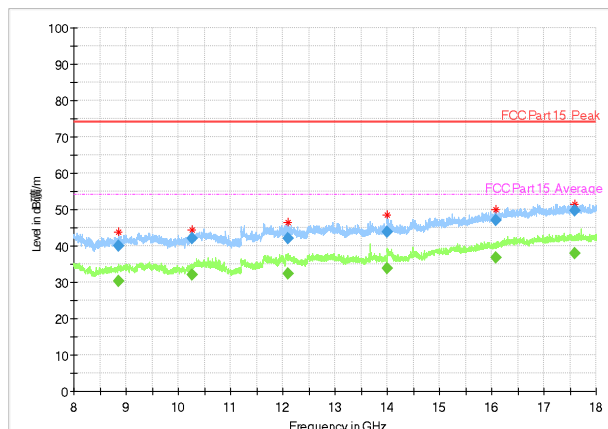


Radiated Spurious Emission
(802.11a, ch149, 18GHz-25.6GHz)

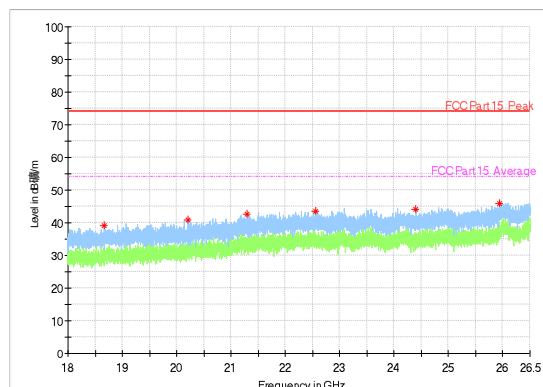


Radiated Spurious Emission
(802.11a, ch149, 25.6GHz-40GHz)

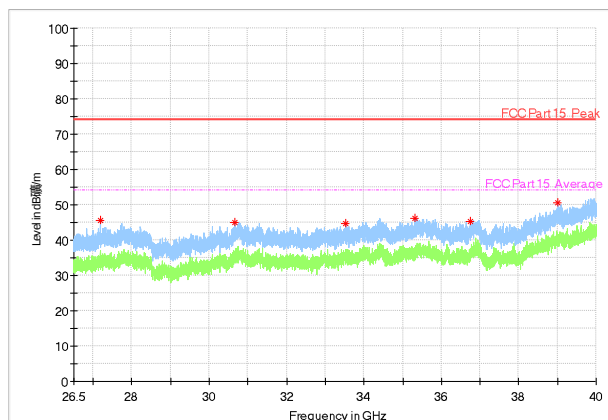


Radiated Spurious Emission
(802.11n-HT20, ch149, 30 MHz-1 GHz)

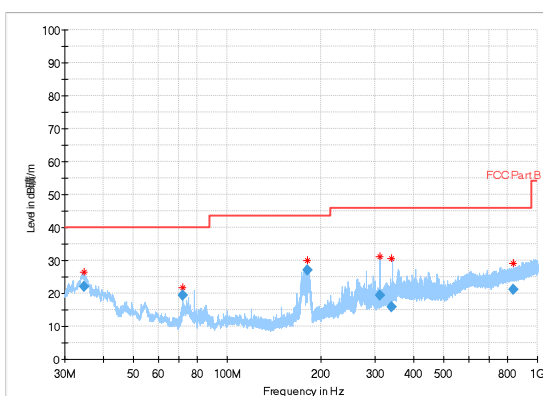


Radiated Spurious Emission
(802.11n-HT20, ch149, 1GHz-8GHz)

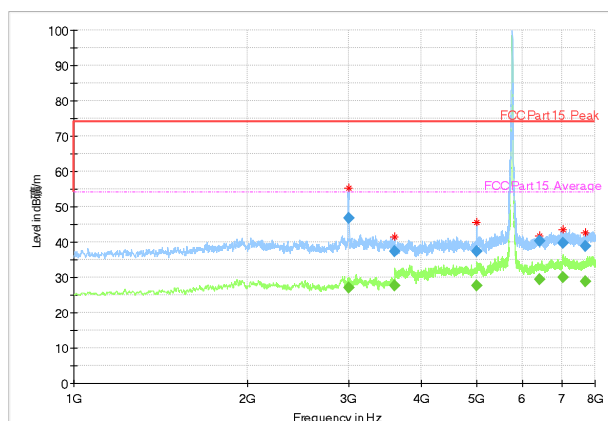


Radiated Spurious Emission
(802.11n-HT20, ch149, 8GHz-18GHz)

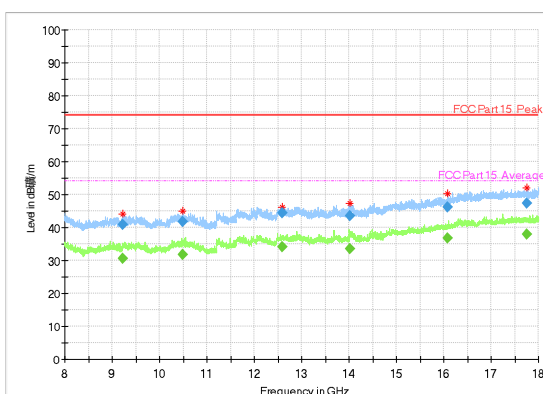


Radiated Spurious Emission
(802.11n-HT20, ch149, 18GHz-25.6GHz)

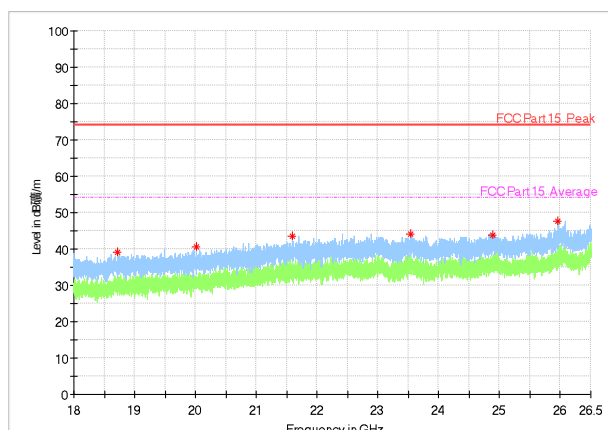


Radiated Spurious Emission
(802.11n-HT20, ch149, 25.6GHz-40GHz)

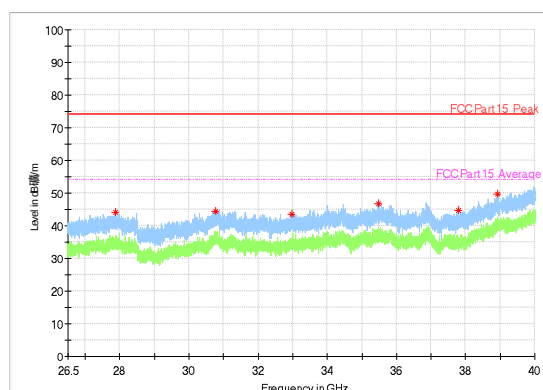


Radiated Spurious Emission
(802.11ac-VHT20, ch149, 30 MHz-1 GHz)

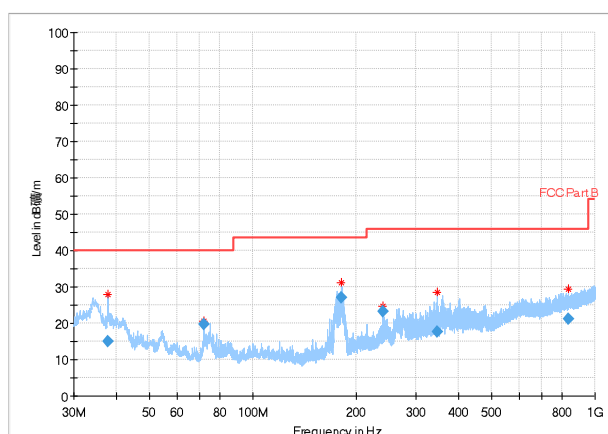


Radiated Spurious Emission
(802.11ac-VHT20, ch149, 1GHz-8GHz)

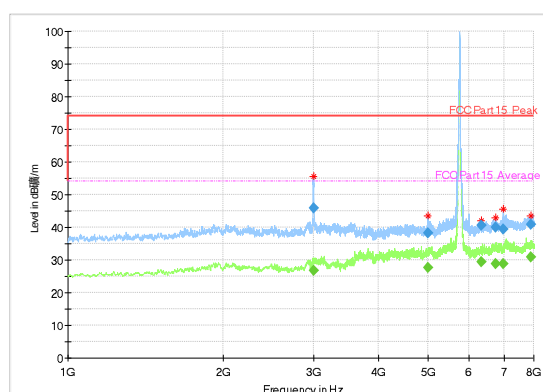


Radiated Spurious Emission
(802.11ac-VHT20, ch149, 8GHz-18GHz)

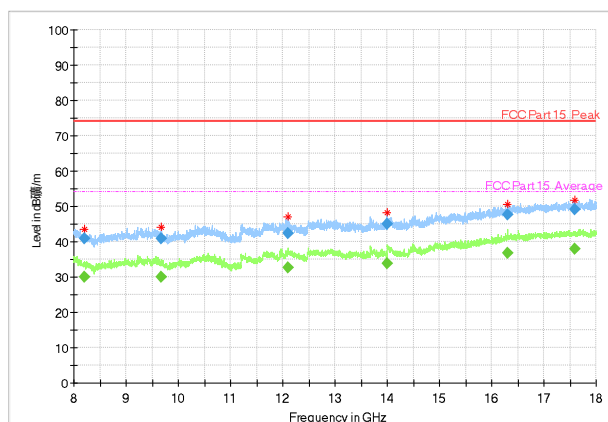


Radiated Spurious Emission
(802.11ac-VHT20, ch149, 18GHz-25.6GHz)

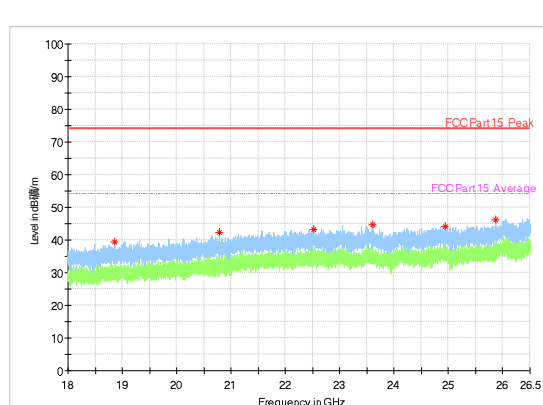


Radiated Spurious Emission
(802.11ac-VHT20, ch149, 25.6GHz-40GHz)

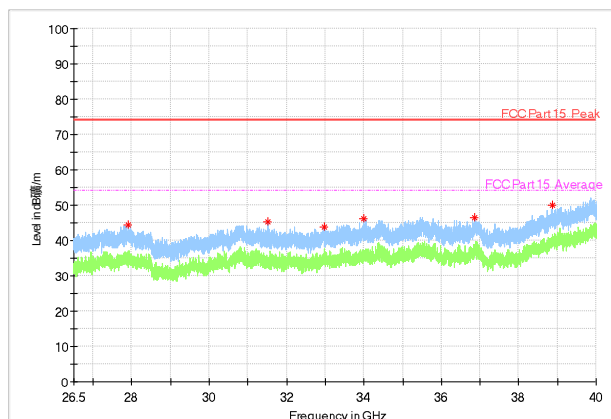


Radiated Spurious Emission
(802.11n-HT40, ch151, 30 MHz-1 GHz)

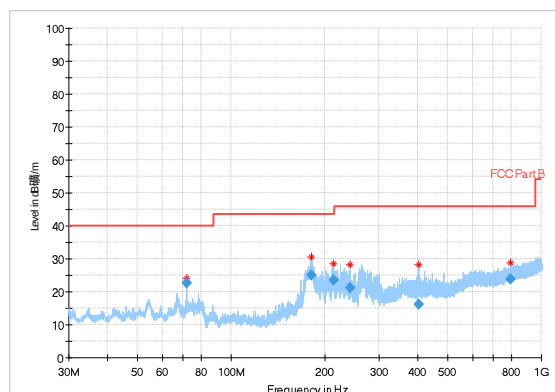


Radiated Spurious Emission
(802.11n-HT40, ch151, 1GHz-8GHz)

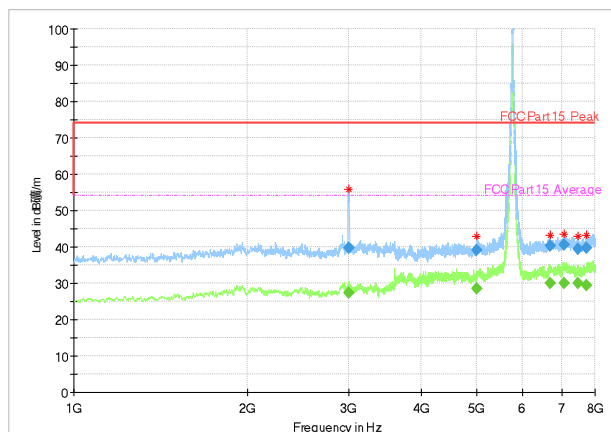


Radiated Spurious Emission
(802.11n-HT40, ch151, 8GHz-18GHz)

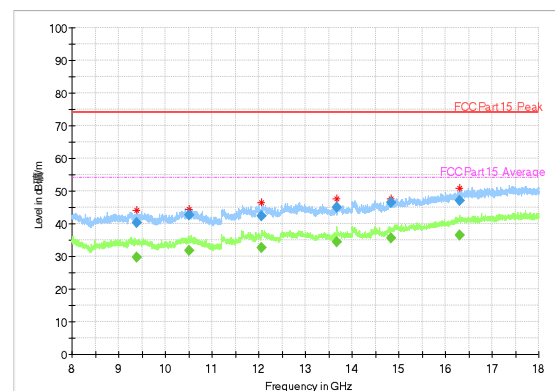


Radiated Spurious Emission
(802.11n-HT40, ch151, 18GHz-25.6GHz)

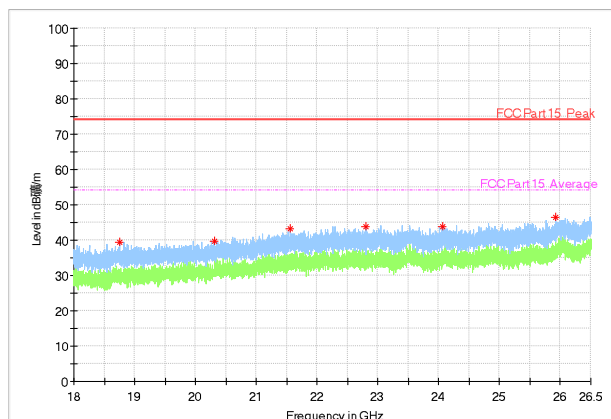


Radiated Spurious Emission
(802.11n-HT40, ch151, 25.6GHz-40GHz)

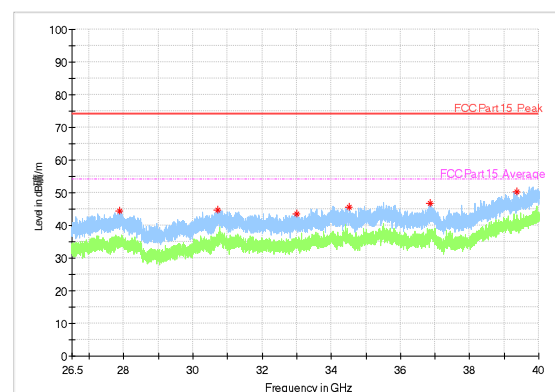


Radiated Spurious Emission
(802.11ac-VHT40, ch151, 30 MHz-1 GHz)

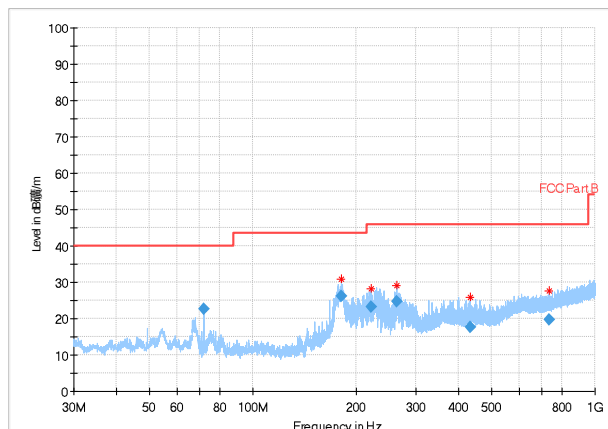


Radiated Spurious Emission
(802.11ac-VHT40, ch151, 1GHz-8GHz)

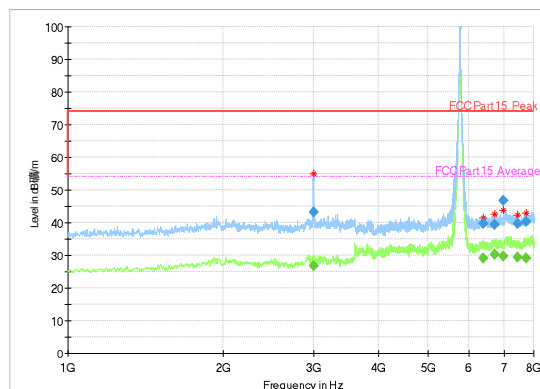


Radiated Spurious Emission
(802.11ac-VHT40, ch151, 8GHz-18GHz)

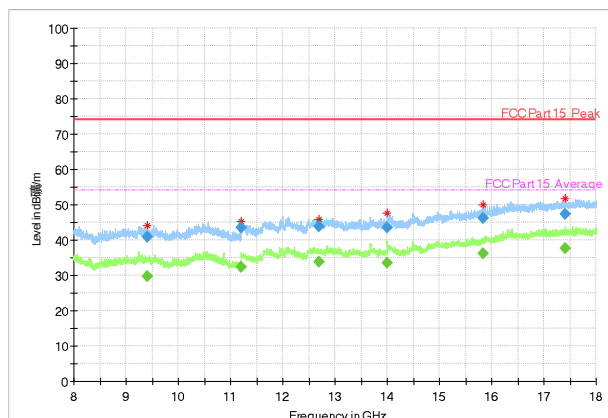


Radiated Spurious Emission
(802.11ac-VHT40, ch151, 18GHz-25.6GHz)

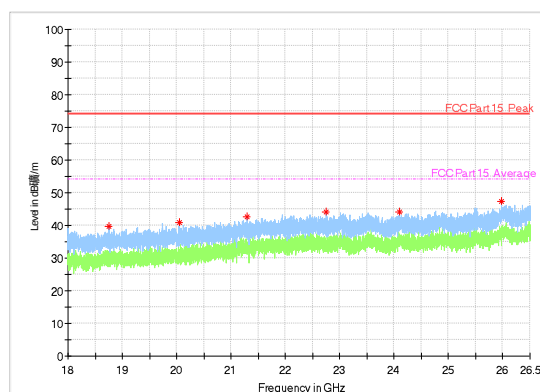


Radiated Spurious Emission
(802.11ac-VHT40, ch151, 25.6GHz-40GHz)

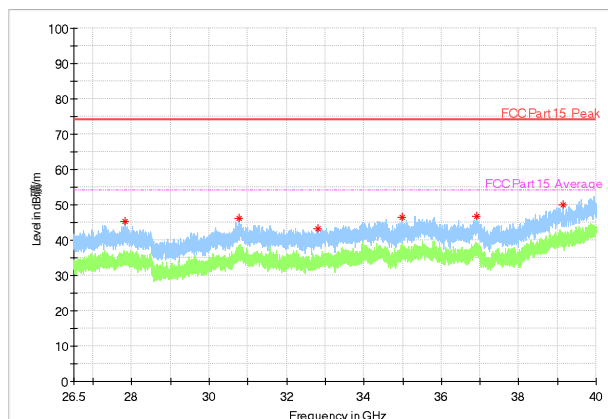

Radiated Spurious Emission
(802.11ac-VHT80, ch155, 30 MHz-1 GHz)

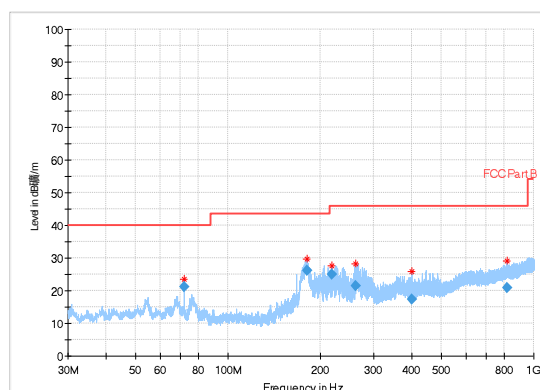

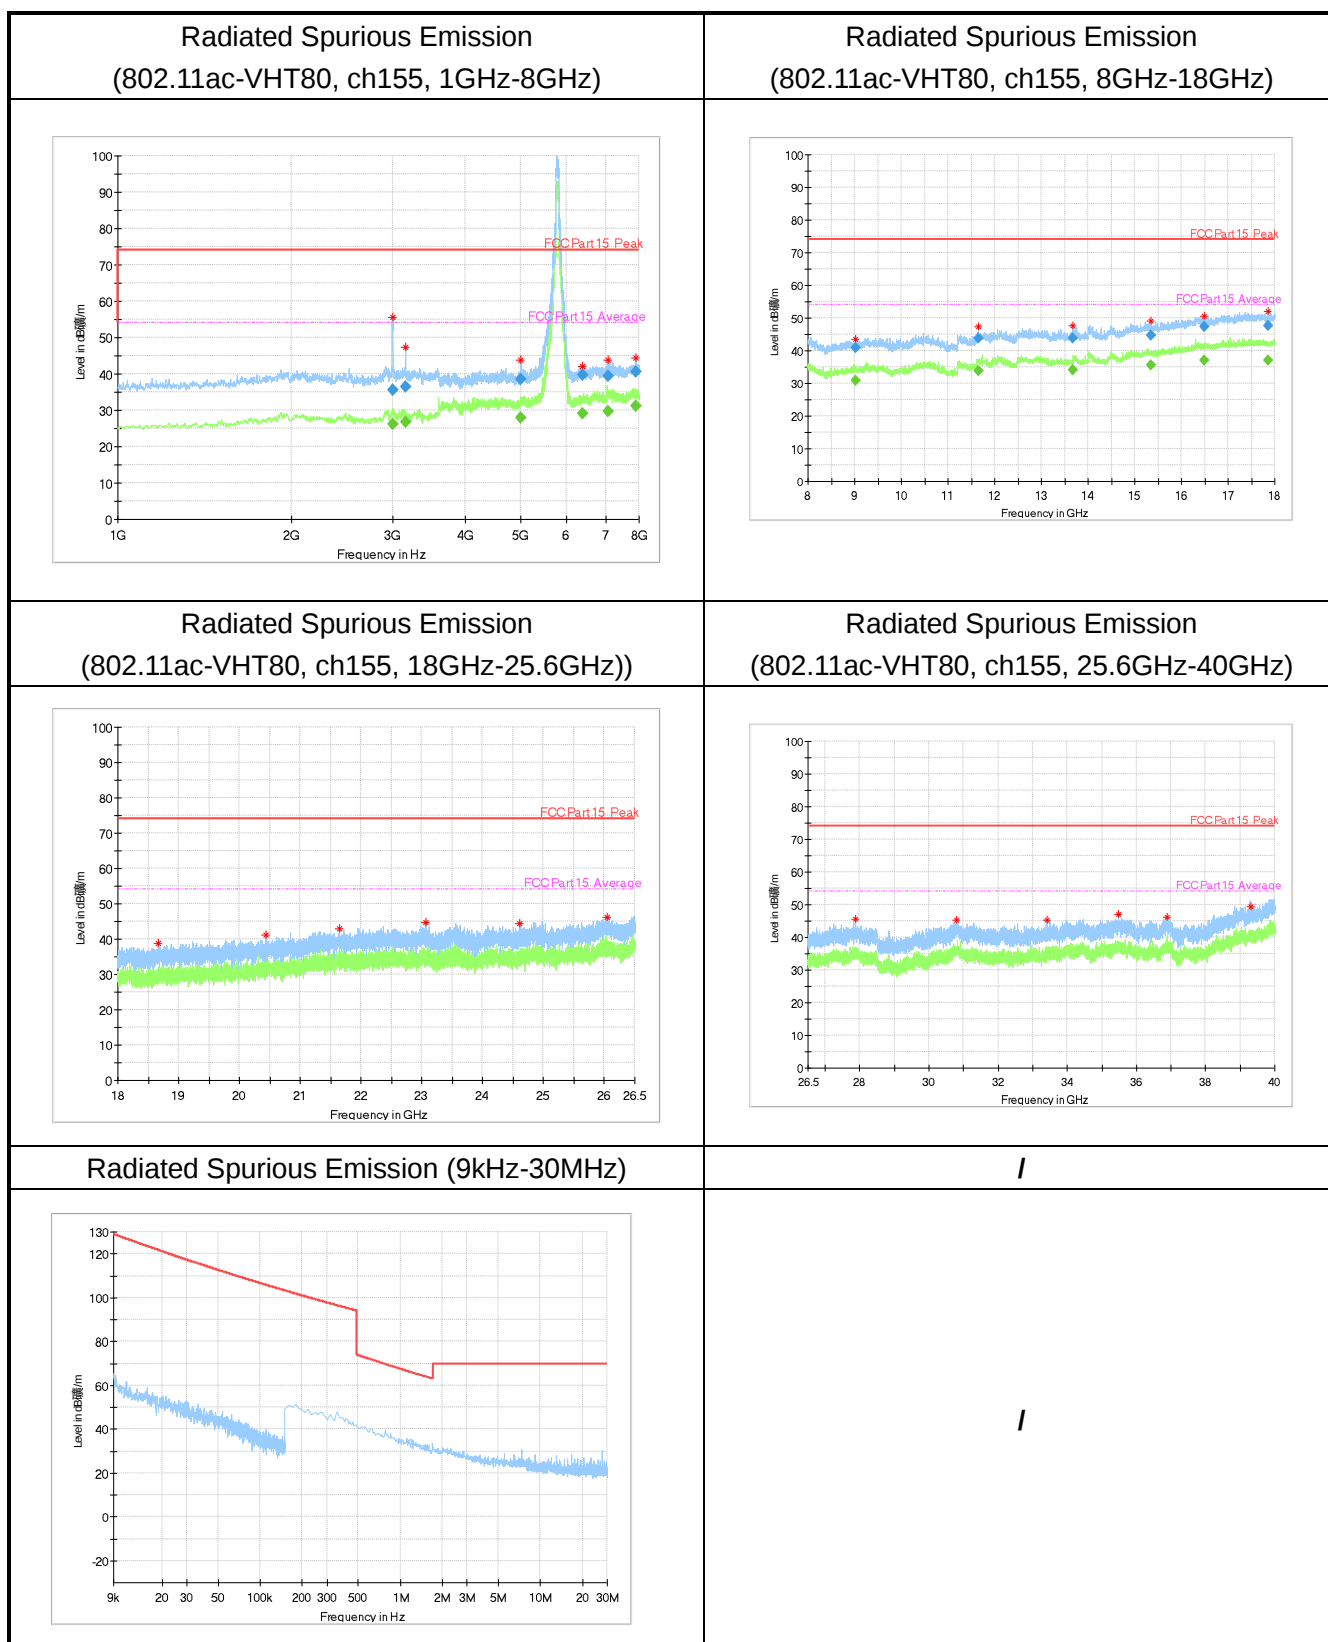

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

RSE-11A-CH149-30M-1G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
43.5	13.64	-15.9	29.54	V
72.6	11.25	-18.5	29.75	H
181.2	26.52	-15.8	42.32	H
264.6	19.04	-12.4	31.44	H
474.3	20.67	-7.8	28.47	H
718.9	21.89	-3.1	24.99	H

RSE-11A-CH149-1G-8G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2998.6	55.28	3.2	52.08	H
4989.0	43.26	5	38.26	H
6258.8	38.78	3.5	35.28	H
6849.4	39.45	4.2	35.25	V
7234.4	39.56	4.5	35.06	V
7749.6	39.56	4.8	34.76	V

RSE-11A-CH149-1G-8G-N04 (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2998.6	27.09	3.2	23.89	H

RSE-11A-CH149-8G-18G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
8864.4	40.11	4.8	35.31	H
10267.8	42.12	7.9	34.22	V
12108.8	42.16	10.9	31.26	H
14001.0	43.86	12.7	31.16	H
16077.0	47.09	16.4	30.69	H
17583.6	49.61	18.5	31.11	H

RSE-11A-CH149-18G-26.5G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18663.0	39.18	-5.6	44.78	H
20207.4	40.76	-4.8	45.56	H
21291.2	42.67	-3.6	46.27	H
22557.7	43.44	-3	46.44	H
24397.1	44.25	-2.8	47.05	V
25937.3	46.01	-2	48.01	V

RSE-11A-CH149-26.5G-40G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27176.4	45.54	-1	46.54	V
30671.5	44.98	0	44.98	H
33525.4	44.76	1.3	43.46	V
35315.5	46.07	1.3	44.77	H
36749.2	45.42	2.2	43.22	H
39014.5	50.49	4.1	46.39	V

RSE-11N-CH149-30M-1G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.6	22	-16.7	38.7	V
72.0	19.41	-18.5	37.91	V
181.1	27.11	-15.8	42.91	H
310.7	19.44	-11.1	30.54	H
339.8	15.8	-10.1	25.9	H
838.0	21.05	-1.6	22.65	V

RSE-11N-CH149-1G-8G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
3000.0	46.83	3.1	43.73	H
3596.4	37.45	1.9	35.55	V
4984.6	37.38	4.8	32.58	H
6419.8	40.19	3.5	36.69	V
7052.8	39.79	5	34.79	V
7696.4	38.86	4.5	34.36	H

RSE-11N-CH149-8G-18G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
9229.4	40.74	5.6	35.14	V
10485.8	41.83	7.9	33.93	V
12599.0	44.36	11.3	33.06	V
14011.4	43.42	12.7	30.72	H
16074.2	46.2	16.4	29.8	V
17765.2	47.36	18.8	28.56	H

RSE-11N-CH149-18G-26.5G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18715.7	39.1	-5.6	44.7	V
20007.7	40.54	-4.9	45.44	H
21587.0	43.5	-3.4	46.9	V
23543.7	44.12	-2.8	46.92	H
24879.0	43.96	-2.3	46.26	V
25965.4	47.74	-2	49.74	H

RSE-11N-CH149-26.5G-40G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27879.7	44.17	-0.4	44.57	V
30762.0	44.33	0.1	44.23	V
32970.6	43.4	1	42.4	V
35482.9	46.72	1.5	45.22	V
37796.8	44.76	1.2	43.56	V
38936.2	49.62	3.9	45.72	H

RSE-11AC-CH149-30M-1G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
37.7	15.1	-16.4	31.5	V
72.0	19.7	-18.5	38.2	H
181.1	27.19	-15.8	42.99	H
240.0	23.12	-13.5	36.62	H
345.5	17.64	-10	27.64	H
836.0	21.11	-1.7	22.81	H

RSE-11AC-CH149-1G-8G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
3000.0	45.79	3.1	42.69	H
4984.6	38.36	4.8	33.56	H
6340.0	40.52	3.5	37.02	V
6741.6	39.97	4.3	35.67	V
6968.8	39.35	4.4	34.95	V
7887.8	40.75	5.1	35.65	H

RSE-11AC-CH149-8G-8G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
8195.8	40.76	4.8	35.96	V
9682.4	40.94	6	34.94	H
12102.6	42.24	10.9	31.34	H
14001.6	45.03	12.7	32.33	H
16303.8	47.76	17.3	30.46	V
17582.6	48.99	18.5	30.49	H

RSE-11AC-CH149-18G-26.5G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18856.8	39.33	-5.4	44.73	V
20789.7	42.35	-4.2	46.55	H
22528.0	43.25	-3	46.25	H
23604.9	44.73	-2.8	47.53	H
24938.6	44.19	-2.4	46.59	V
25873.6	46.05	-2	48.05	V

RSE-11AC-CH149-26.5G-40G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27909.4	44.53	-0.3	44.83	H
31515.2	45.37	0.3	45.07	H
32986.8	43.9	1.1	42.8	V
33997.9	46.19	1.5	44.69	H
36872.0	46.47	2	44.47	V
38867.4	49.98	3.7	46.28	V

RSE-11N(40M)-CH151-30M-1G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
72.0	22.73	-18.5	41.23	V
181.3	25.12	-15.8	40.92	H
214.5	23.5	-14.2	37.7	H
241.3	21.03	-13.5	34.53	H
400.8	16.1	-8.4	24.5	V
797.2	23.71	-1.8	25.51	V

RSE-11N(40M)-CH151-1G-8G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2997.6	39.57	3.2	36.37	H
4999.0	39.04	5.4	33.64	H
6683.8	40.18	4.5	35.68	V
7058.8	40.55	5	35.55	H
7459.2	39.27	4.2	35.07	V
7728.6	39.74	4.7	35.04	V

RSE-11N(40M)-CH151-8G-18G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
9382.6	40.15	6.6	33.55	V
10508.6	42.61	7.9	34.71	H
12068.4	42.31	10.8	31.51	V
13680.2	44.93	12.1	32.83	V
14838.6	46.47	14.6	31.87	V
16302.2	47.2	17.3	29.9	H

RSE-11N(40M)-CH151-18G-26.5G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18747.2	39.51	-5.5	45.01	V
20309.4	39.75	-4.7	44.45	H
21553.0	43.12	-3.5	46.62	H
22808.4	43.78	-2.9	46.68	V
24069.8	43.76	-2.8	46.56	V
25922.8	46.56	-2	48.56	V

RSE-11N(40M)-CH151-26.5G-40G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27890.5	44.45	-0.4	44.85	V
30721.4	44.71	0.1	44.61	V
32997.6	43.54	1.1	42.44	H
34527.1	45.61	0.9	44.71	V
36853.2	46.65	2.1	44.55	V
39376.3	50.4	4	46.4	H

RSE-11AC(40M)-CH151-30M-1G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
72.0	22.6	-18.5	41.1	V
181.2	26.18	-15.8	41.98	H
221.5	23.16	-13.8	36.96	H
264.0	24.81	-12.4	37.21	H
432.8	17.71	-8.4	26.11	H
736.4	19.61	-2.9	22.51	V

RSE-11AC(40M)-CH151-1G-8G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2992.4	43.3	3.3	40	H
6375.6	39.77	3.5	36.27	V
6731.0	39.41	4.4	35.01	V
6990.2	46.91	4.6	42.31	V
7450.8	39.58	4.2	35.38	V
7727.2	40.27	4.7	35.57	V

RSE-11AC(40M)-CH151-8G-18G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
9400.0	40.81	6.5	34.31	H
11208.0	43.65	8.4	35.25	V
12695.6	43.92	11.6	32.32	V
14009.4	43.67	12.7	30.97	V
15842.0	46.14	16.2	29.94	V
17402.6	47.23	18.6	28.63	H

RSE-11AC(40M)-CH151-18G-26.5G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
18760.8	39.85	-5.5	45.35	V
20048.5	40.77	-4.8	45.57	V
21299.7	42.73	-3.6	46.33	V
22749.0	44.05	-2.9	46.95	H
24095.4	44.2	-2.8	47	H
25968.8	47.21	-2	49.21	H

RSE-11AC(40M)-CH151-26.5G-40G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27832.4	45.16	-0.4	45.56	V
30780.8	46.08	0.2	45.88	H
32808.6	43.2	0.7	42.5	V
34994.2	46.54	-0.4	46.94	V
36908.5	46.81	1.8	45.01	V
39142.8	50.07	4.2	45.87	V

RSE-11AC(80M)-CH155-30M-1G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
72.0	21.23	-18.5	39.73	V
181.3	26.07	-15.8	41.87	H
218.4	24.97	-13.9	38.87	H
262.5	21.6	-12.5	34.1	H
400.3	17.29	-8.4	25.69	H
816.2	20.97	-1.4	22.37	V

RSE-11AC(80M)-CH155-1G-8G-N04

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2993.0	35.51	3.3	32.21	H
3149.4	36.58	2.6	33.98	H
4995.6	38.62	5.3	33.32	H
6386.8	39.72	3.5	36.22	H
7065.4	39.29	5	34.29	H
7907.0	40.55	5.3	35.25	H

RSE-11AC(80M)-CH155-8G-18G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
9017.2	40.81	5.3	35.51	V
11650.0	43.94	10.4	33.54	V
13678.0	43.9	12.1	31.8	V
15344.6	44.81	15.3	29.51	V
16482.8	47.48	17.7	29.78	V
17860.0	47.7	18.7	29	H

RSE-11AC(80M)-CH155-18G-26.5G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18663.8	38.79	-5.6	44.39	H
20427.6	41.06	-4.4	45.46	H
21641.4	42.94	-3.4	46.34	V
23069.4	44.71	-3	47.71	H
24609.6	44.28	-2.5	46.78	V
26039.3	46.06	-2	48.06	V

RSE-11AC(80M)-CH155-26.5G-40G-N04

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27882.4	45.58	-0.4	45.98	H
30794.4	45.17	0.2	44.97	H
33426.8	45.32	1.2	44.12	V
35472.1	47.17	1.5	45.67	H
36892.3	46.3	1.9	44.4	H
39314.2	49.5	4	45.5	H

ANNEX A.7. Band Edges Compliance

Band Edges - Radiated

Measurement Limit:

- (1) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			


Set the spectrum analyzer in the following:

- (a) Sweep mode: SweepAnalyzer6db.
- (b) PEAK: RBW=1MHz / VBW=3MHz / Sweep=2.5ms, Sweep point;5001
- (c) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=2.5ms, Sweep point;5001


Measurement Result:

Band Edges (802.11a, 5745MHz)

Peak detector

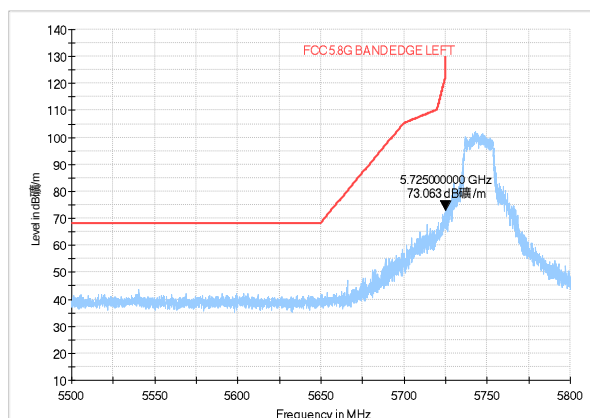


AV detector

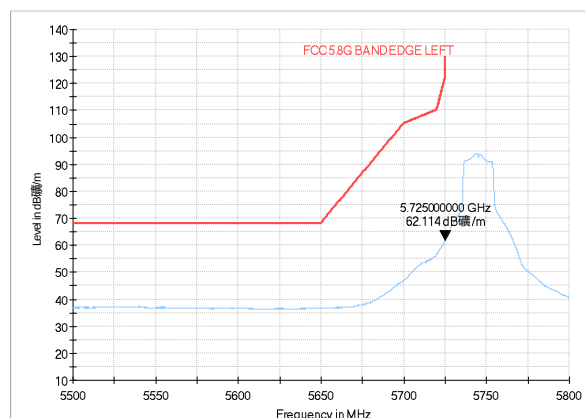


Band Edges (802.11a, 5825MHz)

Peak detector

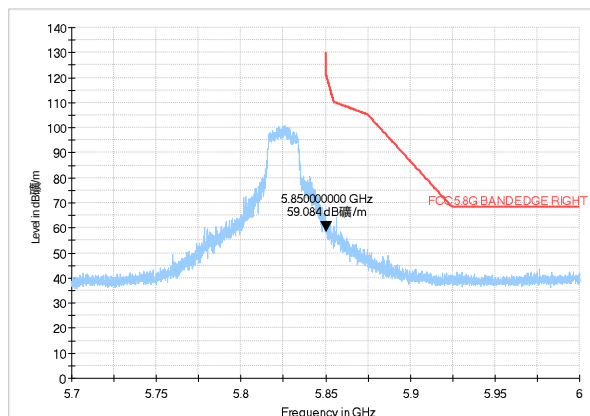


AV detector

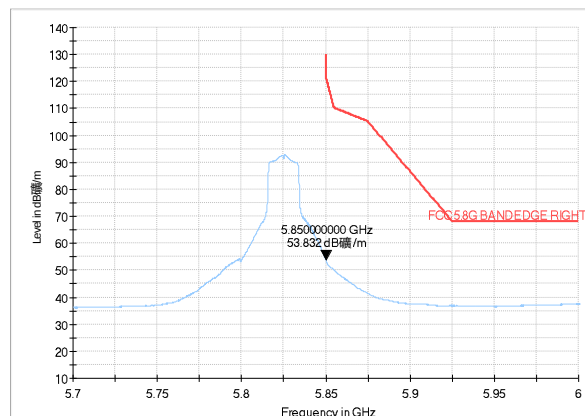


Band Edges (802.11n-HT20, 5745MHz)

Peak detector

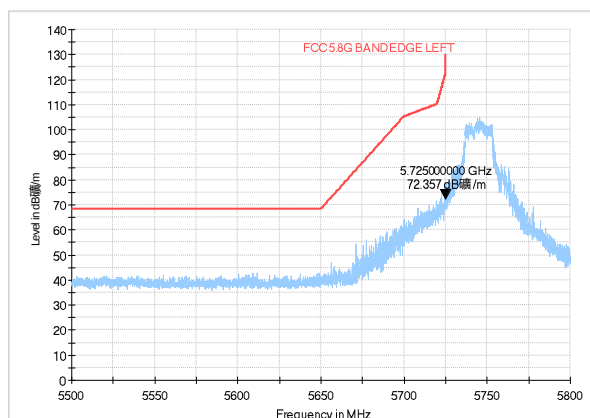


AV detector

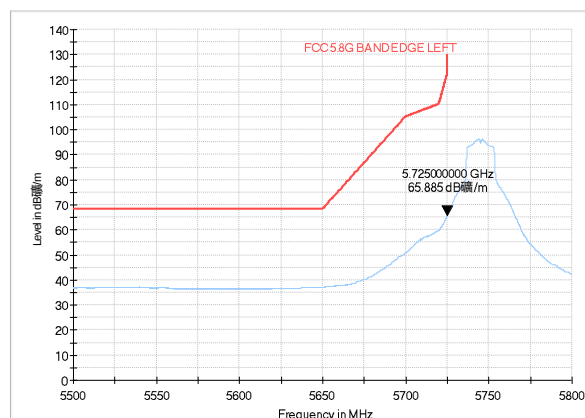


Band Edges (802.11n-HT20, 5825MHz)

Peak detector

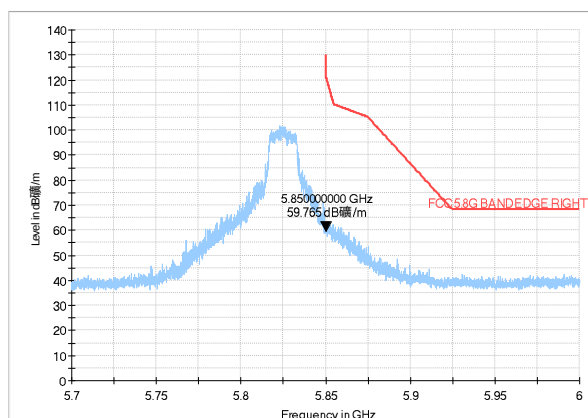


AV detector

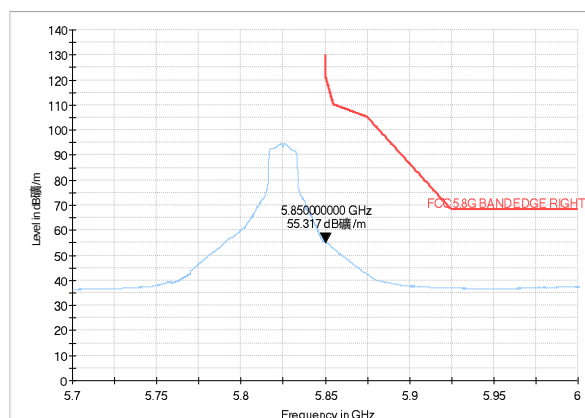


Band Edges (802.11ac-VHT20, 5745MHz)

Peak detector

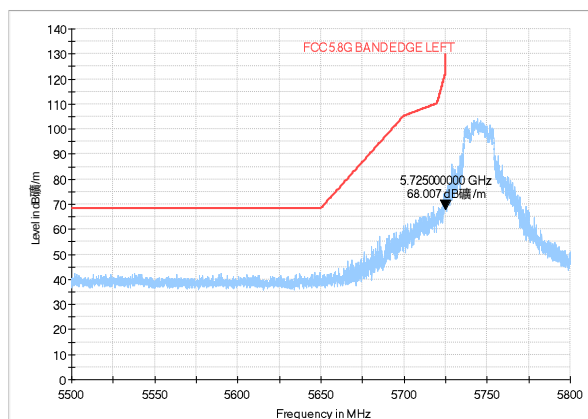


AV detector

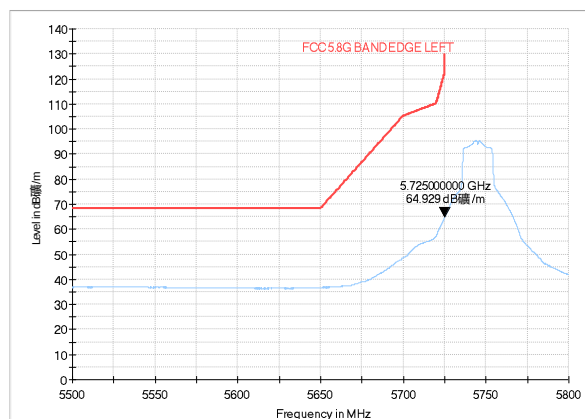


Band Edges (802.11ac-VHT20, 5825MHz)

Peak detector

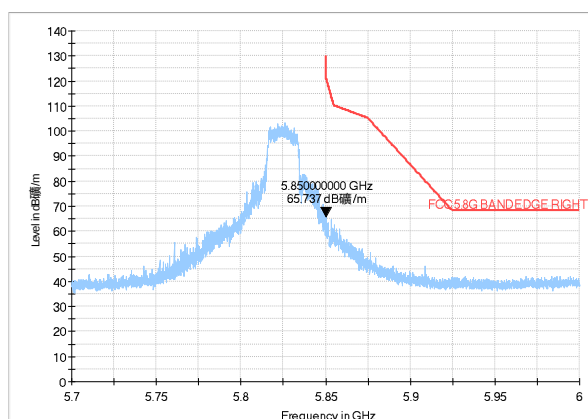


AV detector

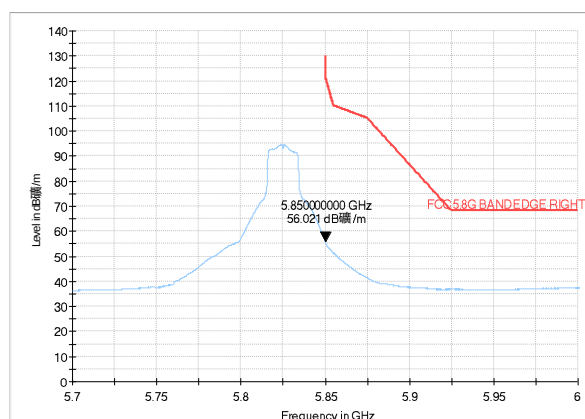


Band Edges (802.11n-HT40, 5755MHz)

Peak detector

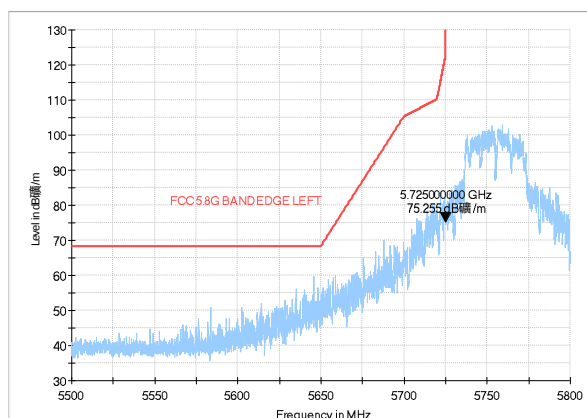


AV detector

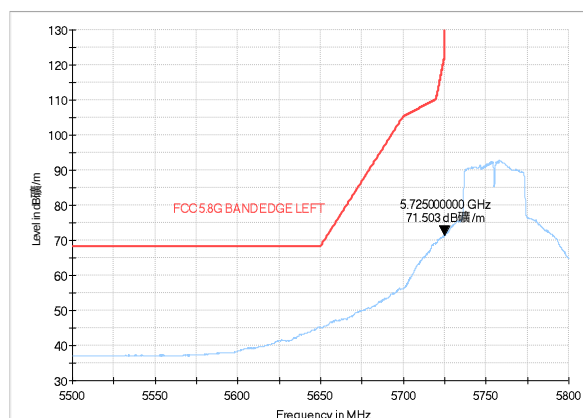


Band Edges (802.11n-HT40, 5795MHz)

Peak detector

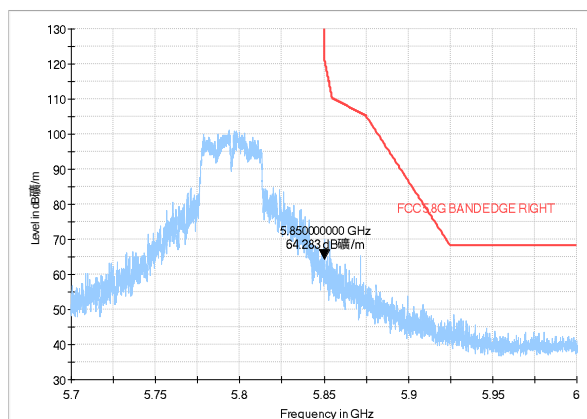


AV detector

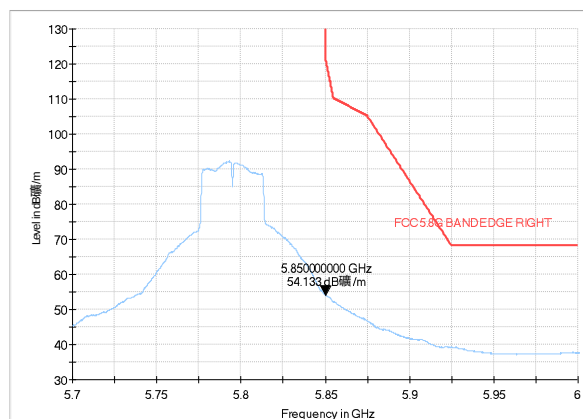


Band Edges (802.11ac-VHT40, 5755MHz)

Peak detector

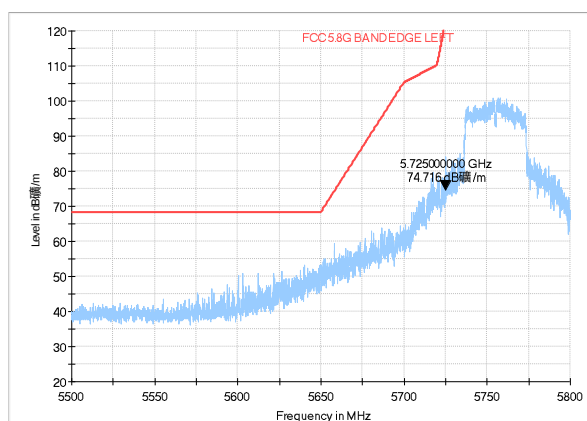


AV detector

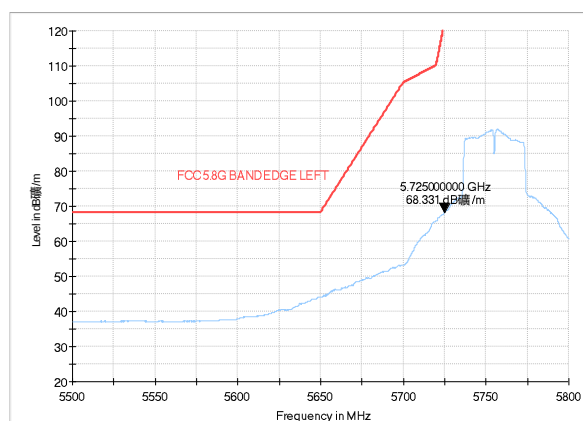


Band Edges (802.11ac-VHT40, 5795MHz)

Peak detector

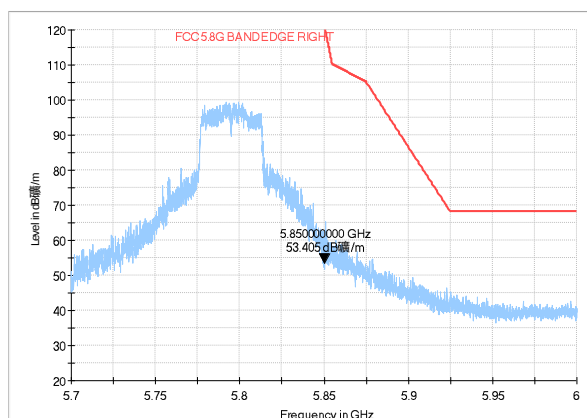


AV detector

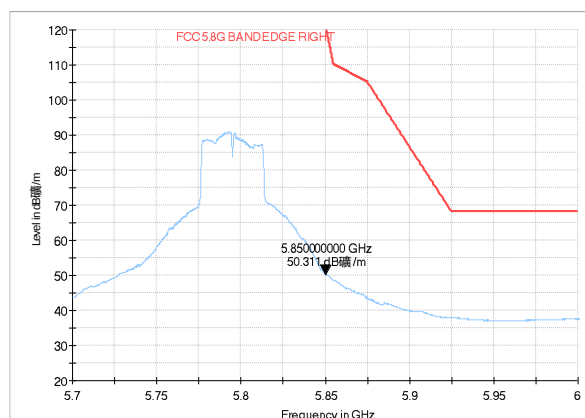


Band Edges (802.11ac-VHT80, 5775MHz)

Peak detector

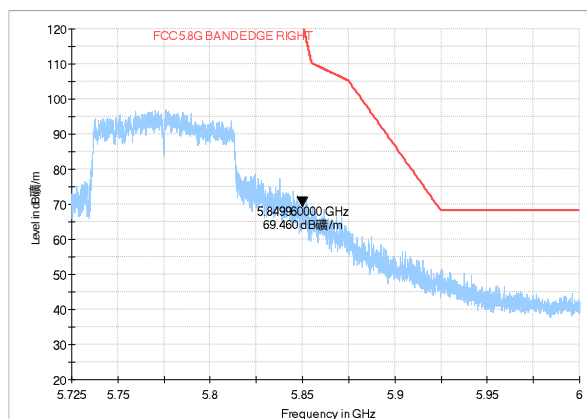

AV detector

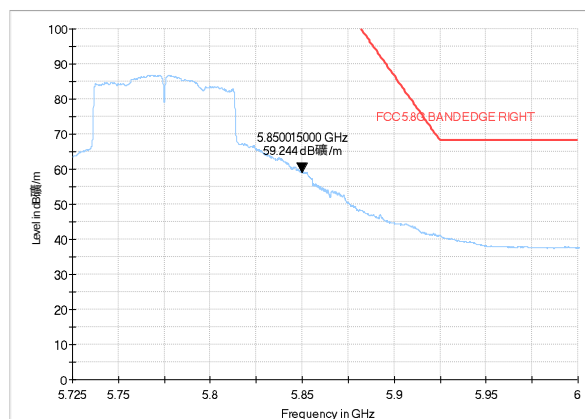

ANNEX A.8. AC Powerline Conducted Emission

Test Condition:


Voltage (V)	Frequency (Hz)
110	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

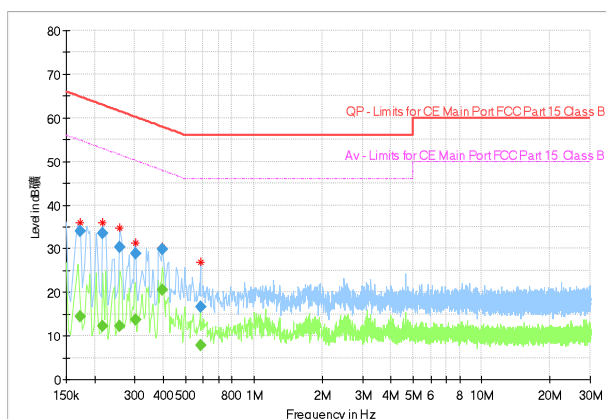

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

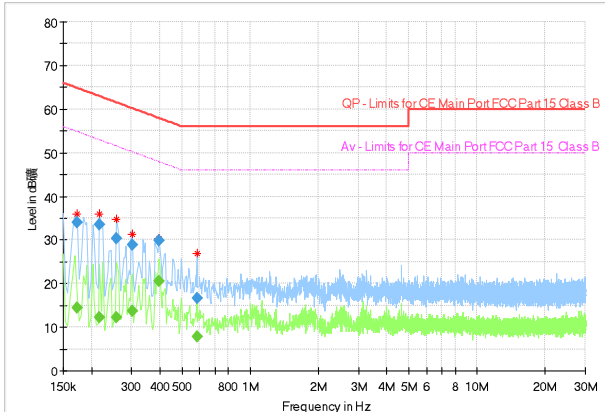

The measurement is made according to ANSI C63.10.

Measurement Result :

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172388	---	14.38	54.85	40.47	15000.0	9.000	L1	ON	9.6
0.172388	33.95	---	64.85	30.90	15000.0	9.000	L1	ON	9.6
0.217163	33.61	---	62.93	29.31	15000.0	9.000	L1	ON	9.6
0.258206	---	12.29	51.49	39.20	15000.0	9.000	L1	ON	9.6
0.258206	30.33	---	61.49	31.16	15000.0	9.000	L1	ON	9.6
0.302981	---	13.67	50.16	36.49	15000.0	9.000	L1	ON	9.6
0.302981	28.89	---	60.16	31.27	15000.0	9.000	L1	ON	9.6
0.396263	---	20.60	47.93	27.33	15000.0	9.000	L1	ON	9.6
0.396263	29.90	---	57.93	28.04	15000.0	9.000	L1	ON	9.6
0.582825	---	7.72	46.00	38.28	15000.0	9.000	L1	ON	9.6
0.582825	16.66	---	56.00	39.34	15000.0	9.000	L1	ON	9.6

ANNEX B. Accreditation Certificate



*****END OF REPORT*****