



## FCC PART 22 TEST REPORT

#### FCC Part 27

CTL1507031826-WF-6 Report Reference No.:

Compiled by: ( position+printed name+signature) Jacky Chen

(File administrators)

Tested by:

( position+printed name+signature)

Approved by:

( position+printed name+signature)

Allen Wang (Test Engineer)

Tracv Qi (Manager) Jackychen
Allen Wang
Luy G:

Product Name...... LTE WiFi Router

Model/Type reference...... T-N100

List Model(s)..... /

Trade Mark.....

FCC ID...... XYOT-N100

Applicant's name..... Asiatelco Technologies Co.

#289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park, Address of applicant.....

Pudong, Shanghai 201204, China

Test Firm..... Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan Address of Test Firm.....

District, Shenzhen, China 518055

Test specification....:

FCC CFR Title 47 Part 2, Part 27

Standard....: EIA/TIA 603-D: 2010

KDB 971168 D01

TRF Originator...... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF...... Dated 2011-01

Date of Receipt...... July 05, 2015

Date of Test Date...... July 07, 2015 – July 14, 2015

Data of Issue...... July 17, 2015

Result..... Positive

## Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

## TEST REPORT

Report No.: CTL1507031826-WF-6

Test Report No. :	CTL1507031826-WF-6	July 17, 2015
rest Report No	C1L1307031020-W1-0	Date of issue

Equipment under Test : LTE WiFi Router

Model /Type : T-N100

Listed Models : /

Applicant : Asiatelco Technologies Co.

Address : #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech

Park, Pudong, Shanghai 201204, China

Manufacturer : Asiatelco Technologies Co.

Address : #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech

Park, Pudong, Shanghai 201204, China

Test result	Pass *
1 Cot 1 Court	1 400

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# \*\* Modifited History \*\*

Report No.: CTL1507031826-WF-6

Revision	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2015-07-17	CTL1507031826-WF-6	Tracy Qi
	_			

## **Contents**

<u>l</u>	5 U IVI IVI A R T	<u> </u>
1.1	TEST STANDARDS	5
1.2	Test Description	5
1.3	Test Facility	6
1.4	Statement of the measurement uncertainty	6
<u>2</u>	GENERAL INFORMATION	7
2.1	Environmental conditions	7
2.2	General Description of EUT	7
2.3	Description of Test Modes	8
2.4	Equipments Used during the Test	8
2.5	Related Submittal(s) / Grant (s)	8
2.6	Modifications	8
<u>3</u>	TEST CONDITIONS AND RESULTS	9
3.1	Output Power	9
3.3	Peak-to-Average Ratio (PAR)	14
3.4	Occupied Bandwidth and Emission Bandwidth	19
3.5	Band Edge compliance	24
3.6	Spurious Emission	29
3.7	Frequency Stability under Temperature & Voltage Variations	47
<u>4</u>	TEST SETUP PHOTOS OF THE EUT	49
5	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	50
_		

#### Report No.: CTL1507031826-WF-6

## 1 SUMMARY

#### 1.1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

TIA/EIA 603 D June 2010:Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

FCC Part 2: FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

KDB971168 D01: v02r02 MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

<u>ANSI C63.4:2009:</u> Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50(c)(10)	Pass
Peak-to-Average Ratio	Part 27.50(c)(10)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(g)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(g)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(g)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 27.53(g)	Pass
Frequency stability	Part 2.1055 Part 27.54	Pass

Report No.: CTL1507031826-WF-6

## 1.3 Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

## FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

## 1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 GENERAL INFORMATION

## 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

## 2.2 General Description of EUT

Product Name:	LTE WiFi Router
Model/Type reference:	T-N100
Power supply:	DC 3.7V from battery or DC 12V from adapter
Serial number:	Prototype
Adapter information:	Model:C1000 Input: 100-240V, 50/60Hz 0.45A Output:12V1.0A
Hardware version:	725-0335-001-01
Software version:	V1.1
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	PCB Antenna : 2*TX 2*RX
Antenna gain:	2.0dBi
3G	
0 11 0 1	BC0 TX: 824.70 MHz ~ 848.31 MHz BC1 TX:1851.25 MHz ~ 1908.75 MHz
Operation Band:	BC0 RX: 869.70 MHz ~ 893.31 MHz BC1 RX: 1931.25 MHz ~ 1988.75 MHz
Supported Type:	CDMA2000 1xRTT/ CDMA2000 1xEv-DO-Release 0/ CDMA2000 1xEv-DO-Revision A
Modulation Type:	QPSK
Antenna Type:	External omni-antenna: 1*TX 2*RX
Antenna Gain:	2dBi
LTE	TO LTE Device
Operation Band:	TD-LTE: Band 41 FDD-LTE: Band 2/4/5/12/13/25/26
Modulation Type:	QPSK, 16QAM
Release Version:	Release 9
Category:	Cat 3
Antenna Type:	External Omni-antenna: 1*TX 2*RX
Antenna gain:	2.0dBi

Note: For more details, refer to the user's manual of the EUT.

## 2.3 Description of Test Modes

V1.0

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

- 1. All tests performed with alternate AC power sulpply and DC power supply , recorded the worst case at AC mode except frequency stability test.
- 2. Test method and refer to 3GPP TS136521.

## 2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Spectrum Analyzer	Agilent	N9030A	MY51380383	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062014	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidi ty Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Wideband Radio Communication Tester	R&S	CMW500	101814	2014/11/23	2015/11/22
High-Pass Filter	K&L	9SH10- 2700/X12750- O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10- 1375/U12750- O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNE R	RG214	N/A	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Directional Coupler	Agilent	87300B	3116A03638	2015/05/20	2016/05/19

## 2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: XYOT-N100 filing to comply with of the FCC Part 27 Rules.

#### 2.6 Modifications

No modifications were implemented to meet testing criteria.

V1.0 Page 9 of 50 Report No.: CTL1507031826-WF-6

## 3 TEST CONDITIONS AND RESULTS


## 3.1 Output Power

#### **LIMIT**


According to § 27.50 C(10): Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP."

#### **TEST CONFIGURATION**

#### Conducted Power Measurement

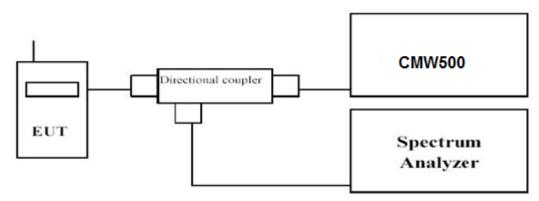

#### Radiated Power Measurement:

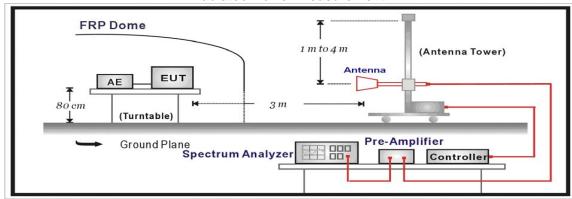

#### **TEST PROCEDURE**

The EUT was setup according to EIA/TIA 603D

#### **Conducted Power Measurement:**

- a) Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c) EUT Communicate with CMW500, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.

#### **Radiated Power Measurement:**

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to thefrequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.

- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- I. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4: 2009.

#### **TEST RESULTS**

#### **Conducted Measurement:**

	LTE F	-DD Band 12		
TX Channel	DD 0: -/0#	Frequency	Average Power [dBm]	
Bandwidth	RB Size/Offset	(MHz)	QPSK	16QAM
		699.7	21.87	20.67
	1 RB low	707.5	22.35	20.88
		715.3	22.56	21.42
		699.7	21.79	20.64
	1 RB high	707.5	21.56	20.42
4 4 MI I-	· ·	715.3	22.46	21.47
1.4 MHz		699.7	21.81	20.85
	50% RB mid	707.5	21.99	20.97
		715.3	22.64	21.63
		699.7	21.78	20.53
	100% RB	707.5	21.14	20.93
		715.3	21.58	20.44
		700.5	21.81	20.73
	1 RB low	707.5	24.13	23.06
		714.5	22.76	21.63
	1 RB high	700.5	22.01	20.87
		707.5	24.21	23.27
3 MHz	•	714.5	22.61	21.48
3 IVITZ		700.5	21.74	20.83
	50% RB mid	707.5	24.13	23.96
		714.5	21.71	20.70
		700.5	21.80	20.94
	100% RB	707.5	24.51	23.58
		714.5	21.55	20.54
		701.5	21.96	20.83
	1 RB low	707.5	24.11	22.98
		713.5	24.68	23.54
		701.5	23.63	22.52
	1 RB high	707.5	24.66	23.58
5 MHz		713.5	22.72	21.61
J IVII IZ		701.5	22.29	21.18
	50% RB mid	707.5	24.53	23.54
		713.5	21.57	20.54
	_	701.5	22.17	21.09
	100% RB	707.5	24.37	23.41
		713.5	21.02	20.09

Report	No.: CTL	1507031	826-WF-6
--------	----------	---------	----------

		704.0	21.72	20.65
	1 RB low	707.5	23.35	22.28
		711.0	24.46	23.86
		704.0	23.11	22.86
	1 RB high	707.5	24.34	23.35
10 MHz		711.0	22.74	21.60
TO IVITZ		704.0	22.39	21.43
	50% RB mid	707.5	24.39	23.48
		711.0	23.28	22.35
		704.0	23.25	22.26
	100% RB	707.5	23.68	22.63
		711.0	22.64	21.62

#### **Radiated Measurement:**

Remark:

- 1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.
- 2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_a(dBi)$
- 3. ERP = EIRP 2.15dBi as EIRP by subtracting the gain of the dipole.

#### LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.7	-21.54	2.38	8.23	2.15	36.70	18.86	34.77	15.91	V
707.5	-19.75	2.40	8.29	2.15	36.70	20.69	34.77	14.08	V
715.3	-20.38	2.43	8.28	2.15	36.70	20.02	34.77	14.75	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-21.06	2.38	8.23	2.15	36.70	19.34	34.77	15.43	V
707.5	-17.36	2.40	8.29	2.15	36.70	23.08	34.77	11.69	V
714.5	-20.43	2.43	8.28	2.15	36.70	19.97	34.77	14.80	V

LTE FDD Band 12\_Channel Bandwidth 5MHz\_QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.5	-19.91	2.38	8.23	2.15	36.70	20.49	34.77	14.28	V
707.5	-16.92	2.40	8.29	2.15	36.70	23.52	34.77	11.25	V
713.5	-19.29	2.43	8.28	2.15	36.70	21.11	34.77	13.66	V

#### LTE FDD Band 12 Channel Bandwidth 10MHz QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.0	-21.36	2.38	8.23	2.15	36.70	19.04	34.77	15.73	V
707.5	-18.21	2.40	8.29	2.15	36.70	22.23	34.77	12.54	V
711.0	-18.45	2.43	8.28	2.15	36.70	21.95	34.77	12.82	V

## LTE FDD Band 12 Channel Bandwidth 1.4MHz 16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.7	-22.85	2.38	8.23	2.15	36.70	17.55	34.77	17.22	V
707.5	-20.83	2.40	8.29	2.15	36.70	19.61	34.77	15.16	V
715.3	-21.47	2.43	8.28	2.15	36.70	18.93	34.77	15.84	V

## LTE FDD Band 12\_Channel Bandwidth 3MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-22.24	2.38	8.23	2.15	36.70	18.16	34.77	16.61	V
707.5	-18.43	2.40	8.29	2.15	36.70	22.01	34.77	12.76	V
714.5	-21.53	2.43	8.28	2.15	36.70	18.87	34.77	15.90	V

#### LTE FDD Band 12\_Channel Bandwidth 5MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.5	-20.77	2.38	8.23	2.15	36.70	19.63	34.77	15.14	V
707.5	-17.97	2.40	8.29	2.15	36.70	22.47	34.77	12.30	V
713.5	-20.12	2.43	8.28	2.15	36.70	20.28	34.77	14.49	V

LTE FDD Band 12\_Channel Bandwidth 10MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.0	-22.48	2.38	8.23	2.15	36.70	17.92	34.77	16.85	V
707.5	-19.37	2.40	8.29	2.15	36.70	21.07	34.77	13.70	V
711.0	-19.75	2.43	8.28	2.15	36.70	20.65	34.77	14.12	V


V1.0 Page 14 of 50 Report No.: CTL1507031826-WF-6

## 3.3 Peak-to-Average Ratio (PAR)

#### <u>LIMIT</u>

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### **TEST CONFIGURATION**

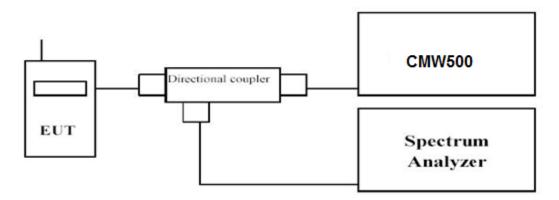

#### **TEST PROCEDURE**


- Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- 2. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 3. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.


## **TEST RESULTS**


Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.

	LTE FDD Band 12									
TX Channel	Frequency	RB Size/Offset	PAPI	PAPR (dB)						
Bandwidth	(MHz)	RB Size/Offset	QPSK	16QAM						
	699.7		5.47	6.73						
1.4 MHz	707.5	100% RB	4.19	5.29						
	715.3		6.30	7.24						
	700.5		5.59	6.67						
3 MHz	707.5	100% RB	5.69	6.82						
	714.5		5.83	6.54						
	701.5		5.80	6.48						
5 MHz	707.5	100% RB	6.59	7.15						
	713.5		4.26	5.17						
	704.0		5.48	6.85						
10 MHz	707.5	100% RB	5.91	6.25						
	711.0		7.19	8.30						

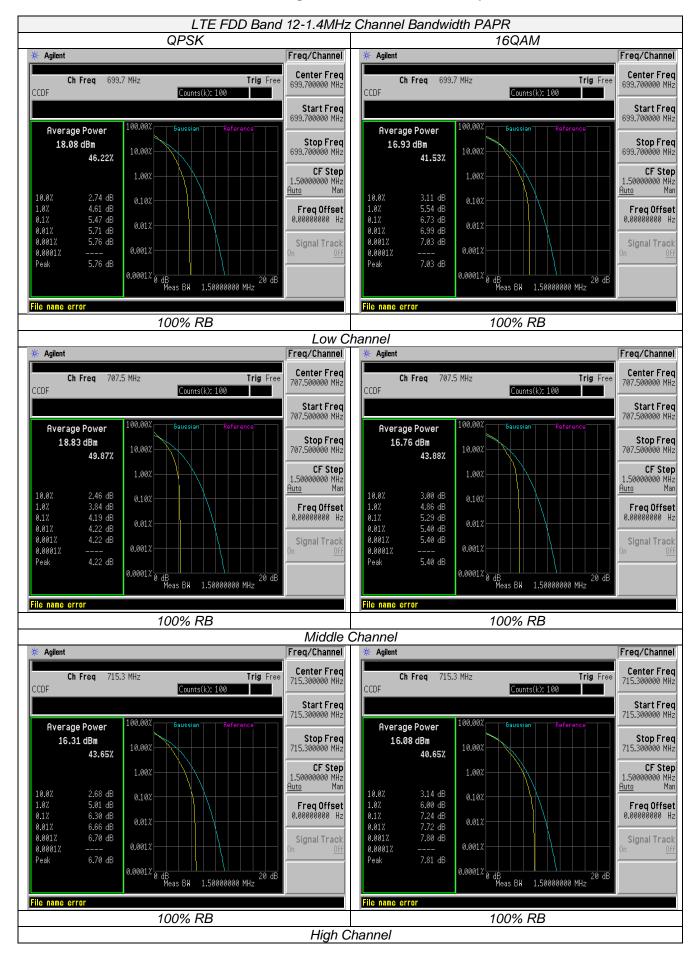

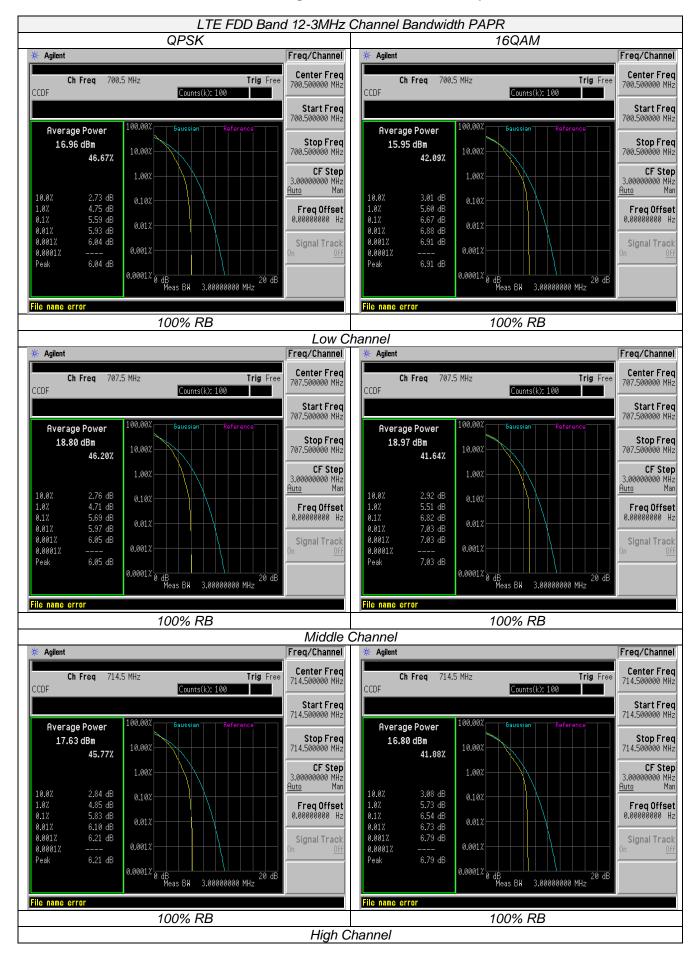

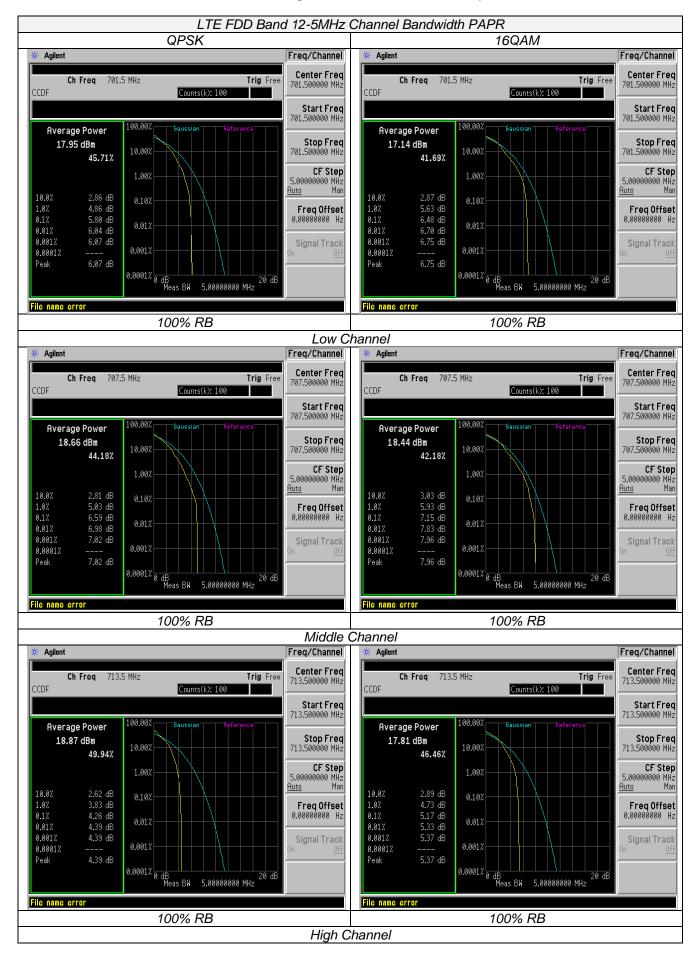

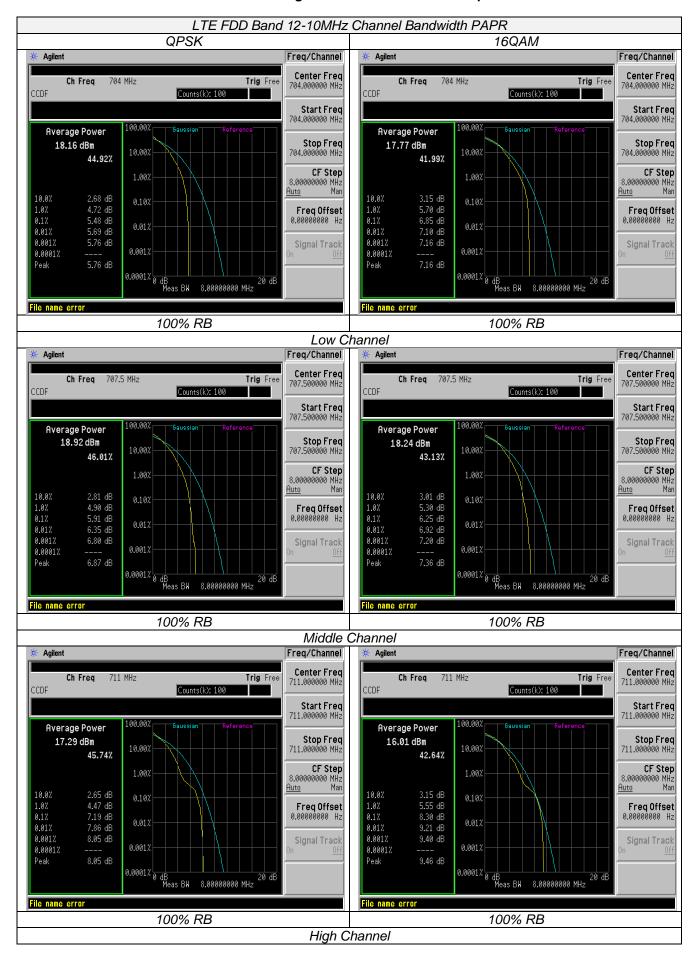


V1.0 Page 19 of 50 Report No.: CTL1507031826-WF-6

## 3.4 Occupied Bandwidth and Emission Bandwidth

#### **LIMIT**

N/A

#### **TEST CONFIGURATION**

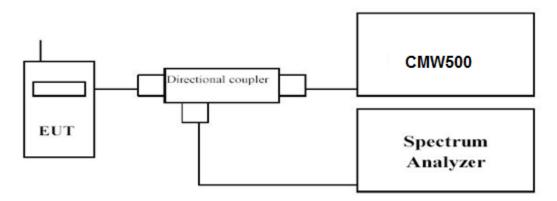

#### **TEST PROCEDURE**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW≥3 times RBW.


-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


#### **TEST RESULTS**


#### Remark:


1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.

		LTE FDD	Band 12			
TX Channel	RB Size/Offset	Frequency		Emission Ith (MHz)		ed bandwidth Hz)
Bandwidth		(MHz)	QPSK	16QÁM	QPSK	16QAM
		699.7	1.264	1.275	1.0794	1.0833
1.4 MHz	6RB#0	707.5	1.313	1.300	1.0818	1.0828
		715.3	1.260	1.280	1.0783	1.0824
		700.5	2.996	3.003	2.6826	2.6871
3 MHz	15RB#0	707.5	2.988	3.008	2.6833	2.6902
		714.5	2.988	2.988	2.6783	2.6823
		701.5	5.057	5.076	4.4874	4.4876
5 MHz	25RB#0	707.5	5.068	5.040	4.4837	4.4825
		713.5	5.054	5.054	4.4932	4.4873
		704.0	9.822	9.809	8.9536	8.9555
10 MHz	50RB#0	707.5	9.737	9.882	8.9697	8.9415
ı		711.0	9.773	9.913	8.9868	8.9597

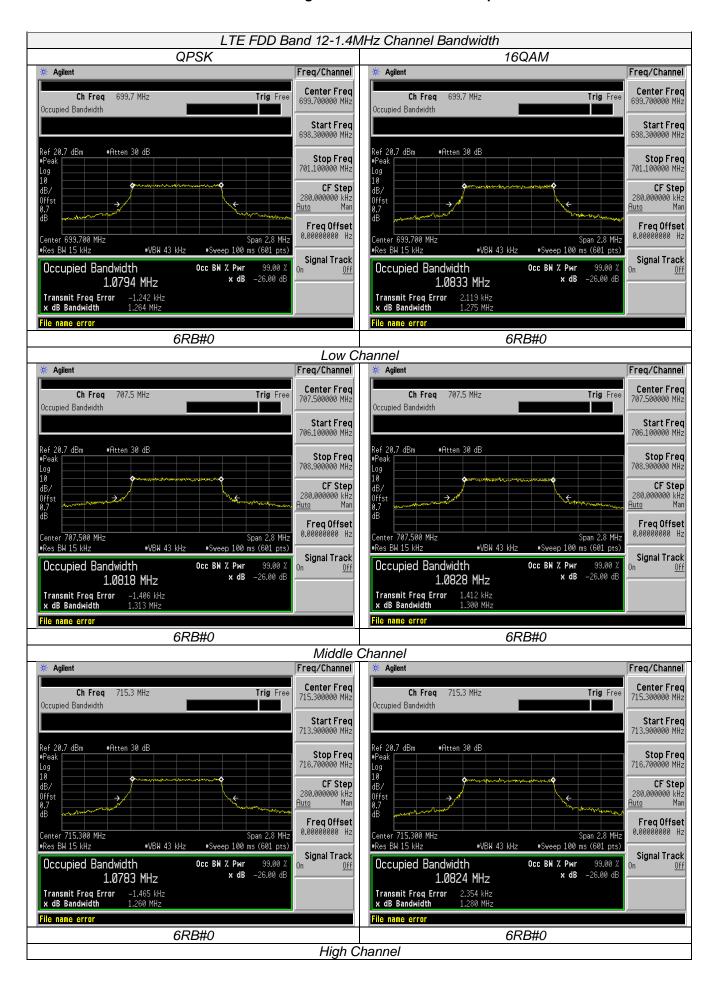

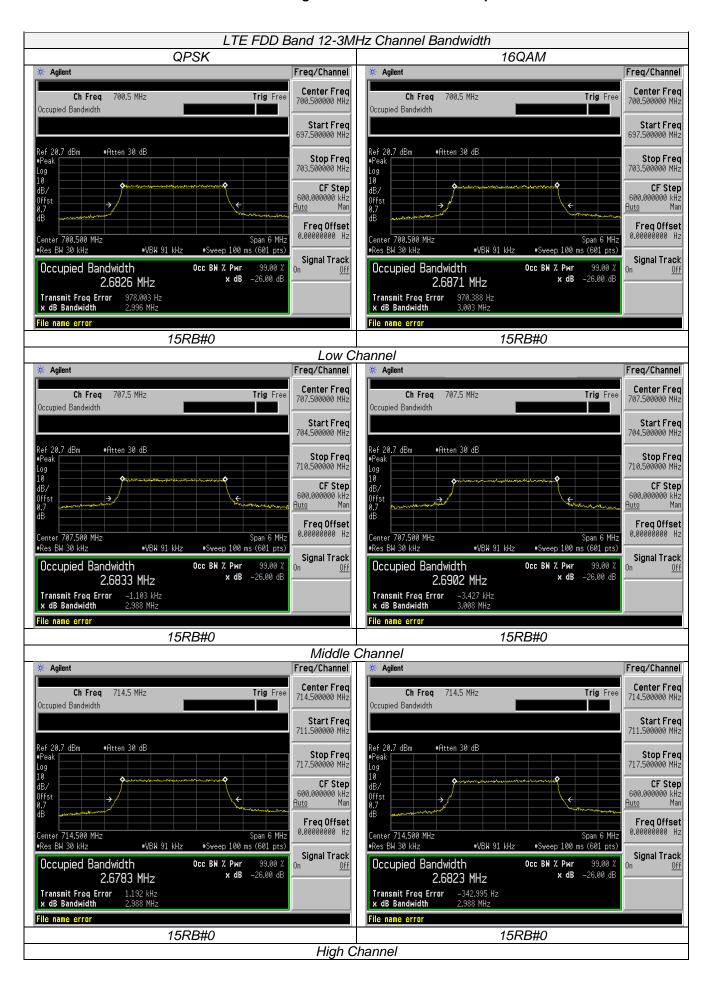

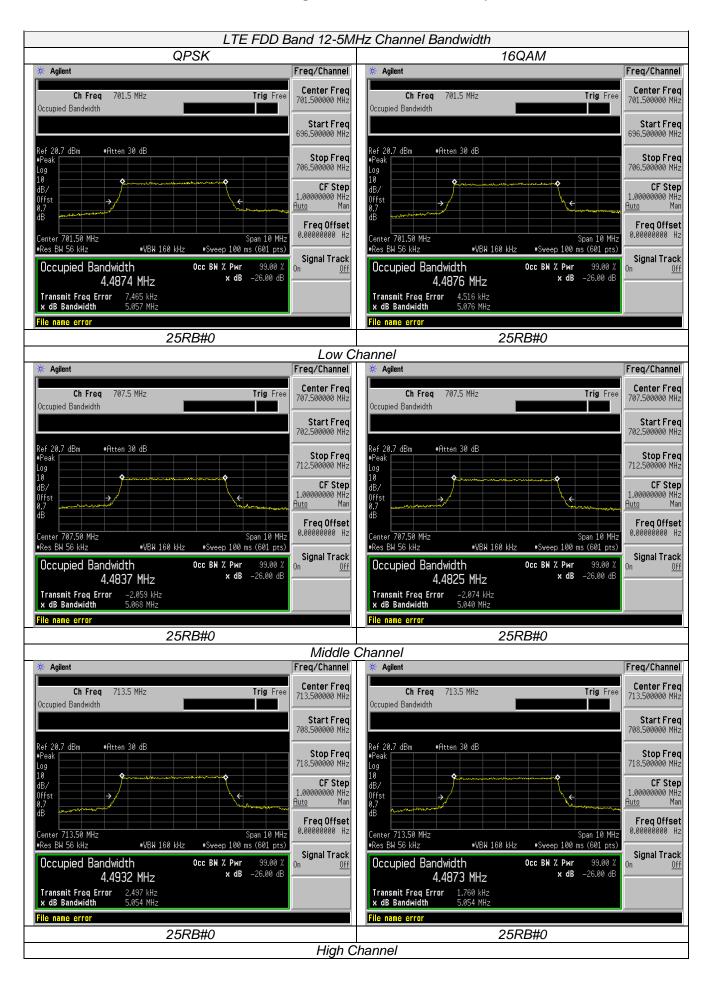

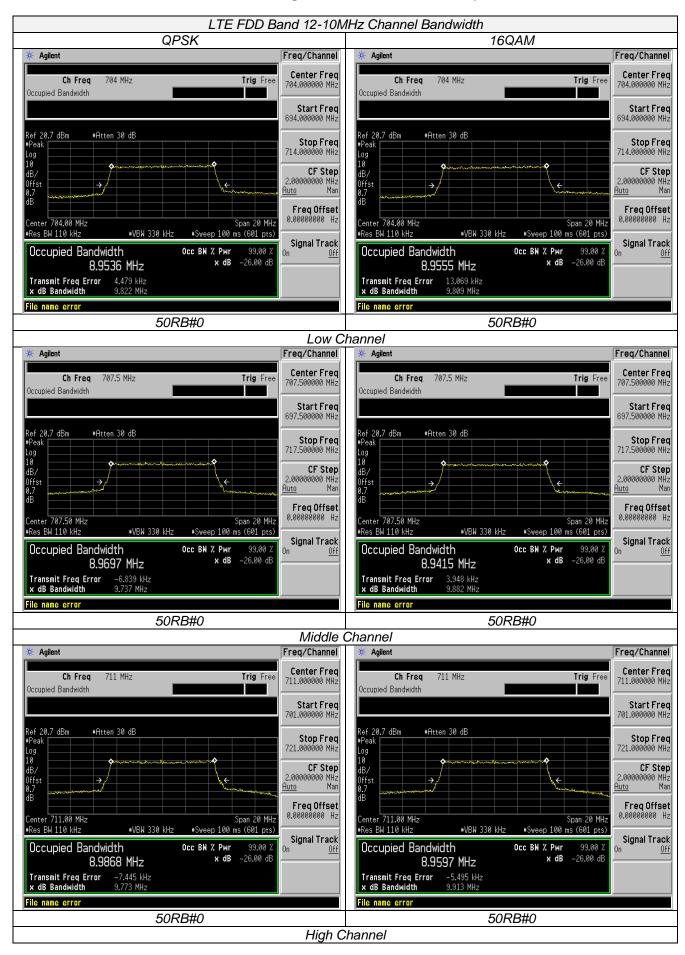


## 3.5 Band Edge compliance

#### **LIMIT**

According to Part §27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **TEST CONFIGURATION**

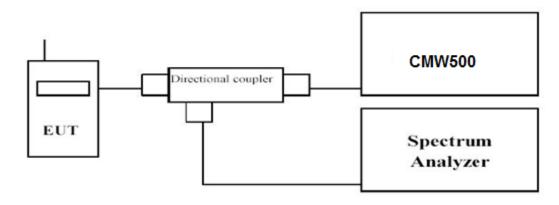


#### **TEST PROCEDURE**


- 1. The transmitter output port was connected to base station.
- The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
- 3. Set EUT at maximum power through base station.
- 4. Select lowest and highest channels for each band and different modulation.
- 5. Measure Band edge using RMS (Average) detector by spectrum


#### **TEST RESULTS**


Remark:

1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.

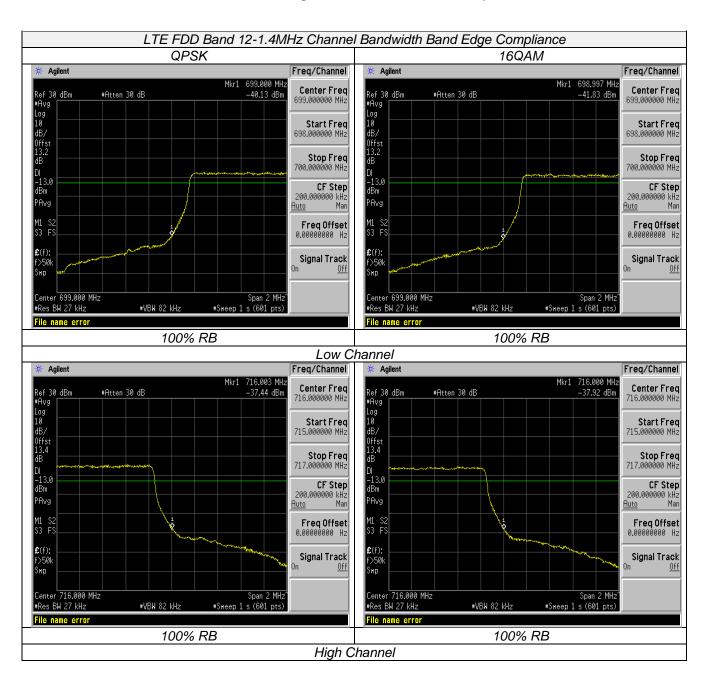

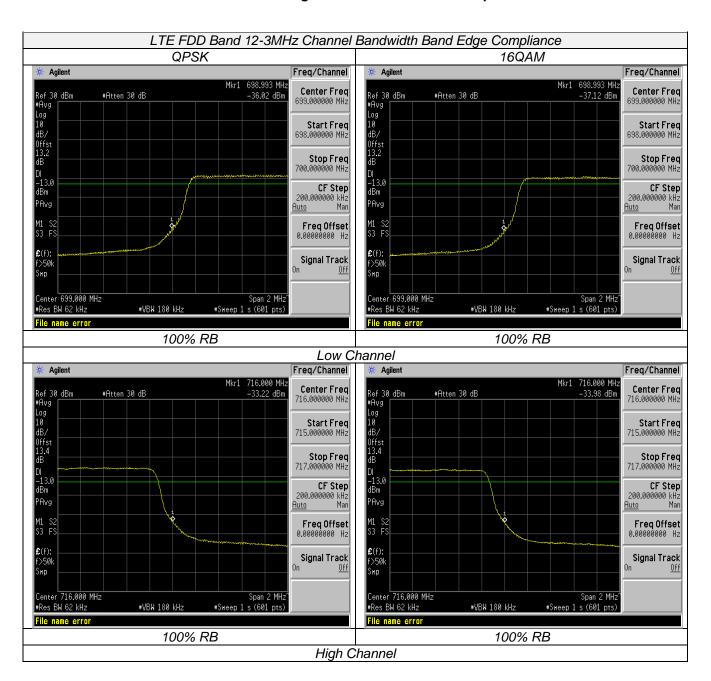

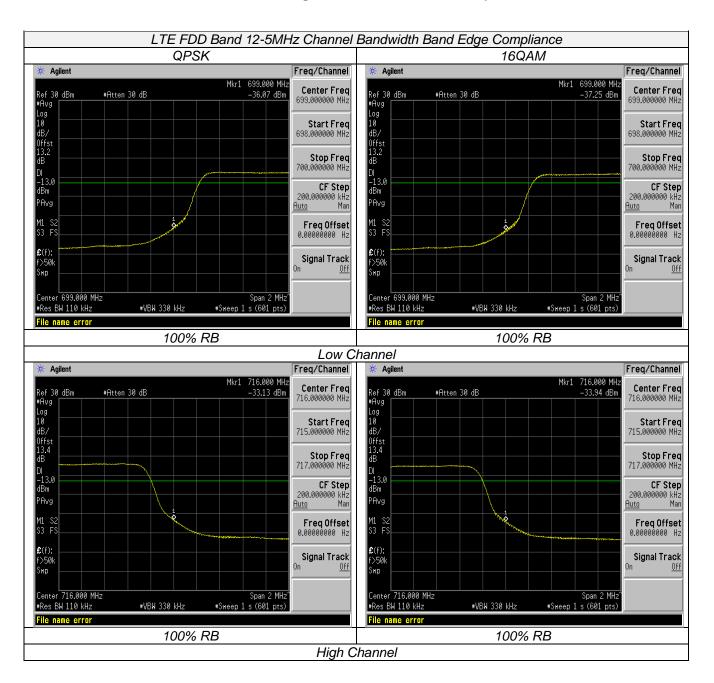

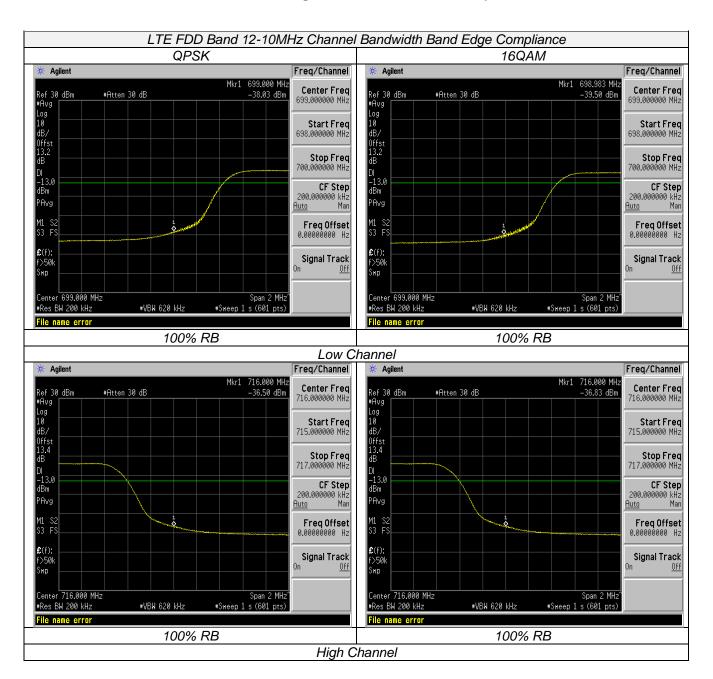

V1.0 Page 29 of 50 Report No.: CTL1507031826-WF-6

## 3.6 Spurious Emission


#### **LIMIT**

According to Part §27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB


The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **TEST CONFIGURATION**

#### Conducted Spurious Measurement:

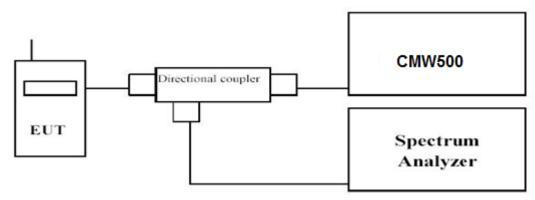

## Radiated Spurious Measurement:

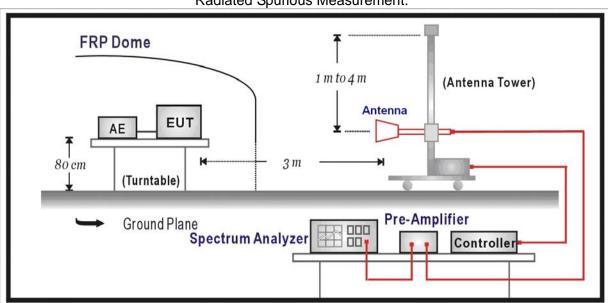

#### **TEST PROCEDURE**

The EUT was setup according to EIA/TIA 603D

#### **Conducted Spurious Measurement:**

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to10<sup>th</sup> harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
	0.000009~0.000015	1KHz	3KHz	Auto
LTE FDD Band 12	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto

#### **Radiated Spurious Measurement:**


- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through  $360^{\circ}$  in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- I. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.4: 2009.


#### **TEST RESULTS**


#### Remark:


 We were tested all Rband RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.


## **Conducted Measurement:**

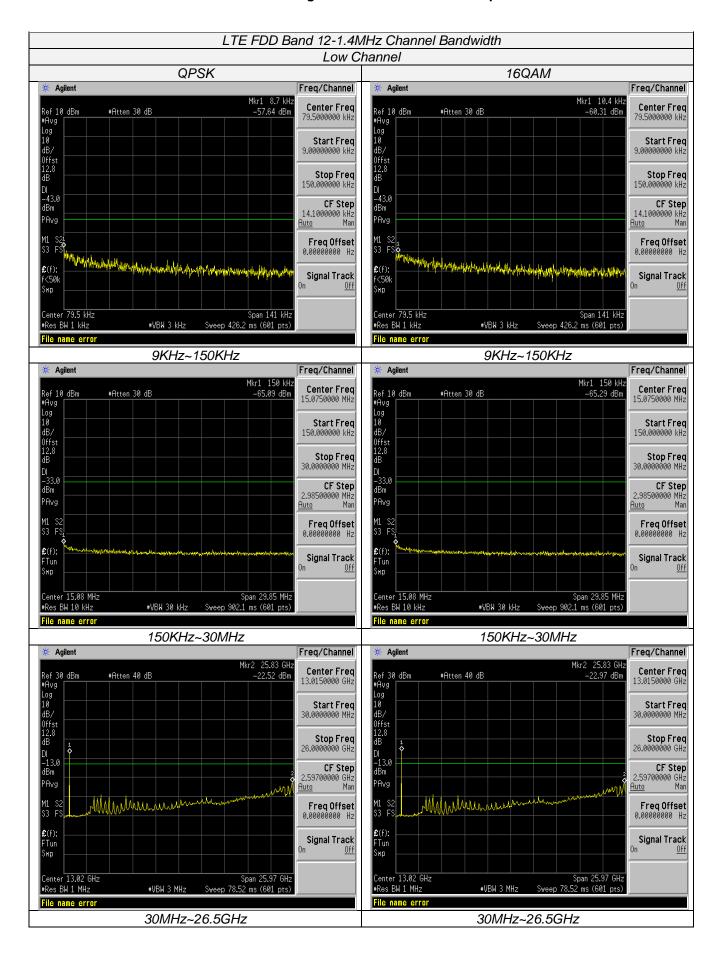


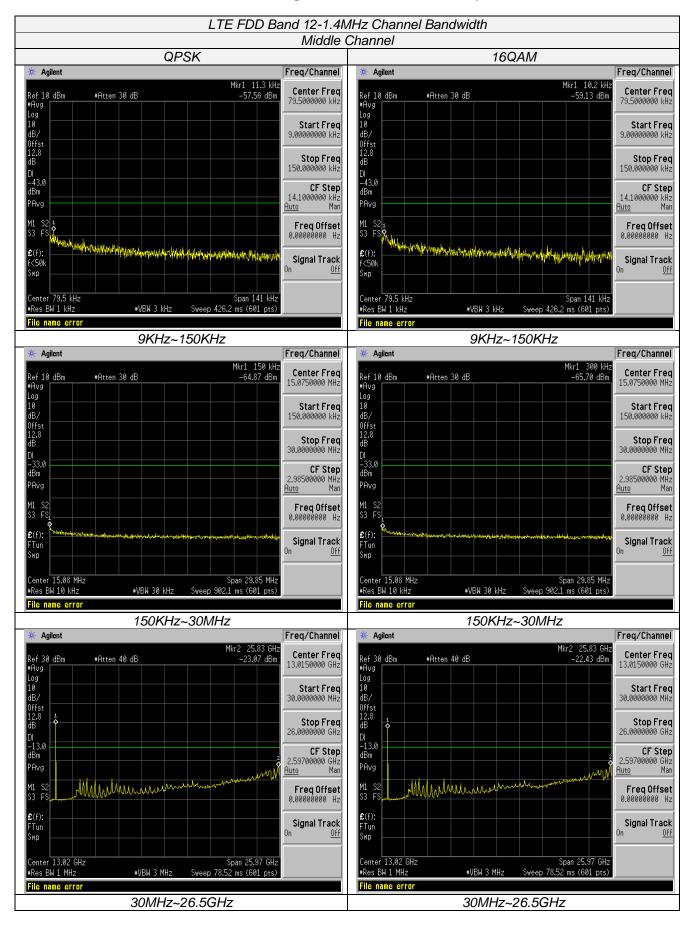


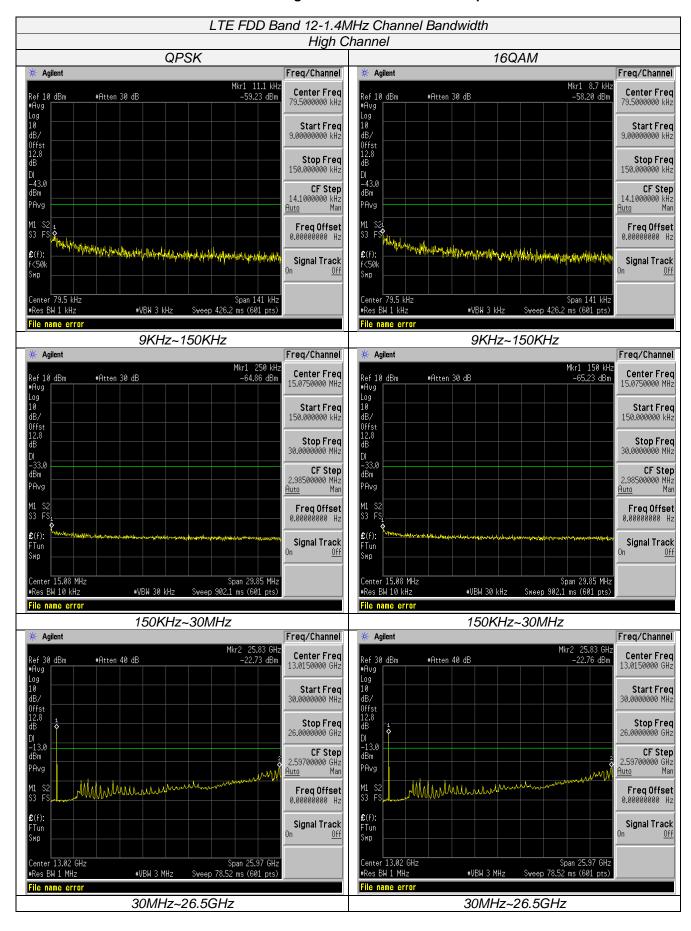


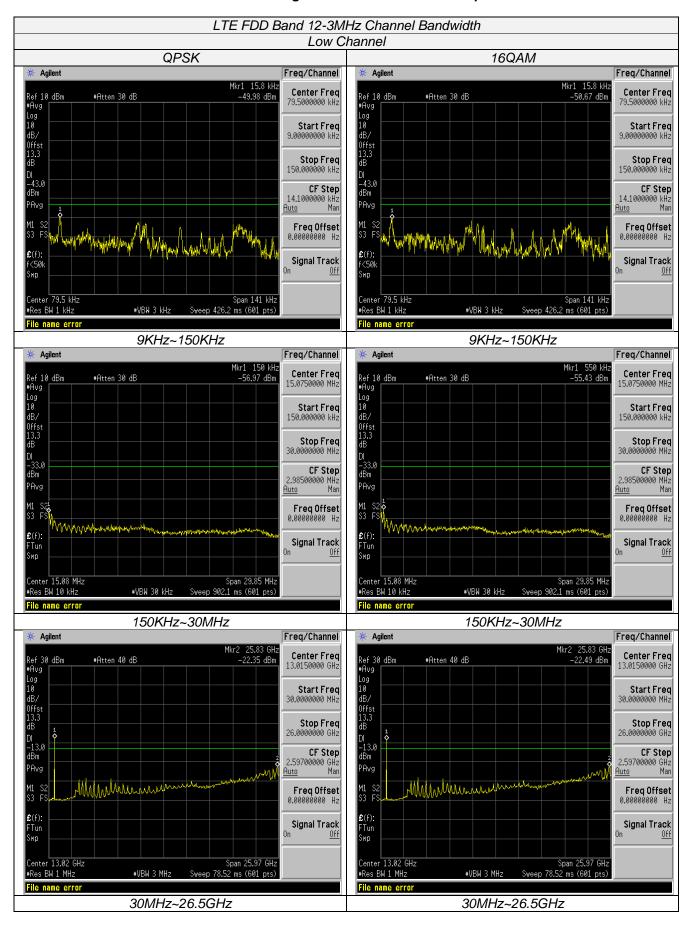


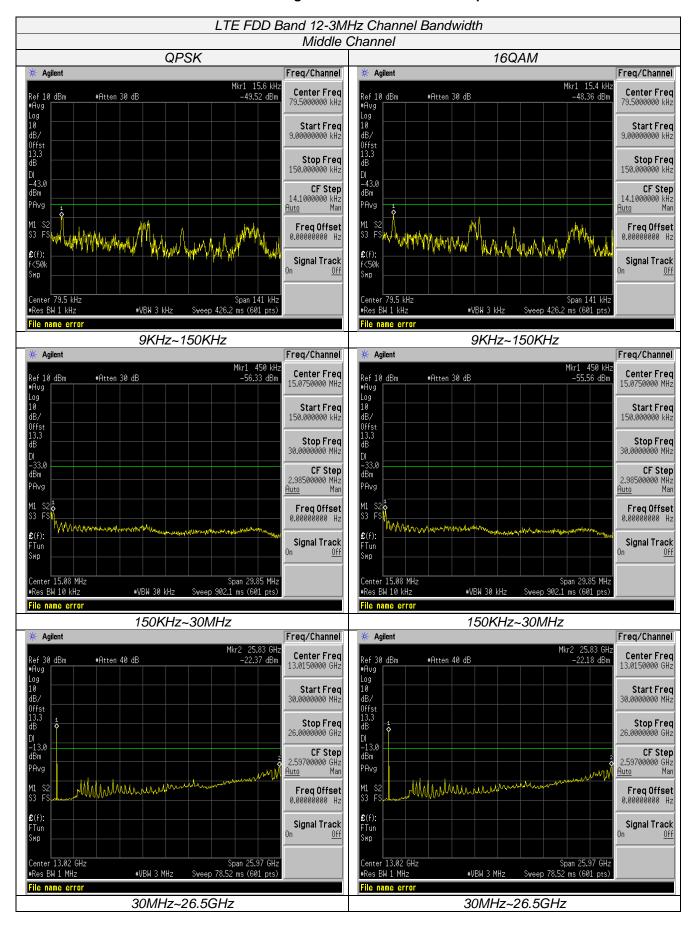


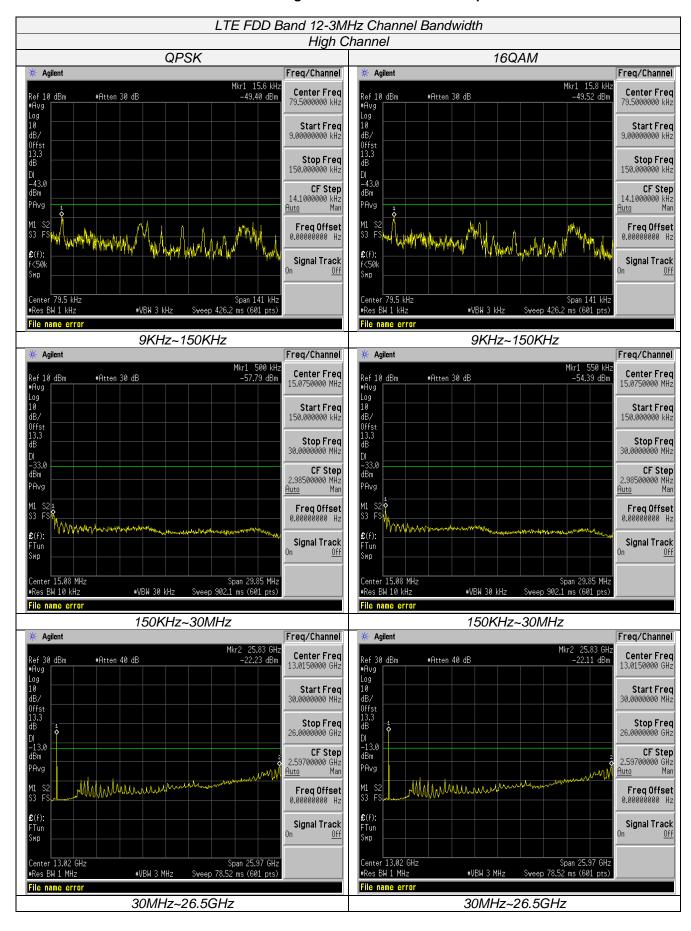


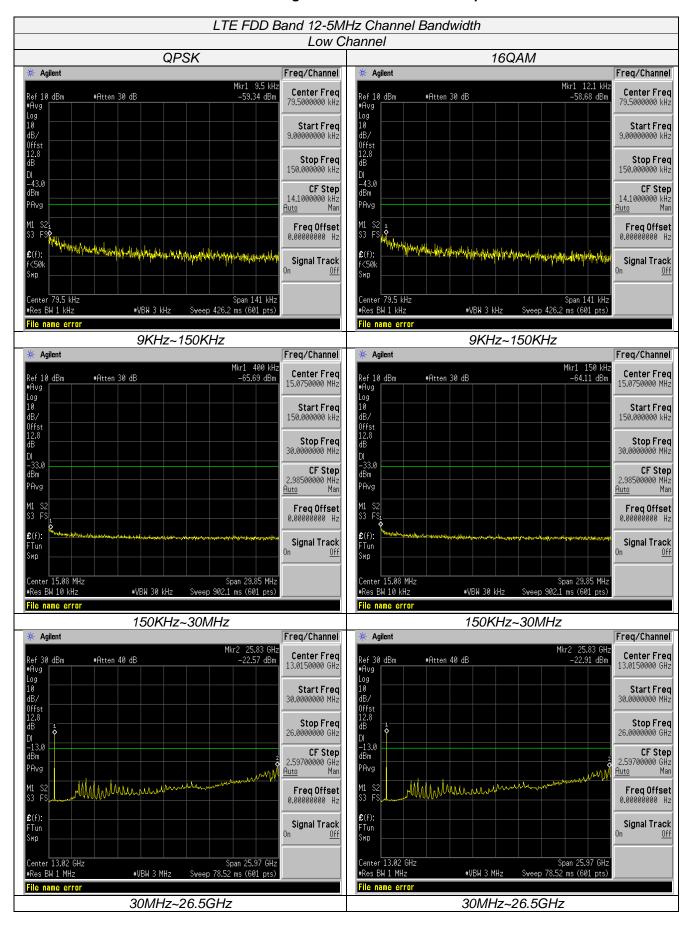


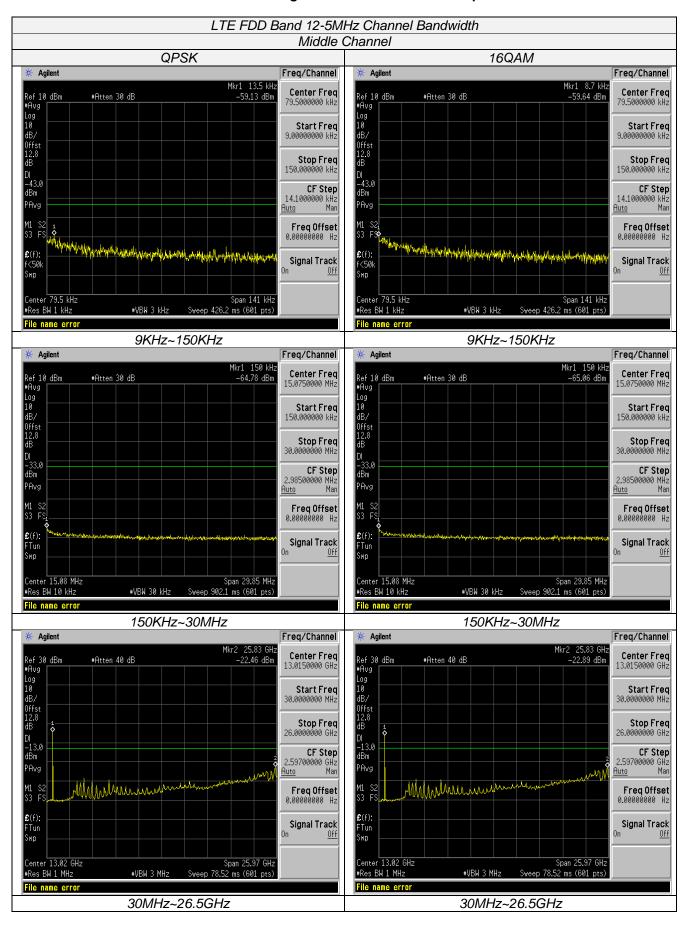

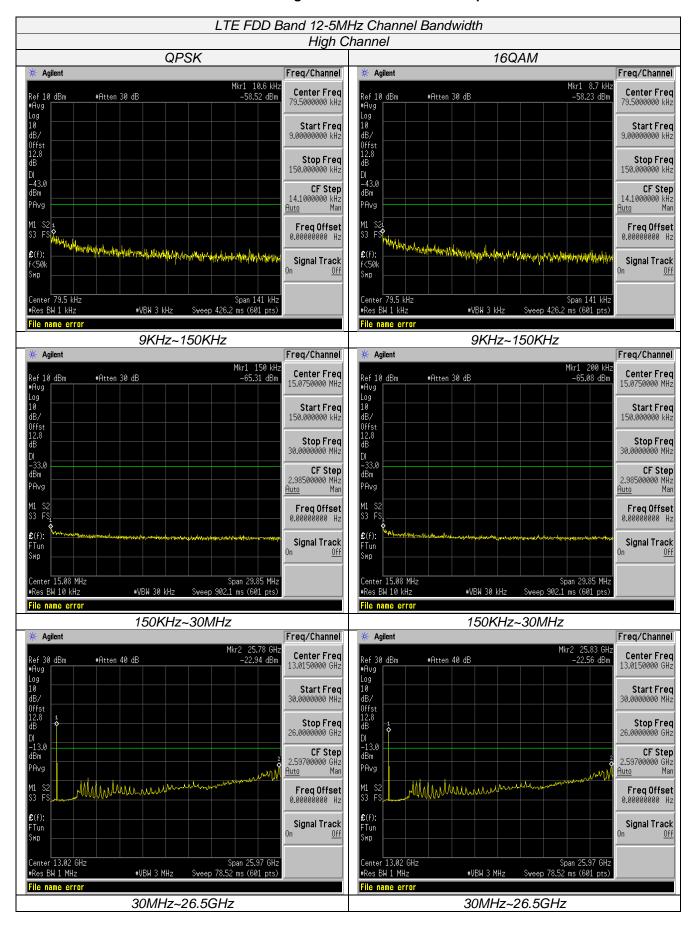

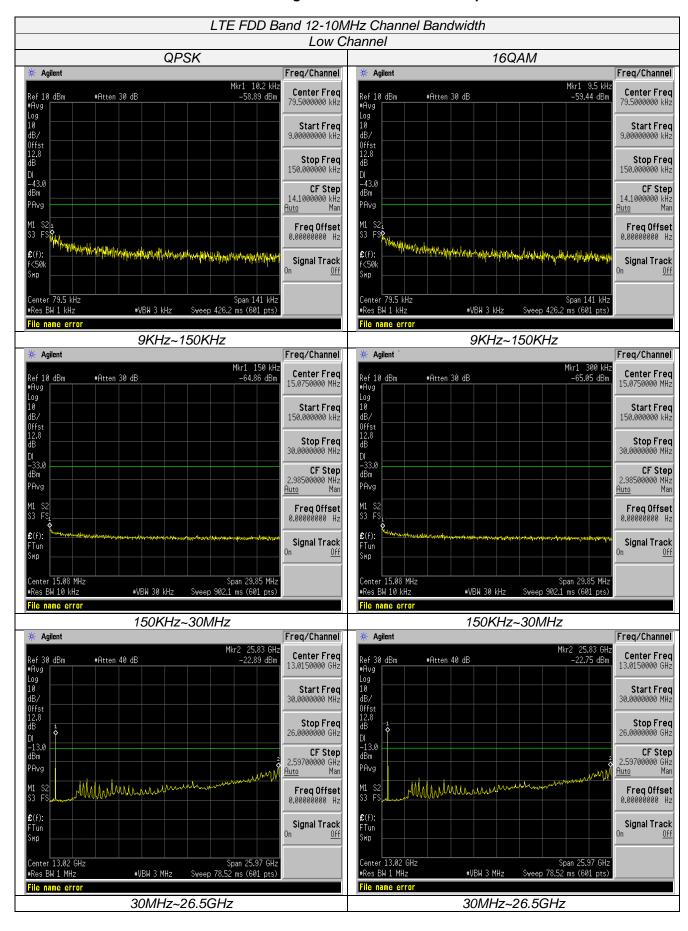

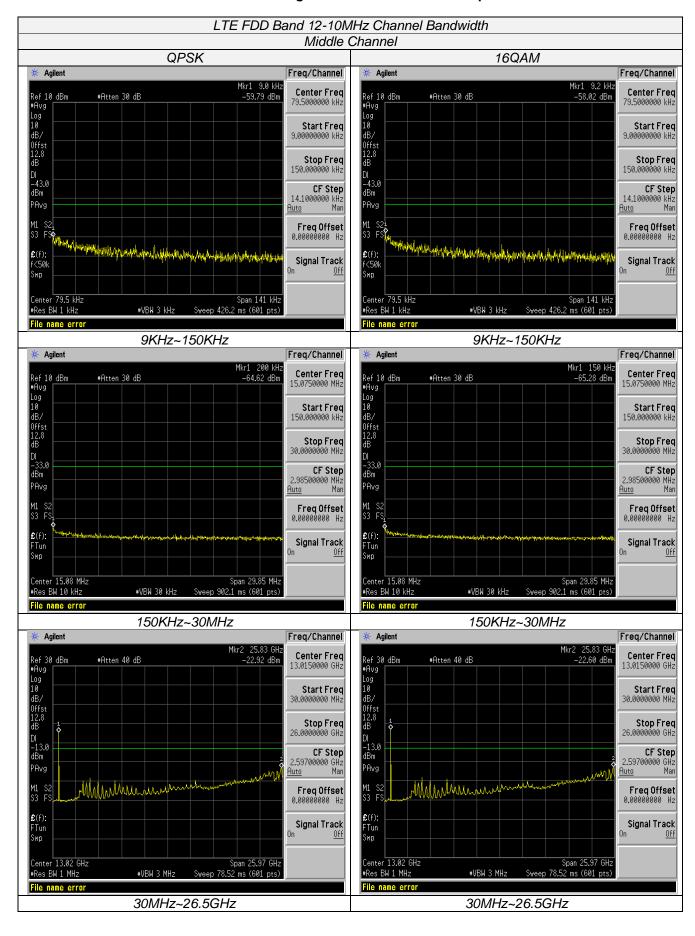

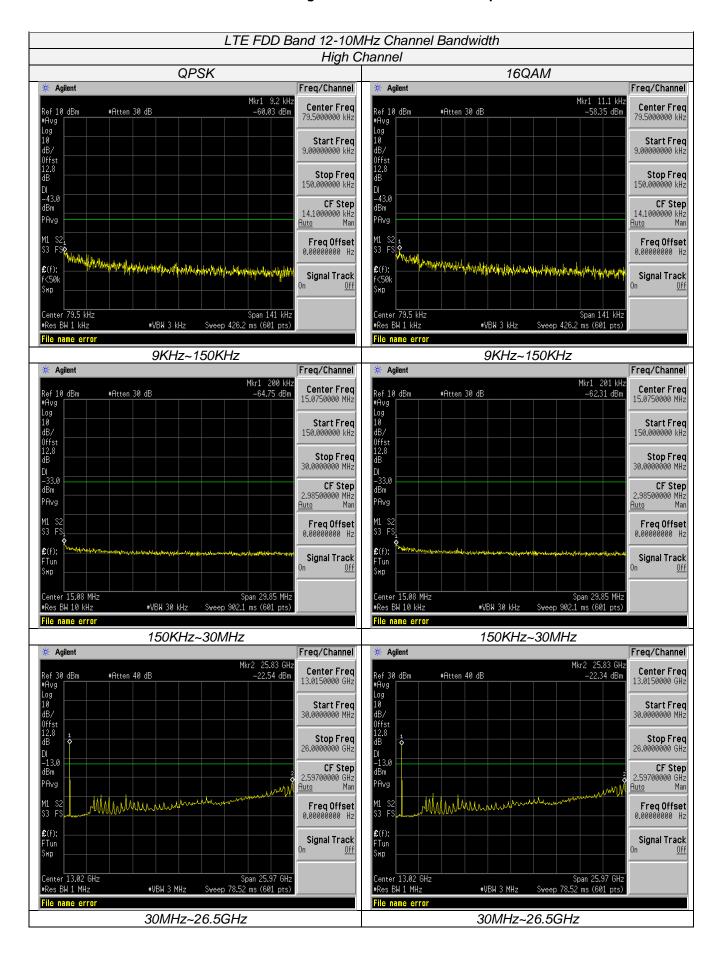

#### **Radiated Measurement:**

#### Remark:

- 1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case for each Channel Bandwidth of LTE FDD Band 12.
- 2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+G_a(dBi)$
- 3. We were not recorded other points as values lower than limits.
- 4. Margin = Limit EIRP

LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_QPSK\_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.4	-35.89	2.86	3.00	7.25	-31.50	-13.00	18.50	Н
2099.1	-43.26	2.94	3.00	9.53	-36.67	-13.00	23.67	Н
1399.4	-44.24	2.86	3.00	7.25	-39.85	-13.00	26.85	V
2099.1	-47.73	2.94	3.00	9.53	-41.14	-13.00	28.14	V

LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_QPSK\_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.47	2.86	3.00	7.25	-30.08	-13.00	17.08	Н
2122.5	-40.50	2.94	3.00	9.53	-33.91	-13.00	20.91	Н
1415.0	-42.17	2.86	3.00	7.25	-37.78	-13.00	24.78	V
2122.5	-48.83	2.94	3.00	9.53	-42.24	-13.00	29.24	V

LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_QPSK\_ High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1430.6	-40.11	2.86	3.00	7.82	-35.15	-13.00	22.15	Н
2145.9	-45.44	2.94	3.00	9.35	-39.03	-13.00	26.03	Н
1430.6	-49.43	2.86	3.00	7.82	-44.47	-13.00	31.47	V
2145.9	-53.03	2.94	3.00	9.35	-46.62	-13.00	33.62	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_QPSK\_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1401.0	-35.55	2.86	3.00	7.25	-31.16	-13.00	18.16	Н
2101.5	-42.67	2.94	3.00	9.53	-36.08	-13.00	23.08	Н
1401.0	-43.42	2.86	3.00	7.25	-39.03	-13.00	26.03	V
2101.5	-47.15	2.94	3.00	9.53	-40.56	-13.00	27.56	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_QPSK\_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.98	2.86	3.00	7.25	-30.59	-13.00	17.59	Н
2122.5	-39.86	2.94	3.00	9.53	-33.27	-13.00	20.27	Н
1415.0	-41.43	2.86	3.00	7.25	-37.04	-13.00	24.04	V
2122.5	-48.35	2.94	3.00	9.53	-41.76	-13.00	28.76	V

LTE FDD Band 12 Channel Bandwidth 3MHz QPSK High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1429.0	-40.18	2.86	3.00	7.82	-35.22	-13.00	22.22	Н
2143.5	-45.05	2.94	3.00	9.35	-38.64	-13.00	25.64	Н
1429.0	-48.77	2.86	3.00	7.82	-43.81	-13.00	30.81	V
2143.5	-52.43	2.94	3.00	9.35	-46.02	-13.00	33.02	V

Report No.: CTL1507031826-WF-6

I TE ED	D Rand 12	Channe	l Randwidth	5MHz	OPSK	Low Channel
	Danu iz	OHAHIIG	Danuwiun	JIVII IZ	WI OIL	LUW Ullaliliei

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1403.0	-35.84	2.86	3.00	7.25	-31.45	-13.00	18.45	Н
2104.5	-43.31	2.94	3.00	9.53	-36.72	-13.00	23.72	Н
1403.0	-44.15	2.86	3.00	7.25	-39.76	-13.00	26.76	V
2104.5	-47.40	2.94	3.00	9.53	-40.81	-13.00	27.81	V

## LTE FDD Band 12\_Channel Bandwidth 5MHz\_QPSK\_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.64	2.86	3.00	7.25	-30.25	-13.00	17.25	Н
2122.5	-40.49	2.94	3.00	9.53	-33.90	-13.00	20.90	Н
1415.0	-41.61	2.86	3.00	7.25	-37.22	-13.00	24.22	V
2122.5	-47.60	2.94	3.00	9.53	-41.01	-13.00	28.01	V

LTE FDD Band 12\_Channel Bandwidth 5MHz\_QPSK\_ High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.0	-39.57	2.86	3.00	7.82	-34.61	-13.00	21.61	Н
2140.5	-44.46	2.94	3.00	9.35	-38.05	-13.00	25.05	Н
1427.0	-49.09	2.86	3.00	7.82	-44.13	-13.00	31.13	V
2140.5	-53.16	2.94	3.00	9.35	-46.75	-13.00	33.75	V

# LTE FDD Band 12\_Channel Bandwidth 10MHz\_QPSK\_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1408.0	-35.80	2.86	3.00	7.25	-31.41	-13.00	18.41	Н
2112.0	-42.81	2.94	3.00	9.53	-36.22	-13.00	23.22	Н
1408.0	-44.02	2.86	3.00	7.25	-39.63	-13.00	26.63	V
2112.0	-46.86	2.94	3.00	9.53	-40.27	-13.00	27.27	V

## LTE FDD Band 12\_Channel Bandwidth 10MHz\_QPSK\_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.44	2.86	3.00	7.25	-30.05	-13.00	17.05	Н
2122.5	-40.14	2.94	3.00	9.53	-33.55	-13.00	20.55	Н
1415.0	-42.32	2.86	3.00	7.25	-37.93	-13.00	24.93	V
2122.5	-47.86	2.94	3.00	9.53	-41.27	-13.00	28.27	V

LTE FDD Band 12\_Channel Bandwidth 10MHz\_QPSK\_ High Channel

	2121 DD Band 12_onarmor Bandwath 10mm12_q1 or _ riigh onarmor											
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization				
1422.0	-38.93	2.86	3.00	7.82	-33.97	-13.00	20.97	Н				
2133.0	-43.93	2.94	3.00	9.35	-37.52	-13.00	24.52	Н				
1422.0	-49.75	2.86	3.00	7.82	-44.79	-13.00	31.79	V				
2133.0	-52.44	2.94	3.00	9.35	-46.03	-13.00	33.03	V				

# LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_16QAM \_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.4	-36.15	2.86	3.00	7.25	-31.76	-13.00	18.76	Н
2099.1	-43.21	2.94	3.00	9.53	-36.62	-13.00	23.62	Н
1399.4	-44.30	2.86	3.00	7.25	-39.91	-13.00	26.91	V
2099.1	-47.91	2.94	3.00	9.53	-41.32	-13.00	28.32	V

LTE FDD Band 12	Channel	Randwidth	1 4MHz	16QAM	Middle Channel
	OHAHHO	Danawiani	1. <del>T</del> IVII 12	IUWANII	IVIII GUIC OHAHII ICI

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.55	2.86	3.00	7.25	-30.16	-13.00	17.16	Н
2122.5	-40.58	2.94	3.00	9.53	-33.99	-13.00	20.99	Н
1415.0	-42.17	2.86	3.00	7.25	-37.78	-13.00	24.78	V
2122.5	-48.94	2.94	3.00	9.53	-42.35	-13.00	29.35	V

LTE FDD Band 12\_Channel Bandwidth 1.4MHz\_16QAM \_ High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1430.6	-40.42	2.86	3.00	Gain(dB) 7.82	-35.46	-13.00	22.46	Н
2145.9	-46.23	2.94	3.00	9.35	-39.82	-13.00	26.82	Н
1430.6	-49.87	2.86	3.00	7.82	-44.91	-13.00	31.91	V
2145.9	-52.65	2.94	3.00	9.35	-46.24	-13.00	33.24	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_16QAM \_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1401.0	-35.47	2.86	3.00	7.25	-31.08	-13.00	18.08	Н
2101.5	-43.02	2.94	3.00	9.53	-36.43	-13.00	23.43	Н
1401.0	-43.39	2.86	3.00	7.25	-39.00	-13.00	26.00	V
2101.5	-46.72	2.94	3.00	9.53	-40.13	-13.00	27.13	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_16QAM \_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-35.27	2.86	3.00	7.25	-30.88	-13.00	17.88	Н
2122.5	-40.19	2.94	3.00	9.53	-33.60	-13.00	20.60	Н
1415.0	-41.90	2.86	3.00	7.25	-37.51	-13.00	24.51	V
2122.5	-47.85	2.94	3.00	9.53	-41.26	-13.00	28.26	V

LTE FDD Band 12\_Channel Bandwidth 3MHz\_16QAM \_ High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1429.0	-39.97	2.86	3.00	7.82	-35.01	-13.00	22.01	Н
2143.5	-44.64	2.94	3.00	9.35	-38.23	-13.00	25.23	Н
1429.0	-49.30	2.86	3.00	7.82	-44.34	-13.00	31.34	V
2143.5	-52.17	2.94	3.00	9.35	-45.76	-13.00	32.76	V

LTE FDD Band 12\_Channel Bandwidth 5MHz\_16QAM \_ Low Channel

	ETET BB Bana TE_Gnamer Banawan om TE_TO 47 mr _ Eon Gnamer											
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization				
1403.0	-36.61	2.86	3.00	7.25	-32.22	-13.00	19.22	Н				
2104.5	-42.75	2.94	3.00	9.53	-36.16	-13.00	23.16	Н				
1403.0	-43.97	2.86	3.00	7.25	-39.58	-13.00	26.58	V				
2104.5	-47.48	2.94	3.00	9.53	-40.89	-13.00	27.89	V				

LTE FDD Band 12\_Channel Bandwidth 5MHz\_16QAM \_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-35.08	2.86	3.00	7.25	-30.69	-13.00	17.69	Н
2122.5	-39.93	2.94	3.00	9.53	-33.34	-13.00	20.34	Н
1415.0	-42.17	2.86	3.00	7.25	-37.78	-13.00	24.78	V
2122.5	-47.05	2.94	3.00	9.53	-40.46	-13.00	27.46	V

LTE FDD Band 12\_Channel Bandwidth 5MHz\_16QAM \_ High Channel

_									
	Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
	1427.0	-39.94	2.86	3.00	7.82	-34.98	-13.00	21.98	Н
	2140.5	-44.97	2.94	3.00	9.35	-38.56	-13.00	25.56	Н
Ī	1427.0	-48.70	2.86	3.00	7.82	-43.74	-13.00	30.74	V
Ī	2140.5	-52.64	2.94	3.00	9.35	-46.23	-13.00	33.23	V

# LTE FDD Band 12\_Channel Bandwidth 10MHz\_16QAM \_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1408.0	-35.39	2.86	3.00	7.25	-31.00	-13.00	18.00	Н
2112.0	-43.24	2.94	3.00	9.53	-36.65	-13.00	23.65	Н
1408.0	-43.42	2.86	3.00	7.25	-39.03	-13.00	26.03	V
2112.0	-47.73	2.94	3.00	9.53	-41.14	-13.00	28.14	V

LTE FDD Band 12\_Channel Bandwidth 10MHz\_16QAM \_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.0	-34.17	2.86	3.00	7.25	-29.78	-13.00	16.78	Н
2122.5	-39.75	2.94	3.00	9.53	-33.16	-13.00	20.16	Н
1415.0	-42.73	2.86	3.00	7.25	-38.34	-13.00	25.34	V
2122.5	-47.65	2.94	3.00	9.53	-41.06	-13.00	28.06	V

LTE FDD Band 12\_Channel Bandwidth 10MHz\_16QAM \_ High Channel


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1422.0	-38.31	2.86	3.00	7.82	-33.35	-13.00	20.35	Н
2133.0	-43.48	2.94	3.00	9.35	-37.07	-13.00	24.07	Н
1422.0	-49.18	2.86	3.00	7.82	-44.22	-13.00	31.22	V
2133.0	-52.20	2.94	3.00	9.35	-45.79	-13.00	32.79	V


## 3.7 Frequency Stability under Temperature & Voltage Variations

#### LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

## **TEST CONFIGURATION**



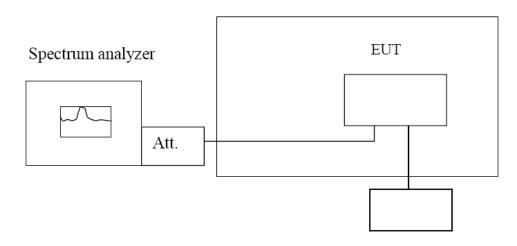

Variable Power Supply

### **TEST PROCEDURE**

The EUT was setup according to EIA/TIA 603D

### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30°C.
- 3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 12, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4. Repeat the above measurements at  $10^{\circ}$ C increments from  $-30^{\circ}$ C to  $+50^{\circ}$ C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +50°C.
- 7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at 10  $^{\circ}$ C increments from +50 $^{\circ}$ C to -30 $^{\circ}$ C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
- 9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.

# **TEST RESULTS**

### Remark:

1. We tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 12; recorded worst case.

LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

i roquonoy Error	ro romago				
Voltage	Frequency error (Hz)		Frequency	Limit	
(V)	QPSK	16QAM	QPSK	16QAM	(ppm)
3.50	-2.33	-1.00	0.003	0.001	2.50
3.70	-6.06	-2.11	0.009	0.003	2.50
4.20	-6.07	-3.78	0.009	0.005	2.50


Frequency Error vs Temperature

Temperature	Frequency	error (Hz)	Frequency	Limit	
(℃)	QPSK	16QAM	QPSK	16QAM	(ppm)
-30°	-6.18	4.32	0.009	0.006	2.50
-20°	-2.66	1.87	0.004	0.003	2.50
-10°	-1.42	1.58	0.002	0.002	2.50
0°	2.01	-3.10	0.003	0.004	2.50
10°	2.78	-2.38	0.004	0.003	2.50
20°	2.53	0.16	0.004	0.000	2.50
30°	0.63	4.64	0.001	0.007	2.50
40°	0.62	-1.19	0.001	0.002	2.50
50°	-4.56	3.49	0.006	0.003	2.50

V1.0 Page 49 of 50 Report No.: CTL1507031826-WF-6

# 4 Test Setup Photos of the EUT



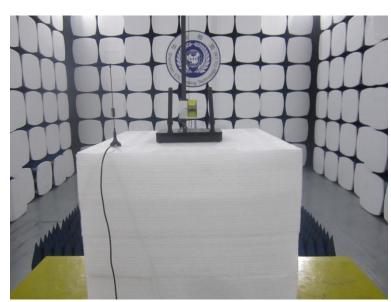

V1.0 Page 50 of 50 Report No.: CTL1507031826-WF-6

# 5 External and Internal Photos of the EUT

Please reference to the test report No.: CTL1507031826-WF-1