Project 12139-10

Prepared for:

Treehouse Labs, LLC. 2607 Armstrong Leander, TX 78641

By

Professional Testing (EMI), Inc. 1601 N. A.W. Grimes Blvd., Suite B Round Rock, Texas 78665

March 15, 2011

CERTIFICATION
Wireless Test Report
Treehouse Labs, LLC.
XYP222A
BiKN Tag

Table of Contents

Title I	Page	1
Table	of Contents	2
Certif	icate of Compliance	4
1.0	Introduction	5
1.1	Scope	5
1.2	EUT Description	
1.3	Test Site	5
1.4	Applicable Documents	6
2.0	Output Power	7
2.1	Test Procedure	7
2.2	Test Criteria	7
3.0	Occupied Bandwidth	7
3.1	Test Procedure	7
3.2	Test Criteria	7
4.0	Power Spectral Density	8
4.1	Test Procedure	8
4.2	Test Criteria	8
5.0	Band Edge Spurious Emissions	8
5.1	Test Procedure	
5.2	Test Criteria	8
6.0	Out of Band Spurious Emissions	9
6.1	Test Procedure	
6.2	Test Criteria	9
7.0	Antenna Requirements	9
7.1	Evaluation Procedure	
7.2	Evaluation Criteria	
8.0	Modifications	10
9.0	Test Equipment	10

Appendix A	Test Setup Diagrams	12
Appendix B	Test Results	14

$THIS\ REPORT\ SHALL\ NOT\ BE\ REPRODUCED\ EXCEPT\ IN\ FULL,\ WITHOUT\ THE\ WRITTEN\ APPROVAL\ OF\ PROFESSIONAL\ TESTING\ (EMI),\ INC.$

NOTICE: (1) This Report must not be used to claim product endorsement, by NVLAP, NIST, the FCC or any other Agency. This report also does not warrant certification by NVLAP or NIST.

- (2) This report shall not be reproduced except in full, without the written approval of Professional Testing (EMI), Inc.
- (3) The significance of this report is dependent on the representative character of the test sample submitted for evaluation and the results apply only in reference to the sample tested. The manufacturer must continuously implement the changes shown herein to attain and maintain the required degree of compliance.

12139-10 Page 3 of 45



Applicant: Treehouse Labs, LLC.

Applicant's Address: 2607 Armstrong

Leander, TX 78641

FCC ID: XYP222A

Project Number: 12139-10

Test Dates: January 14, 17, 21, 2011

The **Treehouse Labs XYP222A** was tested to and found to be in compliance with FCC 47 CFR Part 15 and IC RSS-210 issue 8.

The highest emissions generated by the above equipment are listed below:

Parameter	Frequency (MHz)	Level		Limit	Margin (dB)
Transmitter: Radiated Spurious	4810	62.2 dBµV/m @ 1 m		63.5 dBµV/m	-1.3
Transmitter: Output Power @ 1m	2405	-0.36 dBm	0.92 mW	+30 dBm	-30.36
Receiver: Radiated Spurious	188.5	10.3 dBuV/	m @ 10m	35.5 dBuV/m	-25.2

Note: See Pages 42-44 for Duty Cycle Correction factor which reduces the Average Radiated Spurious emissions level by -20dB.

Occupied Bandwidth							
6 dB	6 dB 20 dB 26 dB						
1.907 MHz	2.708 MHz	4.327 MHz					

I, Layne Lueckemeyer, for Professional Testing (EMI), Inc., being familiar with the FCC rules and test procedures have reviewed the test setup, measured data and this report. I believe them to be true and accurate.

Layne Lueckemeyer

Product Development Engineer

This report has been reviewed and accepted by Treehouse Labs, LLC. The undersigned is responsible for ensuring that this device will continue to comply with the FCC and IC rules.

12139-10 Page 4 of 45

1.0 Introduction

1.1 Scope

This report describes the extent of the Equipment Under Test (EUT) conformance to the Intentional Radiator requirements of the USA and Canada.

1.2 EUT Description

The XYP222A is a 2.4GHz active RFID tag using 802.15.4 protocol in the 2.4GHz band. It has as single pushbutton, a piezoelectric speaker, a pinhole reset button and a micro-usb charging connector that is used to charge the tag's internal battery. The EUT was tested while in a continuous transmit mode. The EUT was tuned to a low, middle, and high channel to perform power, occupied bandwidth, power spectral density, and harmonic tests. The EUT was tuned to a middle channel to perform spurious tests. The EUT continuously transmitted at maximum power. The system tested consisted of the following:

Manufacturer	Model	FCC ID Number
Treehouse Labs, LLC.	BiKN	XYP222A

The following rules apply to the operation of the EUT:

Guidelines	FCC Rules	IC Rules	
Guidennes	Part 15	RSS-GEN Issue 3	RSS-210 Issue 8
Transmitter Characteristics	15.247	4.1-4.6, 7	2.2, 2.6-2.7, A2.9, A8, A9
Spurious Radiated Power	15.209	4.2, 4.7, 4.8, 6, 7	2.2, 2.6-2.7, A2.9, A8, A9
Power Line Conducted	15.207	4.2, 4.7, 7.2	
Antenna Requirement	15.203	7.1, 7.1.4	

1.3 Test Site

Measurements were made at the PTI semi-anechoic facility designated Site 45 (FCC 459644, IC 3036B-1) in Austin, Texas. This site is registered with the FCC under Section 2.948 and Industry Canada per RS-212 and is subsequently confirmed by laboratory accreditation (NVLAP). The test site is located at 11400 Burnett Rd., Austin, Texas, 78758 while the main office is located at 1601 N. A.W. Grimes Blvd., Suite B, Round Rock, Texas, 78665. Professional Testing (EMI), Inc. (PTI), follows the guidelines of NIST for all uncertainty calculations, estimates and expressions thereof for EMC testing. The procedure of ANSI C63.4:2003 and KDB Publication No. 558074 were utilized for making all emissions measurements.

12139-10 Page 5 of 45

1.4 Applicable Documents

The data collected for this report are presented entirely in Appendix B.

Document	Title	Release
ANSI C63.4	American National Standard for Methods of	2009
	Measurement of Radio-Noise Emissions from Low	
	Voltage Electrical and Electronic Equipment.	
ANGL C62 10	American National Standard for	2000
ANSI C63.10	American National Standard for	2009
	Testing Unlicensed Wireless Devices	
47 CFR	Part 15 – Radio Frequency Devices	
	Subpart C -Intentional Radiators	
	_	
KDB Publication No.	Guidance on Measurements for Digital	April 16, 2007
558074	Transmission Systems (47 CFR 15.247)	
RSS-210	Low-power License-exempt Radio communication	Issue 8
	Devices (All Frequency Bands): Category I	
	Equipment	
RSS-Gen	General Requirements and Information for the	Issue 3
	Certification of Radio communication Equipment	

12139-10 Page 6 of 45

2.0 Output Power

Output power measurements were made on selected fundamental transmit frequencies of the EUT for the lowest, most center, and highest transmit frequency.

Tests of the fundamental emissions of the EUT also determined the worse case polarization of the device. The emissions of the device were measured with the EUT in three orthogonal axes.

2.1 Test Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a motorized turntable, which allows 360-degree rotation. For measurements of the fundamental signal, a measurement antenna was positioned at a distance of 1 meter as measured from the closest point of the EUT. Rotating the EUT maximized the emissions.

A spectrum analyzer with peak detection was used to find the maximum field strength during the variability testing. Resolution bandwidth (RBW) is chosen to encompass the entire 6 dB bandwidth of the fundamental signal, up to 3 times the bandwidth if possible. RBW used is recorded. A calculation was then made to determine the output power at the antenna terminal. A drawing showing the test setup is given in Appendix A.

2.2 Test Criteria

The maximum output power is 1 W for devices operating in the frequency range 2400 -2483.5 MHz according to FCC 15.247 and RSS-210.

3.0 Occupied Bandwidth

Occupied bandwidth measurements were performed on the EUT to determine compliance with FCC 15.247(a)(2) and RSS-210.

3.1 Test Procedure

The occupied bandwidth was measured with a spectrum analyzer connected to a double-ridged guide horn while the EUT was operating in continuous transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency. Display line and marker delta functions were used to measure the occupied bandwidth of the EUT. However, the 20 or 26 dB bandwidth is referenced to a peak power measurement taken at the entire bandwidth or more for RBW, then using 1% RBW for the 20 or 26 dB bandwidth. Measurements were made at three frequencies. A drawing showing the test setup is given in Appendix A.

3.2 Test Criteria

The minimum 6 dB occupied bandwidth for the EUT is 500 kHz as stated in 15.247(a)(2) and RSS-210. The 20 dB bandwidth must be measured and reported for the FCC and the 26 dB bandwidth must be measured and reported for IC.

12139-10 Page 7 of 45

4.0 Power Spectral Density

Power spectral density measurements were performed on the EUT to determine compliance with FCC 15.247(d) and RSS-210.

4.1 Test Procedure

The fundamental emission of the EUT is maximized and the spectrum analyzer is tuned to the highest point as measured in max-hold with peak detection. The analyzer is then centered on the maximum peak and set with the following parameters: RBW = 3 kHz, VBW > RBW, span = 300 kHz, and sweep time = 100s. The peak level is obtained after the sweep completes. The test setup is included in Appendix A.

4.2 Test Criteria

According to section FCC 15.247(d) and RSS-210 the maximum power spectral density is +8 dBm in any 3 kHz bandwidth.

5.0 Band Edge Spurious Emissions

Band edge spurious emissions measurements were performed on the EUT to determine compliance to FCC 15.247(c) and RSS-210.

5.1 Test Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a motorized turntable, which allows 360-degree rotation. For measurements of the fundamental signal, a measurement antenna was positioned at a distance of 1 meter as measured from the closest point of the EUT. Rotating the EUT maximized the emissions.

The spectrum analyzer was set for peak detection using a 500 kHz resolution bandwidth. The span is set wide enough to show the band edge and the edge of the emission of the screen. Measurement is made at the band edge using the marker delta method while transmitting on the channels nearest the band edge to determine if the EUT meets the test criteria. The test setup is included in Appendix A.

5.2 Test Criteria

According to FCC 15.247(c) and RSS-210 the band edge spurious emissions must be 20 dB below the highest peak in the operating band in any 100 kHz bandwidth. If the frequency falls in the restricted bands of 15.205 the maximum permitted average must be below the field strength listed in 15.209.

Alternatively, the band edge spurious emissions will meet criteria if they are attenuated below the limits specified in FCC 15.209 or RSS-210 Table 3.

12139-10 Page 8 of 45

6.0 Out of Band Spurious Emissions

Out of band spurious/harmonic emissions measurements were performed on the EUT to determine compliance to FCC sections 15.247(c), 15.209 and RSS-210.

6.1 Test Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a rotating turntable at a distance of 10 meters from the measurement antenna.

For spurious emissions below 1 GHz quasi-peak detection is used with a resolution bandwidth of 120 kHz. All measurements below 1 GHz were normalized to 3 meters using a 20 dB/decade distance extrapolation. The emissions were maximized by rotating the EUT and raising and lowering the measurement antenna from 1-4 meters. The test setup is included in Appendix A.

Spurious/harmonic emissions above 1 GHz peak are measured with average and peak detection with a resolution bandwidth of 1 MHz and measured at a distance of 1 meter. Average detection is used to determine compliance of the EUT if the peak does not meet the average limit. Non-harmonic emissions must satisfy the average limit and the peak limit (20 dB above average). The test setup is included in Appendix A.

Above 1 GHz testing was completed at 3 transmit frequencies to determine compliance.

6.2 Test Criteria

The radiated limits of FCC 15.209 and RSS-210 are shown below. The limits specified are at 3 meters. The limits are quasi-peak for emissions below 1 GHz and average for emissions above 1 GHz. Also above 1 GHz the peak limit is 20 dB above the average limit.

Frequency MHz	Specification Distance (Meters)	Field Strength (dBuV/m)	Test Distance (Meters)	Field Strength (dBuV/m)
30 to 88	3	40.0	10	29.5
88 to 216	3	43.5	10	33
216 to 960	3	46.0	10	35.5
Above 960	3	54.0	10	43.5

7.0 Antenna Requirements

An antenna evaluation was performed on the EUT to determine compliance with FCC sections 15.203, 15.247(b) and RSS-210.

7.1 Evaluation Procedure

The design of the EUT antenna is evaluated for conformance to engineering requirements for gain and to prevent substitution of unapproved antennae. Gain of the antenna is assessed by reviewing the antenna manufacturer's data sheet.

7.2 Evaluation Criteria

The antenna design must meet at least one of the following criteria:

12139-10 Page 9 of 45

- a) Antenna is permanently attached to the unit.
- b) Antenna must use a unique type of connector to attach to the EUT.
- c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Section 15.247(b)(4)(i) states that if the transmitting antenna has a directional gain greater than 6 dBi the power shall be reduced the amount in dB that the directional gain is greater than 6 dBi.

8.0 Modifications

N/A

9.0 Test Equipment

A list of the test equipment utilized to perform the testing is given below. The date of calibration is given for each.

Radiated Test Equipment

Asset #	Manufacturer	Model #	Description	Calibration Due
0085	HP	85650A	Quasi-peak Adapter (high band)	July 28, 2011
0949	HP	85662A	Spectrum Analyzer Display (high band)	NCR
1841	HP	8566B	Spectrum Analyzer (high band)	June 8, 2011
0990	HP	85685A	RF Preselector (high band)	March 24, 2011
1281	HP	85650A	Quasi-peak Adapter (low band)	July 28, 2011
1834	HP	85662A	Spectrum Analyzer Display (low band)	NCR
1145	HP	8568B	Spectrum Analyzer (low band)	July 28, 2011
1035	HP	85685A	RF Preselector (low band)	March 3, 2011
1454	HP	8447D	RF Preamplifier	July 06, 2011
1497	Emco	3108	Biconical Antenna	August 4, 2011
1486	Emco	3147	3147 Log Periodic Dipole Array Antenna A	
C026	none	none	Coaxial Cable (low band)	August 02, 2011
C027	none	none	Coaxial Cable (high band)	August 02, 2011

Microwave Radiated Test Equipment


Asset #	Manufacturer	Model #	Description	Calibration Due
1780	ETS-Lindgren	3117	Ridge Guide Antenna	November 11, 2011
1529	Miteq	Antenna Mounted	Microwave Preamplifier (preamp 1)	July 16, 2011
1841	HP	8566B	Spectrum Analyzer	June 8, 2011
0949	HP	85662A	Spectrum Analyzer Display	NCR
1530	Miteq	None	Microwave Preamplifier (preamp 2)	July 16, 2011
C030	None	None	Coaxial Cable (MRE band)	March 22, 2011

12139-10 Page 10 of 45

Asset #	Manufacturer	Model #	Description	Calibration Due
XXXX	Pasternack	LLS	2 sections, total 12ft	Cal Before Use
0819	EMCO	3115	Ridge Guide Antenna	October 15, 2011
0897	Miteq	5124B	Microwave Preamplifier (preamp 1)	July 14, 2011
(Rental				
unit)	Rohde & Schwarz	FSQ	Spectrum Analyzer	August 24, 2011
1542	A.H. Systems	SAS 572	Antenna, Horn 18-26.5GHz	NCR
1735	Pasternack	PE9850-20	Antenna, Horn 26.5-40GHz	NCR

12139-10 Page 11 of 45

12139-10 Page 12 of 45

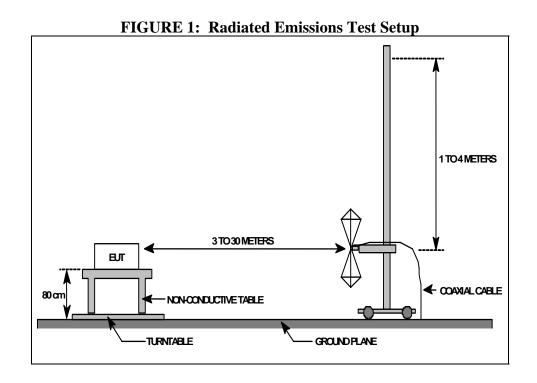

12139-10 Page 13 of 45

12139-10 Page 14 of 45

Output Power Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	1 MHz	1 MHz	Peak

COMMENT	Transmitting

Frequency (MHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)
2405	0	1	96.2	26.4	29.0	2.8	101.6
2440	0	1	94.3	26.3	29.0	2.8	99.8
2480	0	1	94.8	26.4	29.0	2.8	100.2

Calculations

$$P = \frac{(E*d)^2}{30*G}$$

P=Power in watts, E=measured maximum field strength in V/m, d=distance in meters, G=numeric gain of transmitting antenna

Distance=1 meters Gain=0 dBi

Calculated Result

Frequency	Field Strength	E.I.	R.P.	Limit
(MHz)	(dBµV)	dBm	mW	(dBm)
2405	101.6	-0.36	0.92	30
2440	99.8	-2.16	0.61	30
2480	100.2	-1.76	0.67	30

NOTE: Computed power by applying a bandwidth correction factor of 10 log (EBW/1 MHz) to the spectral peak of the emission.

Transmit Power: $10 \log (1.91 \text{ MHz} / 1 \text{ MHz}) = 2.81$ 2.81 was added to the measured value to compute real power in mW.

12139-10 Page 15 of 45

Power Spectral Density

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1 m	Horn	3 kHz	300 kHz	Peak

COMMENT	Transmitting
---------	--------------

Frequency (MHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV/m)
2405	0	1	83.9	26.4	29.0	2.8	89.3
2440	0	1	78.5	26.3	29.0	2.8	84.0
2480	0	1	82.4	26.4	29.0	2.8	87.8

Calculations

$$P = \frac{(E*d)^2}{30*G}$$

P=Power in watts, E=measured maximum field strength in V/m, d=distance in meters, G=numeric gain of transmitting antenna

Distance=1 meters Gain=0 dBi

Calculated Result


Frequency (MHz)	Field Strength (dBµV/3 kHz)	E.I.R.P (dBm / 3 kHz)	Limit (dBm / 3 kHz)
2405	89.3	-15.47	8
2440	84.0	-20.77	8
2480	87.8	-16.97	8

Plots of PSD measurements are presented on the following pages.

12139-10 Page 16 of 45

Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

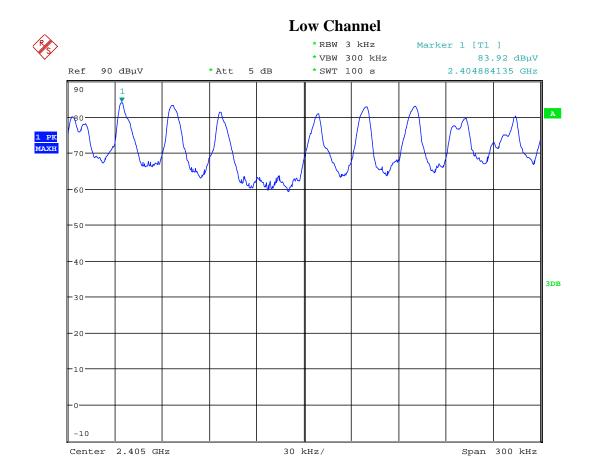


Date: 27.JAN.2011 17:18:28

Result = Pass

12139-10 Page 17 of 45

Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

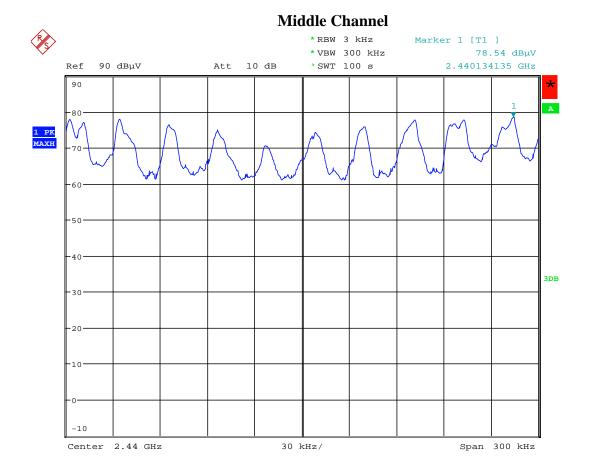


Date: 27.JAN.2011 17:41:34

Result = Pass

12139-10 Page 18 of 45

Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

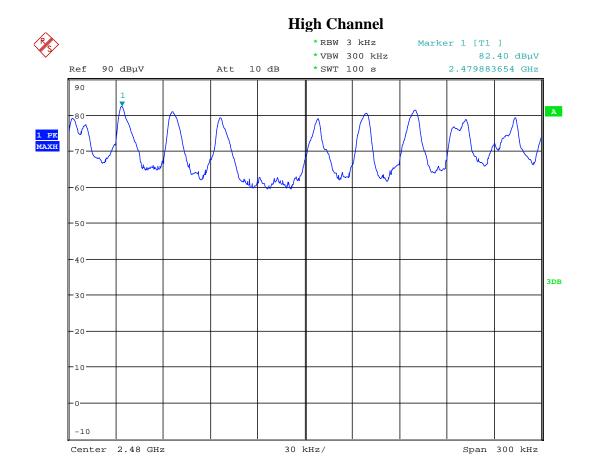

Date: 27.JAN.2011 17:59:33

Result = Pass


12139-10 Page 19 of 45

Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting Low Channel 6 dB Bandwidth – 1.522 MHz 20 dB Bandwidth – 2.580 MHz
	26 dB Bandwidth – 3.974 MHz


Low Channel 6 dB

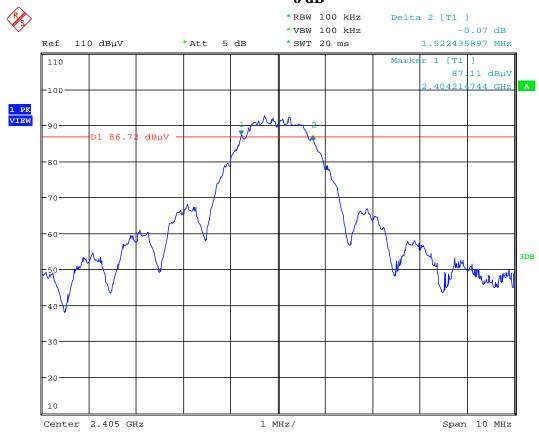

Date: 27.JAN.2011 17:10:52

12139-10 Page 20 of 45


Low Channel 20 dB

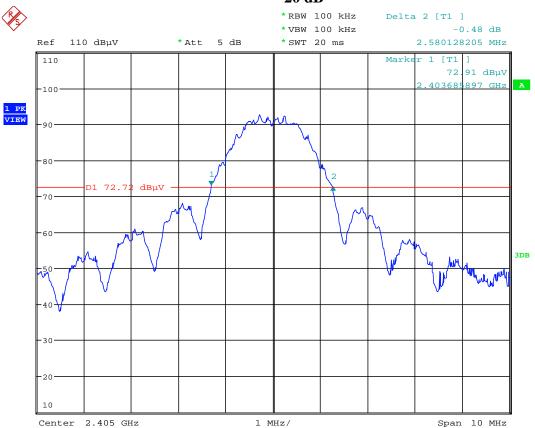

Date: 27.JAN.2011 17:11:39

12139-10 Page 21 of 45

Low Channel 26 dB

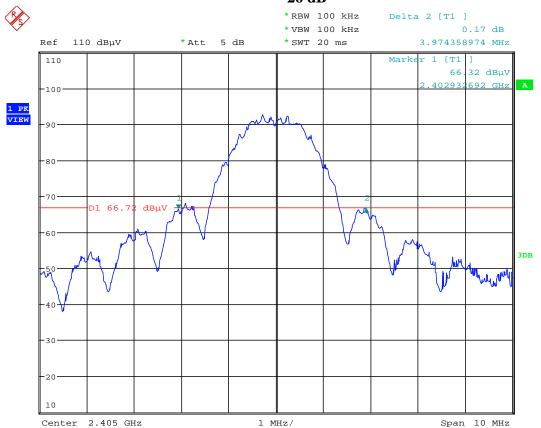

Date: 27.JAN.2011 17:12:45

Result = Pass


12139-10 Page 22 of 45

Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting Middle Channel 6 dB Bandwidth – 1.907 MHz 20 dB Bandwidth – 2.708 MHz
	26 dB Bandwidth – 4.327 MHz


Middle Channel 6dB

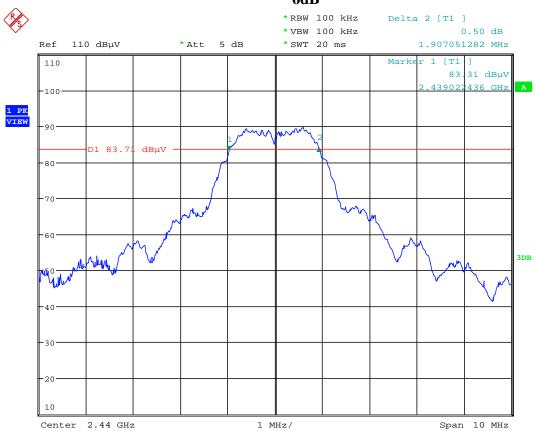

Date: 27.JAN.2011 17:36:24

12139-10 Page 23 of 45


Middle Channel 20 dB

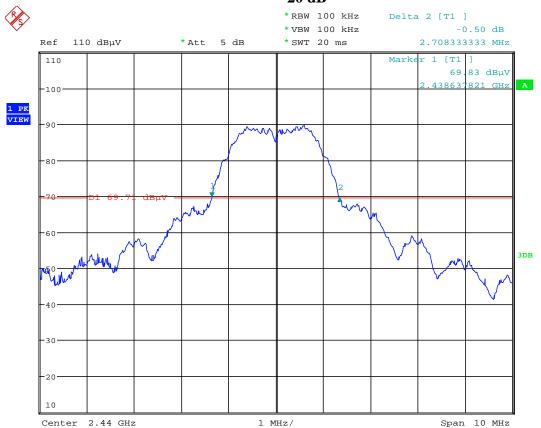

Date: 27.JAN.2011 17:37:08

12139-10 Page 24 of 45

Middle Channel 26 dB

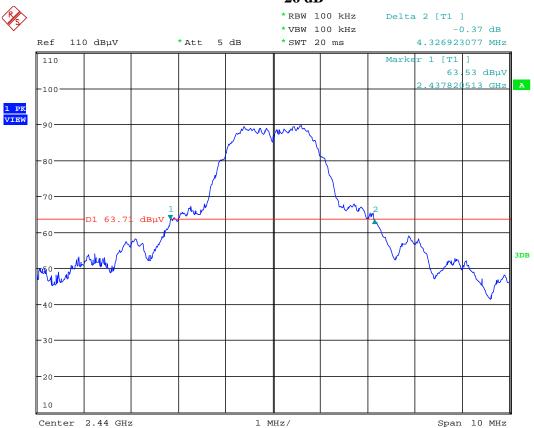

Date: 27.JAN.2011 17:37:58

Result = Pass


12139-10 Page 25 of 45

Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting High Channel 6 dB Bandwidth – 1.619 MHz 20 dB Bandwidth –2.644 MHz
	26 dB Bandwidth – 4.263 MHz


High Channel 6 dB

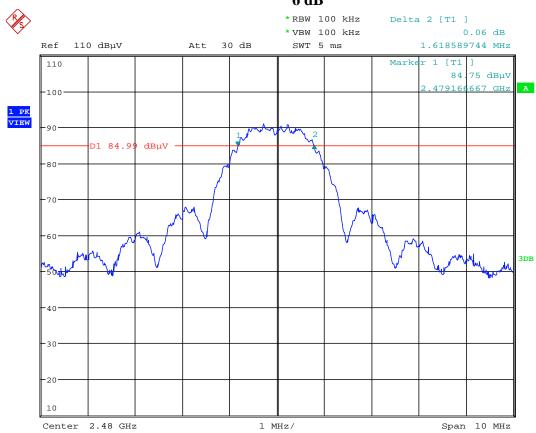

Date: 27.JAN.2011 17:54:28

12139-10 Page 26 of 45


High Channel 20 dB

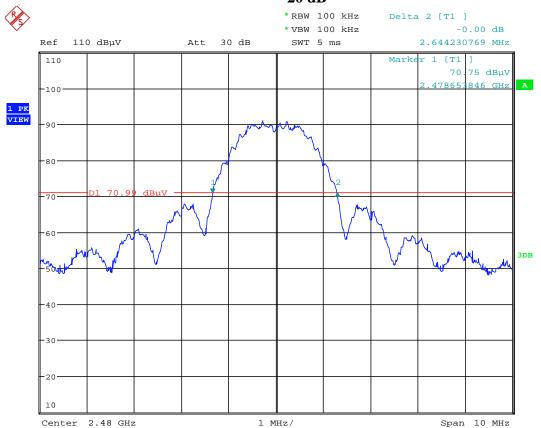

Date: 27.JAN.2011 17:55:13

12139-10 Page 27 of 45

High Channel 26 dB

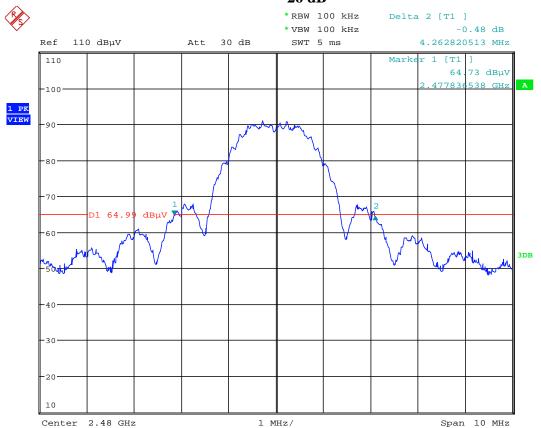

Date: 27.JAN.2011 17:56:02

Result = Pass


12139-10 Page 28 of 45

Band Edge Spurious Emissions Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	500 kHz	500 kHz	Peak

COMMENT	Transmitting No spurs existed at the band edges by inspection of graphs; therefore no radiated
	measurement was made.

Frequency (MHz)	Recorded Level (dB)	Limit (dB) down from fundamental	Margin (dB)	Detector Function
2400	-42.14	-20.0	-22.14	Peak

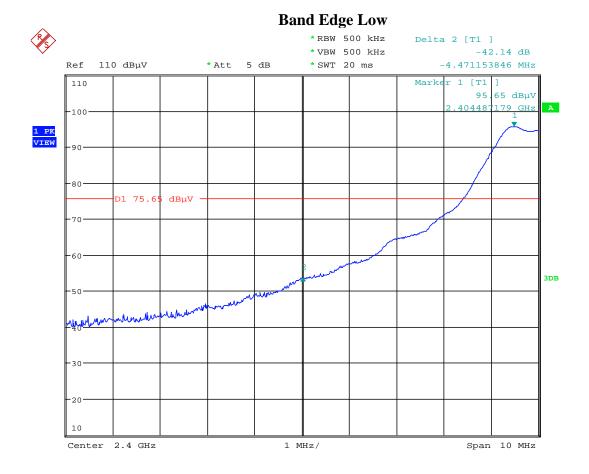

Date: 27.JAN.2011 17:14:59

Result = Pass


12139-10 Page 29 of 45

Band Edge Spurious Emissions Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	15.247	1m	Horn	500 kHz	500 kHz	Peak

COMMENT	Transmitting No spurs existed at the band edges by inspection of graphs; therefore no radiated
	measurement was made.

Frequency (MHz)	Recorded Level (dB)	Limit (dB) down from fundamental	Margin (dB)	Detector Function
2483.5	-33.88	-20.0	-13.88	Peak

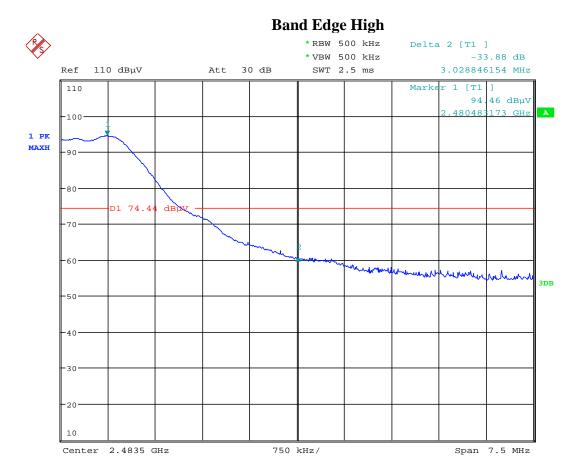

Date: 27.JAN.2011 17:52:53

Result = Pass

12139-10 Page 30 of 45

Restricted Bands Data Sheet

PROJECT#	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	FCC B	1 m	Horn	1 MHz	10 Hz / 1 MHz	Average / Peak

COMMENT	Investigated Restricted Bands at 2390 MHz and 2483.5 MHz

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
2.39	0	1	57.1	26.4	28.1	2.8	61.6	83.5	-21.9	Peak Hold
2.39	0	1	45.2	26.4	28.1	2.8	49.7	63.5	-13.8	Average
2.4385	0	1	66.2	26.4	29	2.8	71.6	83.5	-11.9	Peak Hold
2.4385	0	1	54.8	26.4	29	2.8	60.2	63.5	-3.3	Average

12139-10 Page 31 of 45


Spurious Radiated Emissions Data Sheet Emissions 30 MHz ... 1 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	10 m	Bicon Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Transmitting Middle Channel
COMMENT	Transmitting whodic Chamer

Horizontal

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
136.42	10	100	1	Quasi-peak	22.4	11.4	33.0	-21.6
168.72	10	1	1	Quasi-peak	22.7	12.8	33.0	-20.2

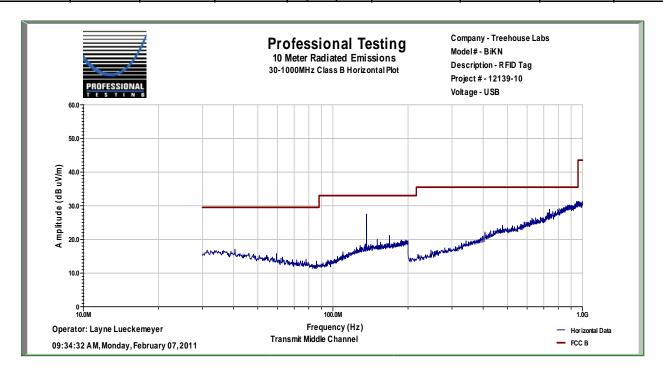

Result = Pass

12139-10 Page 32 of 45


Spurious Radiated Emissions Data Sheet Emissions 30 MHz ... 1 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	10 m	Bicon Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Transmitting Middle Channel
---------	-----------------------------

Vertical

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
341.6	10	1	1	Quasi-peak	29.6	12.7	35.5	-22.8

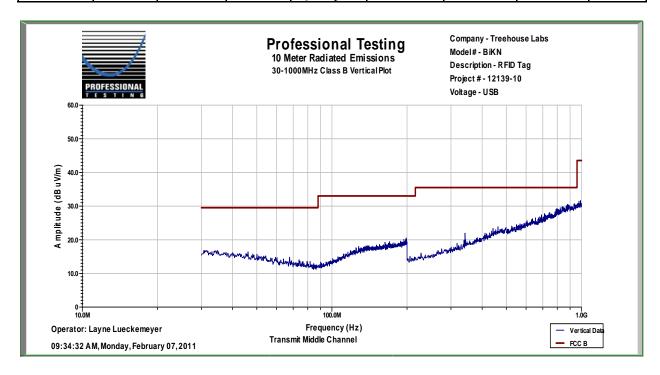

Result = Pass


12139-10 Page 33 of 45

Spurious Radiated Emissions Data Sheet 1 GHz...12 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmit Middle Channel

Horizontal

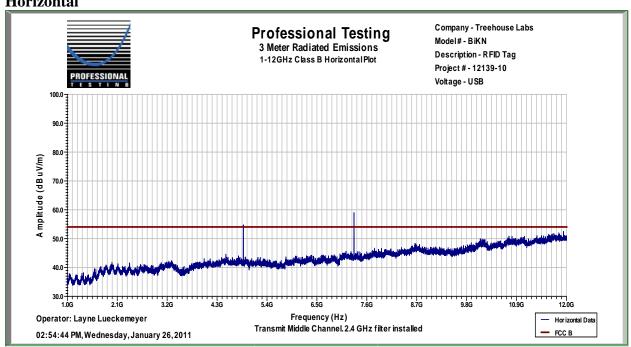

NOTE: Graphical Data for overview only. Pre scan used to determine if spurious signals other than harmonics were present.


12139-10 Page 34 of 45

Spurious Radiated Emissions Data Sheet 1 GHz...12 GHz

PROJECT#	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmit Middle Channel

Vertical

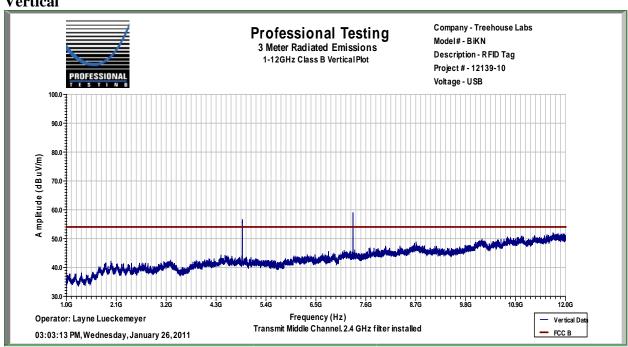

NOTE: Graphical Data for overview only. Pre scan used to determine if spurious signals other than harmonics were present.

12139-10 Page 35 of 45

Spurious/Harmonic Emissions 1 GHz ... 25 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting Low Channel Harmonics and spurious investigated up to 24.05 GHz.

Horizontal

HOLIZOHU										
Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.81	0	1	46.2	24.4	33.5	4.2	59.5	63.5	-4.0	Average
7.215	0	1	49.2	24.1	36.8	5.0	67.0	83.5	-16.5	Pk Hld
7.215	0	1	29.2	24.1	36.8	5.0	47.0	63.5	-16.5	Average
9.62	Noise	Floor	30.1	28.5	38.2	4.6	44.5	63.5	-19.0	Average
12.025	Noise	Floor	33.4	25.3	40.3	7.1	55.5	63.5	-8.0	Average
14.43	Noise	Floor	26.5	25.3	42.0	7.7	50.9	63.5	-12.6	Average
16.835	Noise	Floor	27.3	24.5	41.0	7.6	51.4	63.5	-12.1	Average
19.24	Noise	Floor	38.3	43.2	36.6	8.8	40.5	63.5	-23.0	Average
21.645	Noise	Floor	39.4	41.8	36.9	9.5	44.0	63.5	-19.5	Average
24.05	Noise	Floor	39.9	42.2	37.1	10.4	45.2	63.5	-18.3	Average

Vertical

verucai										
Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.81	0	1	48.9	24.4	33.5	4.2	62.2	63.5	-1.3	Average
7.215	0	1	49.4	24.1	36.8	5.0	67.2	83.5	-16.3	Pk Hld
7.215	0	1	29.4	24.1	36.8	5.0	47.2	63.5	-16.3	Average
9.62	Noise	Floor	29.1	28.5	38.2	4.6	43.5	63.5	-20.0	Average
12.025	Noise	Floor	32.4	25.3	40.3	7.1	54.5	63.5	-9.0	Average
14.43	Noise	Floor	27.9	25.3	42.0	7.7	52.3	63.5	-11.2	Average
16.835	Noise	Floor	28	24.5	41.0	7.6	52.1	63.5	-11.4	Average
19.24	Noise	Floor	38.3	43.2	36.6	8.8	40.5	63.5	-23.0	Average
21.645	Noise	Floor	39.4	41.8	36.9	9.5	44.0	63.5	-19.5	Average
24.05	Noise	Floor	39.9	42.2	37.1	10.4	45.2	63.5	-18.3	Average

Result = Pass

NOTE: A correction factor of -20 dB was applied due to the duty cycle of the EUT being <10 %. (See Pages 42-44 for timing data and calculation.)

12139-10 Page 36 of 45

Spurious/Harmonic Emissions 1 GHz ... 25 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting Middle Channel
COMMENT	Harmonics and spurious investigated up to 24.4 GHz.

Horizontal

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.88	0	1	42.3	24.4	33.5	4.2	55.7	63.5	-7.8	Average
7.32	0	1	39	24.1	36.8	5.1	56.8	63.5	-6.7	Average
9.76	Noise	Floor	28.9	24.4	38.2	5.0	47.6	63.5	-15.9	Average
12.2	Noise	Floor	32.9	26.7	39.5	5.6	51.3	63.5	-12.2	Average
14.64	Noise	Floor	27.6	24.5	41.4	6.1	50.6	63.5	-12.9	Average
17.08	Noise	Floor	27.8	22.8	42.7	7.6	55.3	63.5	-8.2	Average
19.52	Noise	Floor	38.3	43.5	36.5	6.7	38.0	63.5	-25.5	Average
21.96	Noise	Floor	39.4	40.6	36.9	10.4	46.1	63.5	-17.4	Average
24.4	Noise	Floor	39.9	42.2	37.2	10.3	45.1	63.5	-18.4	Average

Vertical

v Ci ticai										
Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.88	0	1	47.1	24.4	33.5	4.2	60.5	63.5	-3.0	Average
7.32	0	1	44.2	24.1	36.8	5.1	62.0	63.5	-1.5	Average
9.76	Noise	Floor	29	24.4	38.2	5.0	47.7	63.5	-15.8	Average
12.2	Noise	Floor	32	26.7	39.5	5.6	50.4	63.5	-13.1	Average
14.64	Noise	Floor	27.6	24.5	41.4	6.1	50.6	63.5	-12.9	Average
17.08	Noise	Floor	27.8	22.8	42.7	7.6	55.3	63.5	-8.2	Average
19.52	Noise	Floor	38.3	43.5	36.5	6.7	38.0	63.5	-25.5	Average
21.96	Noise	Floor	39.4	40.6	36.9	10.4	46.1	63.5	-17.4	Average
24.4	Noise	Floor	39.9	42.2	37.2	10.3	45.1	63.5	-18.4	Average

Result = Pass

NOTE: A correction factor of -20 dB was applied due to the duty cycle of the EUT being <10 %. (See Pages 42-44 for timing data and calculation.)

12139-10 Page 37 of 45

Spurious/Harmonic Emissions 1 GHz ... 25 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 27, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting High Channel
	Harmonics and spurious investigated up to 24.8 GHz.

Horizontal

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.96	0	1	42.2	24.4	33.5	4.2	55.6	63.5	-7.9	Average
7.44	0	1	44	24.7	37.3	4.5	61.1	63.5	-2.4	Average
9.92	Noise	Floor	28.7	23.5	38.2	5.0	48.4	63.5	-15.1	Average
12.4	Noise	Floor	31.3	27.8	39.9	6.2	49.6	63.5	-13.9	Average
14.88	Noise	Floor	27.1	23.4	41.1	7.3	52.1	63.5	-11.4	Average
17.36	Noise	Floor	27.3	21.5	44.6	8.7	59.1	63.5	-4.4	Average
19.84	Noise	Floor	38.3	43.7	36.5	8.2	39.4	63.5	-24.1	Average
22.32	Noise	Floor	39.4	40.5	37.1	9.4	45.4	63.5	-18.1	Average
24.8	Noise	Floor	39.9	42.1	37.2	10.1	45.1	63.5	-18.4	Average

Vertical

vertical										
Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dBµV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Detector Function
4.96	0	1	46	24.4	33.5	4.2	59.4	63.5	-4.1	Average
7.44	0	1	42	24.7	37.3	4.5	59.1	63.5	-4.4	Average
9.92	Noise	Floor	28.3	23.5	38.2	5.0	48.0	63.5	-15.5	Average
12.4	Noise	Floor	31.2	27.8	39.9	6.2	49.5	63.5	-14.0	Average
14.88	Noise	Floor	26.8	23.4	41.1	7.3	51.8	63.5	-11.7	Average
17.36	Noise	Floor	26.2	21.5	44.6	8.7	58.0	63.5	-5.5	Average
19.84	Noise	Floor	38.3	43.7	36.5	8.2	39.4	63.5	-24.1	Average
22.32	Noise	Floor	39.4	40.5	37.1	9.4	45.4	63.5	-18.1	Average
24.8	Noise	Floor	39.9	42.1	37.2	10.1	45.1	63.5	-18.4	Average

Result = Pass

NOTE: A correction factor of -20 dB was applied due to the duty cycle of the EUT being <10 %. (See Pages 42-44 for timing data and calculation.)

12139-10 Page 38 of 45


Receiver Radiated Spurious Emissions Data Sheet 30 MHz...1 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	10 m	Bicon Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Receive Mode Only
---------	-------------------

Horizontal

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
188.5	10	Noise	Floor	Quasi-peak	19.4	10.3	35.5	-25.2

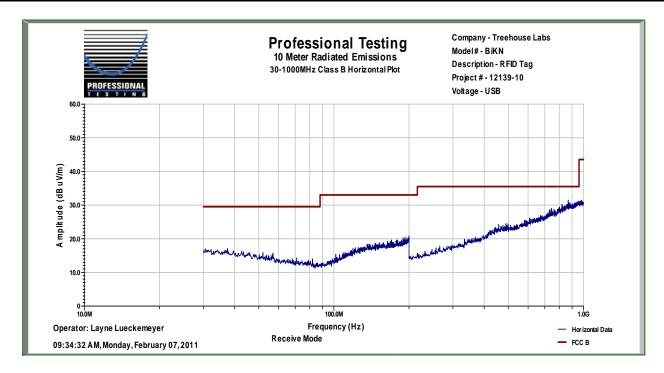

Result = Pass

12139-10 Page 39 of 45


Receiver Radiated Spurious Emissions Data Sheet 30 MHz...1 GHz

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	10 m	Bicon Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT Receive M	ode Only
--------------------------	----------

Vertical

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
318.6	10	114	1	Quasi-peak	24.1	6.4	35.5	-29.1

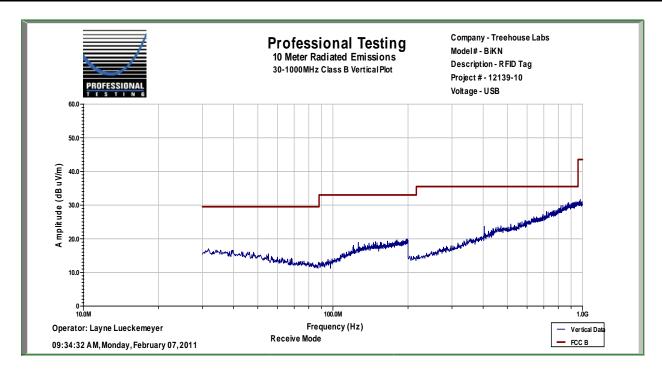

Result = Pass

12139-10 Page 40 of 45


Receiver Radiated Spurious Emissions Data Sheet $1~\mathrm{GHz}\dots12~\mathrm{GHz}$

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Peak/Avg

-	
COMMENT	Receive Mode only

Horizontal

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
4877	3	Noise	Floor	Average	46.6	36.3	54	-17.6
6618	3	Noise	Floor	Average	47.7	40.6	54	-13.4
8770	3	Noise	Floor	Average	50.8	49.0	54	-5.0
10377	3	Noise	Floor	Average	52.3	50.9	54	-3.1

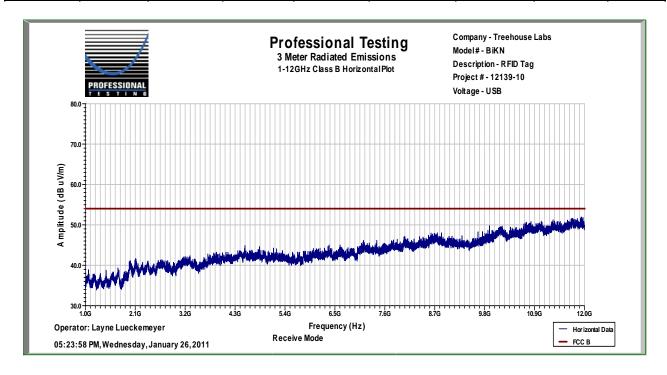

Result = Pass

12139-10 Page 41 of 45


Receiver Radiated Spurious Emissions Data Sheet $1~\mathrm{GHz}\dots12~\mathrm{GHz}$

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 26, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Peak/Avg

COMMENT	Receive Mode only

Vertical

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dBµV)	Corrected Level (dBµV/m)	Limit Level (dBµV/m)	Margin (dB)
4753	3	Noise	Floor	Average	46.6	36.0	54	-18.0
6670	3	Noise	Floor	Average	48.7	41.8	54	-12.2
7684	3	Noise	Floor	Average	49.7	45.4	54	-8.6
10132	3	Noise	Floor	Average	52.6	50.9	54	-3.1

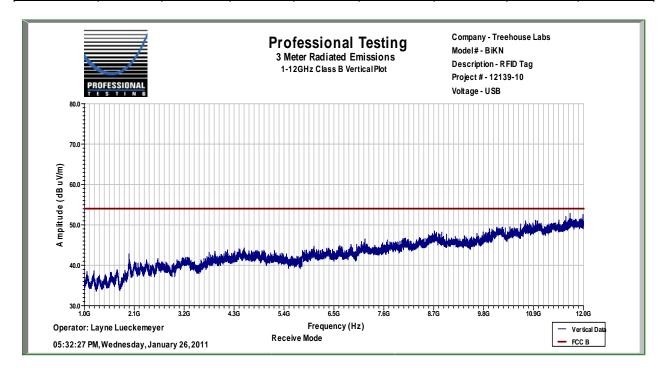


Result = Pass

12139-10 Page 42 of 45

Timing Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 21, 2011	15.247	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Timing data is used to calculate duty cycle of BiKN-Tag
---------	---

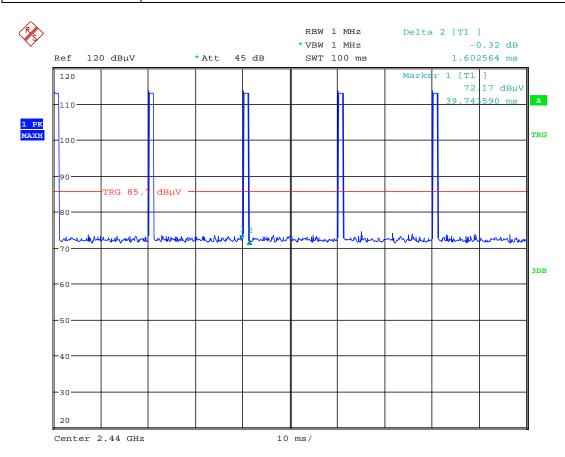


Date: 27.JAN.2011 19:39:12

12139-10 Page 43 of 45

Timing Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12139-10	January 21, 2011	15.247	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Timing data is used to calculate duty cycle of BiKN-TAG

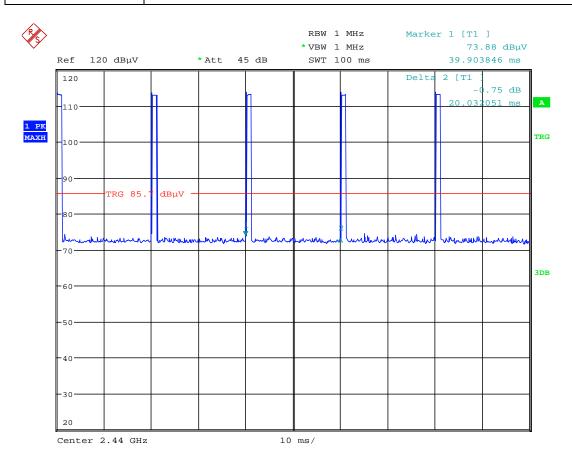

Date: 27.JAN.2011 19:39:38

Duty Cycle is calculated at < 10%

12139-10 Page 44 of 45

Timing Calculation

Duty Cycle = 10%

Peak to Average Factor = 20*log(Duty Cycle)

Peak to Average Factor = 20*log(0.10)

12139-10 Page 45 of 45