



Emissions Test Report

EUT Name: Highpower USB Wifi Module

Model No.: MaxR 950

CFR 47 Part 15.247 2011 and RSS 210: 2010

Prepared for:

Praven Singh
Arada Systems, Inc.
4633 Old Ironsides Drive, Suite 415
Santa Clara, CA 95054
Tel: (408) 773-9298

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane
Pleasanton, CA 94566
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: June 21, 2012
Report Number: 31250954.001

Statement of Compliance

Manufacturer: Arada Systems, Inc.
4633 Old Ironsides Drive, Suite 415
Santa Clara, CA 95054 U.S.A.

Requester / Applicant: Praven Singh

Name of Equipment: Highpower USB Wifi Module

Model No. MaxR 950

Type of Equipment: Intentional Radiator

Application of Regulations: CFR 47 Part 15.247 2011 and RSS 210: 2010

Test Dates: March 26 – June 6, 2012

Guidance Documents:


Emissions: ANSI C63.10-2009 and TIA 603-C:2004

Test Methods:

Emissions: ANSI C63.10-2009 and TIA 603-C:2004

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Suresh Kondapalli	June 15, 2012	Conan Boyle	June 21, 2012
Test Engineer	Date	NVLAP Signatory	Date



**INDUSTRY
CANADA**

Testing Cert #3331.03

US5254

2932M-1

1	<i>Executive Summary</i>	6
1.1	Scope	6
1.2	Purpose	6
1.3	Summary of Test Results	6
1.3.1	Measured values of key parameters	7
1.4	Special Accessories	7
1.5	Equipment Modifications	7
2	<i>Laboratory Information</i>	8
2.1	Accreditations & Endorsements	8
2.1.1	US Federal Communications Commission	8
2.1.2	NIST / A2LA	8
2.1.3	Canada – Industry Canada	8
2.1.4	Japan – VCCI	8
2.1.5	Acceptance by Mutual Recognition Arrangement	9
2.2	Test Facilities	9
2.2.1	Emission Test Facility	9
2.2.2	Immunity Test Facility	9
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	10
2.3.2	Measurement Uncertainty	10
2.4	Calibration Traceability	11
3	<i>Product Information</i>	12
3.1	Product Description	12
3.2	Equipment Configuration	12
3.3	Operating Mode	12
3.4	Duty Cycle:	12
3.5	Unique Antenna Connector	13
3.5.1	Results	13
4	<i>Emission Requirements – 2400 MHz to 2483.5 MHz Band</i>	14
4.1	Output Power Requirements	14
4.1.1	Test Method	14
4.1.2	Results	15
4.2	Occupied Bandwidth	31
4.2.1	Test Method	31
4.2.2	Results	32
4.3	Band-edge Requirements	39
4.3.1	Results	39

4.4 Peak Power Spectral Density	46
4.4.1 Test Method	46
4.4.2 Results	47
4.5 Transmitter Spurious Emissions	51
4.5.1 Test Methodology	51
4.5.2 Transmitter Spurious Emission Limit	52
4.5.3 Test Results	52
4.5.4 Sample Calculation	73
4.6 Receiver Spurious Emissions	74
4.6.1 Test Methodology	74
4.6.2 Receiver Spurious Emission Limit	75
4.6.3 Test Results	75
4.7 AC Conducted Emissions	80
4.7.1 Test Methodology	80
4.7.2 Test Results	81
4.7.3 Test Setup Photos	82
5 Test Equipment Use List	87
5.1 Equipment List	87
6 EMC Test Plan	88
6.1 Introduction	88
6.2 Customer	88
6.3 Equipment Under Test (EUT)	89
6.4 Test Specifications	93

Table 1: Summary of Test Results	6
Table 2: RF Output Power at the Antenna Port – Test Results.....	15
Table 3: Occupied Bandwidth – Test Results	32
Table 4: Peak Power Spectral Density – Test Results	47
Table 5: Transmit Spurious Emission at Band-Edge Requirements	53
Table 6: Customer Information.....	88
Table 7: Technical Contact Information	88
Table 8: EUT Specifications	89
Table 9: EUT Channel Power Specifications.....	90
Table 10: Interface Specifications:.....	90
Table 11: Supported Equipment : None.....	90
Table 12: Description of Sample used for Testing.....	91
Table 13: Description of Test Configuration used for Radiated Measurement.	91
Table 14: Final Test Mode for 2400 - 2483.5 MHz Band.....	92
Table 15: Test Specifications.....	93

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247 2011 and RSS 210: 2010 based on the results of testing performed on March 26 to June 6, 2012 on the Highpower USB Wifi Module Model: MaxR 950 manufactured by *Arada Systems, Inc.* This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters (from Standard)	Result
2400 MHz to 2483.5 MHz Band			
Spurious Emission in Received Mode	CFR47 15.109, RSS-GEN Sect.7.2.3	Class B	Complied
Spurious Emission in Transmitted Mode	CFR47 15.209, RSS-GEN Sect.7.2.3	Class B	Complied
Restricted Bands of Operation	CFR47 15.205, RSS 210 Sect.2.6	Class B	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.7.2.2	Class B	Complied
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.4.4.1	≥ 500 kHz	Complied
Maximum Transmitted Power	CFR47 15.247 (b3), RSS 210 Sect. A.8.4	30 dBm	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 210 Sect. A.8.2	8 dBm/ 3 kHz	Complied
Bandedge Measurement	CFR47 15.247 (d), RSS 210 Sect. A.8.5	20 dBr	Complied

Note: Since EUT is portable device where the end user will have the direct contact, RF Exposure/ SAR test requirements are evaluated separately

1.3.1 Measured values of key parameters

Test	Test Method ANSI C63.4	Measured value/ Margin	Result
2400 MHz to 2483.5 MHz Band			
Maximum Transmitted Power	CFR47 15.247 (b3), RSS 210 Sect. A.8.4	29.12 dBm -0.88dB	Complied
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.4.4.1	16.48 MHz (6 dB BW) 16.75 MHz (99% BW)	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 210 Sect. A.8.2	-4.79 dBm -12.79 dB	Complied
Spurious Emission in Transmitted Mode	CFR47 15.209, RSS-GEN Sect.7.2.3	50.33 dBuV -3.67 dB at 3 meters	Complied
Spurious Emission in Received Mode	CFR47 15.109, RSS-GEN Sect.7.2.3	33.26 dBuV -13.74 dB at 3 meters	Complied

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 *Accreditations & Endorsements*

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254).

The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the A2LA Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Testing Cert #3331.03). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M-1). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. A0031).

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Testing Cert #3331.03). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, and PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

	U_{lab}	U_{cispr}
Radiated Disturbance		
30 MHz – 40,000 MHz	3.2 dB	5.2 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.4 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.5 dB

Measurement Uncertainty – Immunity Testing

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 4.1\%$.

The estimated combined standard uncertainty for radiated immunity measurements is ± 2.7 dB.

The estimated combined standard uncertainty for conducted immunity measurements is ± 1.4 dB.

The estimated combined standard uncertainty for damped oscillatory wave immunity measurements is $\pm 8.8\%$.

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 0.45\%$.

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is ± 3.88 Hz

The estimated combined standard uncertainty for carrier power measurements is ± 1.59 dB.

The estimated combined standard uncertainty for adjacent channel power measurements is ± 1.47 dB.

The estimated combined standard uncertainty for modulation frequency response measurements is ± 0.46 dB.

The estimated combined standard uncertainty for transmitter conducted emission measurements is ± 4.01 dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The MaxR 950 is a Highpower USB Wifi Module complies with the IEEE 802.11g and HT20 specification to communicate with other 802.11 wireless devices in the 2.4 GHz and 4.9 GHz band, and data rates upto 65 Mbps. The EUT is normally placed inside host device and powered by host system.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with test standards. The EUT was programed to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

EUT was programed to operate at > 99% duty for the purpose of testing. This operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Duty Cycle:

None

3.5 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.5.1 Results

The Highpower USB Wifi Module has two external antennas with reverse polarity SMA connector. Antennas are connected to Transmitter module through 70mm long pigtail cable with MMCX connector at PCB end and reverse polarity SMA connector at Antenna side. Only one antenna is effective at a time second antenna operates in standby mode/ dummy load.

4 Emission Requirements – 2400 MHz to 2483.5 MHz Band

Testing was performed in accordance with CFR 47 Part 15.247: 2011 and RSS 210 Annex 8: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b3):2011 and RSS 210 A.8.4: 2010

The maximum transmitted power is +30 dBm or 1 Watt.

4.1.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.10:2009 Section 6.10.3.1. The measurement was performed with modulation per CFR47 Part 15.247 (b3):2009 and RSS 210 A.8.4. This test was conducted on 3 channels in each operating range. The worst mode result indicated below.

Test Setup:

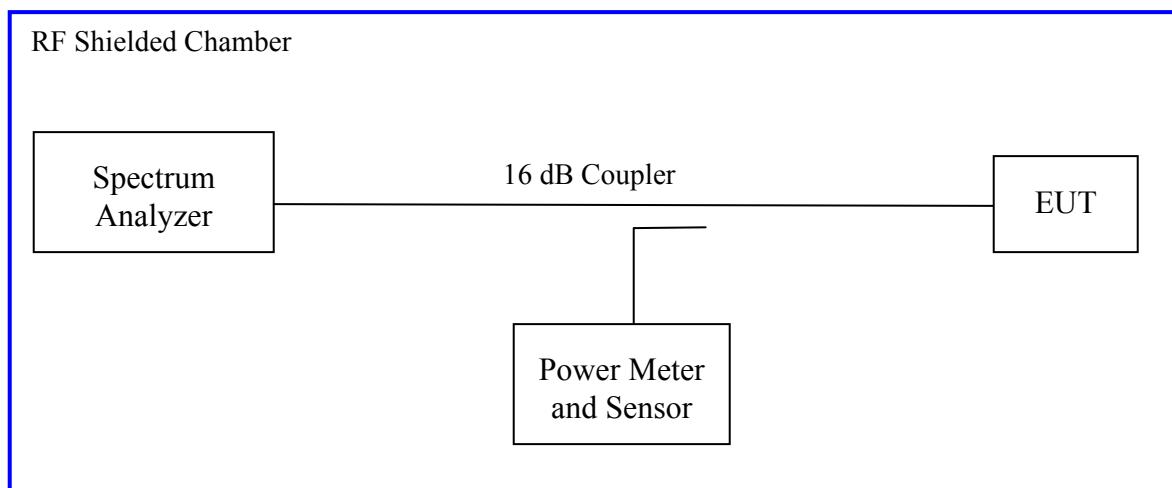

Method #1 of "Measurement of Digital Transmission Systems Operating under Section 15.247" applies since the EUT continuously transmit; where T, Transmission Duration Pulse, is greater than analyzer sweep time. Peak detector was used.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			
Antenna Type: External		Power Setting: See test plan	
Max. Antenna Gain: + 2.1dBi			
Ambient Temp.: 21 °C		Relative Humidity: 39%	
Test Results			
Operating Channel MHz	Limit [dBm]	Output Level [dBm]	Margin [dB]
802.11g			
2412	+30.00	26.33	-3.67
2417	+30.00	28.74	-1.26
2422	+30.00	29.62	-0.38
2437	+30.00	29.46	-0.53
2452	+30.00	29.74	-0.35
2457	+30.00	29.08	-0.92
2462	+30.00	27.25	-2.75

HT20			
2412	+30.00	26.46	-3.54
2417	+30.00	29.21	-0.79
2422	+30.00	29.50	-0.5
2437	+30.00	29.23	-0.77
2552	+30.00	29.65	-0.35
2457	+30.00	28.68	-1.32

2462	+30.00	27.35	-2.65
------	--------	-------	-------

Notes:

- 1) Power measurements were performed as indicated in the above table. Only worst case/ limited number of plots are placed in the report.
- 2) Arada Software Power Settings are as follows
 - a) EUT passed frequency range 2412 to 2462 MHz with power setting tp 20 for g and HT20 modes
 - b) EUT passed frequency range 2417 to 2457 MHz with power setting tp 22 for g and HT20 modes
 - c) EUT passed frequency range 2422 to 2252 MHz with power setting tp 23 for g and HT20 modes.
 - d) EUT operates only single chain in HT20 mode
- 3) EUT has only one active chain. Only chain A is active and tested port. Second antenna port acts as dummy load.


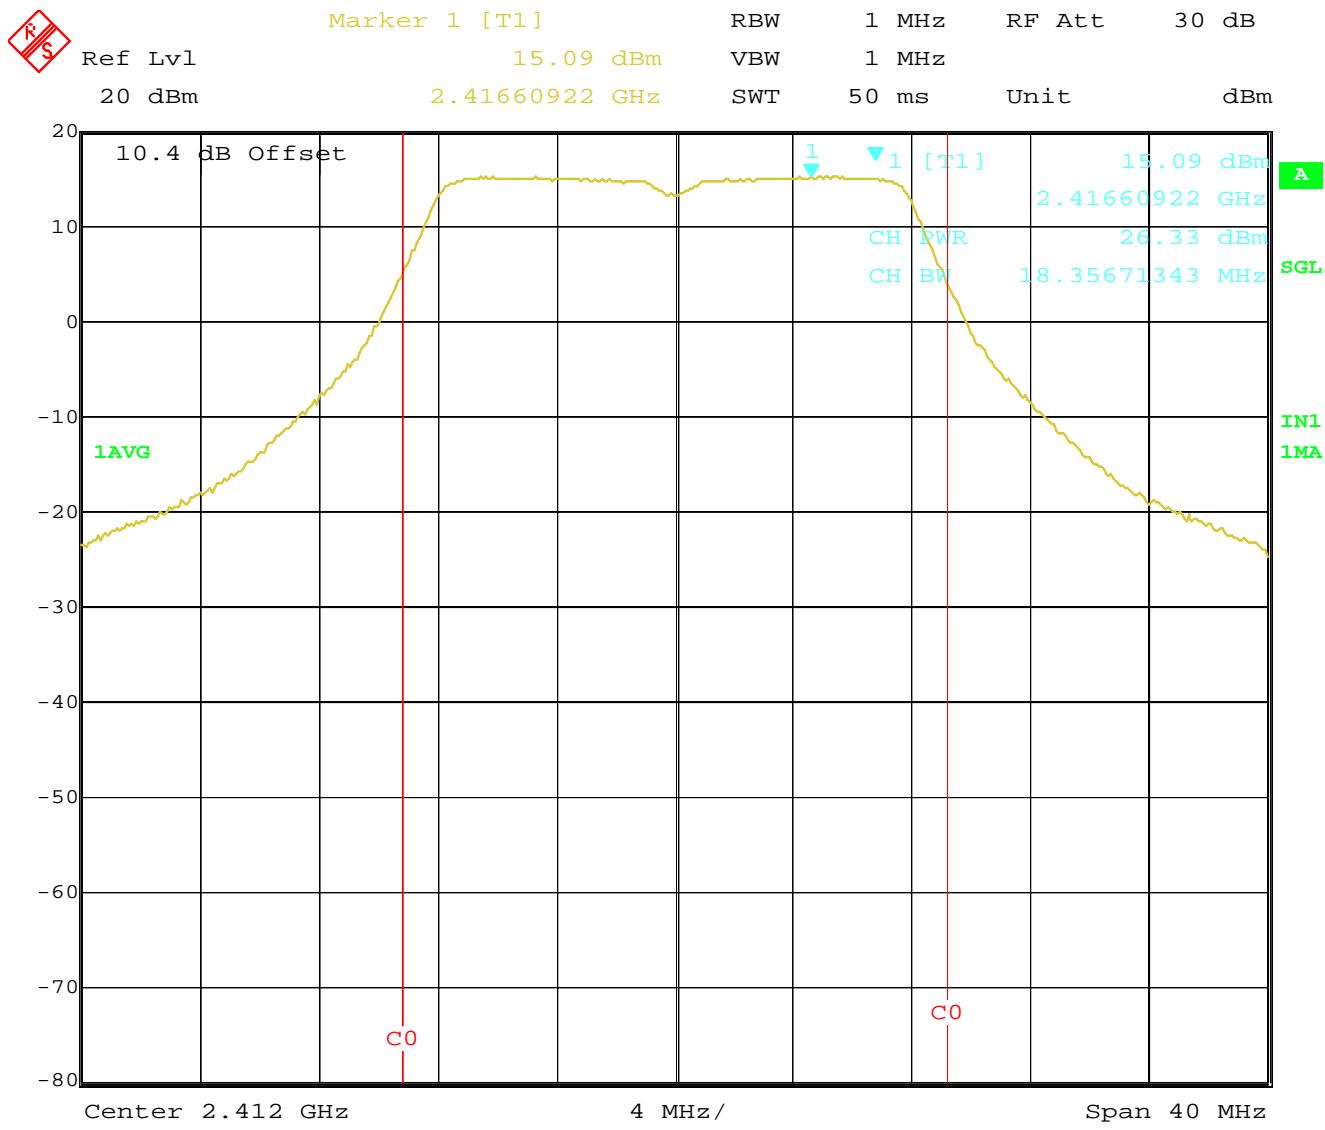


Figure 1: Maximum Transmitted Power, 2412 MHz at 802.11g, 6 Mbps

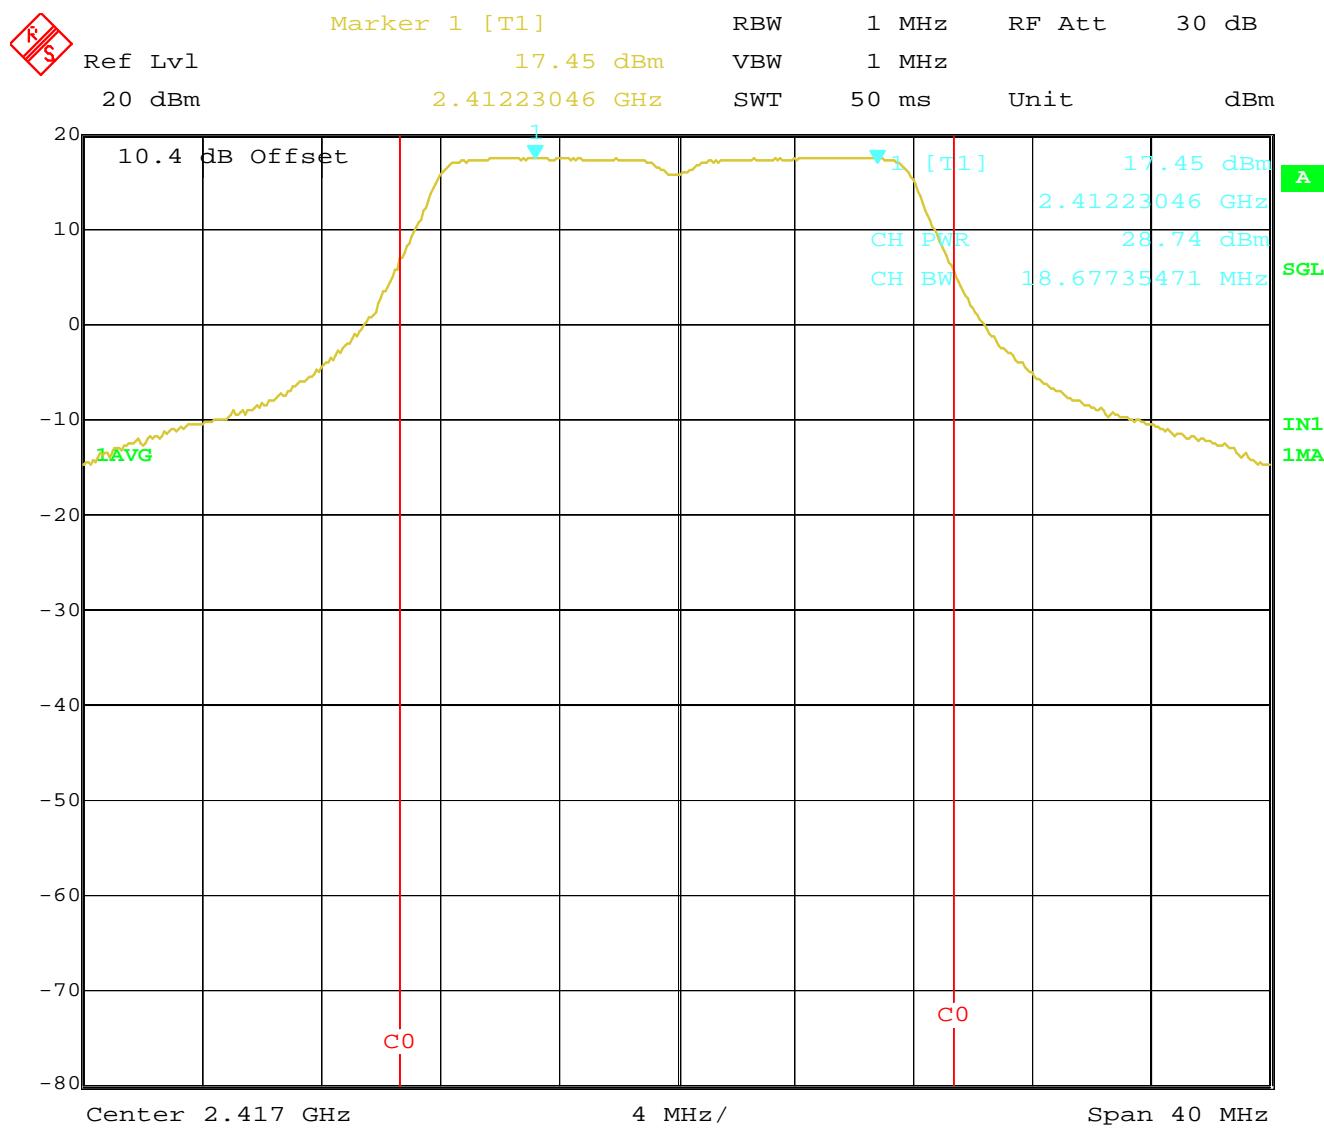

Date: 6.JUN.2012 09:40:31

Figure 2: Maximum Transmitted Power, 2417 MHz at 802.11g, 6 Mbps


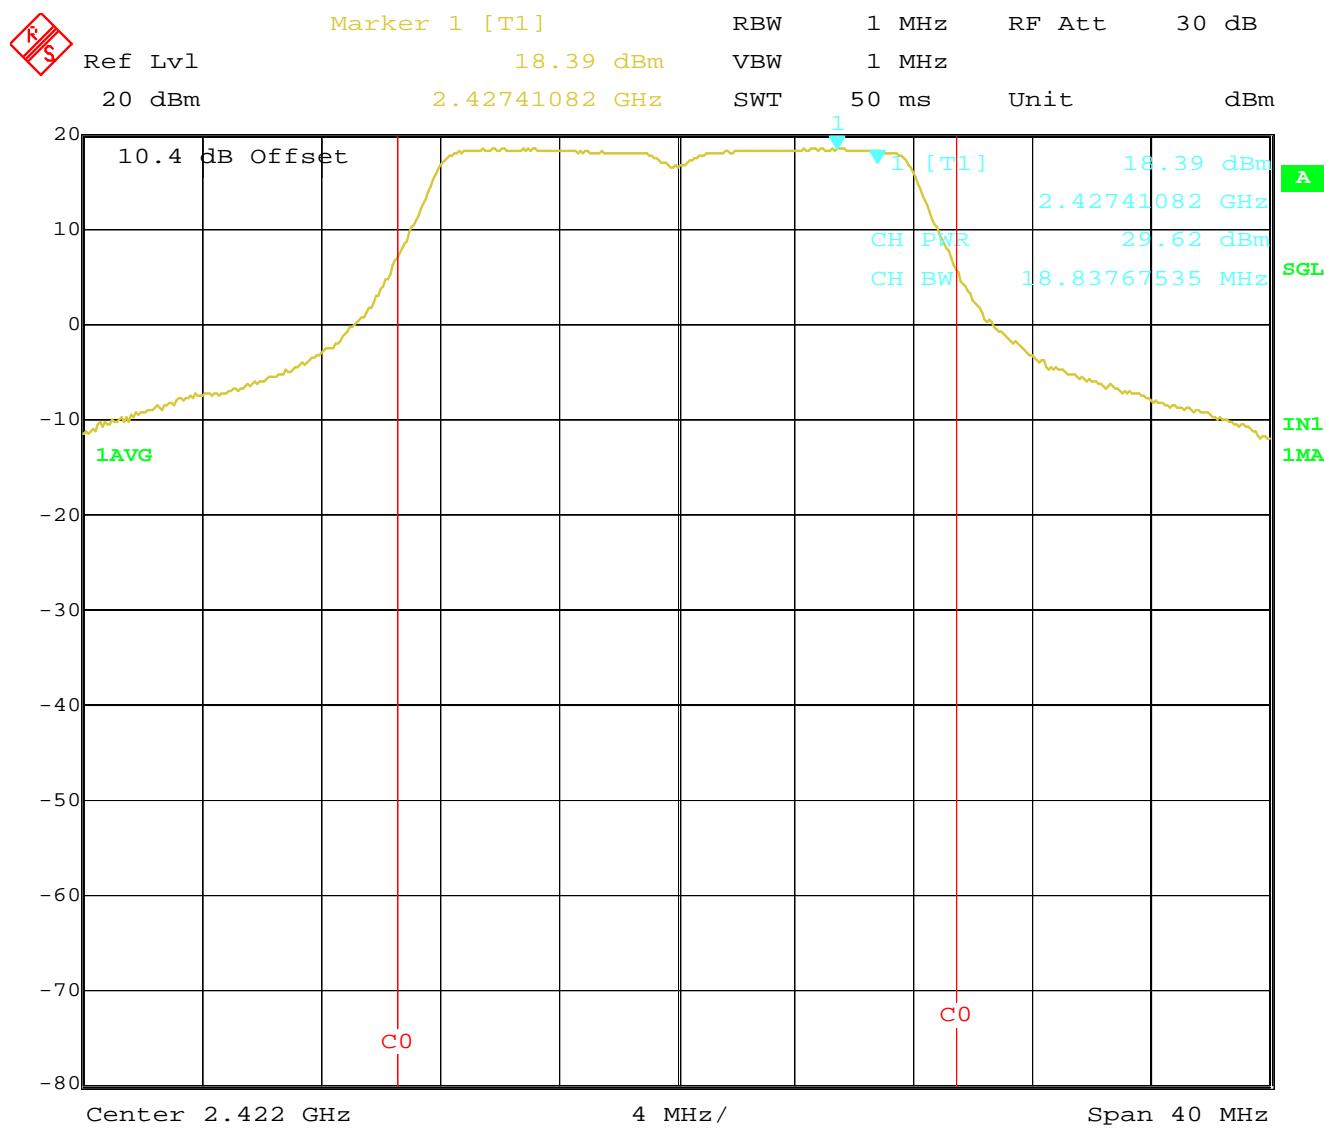


Figure 3: Maximum Transmitted Power, 2422 MHz at 802.11g, 6 Mbps

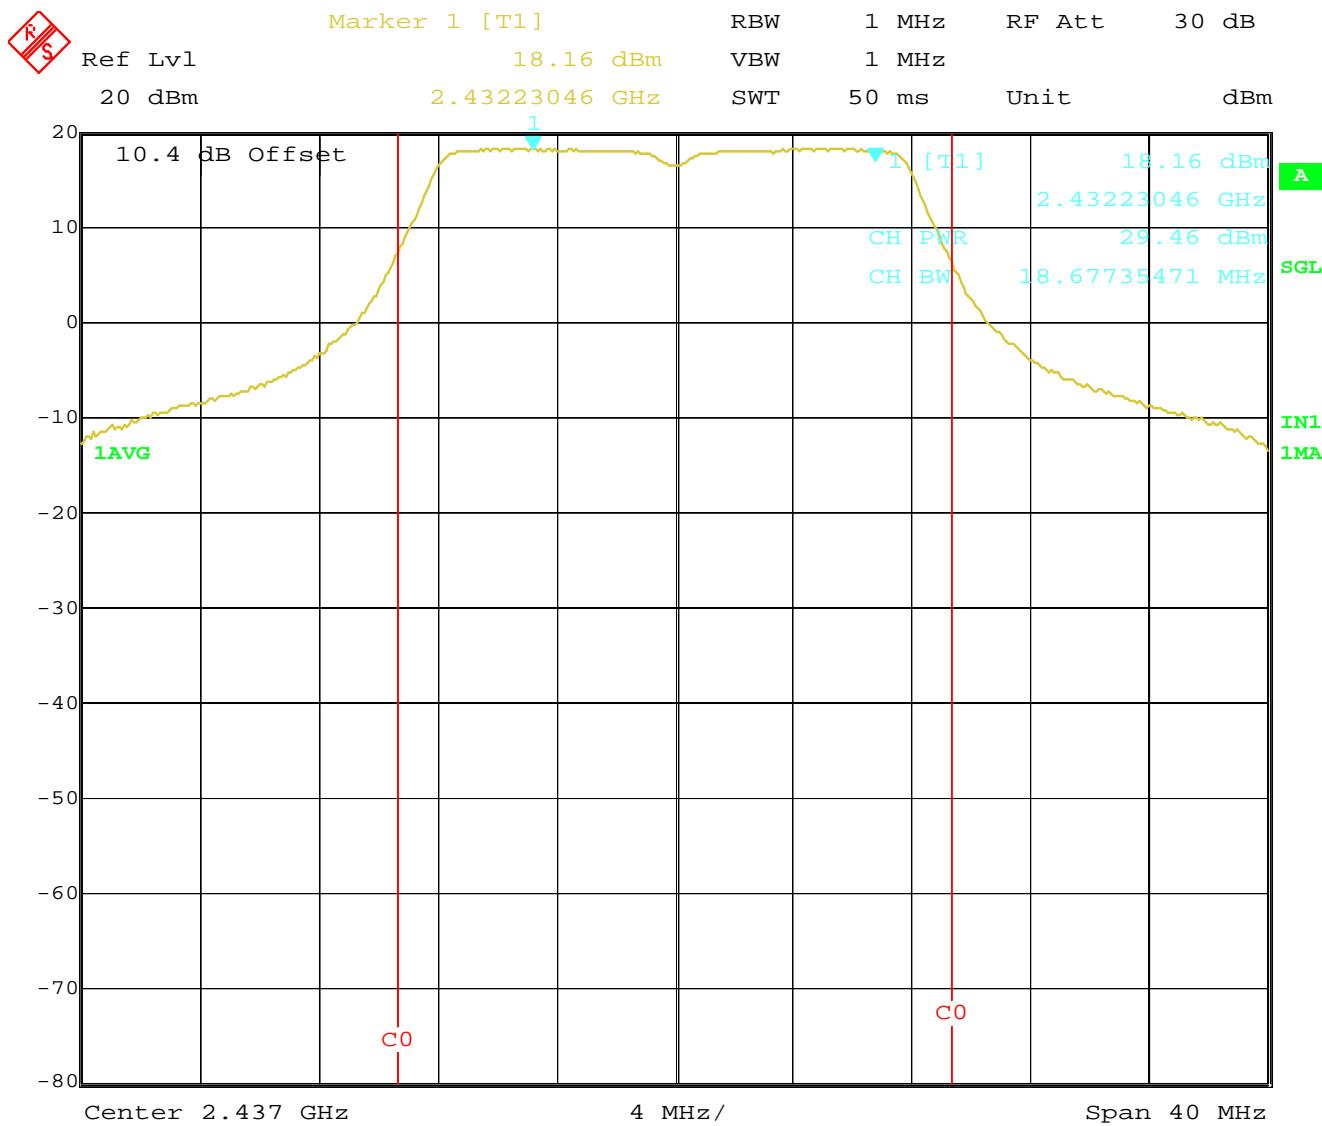

Date: 6.JUN.2012 09:38:24

Figure 4: Maximum Transmitted Power, 2437 MHz at 802.11g, 6 Mbps


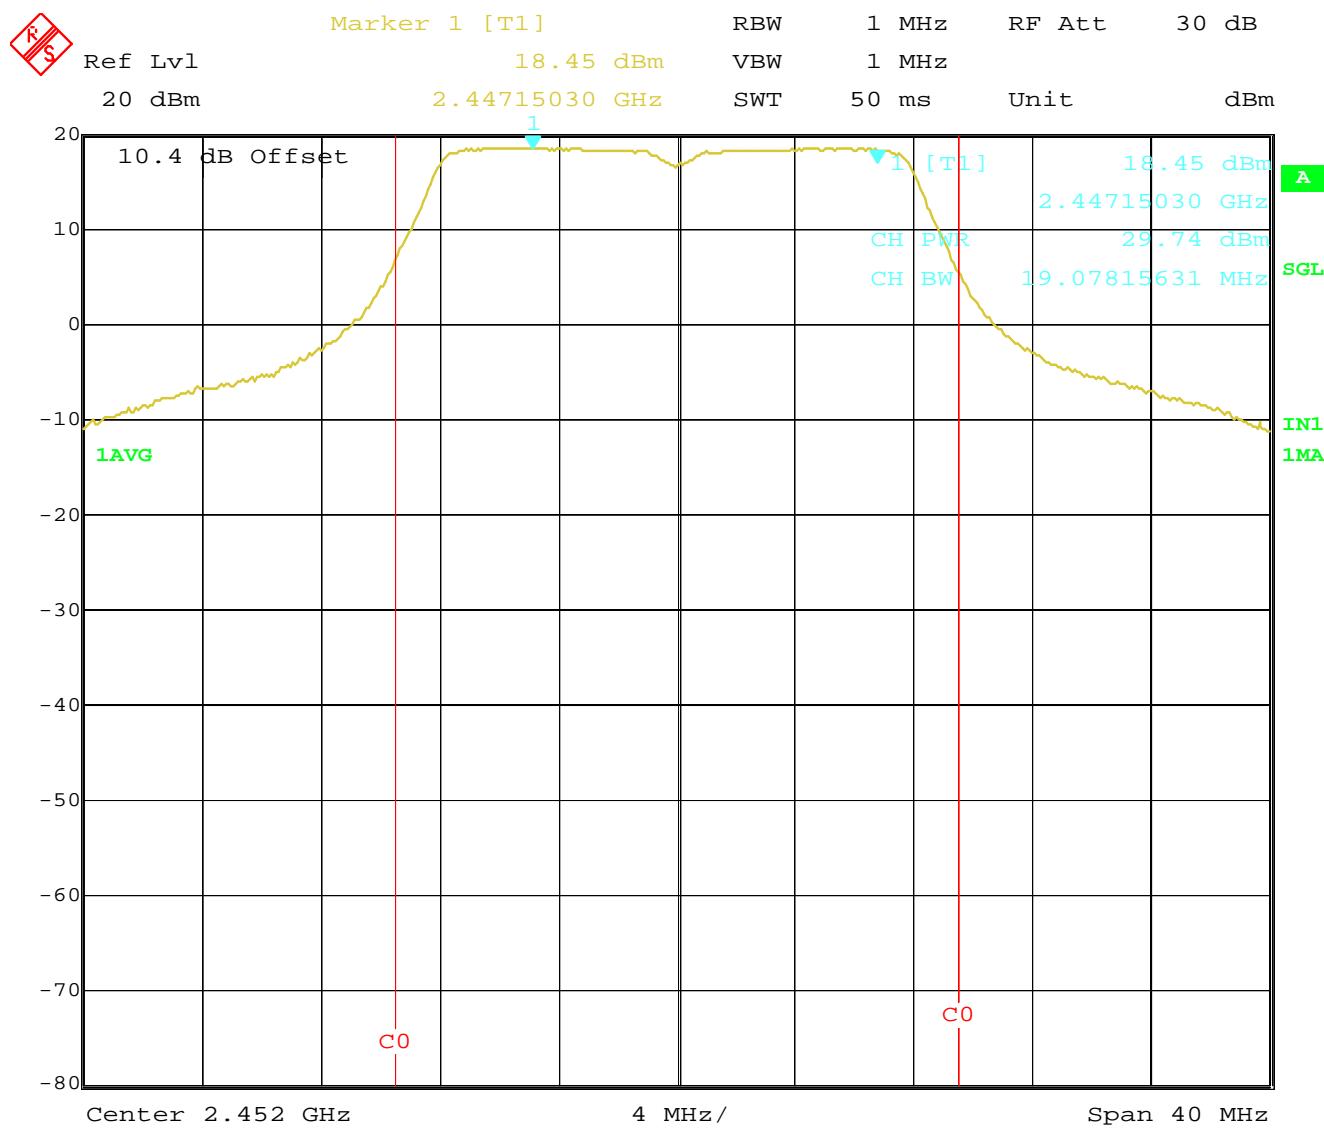


Figure 5: Maximum Transmitted Power, 2452 MHz at 802.11g, 6 Mbps

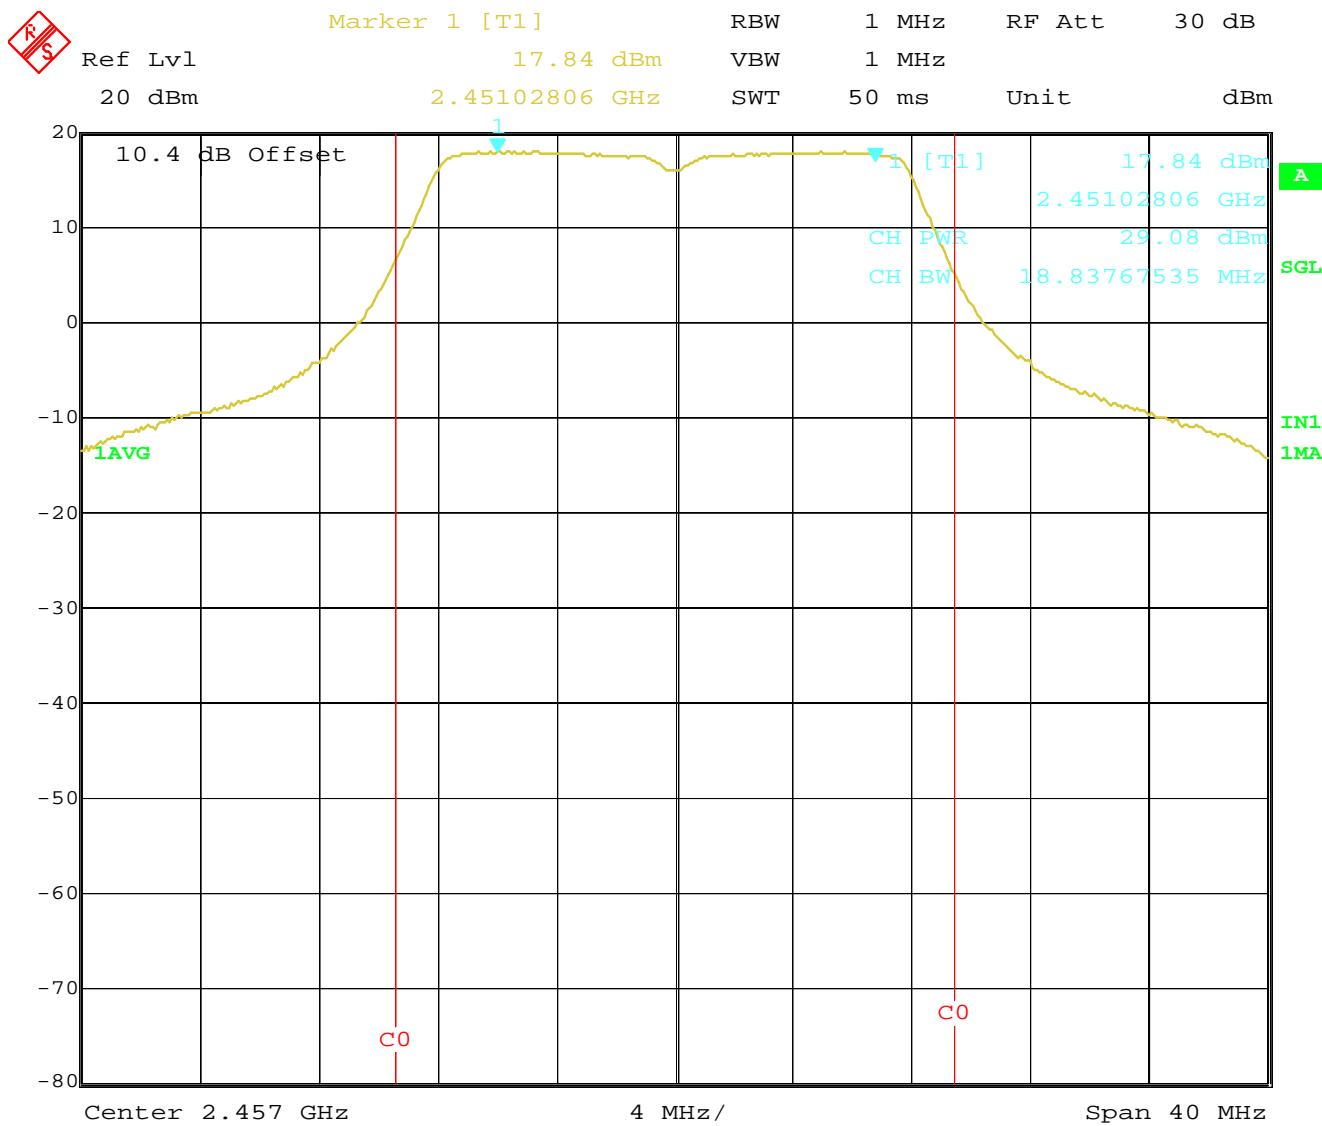

Date: 6.JUN.2012 09:43:10

Figure 6: Maximum Transmitted Power, 2457 MHz at 802.11g, 6 Mbps


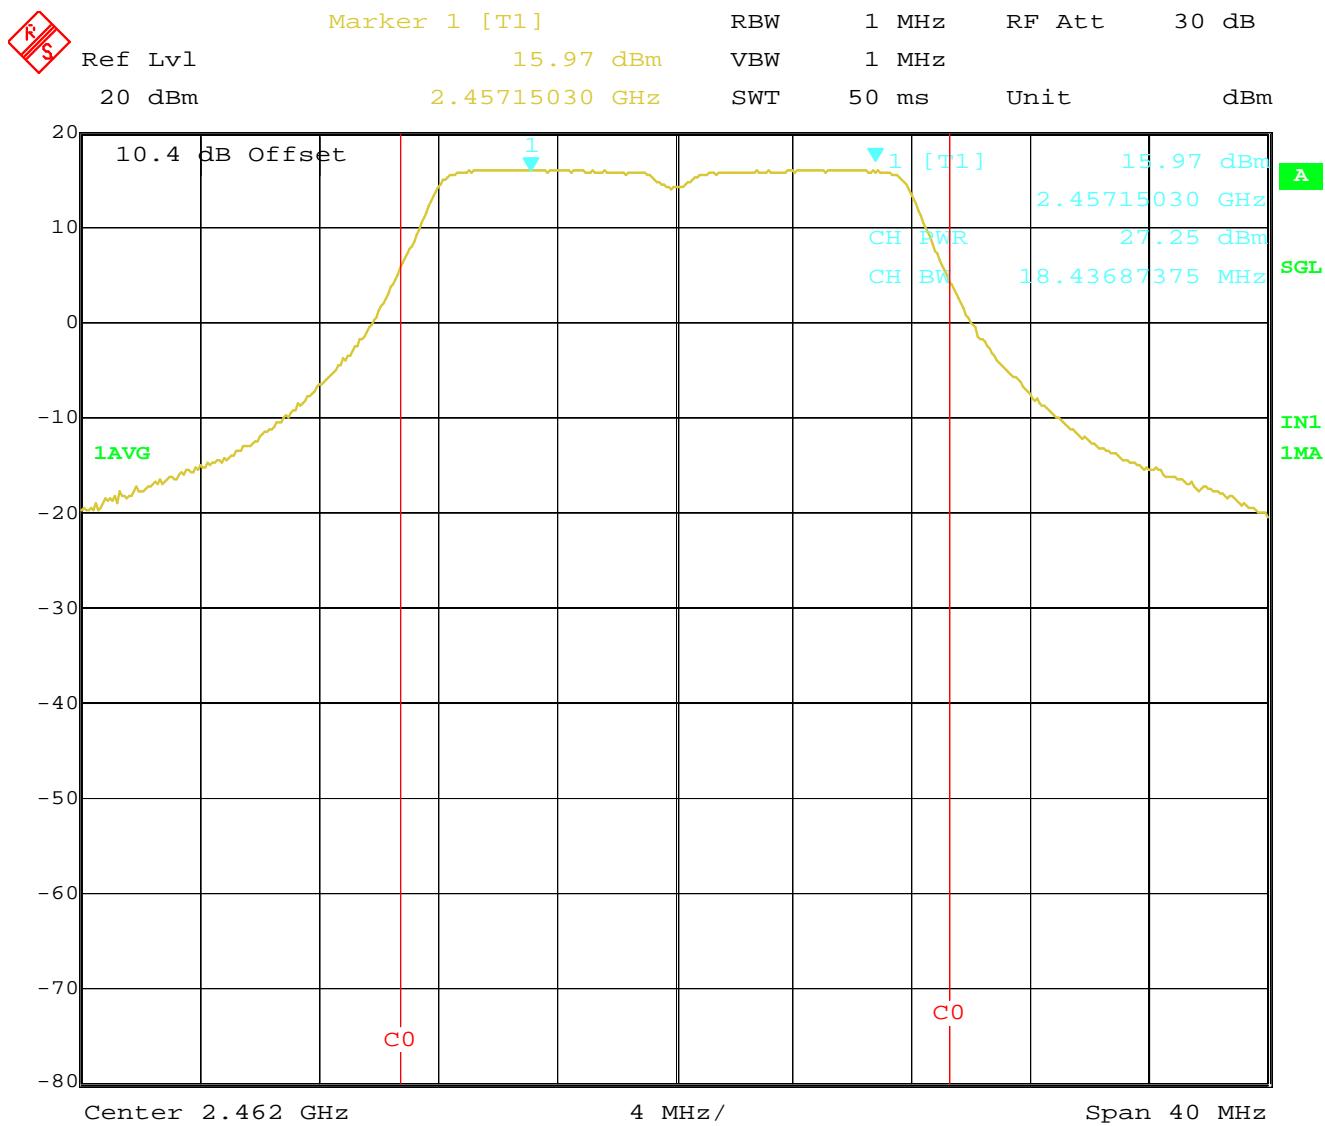



Figure 7: Maximum Transmitted Power 2462 MHz at 802.11g, 6 Mbps

HT 20

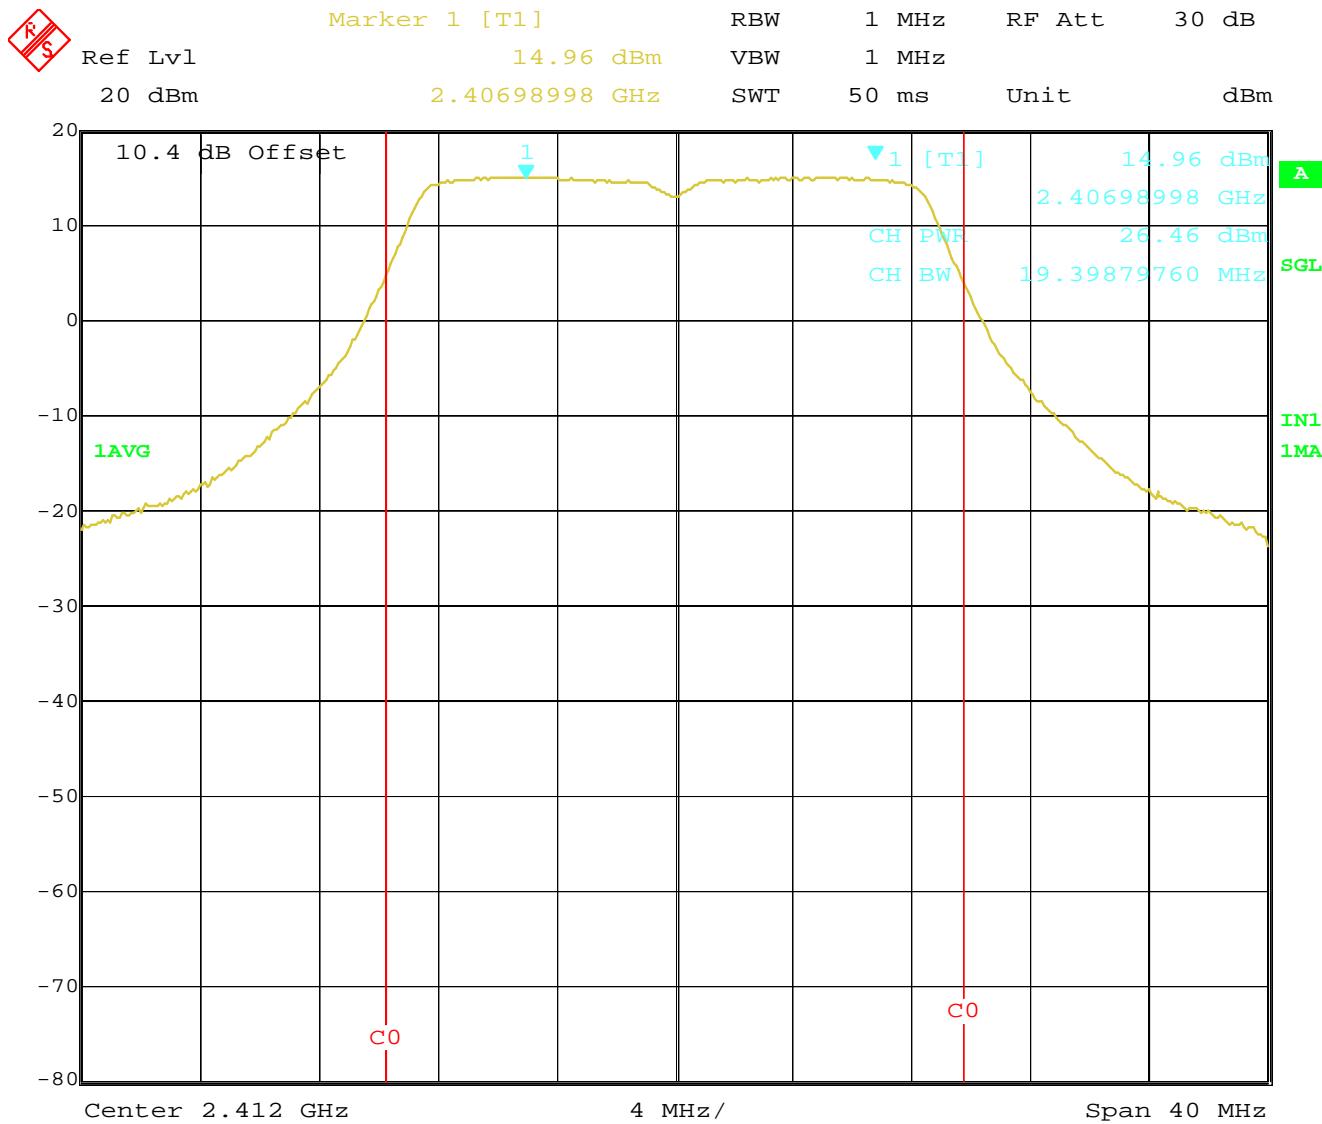


Date: 6.JUN.2012 10:01:20

Figure 8: Maximum Transmitted Power, 2412 MHz at 802.11 HT 20 , 6.5 Mbps

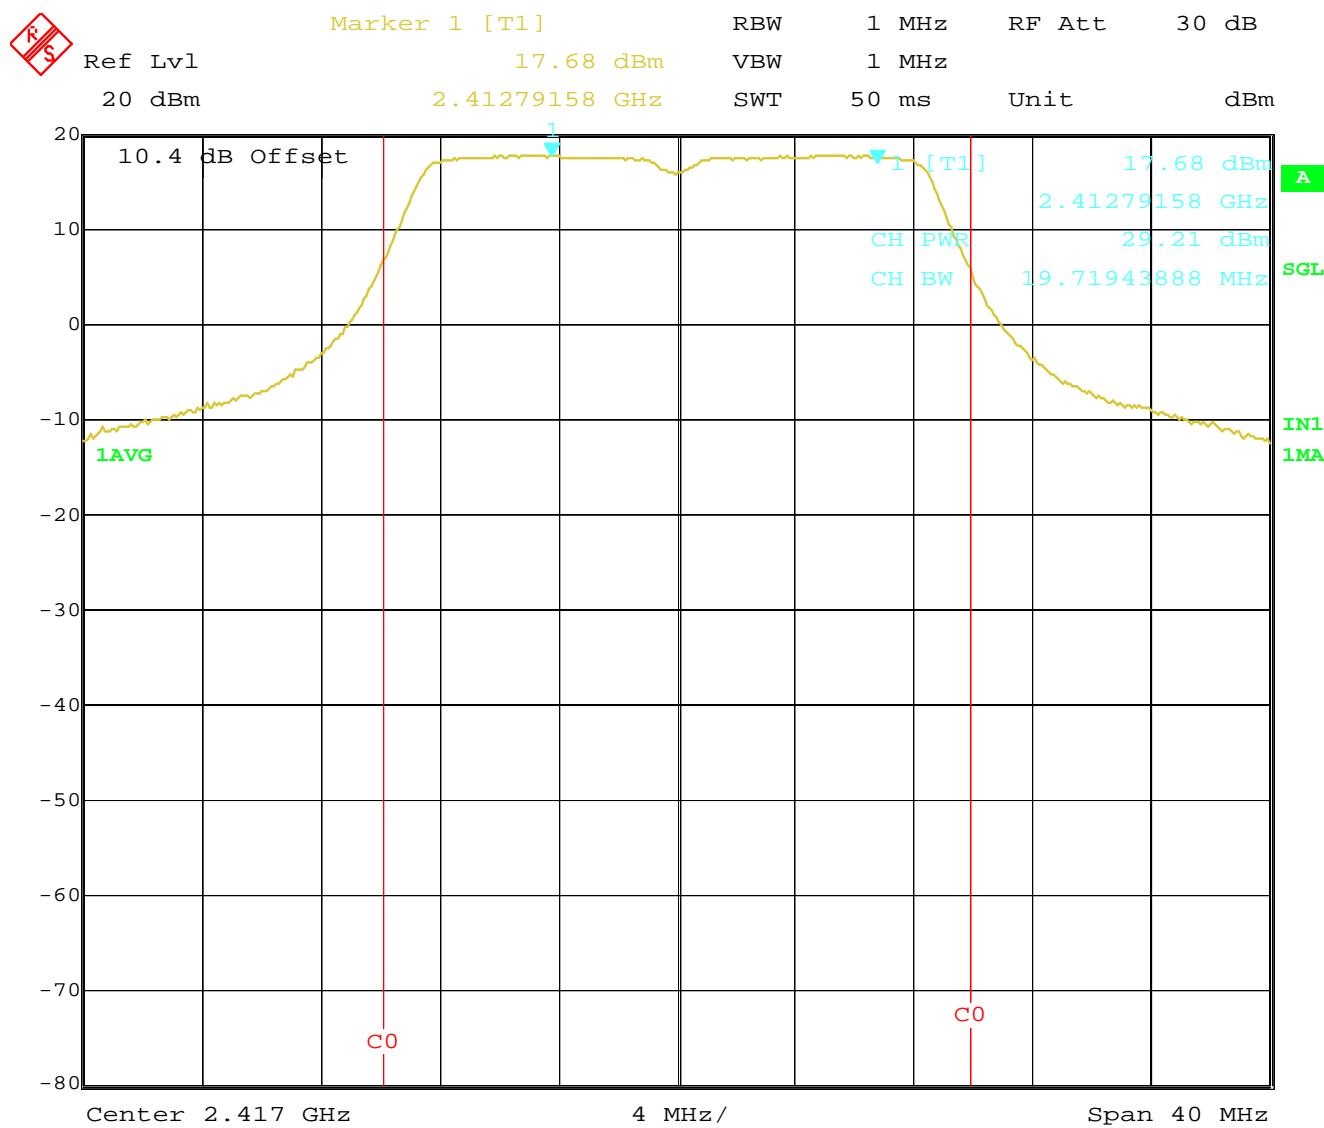


Date: 6.JUN.2012 10:03:10

Figure 9: Maximum Transmitted Power, 2417 MHz at 802.11 HT 20, 6.5 Mbps

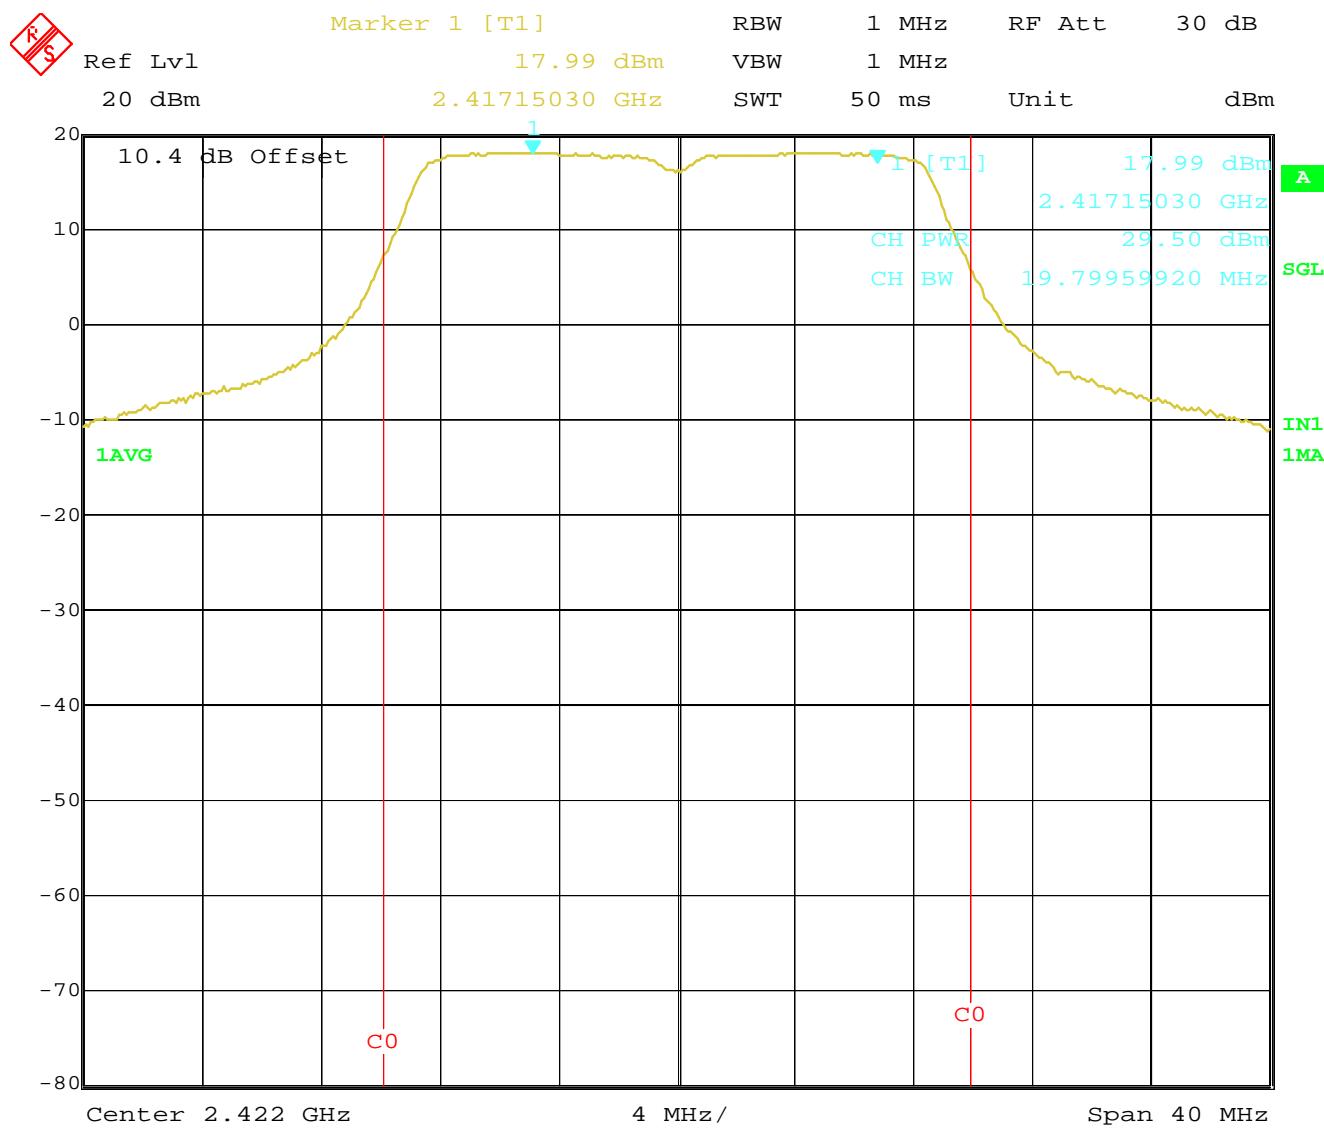

Date: 6.JUN.2012 10:06:21

Figure 10: Maximum Transmitted Power, 2422 MHz at 802.11 HT 20, 6.5 Mbps

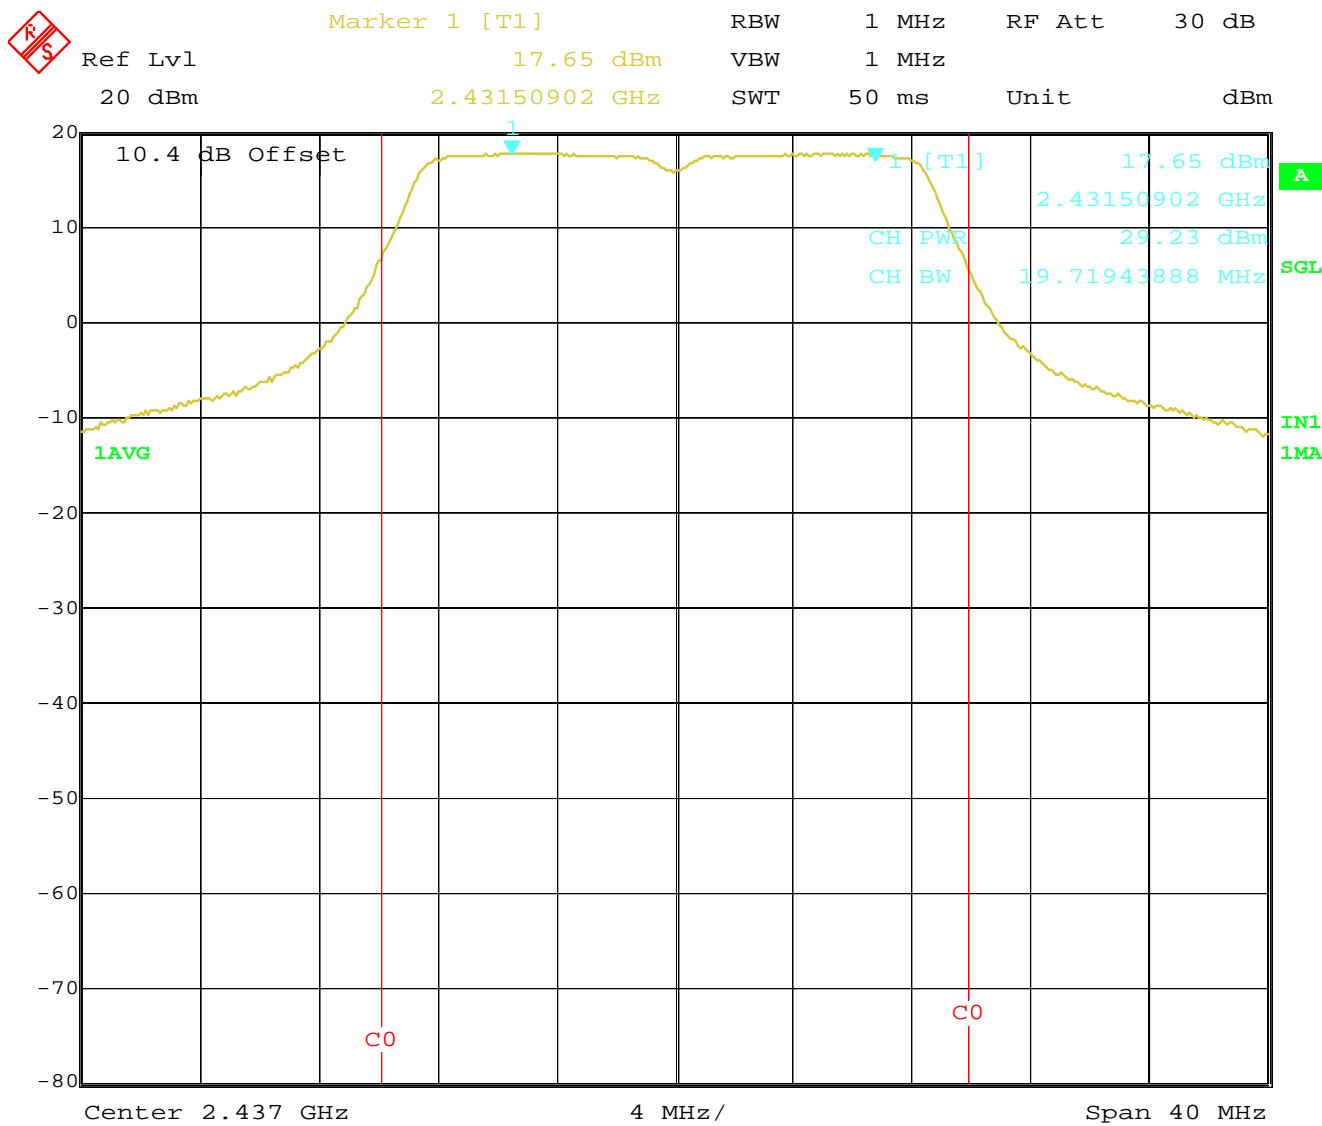

Date: 6.JUN.2012 10:08:44

Figure 11: Maximum Transmitted Power, 2437 MHz at 802.11 HT 20, 6.5 Mbps

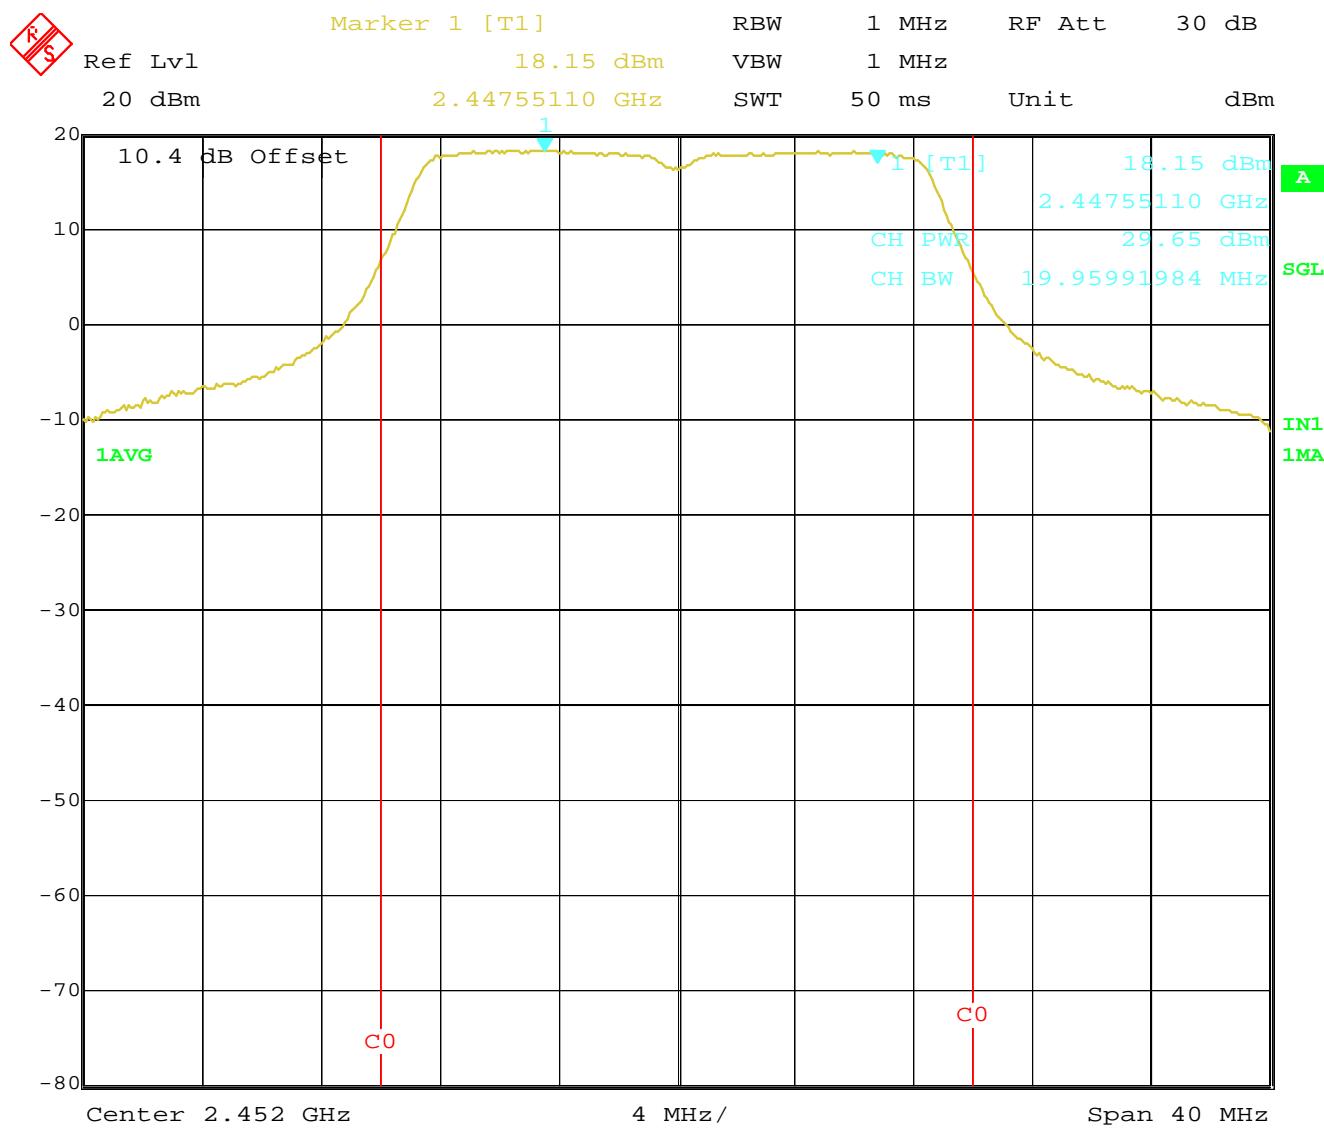


Figure 12: Maximum Transmitted Power, 2452 MHz at 802.11 HT 20, 6.5 Mbps

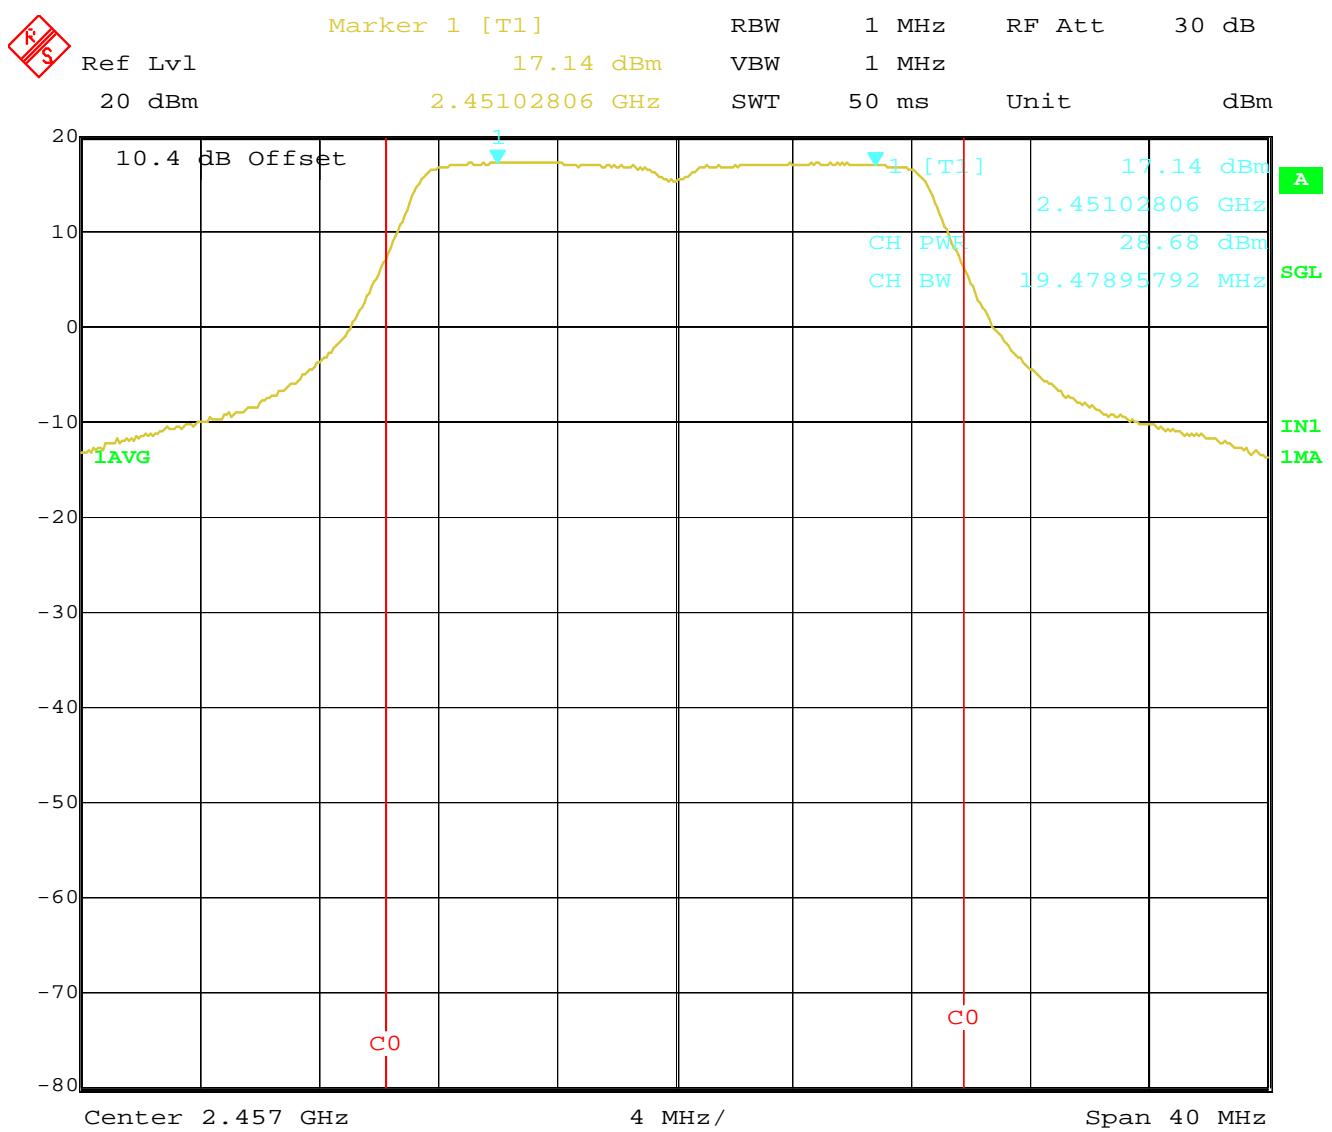


Figure 13: Maximum Transmitted Power, 2457 MHz at 802.11 HT 20, 6.5 Mbps

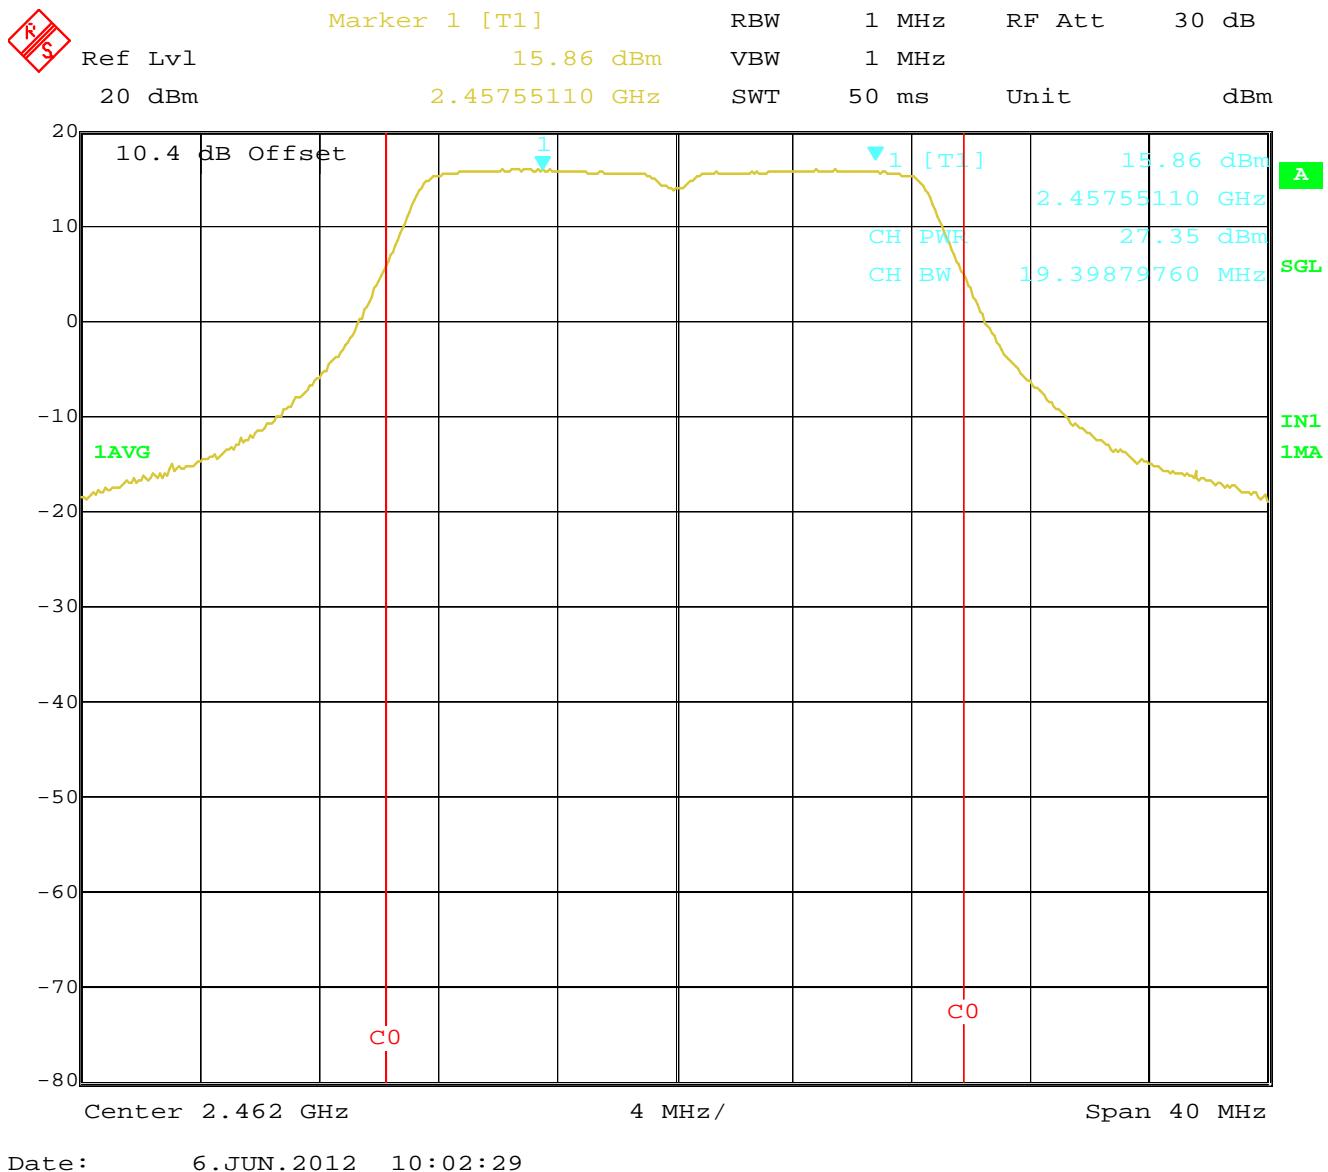


Figure 14: Maximum Transmitted Power, 2462 MHz at 802.11 HT 20, 6.5 Mbps

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The 6 dB bandwidth is defined the bandwidth of 6 dB from highest transmitted level of the fundamental frequency.

The bandwidth shall be at least 500 kHz per Section CFR47 15.247(a2) 2009 and RSS Gen Sect. 4.4.1: 2010.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.247(a2) 2009 and RSS Gen Sect. 4.4.1:2010. Initial investigation was performed at different data rates and TX chains. The narrowest bandwidths at each operational mode were measured on 3 operating channels. The worst sample result indicated below.

Test Setup:

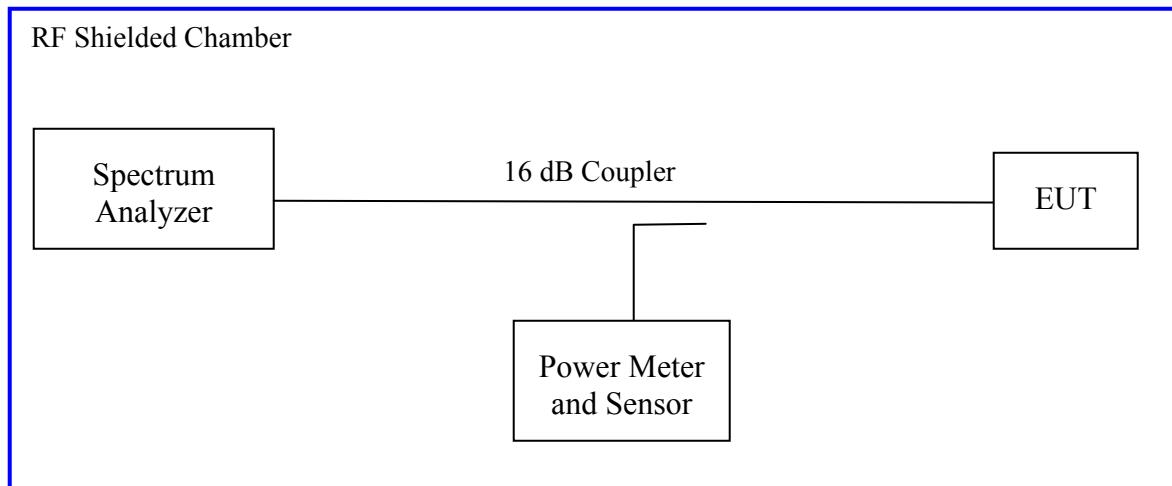

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only			
Antenna Type: Integrated	Power Setting: see table 9		
Max. Antenna Gain: +2.1 dBi			
Ambient Temp.: 21 °C		Relative Humidity: 39%	
99% Bandwidth (MHz)			
Operating Channel	Limit	802.11g	Results
2412 MHz	N/A	16.75350701	N/A
2437 MHz	N/A	16.75350701	N/A
2462 MHz	N/A	16.75350701	N/A
Note: The 99% bandwidth was observed at 6 Mbps.			
6 dB Bandwidth (MHz)			
Operating Channel	Limit	802.11g	Results
2412 MHz	500 kHz	16.48 MHz	Pass
2437 MHz	500 kHz	16.48 MHz	Pass
2462 MHz	500 kHz	16.48 MHz	Pass
Note: The narrowest 6 dB bandwidth was observed at 6 Mbps. Measurements were made in g and HT 20 modes; only worst-case results are reported here.			

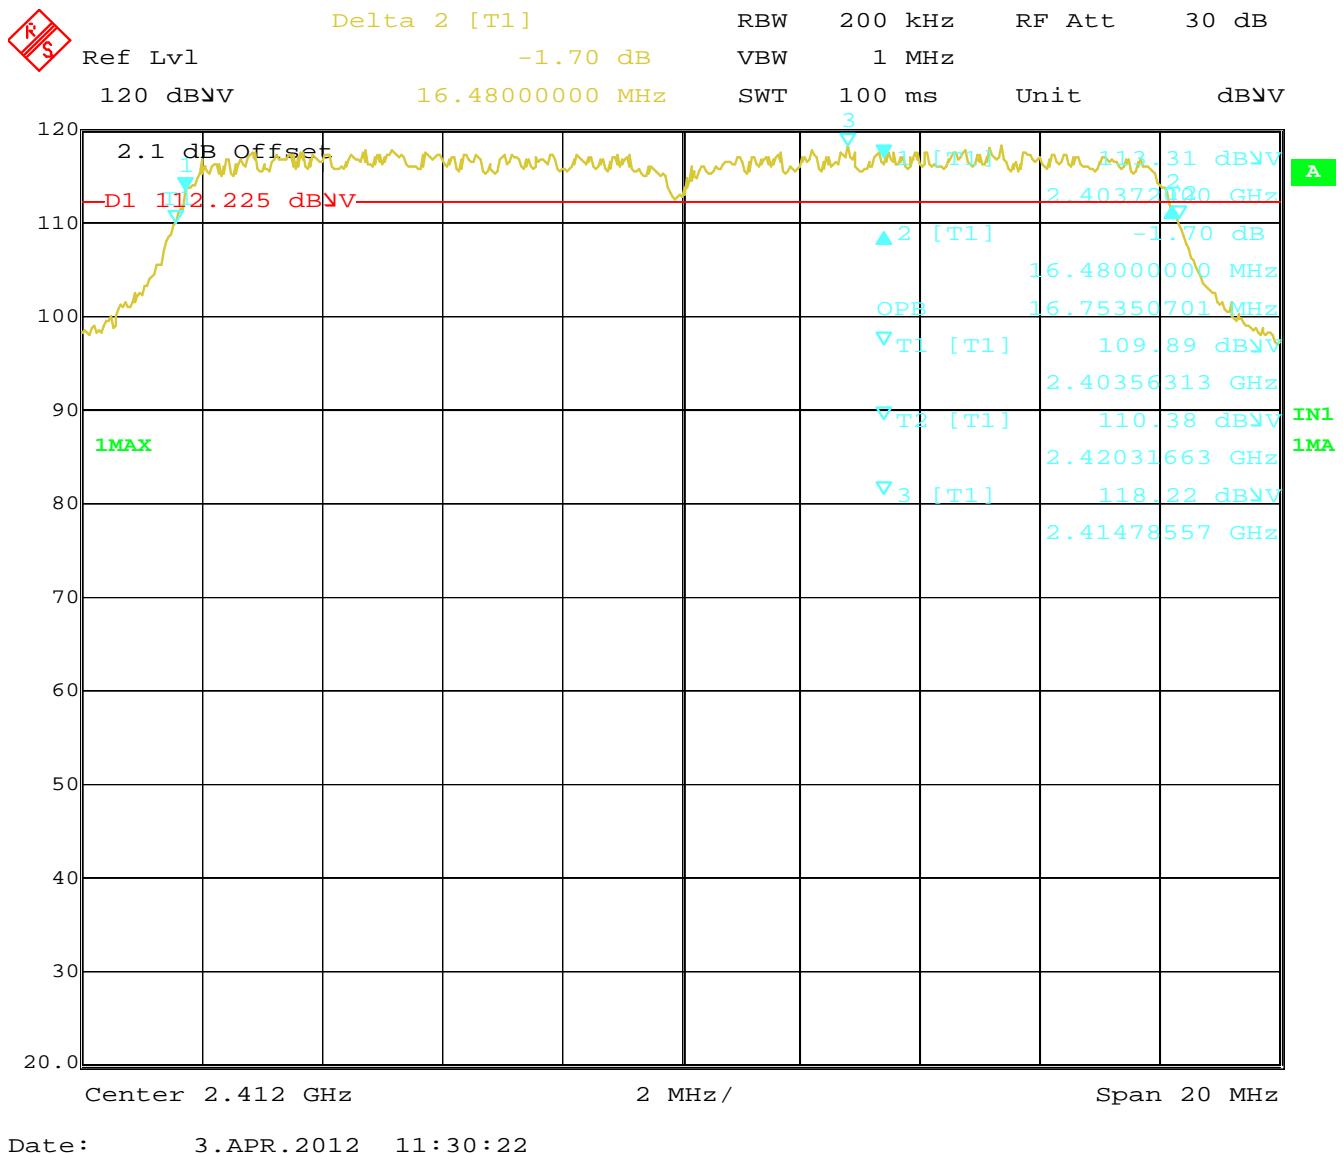


Figure 15: 6 dB Bandwidth at 6 Mbit/s – Operating Channel 2412 MHz

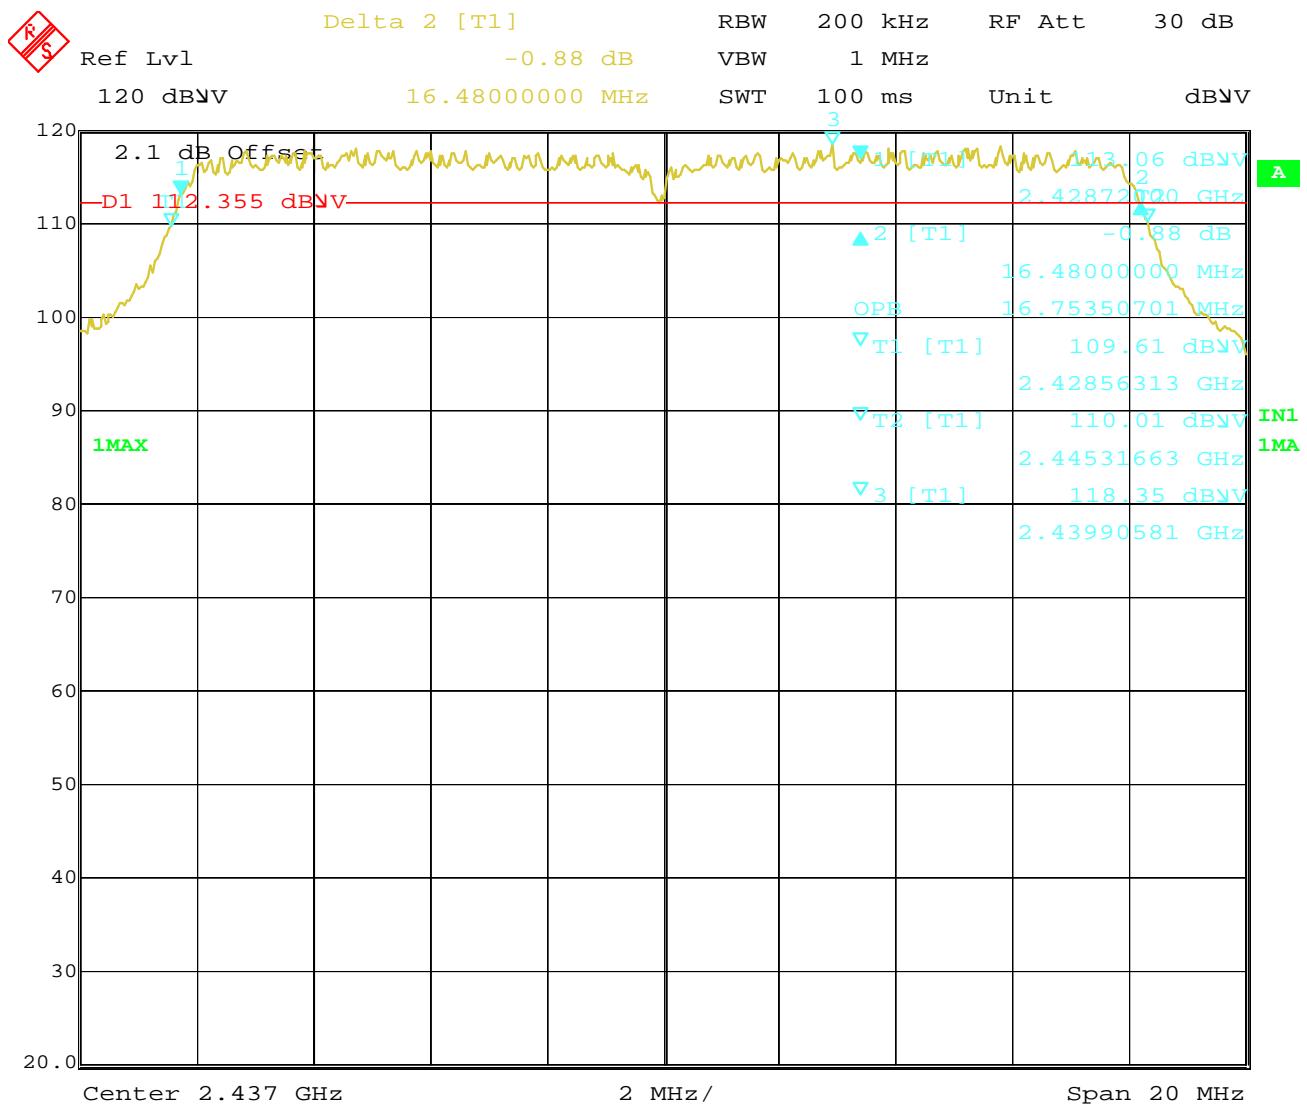


Figure 16: 6 dB Bandwidth at 6 Mbit/s – Operating Channel 2437 MHz

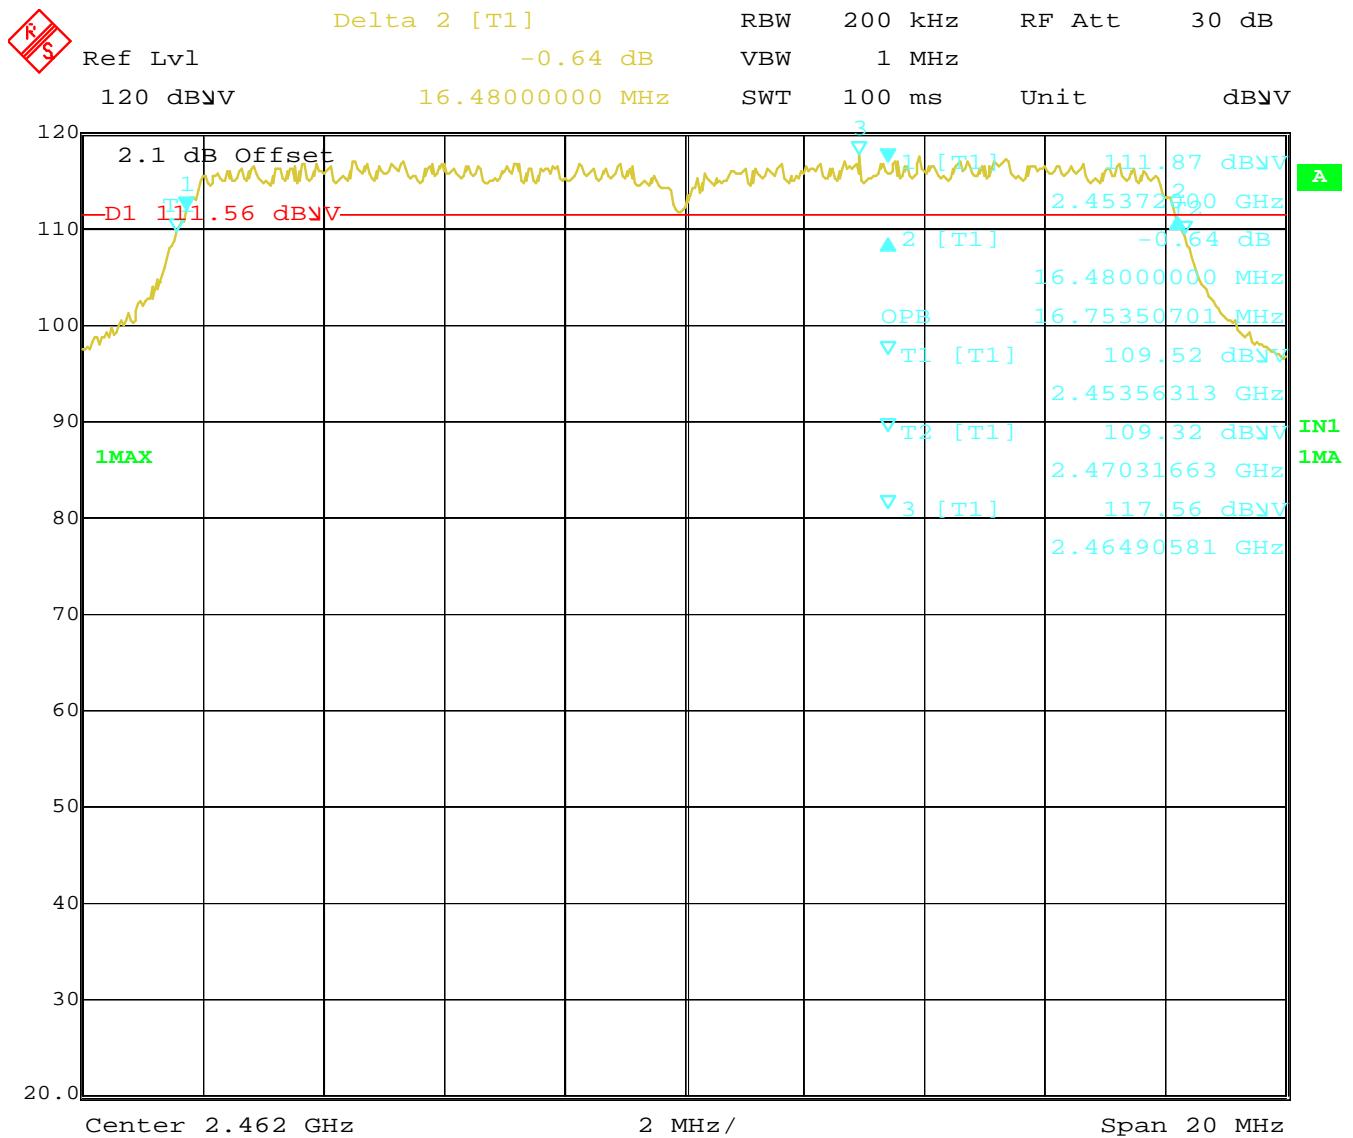


Figure 17: 6 dB Bandwidth at 6 Mbit/s – Operating Channel 2462 MHz

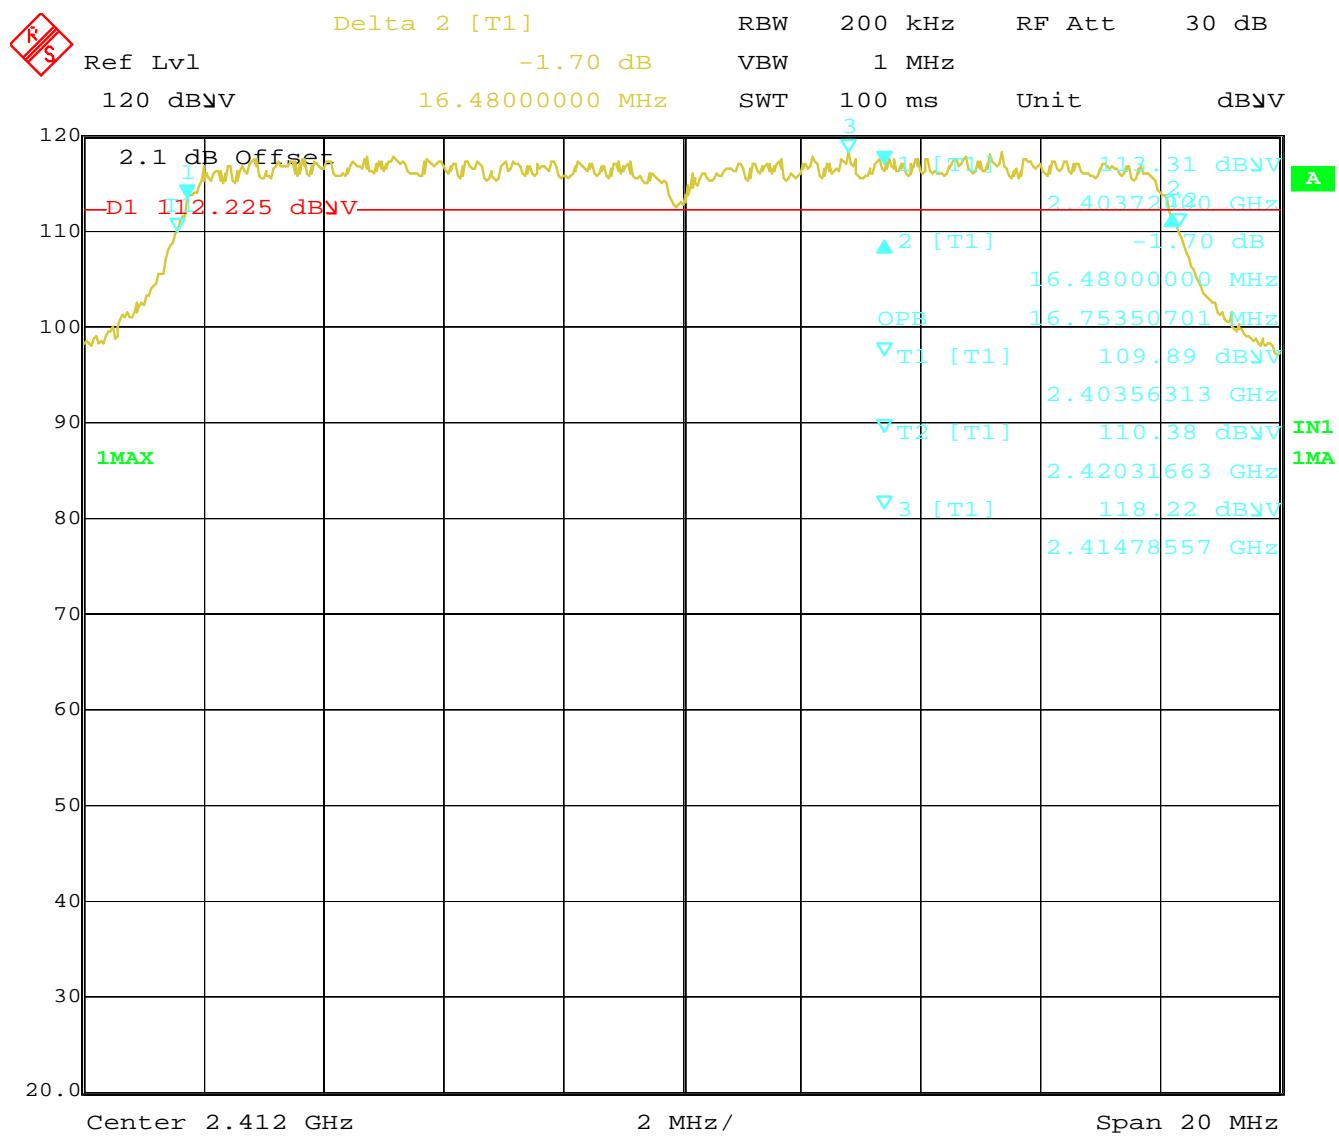


Figure 18: 99% Bandwidth at 6 Mbps – Operating Channel 2412 MHz


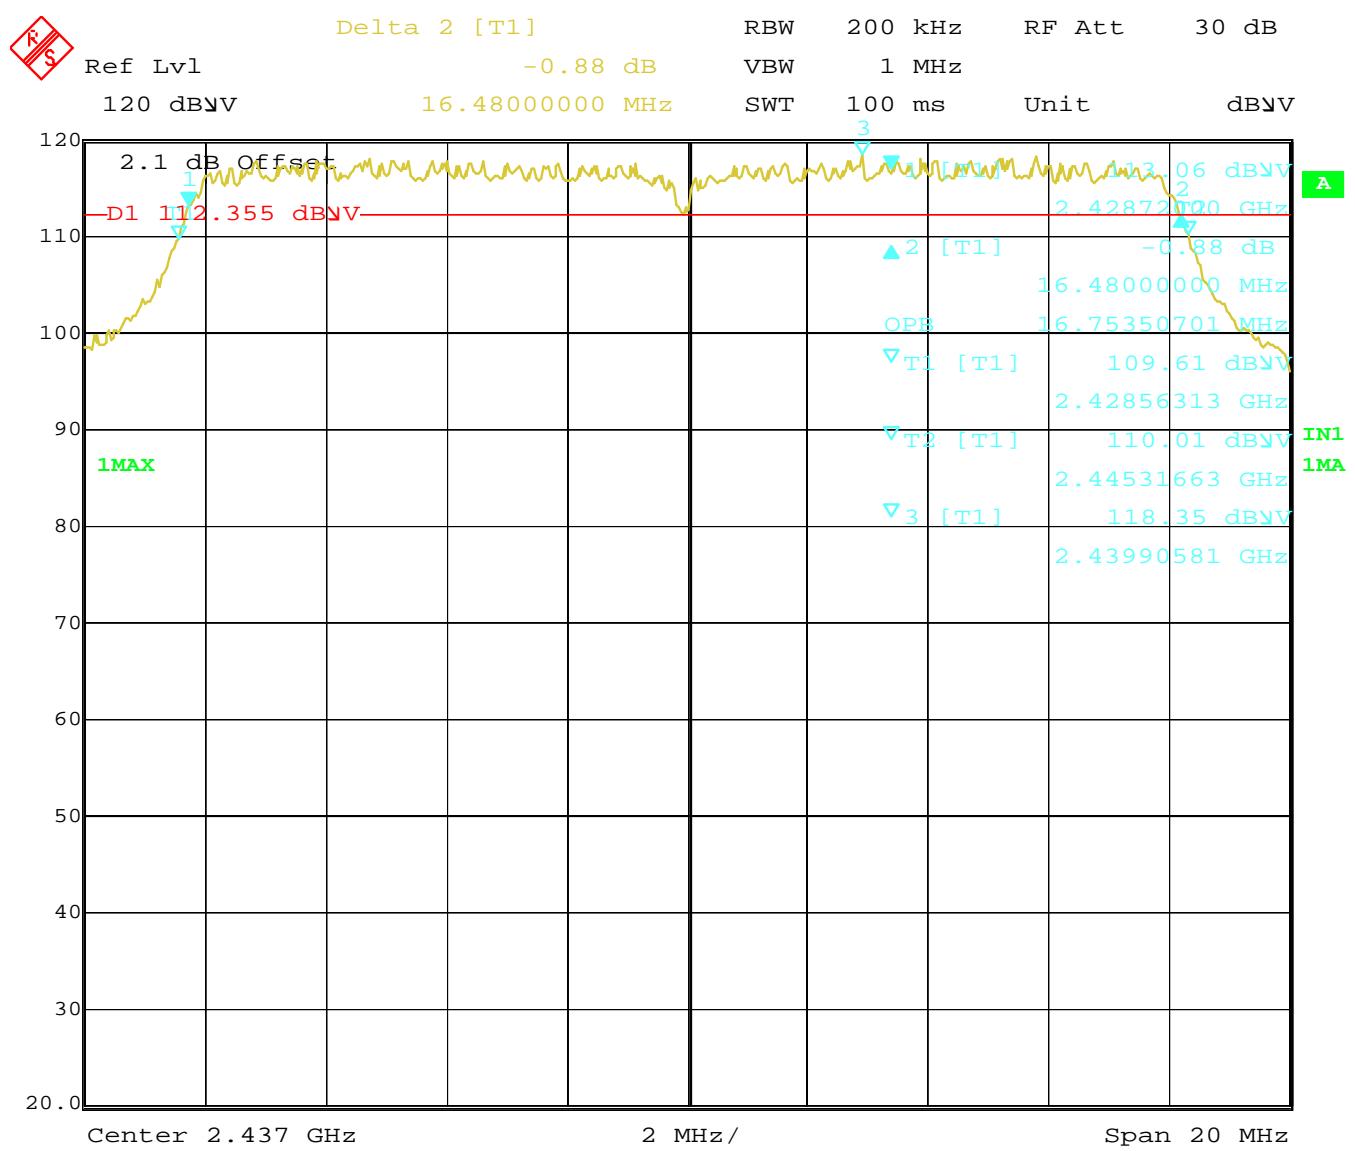


Figure 19: 99% Bandwidth at 6 Mbps – Operating Channel 2437 MHz

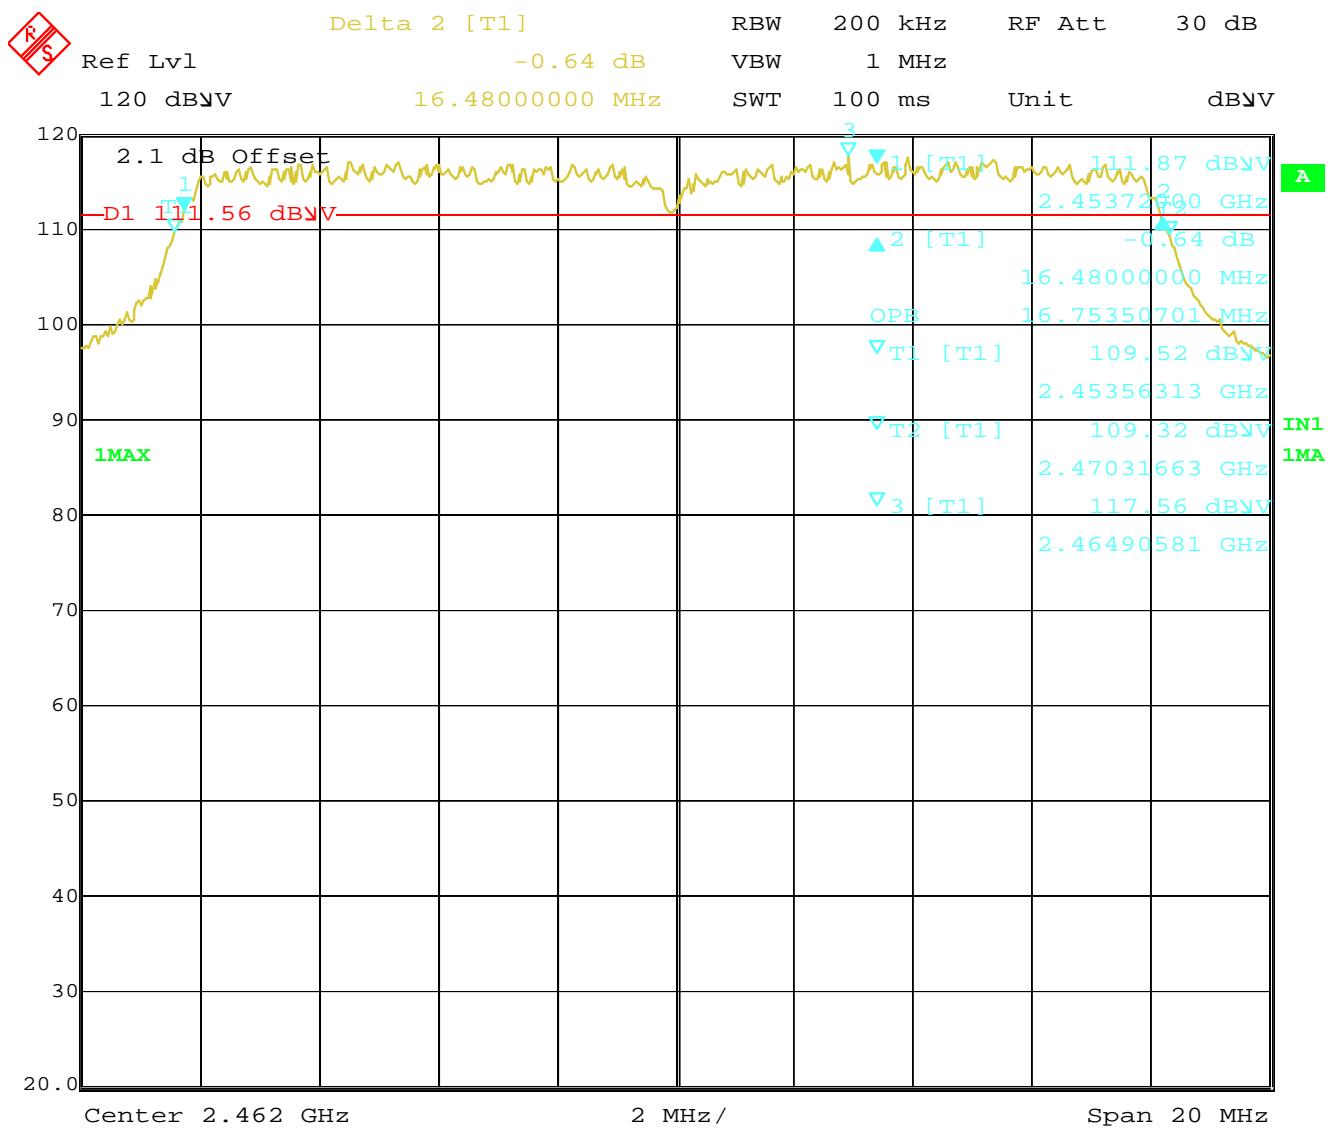

Date: 3.APR.2012 11:47:10

Figure 20: 99% Bandwidth at 6 Mbps – Operating Channel 2462 MHz

4.3 Band-edge Requirements


The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Any frequency outside the band of 2400 MHz to 2483.5 MHz, the power output level must be below 20 dB from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS 210 A8.5

4.3.1 Results

The Out of band emission was performed in the conducted mode.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

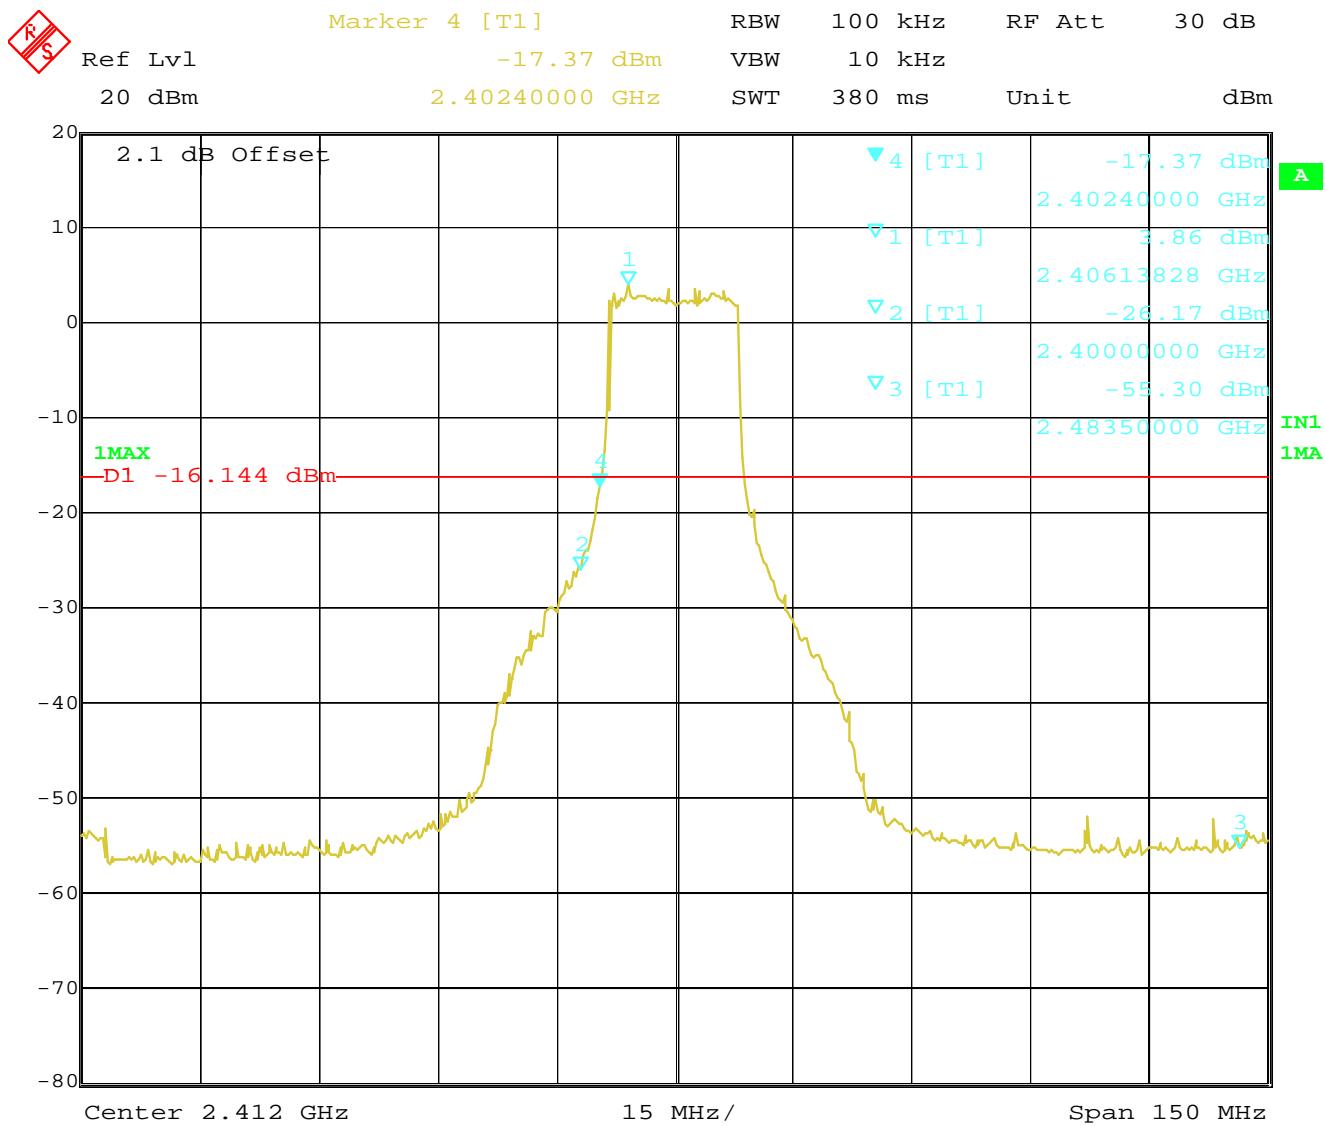

Date: 3.APR.2012 11:30:36

Figure 21: Inband Emissions at 6 Mbps – Operating Channel 2412 MHz

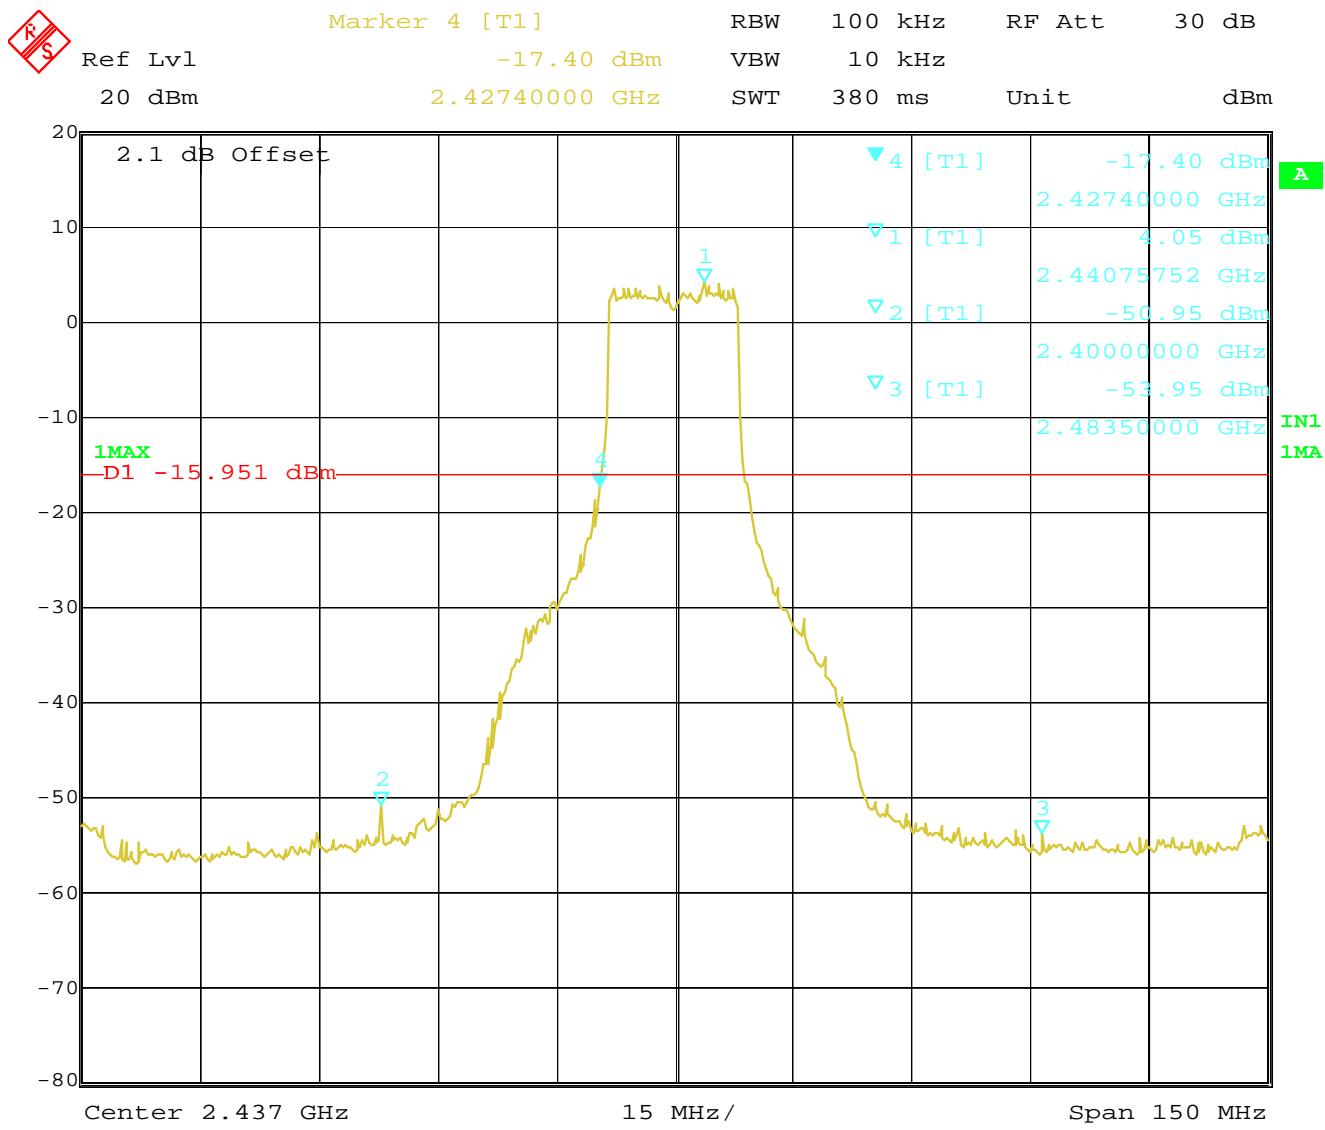


Figure 22: Inband Emissions at 6 Mbps – Operating Channel 2437 MHz

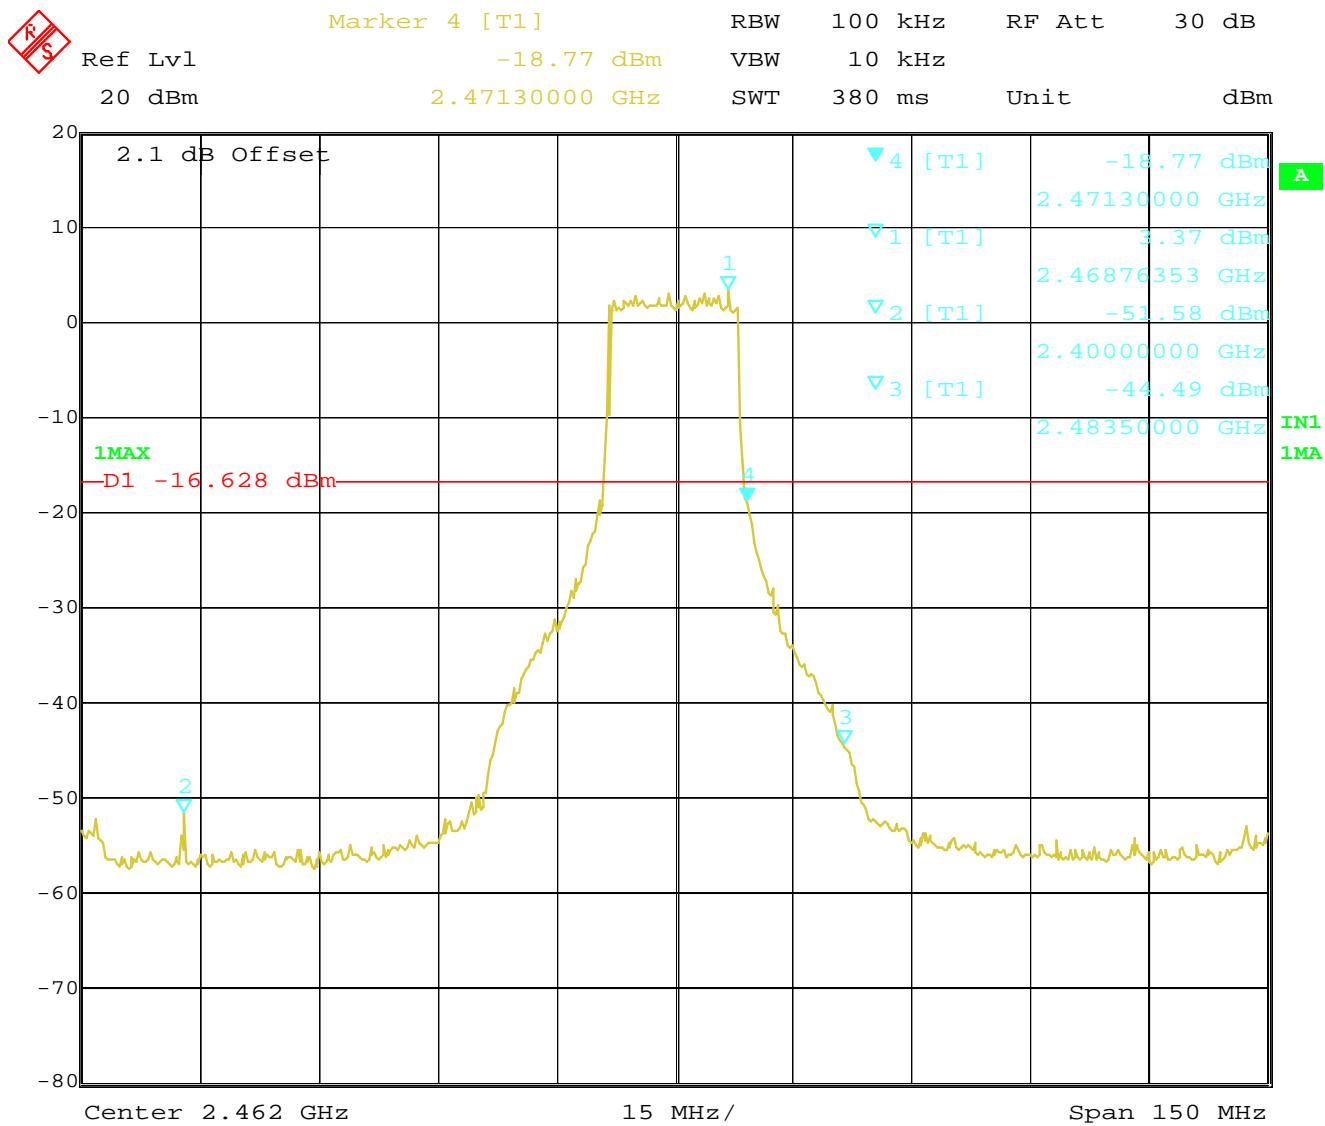


Figure 23: Inband Emissions at 6 Mbps – Operating Channel 2462 MHz

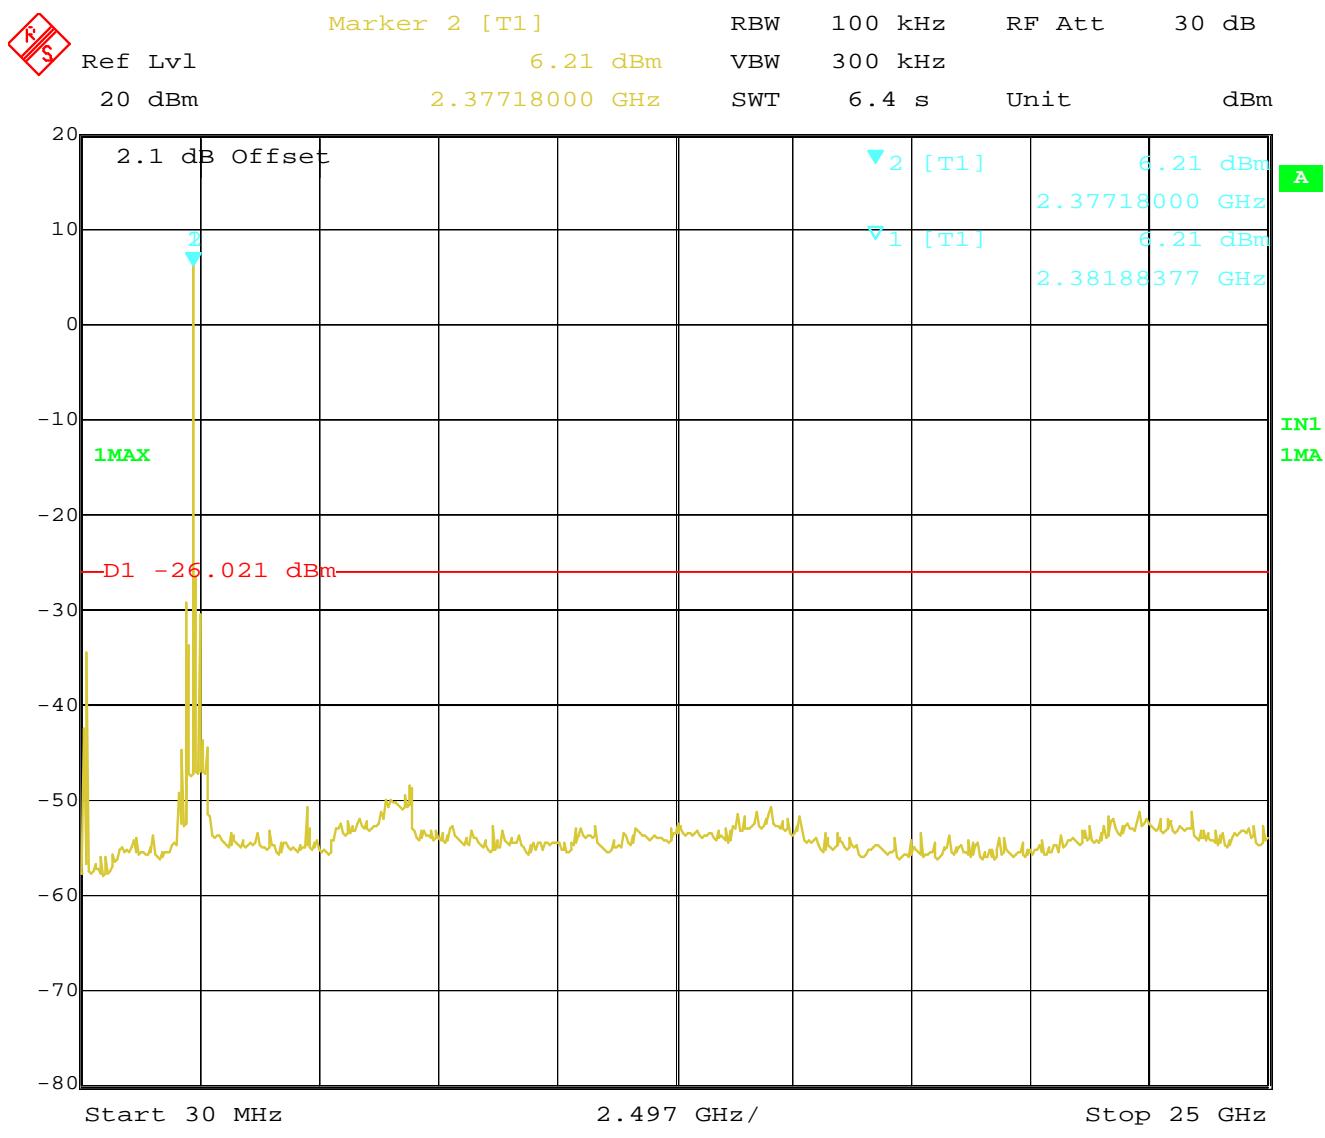


Figure 24: Out of Band Emissions at 6 Mbps – Operating Channel 2412 MHz

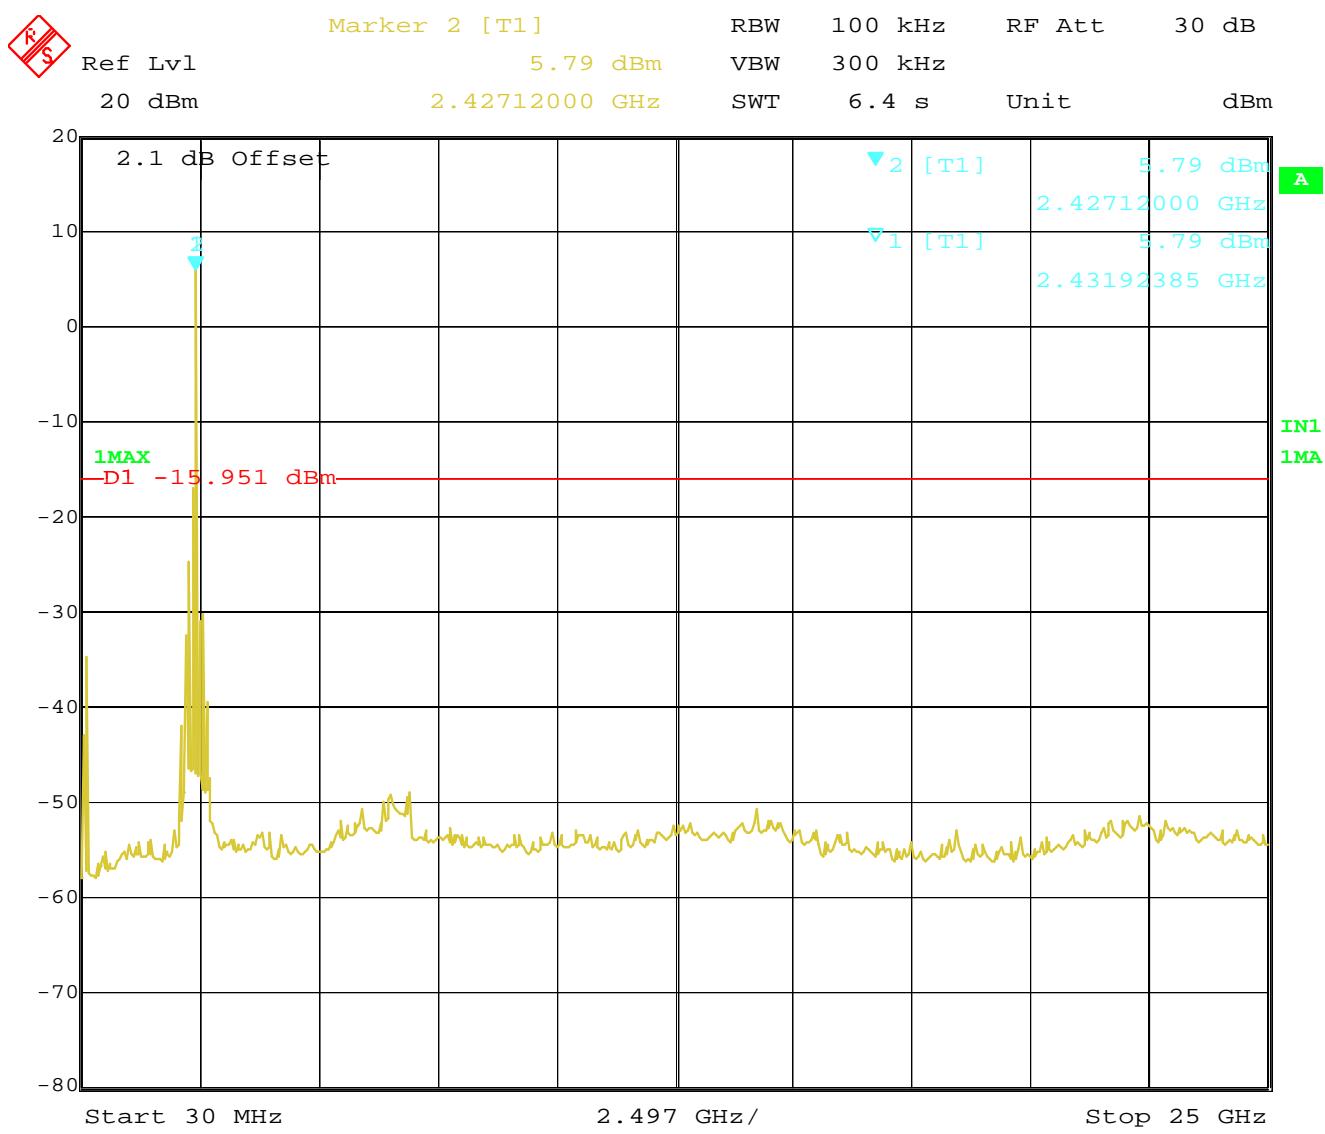


Figure 25: Out of Band Emissions at 6 Mbps – Operating Channel 2437 MHz

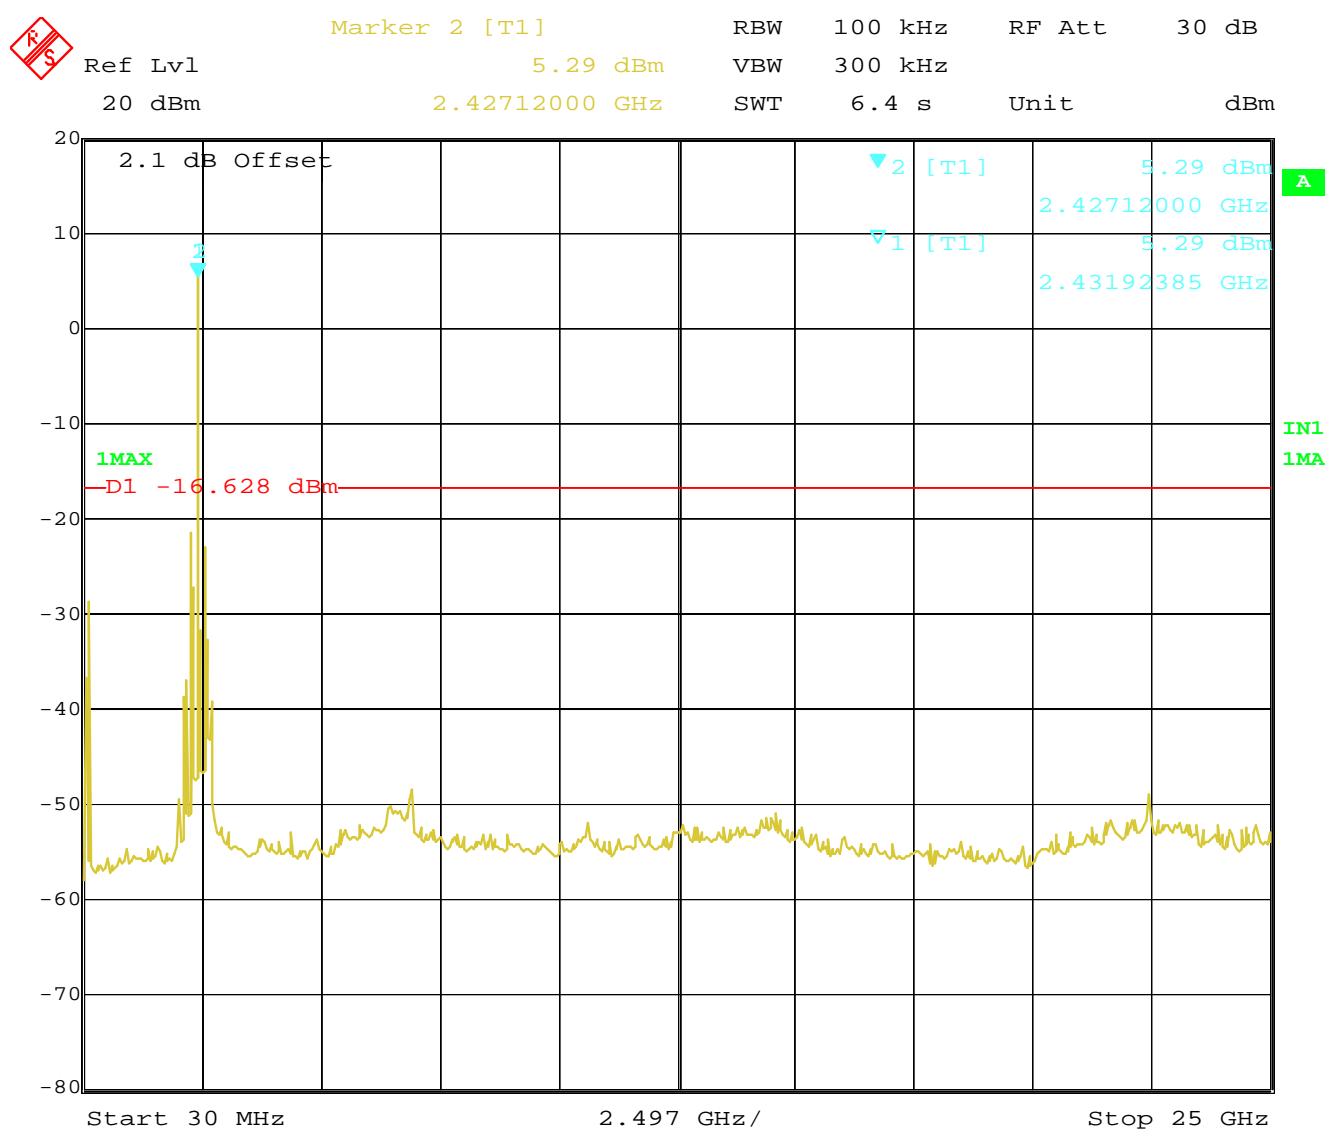


Figure 26: Out of Band Emissions at 6 Mbps – Operating Channel 2462 MHz

4.4 Peak Power Spectral Density


According to the CFR47 Part 15.247 (e) and RSS 210 (A8.2), the spectral power density output of the antenna port shall be less than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.4.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10:2009 Section 6.11.2

The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 210 (A8.2). This test was conducted on 3 channels in each mode. The worst sample result indicated below.

Test Setup:

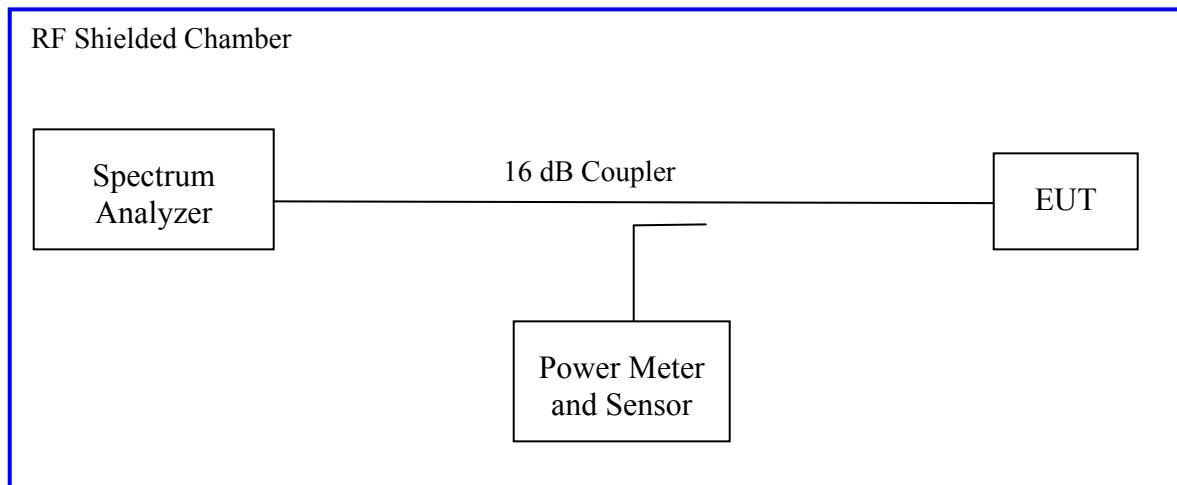


4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only				
Antenna Type: Integrated		Power Setting: see test plan		
Max. Antenna Gain: +2.1 dBi		Signal State: Modulated		
Ambient Temp.: 21 °C		Relative Humidity: 39%		
Peak Power Spectral Density Test Results				
Operating Channel	Mode	PPSD [dBm]	Limit [dBm]	Margin [dB]
2412 MHz	6 Mbps	-4.79339447	8.0	12.79
2437 MHz	6 Mbps	-4.799490356	8.0	12.79
2462 MHz	6 Mbps	-5.255056763	8.0	13.25
Note: The highest PPSD was observed at 6 Mbps; Preliminary tests showed PPSD levels were lower in HT20 mode				

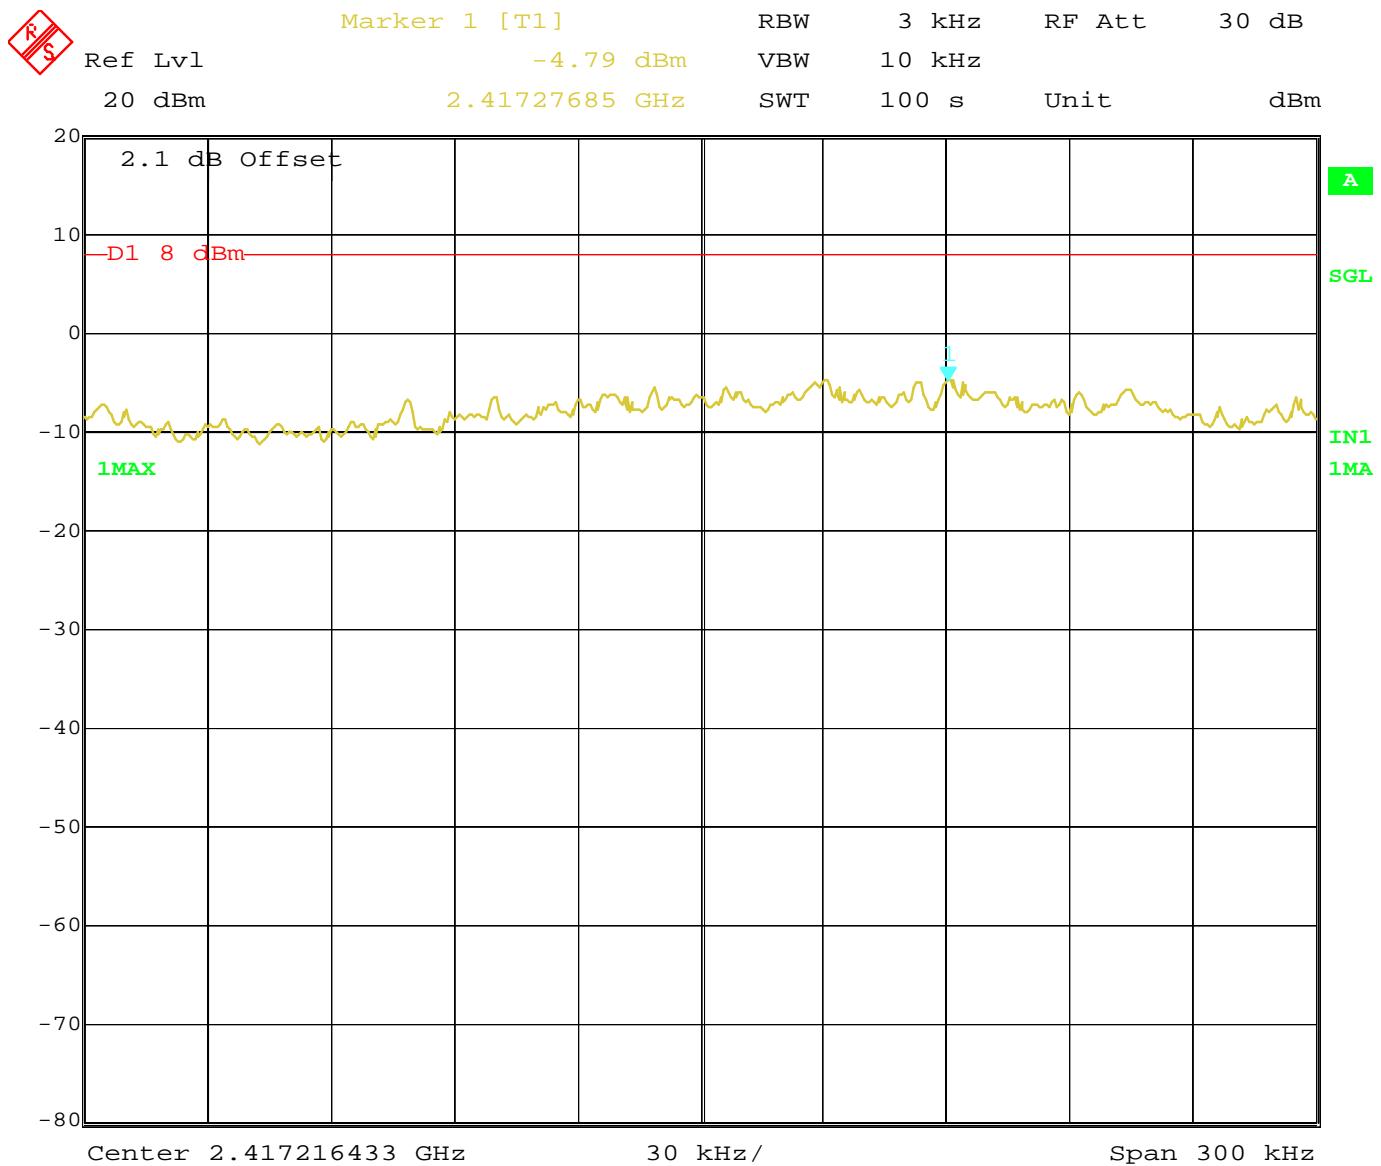

Date: 3.APR.2012 11:33:07

Figure 27: Peak Power Spectral Density for Operating Channel 2412 MHz


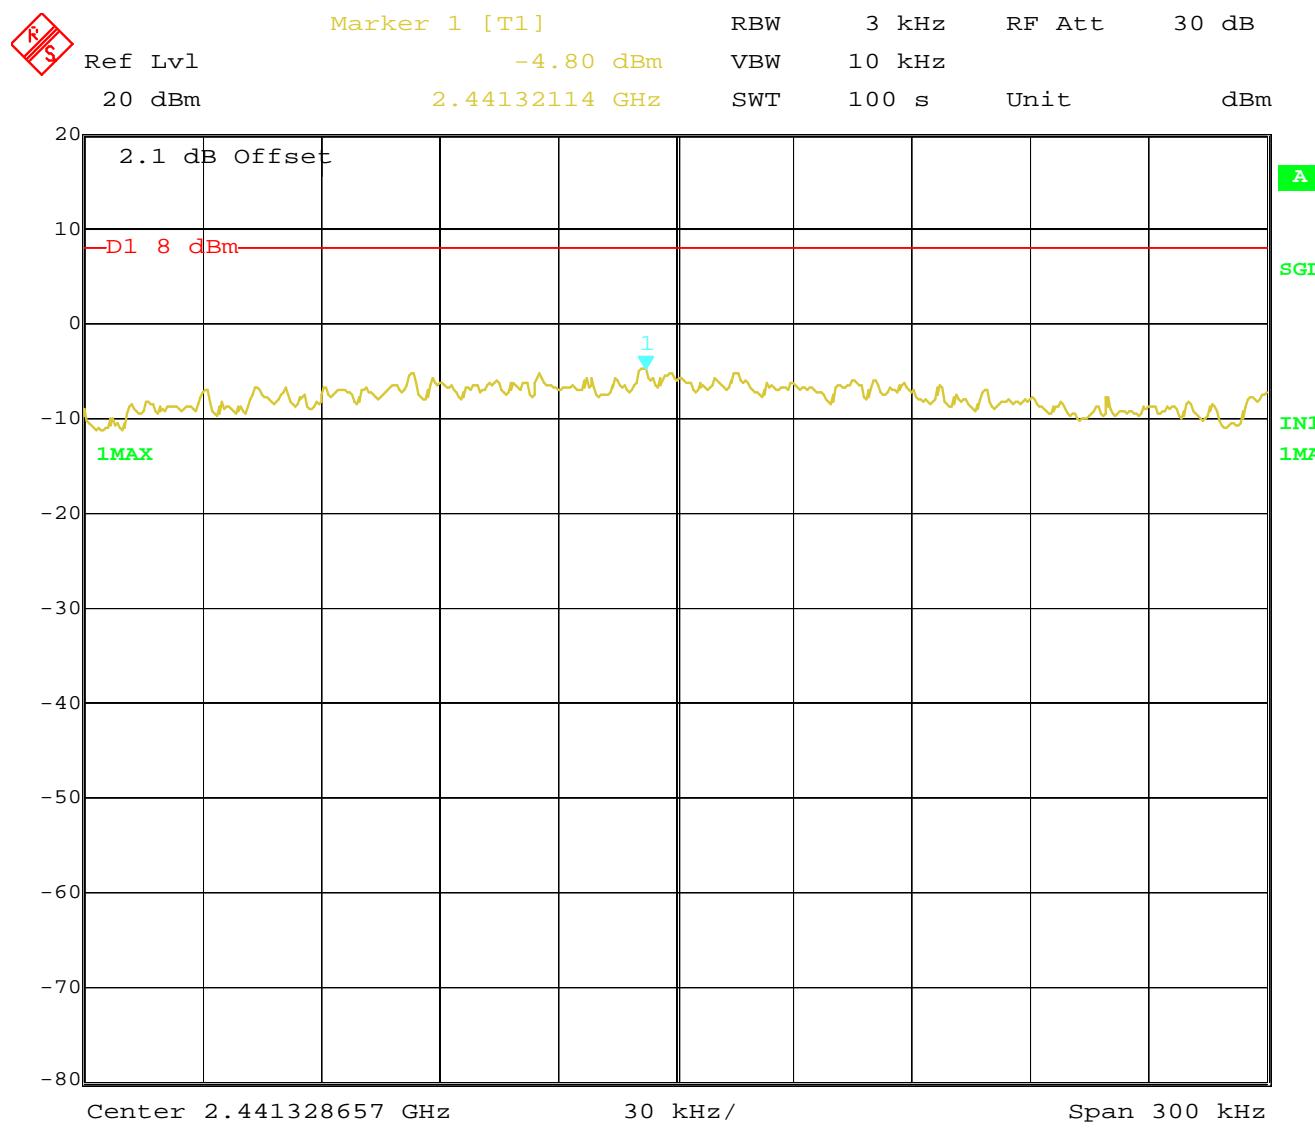


Figure 28: Peak Power Spectral Density for Operating Channel 2437 MHz

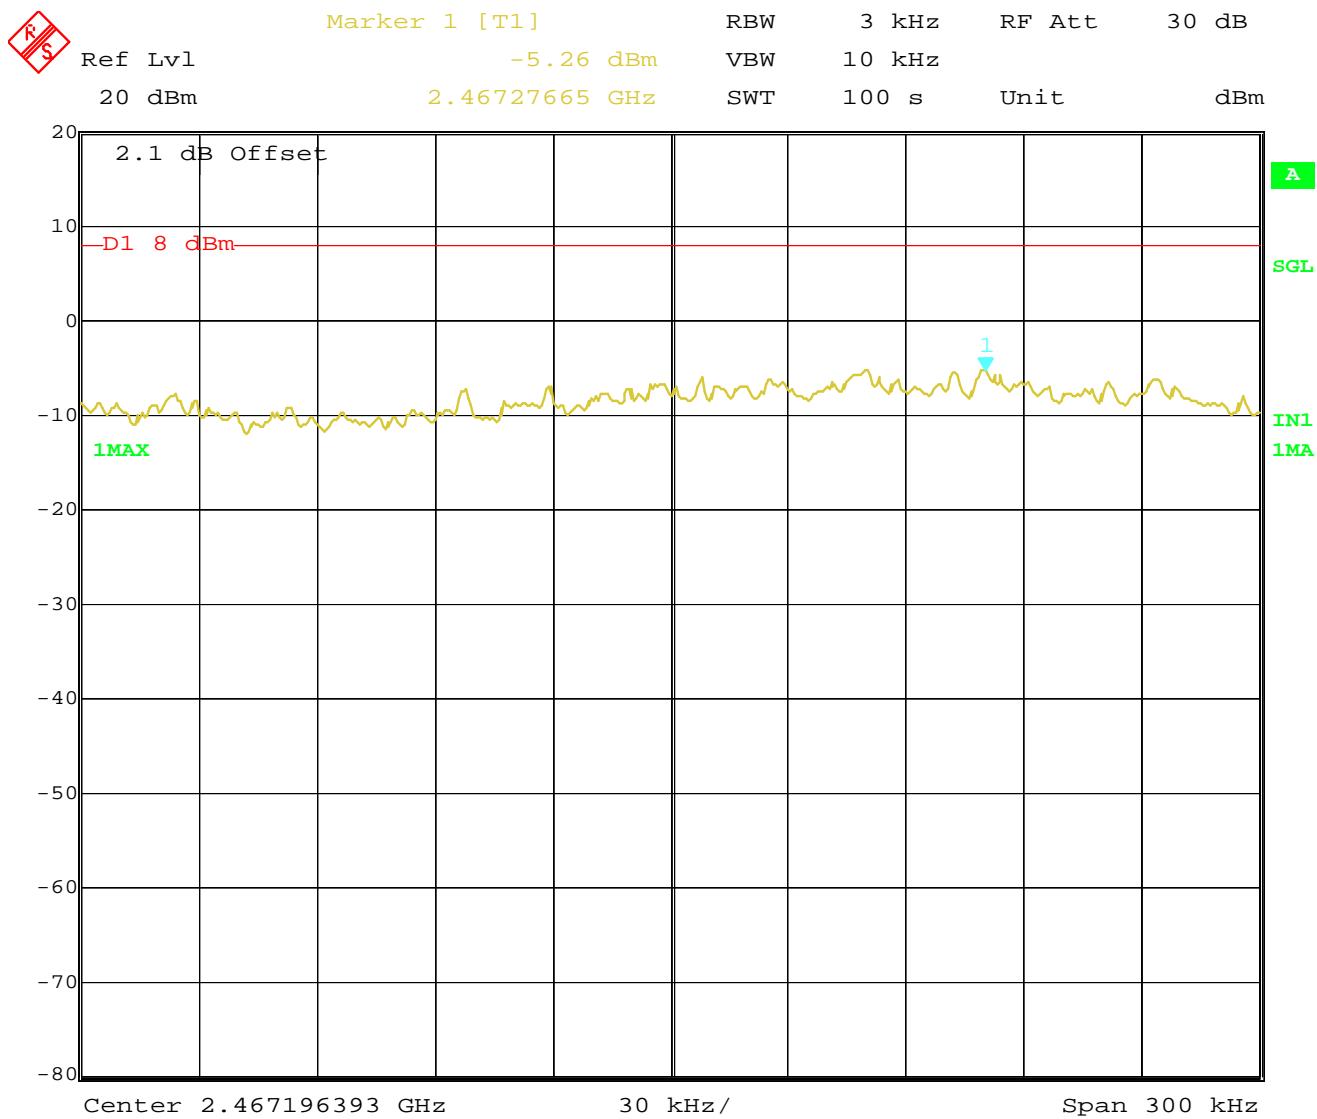

Date: 3.APR.2012 11:49:55

Figure 29: Peak Power Spectral Density for Operating Channel 2462 MHz

4.5 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 210 Sect. A.8.5

4.5.1 Test Methodology

4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis, Y-Axis, for three operating channels;

2412 MHz, 2437 MHz, and 2462 MHz at 6 Mbps for g mode and 6.5 Mbps for HT20 Mode

4.5.1.3 Deviations

None.

4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2011 and RSS 210 A1.1.2 2010.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20 dB below the in-band emission.

4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and Test Plan.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Transmit Spurious Emission at Band-Edge Requirements

Test Conditions: Radiated Measurement, Normal Temperature and Voltage only								
Antenna Type: External			Power Setting: See test plan					
Max. Antenna Gain: + 2.1dBi			Signal State: Modulated at 99%					
Ambient Temp.: 22 °C			Relative Humidity: 34%					
Band-Edge Results								
Operating Channel MHz	Polari ty	Peak Field Strength Measured dBuV	Peak Limit dBuV	Margin dB	Avg Field Strength Measured dBuV	Avg Limit dBuV	Margin dB	Result
2412	H	70.55	74.0	-3.45	52.27	54.00	-1.73	Pass
2412	V	71.62	74.0	-3.38	53.18	54.00	-0.82	Pass
2417	V	63.01	74.0	-10.99	48.93	54.00	-5.07	Pass
2417	V	64.25	74.0	-9.80	49.37	54.0	-4.83	Pass
2452	V	60.10	74.0	-9.90	46.24	54.0	-7.76	Pass
2457	V	66.34	74.0	-7.66	52.68	54.0	-1.32	Pass
2462	H	62.77	74.0	-11.23	48.40	54.00	-5.60	Pass
2462	V	72.62	74.0	-0.38	53.45	54.00	-0.55	Pass


Note: All bandedge measurements were performed for g and HT20 modes. Only worst case/ limited number of plots are placed in the report.

Emissions in vertical orientation were higher than Horizontal only worst case results are reported here.

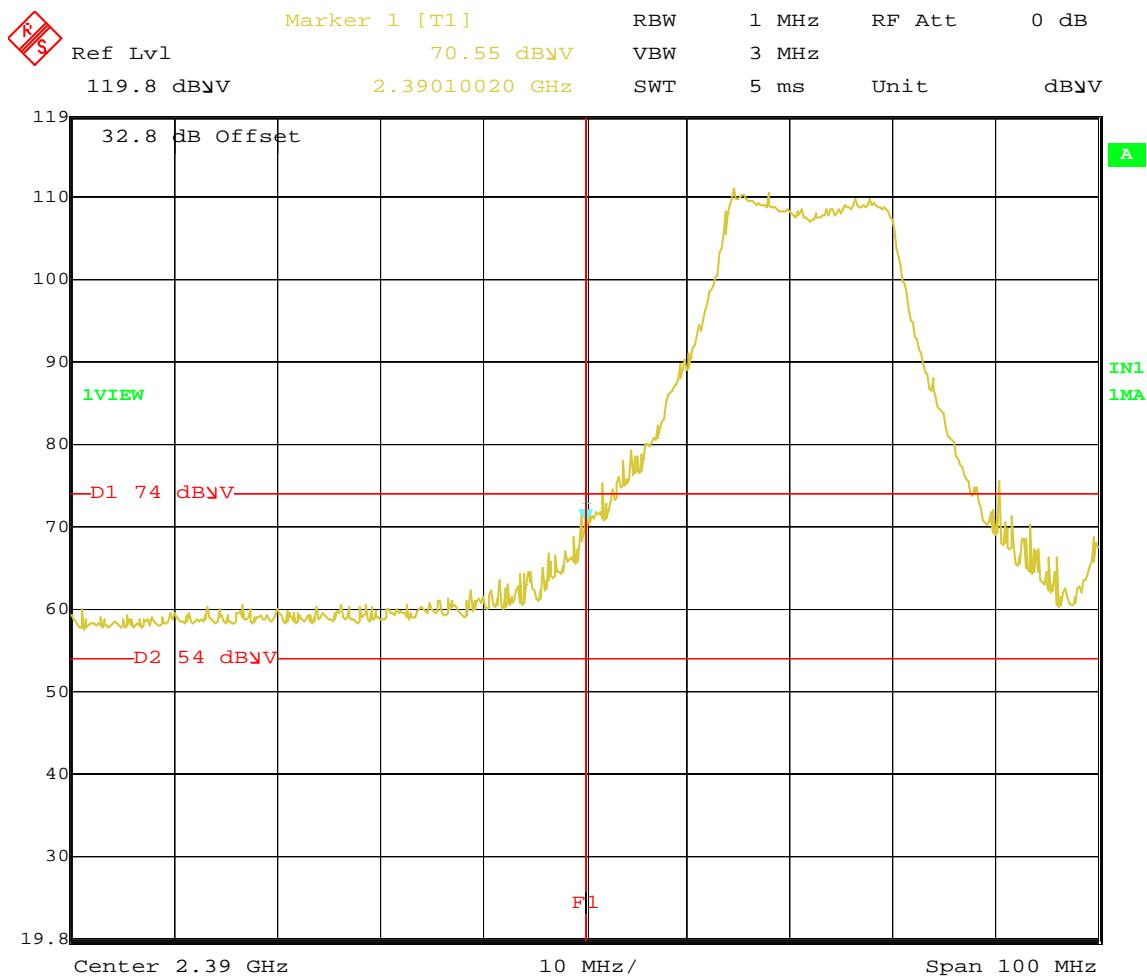


Date: 5.APR.2012 12:30:03

Figure 30: Radiated Emission at the Edge for Channel 2412 MHz Horizontal (Peak) Power Setting tp20

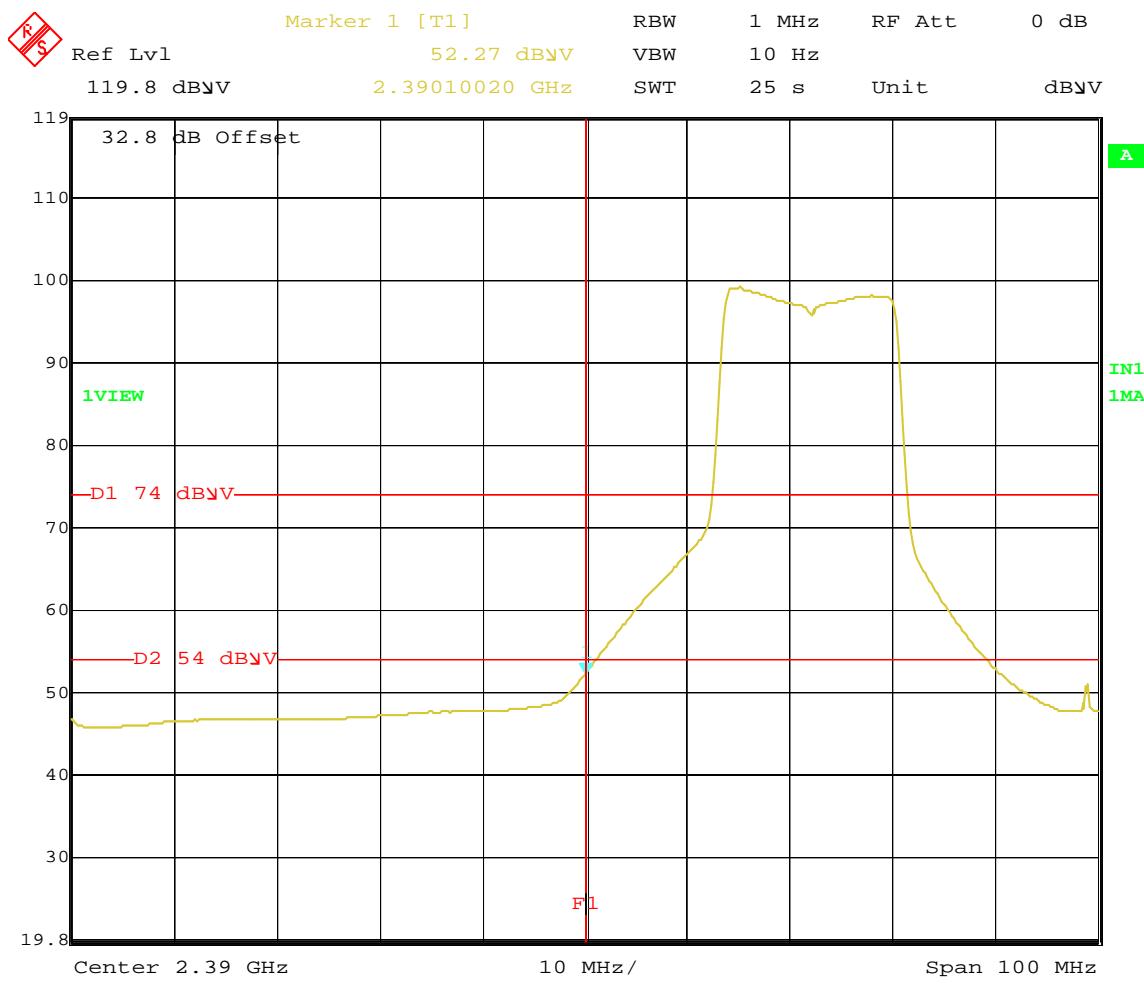


Date: 5.APR.2012 12:27:03

Figure 31: Radiated Emission at the Edge for Channel 2412 MHz H - Power Setting tp20 – AVG

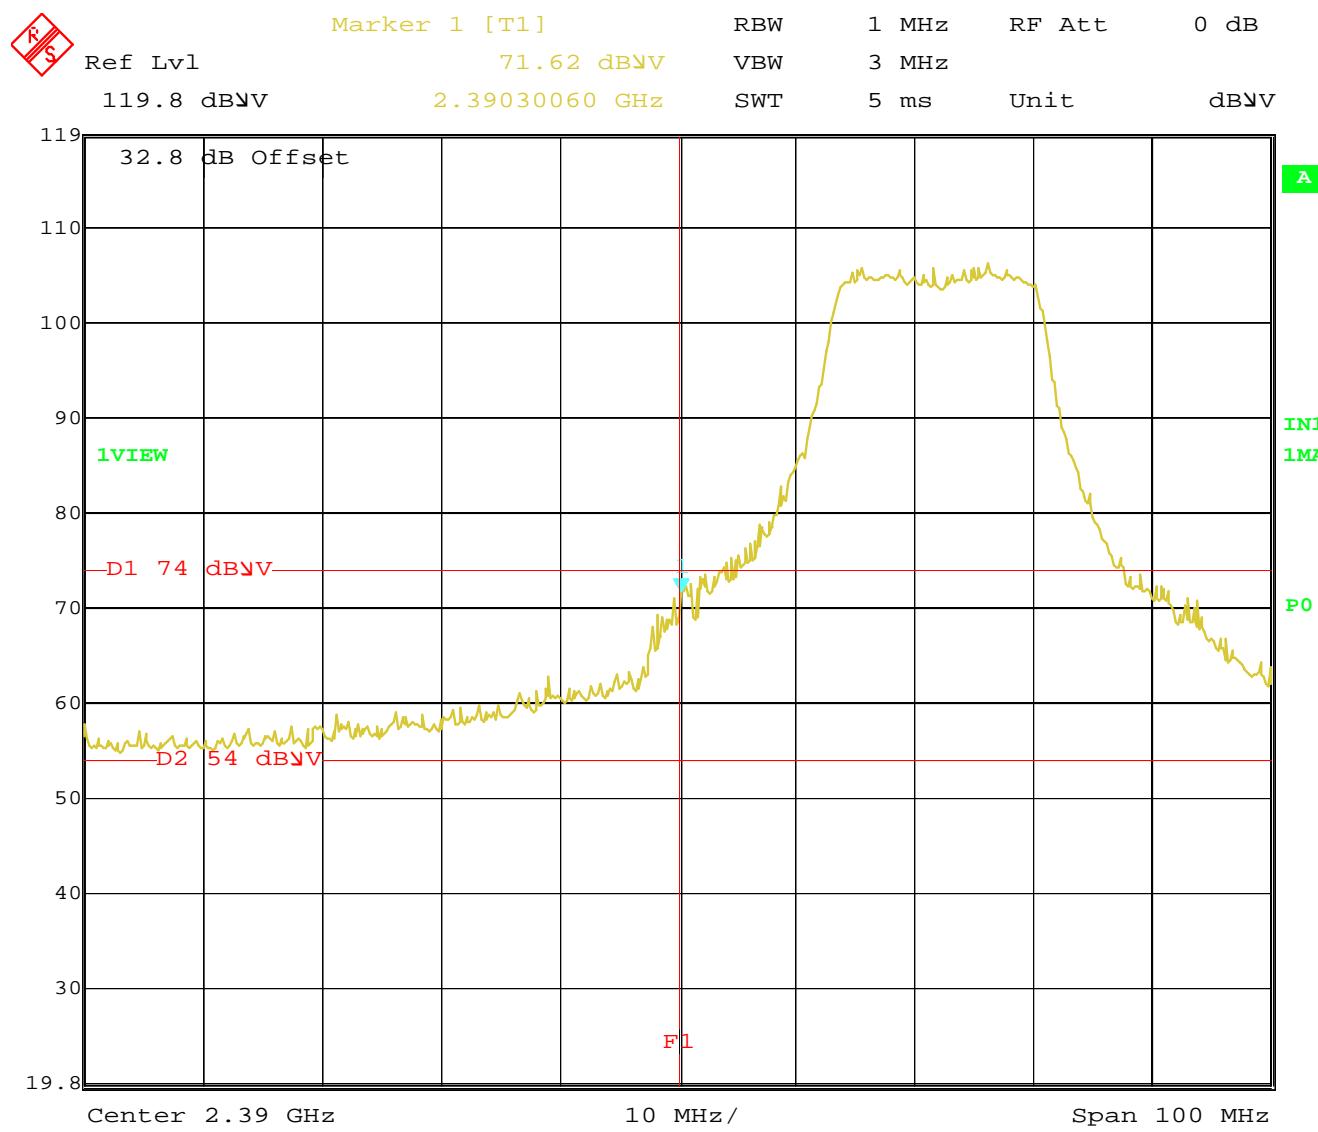


Date: 11.APR.2012 10:02:16

Figure 32: Radiated Emission at the Edge for Channel 2412 MHz – Vertical (Peak) tp20

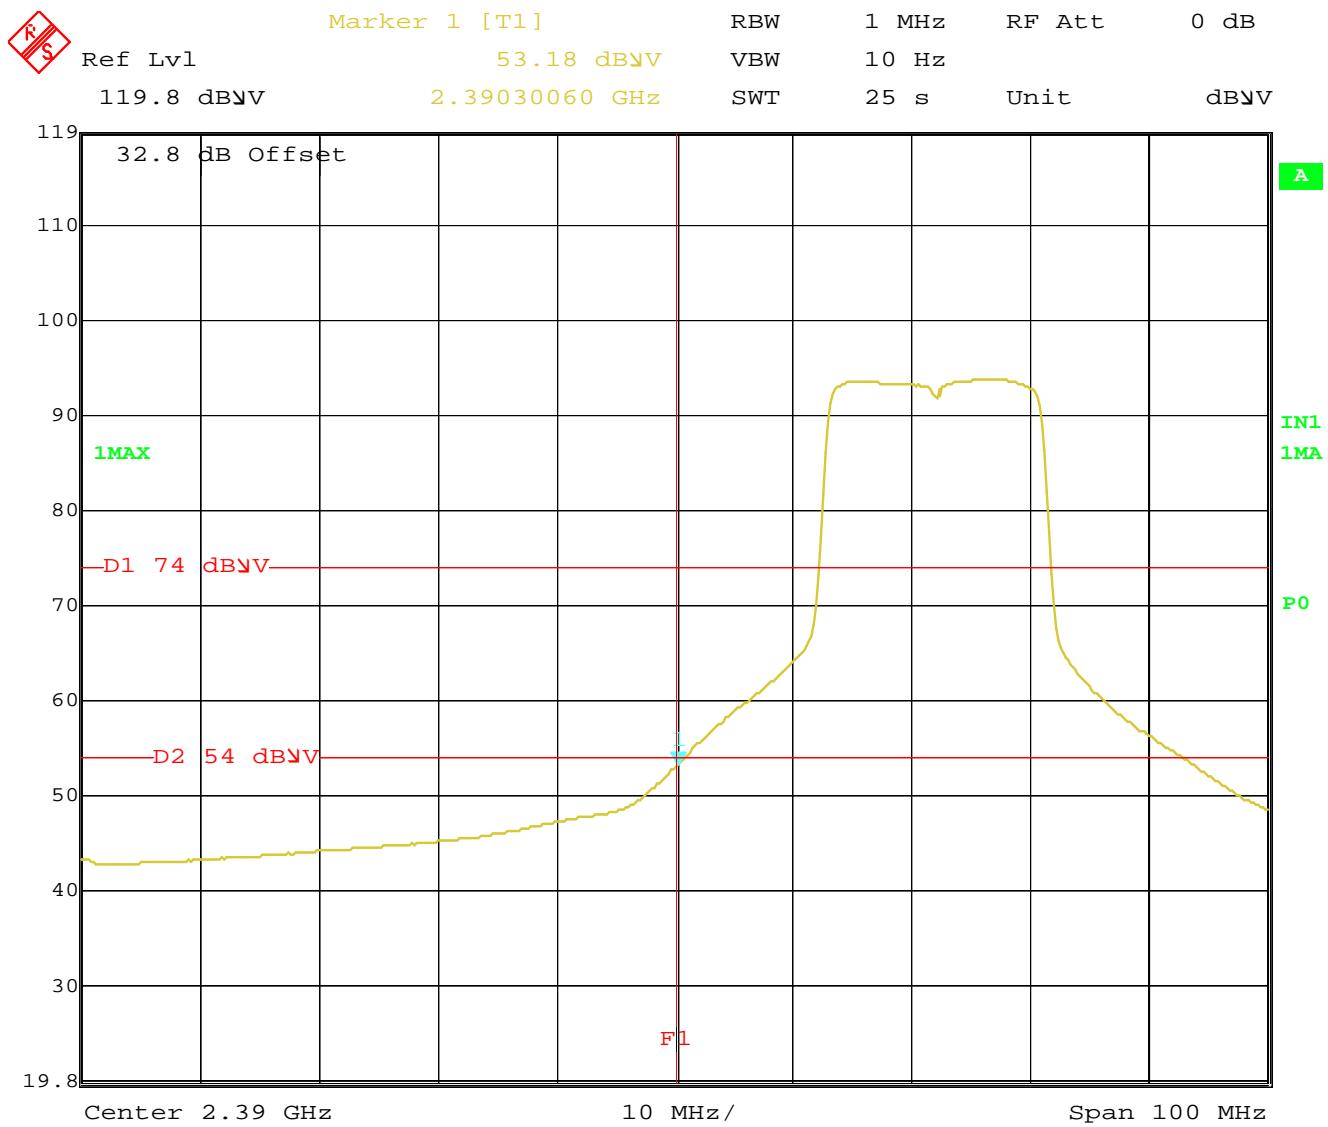

Date: 11.APR.2012 10:07:01

Figure 33: Radiated Emission at the Edge for Channel 2412 MHz – Vertical (Avg) tp20

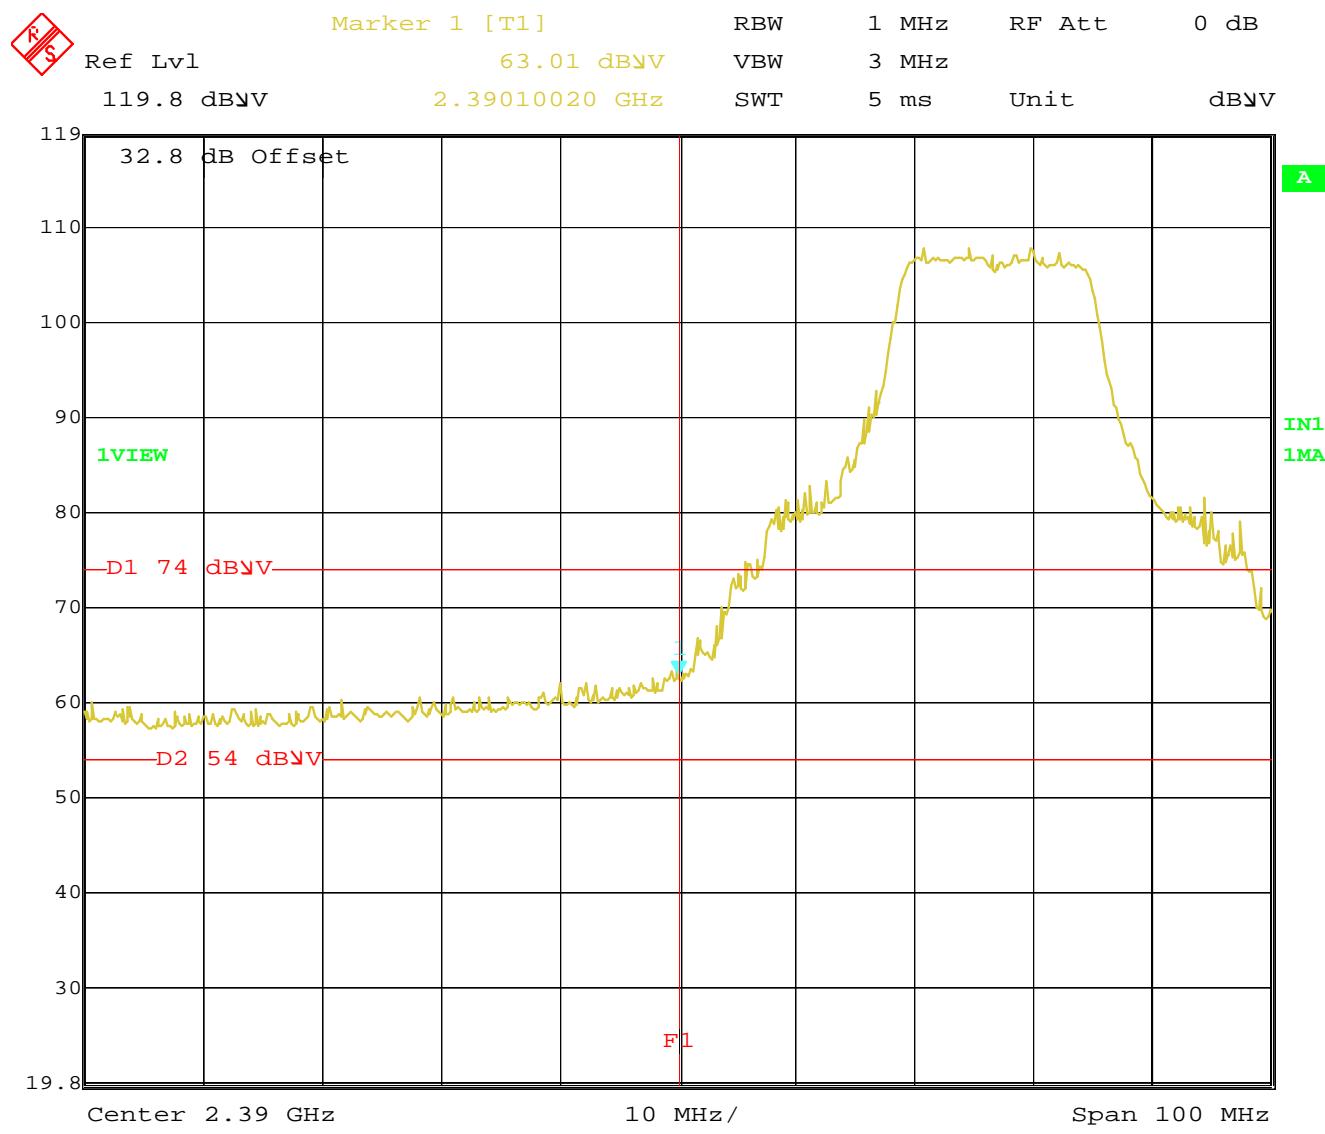

Date: 11.APR.2012 12:05:21

Figure 34: Radiated Emission at the Edge for Channel 2417 MHz – Vertical (Peak) tp22


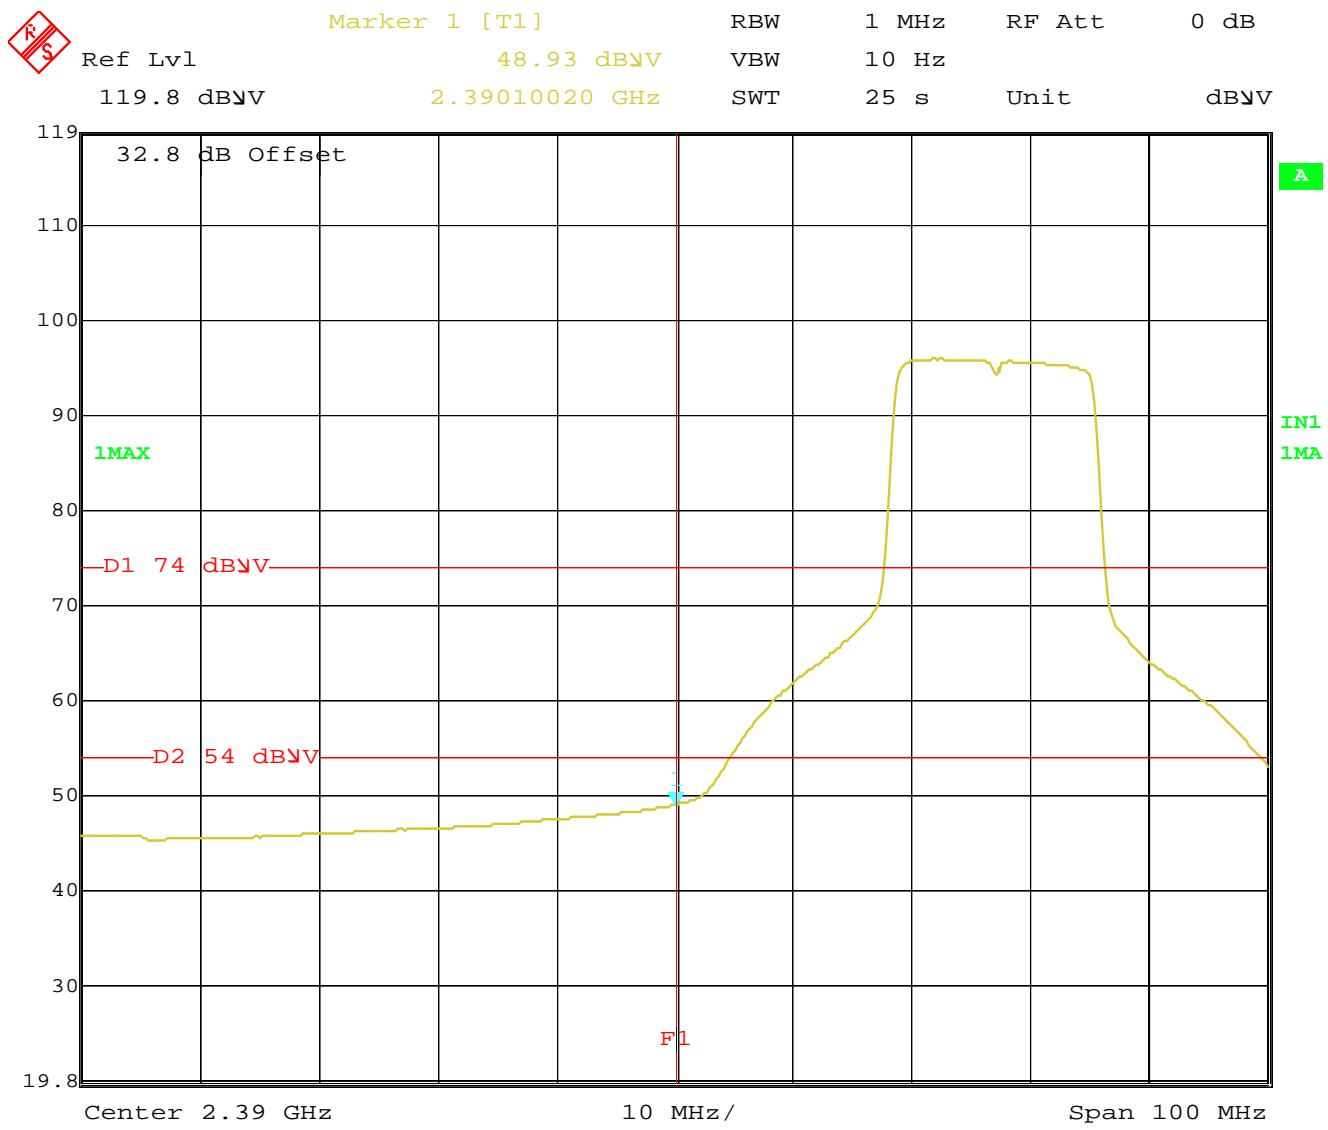


Figure 35: Radiated Emission at the Edge for Channel 2417 MHz – Vertical (Avg) tp22

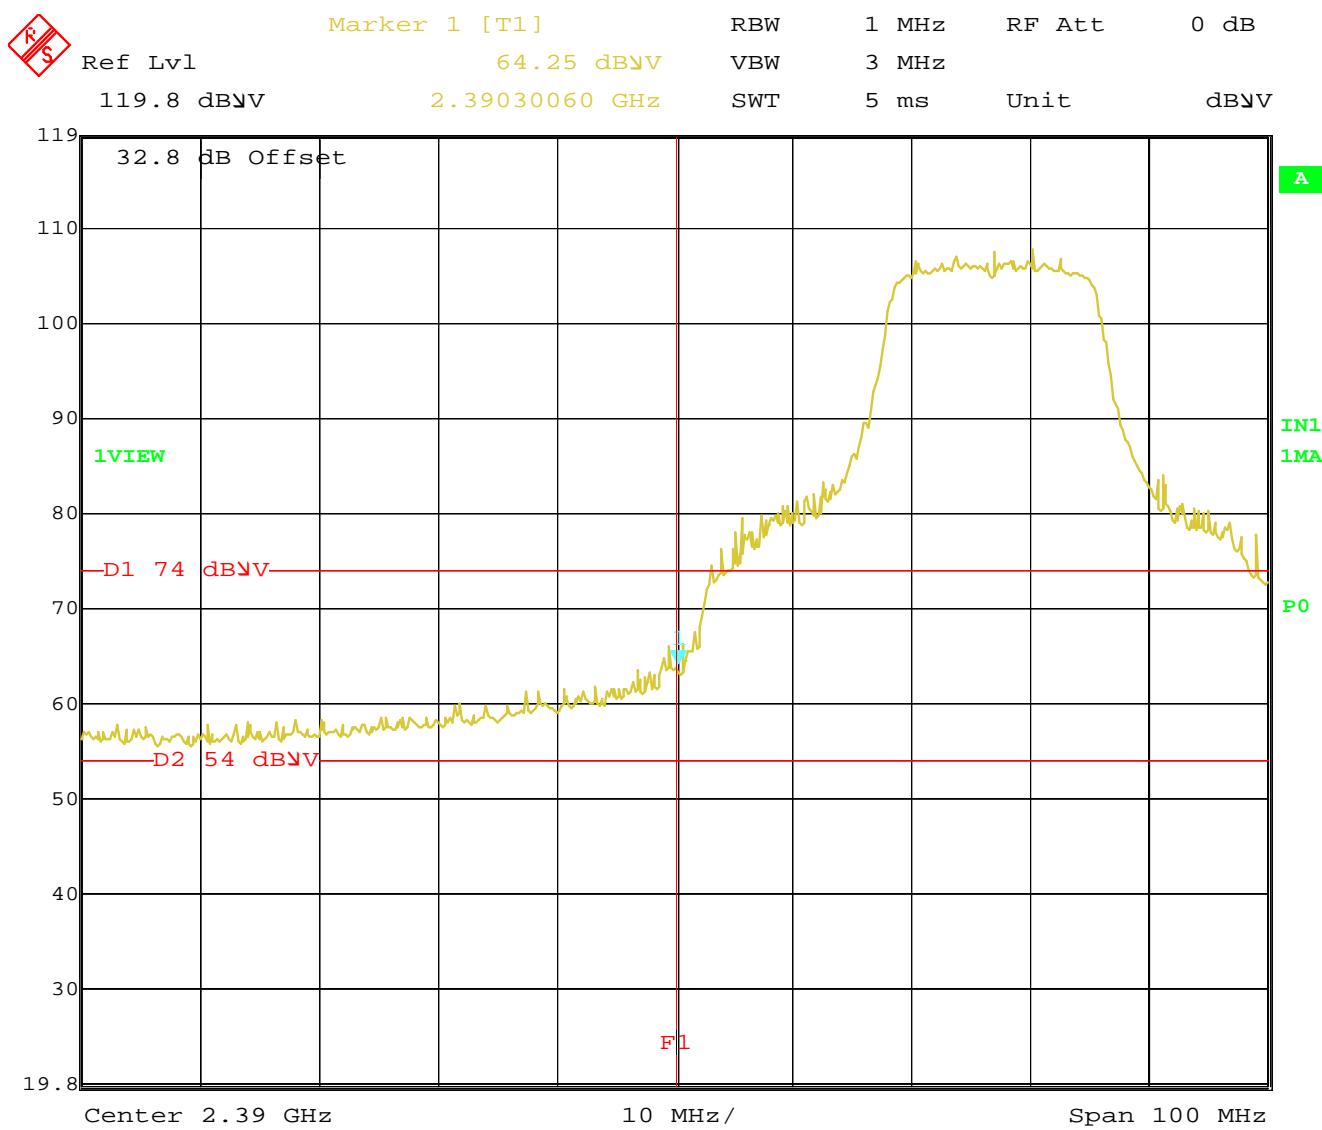

Date: 11.APR.2012 10:33:50

Figure 36: Radiated Emission at the Edge for Channel 2417 MHz – Vertical (Peak) tp23


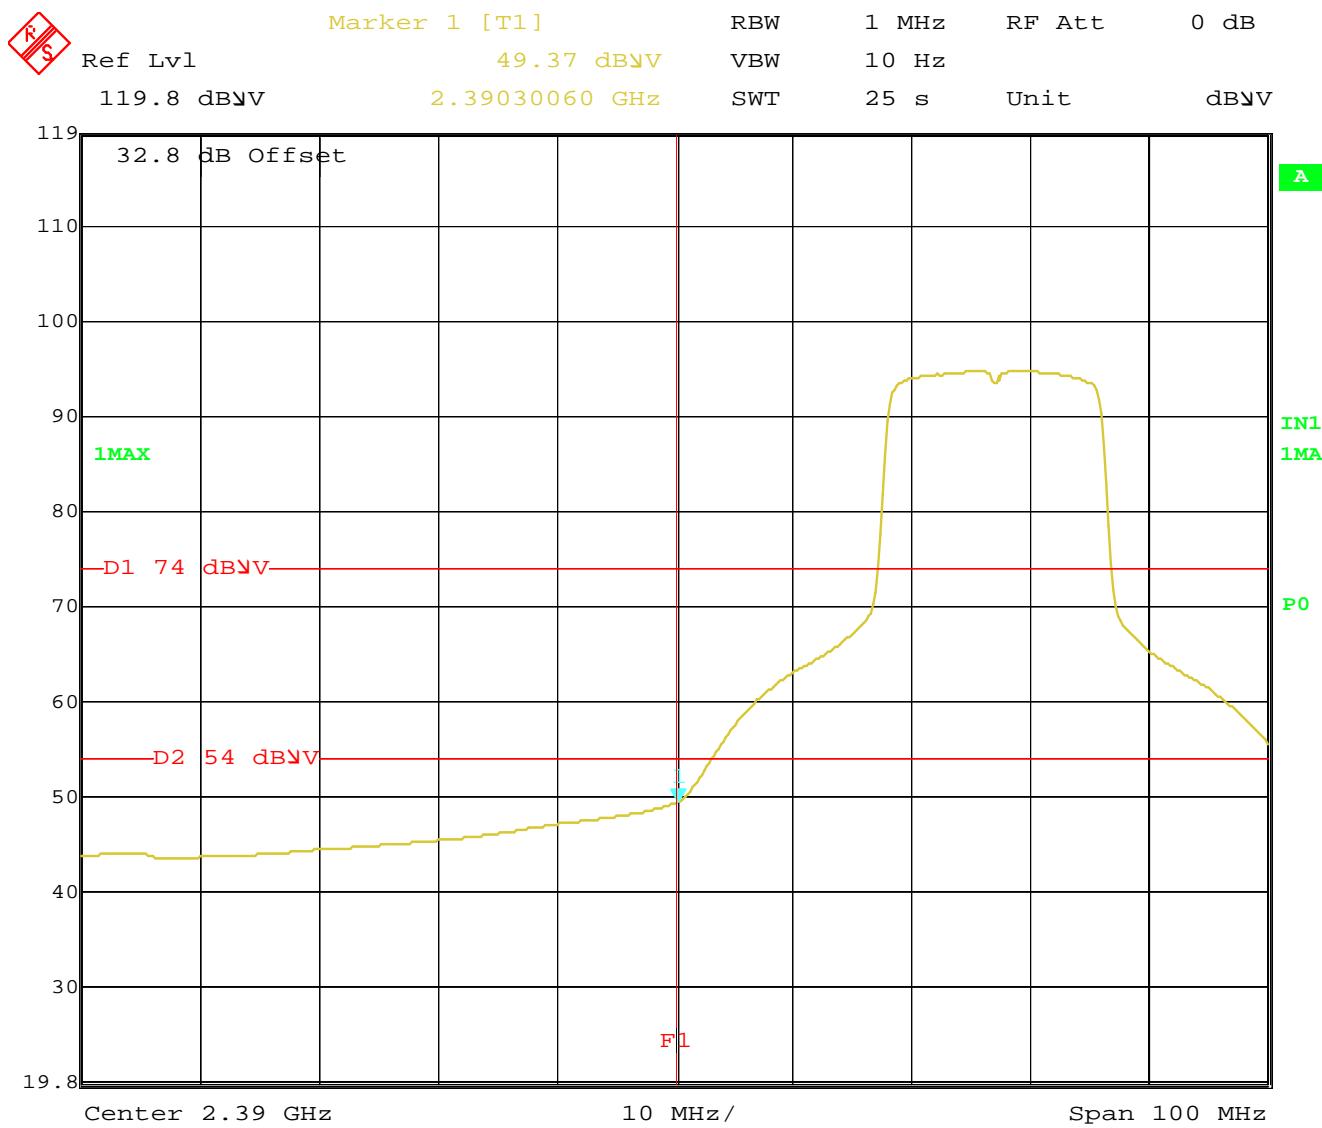


Figure 37: Radiated Emission at the Edge for Channel 2417 MHz – Vertical (avg) tp23

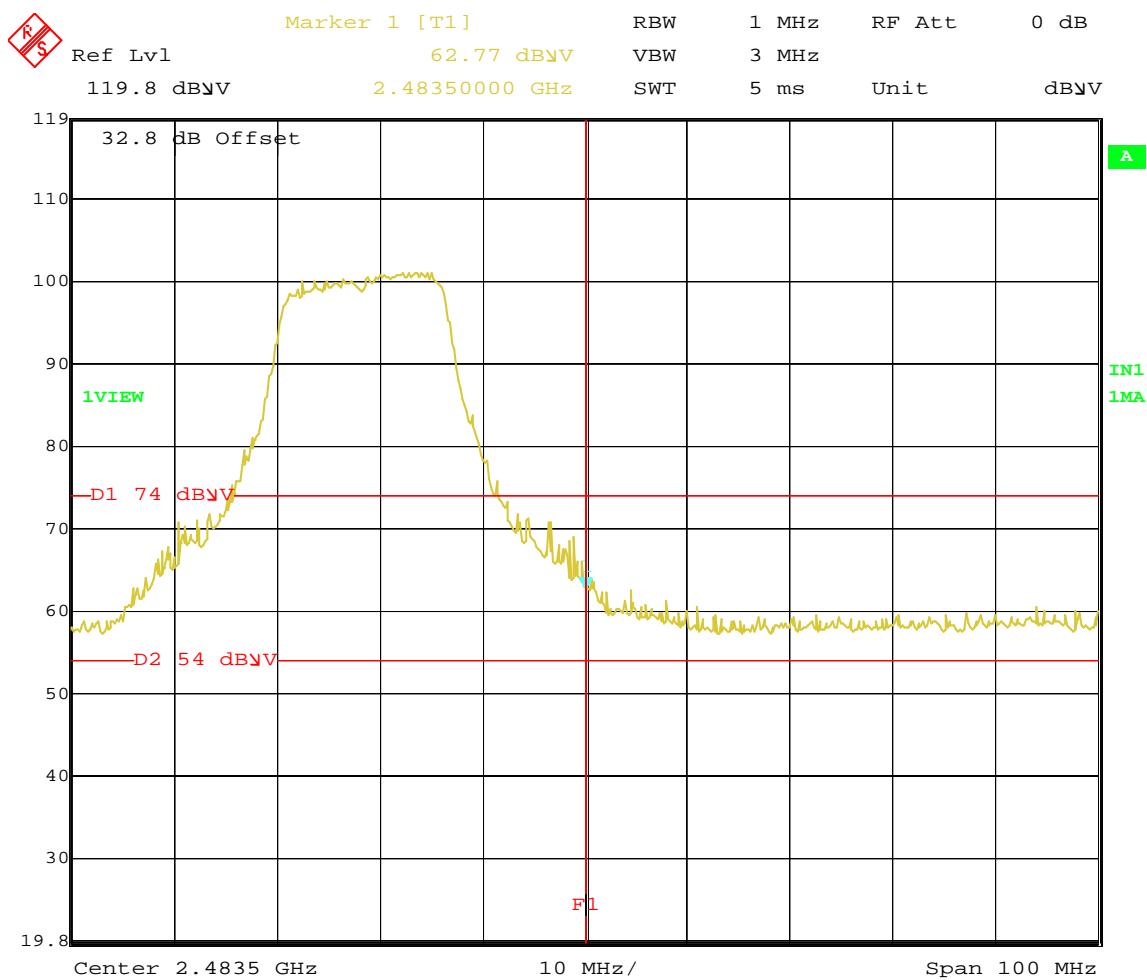

Date: 5.APR.2012 12:36:52

Figure 38: Band-edge at Operating Channel 2462 MHz, H - Power Setting tp20 – PK

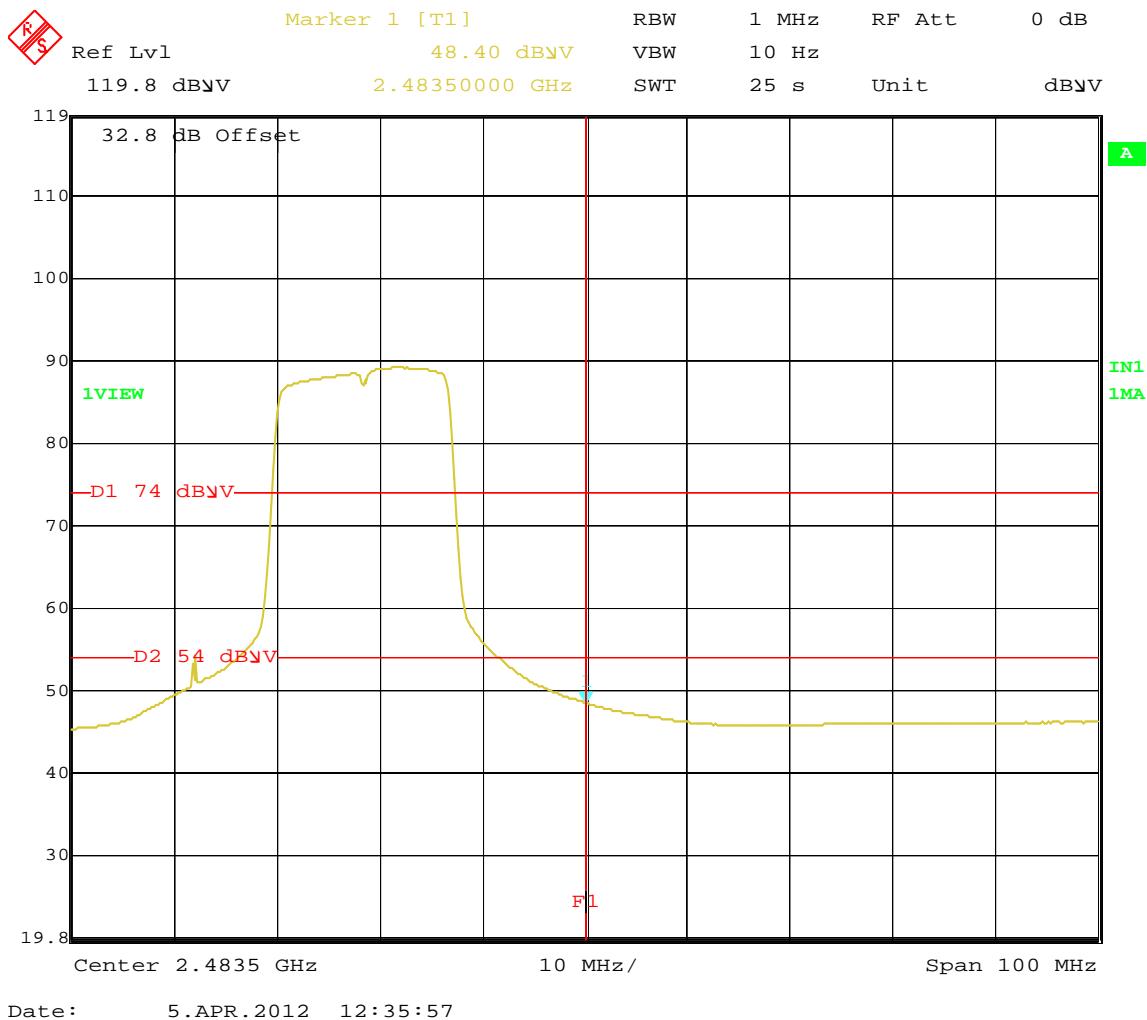


Figure 39: Band-edge at Operating Channel 2462MHz, H - Power Setting tp20 – AVG



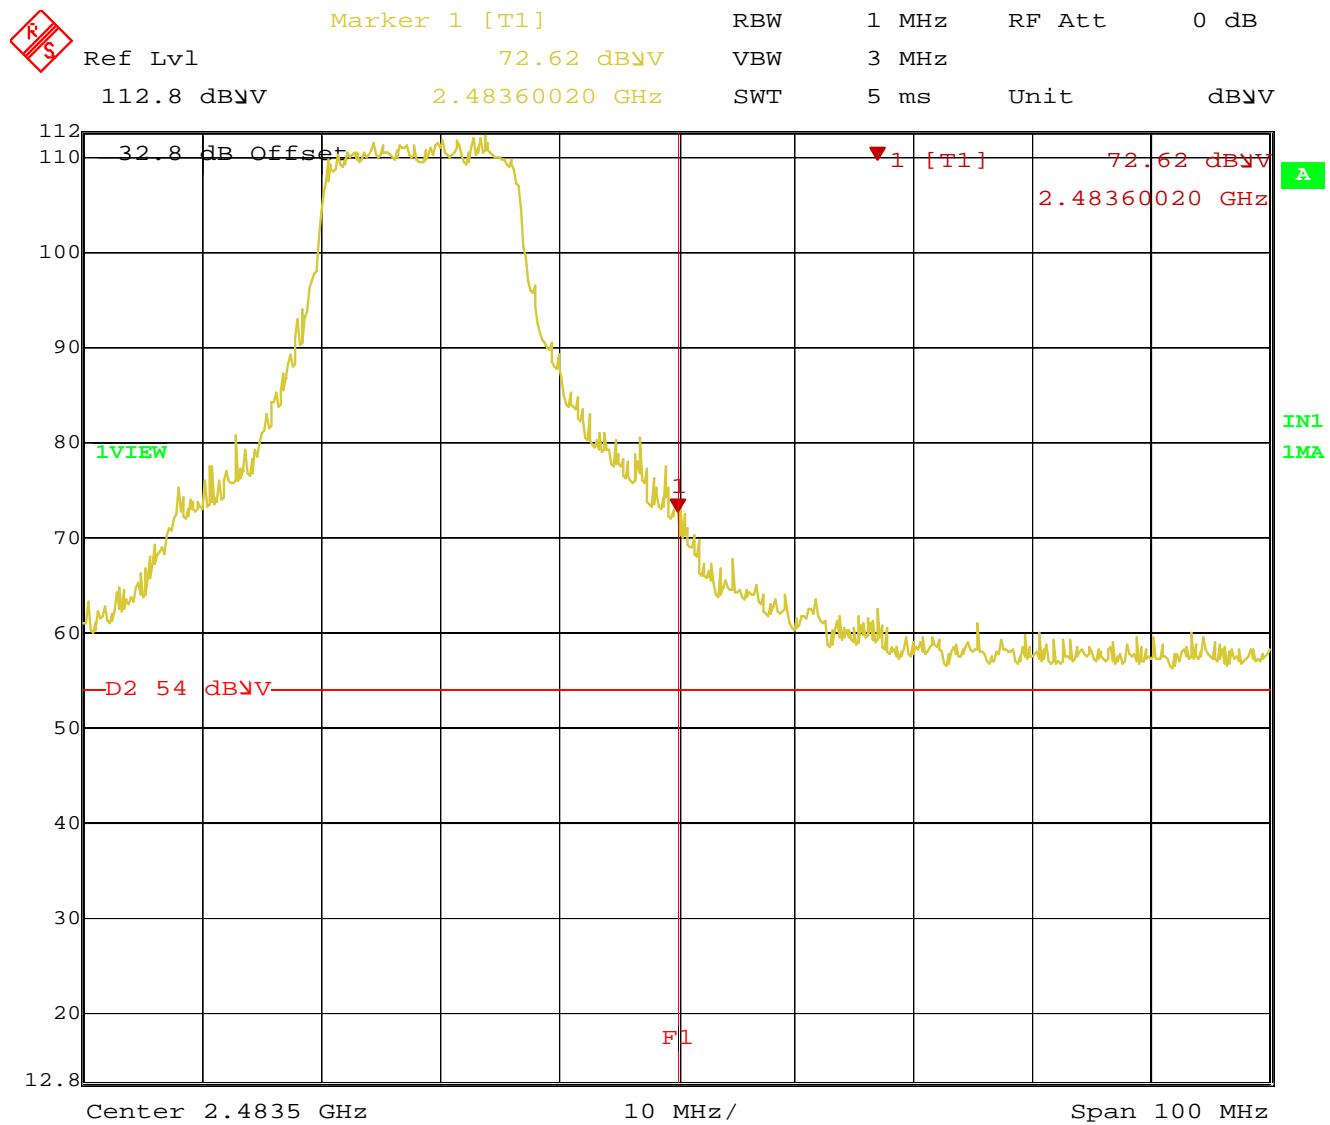


Figure 40: Band-edge at Operating Channel 2462 MHz, V - Power Setting tp20 – peak

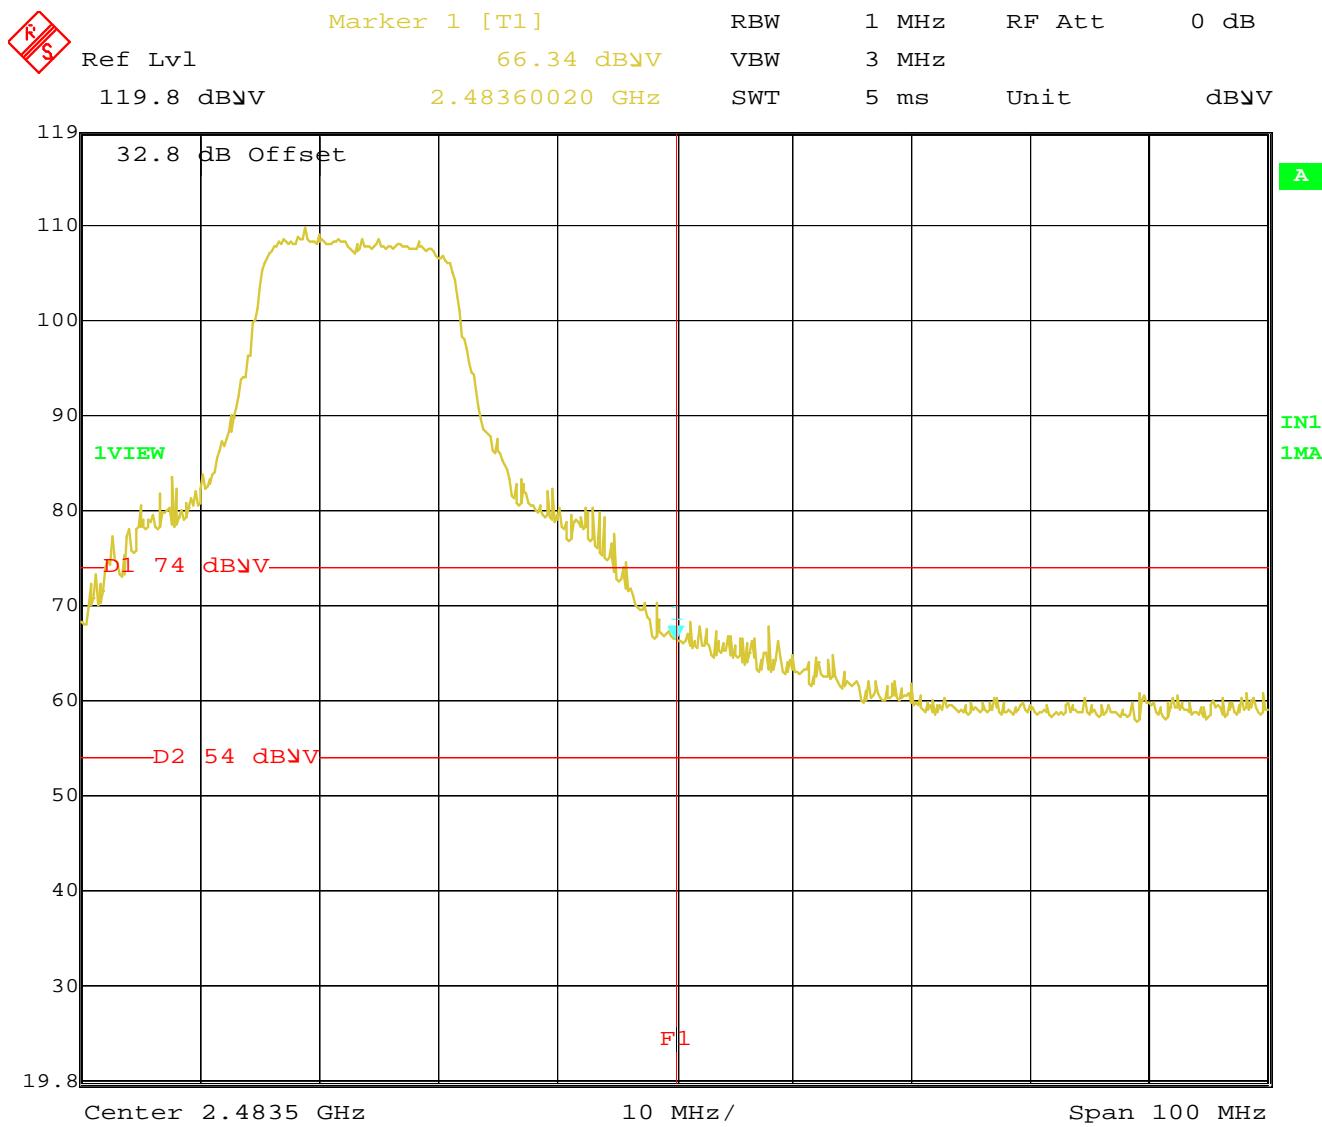

Date: 11.APR.2012 11:57:31

Figure 41: Band-edge at Operating Channel 2457 MHz, V- Power Setting TP22 – PK

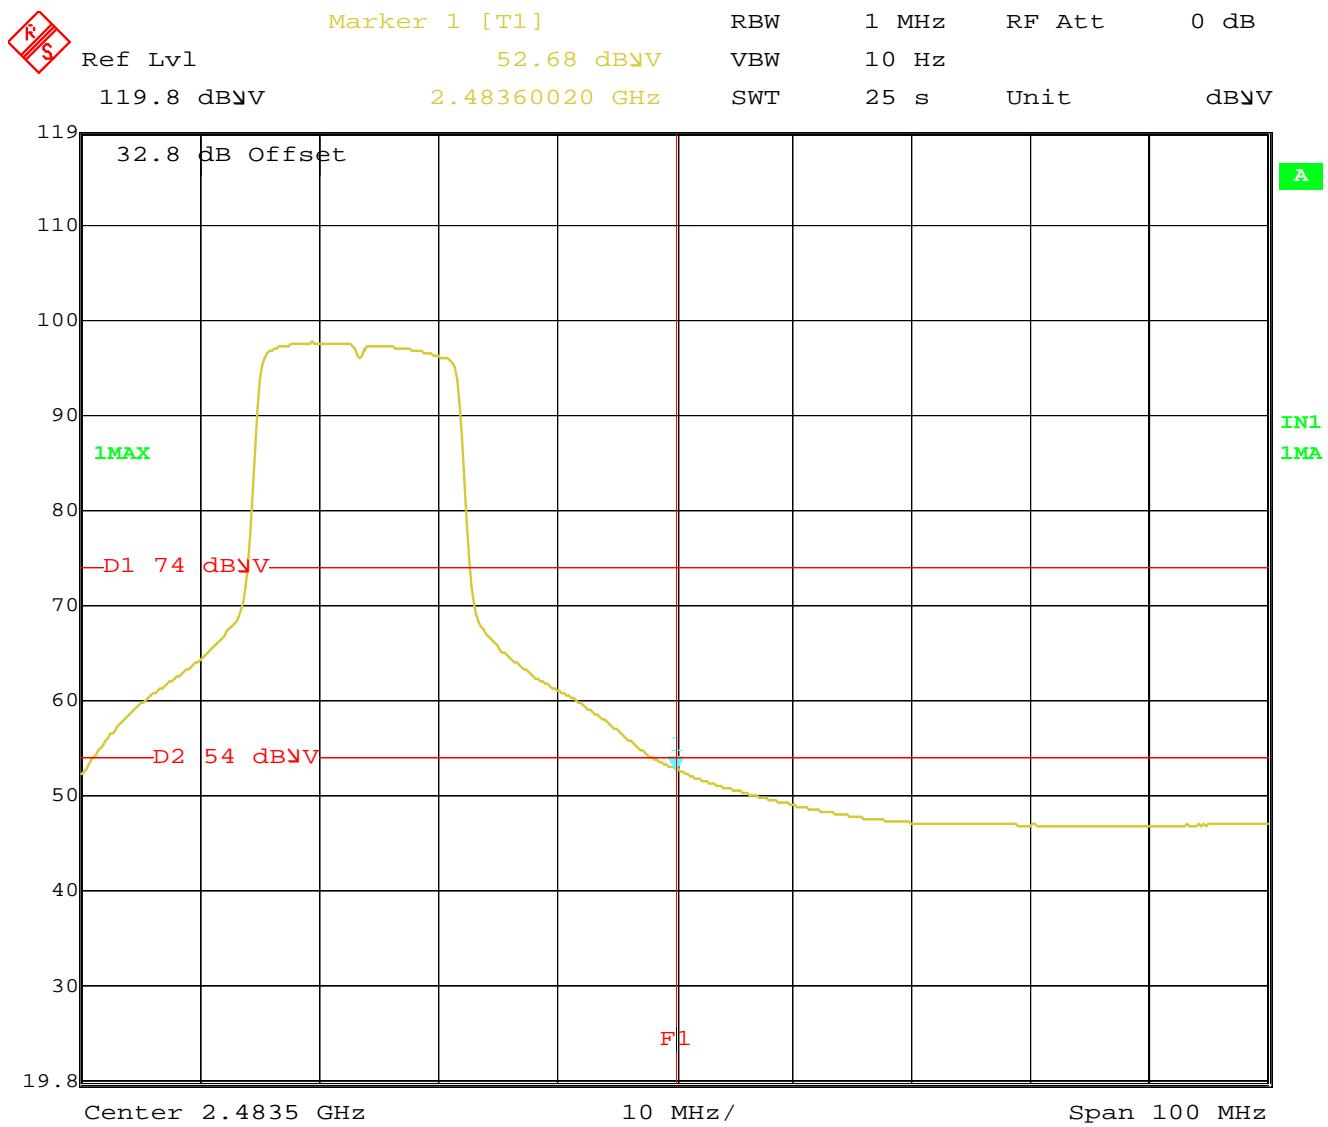

Date: 11.APR.2012 11:52:53

Figure 42: Band-edge at Operating Channel 2457 MHz, V- Power Setting TP22 – Avg

SOP 1 Radiated Emissions

Page 1 of 6

EUT Name	Highpower USB Wifi Module	Date	April 06, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 39%rh
EUT Serial	Prototype	Temp / Hum out	N/A
EUT Comfit.	EUT Verticle	Line AC / Freq	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m / EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Suresh Kondapalli

Emission	FIM	FIM	E-Field	Spec	Spec	Table	ANT	ANT	Type
Freq	Pk	Ave	Ave	Limit	Margin	Pos	Pos	Pola	
MHz	dBuV	dBuV	dBuV	dBuV	dB	deg	cm		

Transmitted Data at 2412 MHz

2129.54	64.07	50.33	50.33	54	-3.67	330	100	V	Spurious
2260.52	48.66	38.38	38.38	54	-15.62	336	110	V	Spurious
2838.16	45.32	33.78	33.78	54	-20.22	270	121	V	Spurious
4681.42	43.57	36.47	36.47	54	-17.53	54	105	V	Spurious
4977.86	49.85	36.13	36.13	54	-17.87	99	154	V	Spurious
4824.21	54.22	34.90	34.90	54	-19.1	45	192	V	Harmonic
7236.32	50.79	38.91	38.91	54	-15.09	45	106	V	Harmonic

Spec Margin = E-Field Avg - Limit, E-Field Avg = FIM Avg+ Total CF ± Uncertainty

Total CF= Amp Gain + Cable Loss + ANT Factor

Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence


Notes: Worst case was observed on Y-axis, 6 Mbps. No duty cycle reduction was applied. Low, mid and high channels were evaluated for 30 MHz to 26MHz, only worst case results are reported here.

SOP 1 Radiated Emissions

Page 2 of 6

EUT Name	Highpower USB Wifi Module	Date	Apr 06, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 39%rh
EUT Serial	prototype	Temp / Hum out	N/A
EUT Config.	EUT vertical TX ON	Line AC	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Suresh Kondapalli

Above 1 GHz Plots for Transmit Mode at 2412 MHz, 802.11g 6 Mbit/s

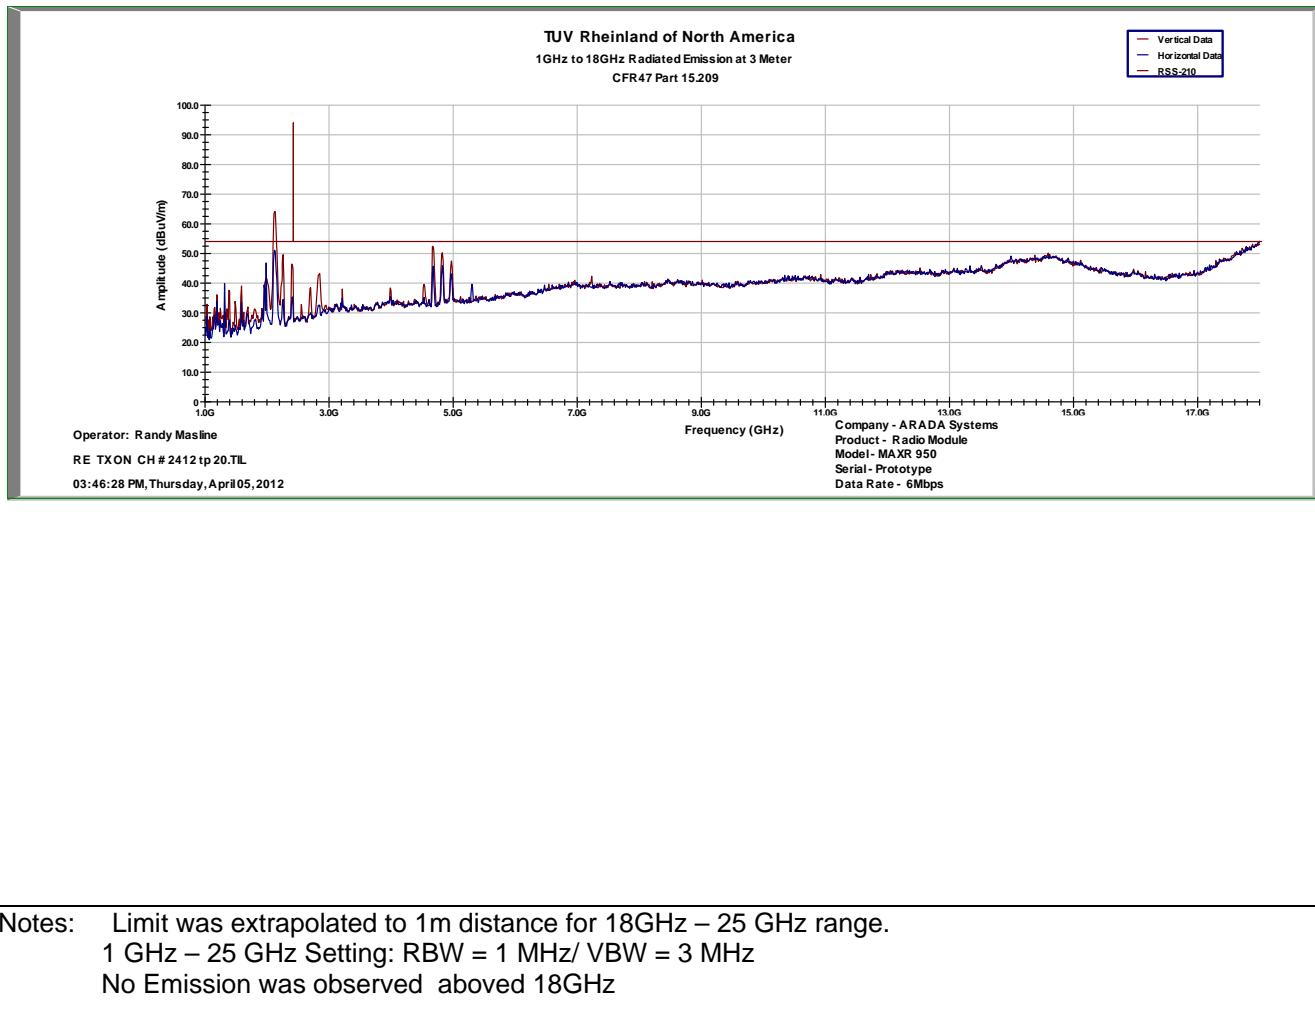

SOP 1 Radiated Emissions

Page 3 of 6

EUT Name	Highpower USB Wifi Module	Date	April 05, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 39%rh
EUT Serial	Proto type	Temp / Hum out	N/A
EUT Config.	EUT Verticle	Line AC / Freq	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m / EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Suresh Kondapalli

Emission	FIM	FIM	E-Field	Spec	Spec	Table	ANT	ANT	Type
Freq	Pk	Ave	Ave	Limit	Margin	Pos	Pos	Pola	
MHz	dBuV	dBuV	dBuV	dBuV	dB	deg	cm		

Transmitted Data at 2437 MHz

2186.02	55.7	30.20	30.20	54	-23.80	110	100	H	Spurious
4930.55	54.22	34.90	34.90	54	-19.10	154	121	H	Spurious
4681.42	43.57	36.47	36.47	54	-17.53	54	105	V	Harmonic
4874.02	54.7	48.90	48.90	54	-5.10	282	113	V	Spurious
7382.07	50.79	38.91	38.91	54	-15.09	315	174	V	Harmonic
9844.01	46.73	33.88	33.88	54	-20.12	226	106	V	Harmonic

Spec Margin = E-Field Avg - Limit, E-Field Avg = FIM Avg+ Total CF \pm Uncertainty

Total CF= Amp Gain + Cable Loss + ANT Factor Total CF= Amp Gain + Cable Loss + ANT Factor

Combined Standard Uncertainty $U_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence


Notes: Worst case was observed on Y-axis. No duty cycle reduction was applied. Low, mid and high channels were evaluated for 30 MHz to 26 GHz, only worst case results are reported here.

SOP 1 Radiated Emissions

Page 5 of 6

EUT Name	Highpower USB Wifi Module	Date	April 05, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 39%rh
EUT Serial	Prototype	Temp / Hum out	N/A
EUT Config.	EUT Vertical	Line AC	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Suresh Kondapalli

Above 1 GHz Plots for Transmit Mode at 2437 MHz, 802.11g 6Mbit/s

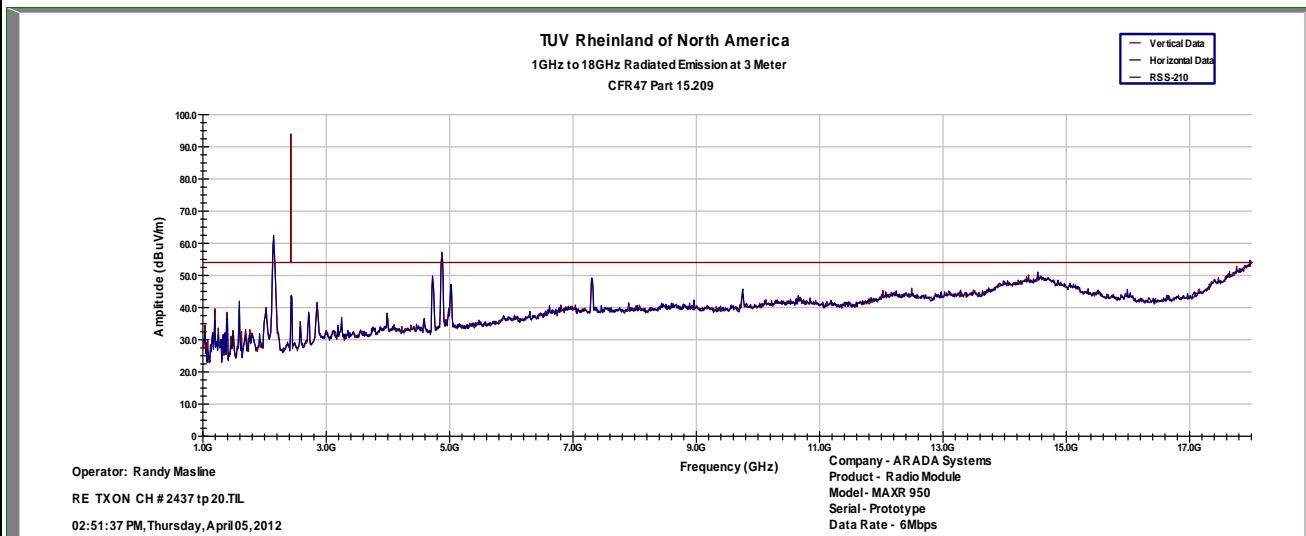

Notes: Limit was extrapolated to 1m distance for 18GHz – 25 GHz range.

1 GHz – 25 GHz Setting: RBW = 1 MHz/ VBW = 3 MHz

No emission was observed above 18GHz

SOP 1 Radiated Emissions

Page 5 of 6

EUT Name	Highpower USB Wifi Module	Date	April 06, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 39%rh
EUT Serial	Prototype	Temp / Hum out	N/A
EUT Config.	EUT Vertical	Line AC / Freq	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m / EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Suresh Kondapalli

Emission	FIM	FIM	E-Field	Spec	Spec	Table	ANT	ANT	Type
Freq	Pk	Ave	Ave	Limit	Margin	Pos	Pos	Pola	

Transmitted Data at 2462 MHz

2129.54	64.07	50.33	50.33	54	-3.67	330	100	V	Spurious
2260.52	48.66	38.38	38.38	54	-15.62	336	110	V	Spurious
2186.02	55.70	30.20	30.20	54	-23.80	120	120	V	Spurious
4930.55	54.22	34.90	34.90	54	-19.10	188	110	V	Harmonic
7382.07	50.79	38.91	38.91	54	-15.09	154	100	V	Harmonic
9844.01	46.73	33.88	33.88	54	-20.12	94	198	V	Harmonic

Spec Margin = E-Field Avg - Limit, E-Field Avg = FIM Avg+ Total CF \pm Uncertainty

Total CF= Amp Gain + Cable Loss + ANT Factor Total CF= Amp Gain + Cable Loss + ANT Factor

Combined Standard Uncertainty $U_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence


Notes: Worst case was observed on Y-axis, 6 Mbps. No duty cycle reduction was applied. Low, mid and high channels were evaluated for 30 MHz to 26MHz, only worst case results are reported here.

SOP 1 Radiated Emissions

Page 6 of 6

EUT Name	Highpower USB Wifi Module	Date	April 25, 2012
EUT Model	MaxR 950	Temp / Hum in	23°C / 40%rh
EUT Serial	Prototype	Temp / Humout	N/A
EUT Config.	EUT Antennas Verticle	Line AC	5 Vdc
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Randy Masline

Above 1 GHz Plots for Transmit Mode at 2462 MHz, 802.11g 6 Mbit/s

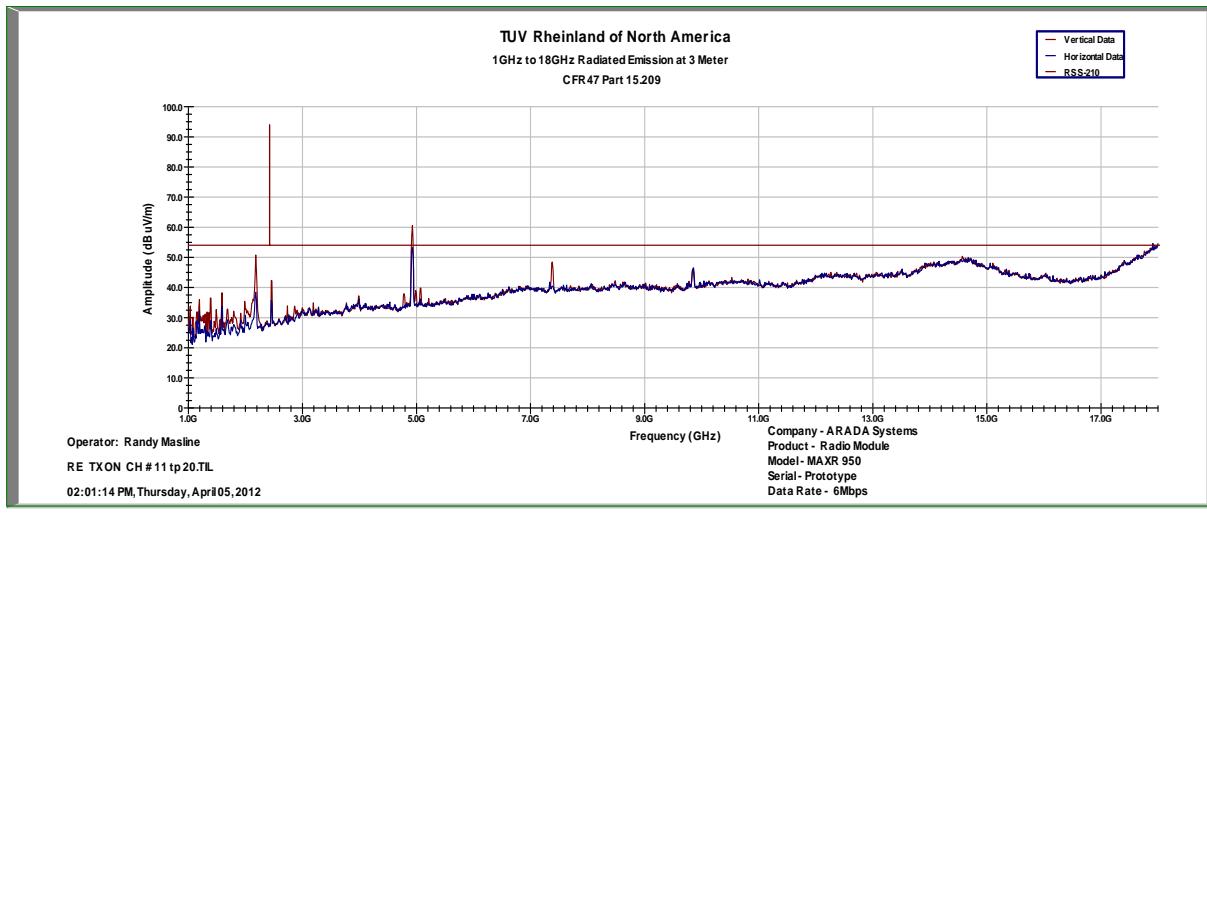

Notes: Limit was extrapolated to 1m distance for 18GHz – 26 GHz range. All emissions were atleast 20 dB below limit for the frequency range 18 to 26 GHz; 1 GHz – 26 GHz Setting: RBW = 1 MHz/ VBW = 3 MHz.

4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

4.6 Receiver Spurious Emissions

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 15.109 and RSS GEN Sect 6.1.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

4.6.1.3 Deviations

None.

4.6.2 Receiver Spurious Emission Limit

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 15.109: 2009 and RSS GEN Sect 6.1 2010.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

4.6.3 Test Results

The final measurement data indicates the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and 1.5.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

4.6.3.1 Final Data

The data recorded in this section contains the final results under the worst-case conditions and without any modifications or special accessories implemented as the manufacturer intends.

SOP 1 Radiated Emissions

Page 1 of 3

EUT Name	Highpower USB Wifi Module		Date	March 26, 2012						
EUT Model	MaxR 950		Temp / Hum in	23°C / 39%rh						
EUT Serial	Prototype		Temp / Hum out	N/A						
EUT Config.	RX at Ch6,		Line AC / Freq	5 Vdc						
Standard	CFR47 Part 15 Subpart C		RBW / VBW	1 MHz/ 3 MHz						
Dist/Ant Used	3m / EMCO3115 / 1m - RA42-K-F-4B-C		Performed by	Suresh Kondapalli						
Emission Freq	FIM Pk	FIM QP/Ave	Total CF	E-Field Ave	Spec Limit	Spec Margin	Table Pos	ANT Pos	ANT Pola	comment
97.29	40.18	39.75	-22.68	17.07	40	-22.93	90	296	H	
117.84	38.76	34.73	-18.13	16.60	40	-23.40	76	291	H	
798.37	37.14	33.65	-8.42	25.23	47	-21.77	305	171	H	
270.31	45.19	37.97	-17.39	20.58	47	-26.42	215	119	V	
599.98	45.89	45.59	-12.33	33.26	47	-13.74	140	111	V	
798.50	43.68	40.76	-8.92	31.84	47	-15.16	13	156	V	
Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF \pm Uncertainty										
Total CF= Amp Gain + Cable Loss + ANT Factor										
Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence										
Notes: Worst case was observed on Y-axis.										
Notes: Tested on the Y-Axis at Ch 6. 30 MHz – 1 GHz: RBW=120 kHz, VBW=300 kHz 1 GHz – 25 GHz: RBW=1 MHz, VBW=3 MHz										

SOP 1 Radiated Emissions


Page 2 of 3

EUT Name	Highpower USB Wifi Module	Date	April 09, 2012
EUT Model	MaxR 950	Temp / Hum in	22°C / 40%rh
EUT Serial	Prototype	Temp / Hum out	N/A
EUT Config.	Y-Axis, 802.11g, RX at Ch6	Line AC / Freq	120 Vac 60 Hz
Standard	CFR47 Part 15.109,	RBW / VBW	See Note
Dist/Ant Used	3m / JB3 & EMCO3115	Performed by	Suresh Kondapalli

Company - ARADA Systems
Model # - MAXR 950
Mode - Receive Mode
Data Rate -

TUV Rheinland of North America
Measured at 3 meter distance
Horizontal

Horizontal Scale
FCC_B

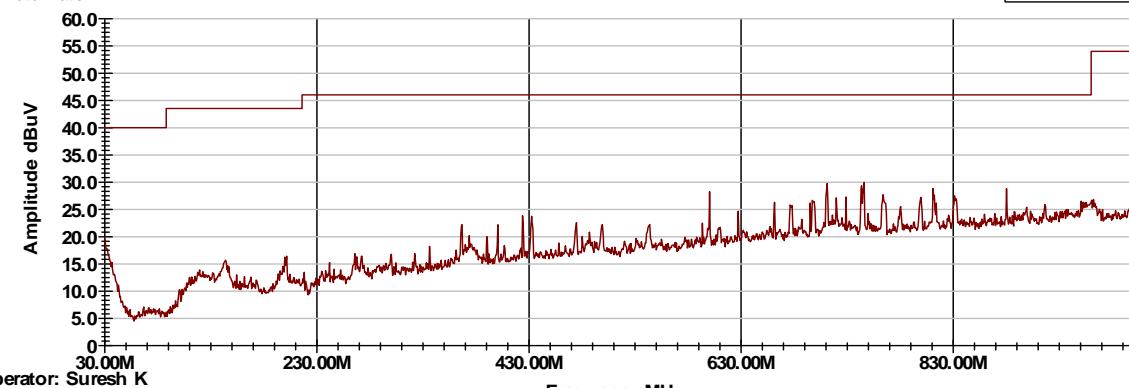


Operator: Suresh K
RE 30 to 1000MHz Receive mode.TIL
12:20:29 PM, Monday, April 09, 2012

Company - ARADA Systems
Model # - MAXR 950
Mode - Receive Mode
Data Rate -

TUV Rheinland of North America
Measured at 3 meter distance
Vertical

Vertical Scan
FCC_B

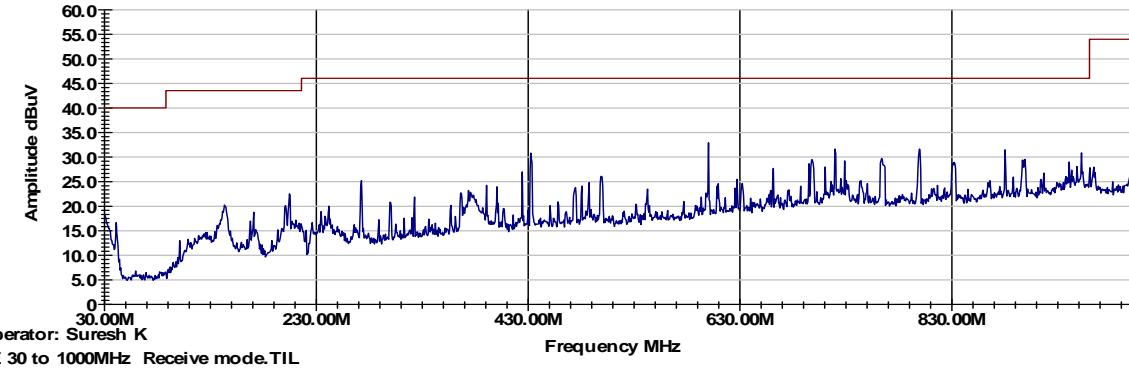

Operator: Suresh K
RE 30 to 1000MHz Receive mode.TIL
12:20:29 PM, Monday, April 09, 2012


Notes : None

SOP 1 Radiated Emissions

Page 3 of 3

EUT Name	Highpower USB Wifi Module	Date	April 8, 2012
EUT Model	MaxR 950	Temp / Hum in	22°C / 40%rh
EUT Serial	Prototype	Temp / Hum out	N/A
EUT Config.	Y-Axis, 802.11g, RX at Ch6	Line AC	5 Vdc
Standard	CFR47 Part 15.109	RBW / VBW	120 kHz / 300 kHz
Dist/Ant Used	3m / JB3	Performed by	Suresh Kondapali

Above 1 GHz Plot for Receive Mode

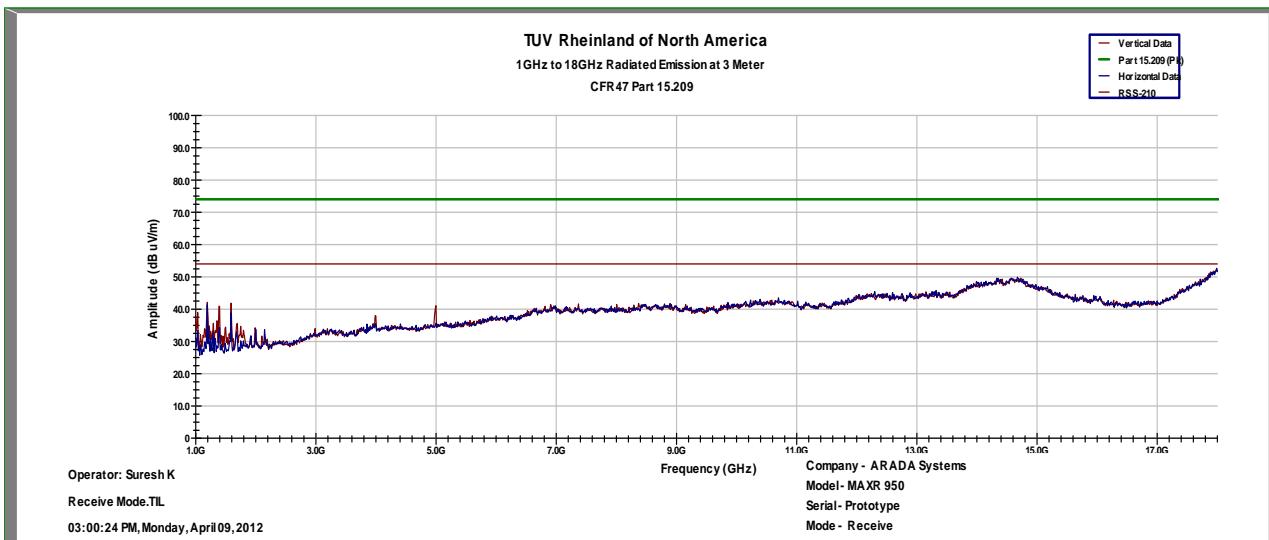

Notes: All emission above 18GHz are at least 20 dB below the limit

Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4-2009. These test methods are listed under the laboratory's NVLAP Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2009 and RSS 210: 2010.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is either performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.

4.7.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

AC Conducted Emissions – Test Results

This test was not performed as per Arada systems EUT draws 5 VDC power through USB from host system.

4.7.3 Test Setup Photos

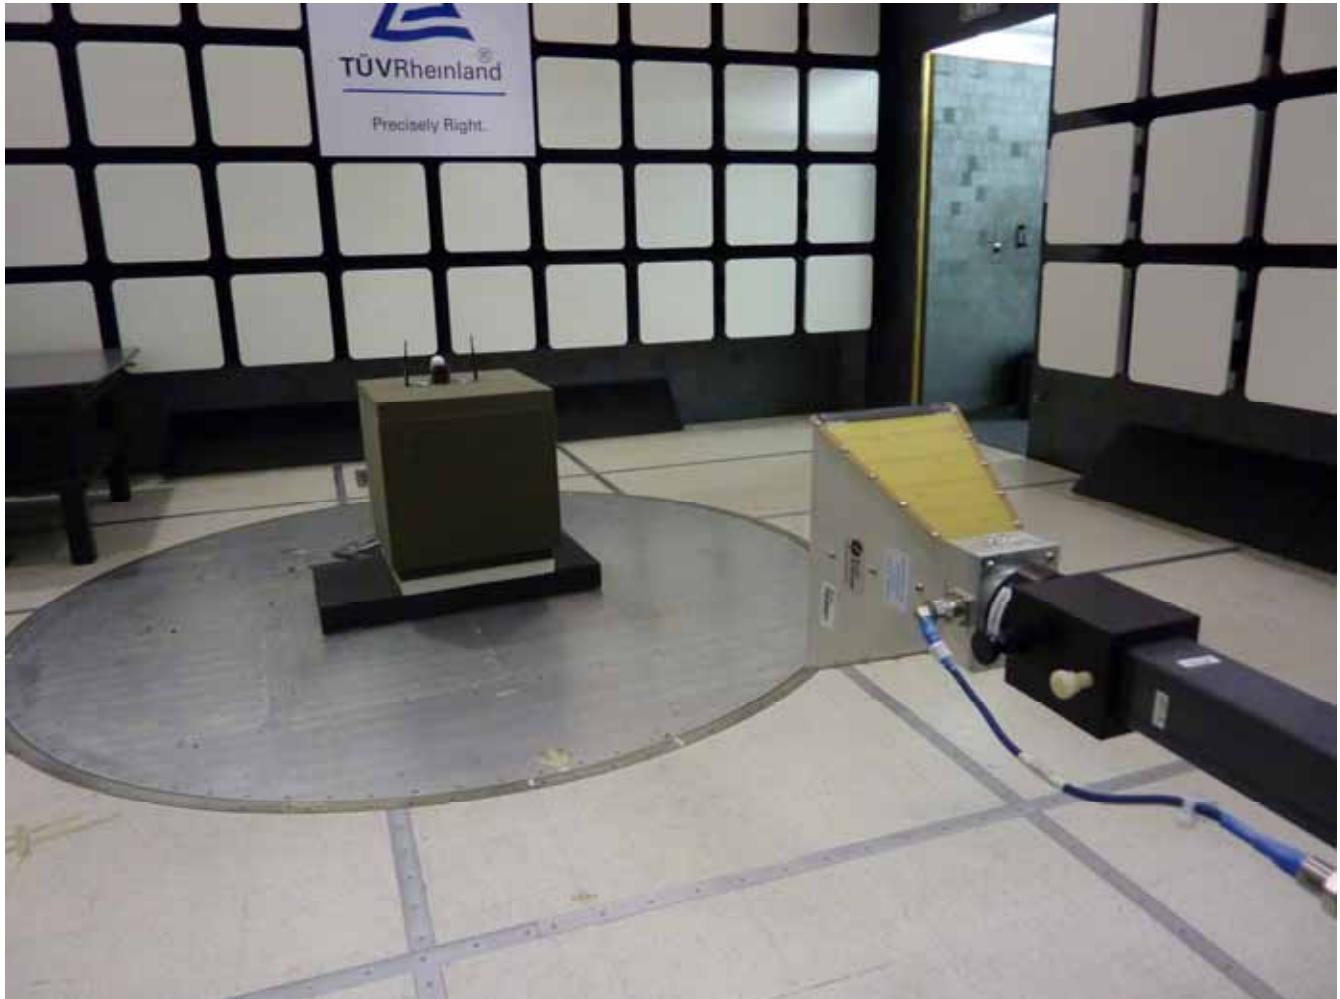


Figure 43: Radiated Spurious Emissions 1 - 18 GHz

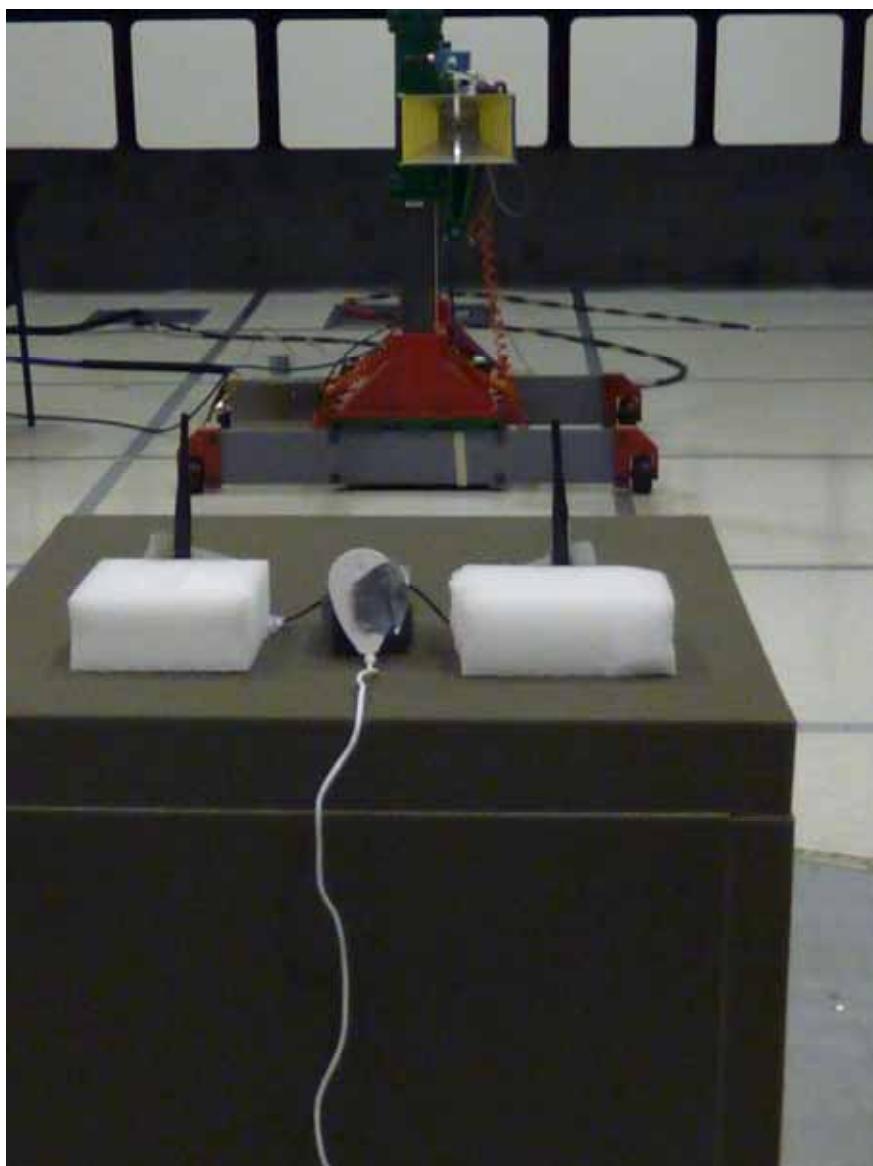


Figure 44: Radiated Spurious Emissions 1 - 18 GHz



Figure 45: Radiated Spurious Emissions 18 - 26 GHz

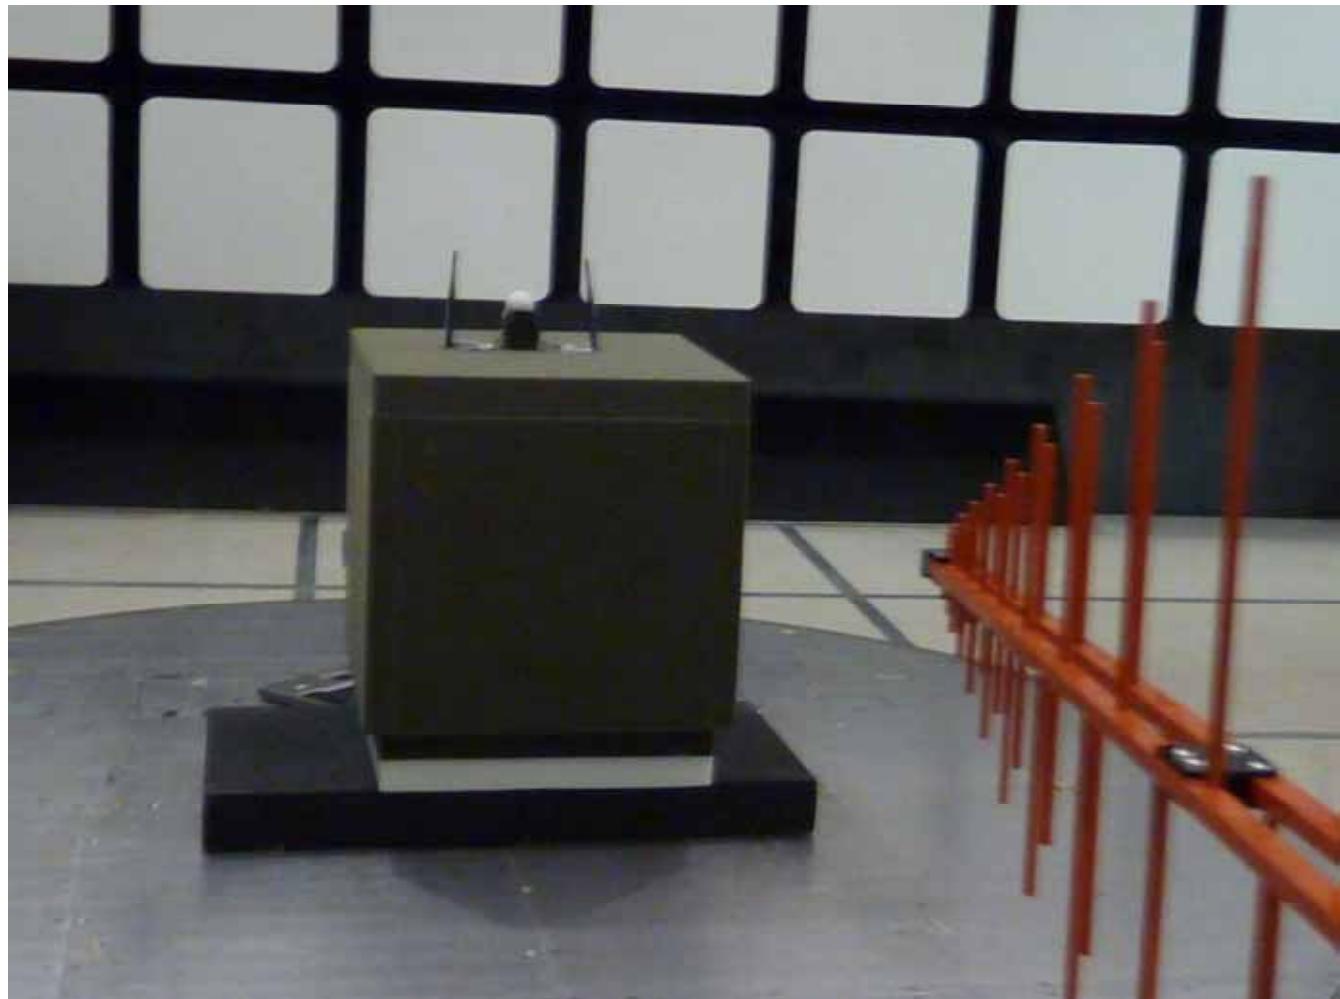


Figure 46: Radiated Spurious Emissions 30 - 1000 MHz

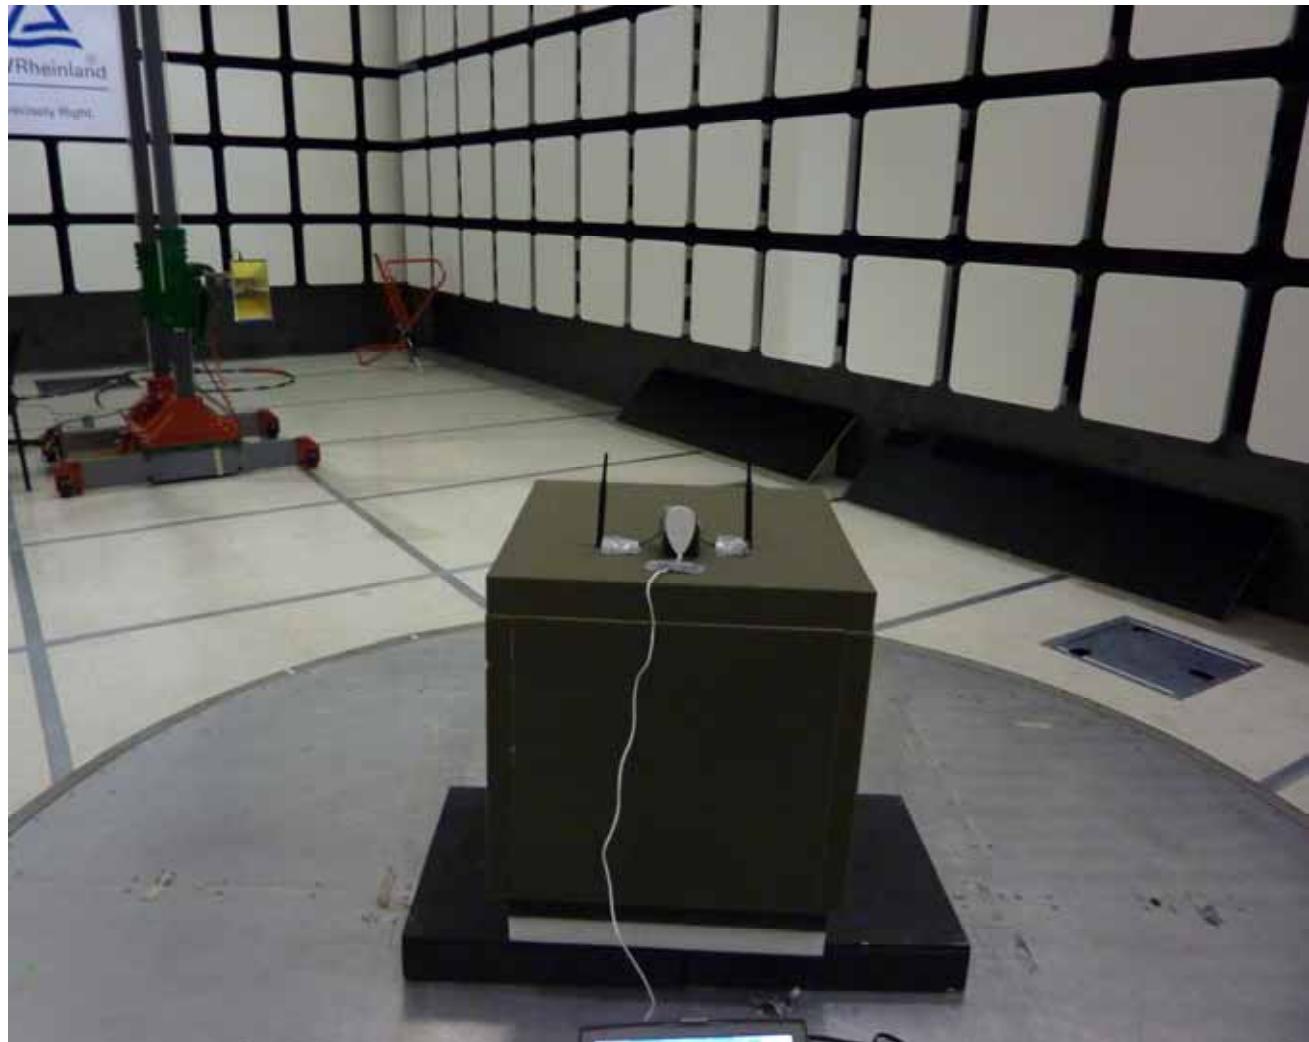


Figure 47: Radiated Spurious Emissions 30 - 1000 MHz

5 Test Equipment Use List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Bilog Antenna	Sunol Sciences	JB3	A061907	5/15/2012	5/15/2014
Horn Antenna	Sunol Sciences	DRH-118	A040806	9/29/2010	9/29/2012
Antenna (18-26 GHz)	CMT	RA42-K-F-4B-C	020131-004	1/17/2012	1/17/2013
EMI Receiver	Hewlett Packard	8546A	3807A00445	1/17/2012	1/17/2013
Preselector	Hewlett Packard	85460A	3704A00407	1/17/2012	1/17/2013
Amplifier	Hewlett Packard	8447D	2944A07996	1/16/2012	1/16/2013
Spectrum Analyzer	Rhode & Schwarz	ESIB	832427/002	1/17/2012	1/17/2013
Amplifier	Rhode & Schwarz	TS-PR18	3545.7008.03	9/29/2010	9/29/2012
Amplifier	Rhode & Schwarz	TS-PR26	100011	1/16/2012	1/16/2013
Signal Generator	Anritsu	MG3694A	42803	1/17/2012	1/17/2013
Notch Filter	Micro-Tronics	BRM50702	37	1/17/2012	1/17/2013
Notch Filter	Micro-Tronics	BRC50705	9	1/17/2012	1/17/2013
High Pass Filter (3.5 GHz)	Hewlett Packard	84300-80038	820004	1/17/2012	1/17/2013
High Pass Filter (8.5 GHz)	Micro-Tronics	HPM50107	4	1/17/2012	1/17/2013
Digital Multimeter	Fluke	177	92780314	1/18/2012	1/18/2013
LISN	Com-Paq	LI-215	24548	1/19/2012	1/19/2013
Signal Generator	Anritsu	MG3694A	42803	1/17/2012	1/17/2013
Spectrum Analyzer	Agilent	E4407B	SG43330468	10/05/2011	10/05/2012

* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

6 EMC Test Plan

6.1 *Introduction*

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 *Customer*

Table 6: Customer Information

Company Name	Arada Systems, Inc
Address	4633 Old Ironsides Drive, Suite 415
City, State, Zip	Santa Clara, CA 95054
Country	USA
Phone	408-773-9298
Fax	408-716-3238

Table 7: Technical Contact Information

Name	Praven Singh
E-mail	psingh@aradasystems.com
Phone	408-773-9298
Fax	408-716-3238

6.3 Equipment Under Test (EUT)

Table 8: EUT Specifications

EUT Specification	
Dimensions	72mm x 42mm x 7mm
AC Adapter (For charging only)	Input Voltage: 5 Vdc Input Current: 200 mA
Environment	Limited Module
Operating Temperature Range:	-20 to +70 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Hardware Version	None
Part Number	None
RF Software Version	None
Radio Module 802.11-radio module	
Operating Mode	802.11 g and HT20 Co-located with part 90 transmitter operating 4940 - 4990 MHz Band.
Transmitter Frequency Band	2.400 - 2.4835 GHz and 4.940 -4.990GHz this report covers 2.4 - 2.4835GHz band only
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	External 2.1dBi
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: CCK,
Data Rate	802.11g/HT20: 6, 6.5, to 24 , 54 & 65 Mbps
TX/RX Chain (s)	1
Directional Gain Type	<input checked="" type="checkbox"/> Uncorrelated <input checked="" type="checkbox"/> No Beam-Forming <input type="checkbox"/> Other describe:
Type of Equipment	<input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other Limited modular to specific Host System Fixed/ mobile

Table 9: EUT Channel Power Specifications

No.	Frequency (MHz)	Power setting	802.11g Average power measured with power meter	802.11HT20 Average power measured with power meter
1	2412	TP20	20.90	20.50
2	2417	TP22	22.50	22.50
3	2422	TP23	23.30	23.60
4	2427	TP23	23.40	23.50
5	2432	TP23	23.50	23.60
6	2437	TP23	23.86	23.60
7	2442	TP23	23.50	23.50
8	2447	TP23	23.60	23.40
9	2452	TP23	23.40	23.40
10	2457	TP22	23.86	22.70
11	2462	TP20	20.80	20.70

Table 10: Interface Specifications:

USB to the host System

Table 11: Supported Equipment : None

Table 12: Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
Highpower USB Wifi Module	Prototype	External Antenna	TX Emission, RX Emission,
		SMA Connector (This was setup by Arada Systems for test purposes only)	RF Power Output, Out of Band Emission, Peak Power Spectral Density, Occupied Bandwidth

Table 13: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (Y-Axis)
Highpower USB Wifi Module	Internal	* Transmit * Receive	
Antennas are mounted vertically in host device			

Table 14: Final Test Mode for 2400 - 2483.5 MHz Band

Test	802.11 g & HT20
Occupied Bandwidth	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Output Power	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Peak Power Spectral Density	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Out-of-Band (-20 dBr)	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Band-Edge (Radiated)	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Transmitted Spurious Emission	2412, 2437, 2462 MHz @ 6 & 6.5 Mbps
Received Spurious Emission	2437 MHz
AC Conducted Emission	Test Not performed

6.4 ***Test Specifications***

Testing requirements

Table 15: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2011	All
RSS 210 Issue 8, 2010	All

END OF REPORT