Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

i-Mobile Technology Corporation

FCC ID: XZOIO-10C

Product Description: Tablet PC

Model No.: IO-10C

Supplementary Model: IC-10

Brand Name: @MOBILE

Prepared for: i-Mobile Technology Corporation

3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei

City 114, Taiwan

Prepared by: Bontek Compliance Testing Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East

Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

Report No.: BCT12FR189E-3

Issue Date: April 5, 2014

Test Date: June 6,2013~April 5, 2014

Tested by:

Reviewed by:

Owen Yang

Approved by:

Kendy Wang

TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
	1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
	1.3 TEST FACILITY	
2.	SYSTEM TEST CONFIGURATION	5
	2.1 EUT CONFIGURATION	
	2.2 EUT Exercise	
	2.3 GENERAL TEST PROCEDURES	5
	2.4 Measurement Uncertainty	
	2.5Test Equipment List and Details	6
3.	SUMMARY OF TEST RESULTS	7
	TEST OF AC POWER LINE CONDUCTED EMISSION	0
	4.1 APPLICABLE STANDARD4.2 TEST SETUP DIAGRAM	
	4.3 TEST SETUP DIAGRAM	
-	TEST OF RADIATED EMISSION	
	5.1 APPLICABLE STANDARD	11
	5.2 LIMIT OF RADIATED DISTURBANCES	
	5.3 EUT SETUP	12
	5.5 Test Procedure	
	5.6 Test Result	
6	FREQUENCY TOLERANCE	17
	6.1 APPLICABLE STANDARD	
	6.2 EUT SETUP	
	6.3 TEST EQUIPMENT LIST AND DETAILS	17
	6.4 Test Procedure	
	6.5 TEST RESULT	
7.	ANTENNA REQUIREMENT	19
	7.1 STANDARD APPLICABLE	
	7.2 ANTENNA CONNECTED CONSTRUCTION	

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	i-Mobile Technology Corporation		
Address of Applicant:	3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei City 114, Taiwan		
Manufacturer:	i-Mobile Technology Corporation		
Address of Manufacturer:	3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei City 114, Taiwan		

General Description of E.U.T

Items	Description
EUT Description:	Tablet PC
Model No.:	IO-10C
Supplementary Model:	IC-10
Trade Name:	@MOBILE
Transmit Frequency:	13.56MHz
Number of Channels:	1
Duty cycle:	100%
Antenna Type:	Built-in Antenna
Power Supply:	Input: 16VDC 4.0A from AC/DC adapter
Adapter Information:	Model:STD-16040
	Input: AC 100-240V 47-63Hz 1.4A MAX
	Output: 16VDC 4.0A

Remark: * The test data gathered are from the production sample provided by the manufacturer.

* Supplementary models have the same circuit, but with different appearance

1.2 Test Standards

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section15.207, 15.209 and 15.225 rules. Test was carried out according to the above mentioned FCC rules.

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. at Floor 1-A,Baisha Technology Park,No.3011,Shahexi Road, Nanshan District, Shenzhen, China 518055.

The test facility is recognized, certified, or accredited by the following organizations:

FCC - Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

Report No.: BCT13FR189E-3 Page 4 of 19 FCC ID: XZOIO-10C

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

Report No.: BCT13FR189E-3 Page 5 of 19 FCC ID: XZOIO-10C

2.5Test Equipment List and Details

Test equipments list of Shenzhen CTL Testing Technology Co., Ltd

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2013-4-25	2014-4-24
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2013-11-1	2014-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2013-4-25	2014-4-24
4	BCT-EMC018	TRILOG Broadband Test- Antenna	SCHWARZBECK	VULB9163	9163-324	2013-4-25	2014-4-24
5	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2013-11-1	2014-10-31
6	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2013-4-25	2014-4-24
7	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2013-4-25	2014-4-24
8	BCT-EMC032	10dB attenuator	ELECTRO- METRICS	EM-7600	836	2013-4-25	2014-4-24
9	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2013-11-1	2014-10-31
10	BCT-EMC037	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2013-4-25	2014-4-24
11	BCT-EMC039	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2013-4-25	2014-4-24
12	BCT-EMC038	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2013-4-5	2014-4-4

Report No.: BCT13FR189E-3 Page 6 of 19 FCC ID: XZOIO-10C

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.225(a)(b)(c)(d)	Radiated Emission (9kHz ~ 30MHz)	Pass
FCC §15.225(d), 15.209	Radiated Emission (30MHz ~ 1GHz)	Pass
FCC §15.225(e)	Frequency stability	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Fraguency Pango (MHT)	Limits (dBuV)				
Frequency Range (MHz)	Quasi-Peak	Average			
0.150~0.500	66∼56	56∼46			
0.500~5.000	56	46			
5.000~30.00	60	50			

4.2 Test Setup Diagram

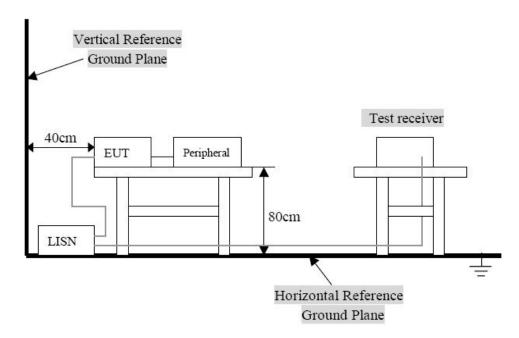

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Test Result

Temperature ($^{\circ}$) : 23~25	EUT: Tablet PC
Humidity (%RH): 45~58	M/N: IO-10C
Barometric Pressure (mbar): 950~1000	Operation Condition: Normal Operation

Report No.: BCT13FR189E-3 Page 8 of 19 FCC ID: XZOIO-10C

Conducted Emission Test Data


EUT: Tablet PC Operating Condition: Test Site: Tx mode Shielded Room

Andy

AC/DC adapter (AC 120V/60Hz) Live Line

Operator:
Test Specification:
Comment:

SCAN TABLE: "Voltage(150K-30M)FIN" Short Description: 150K-30M Voltage

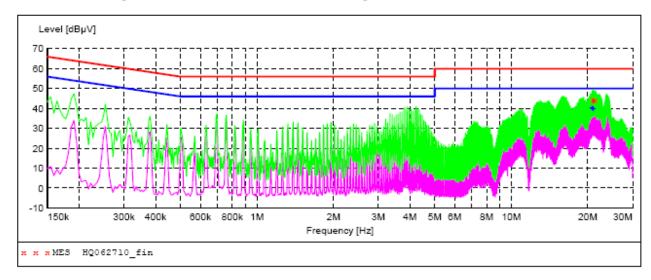

MEASUREMENT RESULT: "HQ062710 fin"

6/	27/2013 15:	03						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dBuV		dBuV	dB			
	THIZ	αυμν	uь	ασμν	uБ			
	20.908500	45.10	10.7	60	14.9	QP	L1	GND
	20.976000	43.70	10.7	60	16.3	OP	L1	GND
	21.412500	44.40	10.7	60	15.6	OP	T.1	GND
	21.412300	11.10	10.7	0.0	15.0	Q.E	111	GMD

MEASUREMENT RESULT: "HQ062710 fin2"

6,	/27/2013 15:	03						
	Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
	20.719500	40.40	10.7	50	9.6	AV	L1	GND
	20.908500	40.00	10.7	50	10.0	AV	L1	GND
	21.034500	40.00	10.7	50	10.0	AV	L1	GND


Conducted Emission Test Data

EUT: Tablet PC Operating Condition: Tx mode Test Site: Shielded Room

Andy

Operator:
Test Specification:
Comment: AC/DC adapter (AC 120V/60Hz) Neutral Line

SCAN TABLE: "Voltage (150K-30M) FIN"
Short Description: 150K-30M Voltage

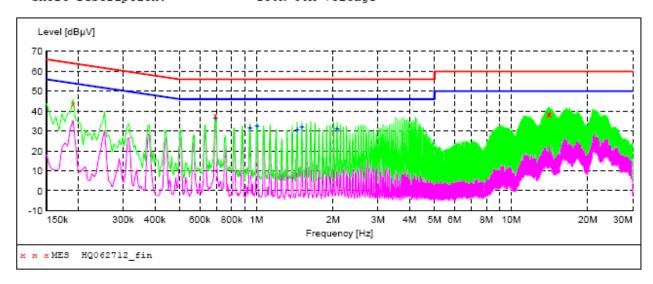

MEASUREMENT RESULT: "HQ062712 fin"

6/	27/2013 15:	:18						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PΕ
	MHz	dBuV	dB	dBuV	dB			
	0.190500	44.00	11.7	64	20.0	OP	N	GND
	0.690000	37.90	10.4	56	18.1	OP	N	GND
	14.014500	38.30	10.7	60	21.7	_	N	GND
	14.077500	38.80	10.7	60	21.2		N	GND
	14.140500	38.40	10.8	60	21.6	-	N	GND
	14.140200	30.40	10.0	60	21.0	QF	IA	GND

MEASUREMENT RESULT: "HQ062712 fin2"

6/27/2013 Frequen M		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.6900	00 36.60	10.4	46	9.4	AV	N	GND
0.9420	00 31.80	10.4	46	14.2	AV	N	GND
1.0050	00 32.50	10.5	46	13.5	AV	N	GND
1.4460	00 30.60	10.4	46	15.4	AV	N	GND
1.5090	00 32.20	10.4	46	13.8	AV	N	GND
2.0715	00 31.20	10.4	46	14.8	AV	N	GND

5. Test of Radiated Emission

5.1 Applicable Standard

Section 15.225 (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Section 15.225 (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Section 15.225 (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Section 15.225 (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

5.2 Limit of Radiated Disturbances

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength @30m (uV/m)	Field strength @30m (dBuV/m)	Field strength @3m (dBuV/m)
Below 13.110	30	29.5	69.5
13.110 ~13.410	106	40.5	80.5
13.410~13.553	334	50.5	90.5
13.553~13.567	15,848	84	124
13.567~13.710	334	50.5	90.5
13.710~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

Note

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dBuV/m = 20*log(uV/m)
- (3) Distance factor = 40dB/decade(15.31(f))

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
0.009 -0.490	300	2400/F(KHz)
0.490 -1.705	30	24000/F(KHz)
1.705 -30	30	30
30 -88	3	40.0
88 -216	3	43.5
216 -960	3	46.0
Above 960	3	54.0

Note:

(1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

5.3 EUT Setup

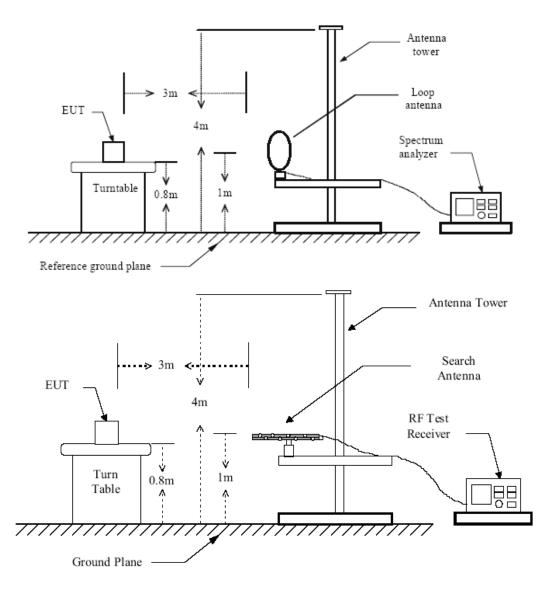


Figure 1: Frequencies measured below 1 GHz configuration

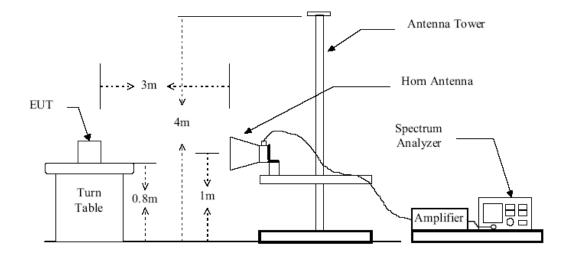


Figure 2: Frequencies measured above 1 GHz configuration

5.4 Test Equipment List and Details

See section 2.5.

5.5 Test Procedure

- 1. Configure the EUT according to ANSI C63.4-2003
- 2. The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3. Receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable. When the frequency spectrum measured started from 9 kHz to 30 MHz, a loop antenna is used. When the frequency spectrum measured started from 30 MHz to 1000 MHz or above 1000 MHz, a broadband receiving antenna or the horn antenna are used.
- 4. Power on the EUT and all the supporting units.
- 5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 6. The height of the receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 8. Set the test-receiver system to Peak, CISPR quasi-peak or Average detect function with specified bandwidth according to different frequency spectrum measured under Maximum Hold Mode.

5.6 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC		
Humidity (%RH): 50~54	M/N: IO-10C		
Barometric Pressure (mbar): 950~1000	Operation Condition: Normal Operation		

India	cated	Transfer factor	Table	Test A	ntenna	Convert	Limit	Margin dB
Frequency MHz	Ampl./ dBuV	dB	Angle Degree	Height Meter	Polar H/V	Level dBuV/m	dBuV/m at 3m	
13.56	82.45	18.75	125	1.0	V	15.63	124	104.37
13.553		18.75	125	1.0	V		70	
13.557		18.75	125	1.0	V		70	

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Margin = Level-Limit
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value
2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. The test limit distance is 3m limit

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Normal operating Mode:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBµV)	(dB/M)	(dB)	(dBµV/M)	(dB μ V/M)	(dB)	PK/QP
7.68	24.78	8.15	1.03	33.96	67	-33.04	QP
16.33	21.94	9.04	1.19	32.17	49.5	-17.33	QP
21.17	22.45	9.13	1.08	32.66	49.5	-16.84	QP
26.34	21.8	8.22	1.66	31.68	49.5	-17.82	QP

Radiated Emission Test Data Below 1G:

EUT: **Tablet PC** IO-10C M/N:

Operating Condition: Normal Operation Test Site: 3m CHAMBER


Operator: Chen

Test Specification: AC 120V/60Hz

Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)" Short Description: Field Strength Start Detector Meas. IF Stop

Bandw. Frequency Frequency Time 30.0 MHz 1.0 GHz MaxPeak 100 kHz VULB9163 NEW Coupled

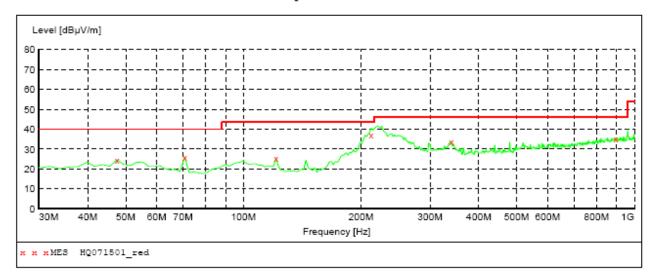

Transducer

MEASUREMENT RESULT: "HQ071501 red"

7/15/2013 17:	45							
Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.60	15.8	40.0	15.4	OP	100.0	0.00	HORIZONTAL
70.740000	26.00	12.4	40.0	14.0	ÕΡ	100.0	0.00	HORIZONTAL
121.180000	25.20	14.5	43.5	18.3	ÕΡ	100.0	0.00	HORIZONTAL
212.360000	39.50	15.1	43.5	4.0	ÕΡ	100.0	0.00	HORIZONTAL
340.400000	33.80	20.2	46.0	12.2	ÕP	100.0	0.00	HORIZONTAL
895.240000	35.00	29.1	46.0	11.0	ÕΡ	100.0	0.00	HORIZONTAL

Radiated Emission Test Data Below 1G:


EUT: Tablet PC IO-10C M/N:

Operating Condition: Normal Operation Test Site: 3m CHAMBER

Operator: Chen

Test Specification: AC 120V/60Hz Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength
Start Ston Detector Meas. IF Detector Meas. IF Start Transducer Stop Frequency Frequency Time Bandw. MaxPeak Coupled 100 kHz VULB9163 NEW 30.0 MHz 1.0 GHz

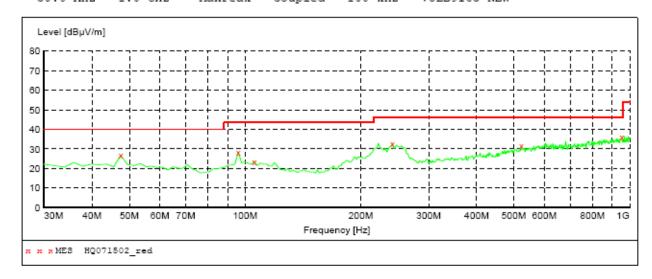

MEASUREMENT RESULT: "HQ071502 red"


7/15/2013 17: Frequency MHz		Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.80	15.8	40.0	13.2	-	100.0	0.00	VERTICAL
95.960000	28.40	17.2	43.5	15.1	QP	100.0	0.00	VERTICAL
105.660000	23.60	16.9	43.5	19.9	QP	100.0	0.00	VERTICAL
241.460000	32.90	17.0	46.0	13.1	QP	100.0	0.00	VERTICAL
522.760000	31.50	24.4	46.0	14.5	QP	100.0	0.00	VERTICAL
955.380000	36.10	29.6	46.0	9.9	QP	100.0	0.00	VERTICAL

6. Frequency Tolerance

6.1 Applicable Standard

Section 15.225(e): The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of –20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 EUT Setup

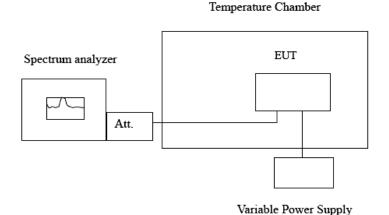

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

The frequency stability of the transmitter is measured by:

- (a) Temperature: The temperature is varied from -20 to $^{\circ}$ C +50 $^{\circ}$ C using an environmental chamber.
- (b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally input to the device or at the power supply terminals if cables are not normally supplied.

The frequency tolerance of the carrier shall be maintained within $\pm 0.01\%$ of the operating frequency.

6.5 Test Result

Temperature ($^{\circ}\mathrm{C}$) : 22~23	EUT: Tablet PC
Humidity (%RH): 50~54	M/N: IO-10C
Barometric Pressure (mbar): 950~1000	Operation Condition: Tx Mode

Report No.: BCT13FR189E-3 Page 17 of 19 FCC ID: XZOIO-10C

Voltage (%)	Power (VDC)	Temperature (℃)	Frequency (MHz)	Deviation (%)
100	120	+20°C(Ref)	13.559576	0.003126
100	120	-20	13.559688	0.002301
100	120	-10	13.559675	0.002397
100	120	0	13.559657	0.002529
100	120	10	13.559624	0.002772
100	120	25	13.559583	0.003075
100	120	30	13.559559	0.003252
100	120	40	13.559547	0.003341
100	120	50	13.559553	0.003297
85	102	20	13.559578	0.003112
115	138	20	13.559596	0.002979

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.

Report No.: BCT13FR189E-3 Page 19 of 19 FCC ID: XZOIO-10C