



Radio Test Report

FCC ID: XZZ-2700WNR

This report concerns (check one) : Original Grant Class I Change

Issued Date : Apr. 08, 2010

Project No. : 0909C206C

Equipment : SCT Wireless Mini WiFi
Wireless-N-Router

Model Name : SCT-2700WNR

Applicant : SCT Wireless

Address : 1894 US Hwy 50 Ease Building 4 Suite
281 Carson City Nevada 89701

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Test:

Nov. 13, 2009 ~ Nov. 24, 2009

Testing Engineer

: Rush Kao

(Rush Kao)

Technical Manager

: Jeff Yang

(Jeff Yang)

Authorized Signatory

: Andy Chiu

(Andy Chiu)

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.,

NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 MEASUREMENT INSTRUMENTS LIST	19
4.2.3 TEST PROCEDURE	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	21
4.2.8 TEST RESULTS - ABOVE 1000MHZ	23
4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS	71
5 . BANDWITH TEST	87
5.1 APPLIED PROCEDURES / LIMIT	87
5.1.1 MEASUREMENT INSTRUMENTS LIST	87
5.1.2 TEST PROCEDURE	87
5.1.3 DEVIATION FROM STANDARD	87
5.1.4 TEST SETUP	87
5.1.5 EUT OPERATION CONDITIONS	87
5.1.6 TEST RESULTS	88



Table of Contents	Page
6 . PEAK OUTPUT POWER TEST	96
6.1 APPLIED PROCEDURES / LIMIT	96
6.1.1 MEASUREMENT INSTRUMENTS LIST	96
6.1.2 TEST PROCEDURE	96
6.1.3 DEVIATION FROM STANDARD	96
6.1.4 TEST SETUP	96
6.1.5 EUT OPERATION CONDITIONS	96
6.1.6 TEST RESULTS	97
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	99
7.1 APPLIED PROCEDURES / LIMIT	99
7.1.1 MEASUREMENT INSTRUMENTS LIST	99
7.1.2 TEST PROCEDURE	99
7.1.3 DEVIATION FROM STANDARD	99
7.1.4 TEST SETUP	99
7.1.5 EUT OPERATION CONDITIONS	99
7.1.6 TEST RESULTS	100
8 . POWER SPECTRAL DENSITY TEST	108
8.1 APPLIED PROCEDURES / LIMIT	108
8.1.1 MEASUREMENT INSTRUMENTS LIST	108
8.1.2 TEST PROCEDURE	108
8.1.3 DEVIATION FROM STANDARD	108
8.1.4 TEST SETUP	108
8.1.5 EUT OPERATION CONDITIONS	108
8.1.6 TEST RESULTS	109
9 . RF EXPOSURE TEST	117
9.1 APPLIED PROCEDURES / LIMIT	117
9.1.1 MEASUREMENT INSTRUMENTS LIST	117
9.1.2 MPE CALCULATION METHOD	117
9.1.3 DEVIATION FROM STANDARD	118
9.1.4 TEST SETUP	118
9.1.5 EUT OPERATION CONDITIONS	118
9.1.6 TEST RESULTS	119
10 . EUT TEST PHOTO	121
11 . HISTORY	124



1. CERTIFICATION

Equipment: SCT Wireless Mini WiFi Wireless-N-Router

Brand Name: SCT Wireless

Model No.: SCT-2700WNR

Applicant: SCT Wireless

Date of Test: Nov. 13, 2009 ~ Nov. 24, 2009

Standards: FCC Part15, Subpart C / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-0909C206C) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2)This test report covers EUT radio function only. Its receive function testing is covered in another DOC test report: NEI-FCCE-1-0909C206C.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/CB08 (FCC R.N.: 95335)**
C01 - at the location of No.132-1, Lane 329, Sec. 2, Palian Road, Shijr City, Taipei, Taiwan.
CB08 - at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
C01	ANSI	150 KHz ~ 30MHz	1.94

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
CB08	ANSI	30MHz ~ 200MHz	V	3.22
		30MHz ~ 200MHz	H	3.35
		200MHz ~ 1,000MHz	V	3.24
		200MHz ~ 1,000MHz	H	3.11
		1000MHz ~ 1800MHz	V	4.05
		1000MHz ~ 1800MHz	H	3.97
		18000MHz ~ 40000MHz	V	4.04
		18000MHz ~ 40000MHz	H	4.01



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	SCT Wireless Mini WiFi Wireless-N-Router
Brand Name	SCT Wireless
Model Name	SCT-2700WNR
OEM Brand/Model No.	N/A
Model Difference	N/A
Product Description	The EUT is an SCT Wireless Mini WiFi Wireless-N-Router. Operation Frequency: 2412~2462MHz Modulation Type: 802.11b:CCK, DQPSK, DBPSK 802.11g:OFDM 802.11n:OFDM(1 TX & 1 RX) Bit Rate of Transmitter: 802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to +150 Mbps Number Of Channel: Please see Note 2. Antenna Designation: Please see Note 3. Antenna Gain(Peak): Please see Note 3. Output Power(Max): 802.11b: 19.94dBm (Max.) 802.11g: 23.93dBm (Max.) 802.11n(20MHz): 23.66dBm (Max.) 802.11n(40MHz): 23.70dBm (Max.)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Power Source	Battery supplied & DC Voltage supplied from AC/DC adapter.
Power Rating	Battery: DC 3.7V, 1800mAh, 6.7Wh AC/DC adapter: I/P: AC 100-240V~300mA, 50-60Hz, 21-28VA / O/P: DC 5V, 2A MAX.
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	Battery: Li-ion / SP-1880 AC/DC adapter: PSAA10R-050(ED)-R
EUT Modification(s)	N/A



Note:

1. CH 01 – CH 11 for 802.11b, 802.11g, 802.11n(20MHz)
CH 03 – CH 09 for 802.11n(40MHz)

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

2. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	3.48



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11
Mode 2	802.11g/CH01, CH06, CH11
Mode 3	802.11n/20M/CH01, CH06, CH11
Mode 4	802.11n/40M/CH03, CH06, CH09


For Conducted Test	
Final Test Mode	Description
Mode 1	802.11b/CH06

For Radiated Test (BETWEEN 30MHZ - 1000MHZ)	
Final Test Mode	Description
Mode 1	802.11b/CH06

For Radiated Test (Above 1000 MHz)	
Final Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11
Mode 2	802.11g/CH01, CH06, CH11
Mode 3	802.11n/20M/CH01, CH06, CH11
Mode 4	802.11n/40M/CH03, CH06, CH09



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED

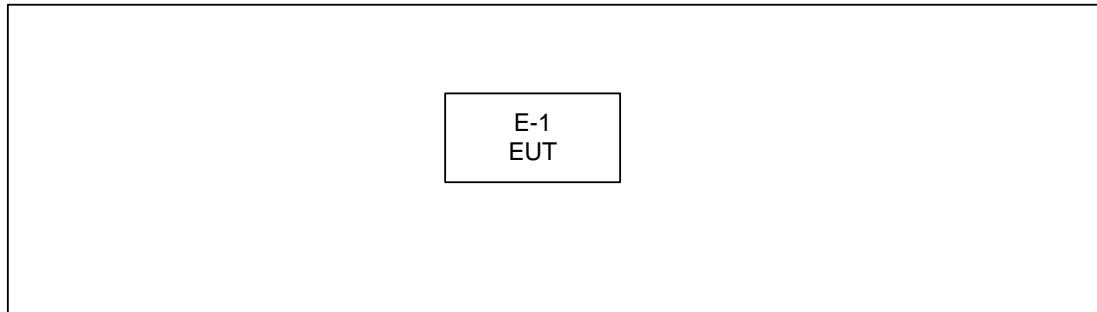



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	SCT Wireless Mini WiFi Wireless-N-Router	SCT Wireless	SCT-2700WNR	XZZ-2700WNR	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
	N/A	N/A	N/A	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00042991	Jan. 21, 2010
2	Test Cable	N/A	SR03_C_01&02	N/A	Aug. 19, 2010
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Dec. 27, 2010
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 17, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

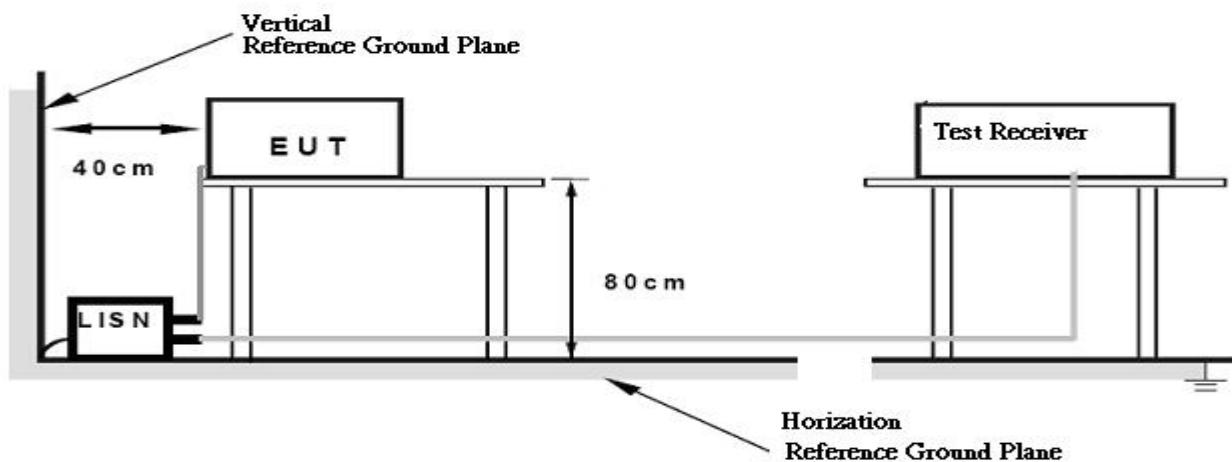



4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




4.1.7 TEST RESULTS

E.U.T :	SCT Wireless Mini WiFi Wireless-N-Router	Model Name :	SCT-2700WNR
Temperature :	23 °C	Relative Humidity :	50%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.17	Line	60.53	30.04	65.05	55.05	-4.52	(QP)
0.25	Line	59.66	44.03	61.89	51.89	-2.23	(QP)
0.31	Line	56.29	41.73	60.10	50.10	-3.81	(QP)
0.38	Line	55.54	33.63	58.18	48.18	-2.64	(QP)
0.52	Line	51.78	36.51	56.00	46.00	-4.22	(QP)
16.60	Line	56.85	45.22	60.00	50.00	-3.15	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz . Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz .
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform . In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured .
- (3) Measuring frequency range from 150KHz to 30MHz .

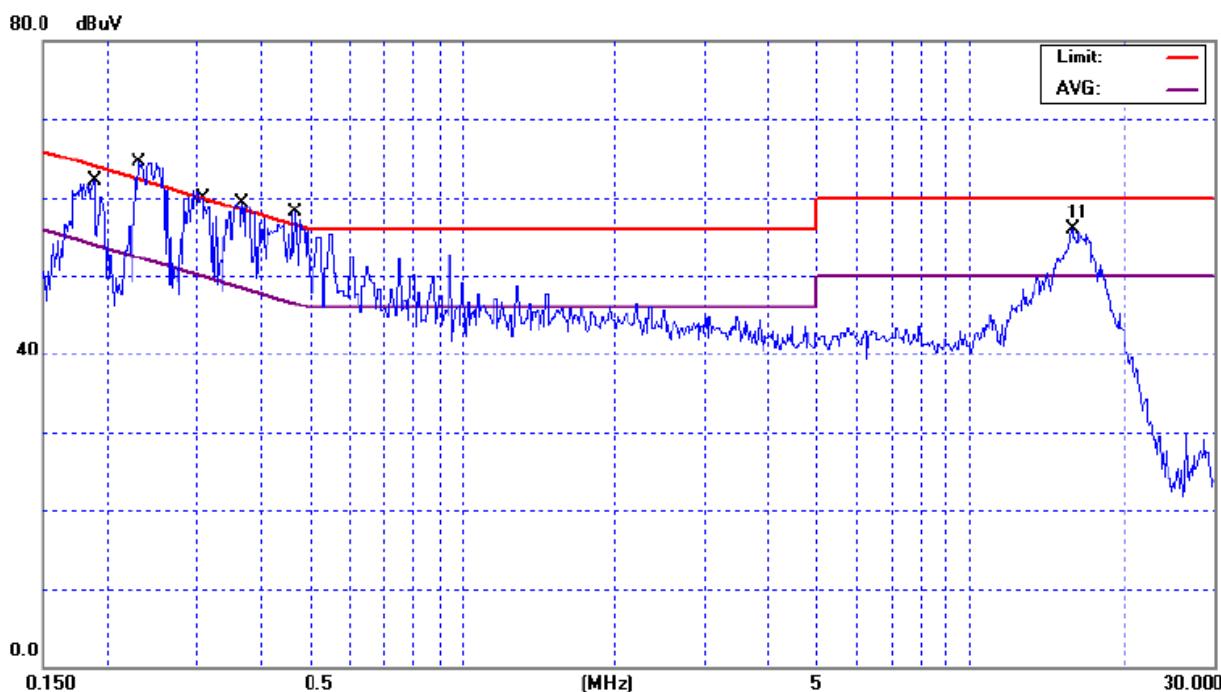




E.U.T :	SCT Wireless Mini WiFi Wireless-N-Router	Model Name :	SCT-2700WNR
Temperature :	23 °C	Relative Humidity :	50%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.18	Neutral	61.75	48.57	64.61	54.61	-2.86	(QP)
0.24	Neutral	59.64	42.46	62.11	52.11	-2.47	(QP)
0.38	Neutral	48.96	37.26	58.30	48.30	-9.34	(QP)
0.47	Neutral	54.32	34.25	56.50	46.50	-2.18	(QP)
0.82	Neutral	47.91	30.23	56.00	46.00	-8.09	(QP)
16.50	Neutral	57.12	45.44	60.00	50.00	-2.88	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

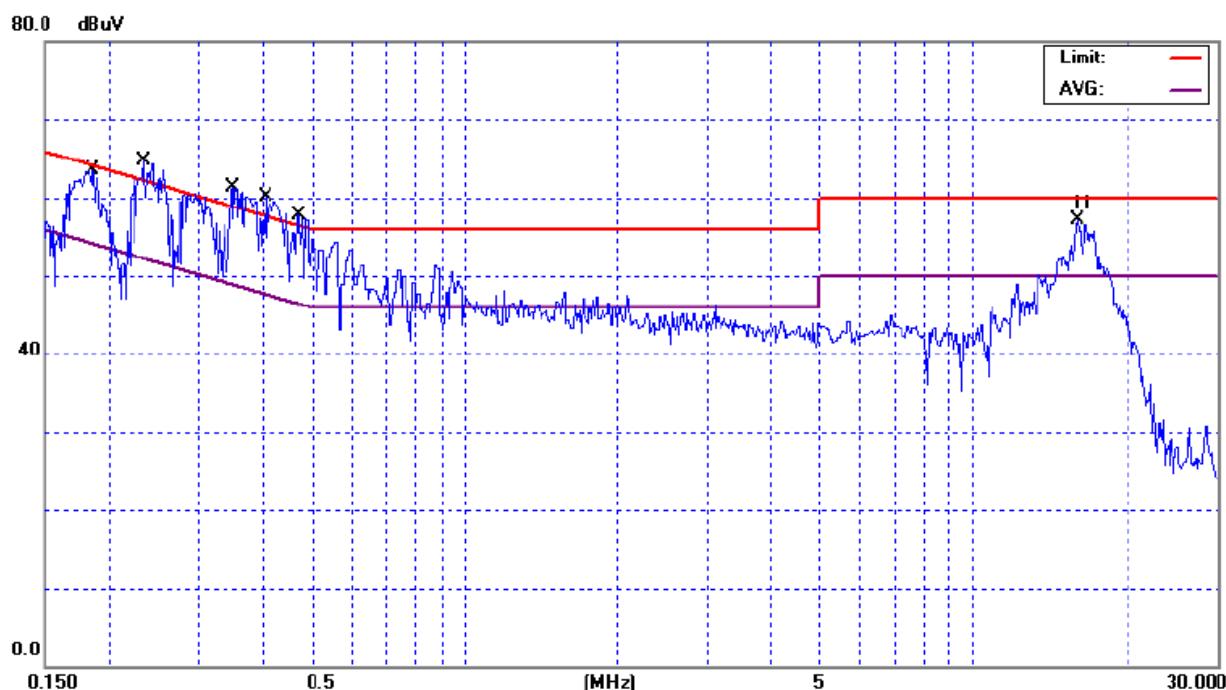



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3173	Oct. 15, 2010
2	Pre-Amplifier	Anritsu	MH648A	M98457	Jan. 19, 2010
3	Test Cable	N/A	10M-OS01	N/A	Jun. 18, 2010
4	Test Cable	N/A	OS02	01	Jun. 23, 2010
5	EMI Test Receiver	R&S	ESCI	100082	Mar. 17, 2010
6	System Controller (OS02)	CT	SC100	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-546	Jun. 04, 2010
9	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 20, 2010
10	Microflex Cable	N/A	N/A	1m	May. 20, 2010
11	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 23, 2010
12	Microflex Cable	N/A	N/A	3m	Aug. 23, 2010
13	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

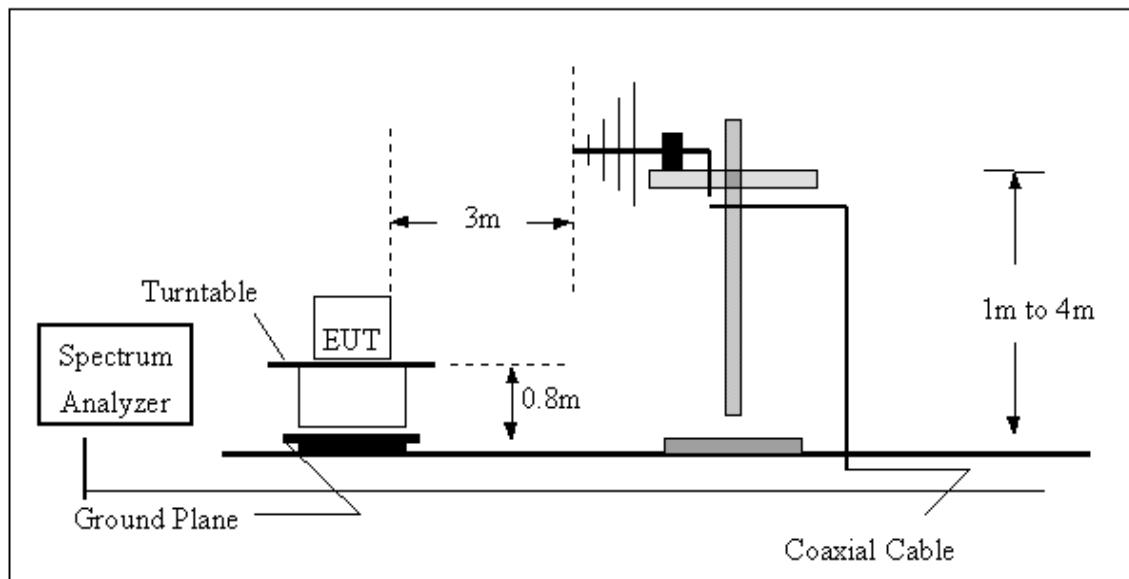

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

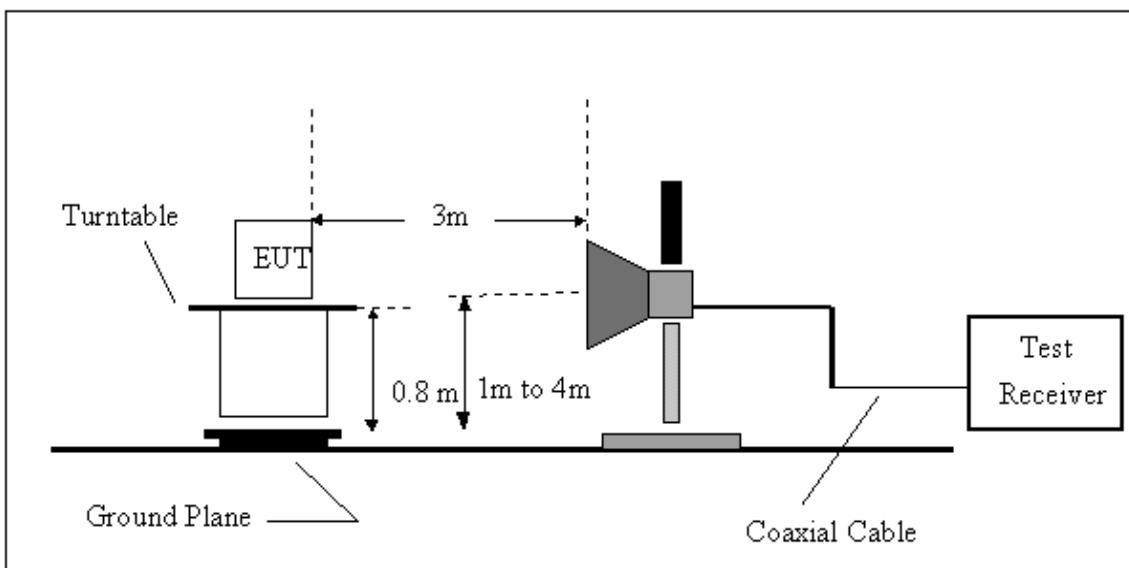

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ**

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	24 °C	Relative Humidity :	44%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
72.68	V	44.72	-22.12	22.60	40.00	- 17.40	
134.76	V	40.37	-19.28	21.09	43.50	- 22.41	
299.66	V	43.20	-18.98	24.22	46.00	- 21.78	
499.48	V	48.20	-14.45	33.75	46.00	- 12.25	
701.24	V	41.97	-10.81	31.16	46.00	- 14.84	
901.06	V	37.96	-8.17	29.79	46.00	- 16.21	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency 。 "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission 。
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

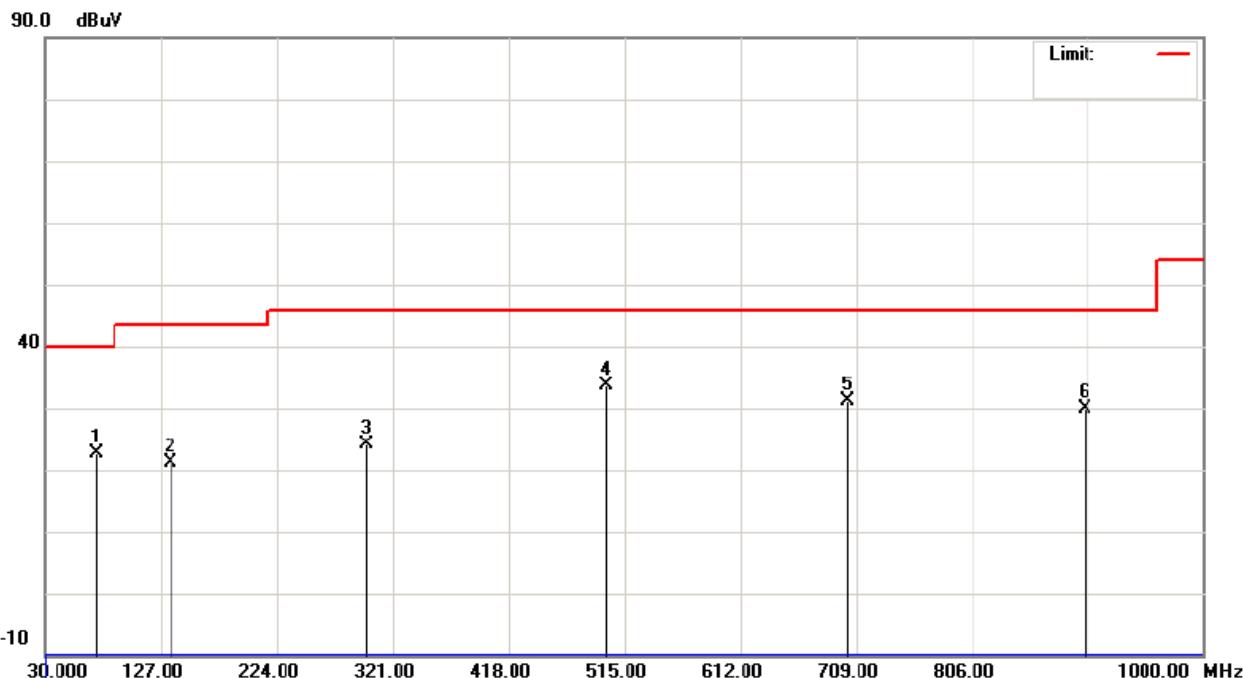




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	24 °C	Relative Humidity :	44%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
163.86	H	41.28	-18.47	22.81	43.50	- 20.69	
299.66	H	45.25	-18.98	26.27	46.00	- 19.73	
499.48	H	43.92	-14.45	29.47	46.00	- 16.53	
701.24	H	43.44	-10.81	32.63	46.00	- 13.37	
961.20	H	41.40	-7.49	33.91	54.00	- 20.09	
1000.00	H	43.22	-7.32	35.90	54.00	- 18.10	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

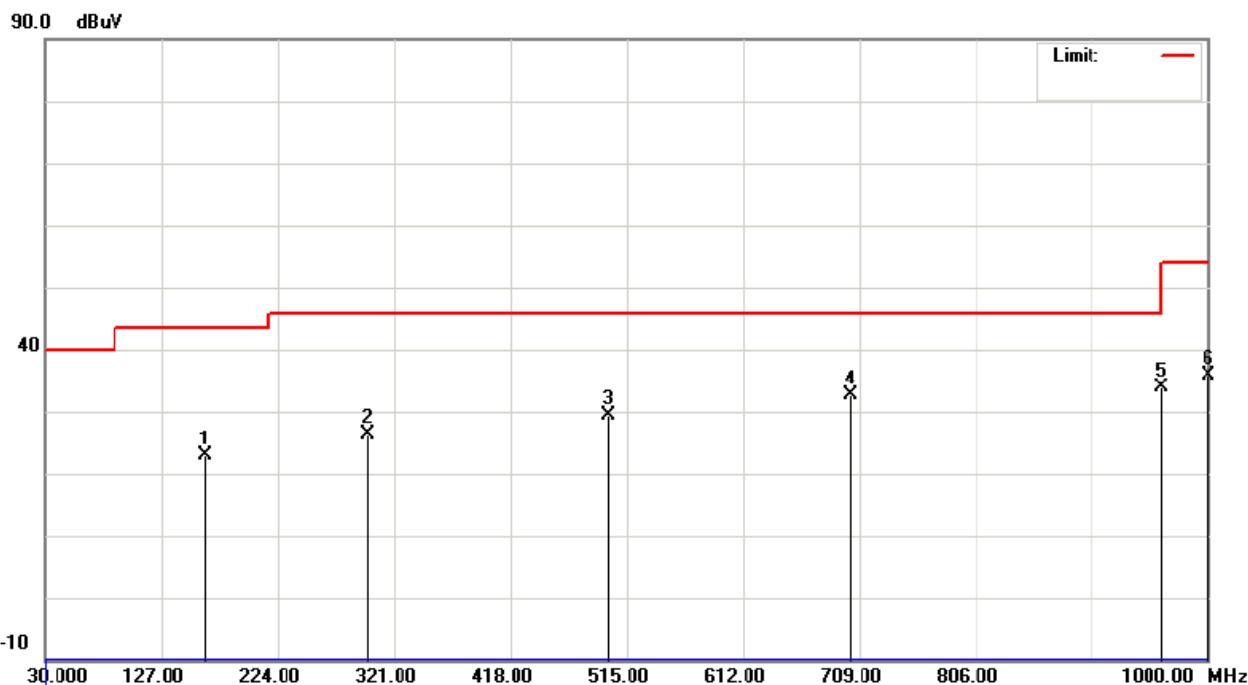

**4.2.8 TEST RESULTS - ABOVE 1000MHZ**

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	23.64	12.23	31.93	55.57	44.16	74.00	54.00	X/H
2409.20	V	60.04	56.30	32.00	92.04	88.30			X/F
4823.97	V	52.09	49.06	3.75	55.84	52.81	74.00	54.00	X/H
7235.94	V	44.78	31.65	9.02	53.80	40.67	74.00	54.00	X/H
9648.00	V	45.05	32.15	11.96	57.01	44.11	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH01(Above 1000 MHz, Vertical)

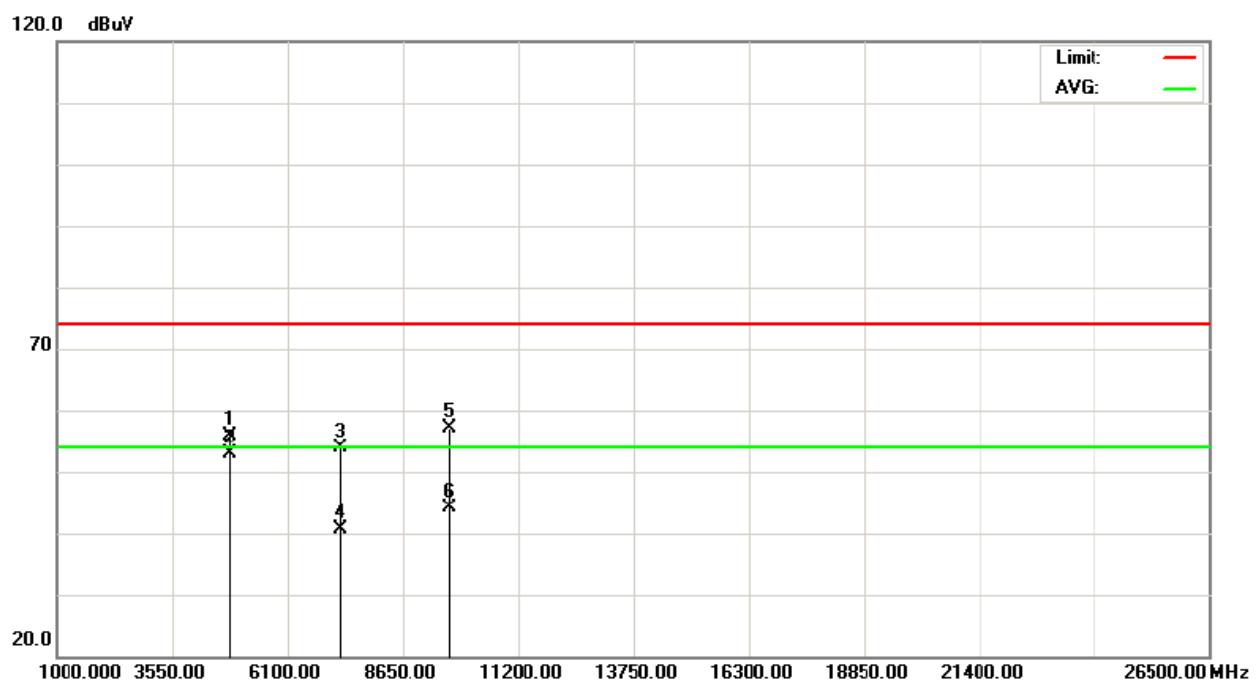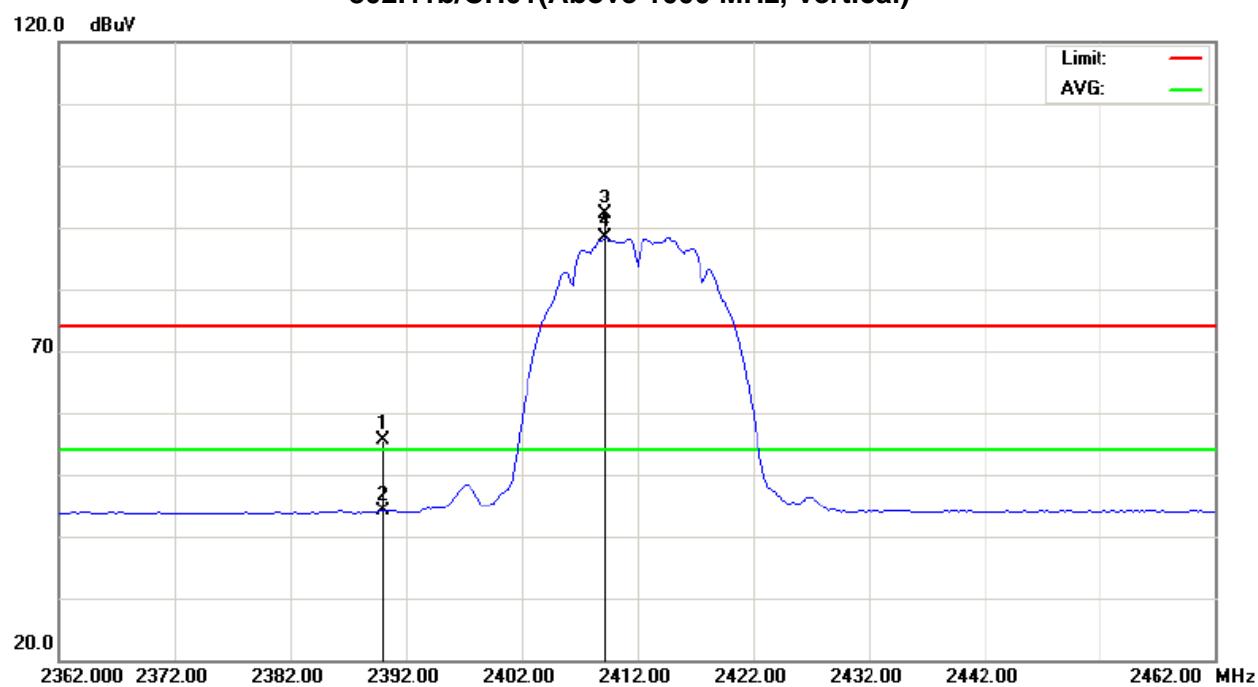



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	22.66	12.92	31.93	54.59	44.85	74.00	54.00	X/H
2414.80	H	63.80	60.00	32.02	95.82	92.02			X/F
4824.04	H	49.47	43.97	3.75	53.22	47.72	74.00	54.00	X/H
7235.94	H	44.44	31.55	9.02	53.46	40.57	74.00	54.00	X/H
9648.01	H	44.87	32.11	11.96	56.83	44.07	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH01(Above 1000 MHz, Horizontal)

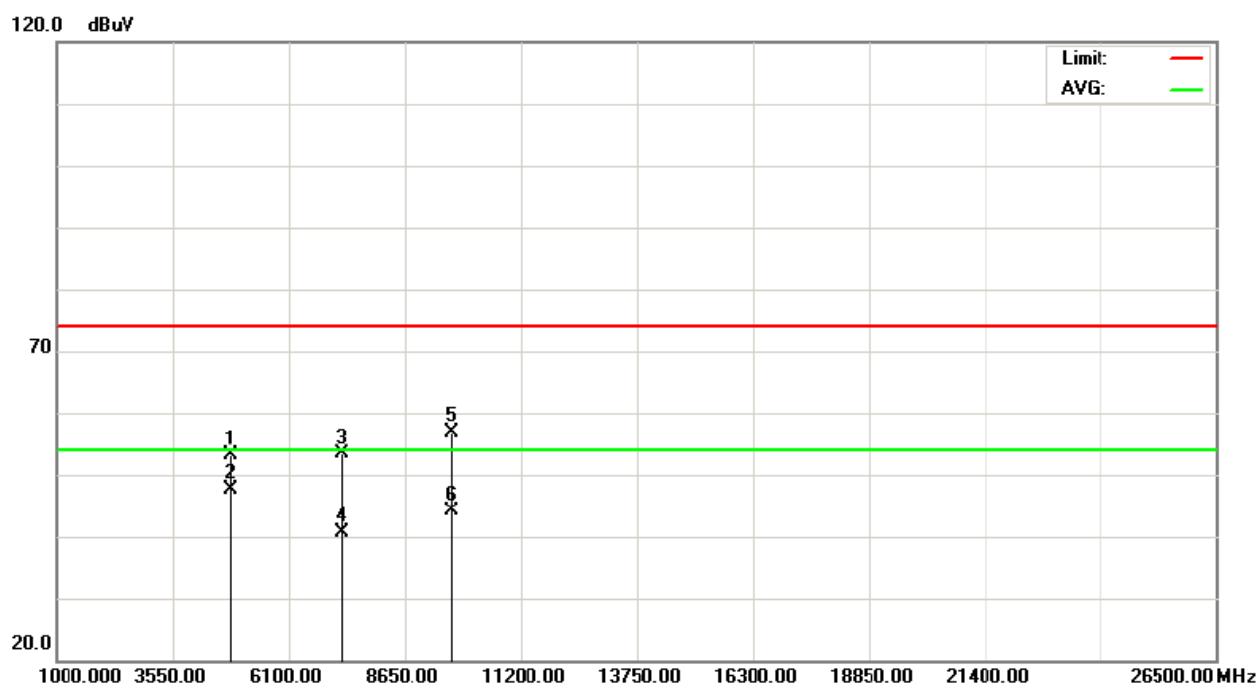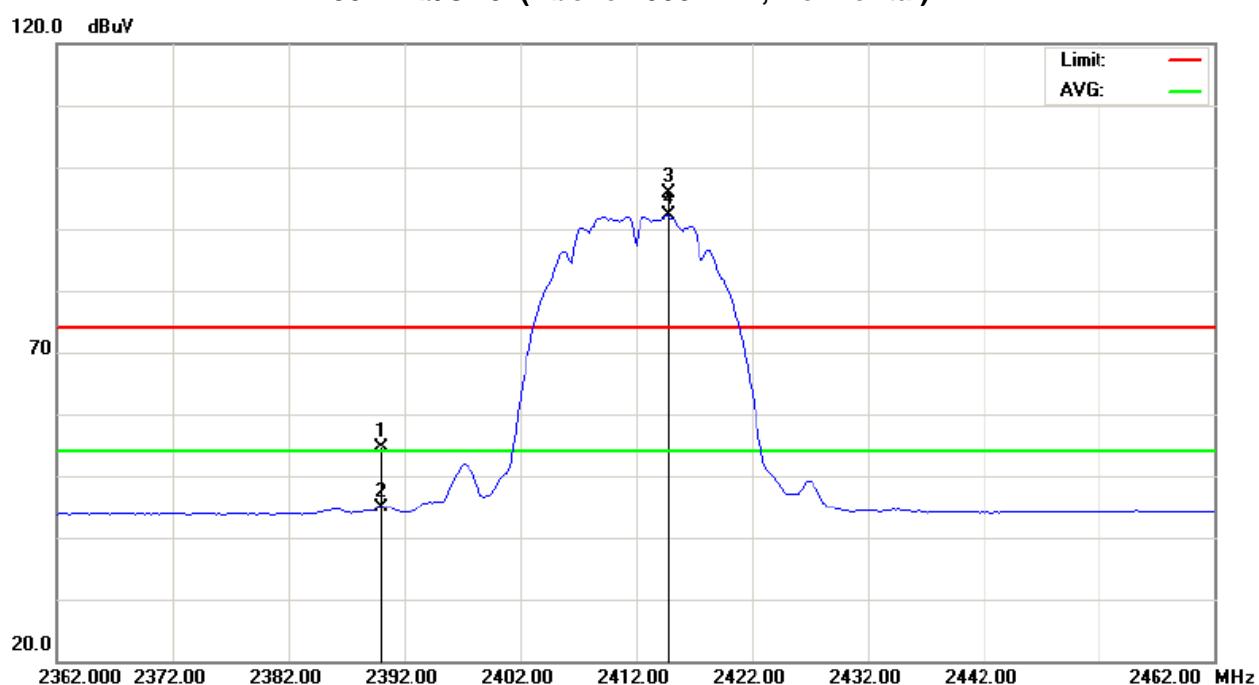



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2434.40	V	59.58	56.61	32.10	91.68	88.71			X/F
4873.96	V	49.69	46.07	3.90	53.59	49.97	74.00	54.00	X/H
7310.92	V	40.93	30.39	9.14	50.07	39.53	74.00	54.00	X/H
9747.91	V	42.47	30.91	12.11	54.58	43.02	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06(Above 1000 MHz, Vertical)

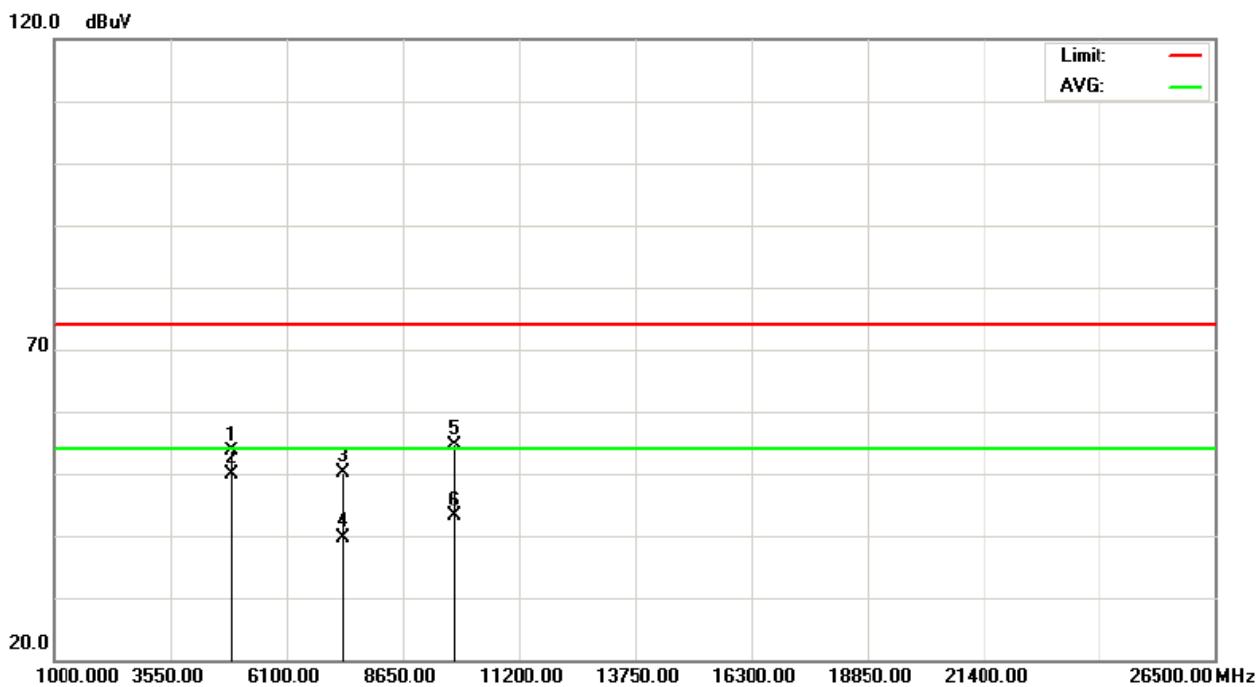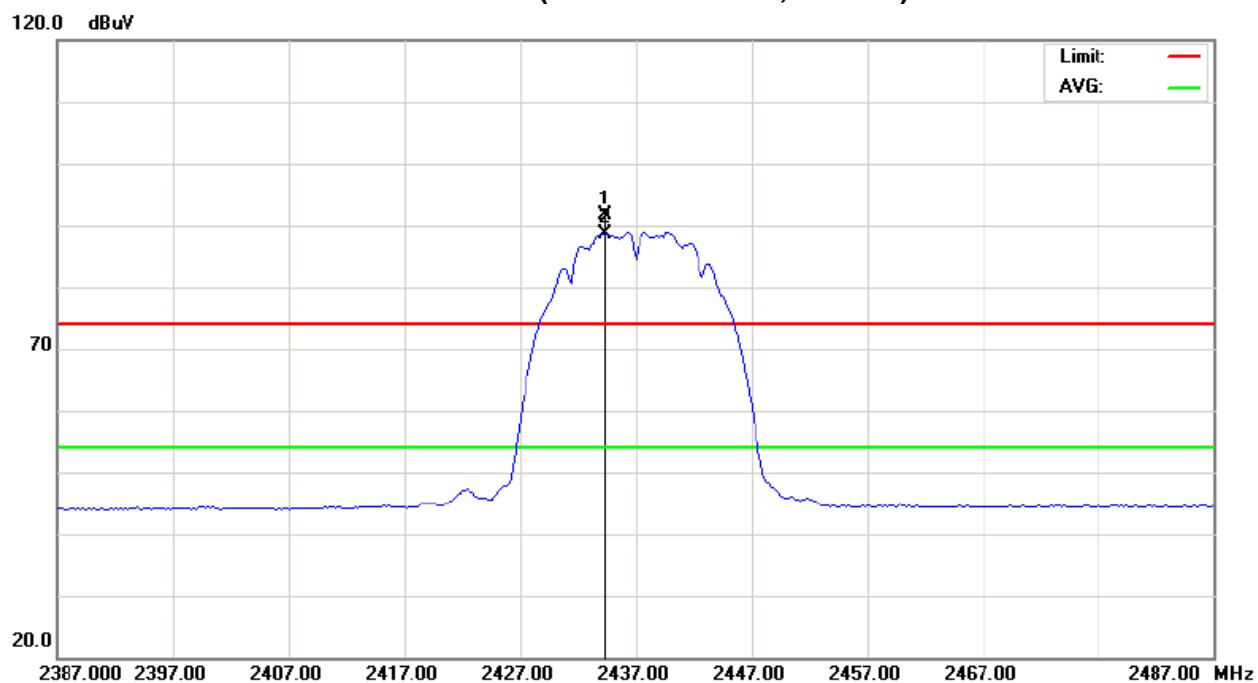



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2434.40	H	63.16	60.23	32.10	95.26	92.33			X/F
4873.97	H	47.36	42.51	3.90	51.26	46.41	74.00	54.00	X/H
7310.89	H	40.85	30.15	9.14	49.99	39.29	74.00	54.00	X/H
9747.91	H	42.26	31.71	12.11	54.37	43.82	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06(Above 1000 MHz, Horizontal)

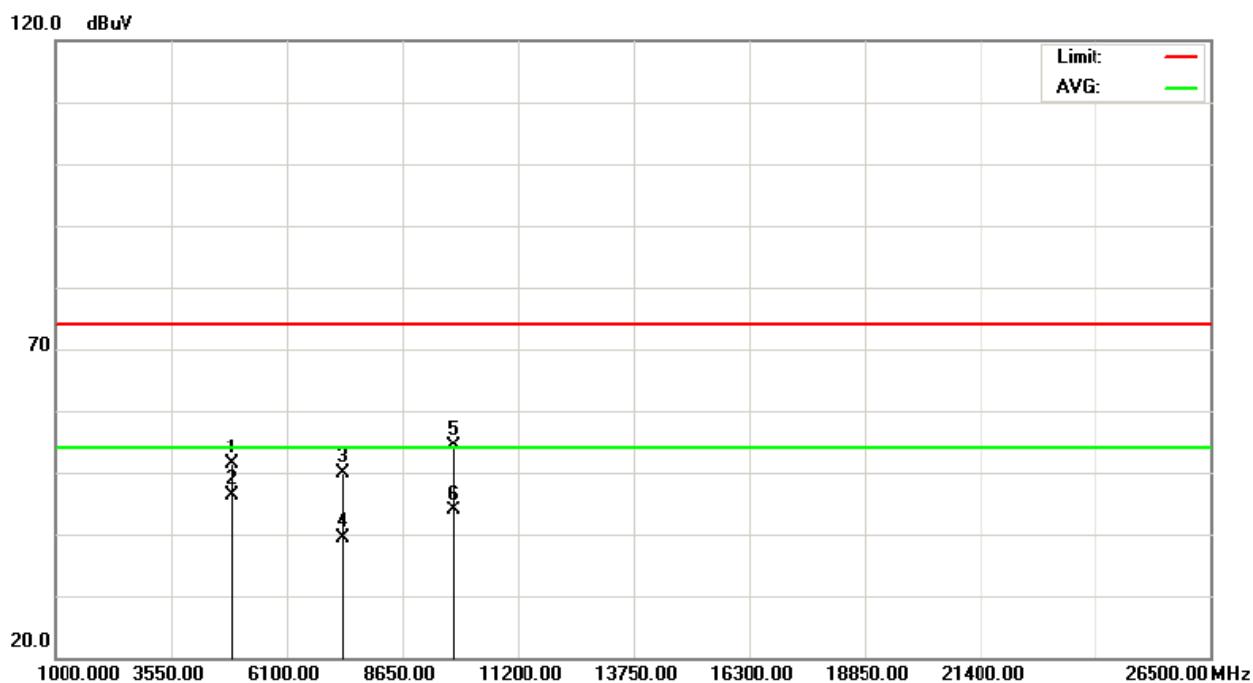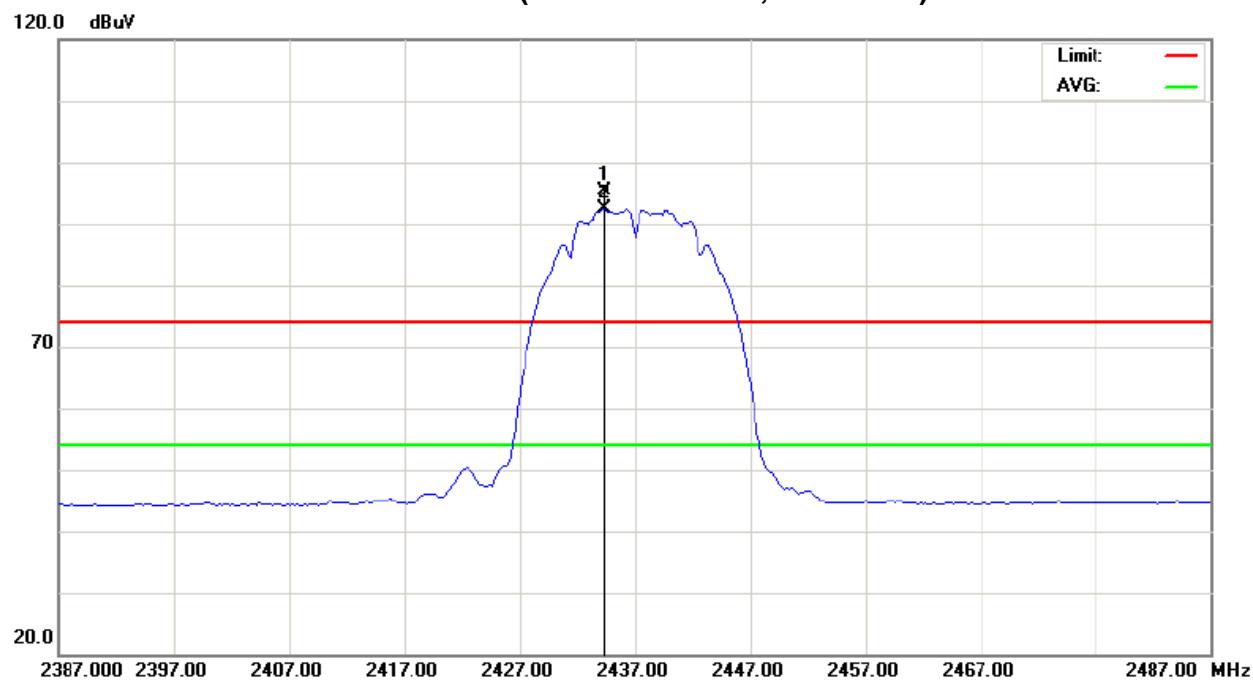



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH11		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2459.20	V	60.84	57.41	32.19	93.03	89.60			X/F
2483.50	V	21.34	12.30	32.29	53.63	44.59	74.00	54.00	X/H
4923.97	V	47.76	43.00	4.06	51.82	47.06	74.00	54.00	X/H
7385.87	V	42.09	31.55	9.27	51.36	40.82	74.00	54.00	X/H
9847.96	V	41.86	31.82	12.27	54.13	44.09	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH11(Above 1000 MHz, Vertical)

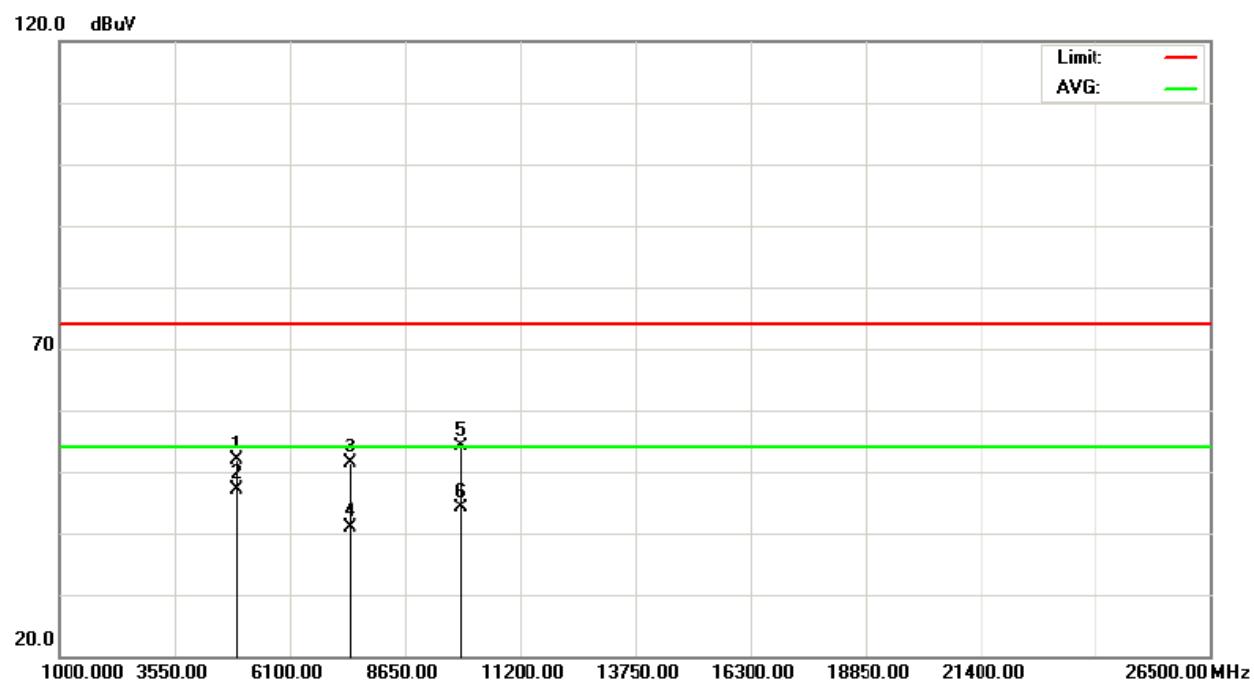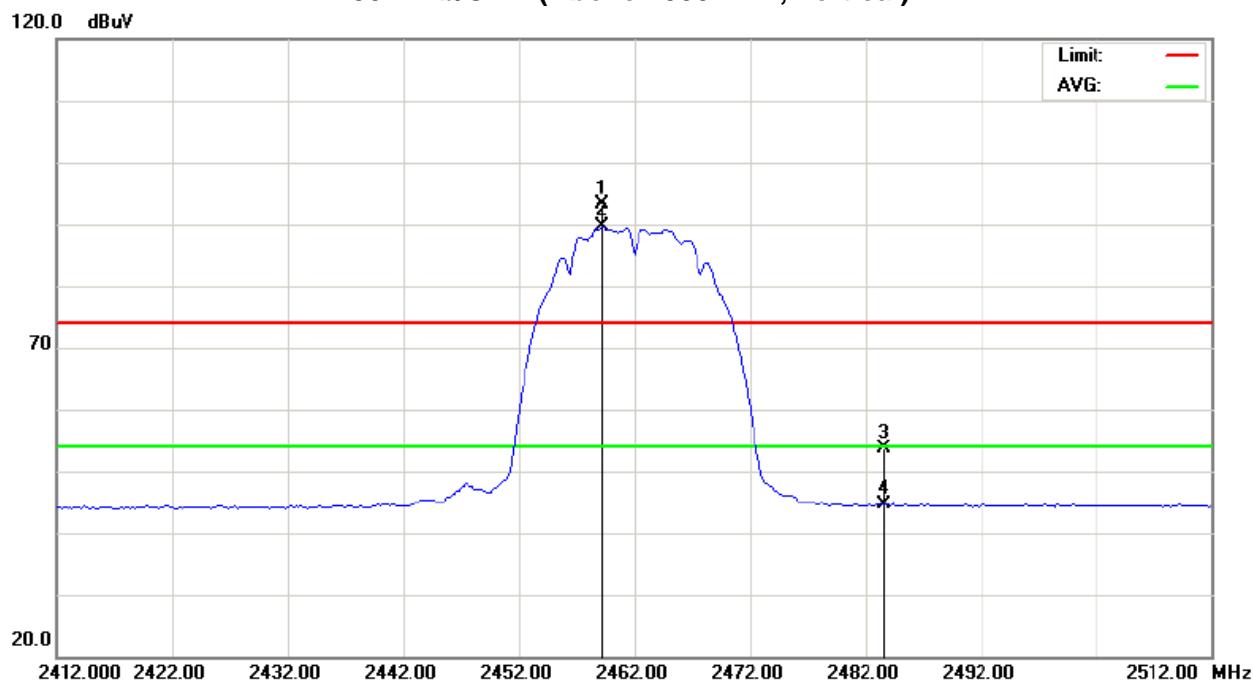



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH11		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2459.20	H	62.32	58.92	32.19	94.51	91.11			X/F
2483.50	H	21.97	12.62	32.29	54.26	44.91	74.00	54.00	X/H
4924.04	H	46.62	42.13	4.06	50.68	46.19	74.00	54.00	X/H
7386.08	H	42.56	31.66	9.27	51.83	40.93	74.00	54.00	X/H
9847.96	H	42.62	31.91	12.27	54.89	44.18	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH11(Above 1000 MHz, Horizontal)

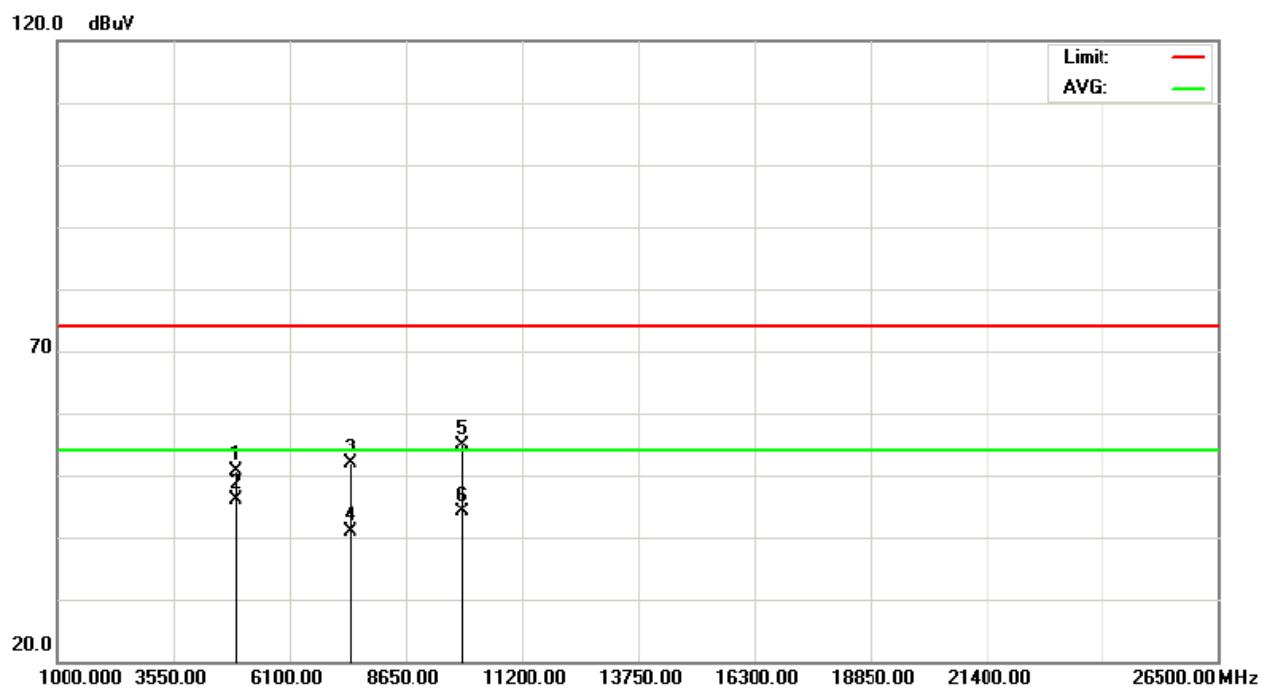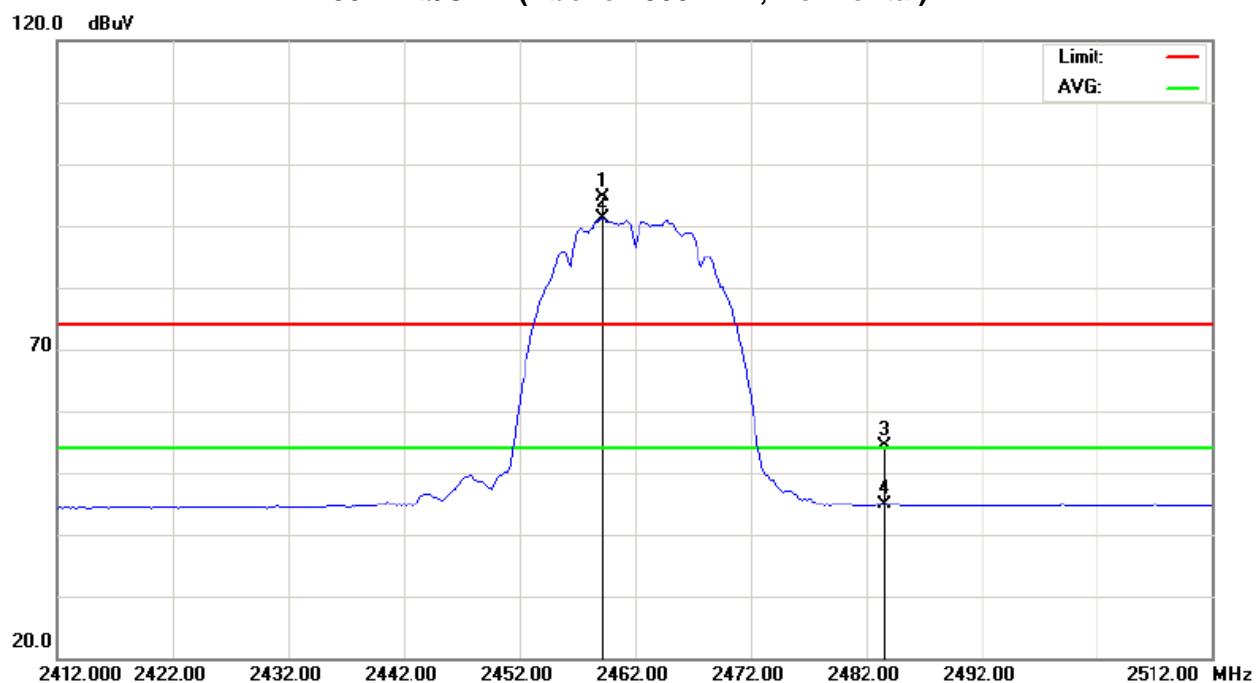



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	25.32	13.80	31.93	57.25	45.73	74.00	54.00	X/H
2415.40	V	63.60	54.69	32.03	95.63	86.72			X/F
4824.00	V	50.29	39.57	3.75	54.04	43.32	74.00	54.00	X/H
7235.00	V	42.88	31.75	9.02	51.90	40.77	74.00	54.00	X/H
9644.20	V	42.84	31.98	11.95	54.79	43.93	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01(Above 1000 MHz, Vertical)

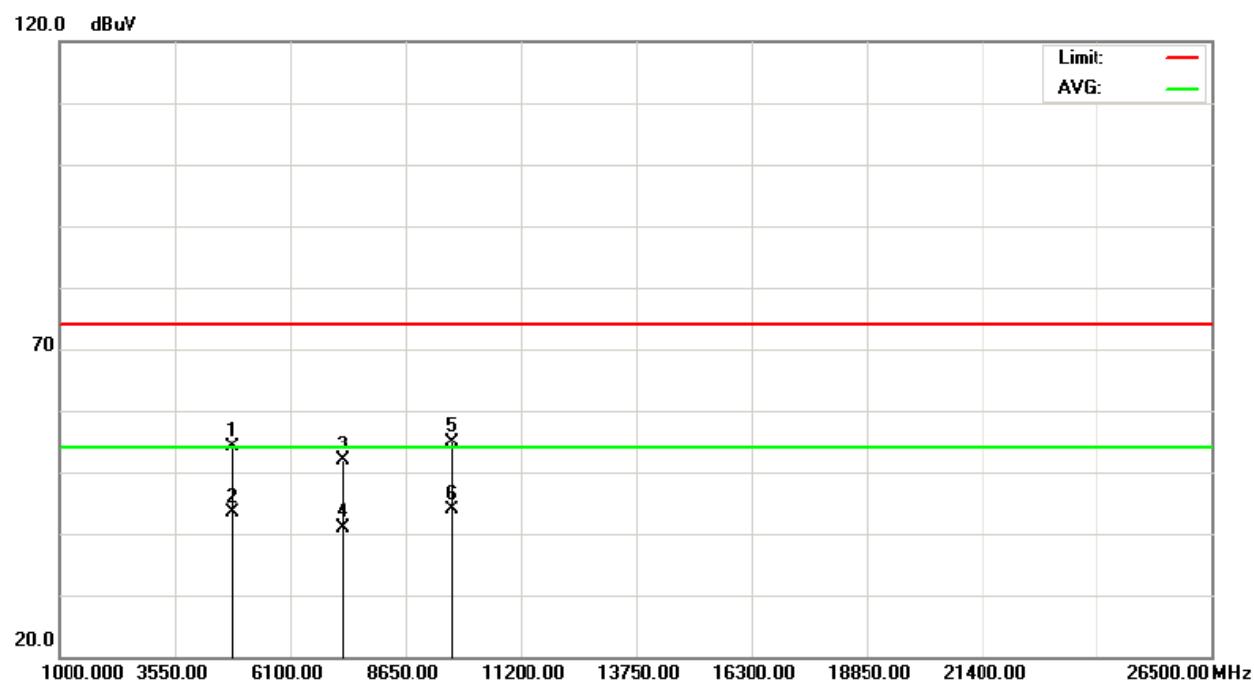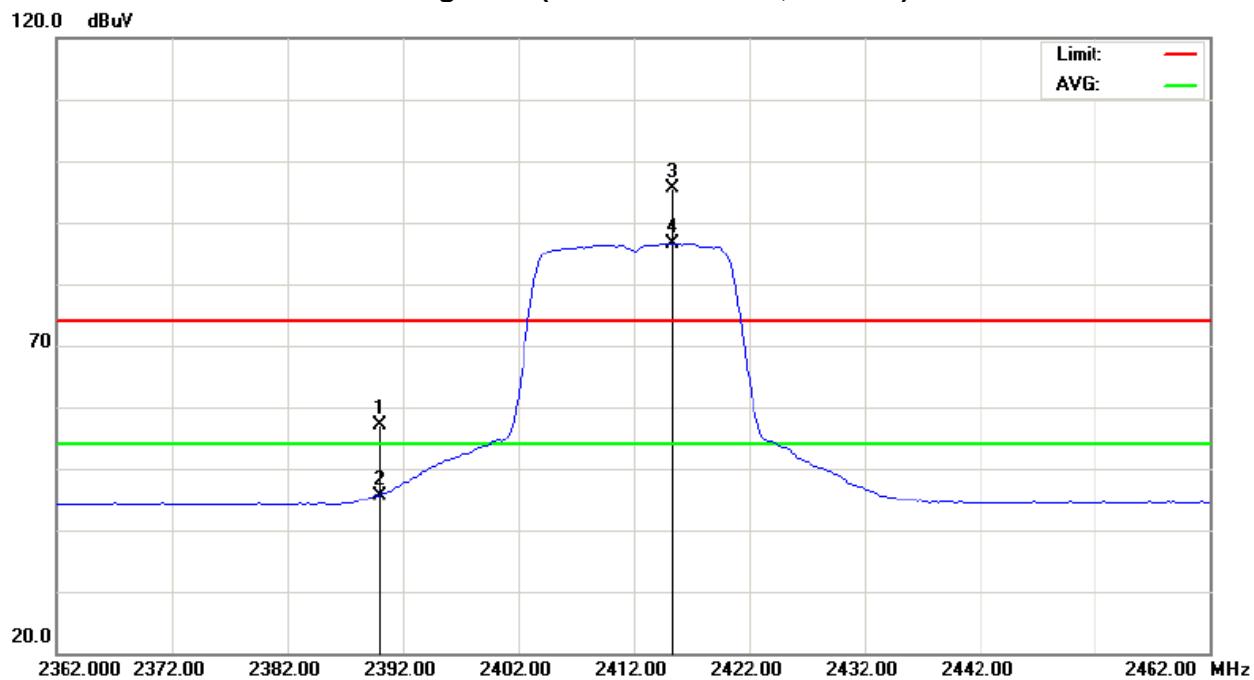





EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	29.27	15.96	31.93	61.20	47.89	74.00	54.00	X/H
2409.40	H	67.50	58.78	32.00	99.50	90.78			X/F
4823.80	H	47.64	36.95	3.75	51.39	40.70	74.00	54.00	X/H
7239.00	H	44.04	31.70	9.03	53.07	40.73	74.00	54.00	X/H
9649.80	H	41.54	31.83	11.96	53.50	43.79	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

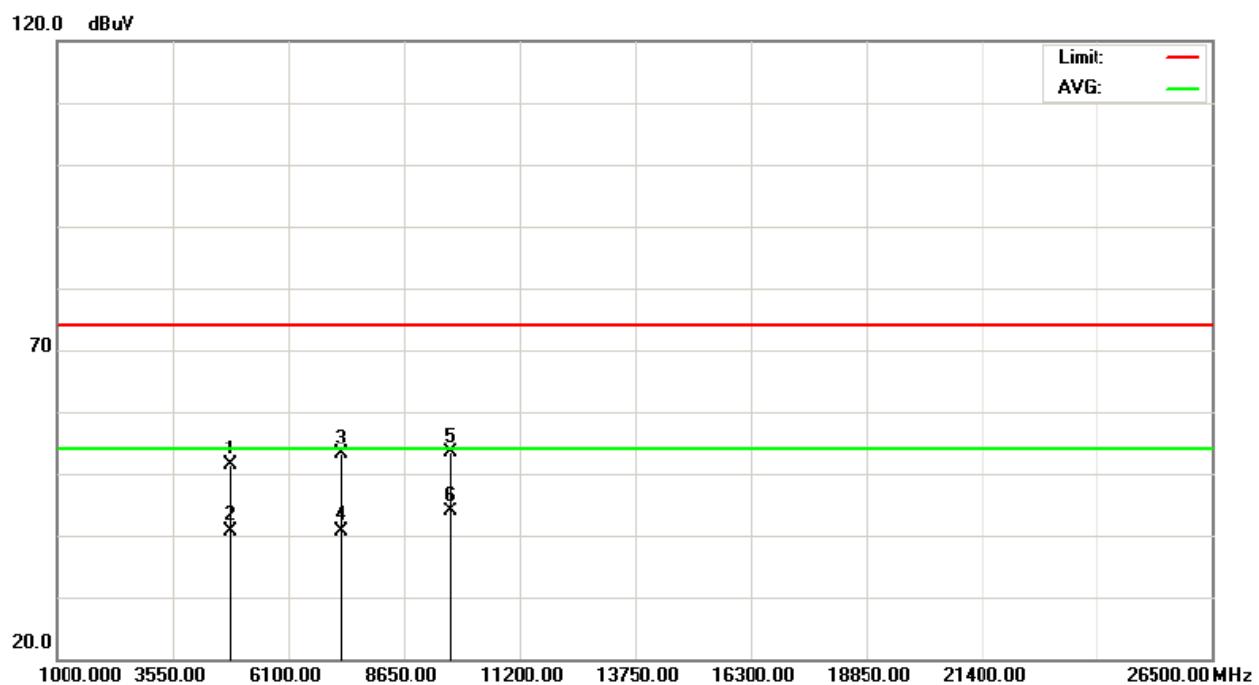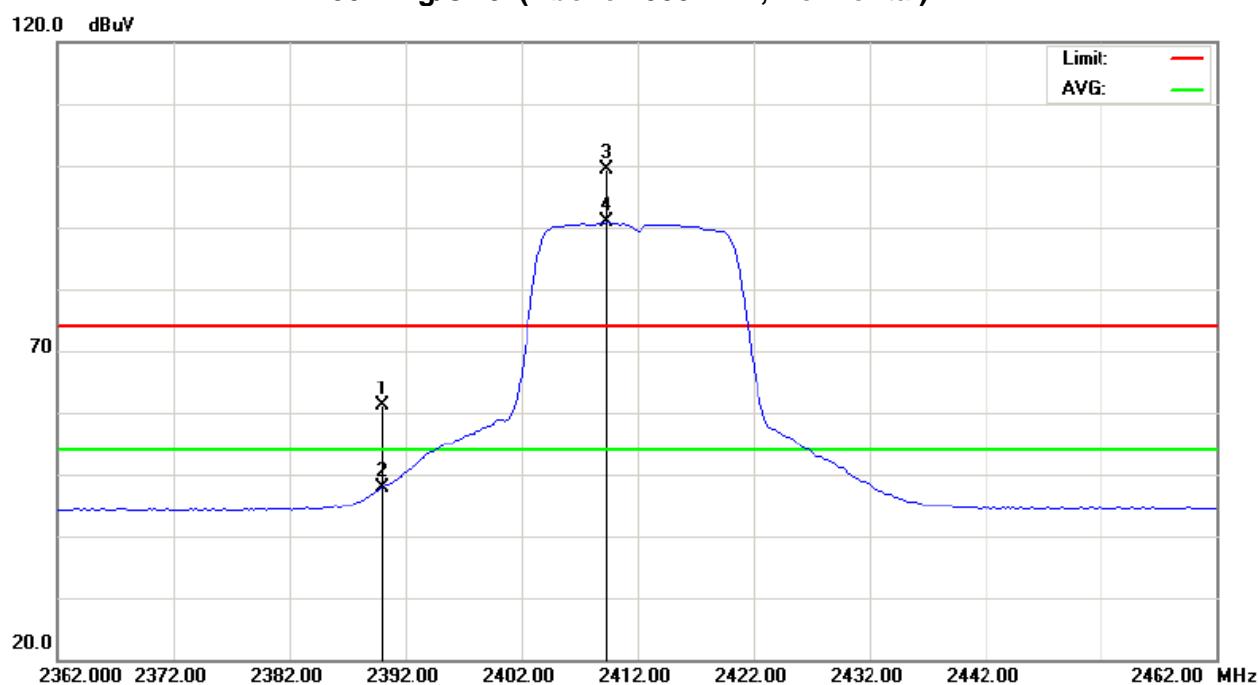**Orthogonal Axis : X****802.11g/CH01(Above 1000 MHz, Horizontal)**



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2438.80	V	63.94	55.54	32.11	96.05	87.65			X/F
4873.80	V	48.28	37.49	3.90	52.18	41.39	74.00	54.00	X/H
7312.60	V	41.54	30.43	9.15	50.69	39.58	74.00	54.00	X/H
9746.20	V	41.52	31.87	12.11	53.63	43.98	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06(Above 1000 MHz, Vertical)

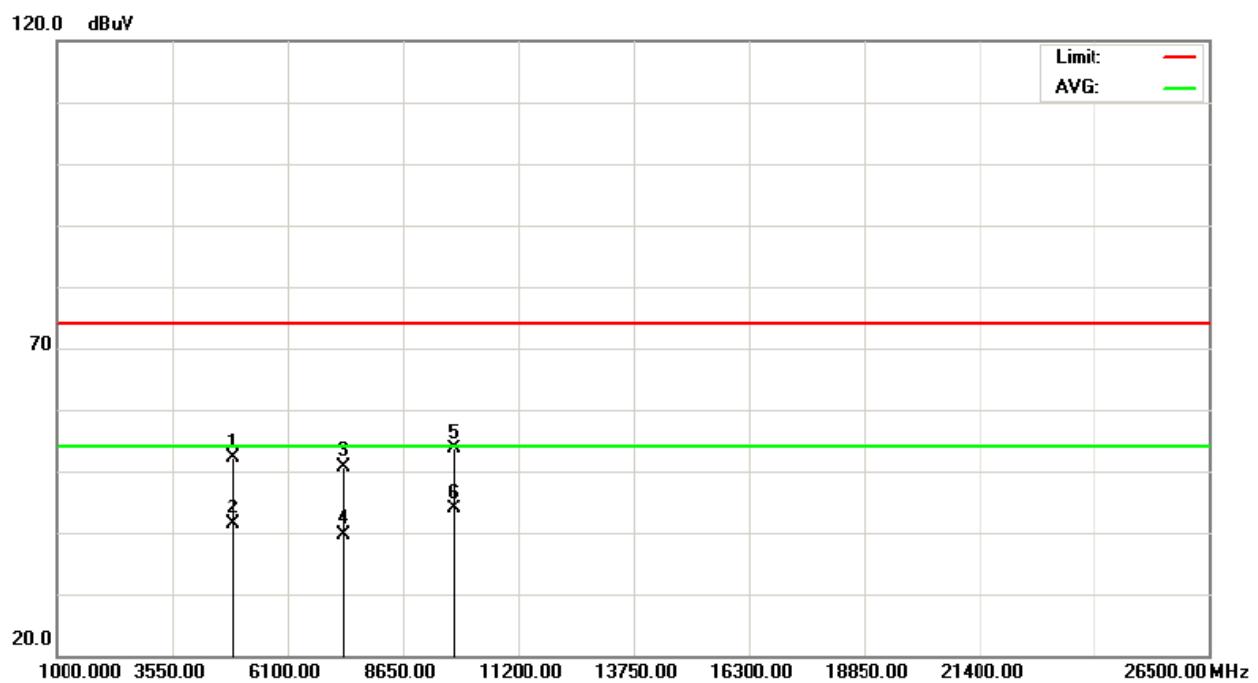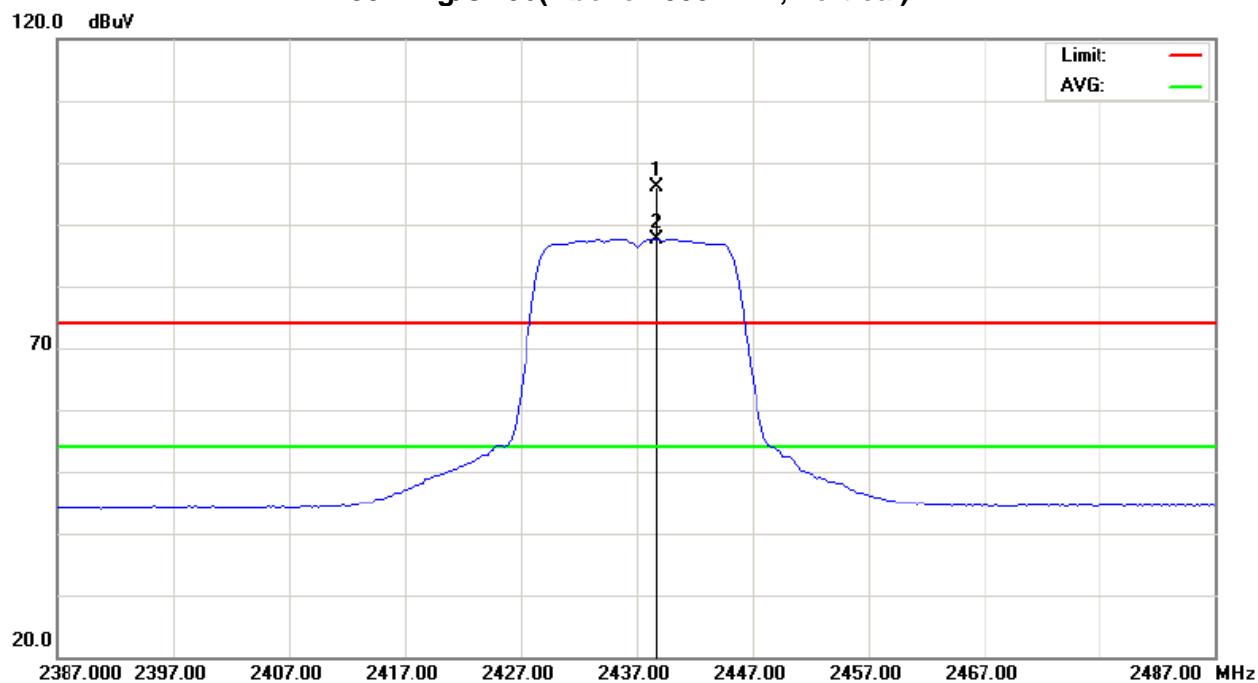



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2435.40	H	64.32	55.87	32.10	96.42	87.97			X/F
4874.00	H	46.13	35.28	3.90	50.03	39.18	74.00	54.00	X/H
7316.40	H	40.05	30.35	9.15	49.20	39.50	74.00	54.00	X/H
9746.20	H	43.14	31.91	12.11	55.25	44.02	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH06(Above 1000 MHz, Horizontal)

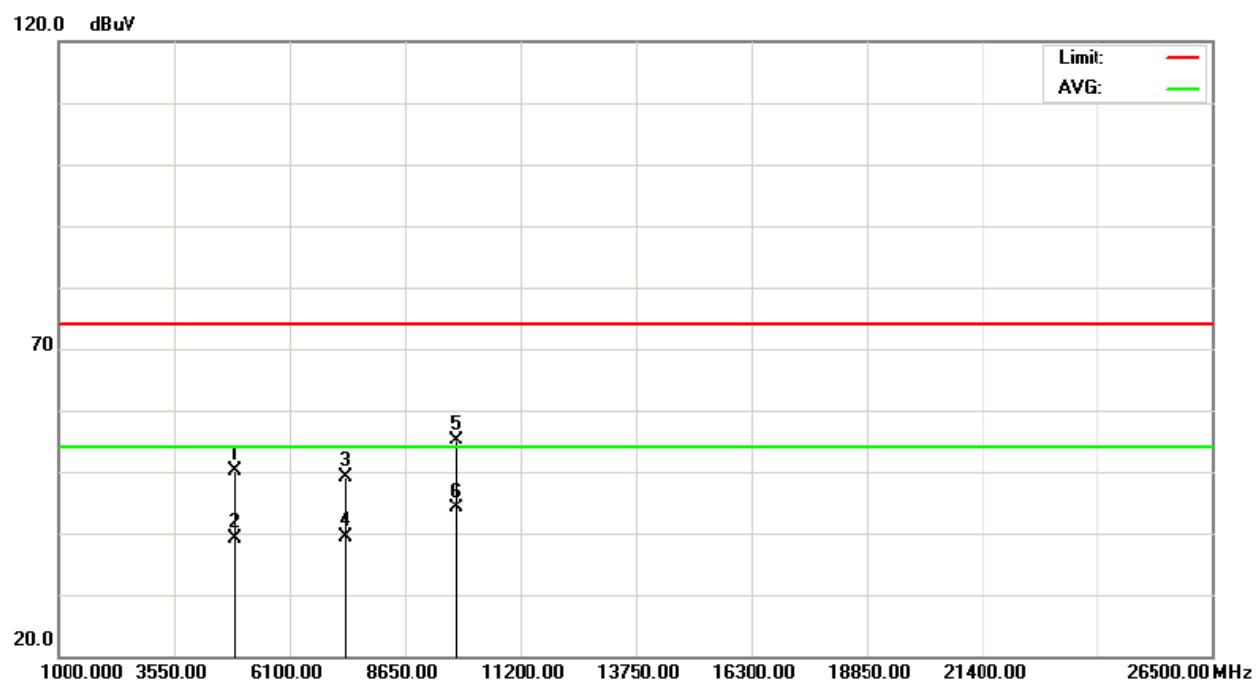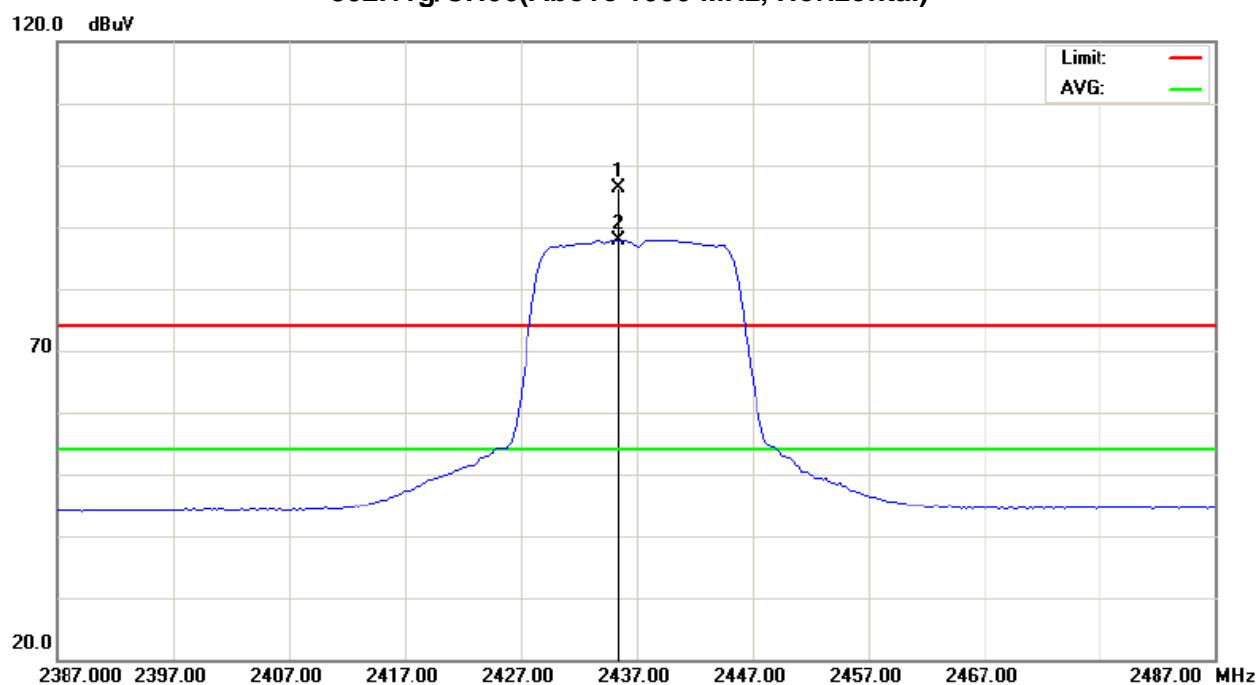



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH11		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2458.80	V	64.43	55.64	32.19	96.62	87.83			X/F
2483.50	V	21.67	12.99	32.29	53.96	45.28	74.00	54.00	X/H
4923.80	V	46.22	35.30	4.06	50.28	39.36	74.00	54.00	X/H
7384.00	V	41.72	31.70	9.26	50.98	40.96	74.00	54.00	X/H
9849.80	V	42.39	31.71	12.27	54.66	43.98	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11(Above 1000 MHz, Vertical)

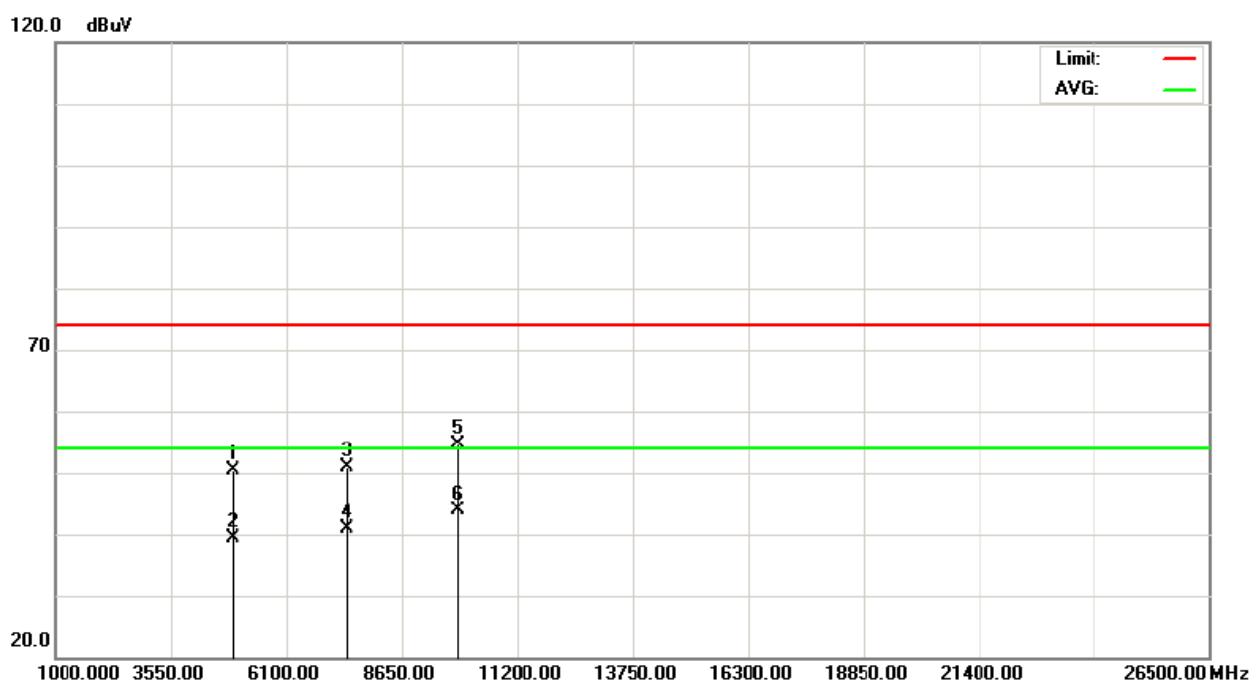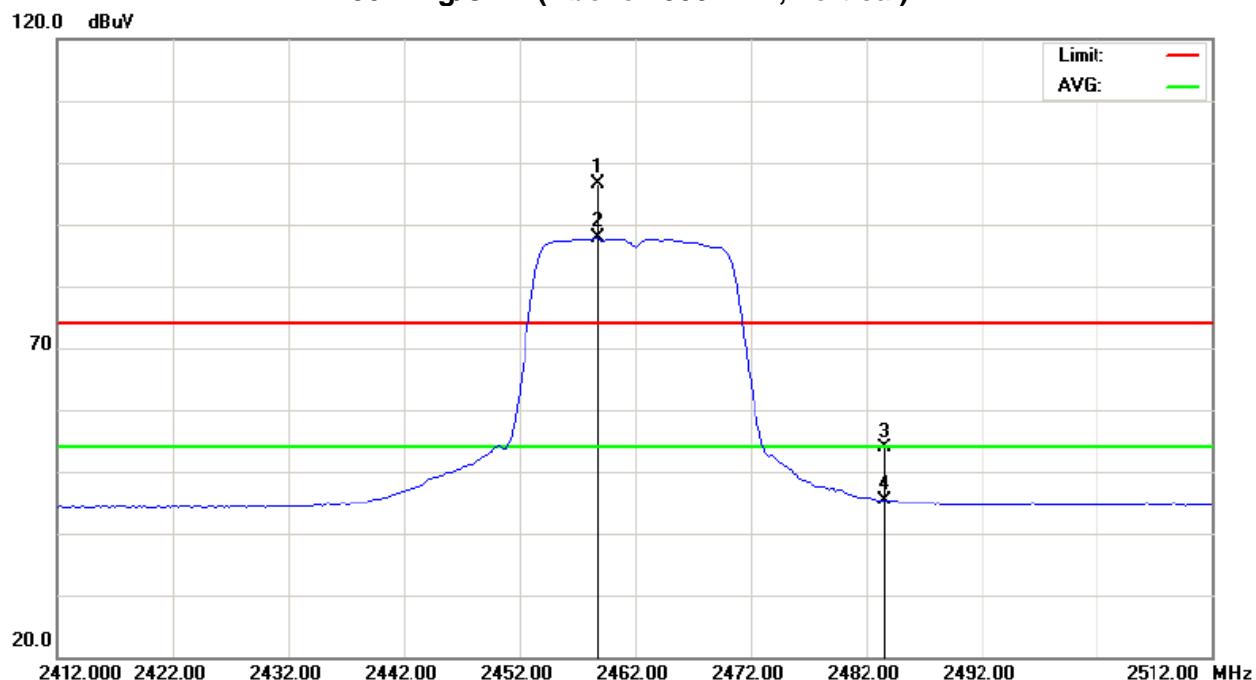



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH11		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2458.80	H	65.39	57.07	32.19	97.58	89.26			X/F
2483.50	H	25.83	13.47	32.29	58.12	45.76	74.00	54.00	X/H
9849.80	H	41.86	31.74	12.27	54.13	44.01	74.00	54.00	X/H
7389.20	H	41.22	31.59	9.27	50.49	40.86	74.00	54.00	X/H
4924.00	H	47.07	35.23	4.06	51.13	39.29	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH11(Above 1000 MHz, Horizontal)

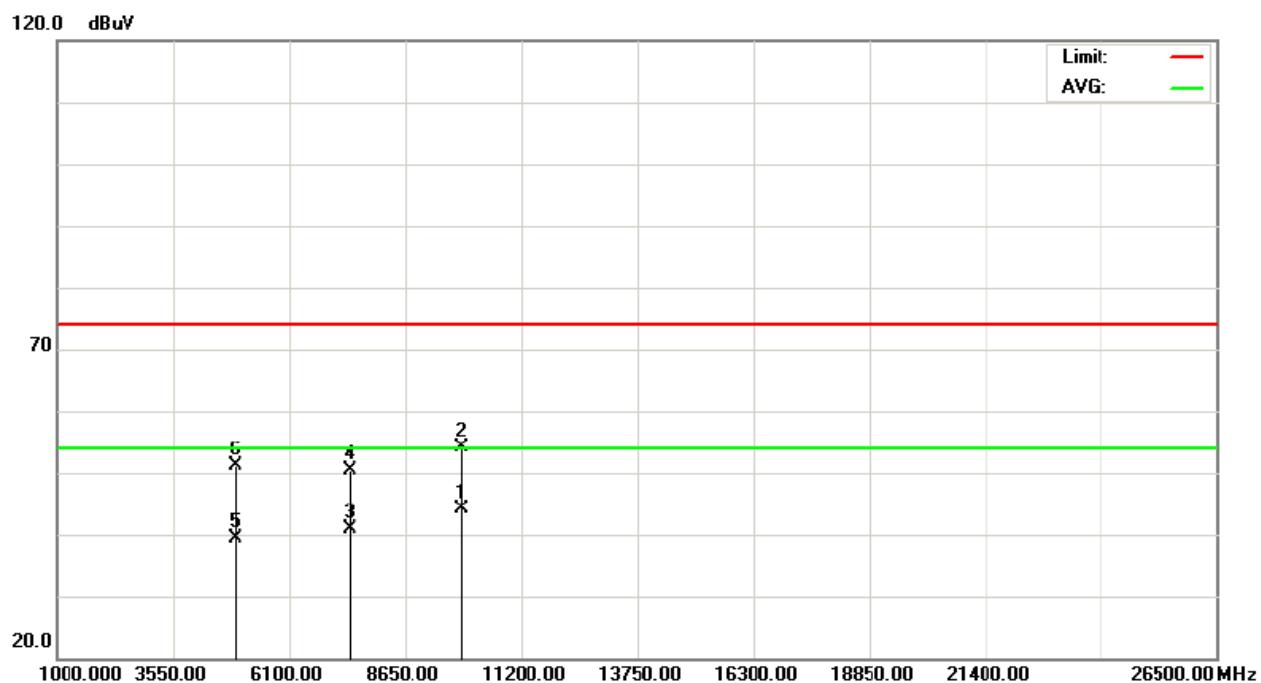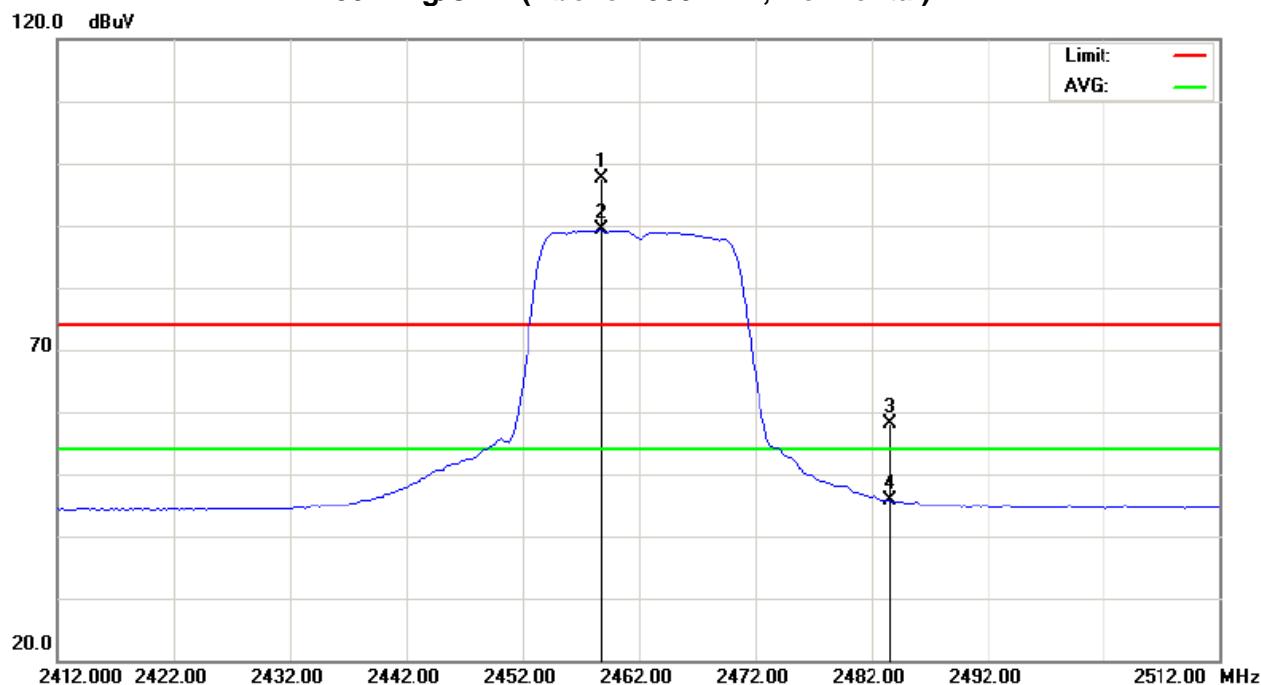



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	27.70	13.74	31.93	59.63	45.67	74.00	54.00	X/H
2415.00	V	62.89	53.82	32.02	94.91	85.84			X/F
4823.80	V	50.48	37.90	3.75	54.23	41.65	74.00	54.00	X/H
7237.20	V	41.82	31.45	9.02	50.84	40.47	74.00	54.00	X/H
9651.40	V	42.70	31.93	11.96	54.66	43.89	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/20M/CH01(Above 1000 MHz, Vertical)

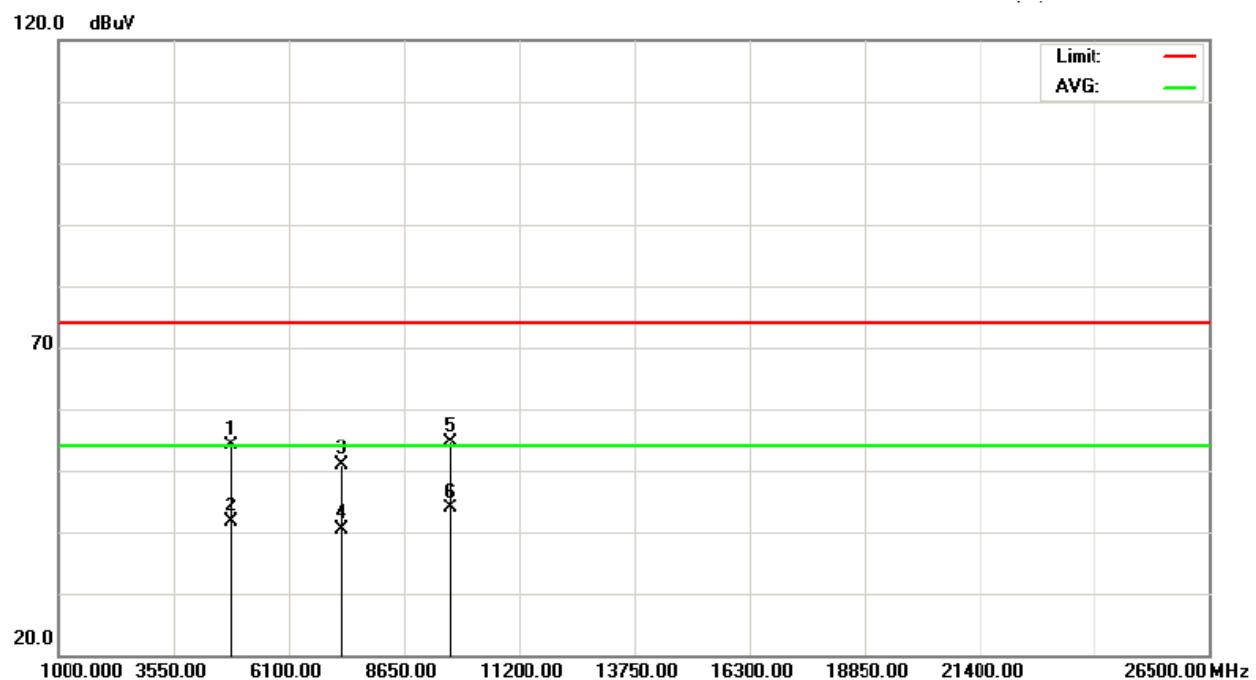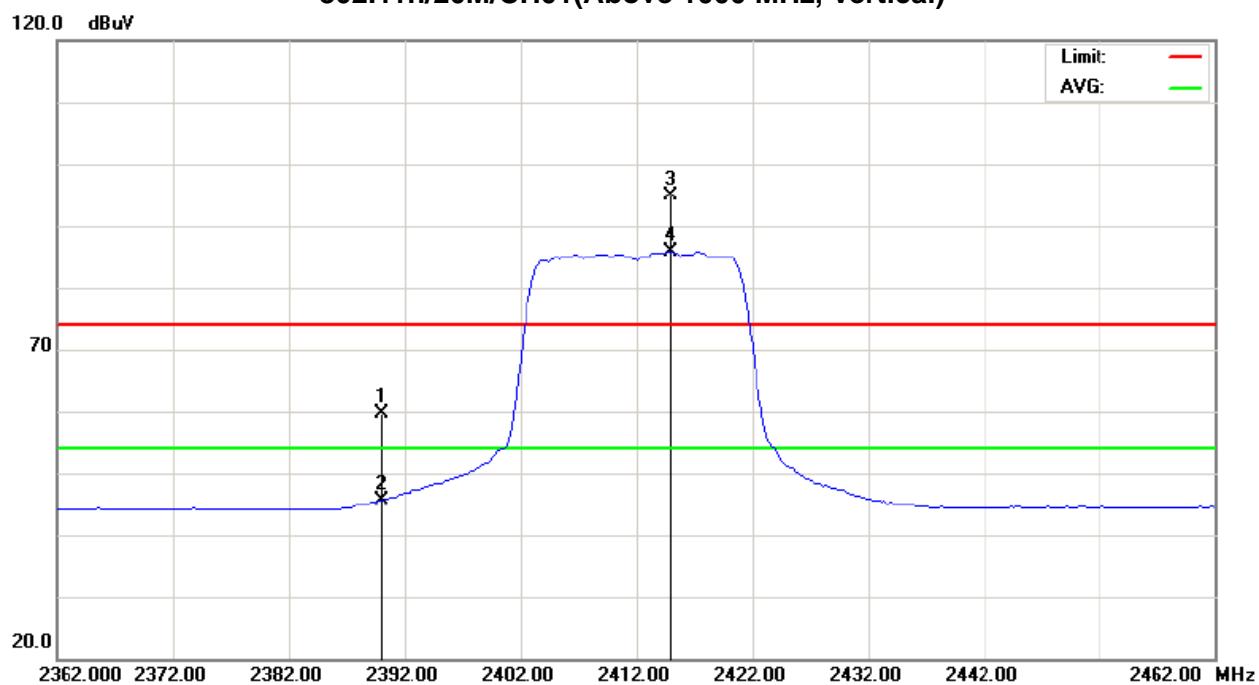





EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	32.47	15.73	31.93	64.40	47.66	74.00	54.00	X/H
2409.00	H	67.12	57.66	32.00	99.12	89.66			X/F
4824.60	H	47.65	35.29	3.75	51.40	39.04	74.00	54.00	X/H
7232.80	H	41.83	31.40	9.02	50.85	40.42	74.00	54.00	X/H
9651.40	H	43.22	31.83	11.96	55.18	43.79	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

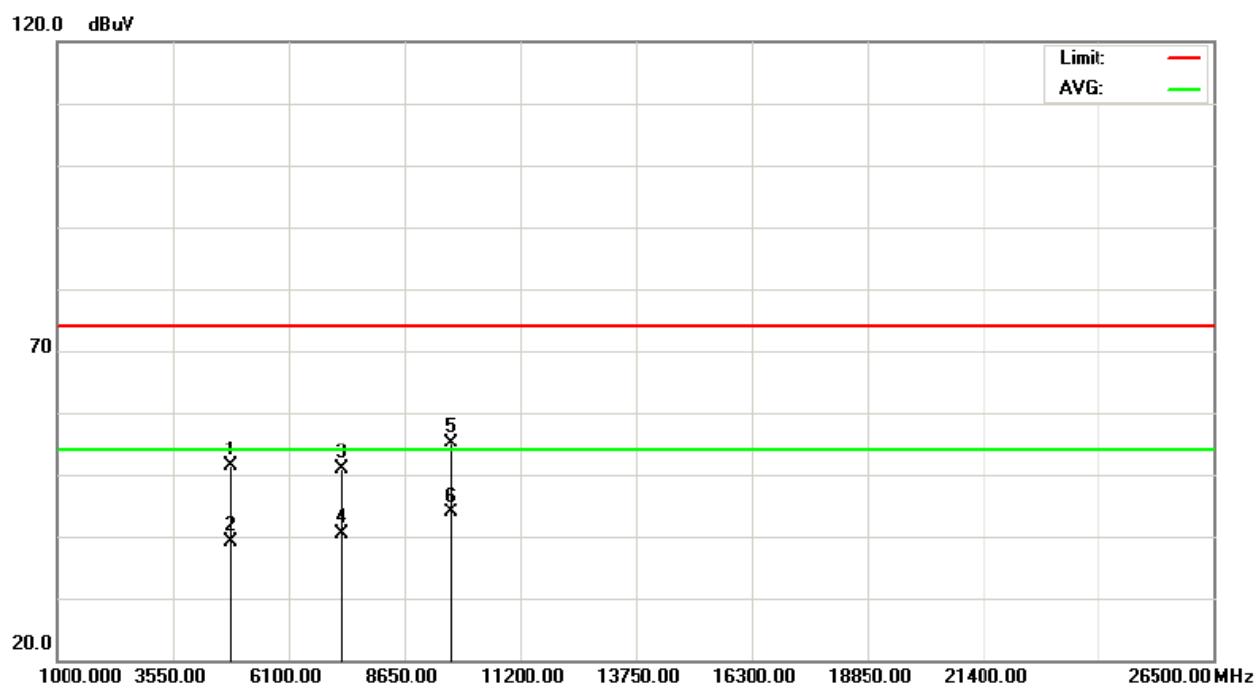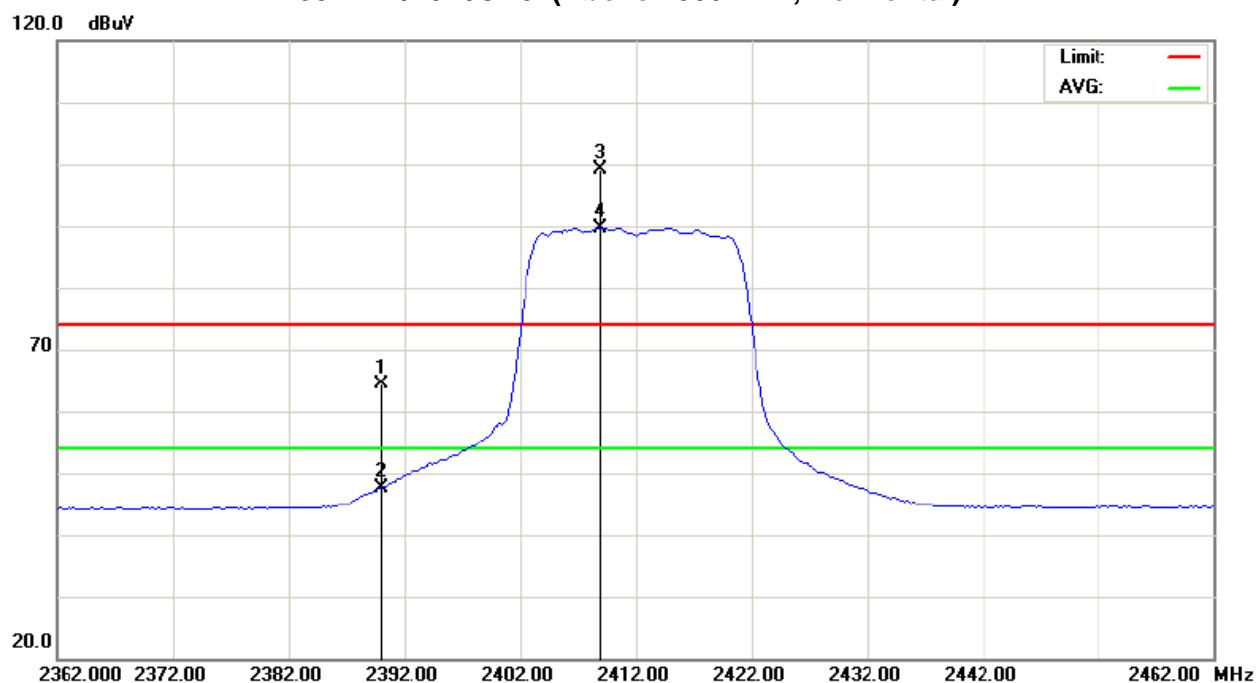**Orthogonal Axis : X****802.11n/20M/CH01(Above 1000 MHz, Horizontal)**





EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2439.80	V	62.61	53.89	32.12	94.73	86.01			X/F
4873.60	V	46.36	35.02	3.90	50.26	38.92	74.00	54.00	X/H
7313.60	V	41.59	30.37	9.15	50.74	39.52	74.00	54.00	X/H
9750.00	V	41.79	31.94	12.12	53.91	44.06	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

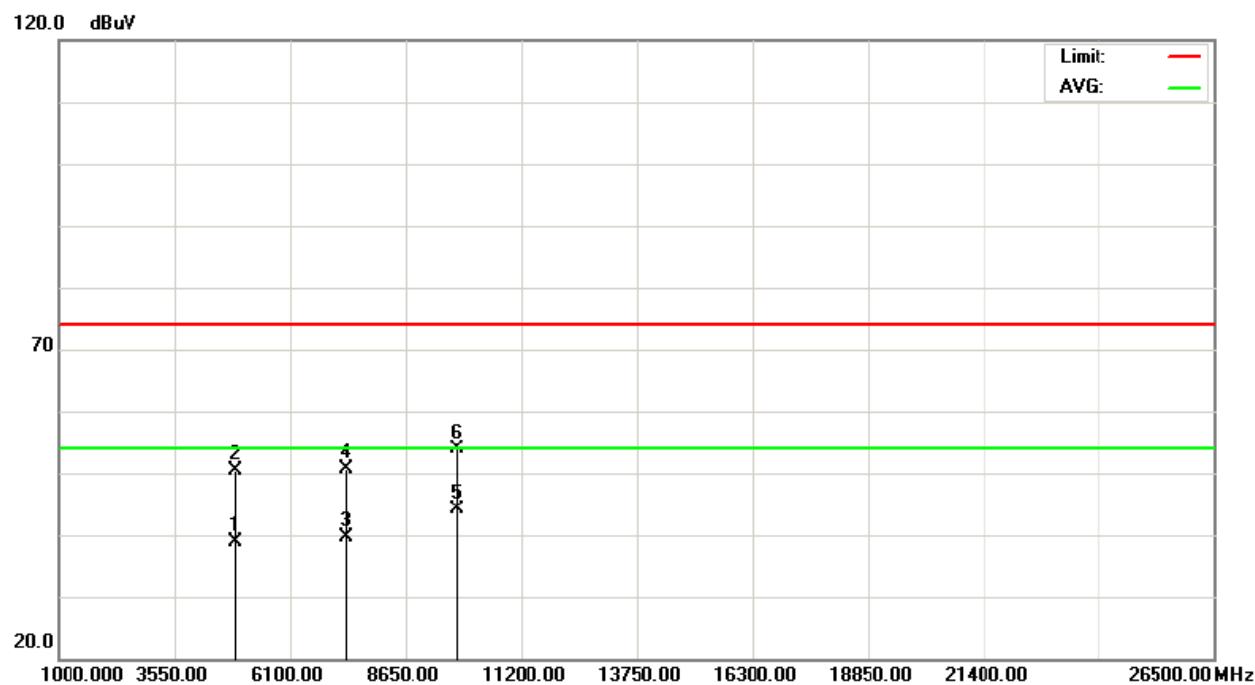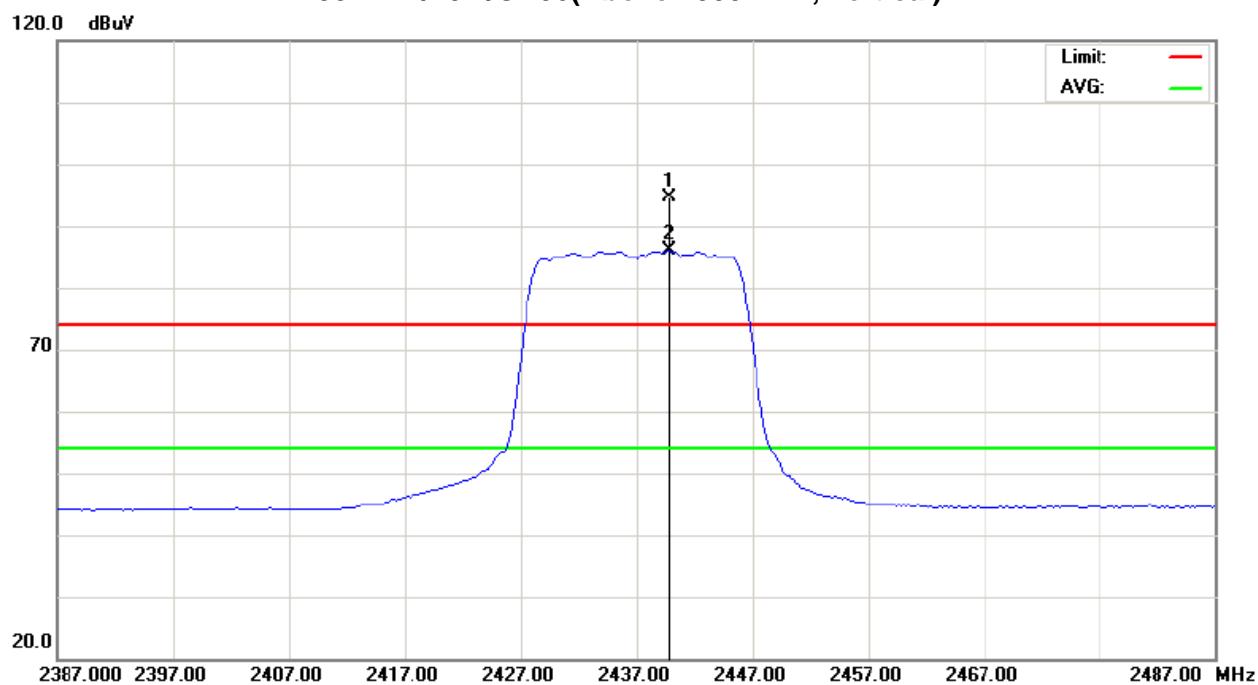**Orthogonal Axis : X****802.11n/20M/CH06(Above 1000 MHz, Vertical)**



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2433.80	H	66.39	57.13	32.10	98.49	89.23			X/F
4873.80	H	46.36	35.08	3.90	50.26	38.98	74.00	54.00	X/H
7309.80	H	40.74	30.18	9.14	49.88	39.32	74.00	54.00	X/H
9750.00	H	42.19	31.90	12.12	54.31	44.02	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/20M/CH06(Above 1000 MHz, Horizontal)

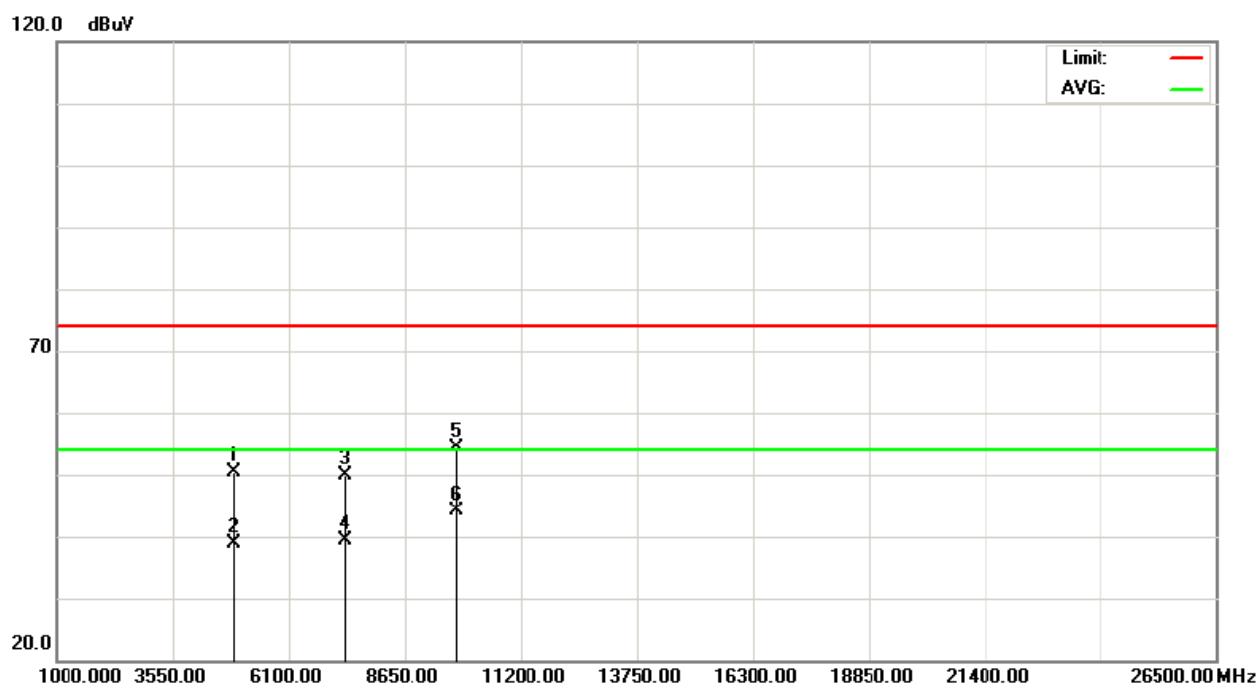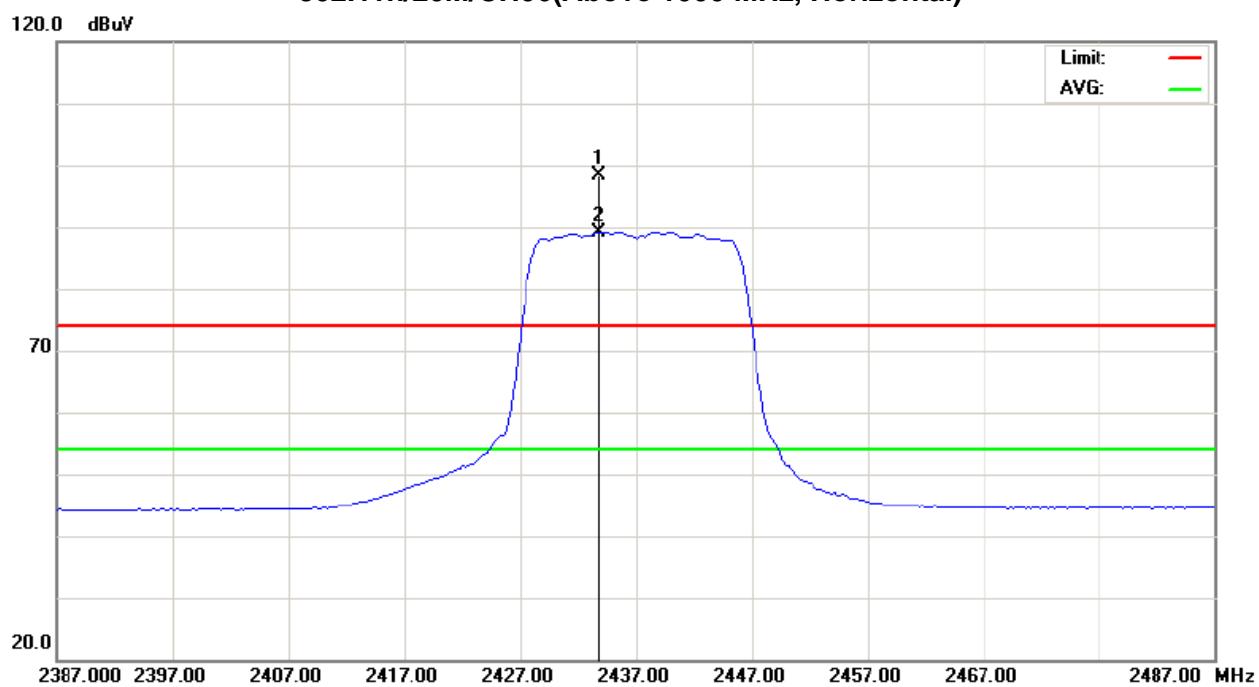





EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH11		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2465.20	V	64.06	53.43	32.22	96.28	85.65			X/F
2483.50	V	24.96	12.32	32.29	57.25	44.61	74.00	54.00	X/H
4924.00	V	45.95	33.48	4.06	50.01	37.54	74.00	54.00	X/H
7384.40	V	42.86	31.63	9.26	52.12	40.89	74.00	54.00	X/H
9849.80	V	42.49	32.06	12.27	54.76	44.33	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

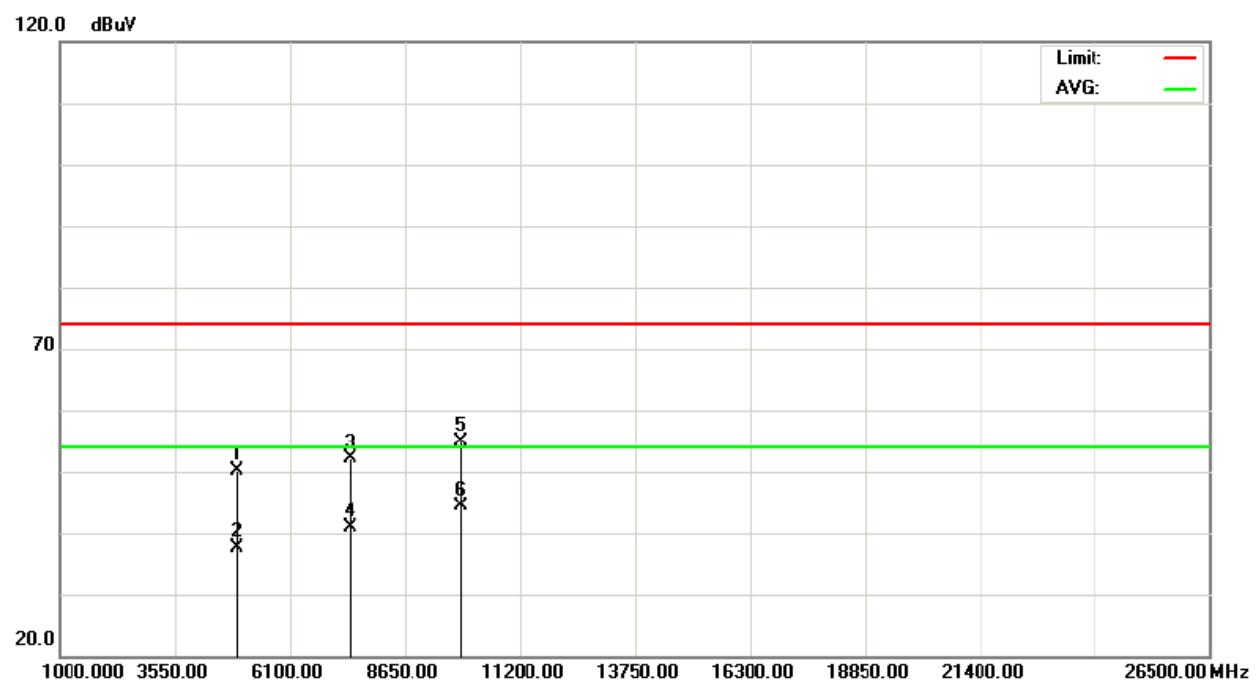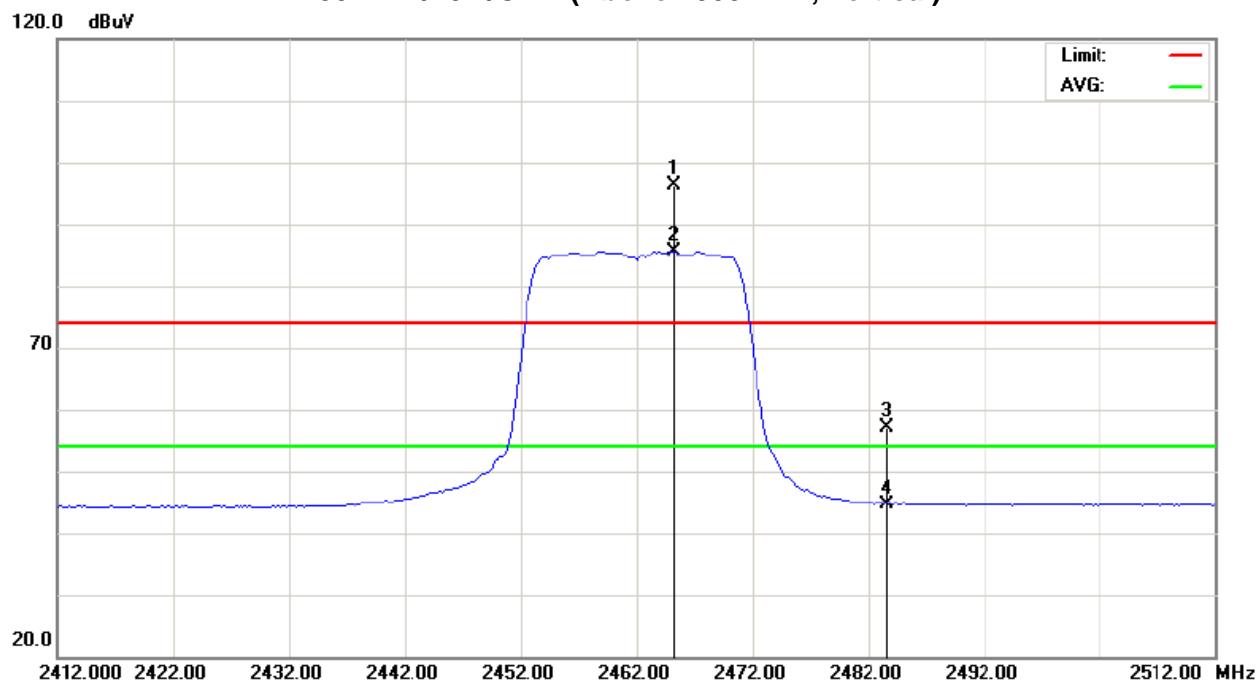**Orthogonal Axis : X****802.11n/20M/CH11(Above 1000 MHz, Vertical)**



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH11		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2458.80	H	66.71	57.07	32.19	98.90	89.26			X/F
2483.50	H	21.46	12.79	32.29	53.75	45.08	74.00	54.00	X/H
4923.80	H	45.54	33.17	4.06	49.60	37.23	74.00	54.00	X/H
7384.20	H	41.20	31.31	9.26	50.46	40.57	74.00	54.00	X/H
9849.80	H	42.44	31.83	12.27	54.71	44.10	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/20M/CH11(Above 1000 MHz, Horizontal)

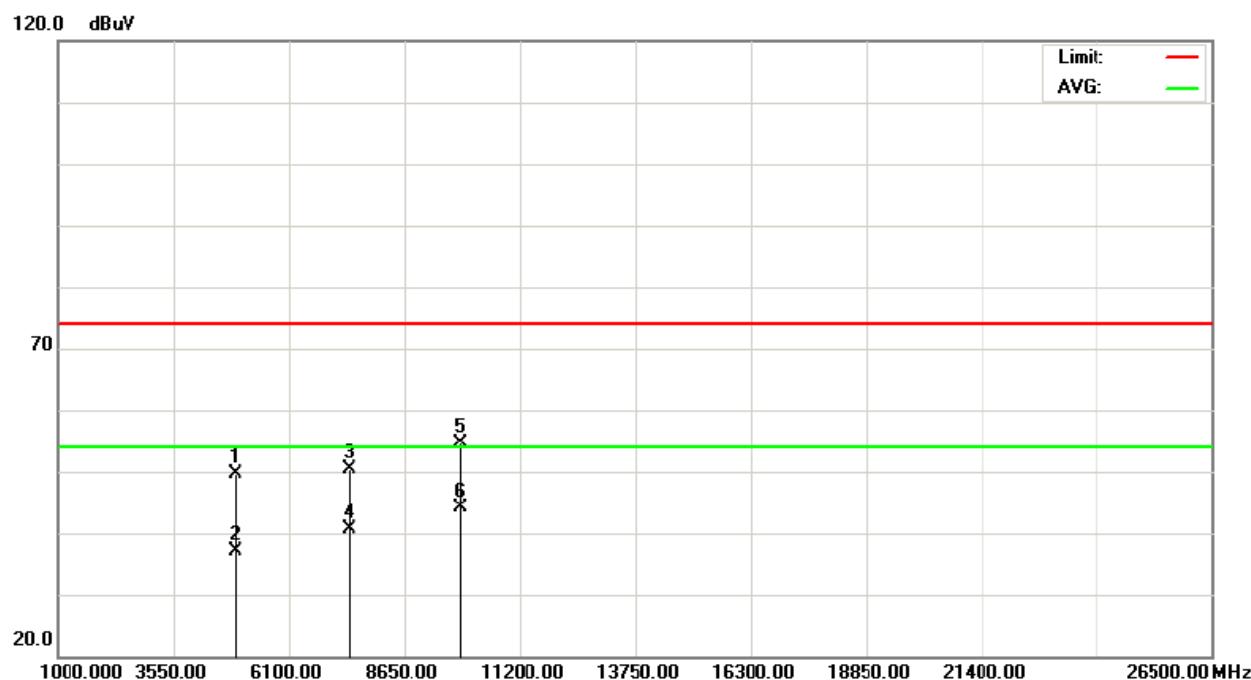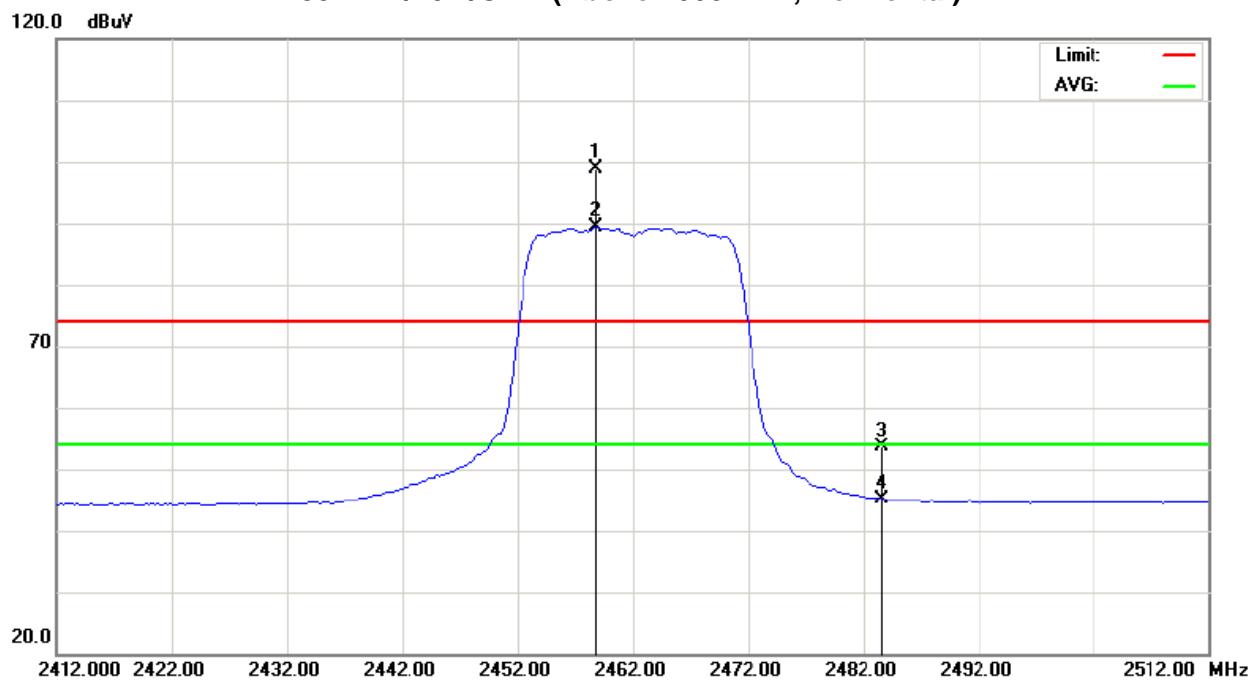



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	23.12	12.66	31.93	55.05	44.59	74.00	54.00	X/H
2425.60	V	56.82	47.59	32.06	88.88	79.65			X/F
4844.80	V	42.55	32.37	3.81	46.36	36.18	74.00	54.00	X/H
7262.00	V	42.55	31.63	9.06	51.61	40.69	74.00	54.00	X/H
9692.00	V	42.21	32.02	12.03	54.24	44.05	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/40M/CH03(Above 1000 MHz, Vertical)

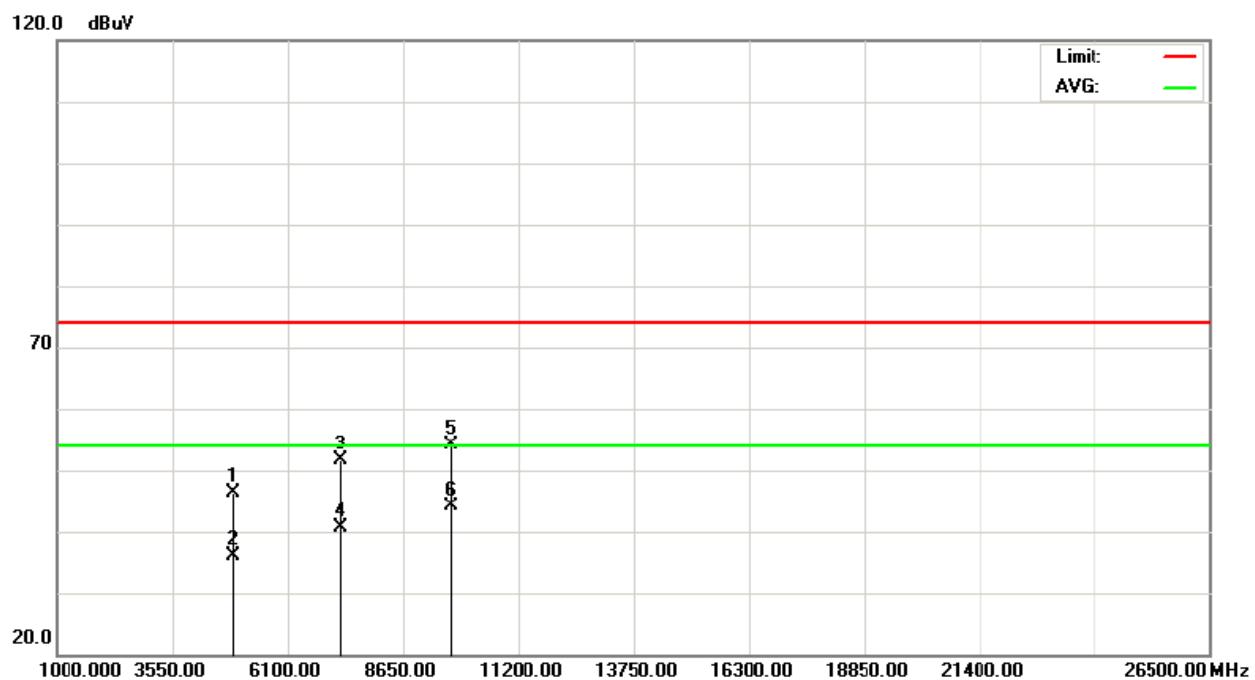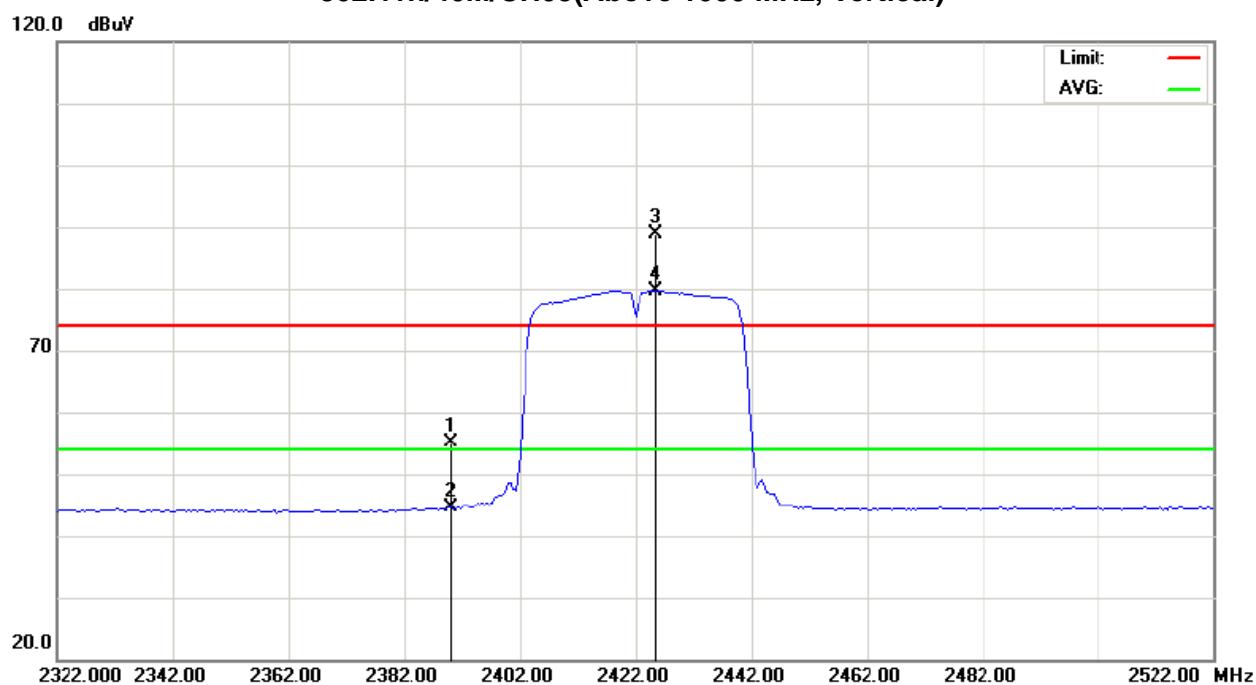



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	25.67	13.98	31.93	57.60	45.91	74.00	54.00	X/H
2418.40	H	60.93	51.61	32.04	92.97	83.65			X/F
4842.80	H	39.78	30.76	3.81	43.59	34.57	74.00	54.00	X/H
7263.20	H	41.05	31.38	9.07	50.12	40.45	74.00	54.00	X/H
9683.20	H	42.20	31.84	12.01	54.21	43.85	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/40M/CH03(Above 1000 MHz, Horizontal)

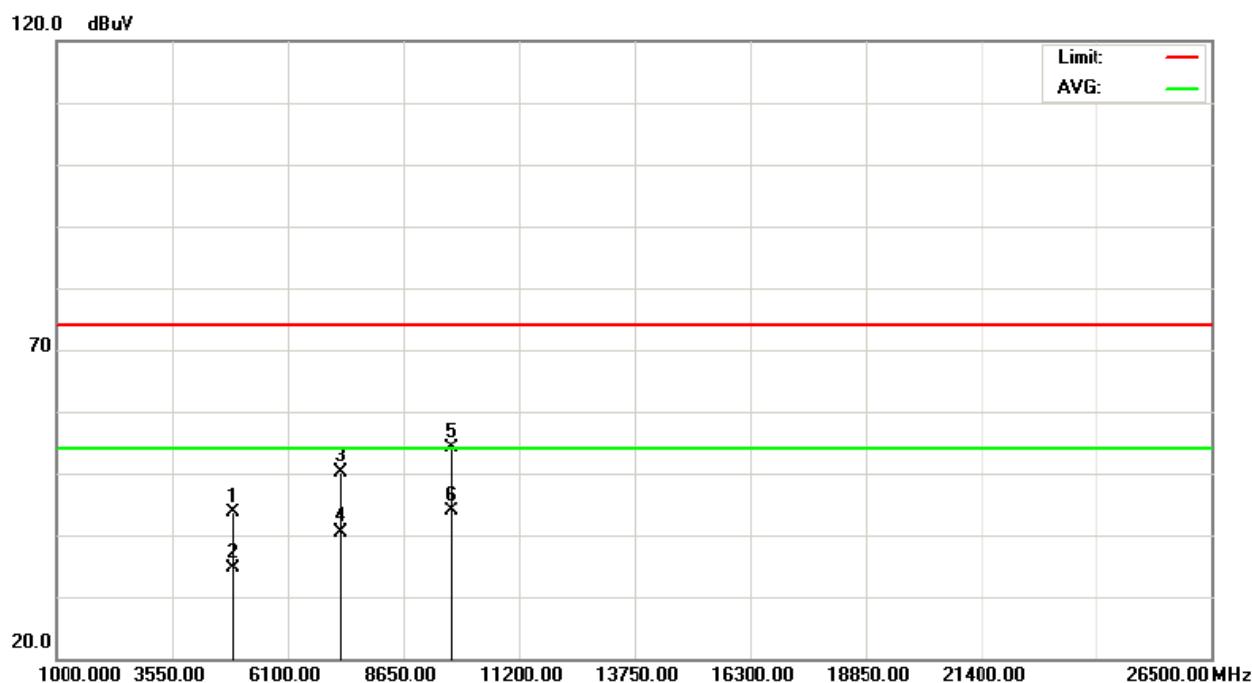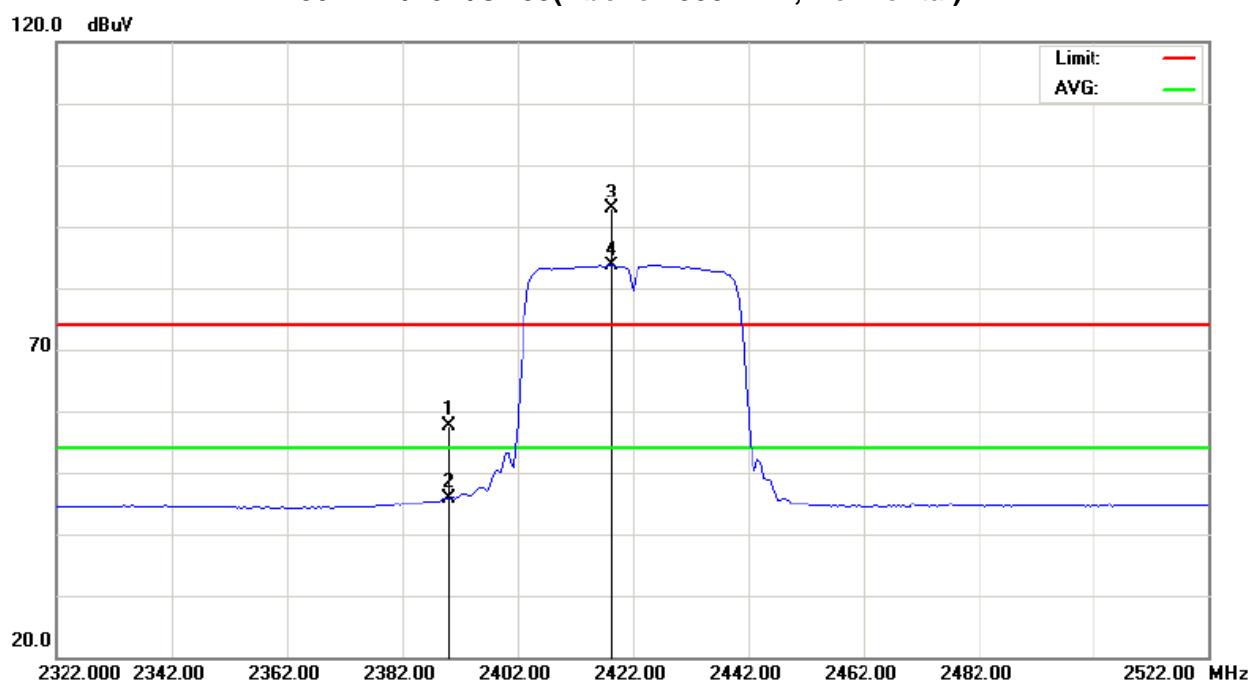



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2446.20	V	58.85	50.50	32.14	90.99	82.64			X/F
4874.00	V	42.63	32.36	3.90	46.53	36.26	74.00	54.00	X/H
7315.40	V	39.98	29.91	9.15	49.13	39.06	74.00	54.00	X/H
9743.60	V	42.95	31.63	12.11	55.06	43.74	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11n/40M/CH06(Above 1000 MHz, Vertical)

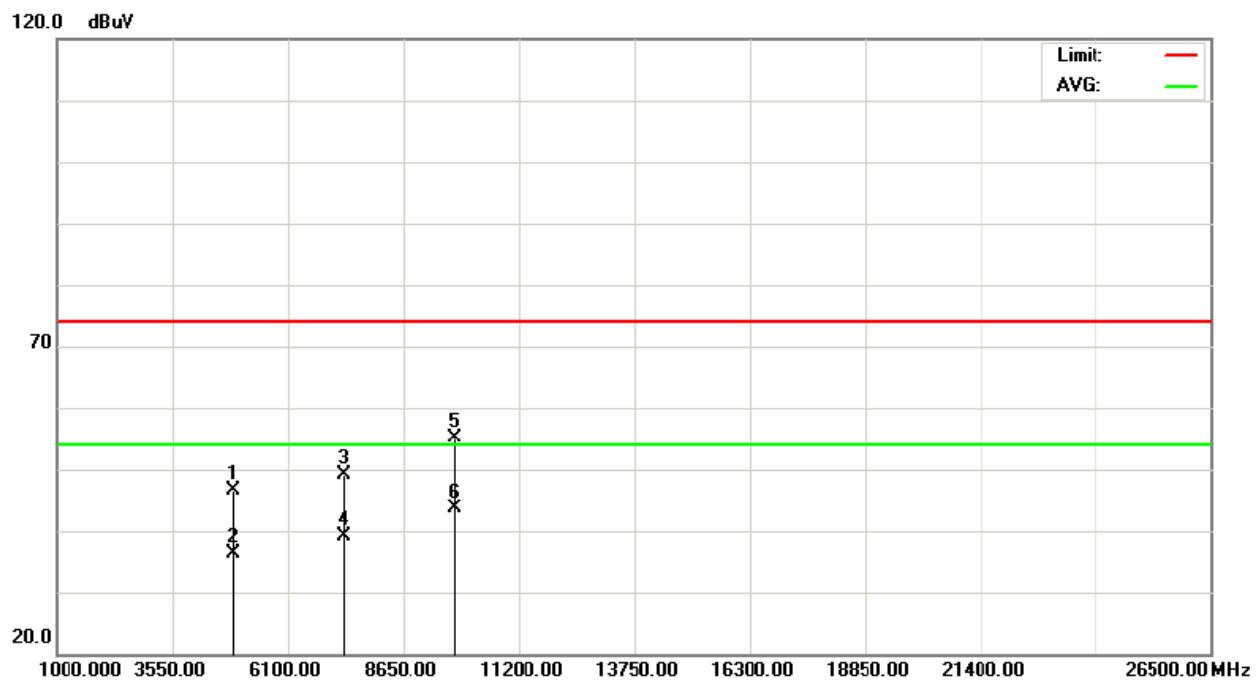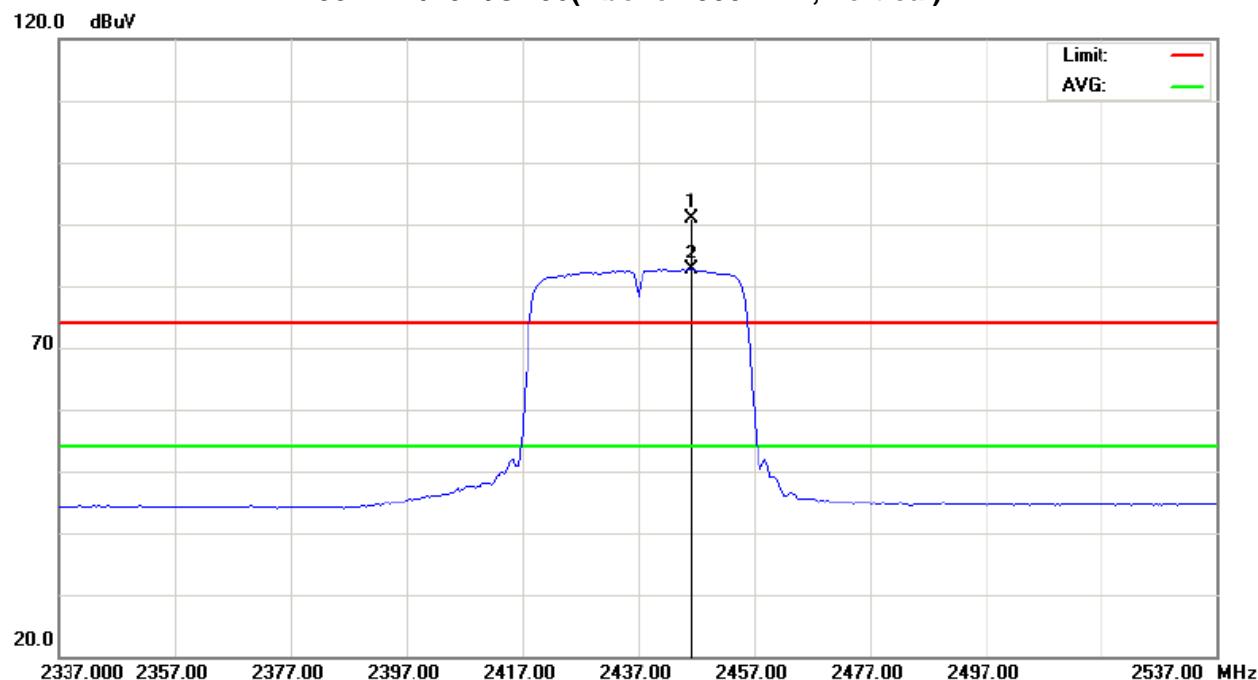



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2433.40	H	62.34	54.35	32.09	94.43	86.44			X/F
4874.00	H	40.00	33.18	3.90	43.90	37.08	74.00	54.00	X/H
7308.60	H	40.50	29.90	9.14	49.64	39.04	74.00	54.00	X/H
9751.20	H	41.41	31.42	12.12	53.53	43.54	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/40M/CH06(Above 1000 MHz, Horizontal)

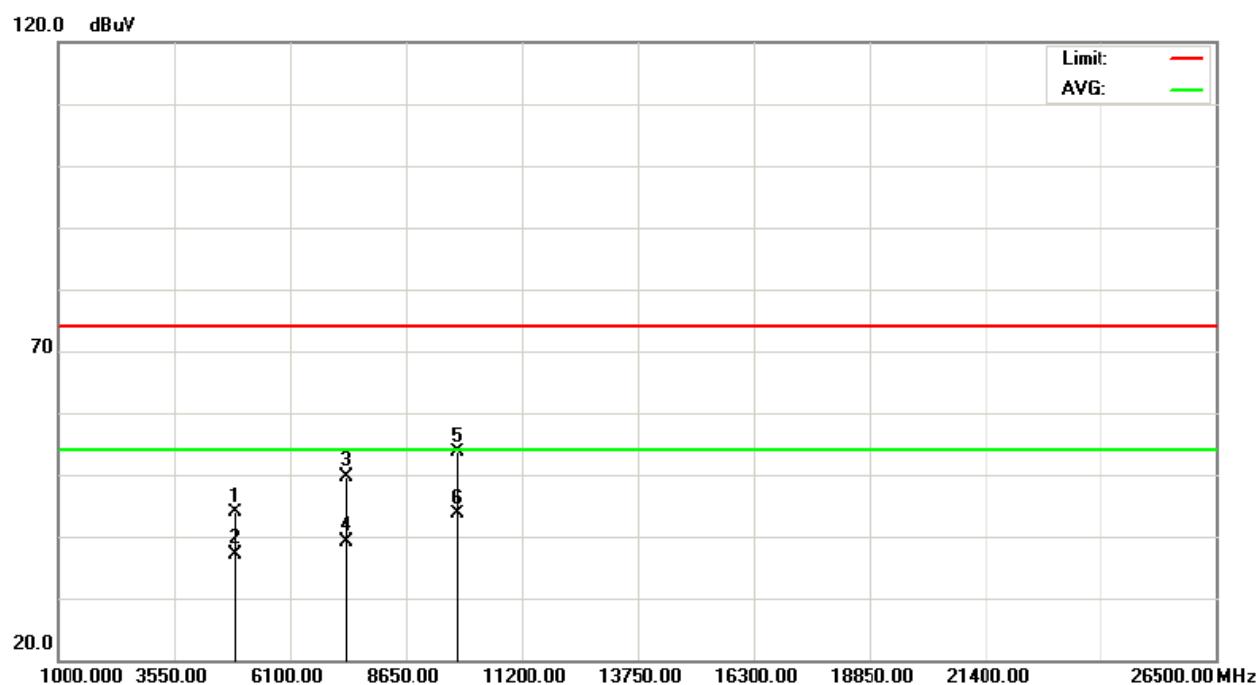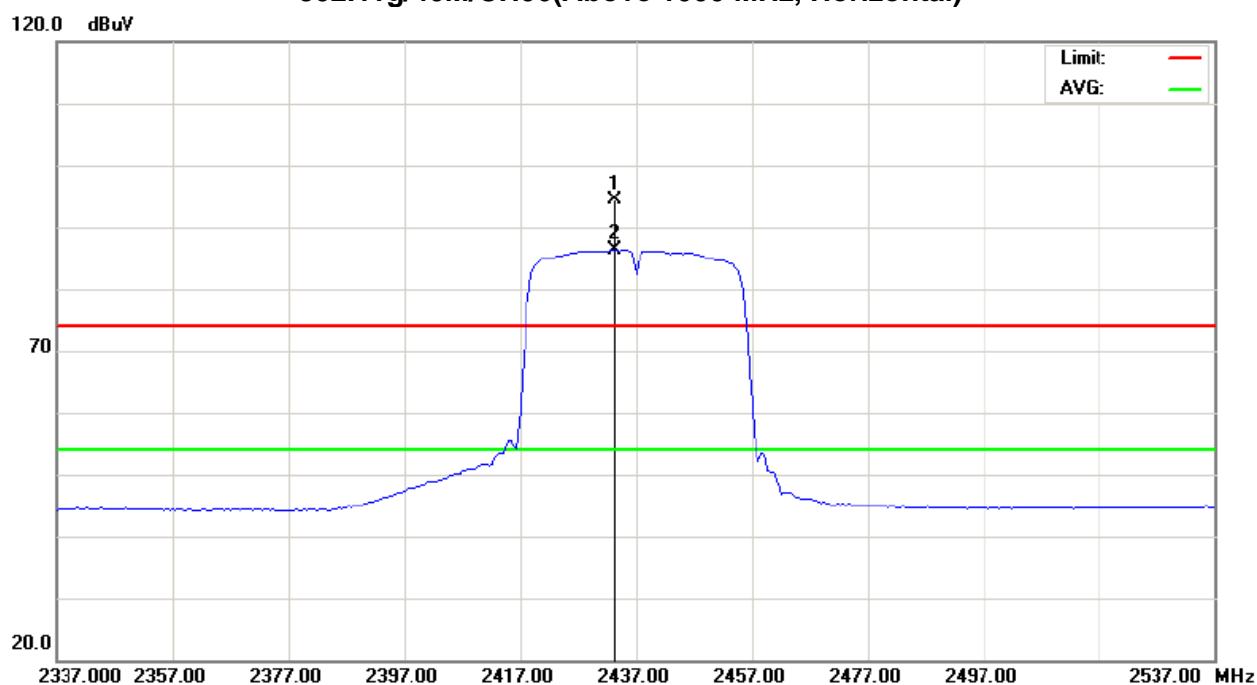



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH09		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2455.20	V	59.20	50.39	32.18	91.38	82.57			X/F
2483.50	V	23.29	12.83	32.29	55.58	45.12	74.00	54.00	X/H
4903.60	V	42.73	33.15	4.00	46.73	37.15	74.00	54.00	X/H
7354.00	V	41.17	31.29	9.21	50.38	40.50	74.00	54.00	X/H
9810.40	V	41.42	32.00	12.21	53.63	44.21	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/40M/CH09(Above 1000 MHz, Vertical)

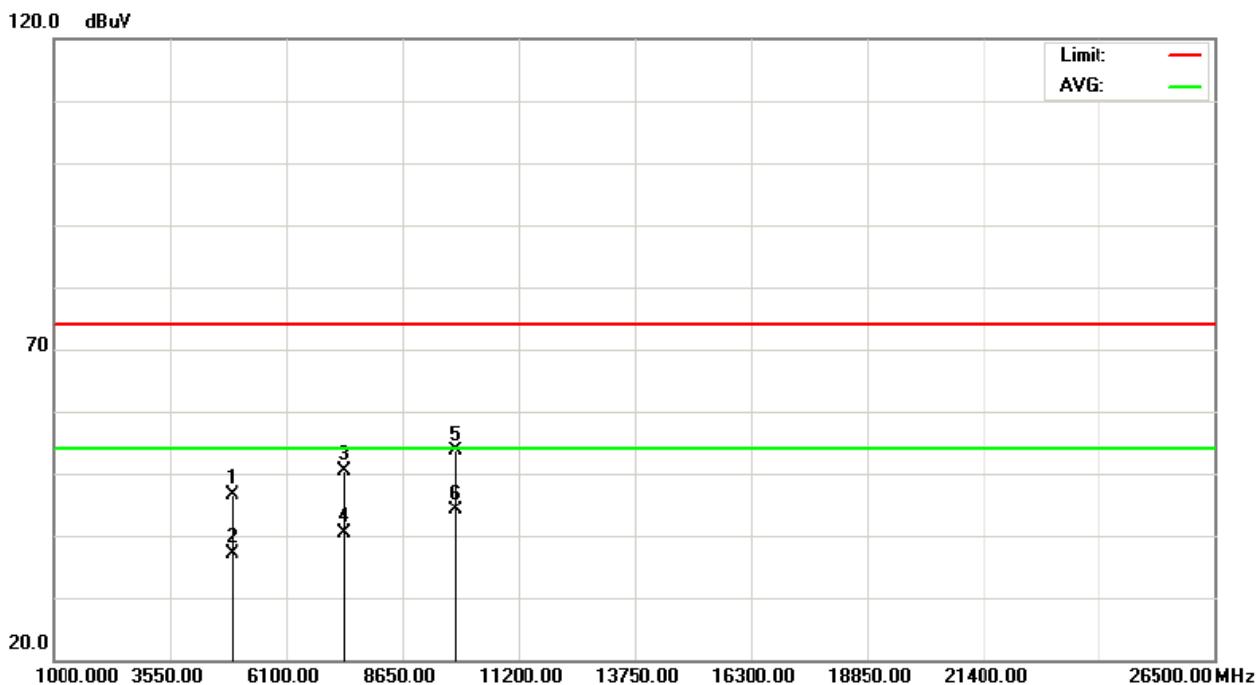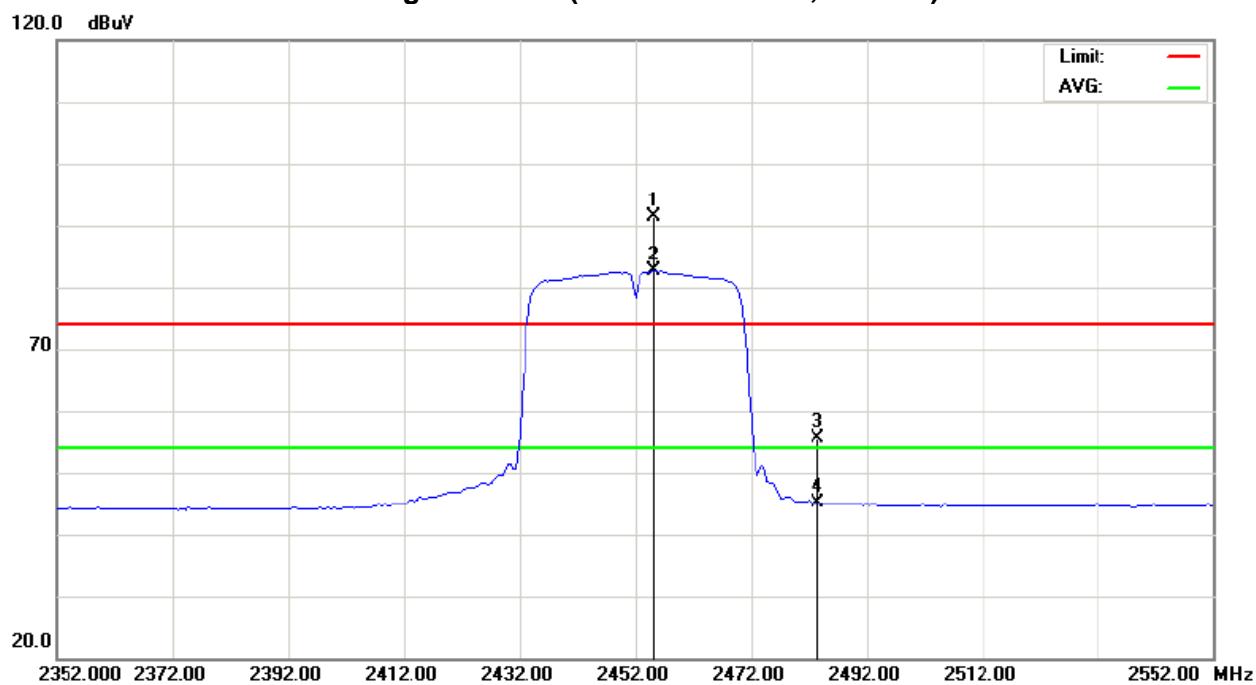



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH09		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2448.40	H	62.51	53.89	32.15	94.66	86.04			X/F
2483.50	H	23.02	13.14	32.29	55.31	45.43	74.00	54.00	X/H
4904.40	H	42.33	31.27	4.00	46.33	35.27	74.00	54.00	X/H
7358.80	H	41.48	31.18	9.22	50.70	40.40	74.00	54.00	X/H
9810.40	H	41.47	31.94	12.21	53.68	44.15	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/40M/CH09(Above 1000 MHz, Horizontal)

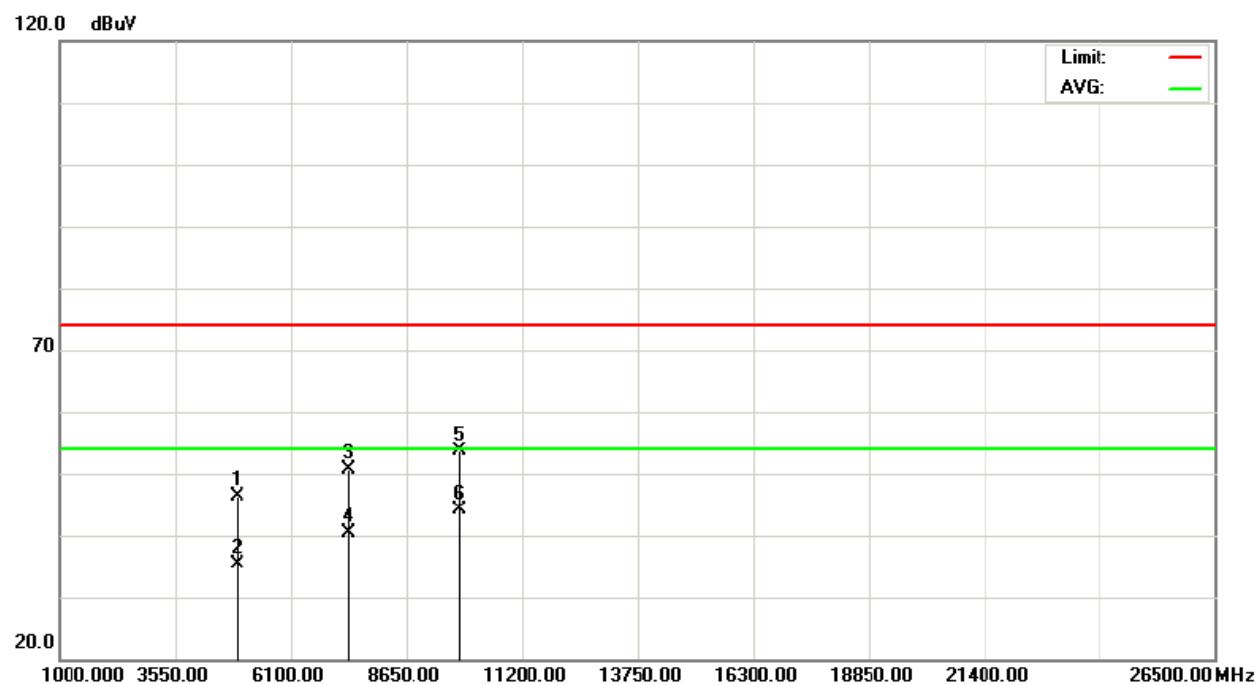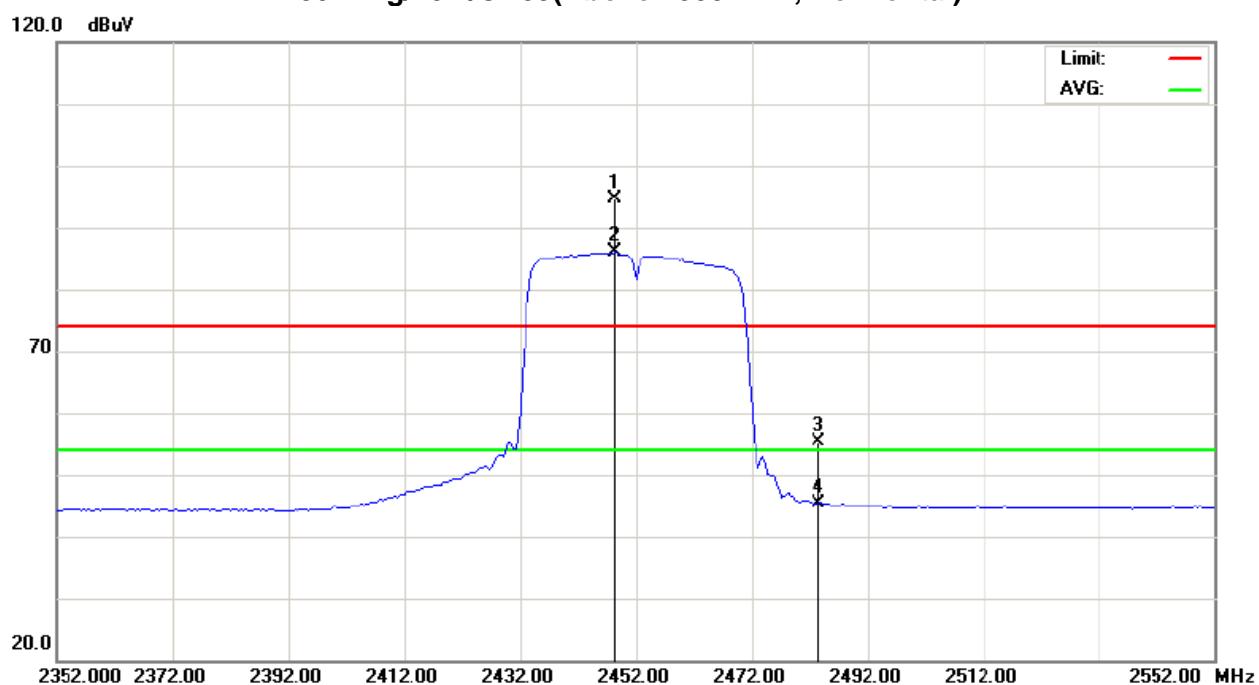

**4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS**

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	23.64	12.23	31.93	55.57	44.16	74.00	54.00	X
2483.50	V	21.34	12.30	32.29	53.63	44.59	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Vertical)

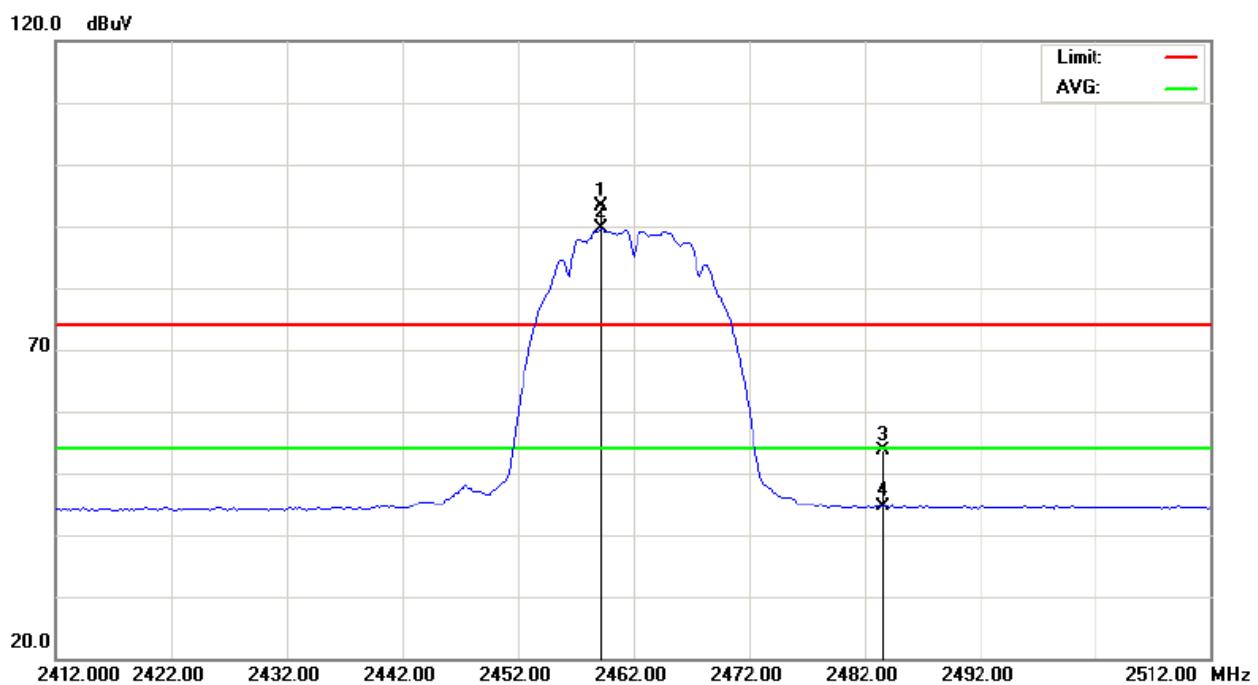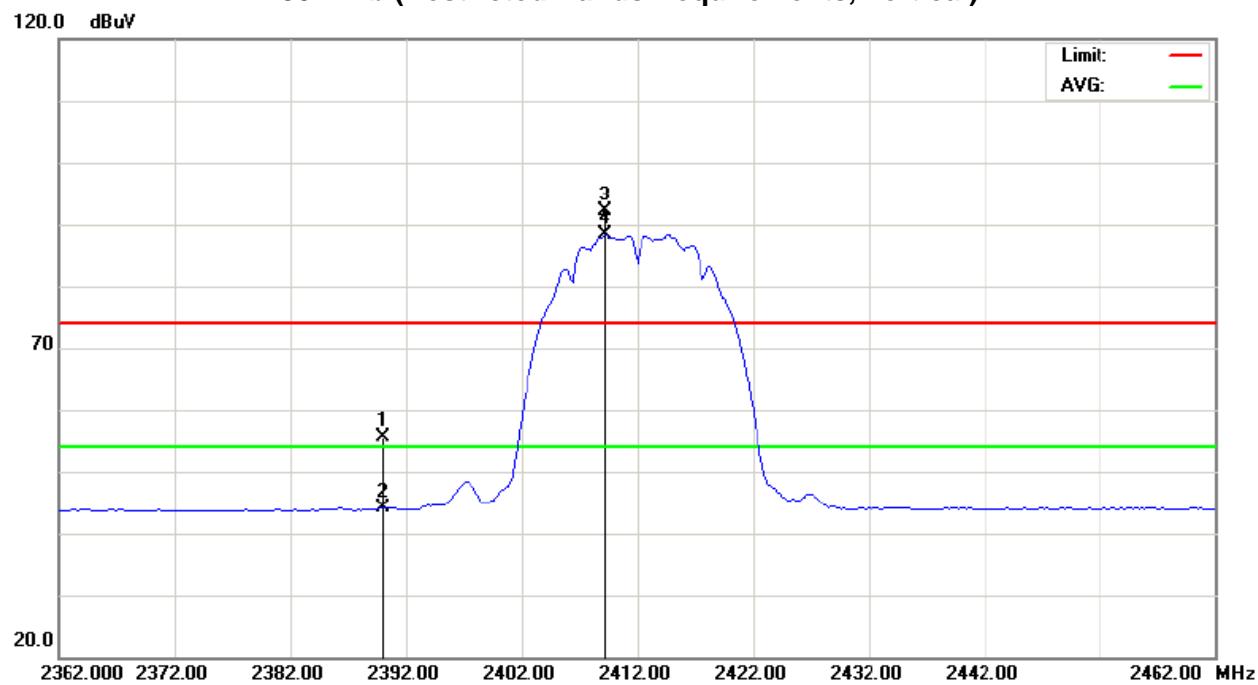



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b(Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	22.66	12.92	31.93	54.59	44.85	74.00	54.00	X
2483.50	H	21.97	12.62	32.29	54.26	44.91	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11b (Restricted Bands Requirements, Horizontal)

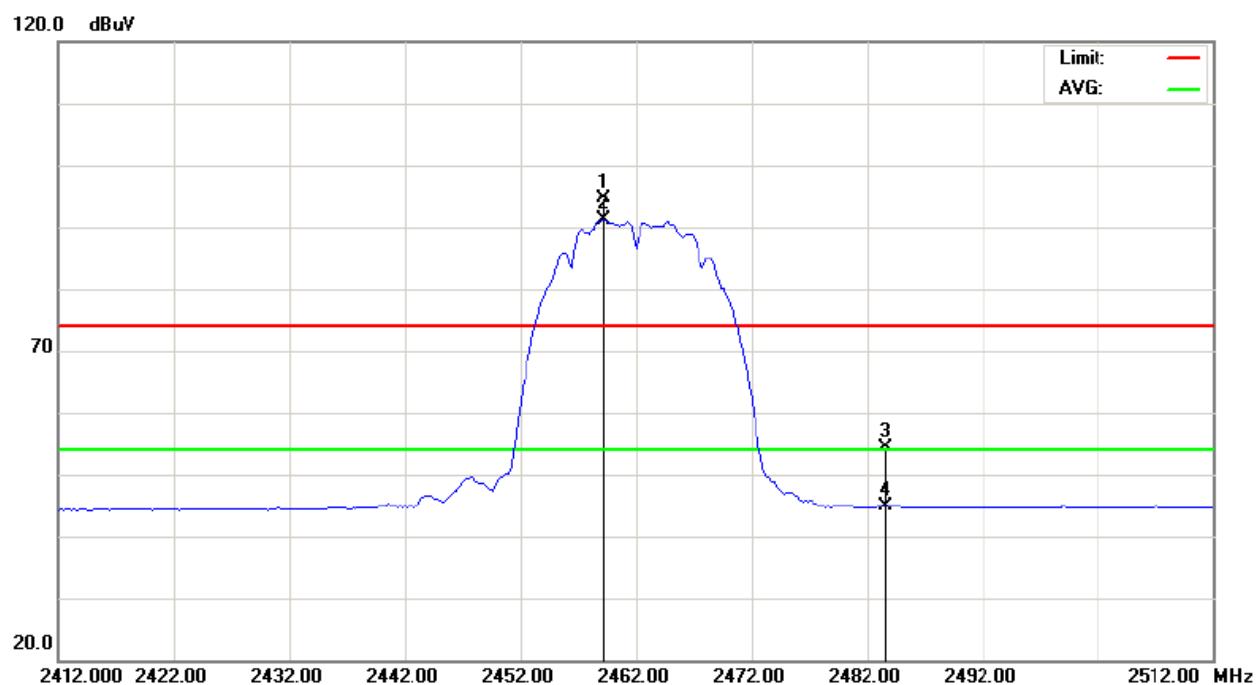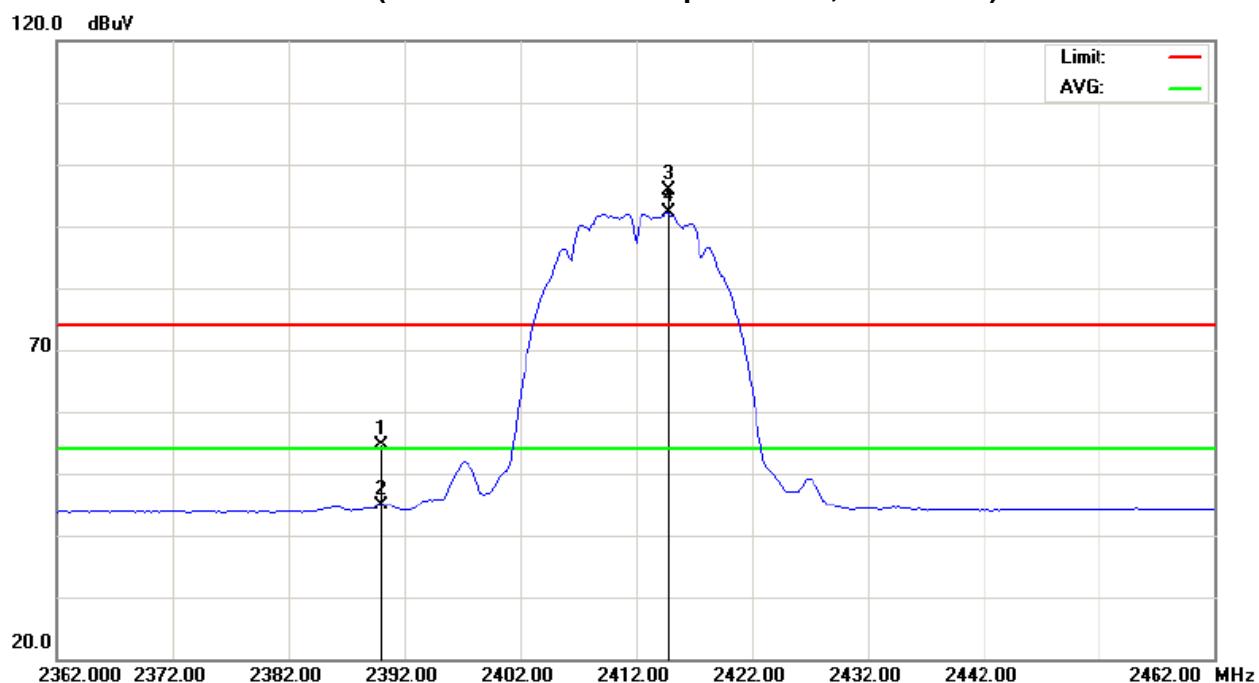



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	25.32	13.80	31.93	57.25	45.73	74.00	54.00	X
2483.50	V	21.67	12.99	32.29	53.96	45.28	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Vertical)

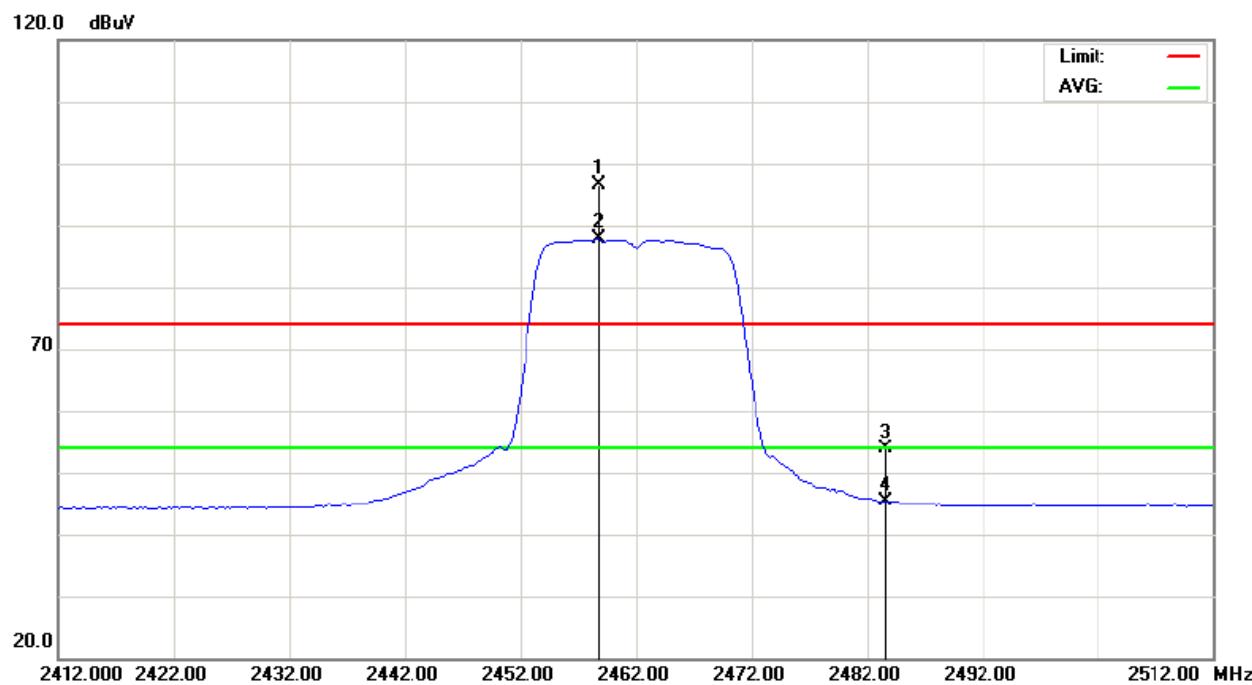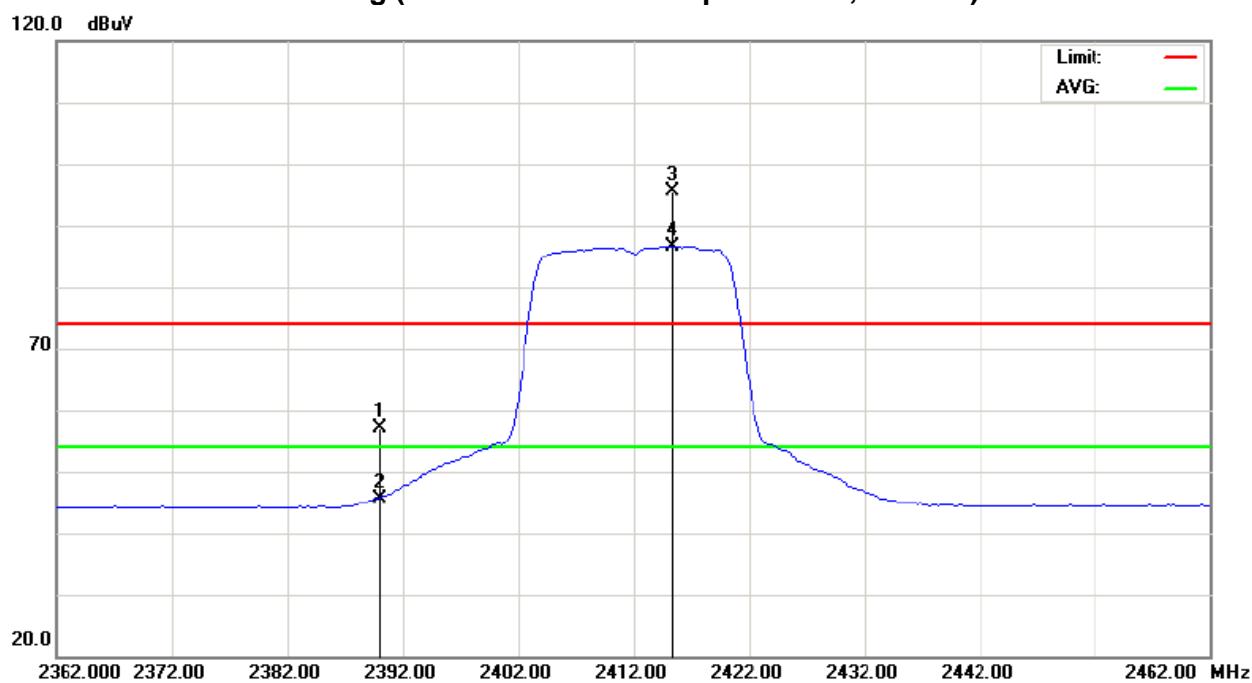



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g(Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	29.27	5.96	31.93	61.20	37.89	74.00	54.00	X
2483.50	H	25.83	13.47	32.29	58.12	45.76	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11g (Restricted Bands Requirements, Horizontal)

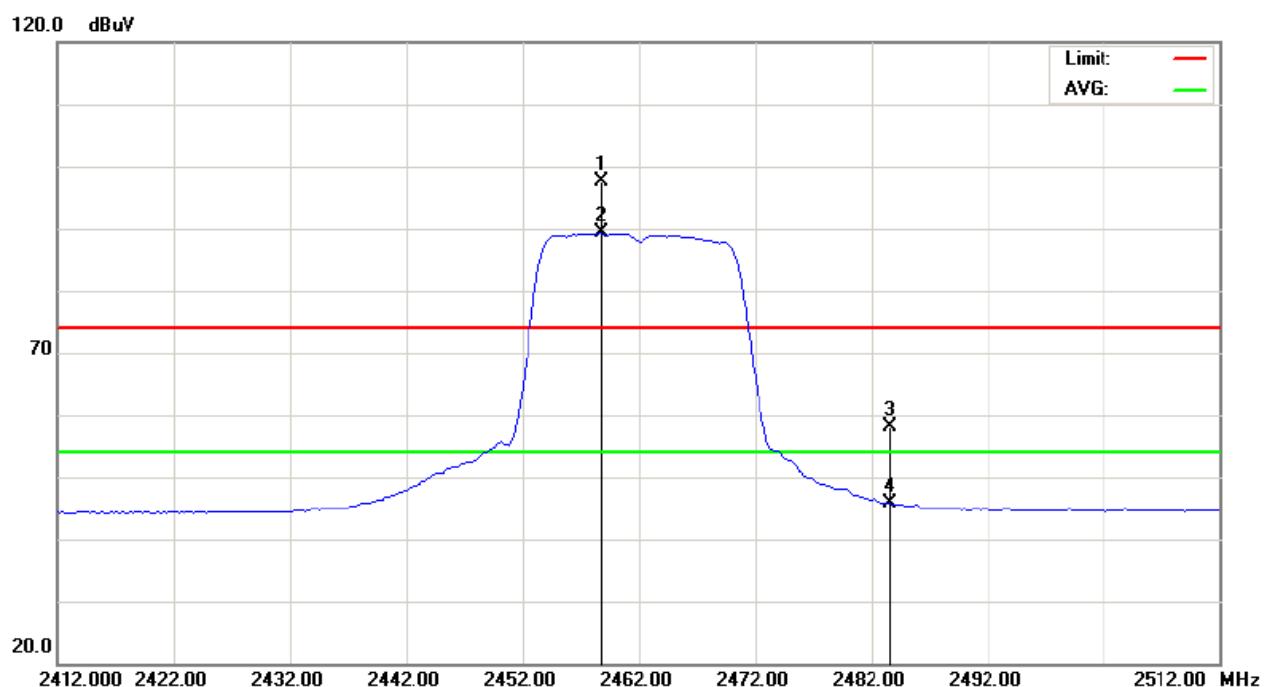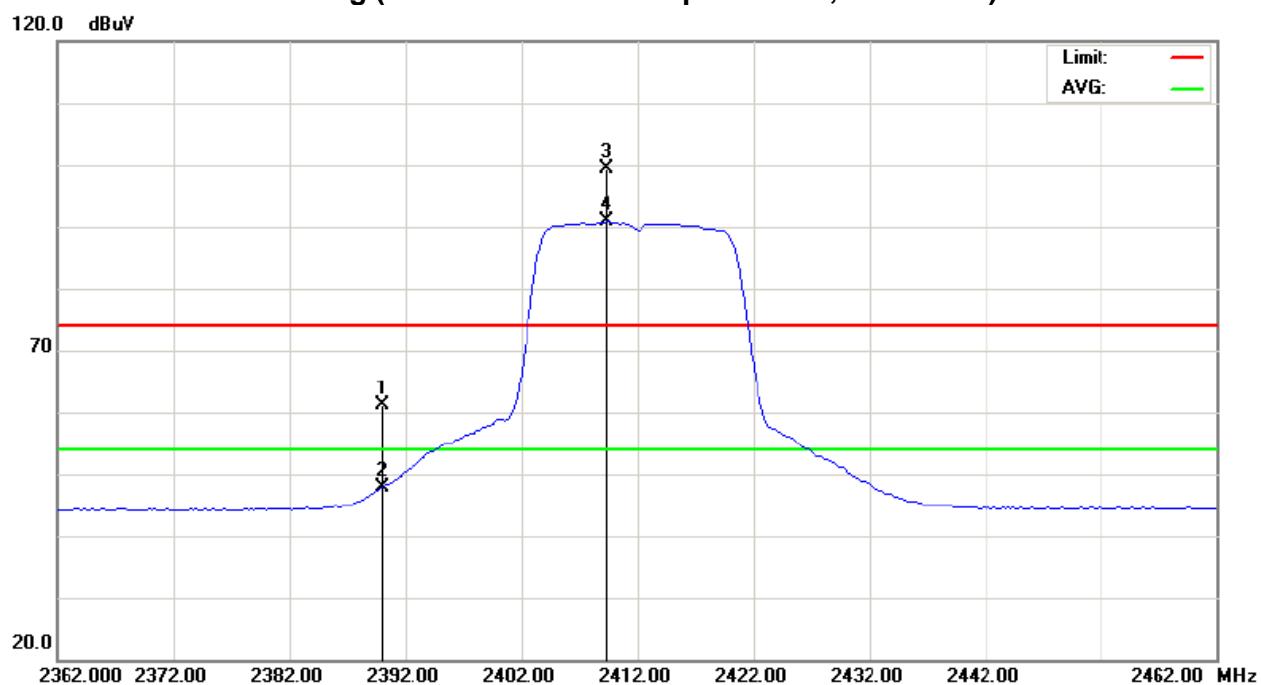



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	27.70	13.74	31.93	59.63	45.67	74.00	54.00	X
2483.50	V	24.96	12.32	32.29	57.25	44.61	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Vertical)

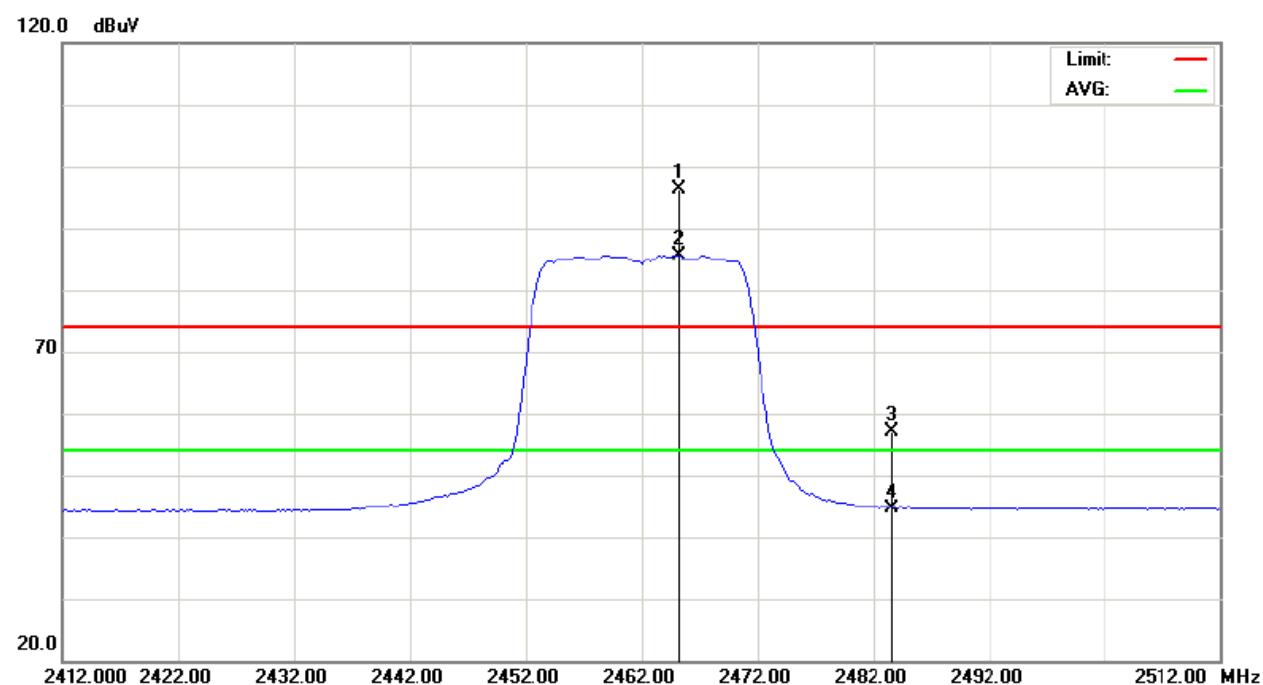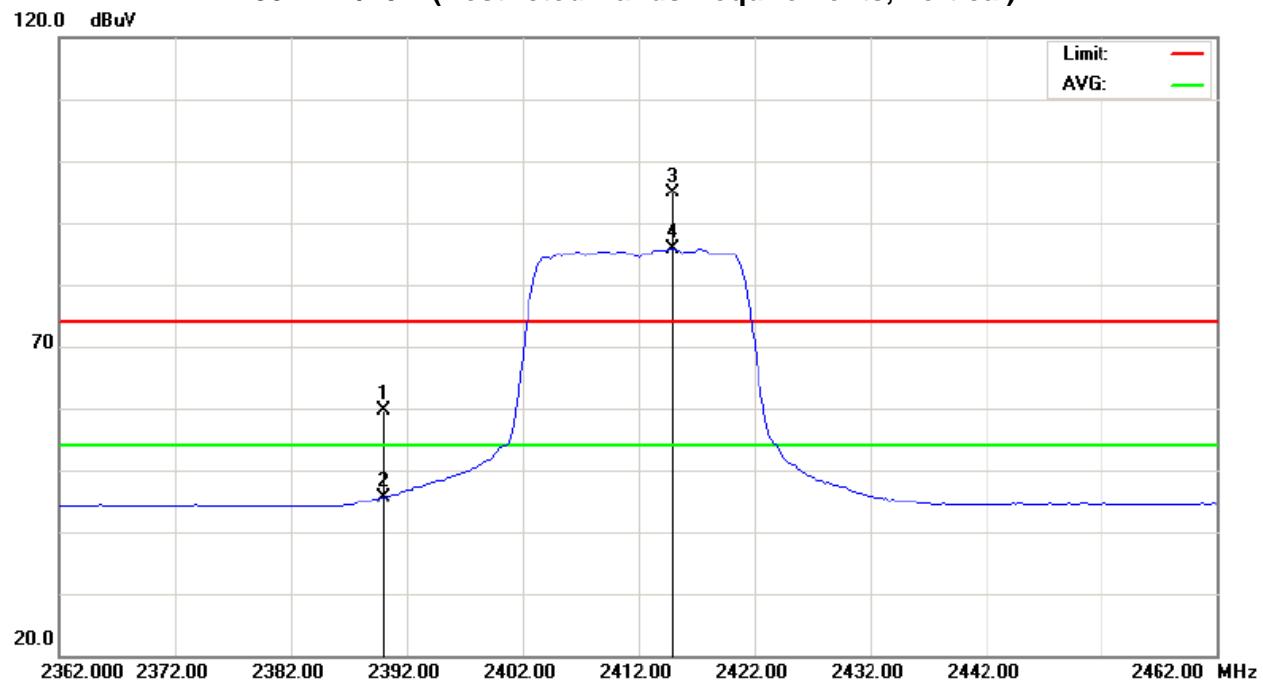



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M(Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	32.47	15.73	31.93	64.40	47.66	74.00	54.00	X
2483.50	H	21.46	12.79	32.29	53.75	45.08	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Horizontal)

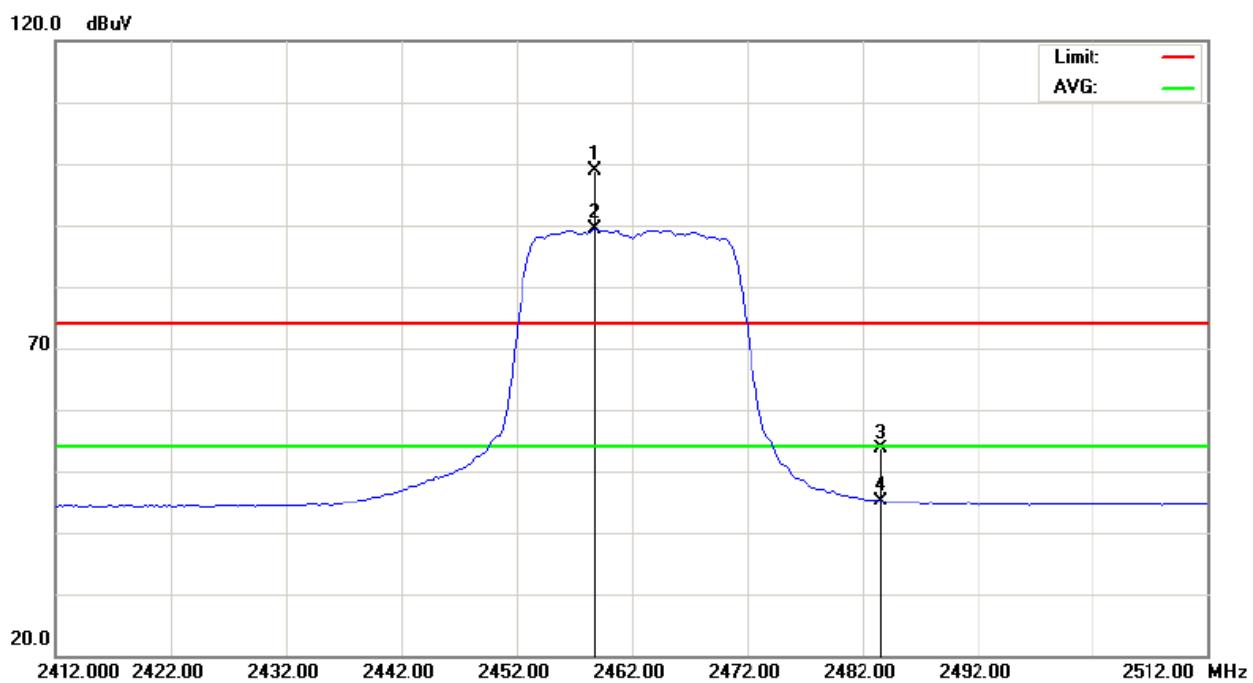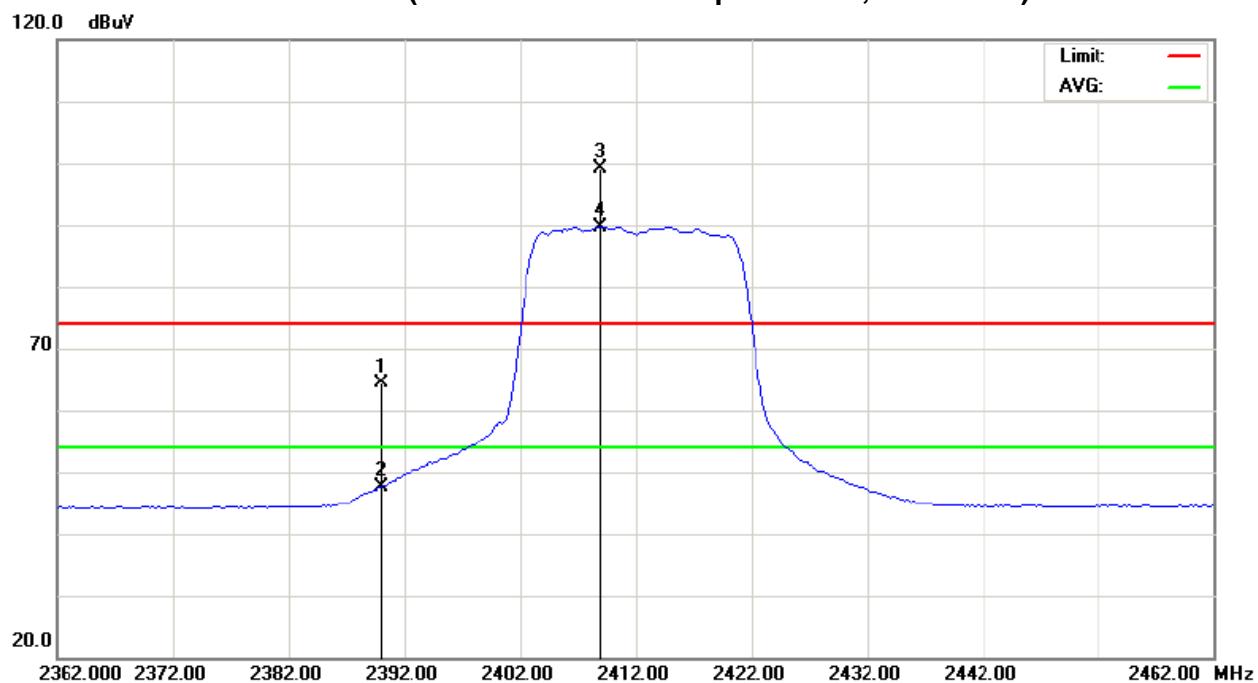





EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH03/CH09 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH03). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH09). Then the field strength was measured at 2483.5-2500 MHz.		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	23.12	12.66	31.93	55.05	44.59	74.00	54.00	X
2483.50	V	23.29	12.83	32.29	55.58	45.12	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

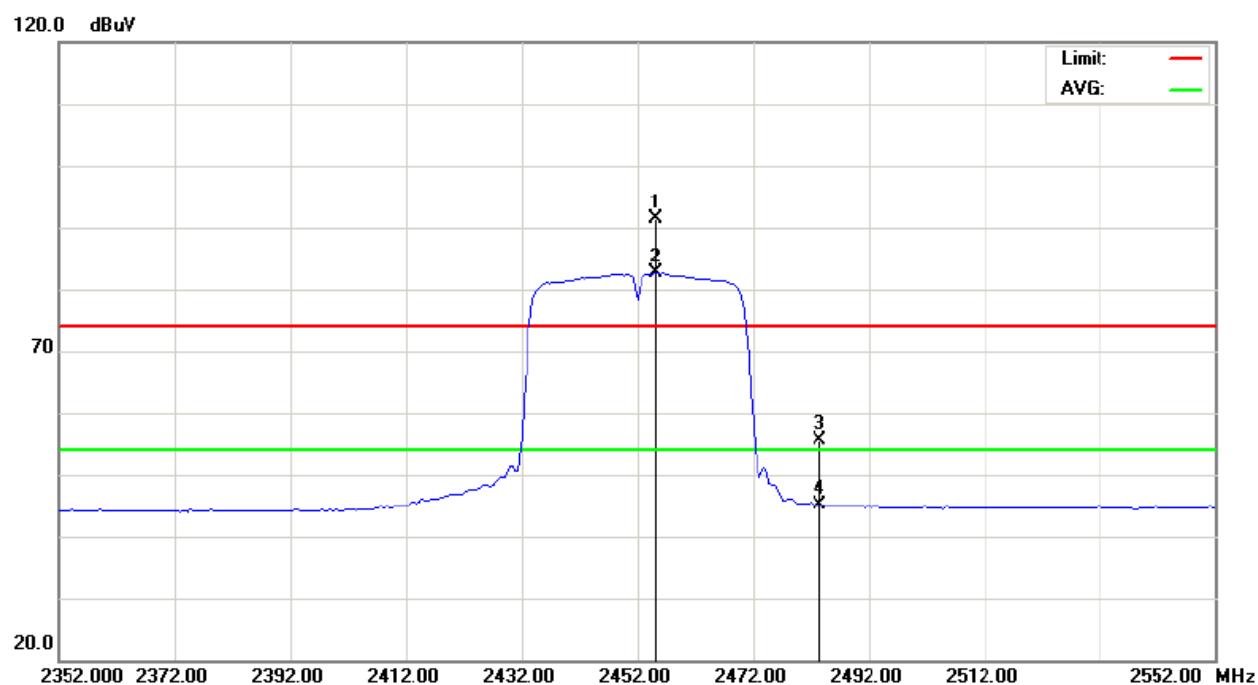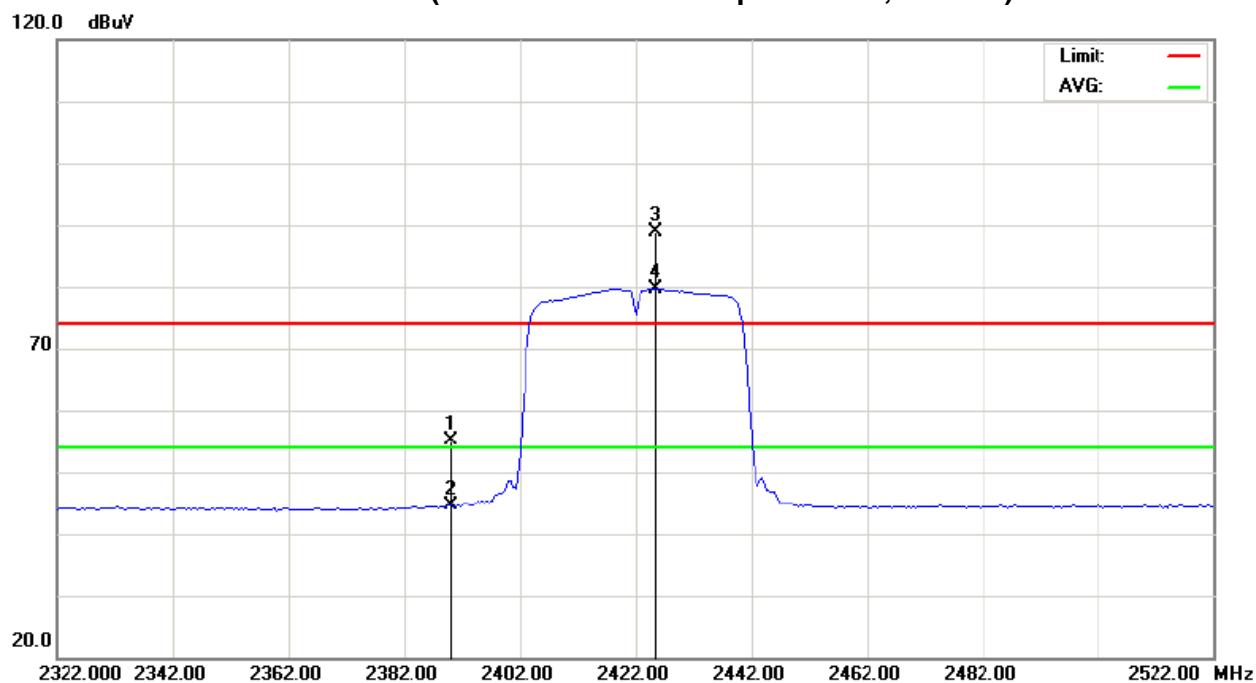**802.11n/40M (Restricted Bands Requirements, Vertical)**



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M(Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH03/CH09 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH03). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH09). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	25.67	13.98	31.93	57.60	45.91	74.00	54.00	X
2483.50	H	23.02	13.14	32.29	55.31	45.43	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11n/40M (Restricted Bands Requirements, Horizontal)

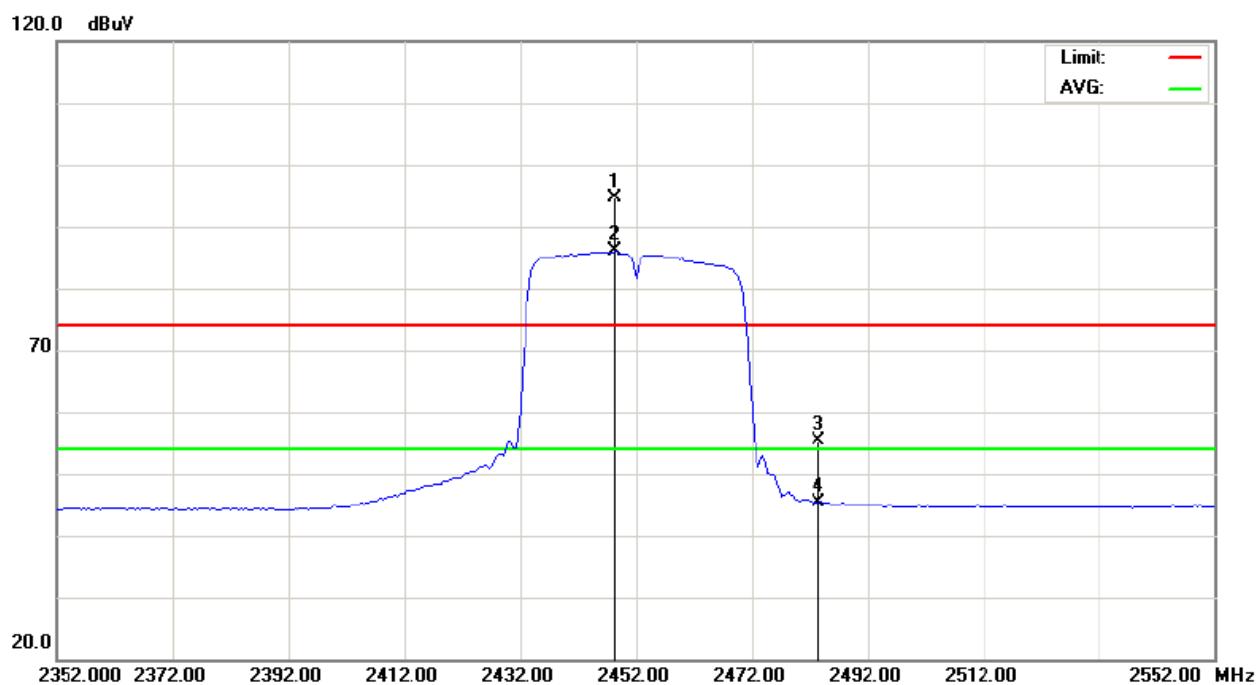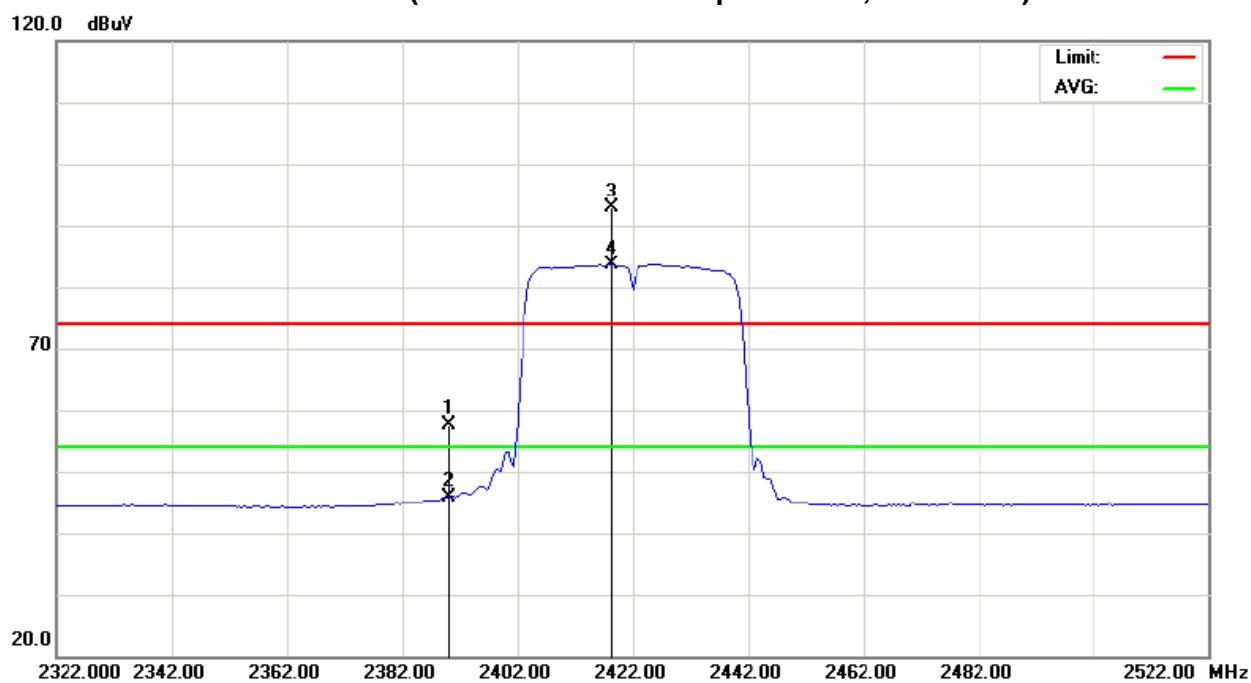



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP




5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.6 TEST RESULTS**


EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	12.24	>=500KHz
CH06	2437	12.20	>=500KHz
CH11	2462	12.20	>=500KHz

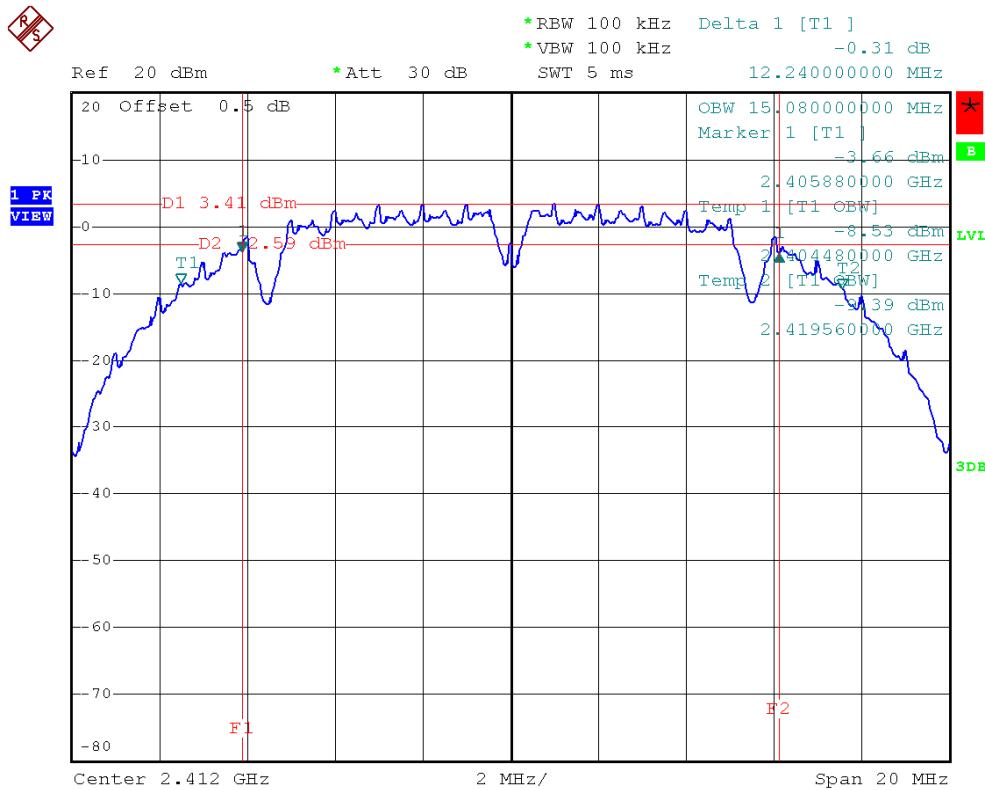
CH01



CH06

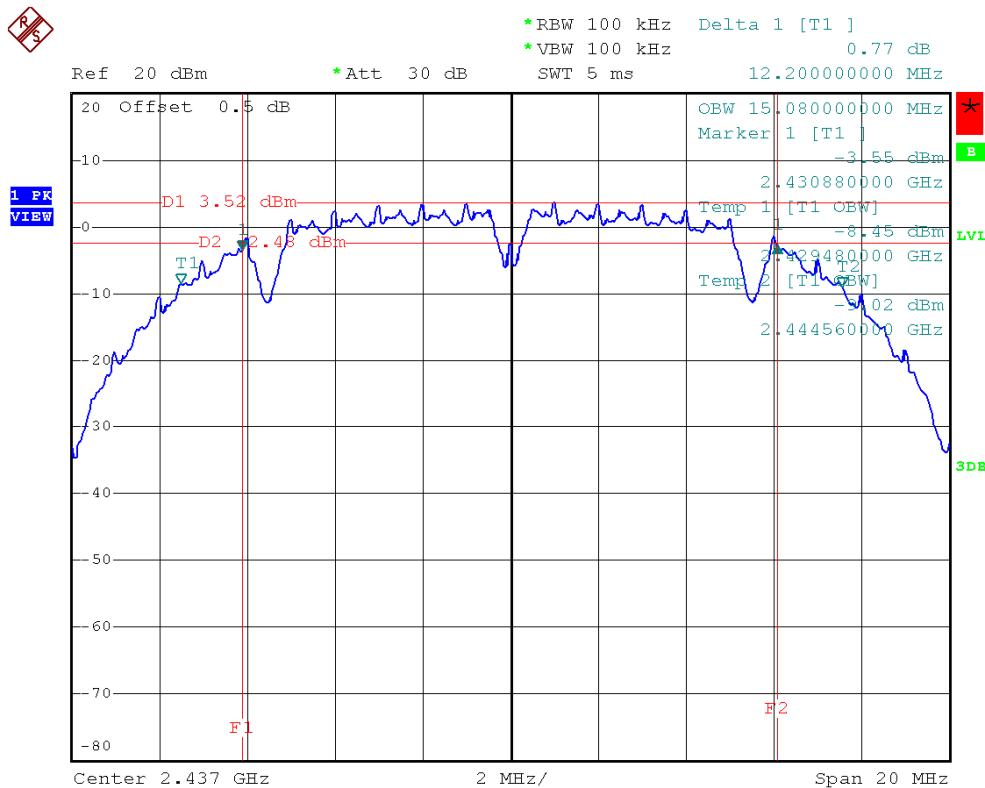


CH11

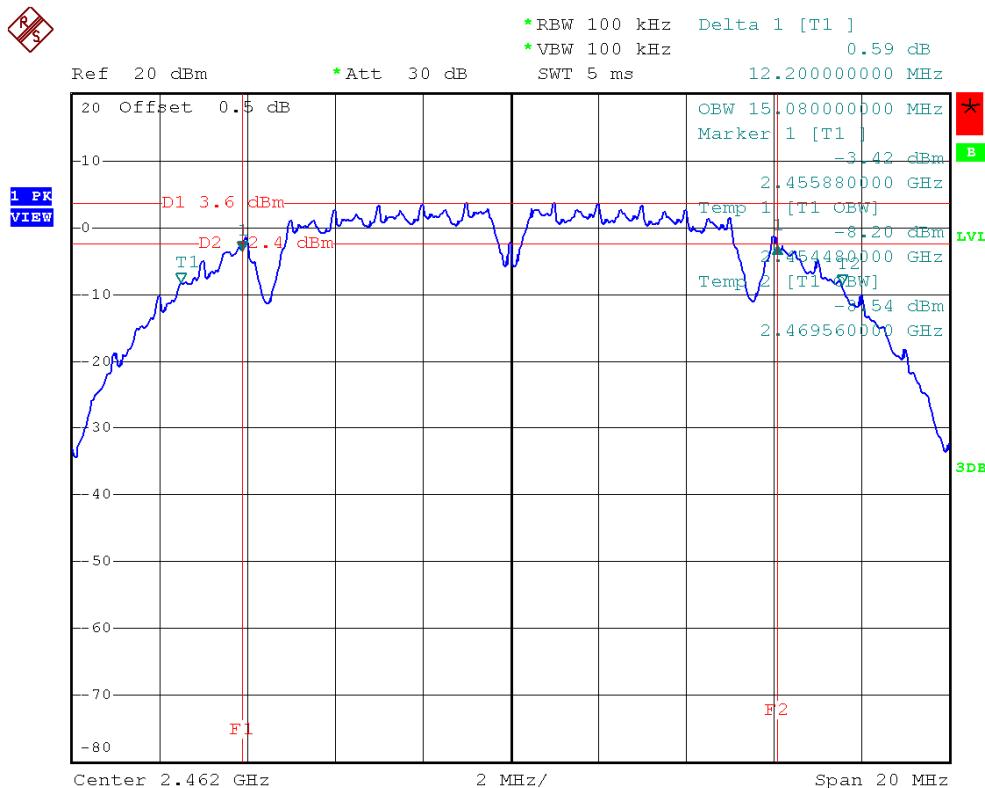




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	16.68	>=500KHz
CH06	2437	16.64	>=500KHz
CH11	2462	16.64	>=500KHz

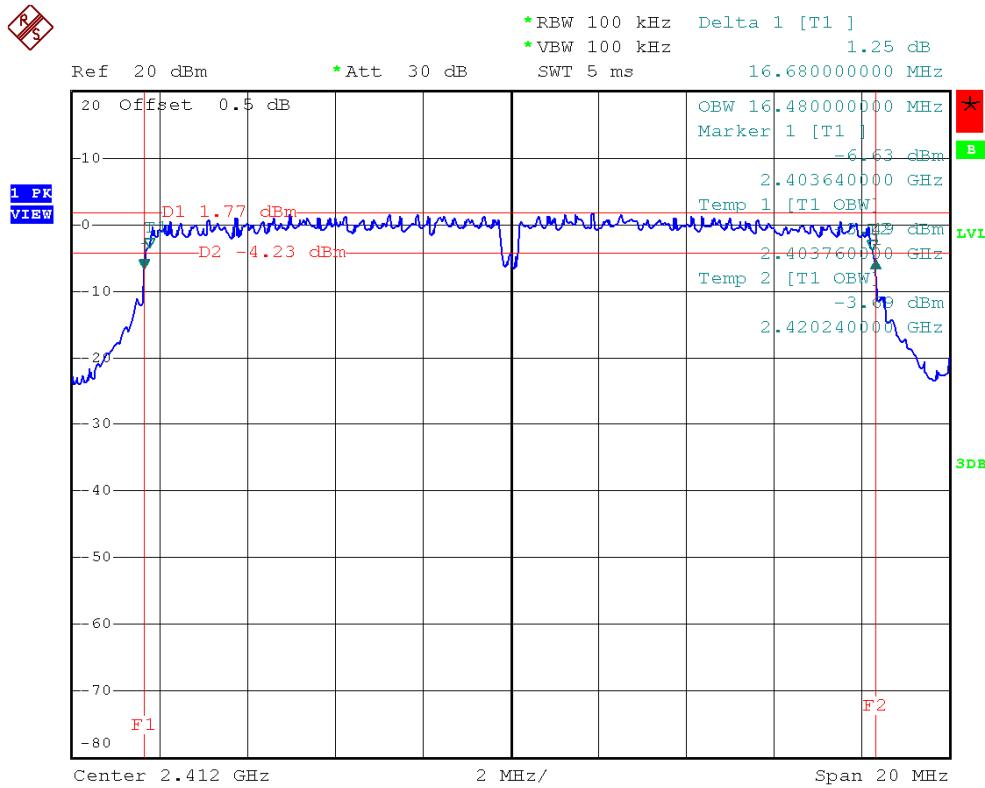
CH01



CH06

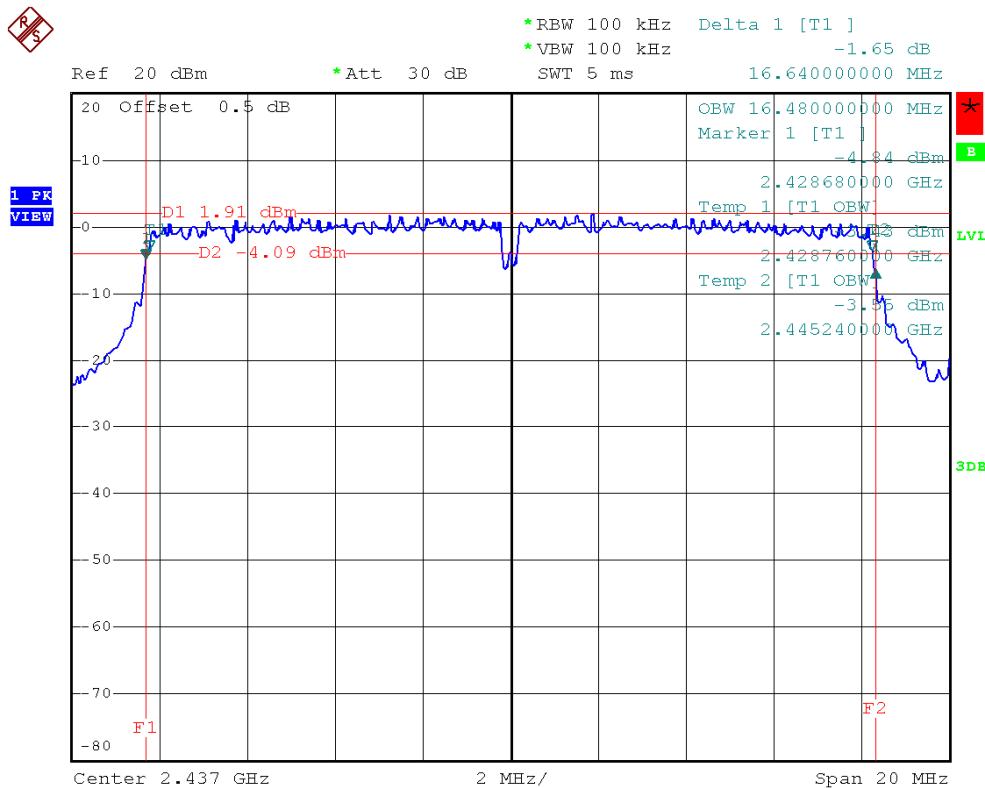


CH11

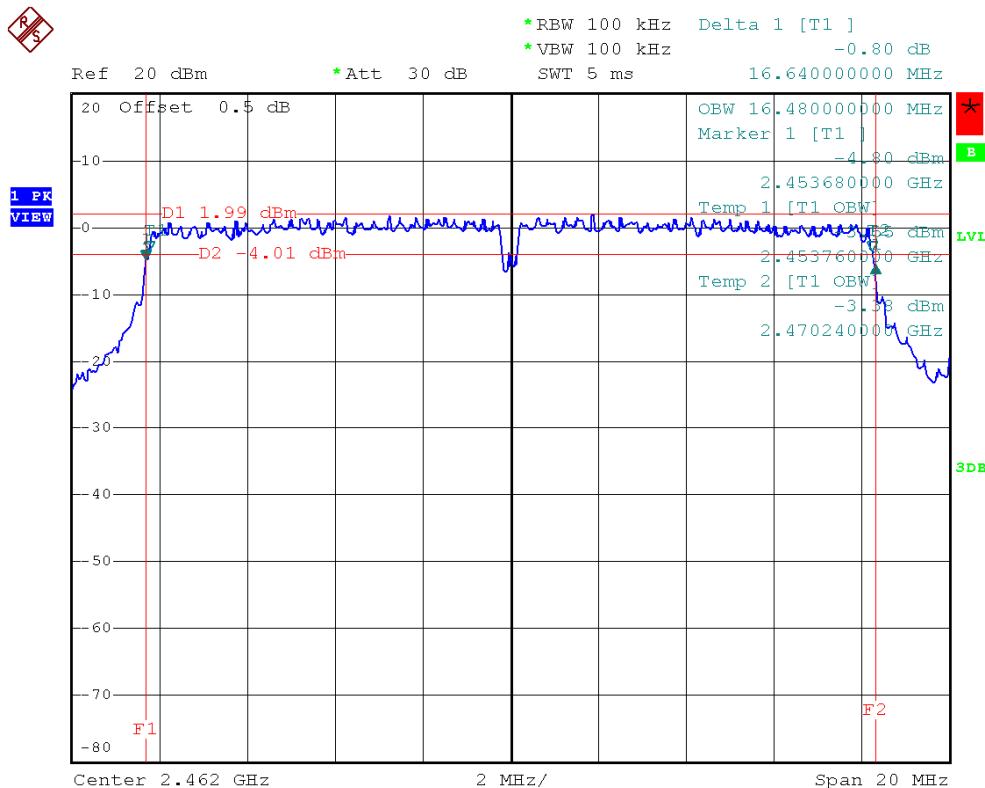




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	17.76	>=500KHz
CH06	2437	17.72	>=500KHz
CH11	2462	17.76	>=500KHz

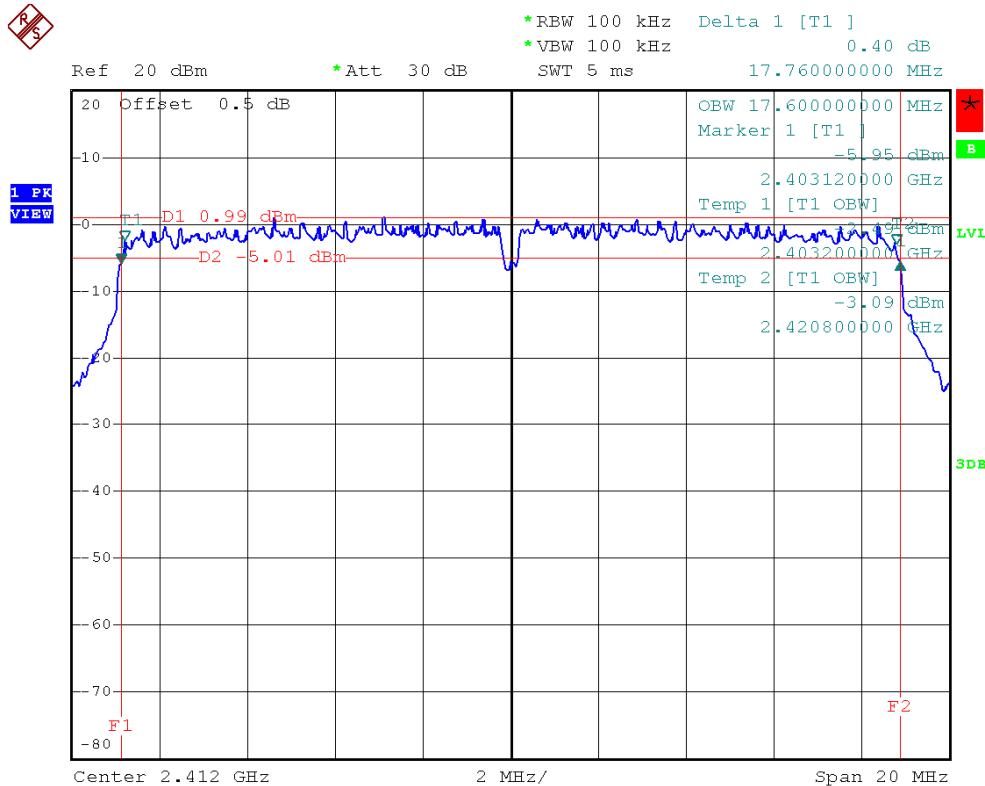
CH01



CH06

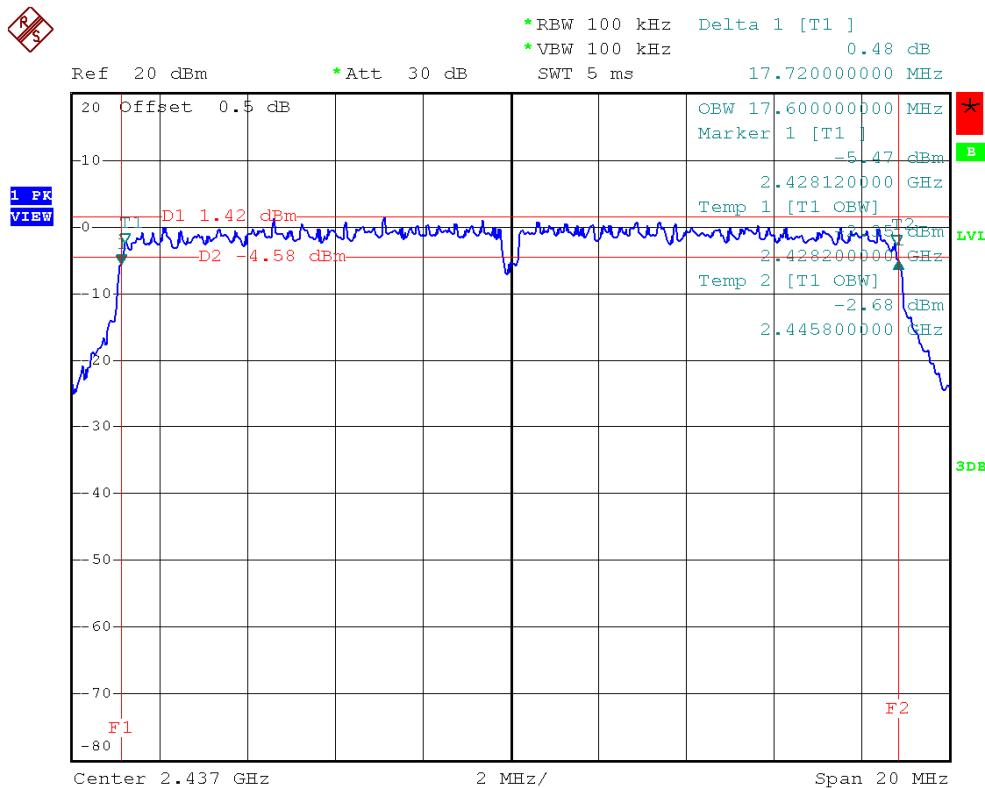


CH11

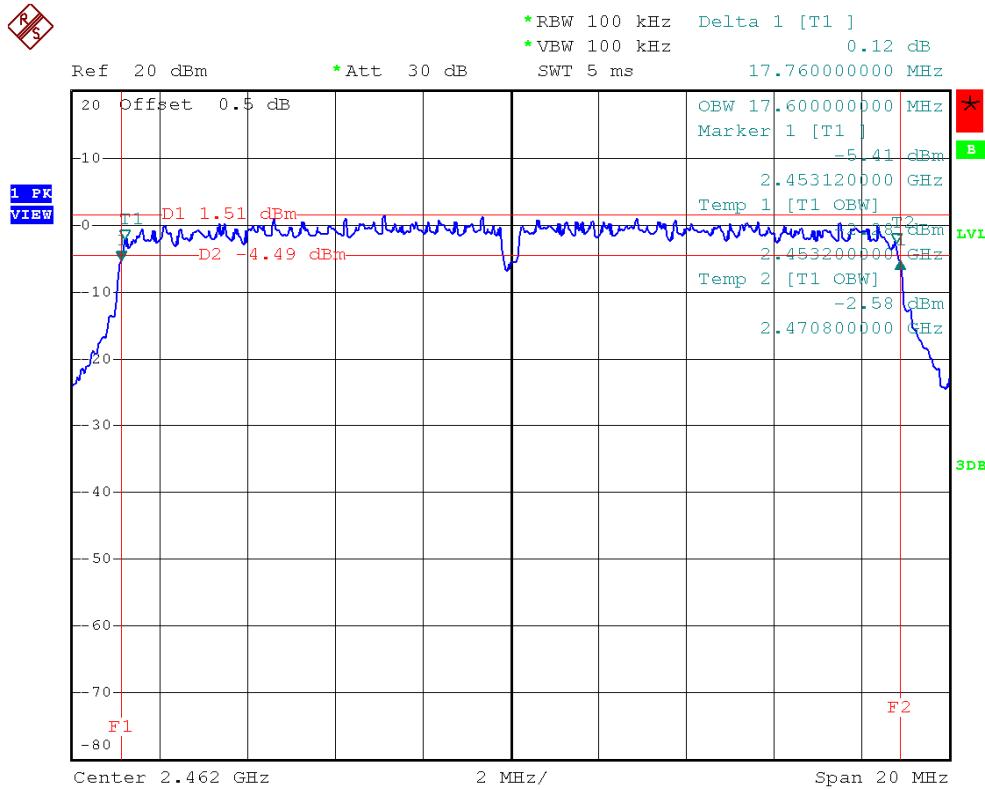




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03, CH06, CH09		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH03	2422	36.48	>=500KHz
CH06	2437	36.56	>=500KHz
CH09	2452	36.64	>=500KHz

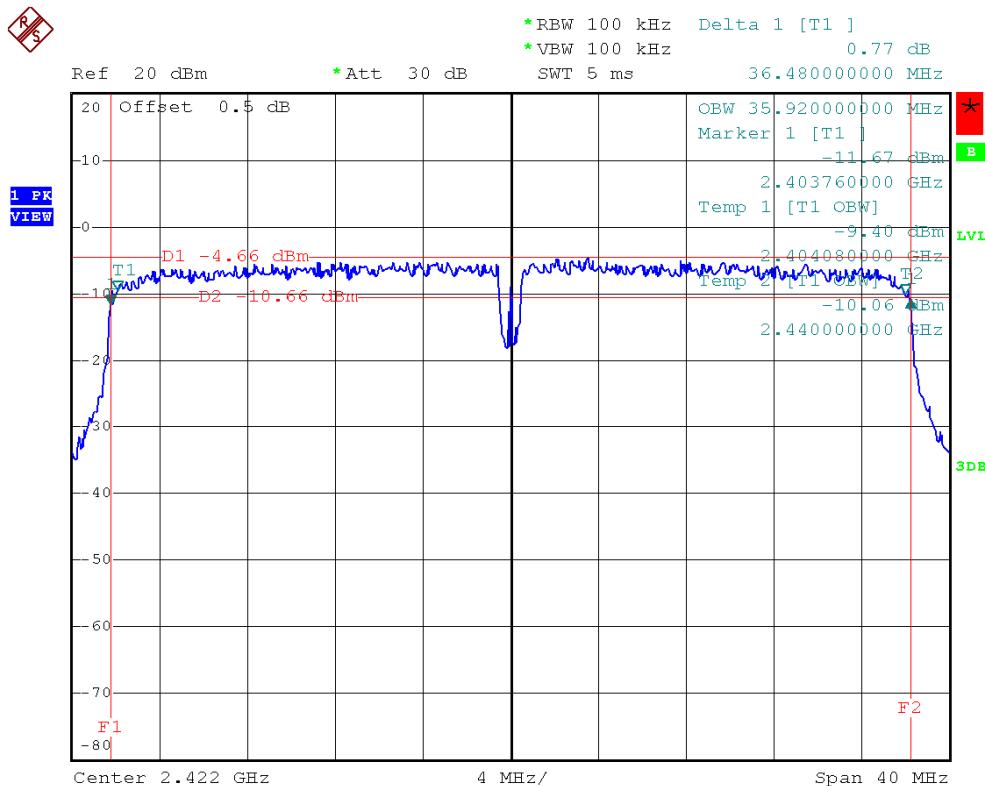
CH03



CH06

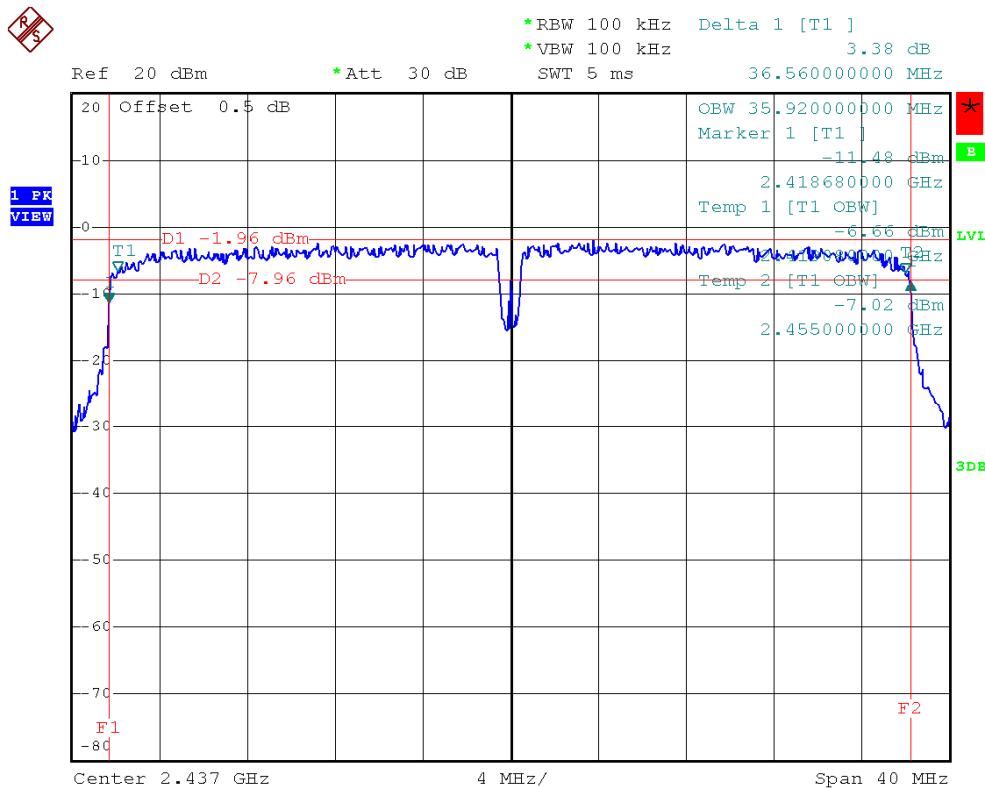

CH09

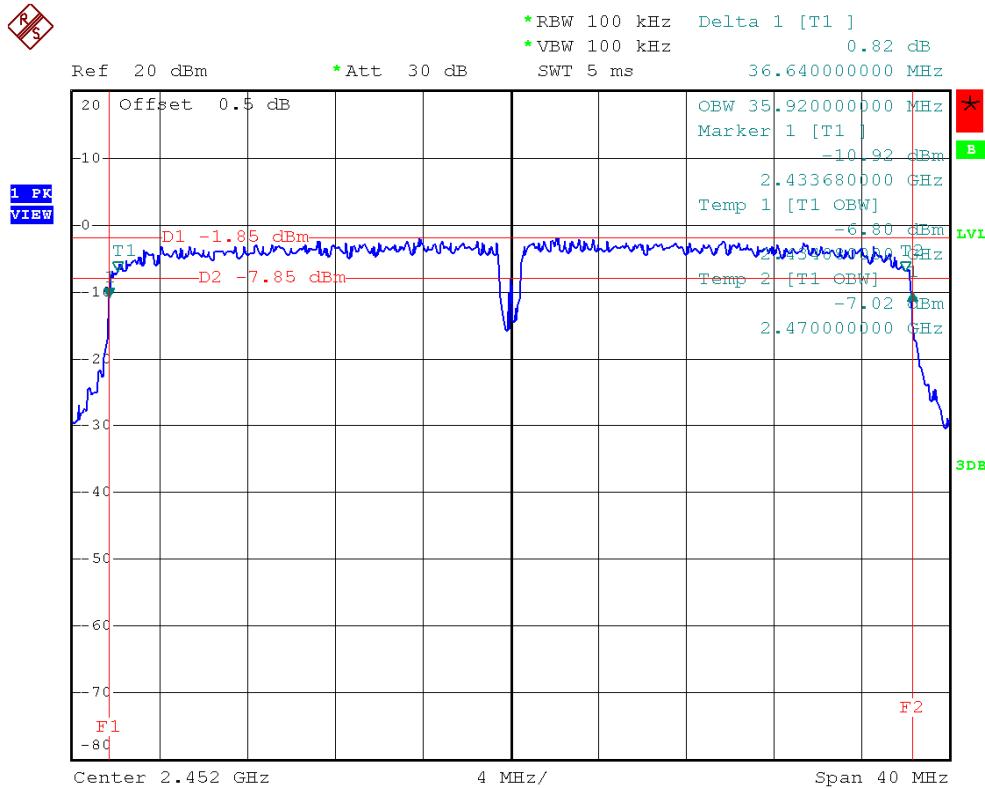



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2010
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

6.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.6 TEST RESULTS**

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR	
Temperature :	26 °C	Relative Humidity :	47%	
Test Voltage :	AC 120V/60Hz			
Test Mode :	802.11b/CH01, CH06, CH11			

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	19.85	30	1
CH06	2437	19.86	30	1
CH11	2462	19.94	30	1

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR	
Temperature :	26 °C	Relative Humidity :	47%	
Test Voltage :	AC 120V/60Hz			
Test Mode :	802.11g/CH01, CH06, CH11			

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	23.93	30	1
CH06	2437	23.92	30	1
CH11	2462	23.82	30	1



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	23.63	30	1
CH06	2437	23.66	30	1
CH11	2462	23.60	30	1

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03, CH06, CH09		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH03	2422	22.60	30	1
CH06	2437	23.65	30	1
CH09	2452	23.70	30	1



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP

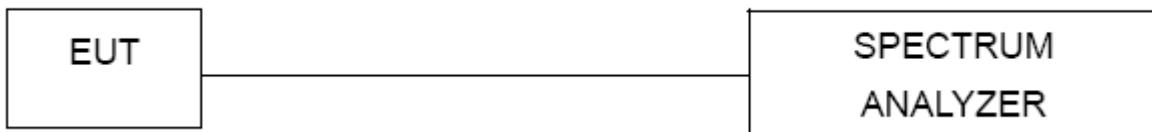

7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.1.6 TEST RESULTS**


EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH11		

Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2386.2	-45.89	2483.9	-45.64
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			




CH01

REFS

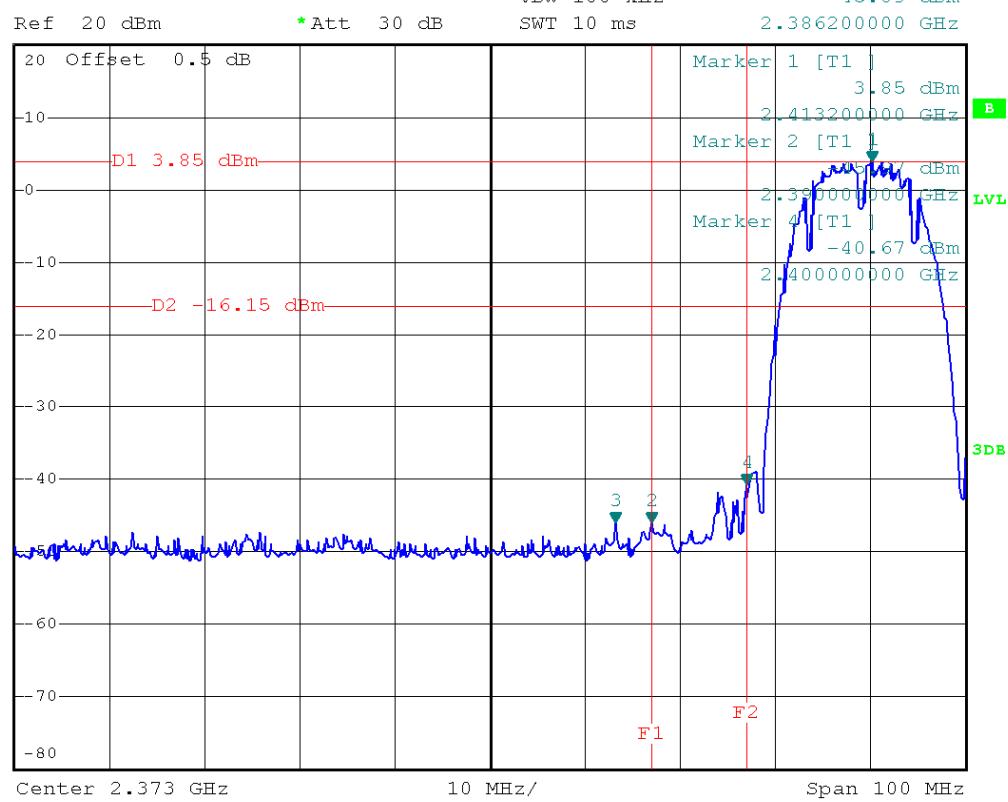

CH11

REFS

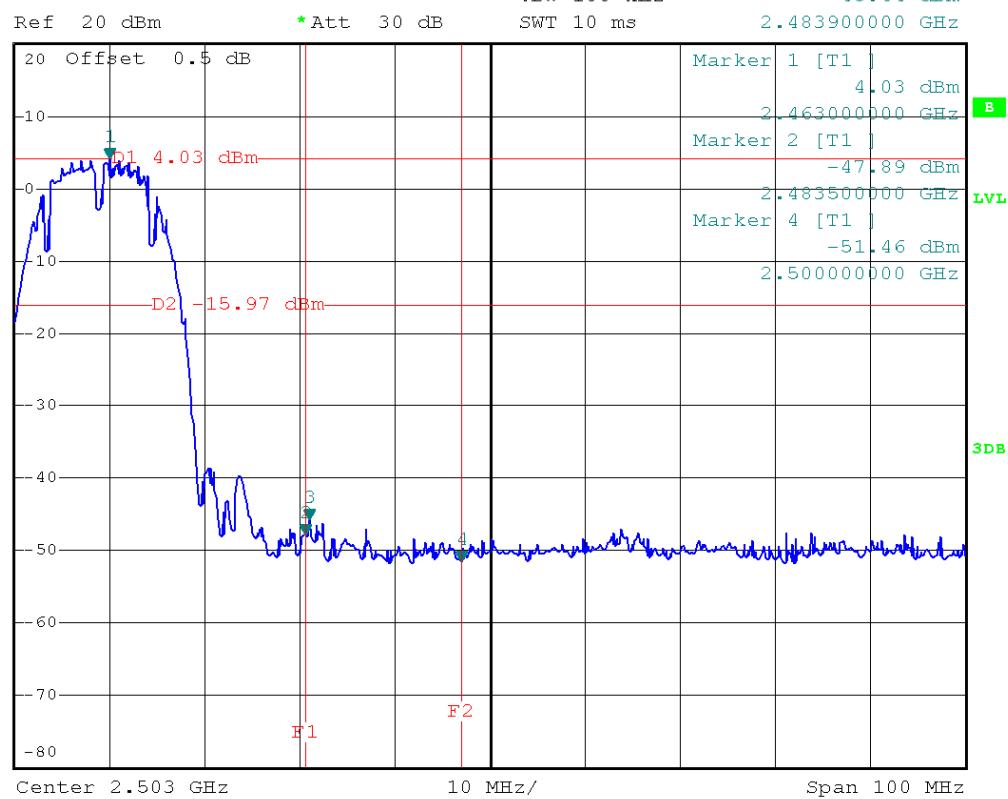




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH11		

Channel of Worst Data: CH1,CH11


The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2389.4	-37.15	2483.7	-36.42
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			



CH01

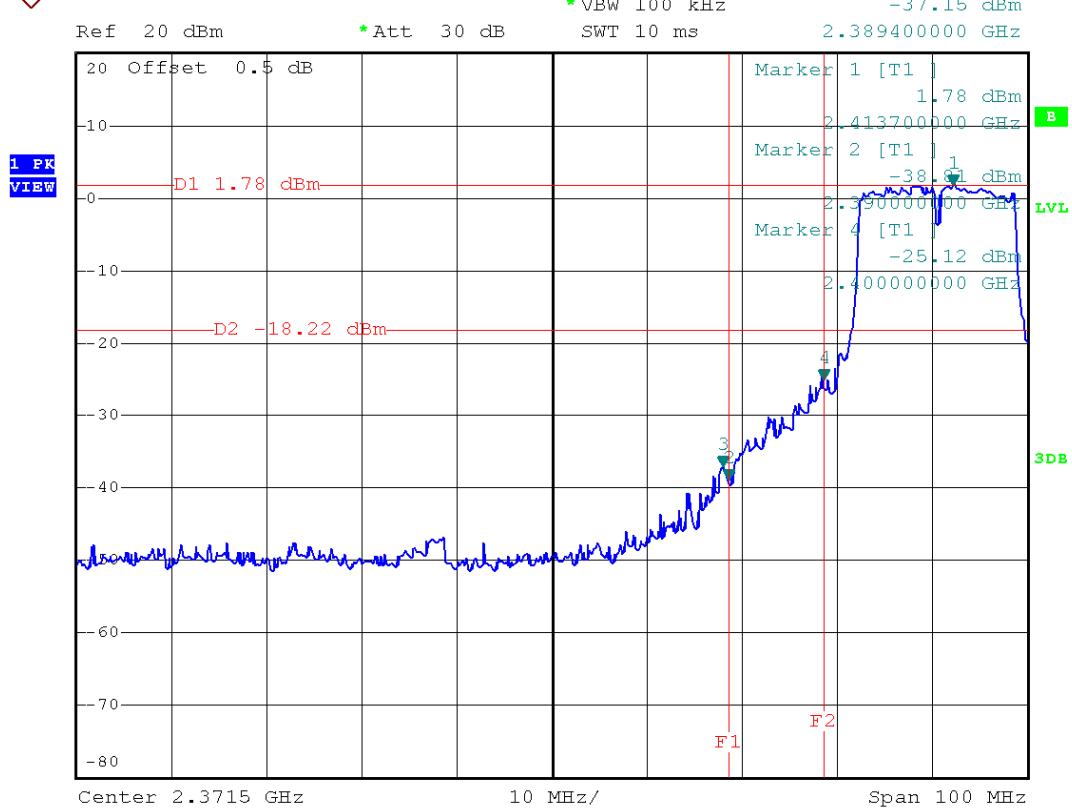

CH11

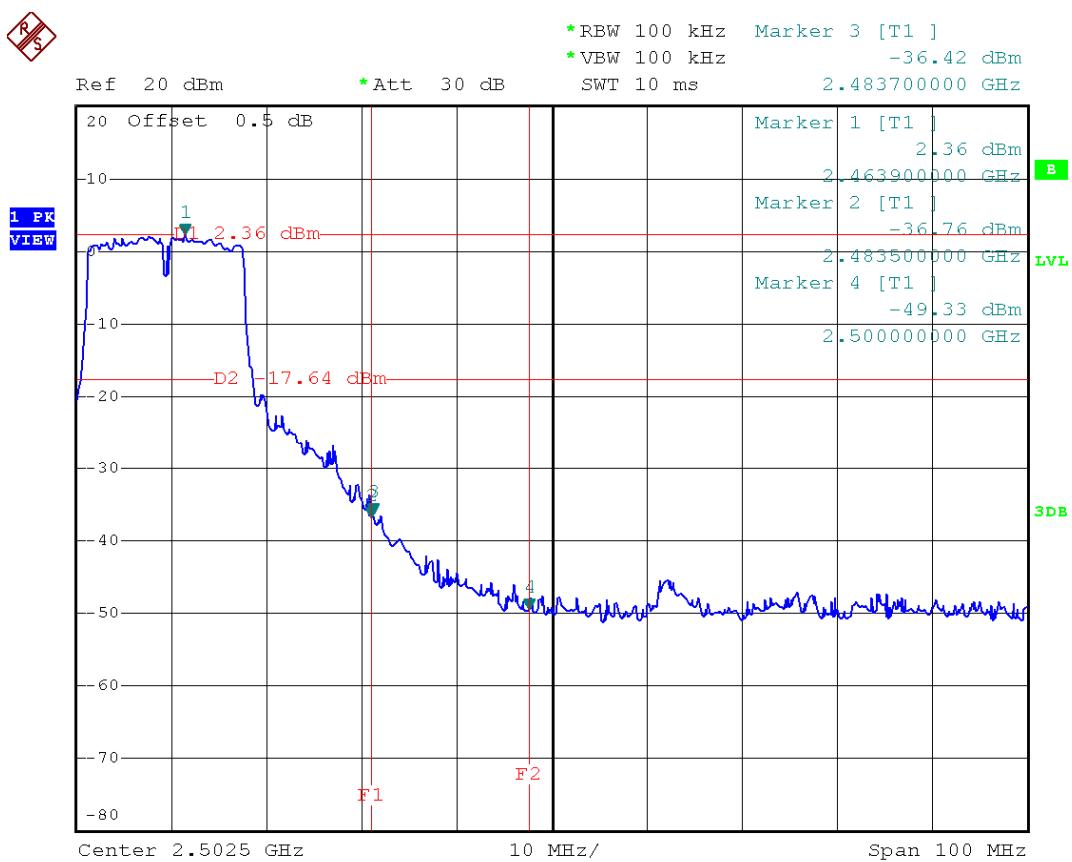



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01, CH11		


Channel of Worst Data: CH1,CH11

The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2389.6	-38.92	2483.7	-37.13
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			




CH01

REF S

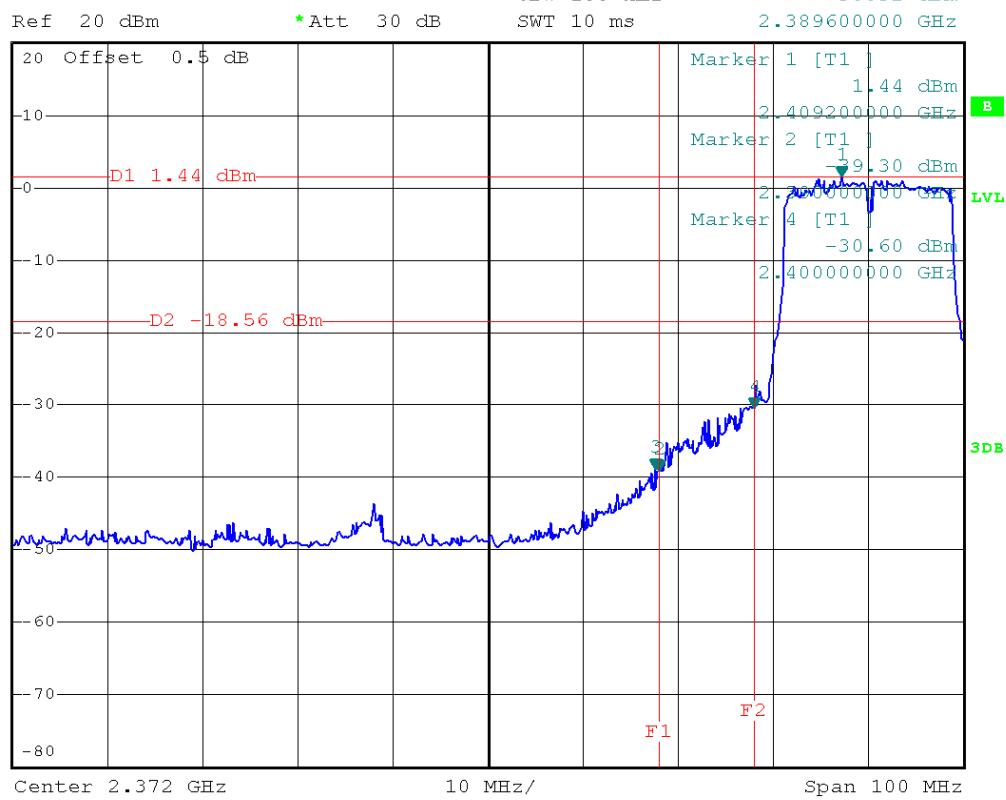

CH11

REF S

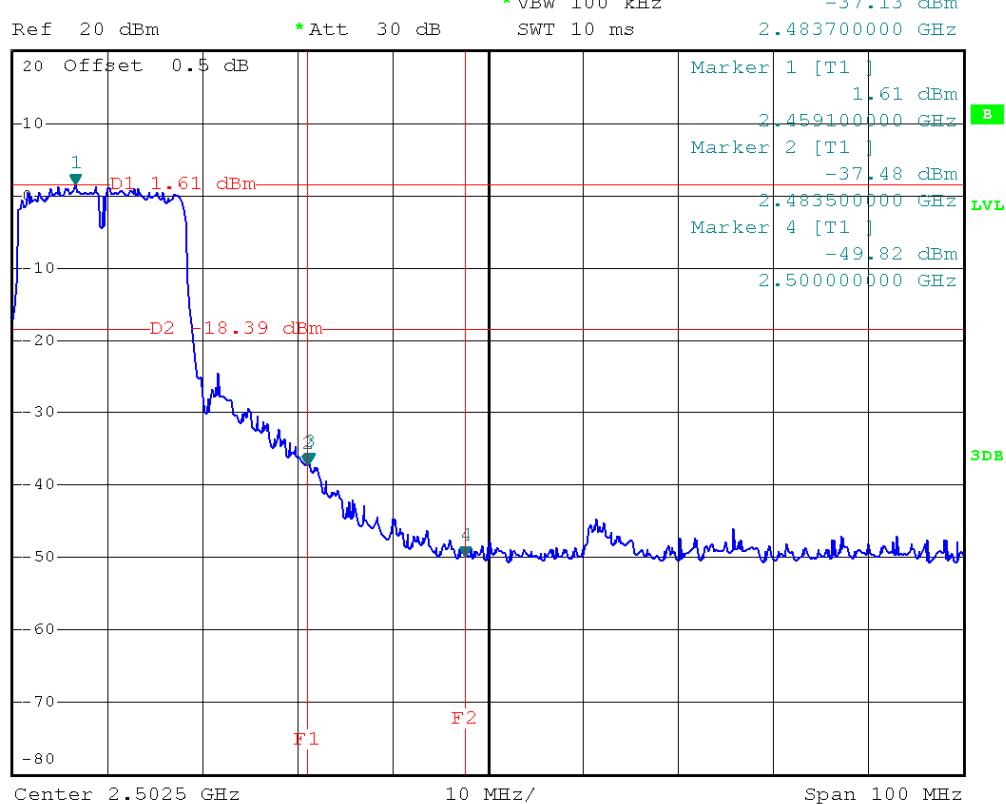




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03, CH09		

Channel of Worst Data: CH03,CH09			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2388.0	-46.95	2487.9	-34.76
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			

**CH03**

REFS

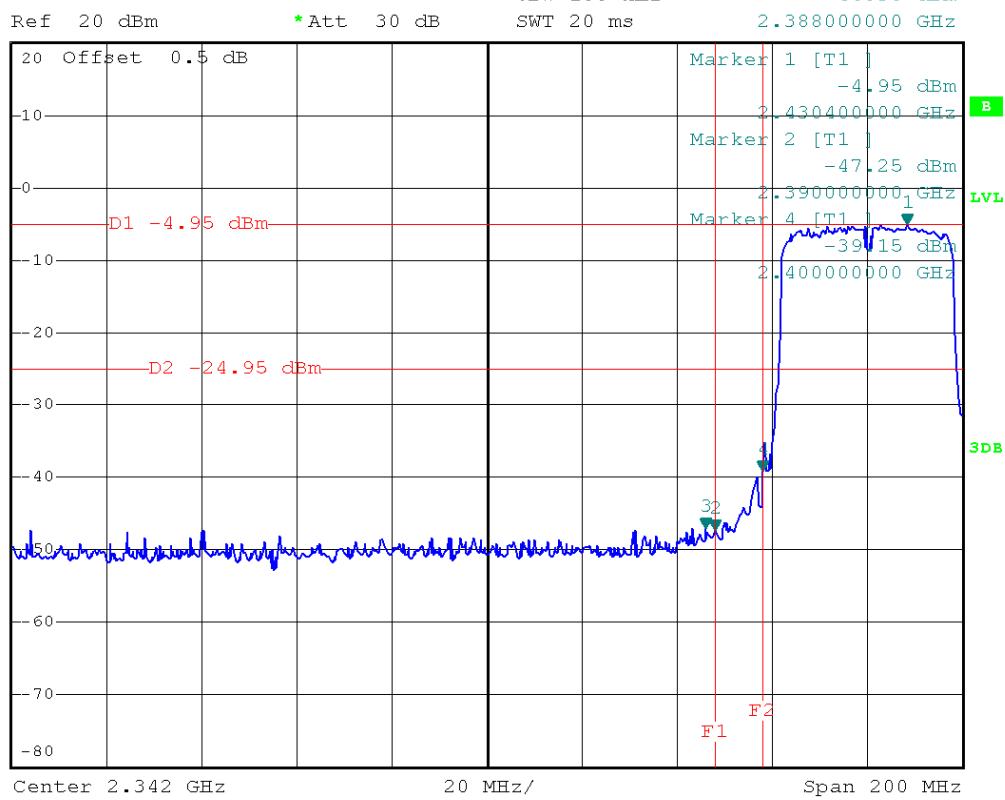


B

LVL

3DB

CH09

REFS

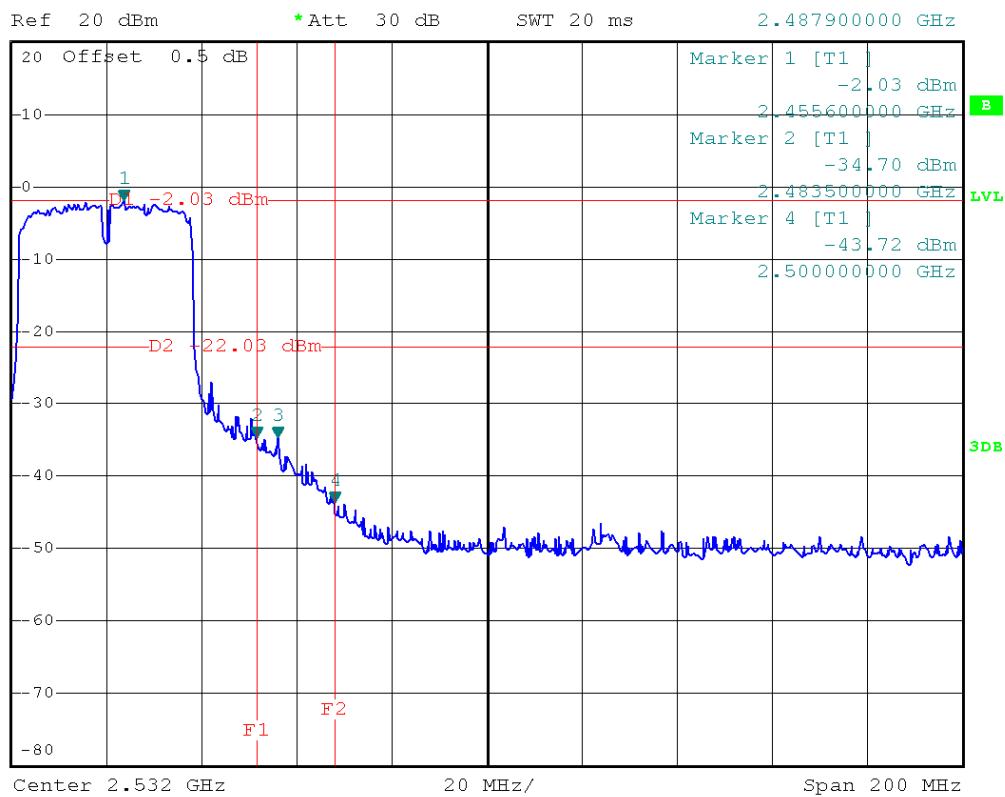

B

LVL

3DB



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP

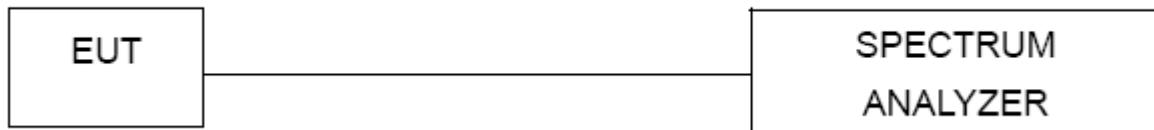


8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.1.6 TEST RESULTS**


EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-10.68	8
CH06	2437	-10.40	8
CH11	2462	-10.43	8

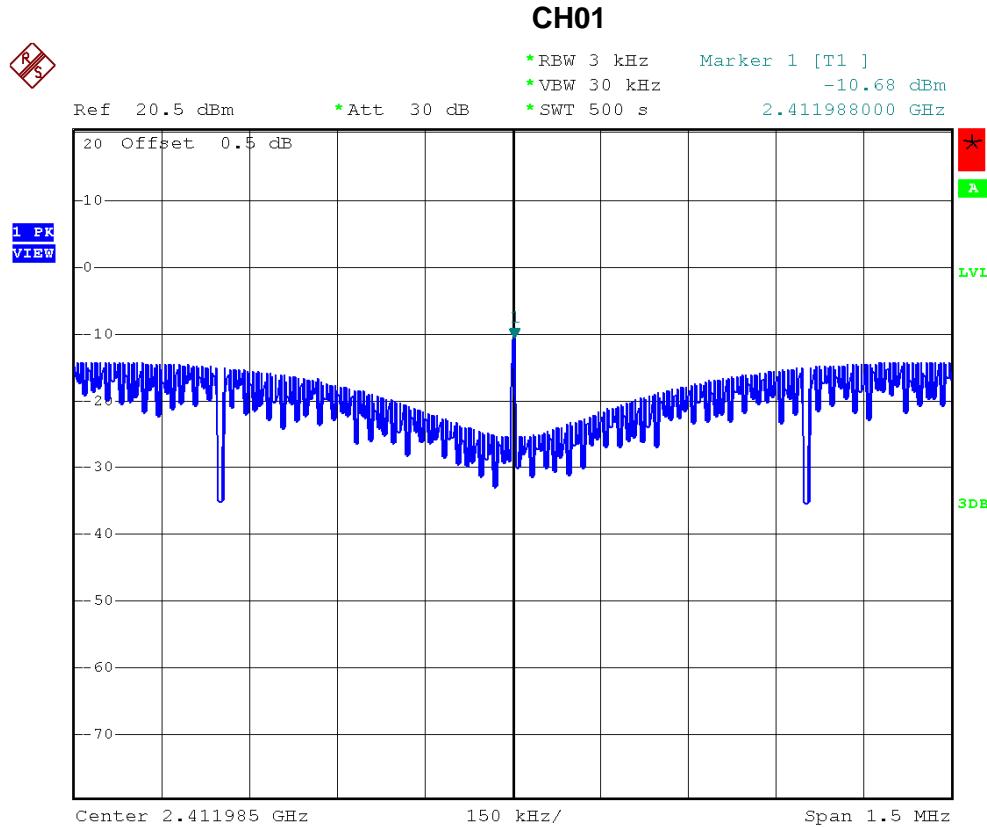




CH06

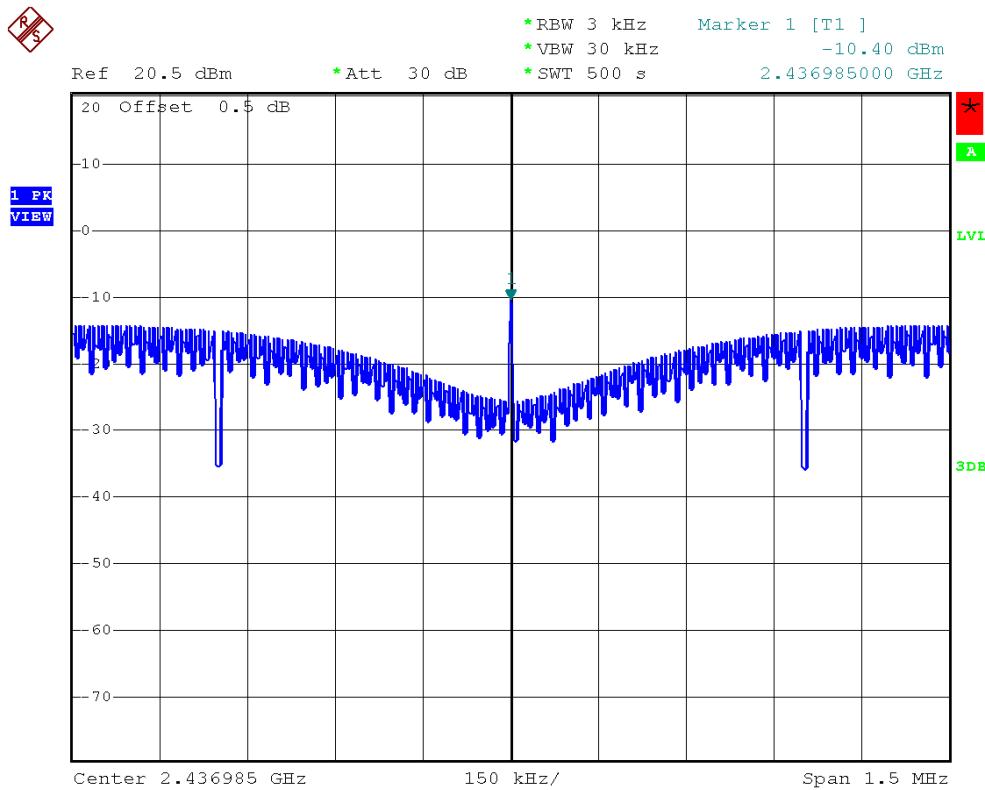


CH11

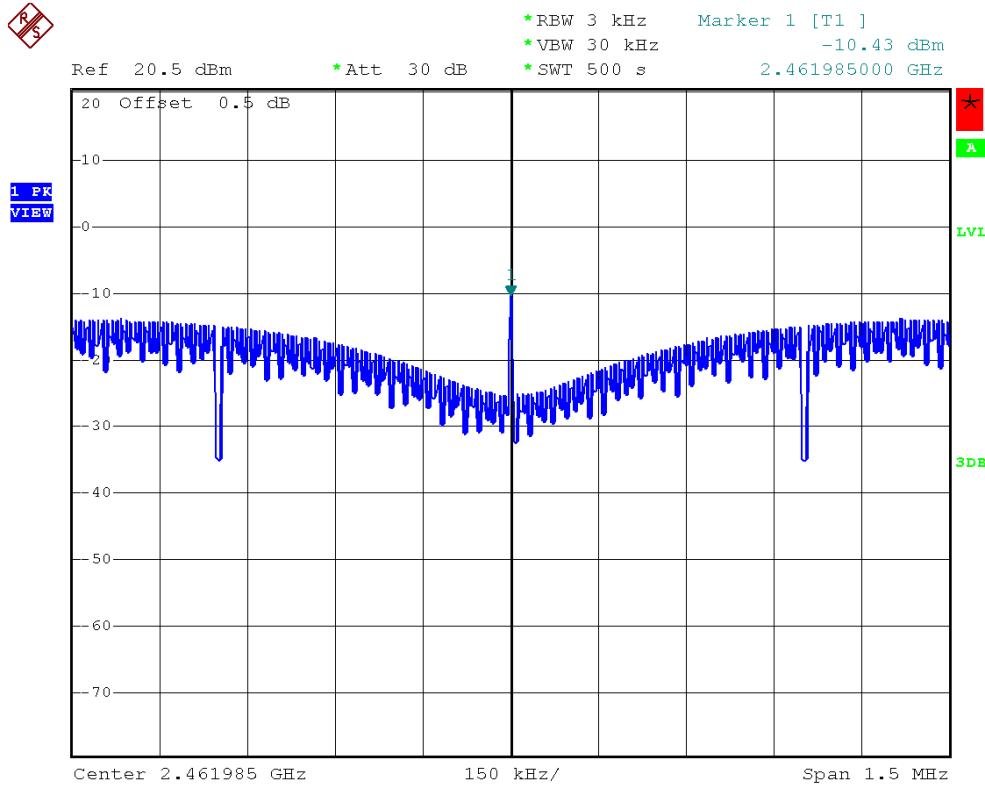




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-10.97	8
CH06	2437	-10.91	8
CH11	2462	-10.90	8

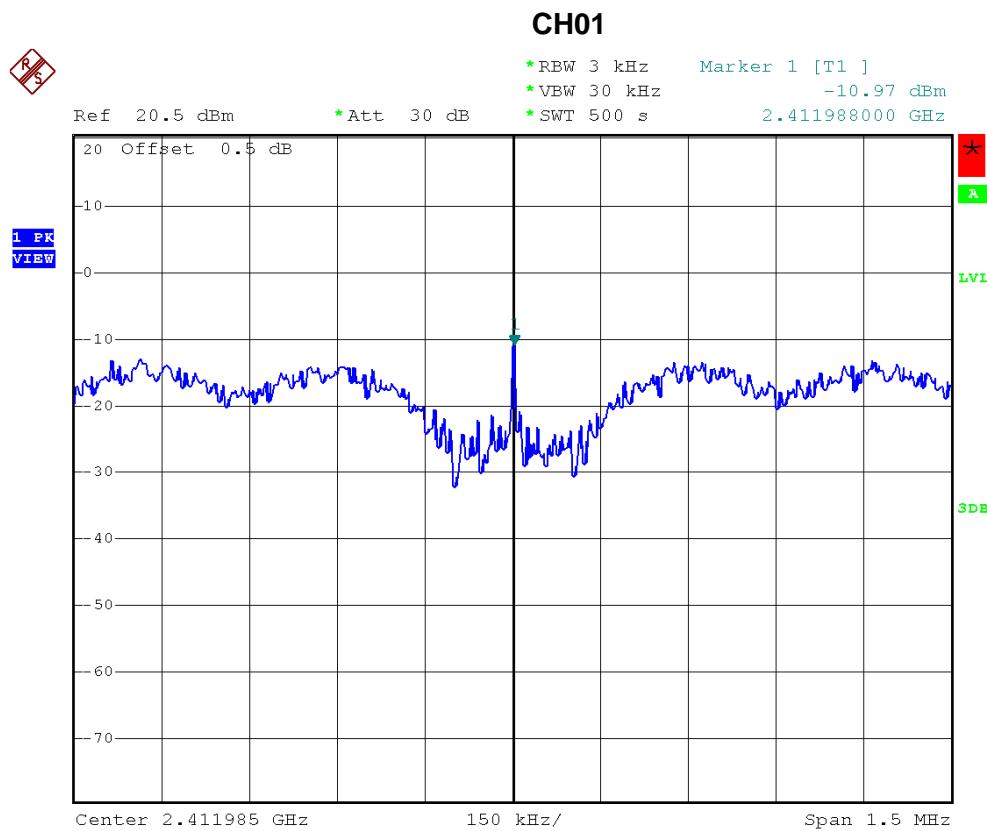




CH06

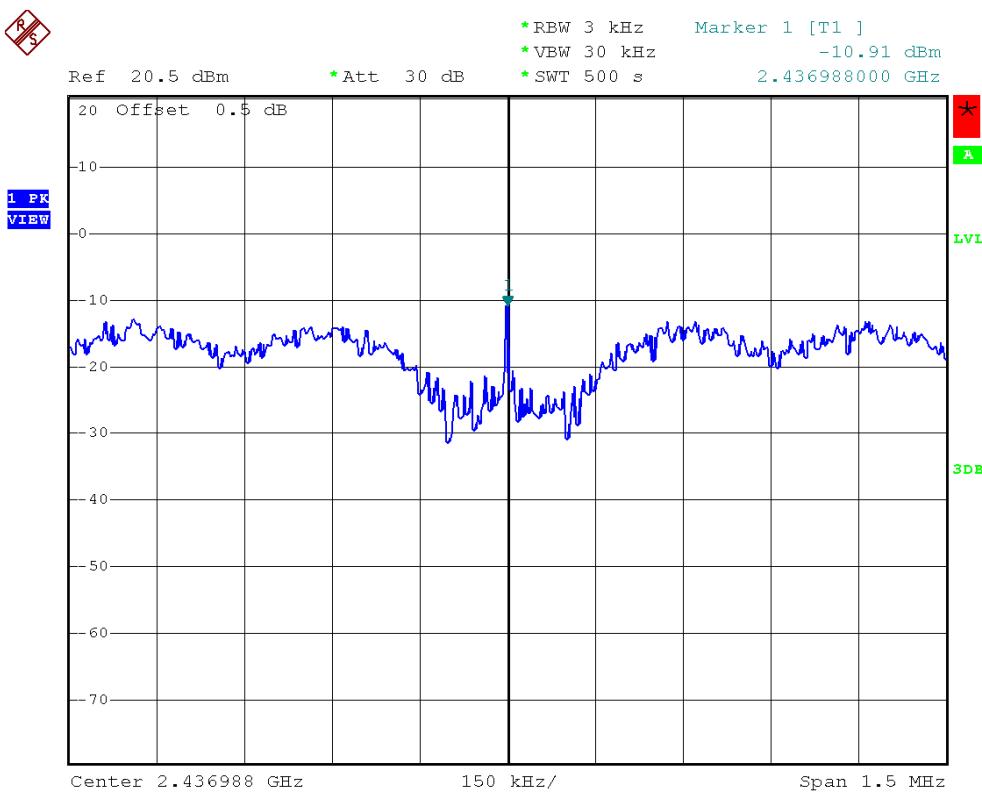


CH11

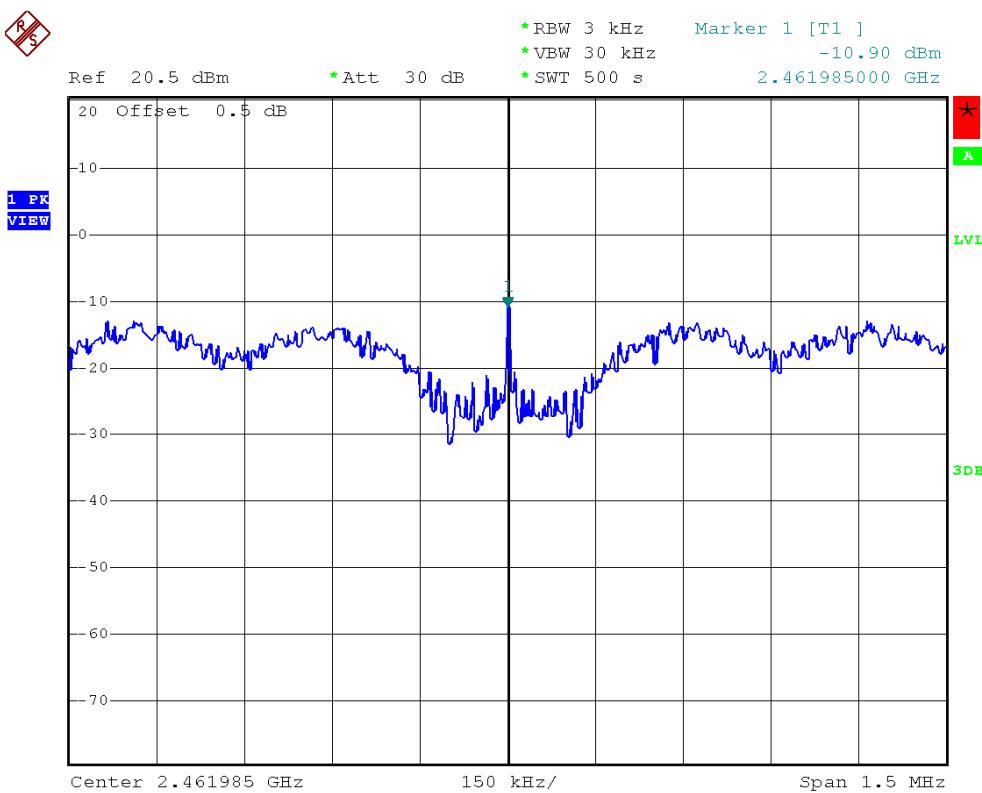




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/20M/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-10.89	8
CH06	2437	-10.74	8
CH11	2462	-10.54	8

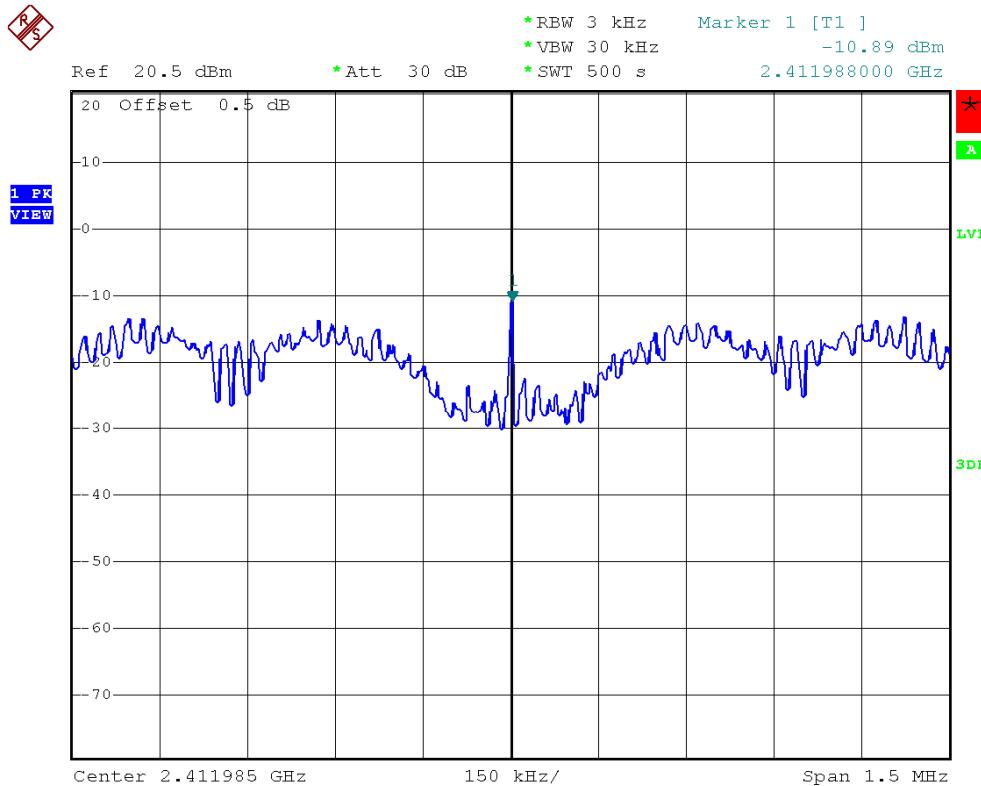
CH01



CH06

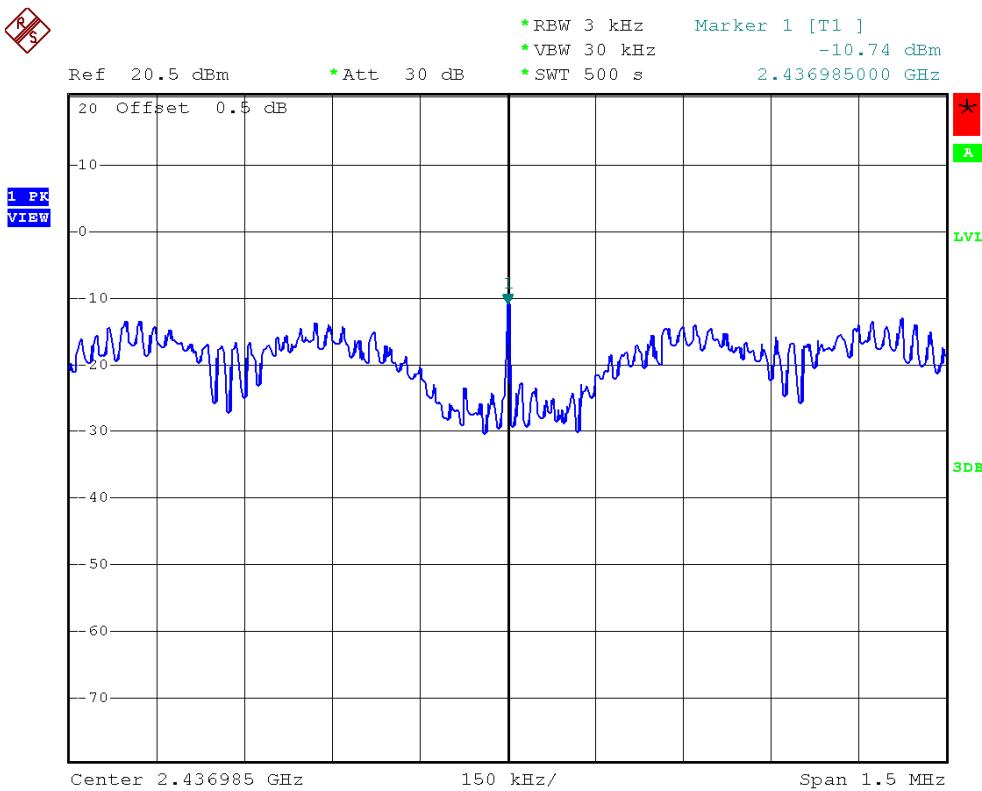


CH11

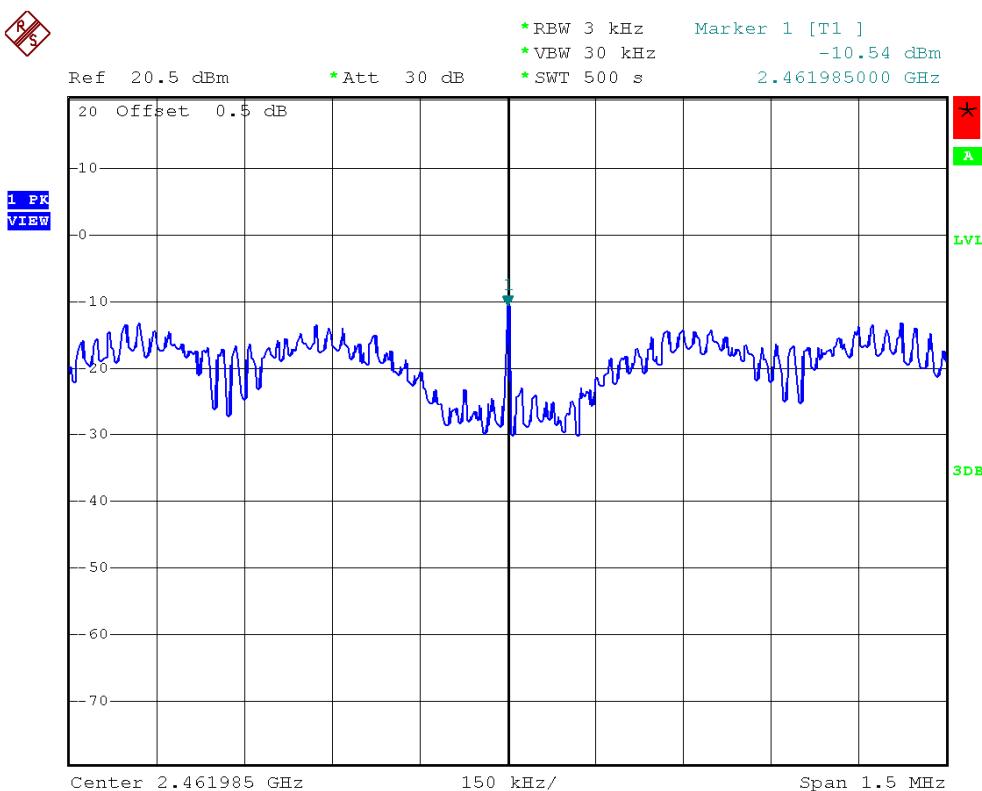




EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model No. :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n/40M/CH03, CH06, CH09		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH03	2422	-11.08	8
CH06	2437	-11.16	8
CH09	2452	-11.05	8

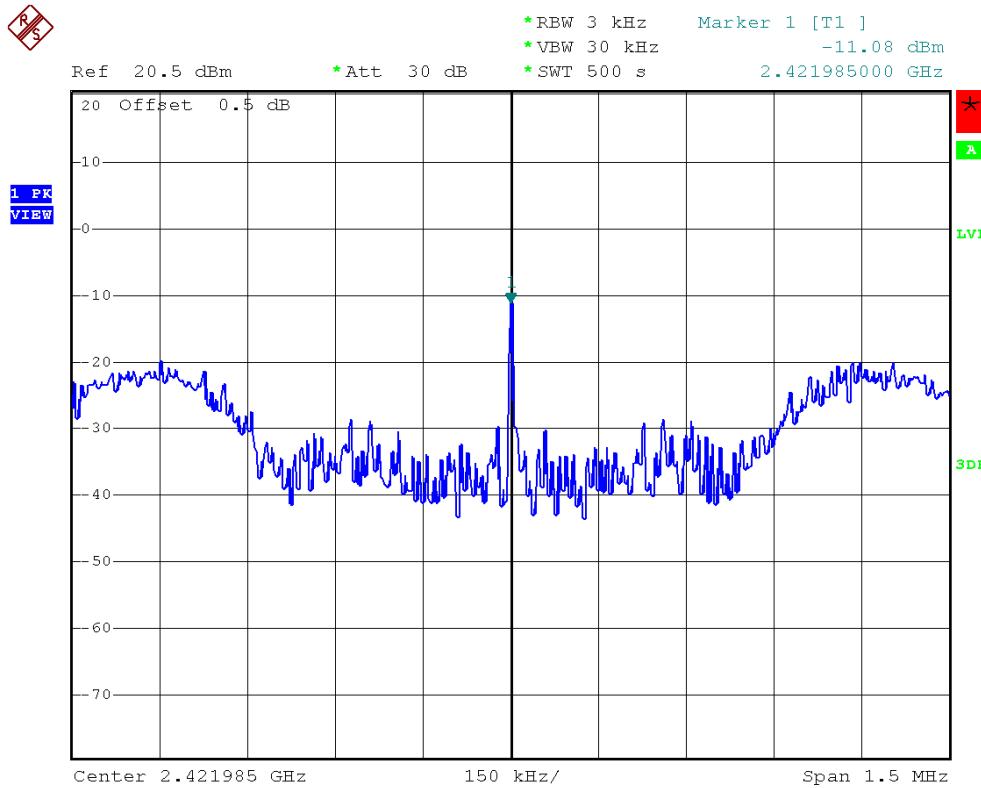
CH03



CH06

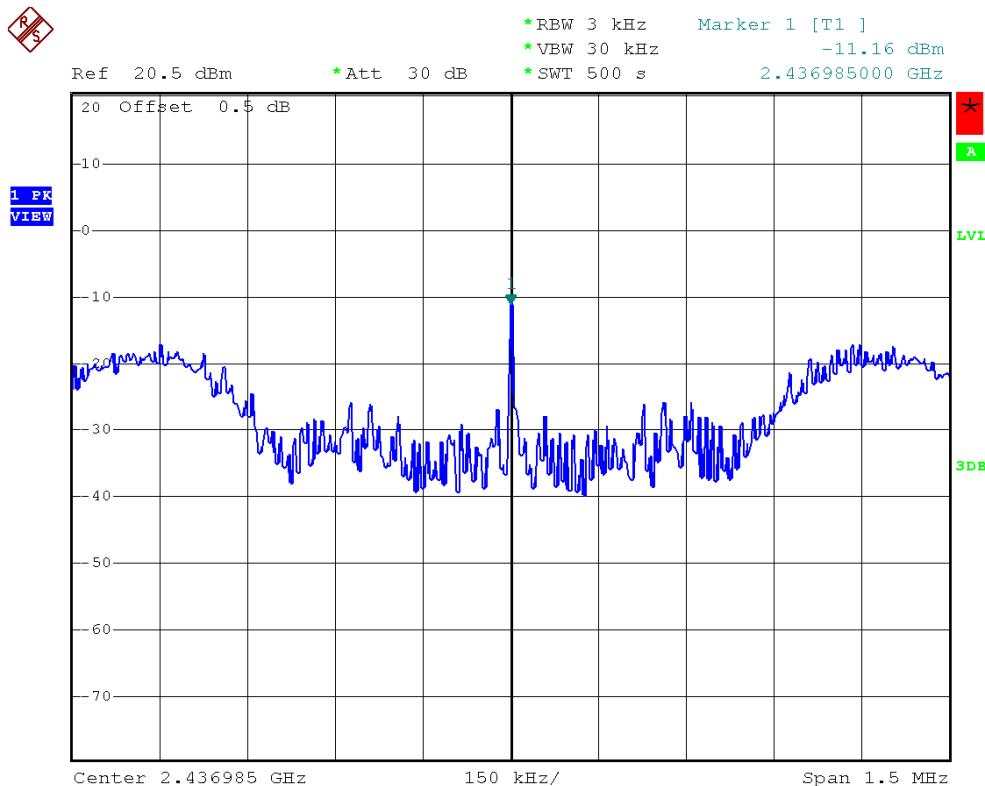

CH09

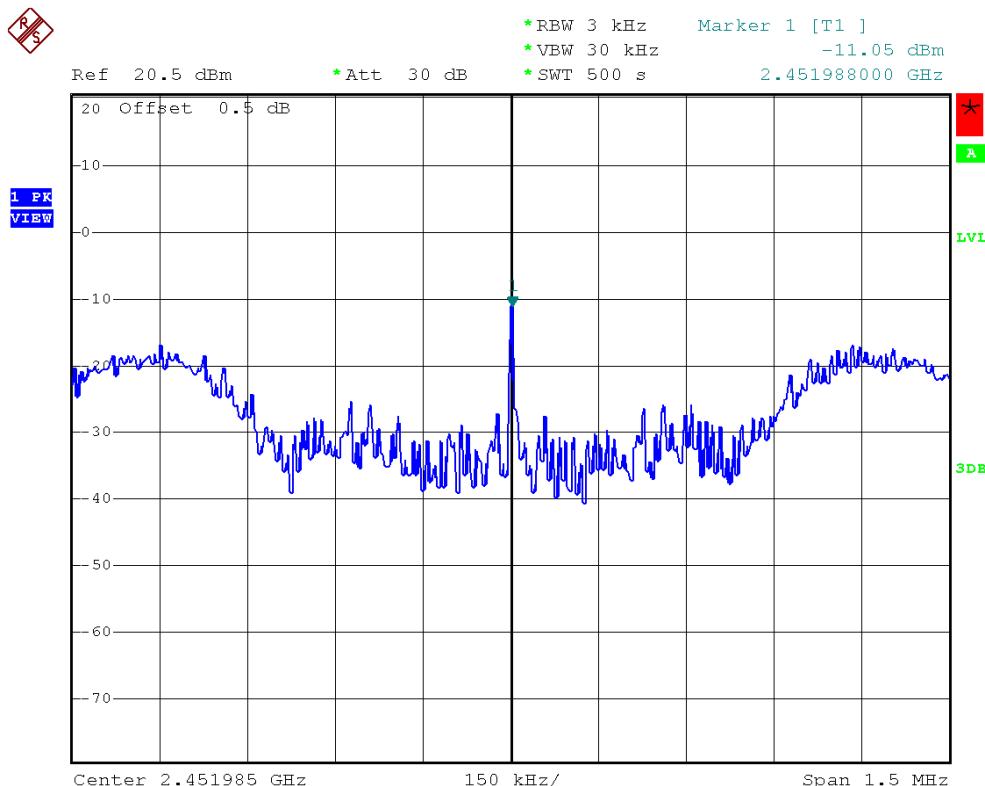



9. RF EXPOSURE TEST

9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2010
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**9.1.6 TEST RESULTS**

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model Name :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	3.48	2.2284	19.8500	96.6051	0.042850	1
2437	3.48	2.2284	19.8600	96.8278	0.042949	1
2462	3.48	2.2284	19.9400	98.6279	0.043747	1

EUT :	IEEE 802.11 bgn Wireless Router	Model Name :	SCT-2700WNR
Temperature :	13 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	3.48	2.2284	23.9300	247.1724	0.109635	1
2437	3.48	2.2284	23.9200	246.6039	0.109383	1
2462	3.48	2.2284	23.8200	240.9905	0.106893	1



EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model Name :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n HT20		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	3.48	2.2284	23.6300	230.6747	0.102318	1
2437	3.48	2.2284	23.6600	232.2737	0.103027	1
2462	3.48	2.2284	23.6000	229.0868	0.101613	1

EUT :	SCT Wireless Mini WiFi Wireless-N-Router	Model Name :	SCT-2700WNR
Temperature :	26 °C	Relative Humidity :	47%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11n HT40		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	3.48	2.2284	22.6000	181.9701	0.080714	1
2437	3.48	2.2284	23.6500	231.7395	0.102790	1
2462	3.48	2.2284	23.7000	234.4229	0.103980	1

Remark :

- (1) The MIMO test requirement, MPE shall measure by using the total sum power of each transmitter chain.